


使用说明书



基本参数:

蓝牙规格：V5.0
支持蓝牙协议：
支持L2CAP/A2DP(AVCTP/AVDTP/AVRCP),用来接收立体声音频信号,通过协议可以控制音频发射端的上下曲操作;支持HSP/HFP(Handsfree profile),具有免提功能,可以进行语音通讯
无线传输范围：> 10M
音频性噪比：≥85db
电池容量：500mAh
内置电压：3.7V
正常音量播放：> 1H
喇叭规格：φ52mm
喇叭功率：4Ω/3W
频率响应：120HZ-18KHZ
尺寸：107mm*105mm*92mm
单机重量：约330g
充电电压：5V/500mA


一、功能特点

1、采用先进的蓝牙音频解码芯片,支持所有蓝牙设备的连接;

2、支持FM收音,可直接搜索收听区域的电台;
3、音色柔和清晰有动感,各层次分明;
4、支持TF卡和U盘直读;
5、支持LINE IN音频输入,为你提供电脑音箱功能。
6、可直接连接手机/平板电脑/及电视蓝牙配对播放音乐,蓝牙接收距离远可长达10米以内;
7、支持免提通话功能,内置高灵敏度麦克风,让手机通话拥有无比畅快的通话。
8.支持对箱TWS功能。

二、功能指示

①电源开关：当拨动到OFF时为关机状态,ON为工作状态
②U盘输入接口：当U盘插入时可解码MP3格式的音频播放
③ MicroTF卡输入接口：当Micro TF卡插入时可解码MP3格式的音频播放
④ AUX输入接口：3.5音频头外

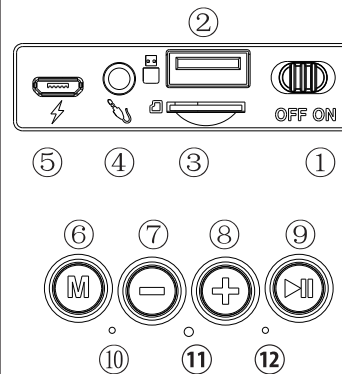


音输入

⑤DC 5V充电接口 (USB micro 充电接口)
⑥模式按键：在音乐的模式下,短按为各模式切换 (U盘、TF卡、FM、蓝牙) LINE IN线性输入为硬切换;两台音箱同时在开机蓝牙状态且未连接的状态下,长按其中一台音箱的模式键2-3S听到提示音且其中一台指示灯长亮即连TWS成功,再连接手机即可。

⑦ 上曲按键：在音乐的模式下,短按为“上一曲”长按音量递减
⑧下曲按键：在音乐的模式下,短按为“下一曲”长按音量递加
⑨暂停按键：在音乐的模式下 (U盘、TF卡、LINE IN、蓝牙),短按为“播放、暂停”,在蓝牙模式并配对手机情况下,来电话时短按一下为免提接听,再按一下为挂断电话;来电话时长按为自动搜索电台、在搜台过程中短按一下为取消往后自动搜索电台);
⑩充电指示灯 (充电时红灯亮,充满电后红灯熄灭)
⑪通话麦克风接收孔
⑫工作状态指示灯
备注:在收音模式下,请插入音频线或充电线增加收音信号强度,收音效果会更好。

USER MANUAL



PRODUCT SPECIFICATIONS:

- BT: V5.0
- Support: L2CAP/A2DP(AVCTP/AVDTP/AVRCP),can receive AUDIO signal and control the AUDIO device.
- Support HSP/HFP(Handsfree profile), with HANDS-FREE functions.
- Working distance:10M
- SNR:≥85db
- Battery: 3.7V 500mah
- Normal volume playing time:1H
- Speaker driver: φ52mm
- Speaker Power: 3W
- Frequency response: 120HZ-18KHZ
- Unit size: 107*105*92mm
- Unit weight: about 330g (not includ accessories)
- Charging:5V/500MAH


PRODUCT FEATURE:

1.International advanced BT chip and circuit design techniques, support all wireless devices.
2.With FM function, can search

radio station broadcast automatically
3.With Hi-Fi speaker, to make sure the clear and bright sound.
4.Support Micro SD card and USB card, play MP3 format audio.
5.With AUX line in, can directly connect the outside devices, for example, tablet PC/TV/cell phones.
6.Can play music after pairing with BT device .for example mobile/ MID / TV, the working distance is more than 10M.
7.With Mic for hands-free phone call function.
8.Support TWS.

KEY & SLOT FUNCTION:

1.Power switch: power on /power off.
2.USB slot: It can decode and play MP3 format audio when put the USB card into the slot.
3.TF slot: It can decode and play Mp3 format audio when put TF card into the slot.
4.AUX line in slot: Use the Mini

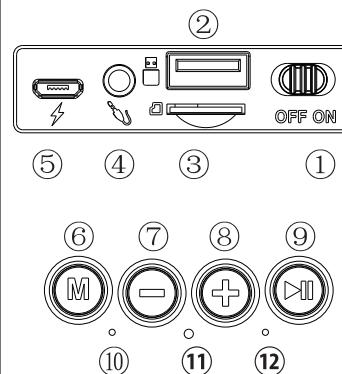

3.5 head input through outside devices.

5.DC 5V slot: Use the standard Micro USB charging cable for power charging.
6.short press to swith model(USB card/TF card/BT/line in/FM). Keep the TWS speaker under BT mode without pairing,press the “M” key for 3 seconds either of the speaker until hear a hint“du du” for TWS mode,then can paire the mobile.

7.When play music, Press short for last song, long press to turn down the volume.
8.When play music, press short for next song, long press to turn up the volume.
9.When play music,(USB card/TF card/BT/line in), short press for “play/pause”. Under BT mode with mobile paired,when call coming,press short to answer a call hands-free,press again to hand up,long press to refuse a call. In FM mode, press short to search station automatically, press again to stop searching.
10.Charging Indicator light: red when charging,indicator light off when full charging
11.Mic
12.Working Indicator

NOTE: In the FM mode, put in micro charging cable to get better FM radio station.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Warning: changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment

The device has been evaluated to meet general RF exposure requirements, the device can be used in portable exposure condition with restriction