



# FCC REPORT

**Report Reference No.**..... : **TRE1712001101** R/C.....: 68626

**FCC ID**..... : **2AEY7-S8A003**

**Applicant's name**..... : **Bak USA Technologies Corp.**

Address..... : 425 Michigan Avenue,Buffalo,New York 14203,USA

Manufacturer..... : Bak USA Technologies Corp.

Address..... : 425 Michigan Avenue,Buffalo,New York 14203,USA

**Test item description** ..... : **Tablet PC**

Trade Mark ..... : -

Model/Type reference..... : Seal8Pro

Listed Model(s) ..... : -

**Standard** ..... : **FCC Part 24: PERSONAL COMMUNICATIONS SERVICES**  
**FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES**

Date of receipt of test sample..... : Dec.04, 2017

Date of testing..... : Dec.05, 2017- Dec.13, 2017

Date of issue..... : Dec.14, 2017

**Result**..... : **Pass**

Compiled by  
( position+printedname+signature).... : File administrators Candy Liu

Supervised by  
(position+printedname+signature).... : Project Engineer : Edward Pan

Approved by  
(position+printedname+signature).... : Manager Hans Hu

**Testing Laboratory Name** ..... : **Shenzhen Huatongwei International Inspection Co., Ltd.**

Address..... : 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

**Shenzhen Huatongwei International Inspection Co., Ltd. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen Huatongwei International Inspection Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen Huatongwei International Inspection Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

## Contents

<b>1.</b>	<b><u>TEST STANDARDS AND REPORT VERSION</u></b>	<b>3</b>
1.1.	Applicable Standards	3
1.2.	Report version	3
<b>2.</b>	<b><u>TEST DESCRIPTION</u></b>	<b>4</b>
<b>3.</b>	<b><u>SUMMARY</u></b>	<b>5</b>
3.1.	Client Information	5
3.2.	Product Description	5
3.3.	Operation state	6
3.4.	EUT operation mode	7
3.5.	EUT configuration	8
3.6.	Modifications	8
<b>4.</b>	<b><u>TEST ENVIRONMENT</u></b>	<b>9</b>
4.1.	Address of the test laboratory	9
4.2.	Test Facility	9
4.3.	Equipments Used during the Test	10
	<b><u>RF CONDUCTED</u></b>	<b>10</b>
4.4.	Environmental conditions	11
4.5.	Statement of the measurement uncertainty	11
<b>5.</b>	<b><u>TEST CONDITIONS AND RESULTS</u></b>	<b>12</b>
5.1.	Conducted Output Power	12
5.2.	99% & -26 dB Occupied Bandwidth	13
5.3.	Conducted Spurious Emissions	14
5.4.	Band Edge	15
5.5.	ERP AND EIRP	16
5.6.	Radiated Spurious Emssion	22
5.7.	Frequency stability V.S. Temperature measurement	31
5.8.	Frequency stability V.S. Voltagemasurement	32
5.9.	Peak-Average Ratio	33
<b>6.</b>	<b><u>TEST SETUP PHOTOS OF THE EUT</u></b>	<b>34</b>
<b>7.</b>	<b><u>EXTERNAL AND INTERNAL PHOTOS OF THE EUT</u></b>	<b>35</b>

## 1. Test standards and Report version

### 1.1. Applicable Standards

The tests were performed according to following standards:

[FCC Part 24](#):PUBLIC MOBILE SERVICES

[FCC Part 27](#):MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#):Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.

[FCC Part 2](#):FREQUENCY ALLOCA-TIONS AND RADIO TREATY MAT-TERS; GENERAL RULES AND REG-ULATIONS

[971168 D01 Power Meas License Digital Systems v02r02](#):provides a methodology for fully characterizing the fundamental power of wideband (> 1 MHz) digitally modulated RF signals acceptable to the FCC for demonstrating compliance for licensed transmitters.

### 1.2. Report version

Version No.	Date of issue	Description
00	Dec.14, 2017	Original

## 2. Test Description

Test Item	Section in CFR 47	Result	Test Engineer
RF Output Power	Part 2.1046 Part 24.232(c) Part 27.50	Pass	William Wang
99% & -26 dB Occupied Bandwidth	Part 2.1049 Part 24.238(b)	Pass	William Wang
Conducted Spurious Emissions	Part 2.1051 Part 24.238 Part 27.53	Pass	William Wang
Band Edge	Part 2.1051 Part 24.238 Part 27.53	Pass	William Wang
ERP and EIRP	Part 27.50 Part 24.232(b)	Pass	William Wang
Radiated Spurious Emissions	Part 2.1053 Part 24.238 Part 27.53	Pass	William Wang
Frequency stability vs. temperature	Part 2.1055(a)(1)(b) Part 24.235 Part 27.54	Pass	William Wang
Frequency stability vs. voltage	Part 2.1055(d)(1)(2) Part 24.235 Part 27.54	Pass	William Wang
Peak-Average Ratio	Part 24.232(d) Part 27.50	Pass	William Wang

Note: The measurement uncertainty is not included in the test result.

### 3. SUMMARY

#### 3.1. Client Information

Applicant:	Bak USA Technologies Corp.
Address:	425 Michigan Avenue, Buffalo, New York 14203, USA
Manufacturer:	Bak USA Technologies Corp.
Address:	425 Michigan Avenue, Buffalo, New York 14203, USA

#### 3.2. Product Description

Name of EUT:	Tablet PC
Trade Mark:	-
Model No.:	Seal8Pro
Listed Model(s):	-
Power supply:	DC 3.7V From exchange battery
Adapter information:	Input: 100-240Va.c., 50/60Hz, 0.6A Output: 5Vd.c., 5A
Hardware version:	1.1
Software version:	1607
<b>RF Technical Description</b>	
<input checked="" type="checkbox"/> FDD Band 2	
Operation Frequency:	Uplink: 1850.7 MHz – 1909.3 MHz Downlink: 1930.7 MHz – 1989.3 MHz
Channel bandwidth:	<input checked="" type="checkbox"/> 1.4MHz <input checked="" type="checkbox"/> 3MHz <input checked="" type="checkbox"/> 5MHz <input checked="" type="checkbox"/> 10MHz <input checked="" type="checkbox"/> 15MHz <input checked="" type="checkbox"/> 20MHz
<input checked="" type="checkbox"/> FDD Band 4	
Operation Frequency:	Uplink: 1710.7 MHz – 1754.3 MHz Downlink: 2110.7 MHz – 2154.3 MHz
Channel bandwidth:	<input checked="" type="checkbox"/> 1.4MHz <input checked="" type="checkbox"/> 3MHz <input checked="" type="checkbox"/> 5MHz <input checked="" type="checkbox"/> 10MHz <input checked="" type="checkbox"/> 15MHz <input checked="" type="checkbox"/> 20MHz
<input checked="" type="checkbox"/> FDD Band 13	
Operation Frequency:	Uplink: 777 MHz – 787 MHz Downlink: 746 MHz – 756 MHz
Channel bandwidth:	<input type="checkbox"/> 1.4MHz <input type="checkbox"/> 3MHz <input checked="" type="checkbox"/> 5MHz <input checked="" type="checkbox"/> 10MHz <input type="checkbox"/> 15MHz <input type="checkbox"/> 20MHz
Power Class:	<input type="checkbox"/> Class 1 <input type="checkbox"/> Class 2 <input checked="" type="checkbox"/> Class 3 <input type="checkbox"/> Class 4
Modulation type:	<input checked="" type="checkbox"/> QPSK <input checked="" type="checkbox"/> 16QAM <input type="checkbox"/> 64QAM
Antenna type	Integral antenna
Antenna Gain	0.5dBi

### 3.3. Operation state

#### ➤ Test frequency list

FDD Band 2						
Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	
Low Range	1.4	18607	1850.7	607	1930.7	
	3	18615	1851.5	615	1931.5	
	5	18625	1852.5	625	1932.5	
	10	18650	1855	650	1935	
	15 <sup>[1]</sup>	18675	1857.5	675	1937.5	
	20 <sup>[1]</sup>	18700	1860	700	1940	
Mid Range	1.4/3/5/10/15 <sup>[1]</sup> /20 <sup>[1]</sup>	18900	1880	900	1960	
High Range	1.4	19193	1909.3	1193	1989.3	
	3	19185	1908.5	1185	1988.5	
	5	19175	1907.5	1175	1987.5	
	10	19150	1905	1150	1985	
	15 <sup>[1]</sup>	19125	1902.5	1125	1982.5	
	20 <sup>[1]</sup>	19100	1900	1100	1980	
NOTE 1: Bandwidth for which a relaxation of the specified UE receiver sensitivity requirement (TS 36.101 [27] Clause 7.3) is allowed.						
FDD Band 4						
Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	
Low Range	1.4	19957	1710.7	1957	2110.7	
	3	19965	1711.5	1965	2111.5	
	5	19975	1712.5	1975	2112.5	
	10	20000	1715	2000	2115	
	15	20025	1717.5	2025	2117.5	
	20	20050	1720	2050	2120	
Mid Range	1.4/3/5/10/15/20	20175	1732.5	2175	2132.5	
High Range	1.4	20393	1754.3	2393	2154.3	
	3	20385	1753.5	2385	2153.5	
	5	20375	1752.5	2375	2152.5	
	10	20350	1750	2350	2150	
	15	20325	1747.5	2325	2147.5	
	20	20300	1745	2300	2145	
FDD Band 13						
Test Frequency ID	Bandwidth [MHz]	N <sub>UL</sub>	Frequency of Uplink [MHz]	N <sub>DL</sub>	Frequency of Downlink [MHz]	
Low Range	5	23205	779.5	5205	748.5	
Mid Range	5/10	23230	782	5230	751	
High Range	5	23255	784.5	5255	753.5	

### 3.4. EUT operation mode

For RF test items

The EUT has been tested under typical operating condition. Testing was performed by configuring EUT to maimum output power status.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max OutputPower	2	v	v	v	v	v	v	v	v	v	v	v	v	v	v
	4	v	v	v	v	v	v	v	v	v	v	v	v	v	
	13	-	-	v	v	-	-	v	v	v	v	v	v	v	
26dB and 99% Bandwidth	2	v	v	v	v	v	v	v	v			v	v	v	
	4	v	v	v	v	v	v	v	v			v	v	v	
	13	-	-	v	v	-	-	v	v			v	v	v	
Conducted Band Edge	2	v	v	v	v	v	v	v	v	v		v	v	v	
	4	v	v	v	v	v	v	v	v	v		v	v	v	
	13	-	-	v	v	-	-	v	v	v		v	v	v	
Conducted Spurious Emission	2	v	v	v	v	v	v	v	v	v			v	v	
	4	v	v	v	v	v	v	v	v	v			v	v	
	13	-	-	v	v	-	-	v	v	v			v	v	
E.R.P./ E.I.R.P.	2	v	v	v	v	v	v	v	v	v			v	v	
	4	v	v	v	v	v	v	v	v	v			v	v	
	13			v	v	-	-	v	v	v			v	v	
Radiated Spurious Emission	2	v	v	v	v	v	v	v		v			v	v	
	4	v	v	v	v	v	v	v		v			v	v	
	13			v	v	-	-	v		v			v	v	
Frequency Stability	2						v	v	v			v		v	
	4						v	v	v			v		v	
	13				v			v	v			v		v	
Peak-to-AverageRatio	2						v	v	v	v			v	v	
	4						v	v	v	v			v	v	
	13				v			v	v	v			v	v	
Remark	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.														

### 3.5. EUT configuration

The following peripheral devices and interface cables were connected during the measurement:

- - supplied by the manufacturer
- - supplied by the lab

		Manufacturer :	
		Model No. :	
		Manufacturer :	
		Model No. :	

### 3.6. Modifications

No modifications were implemented to meet testing criteria.



## **4. TEST ENVIRONMENT**

### **4.1. Address of the test laboratory**

Laboratory: Shenzhen Huatongwei International Inspection Co., Ltd.

Address: 1/F, Bldg 3, Hongfa Hi-tech Industrial Park, Genyu Road, Tianliao, Gongming, Shenzhen, China

### **4.2. Test Facility**

#### **CNAS-Lab Code: L1225**

Shenzhen Huatongwei International Inspection Co., Ltd. has been assessed and proved to be in compliance with CNAS-CL01 Accreditation Criteria for Testing and Calibration Laboratories (identical to ISO/IEC17025: 2005 General Requirements) for the Competence of Testing and Calibration Laboratories.

#### **A2LA-Lab Cert. No.: 3902.01**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

#### **FCC-Registration No.: 762235**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the FCC (Federal Communications Commission). The acceptance letter from the FCC is maintained in our files.

#### **IC-Registration No.:5377B-1**

Two 3m Alternate Test Site of Shenzhen Huatongwei International Inspection Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for the performance of radiated measurements with Registration No.: 5377B-1.

#### **ACA**

Shenzhen Huatongwei International Inspection Co., Ltd. EMC Laboratory can also perform testing for the Australian C-Tick mark as a result of our A2LA accreditation.

### 4.3. Equipments Used during the Test

RF Conducted						
No.	Equipment	Manufacturer	Model No.	SerialNo.	Last Cal. (mm/dd/yy)	Next Cal. (mm/dd/yy)
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	11/11/2017	11/11/2018
2	WIDEB.RADIO COMM.TESRER	Rohde&Schwarz	CMW500	137688	10/26/2017	10/25/2018
3	Spectrum Analyzer	Rohde&Schwarz	FSW26	103440	11/11/2017	11/10/2018
4	MXA Signal Analyzer	Agilent Technologies	N9020A	MY5050187	11/10/2017	11/09/2018
5	Splitter	Mini-Circuit	ZAPD-4	400059	03/20/2017	03/19/2018
6	Climate Chamber	ESPEC	EL-10KA	05107008	11/10/2017	11/09/2018

RF Radiated						
No.	Equipment	Manufacturer	Model No.	SerialNo.	Last Cal. (mm/dd/yy)	Next Cal. (mm/dd/yy)
1	UNIVERSAL RADIO COMMUNICATION	Rohde&Schwarz	CMU200	112012	11/11/2017	11/11/2018
2	WIDEB.RADIO COMM.TESRER	Rohde&Schwarz	CMW500	137688	10/26/2017	10/25/2018
3	Spectrum Analyzer	Rohde&Schwarz	FSW26	103440	11/11/2017	11/10/2018
4	HORNANTENNA	ShwarzBeck	9120D	1011	03/27/2017	03/26/2020
5	Ultra-Broadband Antenna	ShwarzBeck	VULB9163	538	04/05/2017	04/04/2020
6	TURNTABLE	MATURO	TT2.0	N/A	N/A	N/A
7	ANTENNA MAST	MATURO	TAM-4.0-P	N/A	N/A	N/A
8	EMI Test Software	Audix	E3	N/A	N/A	N/A
9	EMI Test Receiver	R&S	ESCI	101247	11/11/2017	11/10/2018
10	High pass filter	Compliance Direction systems	BSU-6	34202	11/11/2017	11/10/2018
11	Preamplifier	ShwarzBeck	BBV 9718	9718-248	10/18/2017	10/17/2018
12	Broadband Preamplifier	ShwarzBeck	BBV 9743	9743-0022	10/18/2017	10/17/2018
13	Signal Generator	Rohde&Schwarz	SMB100A	114360	06/13/2017	06/12/2018
14	Pre-amplifier	SCHWARZBECK	BBV 9742	N/A	11/22/2017	11/21/2018
15	Turntable	Maturo Germany	TT2.0-1T	N/A	N/A	N/A
16	Antenna Mast	Maturo Germany	CAM-4.0-P-12	N/A	N/A	N/A
17	Test Software	R&S	ES-K1	N/A	N/A	N/A
18	Loop Antenna	R&S	HFH2-Z2	100020	11/20/2017	11/19/2020
19	RF Connection Cable	HUBER+SUHNER	N/A	N/A	11/21/2017	11/20/2018
20	RF Connection Cable	HUBER+SUHNER	SUCOFLEX104	501184/4	11/21/2017	11/20/2018
21	RF Connection Cable	HUBER+SUHNER	MULTIFLEX 141	N/A	11/21/2017	11/20/2018
22	Spectrum Analyzer	R&S	FSP40	100597	11/11/2017	11/10/2018
23	RF Connection Cable	HUBER+SUHNER	3m 18GHz S Serisa	N/A	11/21/2017	11/20/2018
24	RF Connection Cable	HUBER+SUHNER	3m 3GHz S Serisa	N/A	11/21/2017	11/20/2018
25	RF Connection Cable	HUBER+SUHNER	3m 3GHz RG Serisa	N/A	11/21/2017	11/20/2018
26	RF Connection Cable	HUBER+SUHNER	6m 18GHz S Serisa	N/A	11/21/2017	11/20/2018

The calibration interval was one year.

#### 4.4. Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Normal Conditon	Temperature	15 °C to +35 °C
	Relative humidity	20 % to 75 %.
	Voltage	the equipment shall be the nominal voltage for which the equipment was designed.
Extreme Conditon	Temperature	From -30° to + 50° centigrade
	Voltage	For hand carried, battery powered equipment, reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer

#### 4.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. to TR-100028-01 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1" and TR-100028-02 "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 2" and is documented in the Shenzhen Huatongwei International Inspection Co., Ltd quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Hereafter the best measurement capability for Shenzhen Huatongwei laboratory is reported:

Test Items	Measurement Uncertainty	Notes
Frequency stability	25 Hz	(1)
Transmitter power conducted	0.57 dB	(1)
Transmitter power Radiated	2.20 dB	(1)
Conducted spurious emission 9KHz-12.75 GHz	1.60 dB	(1)
Conducted Emission 9KHz-30MHz	3.39 dB	(1)
Radiated Emission 30~1000MHz	4.24 dB	(1)
Radiated Emissio 1~18GHz	5.16 dB	(1)
Radiated Emissio 18-40GHz	5.54 dB	(1)
Occupied Bandwidth	-----	(1)
Emission Mask	-----	(1)
Modulation Characteristic	-----	(1)
Transmitter Frequency Behavior	-----	(1)

(1) This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=1.96$ .


## 5. TEST CONDITIONS AND RESULTS

### 5.1. Conducted Output Power

#### LIMIT

N/A

#### TEST CONFIGURATION

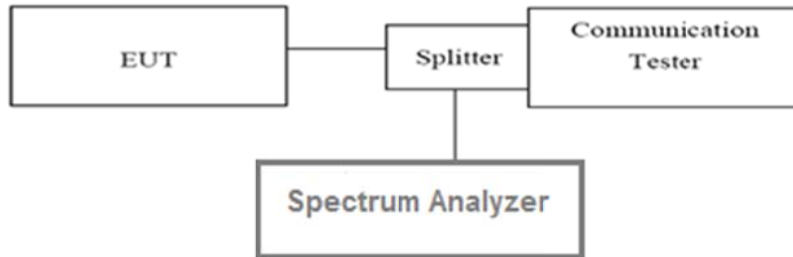

#### TEST PROCEDURE

1. The transmitter output port was connected to base station.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator, the path loss was compensated to the results for each measurement.
3. Set EUT at maximum power through base station.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure the maximum burst average power.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

**Passed**       **Not Applicable**


**Reference Appendix A:**

## 5.2. 99% & -26 dB Occupied Bandwidth

### LIMIT

N/A

### TEST CONFIGURATION

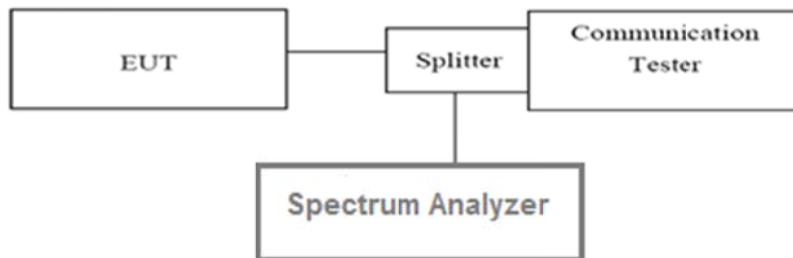

### TEST PROCEDURE

1. The EUT's output RF connector was connected with a short cable to the spectrum analyzer
2. RBW was set to about 1% of emission BW, VBW= 3 times RBW.
3. -26dBc display line was placed on the screen (or 99% bandwidth), the occupied bandwidth is the delta frequency between the two points where the display line intersects the signal trace.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

**Passed**       **Not Applicable**

**Reference Appendix C:**

### 5.3. Conducted Spurious Emissions


#### LIMIT

Part 24.238 and Part 27.53 h(1) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

Part 27.53(f) For operations in the 746-758 MHz, 775-788 MHz, and 805-806 MHz bands, emissions in the band 1559-1610 MHz shall be limited to -70 dBW/MHz equivalent isotropically radiated power (EIRP) for wideband signals, and -80 dBW EIRP for discrete emissions of less than 700 Hz bandwidth. For the purpose of equipment authorization, a transmitter shall be tested with an antenna that is representative of the type that will be used with the equipment in normal operation.

#### TEST CONFIGURATION

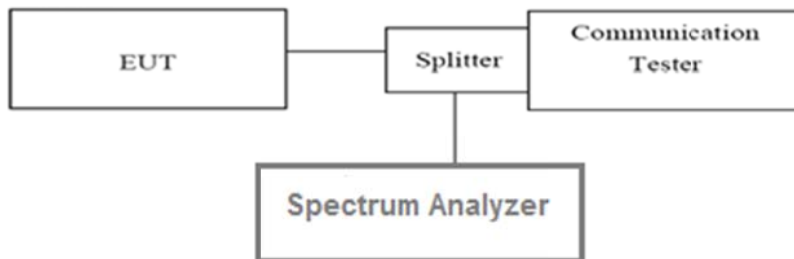

#### TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The resolution bandwidth of the spectrum analyzer was set at 1MHz, sufficient scans were taken to show the out of band Emissions if any up to 10th harmonic.
3. For the out of band: Set the RBW= 1MHz, VBW = 3MHz, Start=30MHz, Stop= 10th harmonic.

#### TEST MODE:

Please refer to the clause 3.3

#### TEST RESULTS

**Passed**       **Not Applicable**

**Reference Appendix E:**


## 5.4. Band Edge

### LIMIT

Part 24.238 and Part 27.53h(1) specify that the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The specification that emissions shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log(P)$  dB, translates in the relevant power range (1 to 0.001 W) to -13 dBm. At 1 W the specified minimum attenuation becomes 43 dB and relative to a 30 dBm (1 W) carrier becomes a limit of -13 dBm. At 0.001 W (0 dBm) the minimum attenuation is 13 dB, which again yields a limit of -13 dBm. In this way a translation of the specification from relative to absolute terms is carried out.

### TEST CONFIGURATION

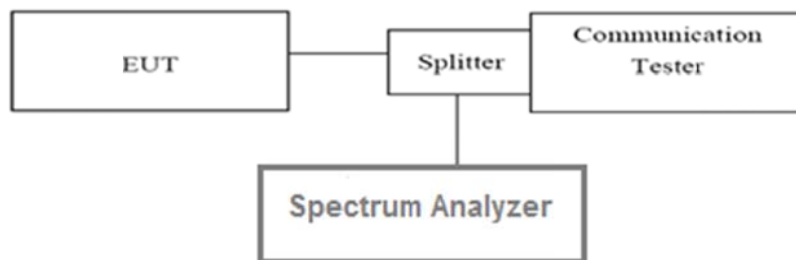

### TEST PROCEDURE

1. The RF output of the transceiver was connected to a spectrum analyzer through appropriate attenuation.
2. The band edges of low and high channels for the highest RF powers were measured. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
3. Set spectrum analyzer with RMS detector.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

Passed       Not Applicable


Reference Appendix D:

## 5.5. ERP AND EIRP

### LIMIT

LTE Band 2: EIRP<2W ,LTE Band 4:EIRP<1W, LTE Band 13:ERP<3W

### TEST CONFIGURATION

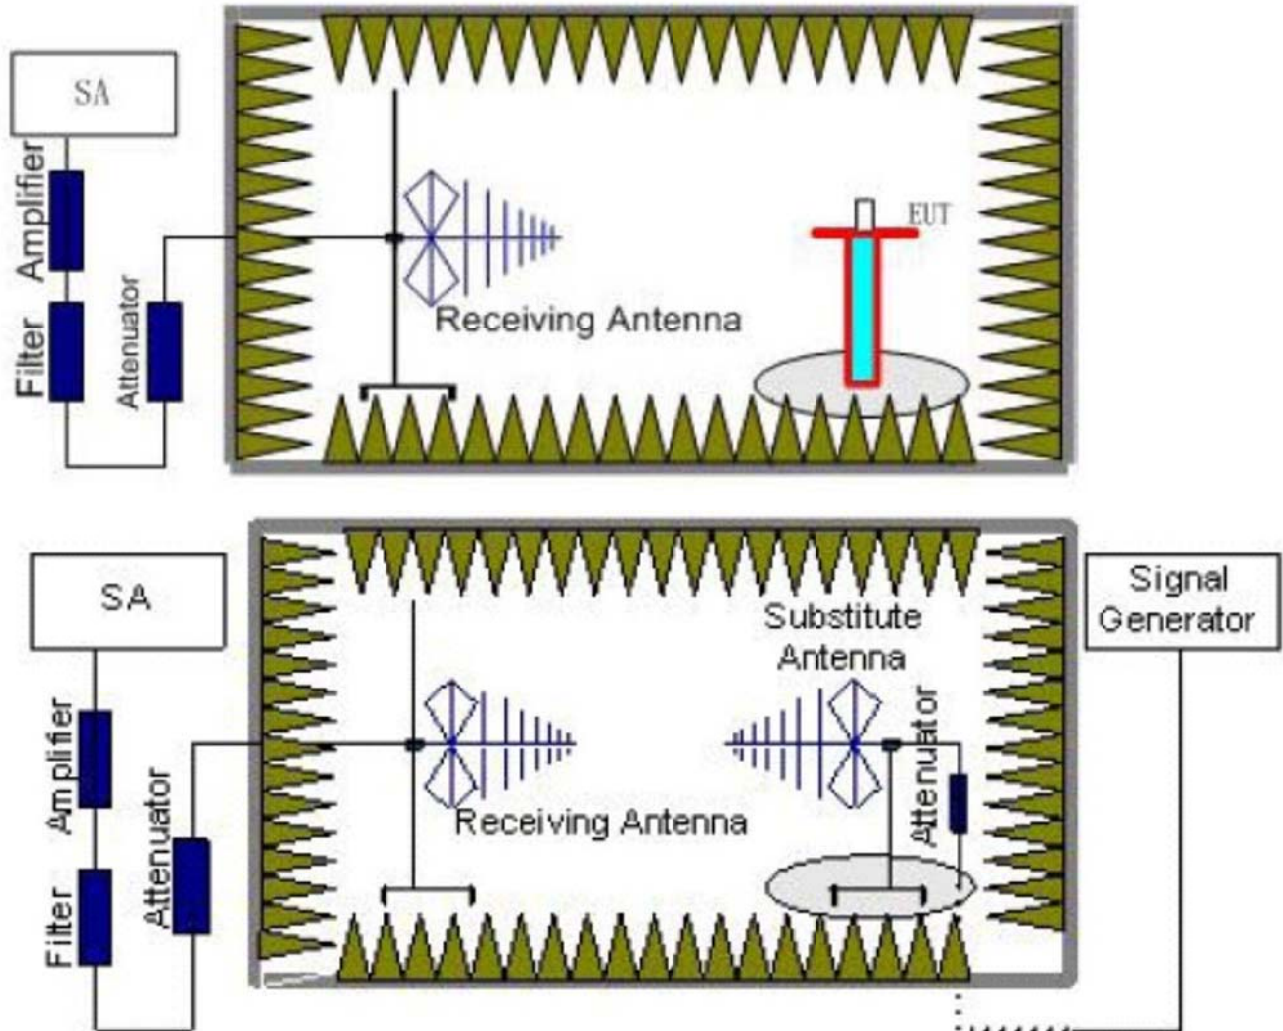

### TEST PROCEDURE

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz,, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (PMea) is applied to the input of the



substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.  
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

**Passed**       **Not Applicable**

LTE Band 2-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.70	18.12	33.00	PASS
	Mid	20.73	18.06		
	High	21.34	17.85		
16QAM	Low	19.05	16.52		PASS
	Mid	19.32	16.81		
	High	19.31	16.80		

LTE Band 2-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.33	17.78	33.00	PASS
	Mid	22.06	18.04		
	High	21.83	17.79		
16QAM	Low	18.57	16.80		PASS
	Mid	19.04	16.99		
	High	19.05	16.73		

LTE Band 2-5MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.70	18.62	33.00	PASS
	Mid	21.27	18.59		
	High	21.63	17.83		
16QAM	Low	18.96	17.52		PASS
	Mid	18.99	17.38		
	High	18.88	16.44		

LTE Band 2-10MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.55	18.09	33.00	PASS
	Mid	22.27	18.10		
	High	21.90	17.88		
16QAM	Low	18.70	16.77		PASS
	Mid	19.19	16.68		
	High	19.06	16.76		

LTE Band 2-15MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.66	18.93	33.00	PASS
	Mid	20.06	19.02		
	High	20.64	17.87		
16QAM	Low	18.32	17.42		PASS
	Mid	17.84	20.21		
	High	17.96	16.74		

LTE Band 2-20MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	20.83	17.98	33.00	PASS
	Mid	21.02	18.32		
	High	20.89	17.92		
16QAM	Low	18.06	17.37		PASS
	Mid	18.63	17.80		
	High	18.71	17.44		

LTE Band 4-1.4MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	22.32	20.16	30.00	PASS
	Mid	22.59	20.19		
	High	23.16	19.87		
16QAM	Low	19.77	19.15		PASS
	Mid	20.08	19.04		
	High	20.00	19.17		

LTE Band 4-3MHz					
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Low	21.54	19.25	30.00	PASS
	Mid	21.38	19.47		
	High	21.06	19.36		
16QAM	Low	20.20	18.97		PASS
	Mid	19.38	18.96		
	High	21.68	19.79		

LTE Band 4-5MHz						
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	21.95	20.63	30.00	PASS	
	Mid	22.21	19.80			
	High	22.38	19.75			
16QAM	Low	20.23	19.58		30.00	PASS
	Mid	20.53	18.80			
	High	20.07	18.92			

LTE Band 4-10MHz						
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	22.40	20.45	30.00	PASS	
	Mid	22.17	19.66			
	High	21.60	19.86			
16QAM	Low	20.96	19.50		30.00	PASS
	Mid	21.21	18.66			
	High	20.59	18.90			

LTE Band 4-15MHz						
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	21.35	18.53	30.00	PASS	
	Mid	21.12	18.90			
	High	21.83	18.93			
16QAM	Low	19.19	17.45		30.00	PASS
	Mid	19.28	17.60			
	High	19.49	17.97			

LTE Band 4-20MHz						
Modulation	Channel	EIRP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	21.70	18.62	30.00	PASS	
	Mid	22.43	19.32			
	High	22.38	19.27			
16QAM	Low	19.00	17.40		30.00	PASS
	Mid	18.42	17.79			
	High	18.67	17.99			

LTE Band 13-5MHz						
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result	
		Vertical	Horizontal			
QPSK	Low	21.20	19.55	34.8	PASS	
	Mid	21.51	19.44			
	High	22.56	19.67			
16QAM	Low	18.66	17.50		34.8	PASS
	Mid	19.14	17.81			
	High	19.23	17.68			


LTE Band 13-10MHz					
Modulation	Channel	ERP (dBm)		Limit (dBm)	Result
		Vertical	Horizontal		
QPSK	Mid	23.10	19.19	34.8	PASS
16QAM	Mid	19.77	17.89		PASS

## 5.6. Radiated Spurious Emission

### LIMIT

LTE Band 2/4/13:<-13dBm

### TEST CONFIGURATION

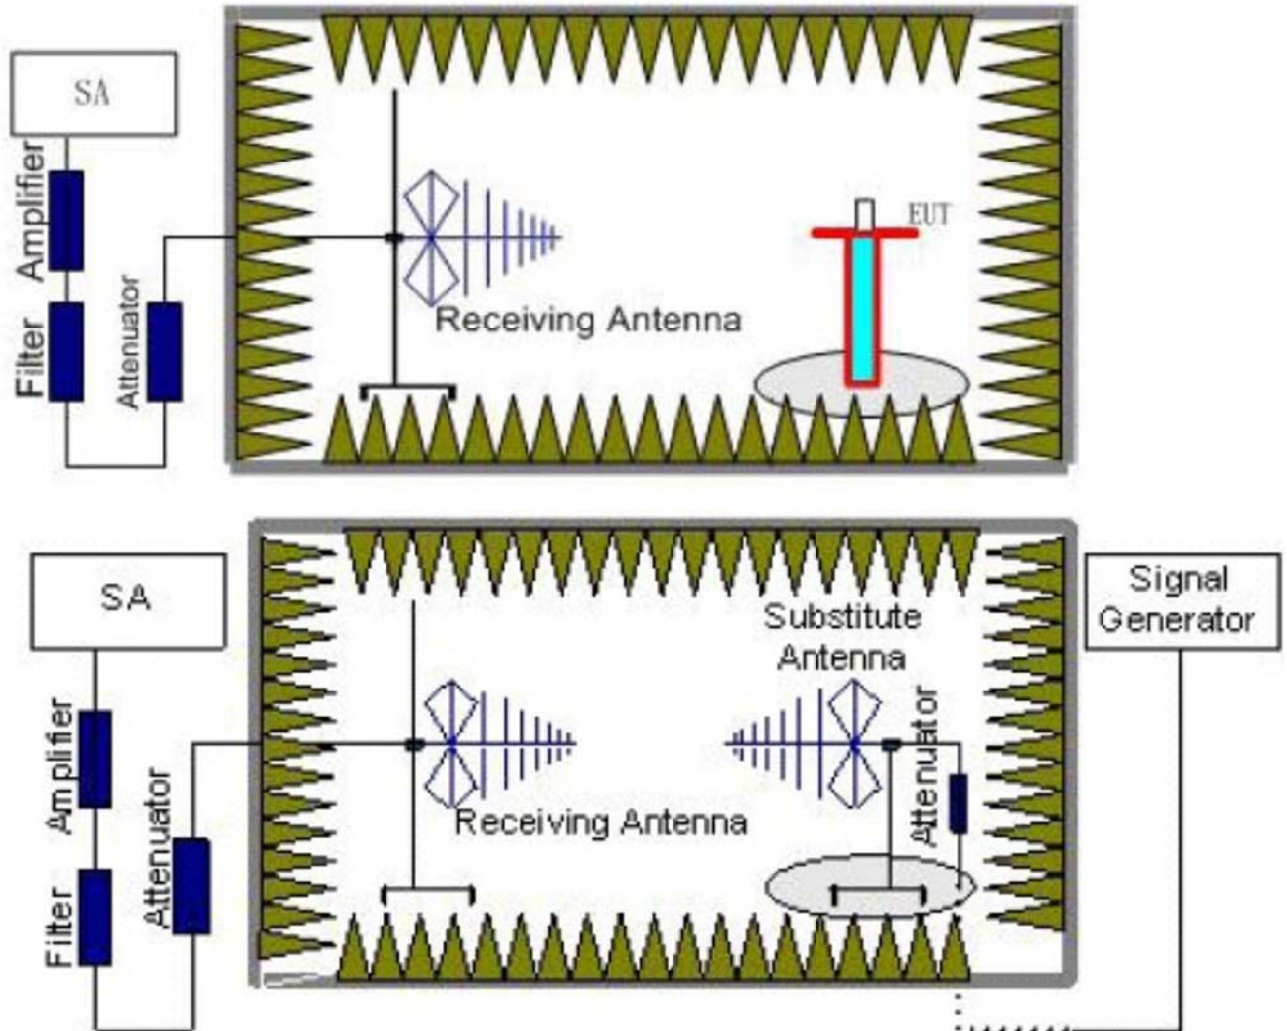

### TEST RESULTS

1. EUT was placed on a 0.8 meter high non-conductive stand at a 3 meter test distance from the receive antenna. A receiving antenna was placed on the antenna mast 3 meters from the EUT for emission measurements. The height of receiving antenna shall be moved from 1m to 4m. Detected emissions were maximized at each frequency by rotating the EUT through 360° and adjusting the receiving antenna polarization. The radiated emission measurements of all transmit frequencies in three channels (High, Middle, Low) were measured with peak detector.
2. A log-periodic antenna or double-ridged waveguide horn antenna shall be substituted in place of the EUT. The log-periodic antenna will be driven by a signal generator and the level will be adjusted till the same power value on the spectrum analyzer or receiver. The level of the spurious emissions can be calculated through the level of the signal generator, cable loss, the gain of the substitution antenna and the reading of the spectrum analyzer or receiver.
3. The EUT is then put into continuously transmitting mode at its maximum power level during the test. Set Test Receiver or Spectrum RBW=1MHz, VBW=3MHz for above 1GHz and RBW=100kHz, VBW=300kHz for 30MHz to 1GHz, And the maximum value of the receiver should be recorded as (Pr).
4. The EUT shall be replaced by a substitution antenna. In the chamber, an substitution antenna for the frequency band of interest is placed at the reference point of the chamber. An RF Signal source for the frequency band of interest is connected to the substitution antenna with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A power (P<sub>Mea</sub>) is applied to the input of the

substitution antenna, and adjust the level of the signal generator output until the value of the receiver reach the previously recorded (Pr). The power of signal source (PMea) is recorded. The test should be performed by rotating the test item and adjusting the receiving antenna polarization.

5. A amplifier should be connected to the Signal Source output port. And the cable should be connect between the Amplifier and the Substitution Antenna. The cable loss (Pcl) ,the Substitution Antenna Gain (Ga) and the Amplifier Gain (PAg) should be recorded after test.
6. The measurement results are obtained as described below:  
Power(EIRP)=PMea- PAg - Pcl + Ga  
We used SMF100A micowave signal generator which signal level can up to 33dBm,so we not used power Amplifier for substitution test; The measurement results are amend as described below:  
Power(EIRP)=PMea- Pcl + Ga
7. This value is EIRP since the measurement is calibrated using an antenna of known gain (2.15 dBi) and known input power.  
ERP can be calculated from EIRP by subtracting the gain of the dipole, ERP = EIRP-2.15dBi.

**TEST MODE:**

Please refer to the clause 3.3

**TEST RESULTS**

**Passed**       **Not Applicable**

LTE Band 2-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3701.4	Vertical	-35.69	-13.00	Pass
	5552.1	V	-39.86		
	7402.8	V	---		
	3701.4	Horizontal	-37.66		
	5552.1	H	-41.37		
	7402.8	H	---		
Mid	3760	Vertical	-34.80	-13.00	Pass
	5640	V	-40.04		
	7520	V	---		
	3760	Horizontal	-37.47		
	5640	H	-41.18		
	7520	H	---		
High	3818.6	Vertical	-35.13	-13.00	Pass
	5727.9	V	-40.35		
	7637.2	V	---		
	3818.6	Horizontal	-37.52		
	5727.9	H	-41.12		
	7637.2	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3703	Vertical	-36.53	-13.00	Pass
	5554.5	V	-39.37		
	7406	V	---		
	3703	Horizontal	-38.76		
	5554.5	H	-38.91		
	7406	H	---		
Mid	3760	Vertical	-38.39	-13.00	Pass
	5640	V	-37.43		
	7520	V	---		
	3760	Horizontal	-38.06		
	5640	H	-36.23		
	7520	H	---		
High	3817	Vertical	-40.14	-13.00	Pass
	5725.5	V	-36.62		
	7634	V	---		
	3817	Horizontal	-38.27		
	5725.5	H	-36.23		
	7634	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.



LTE Band 2-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3705	Vertical	-38.10	-13.00	Pass
	5557.5	V	-39.54		
	7410	V	---		
	3705	Horizontal	-37.31		
	5557.5	H	-39.71		
	7410	H	---		
Mid	3760	Vertical	-37.44	-13.00	Pass
	5640	V	-40.23		
	7520	V	---		
	3760	Horizontal	-36.92		
	5640	H	-39.20		
	7520	H	---		
High	3815	Vertical	-38.69	-13.00	Pass
	5722.5	V	-39.54		
	7630	V	---		
	3815	Horizontal	-39.25		
	5722.5	H	-39.66		
	7630	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3710	Vertical	-37.55	-13.00	Pass
	5565	V	-39.84		
	7420	V	---		
	3710	Horizontal	-36.20		
	5565	H	-40.12		
	7420	H	---		
Mid	3760	Vertical	-36.42	-13.00	Pass
	5640	V	-41.02		
	7520	V	---		
	3760	Horizontal	-35.52		
	5640	H	-39.85		
	7520	H	---		
High	3810	Vertical	-37.54	-13.00	Pass
	5715	V	-40.23		
	7620	V	---		
	3810	Horizontal	-36.78		
	5715	H	-40.07		
	7620	H	---		

Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3715	Vertical	-36.59	-13.00	Pass
	5572.5	V	-40.23		
	7430	V	---		
	3715	Horizontal	-34.81		
	5572.5	H	-40.60		
	7430	H	---		
Mid	3760	Vertical	-35.11	-13.00	Pass
	5640	V	-41.78		
	7520	V	---		
	3760	Horizontal	-33.93		
	5640	H	-40.81		
	7520	H	---		
High	3805	Vertical	-35.61	-13.00	Pass
	5707.5	V	-41.13		
	7610	V	---		
	3805	Horizontal	-35.86		
	5707.5	H	-41.18		
	7610	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 2-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3720	Vertical	-35.34	-13.00	Pass
	5580	V	-40.67		
	7440	V	---		
	3720	Horizontal	-33.33		
	5580	H	-41.09		
	7440	H	---		
Mid	3760	Vertical	-33.66	-13.00	Pass
	5640	V	-42.42		
	7520	V	---		
	3760	Horizontal	-32.32		
	5640	H	-41.16		
	7520	H	---		
High	3800	Vertical	-34.50	-13.00	Pass
	5700	V	-41.58		
	7600	V	---		
	3800	Horizontal	-35.92		
	5700	H	-41.87		
	7600	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-1.4MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3421.4	Vertical	-37.57	-13.00	Pass
	5132.1	V	-39.63		
	6842.8	V	---		
	3421.4	Horizontal	-35.86		
	5132.1	H	-38.57		
	6842.8	H	---		
Mid	3465	Vertical	-37.83	-13.00	Pass
	5197.5	V	-39.38		
	6930	V	---		
	3465	Horizontal	-35.54		
	5197.5	H	-38.31		
	6930	H	---		
High	3508.6	Vertical	-38.24	-13.00	Pass
	5262.9	V	-39.79		
	7017.2	V	---		
	3508.6	Horizontal	-35.63		
	5262.9	H	-38.41		
	7017.2	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-3MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3423	Vertical	-38.70	-13.00	Pass
	5134.5	V	-38.95		
	6846	V	---		
	3423	Horizontal	-34.86		
	5134.5	H	-37.93		
	6846	H	---		
Mid	3465	Vertical	-39.21	-13.00	Pass
	5197.5	V	-39.43		
	6930	V	---		
	3465	Horizontal	-34.52		
	5197.5	H	-38.21		
	6930	H	---		
High	3507	Vertical	-39.68	-13.00	Pass
	5260.5	V	-39.00		
	7014	V	---		
	3507	Horizontal	-33.98		
	5260.5	H	-38.71		
	7014	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3425	Vertical	-40.88	-13.00	Pass
	5137.5	V	-39.12		
	6850	V	---		
	3425	Horizontal	-34.15		
	5137.5	H	-38.88		
Mid	6850	H	---	-13.00	Pass
	3465	Vertical	-40.75		
	5197.5	V	-39.00		
	6930	V	-		
	3465	Horizontal	-34.48		
High	5197.5	H	-39.14	-13.00	Pass
	6930	H	---		
	3505	Vertical	-40.29		
	5257.5	V	-38.59		
	7010	V	-		
High	3505	Horizontal	-34.60	-13.00	Pass
	5257.5	H	-39.26		
	7010	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3430	Vertical	-40.32	-13.00	Pass
	5145	V	-39.42		
	6860	V	---		
	3430	Horizontal	-34.18		
	5145	H	-38.91		
Mid	6860	H	---	-13.00	Pass
	3465	Vertical	-40.54		
	5197.5	V	-39.63		
	6930	V	---		
	3465	Horizontal	-33.90		
High	5197.5	H	-38.68	-13.00	Pass
	6930	H	-		
	3500	Vertical	-40.93		
	5250	V	-39.99		
	7000	V	-		
High	3500	Horizontal	-33.74	-13.00	Pass
	5250	H	-38.52		
	7000	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-15MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3435	Vertical	-39.37	-13.00	Pass
	5152.5	V	-39.81		
	6870	V	---		
	3435	Horizontal	-34.13		
	5152.5	H	-38.15		
	6870	H	---		
Mid	3465	Vertical	-39.66	-13.00	Pass
	5197.5	V	-40.09		
	6930	V	---		
	3465	Horizontal	-34.50		
	5197.5	H	-38.46		
	6930	H	---		
High	3495	Vertical	-39.14	-13.00	Pass
	5242.5	V	-39.62		
	6990	V	---		
	3495	Horizontal	-34.45		
	5242.5	H	-38.40		
	6990	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 4-20MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	3440	Vertical	-38.11	-13.00	Pass
	5160	V	-40.06		
	6880	V	---		
	3440	Horizontal	-34.03		
	5160	H	-38.76		
	6880	H	---		
Mid	3465	Vertical	-37.80	-13.00	Pass
	5197.5	V	-40.43		
	6930	V	---		
	3465	Horizontal	-34.40		
	5197.5	H	-38.46		
	6930	H	---		
High	3490	Vertical	-37.28	-13.00	Pass
	5235	V	-38.29		
	6980	V	---		
	3490	Horizontal	-33.72		
	5235	H	-38.46		
	6980	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 13-5MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Low	1413	Vertical	-36.84	-13.00	Pass
	2119.5	V	-39.57		
	2826	V	---		
	1413	Horizontal	-37.72		
	2119.5	H	-41.28		
Mid	2826	H	---	-13.00	Pass
	1420	Vertical	-36.84		
	2130	V	-39.57		
	2840	V	---		
	1420	Horizontal	-36.32		
High	2130	H	-40.65	-13.00	Pass
	2840	H	---		
	1427	Vertical	-37.92		
	2140.5	V	-41.35		
	2854	V	---		
High	1427	Horizontal	-35.59	-13.00	Pass
	2140.5	H	-41.50		
	2854	H	---		

## Remark:

1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report.

LTE Band 13-10MHz					
Channel	Frequency (MHz)	Spurious Emission		Limit (dBm)	Result
		Polarization	Level (dBm)		
Mid	1420	Vertical	-37.78	-13.00	Pass
	2130	V	-40.00		
	2840	V	---		
	1420	Horizontal	-37.16		
	2130	H	-41.13		
Mid	2840	H	---	-13.00	Pass

## Remark:


1. Remark"---" means that the emission level is too low to be measured
2. The emission levels of below 1 GHz are very lower than the limit and not show in test report

## 5.7. Frequency stability V.S. Temperature measurement

### LIMIT

2.5ppm

### TEST CONFIGURATION

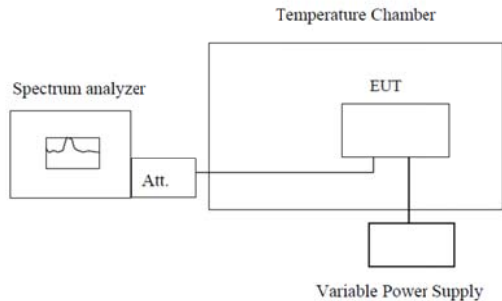

**Note :** Measurement setup for testing on Antenna connector

### TEST PROCEDURE

1. The equipment under test was connected to an external DC power supply and input rated voltage.
2. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators.
3. The EUT was placed inside the temperature chamber.
4. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 25°C operating frequency as reference frequency.
5. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency.
6. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

**Passed**       **Not Applicable**


**Reference Appendix F:**

## 5.8. Frequency stability V.S. Voltagemasurement

### LIMIT

2.5ppm

### TEST CONFIGURATION

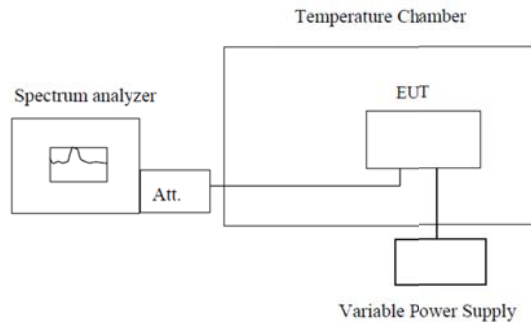

**Note :** Measurement setup for testing on Antenna connector

### TEST PROCEDURE

1. Set chamber temperature to 25°C. Use a variable DC power source to power the EUT and set the voltage to rated voltage.
2. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency.
3. Reduce the input voltage to specified extreme voltage variation (+/- 15%) and endpoint, record the maximum frequency change.

### TEST MODE:

Please refer to the clause 3.3

### TEST RESULTS

**Passed**       **Not Applicable**

**Reference Appendix F:**




## 5.9. Peak-Average Ratio

### LIMIT

13dB

### TEST CONFIGURATION

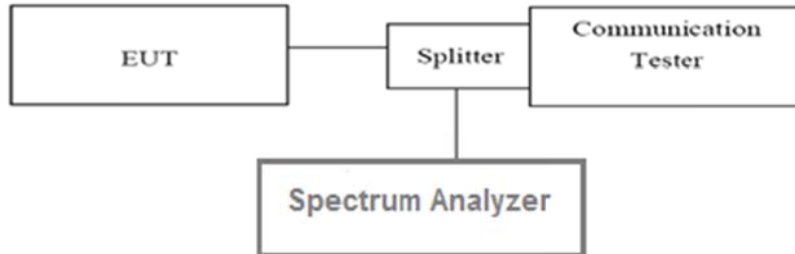

### TEST PROCEDURE

According with KDB 971168

1. The signal analyzer' s CCDF measurement profile is enabled
2. Frequency = carrier center frequency
3. Measurement BW > Emission bandwidth of signal
4. The signal analyzer was set to collect one million samples to generate the CCDF curve
5. The measurement interval was set depending on the type of signal analyzed. For continuous signals (>98% duty cycle), the measurement interval was set to 1ms. For burst transmissions, the spectrum analyzer is set to use an internal " RF Burst" trigger that is synced with an incoming pulse and the measurement interval is set to less than the duration of the " on time" of one burst to ensure that energy is only captured during a time in which the transmitter is operating at maximum power

### TEST MODE:

Please refer to the clause 3.3


### TEST RESULTS

Passed  Not Applicable


**Reference Appendix B:**

## 6. Test Setup Photos of the EUT


Radiated emission:

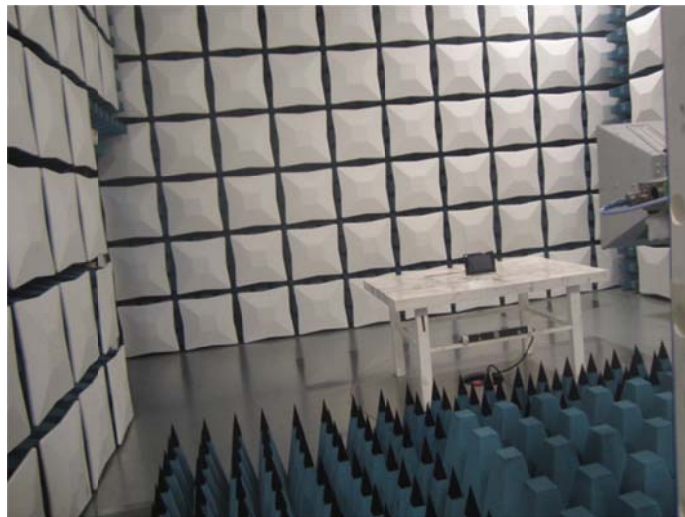


## 7. External and Internal Photos of the EUT External photos of the EUT

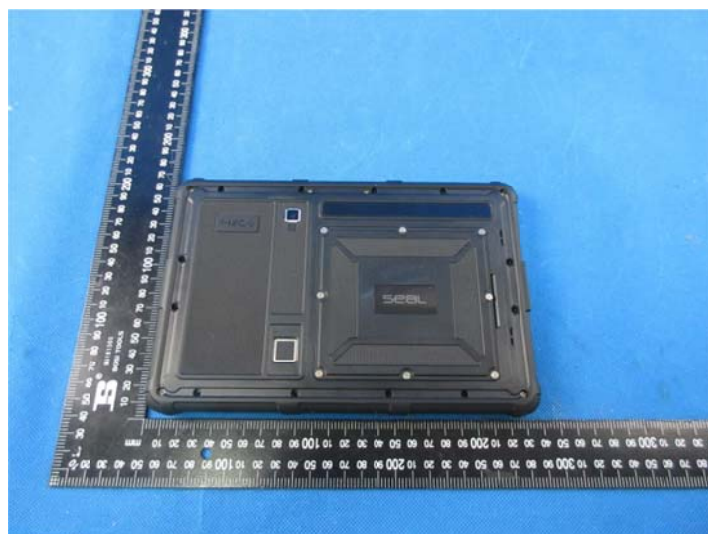






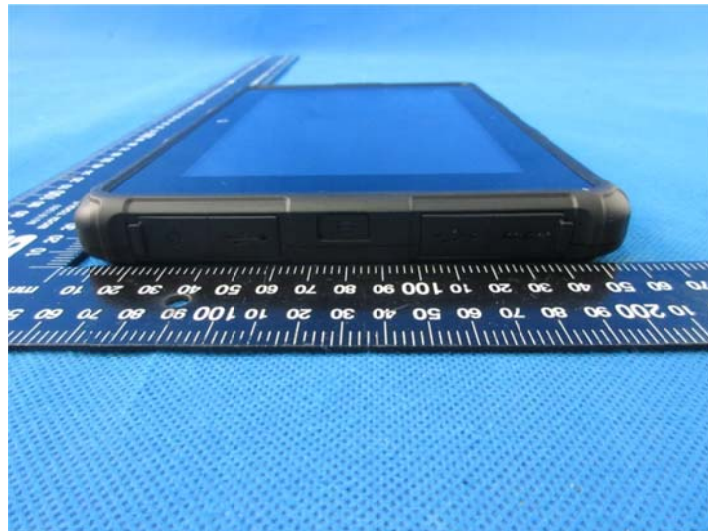


### Internal photos of the EUT


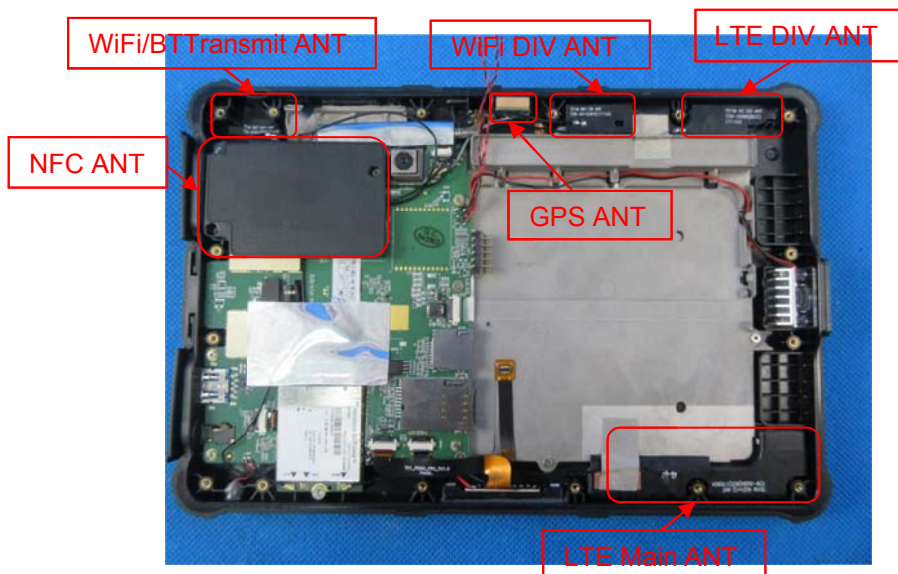




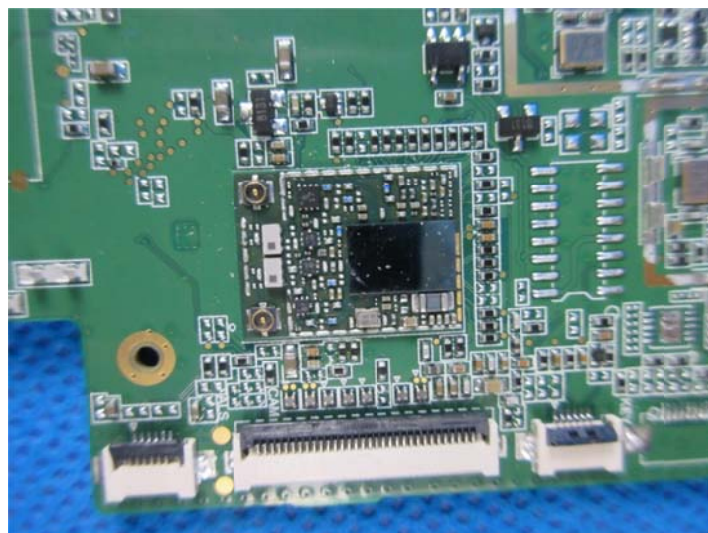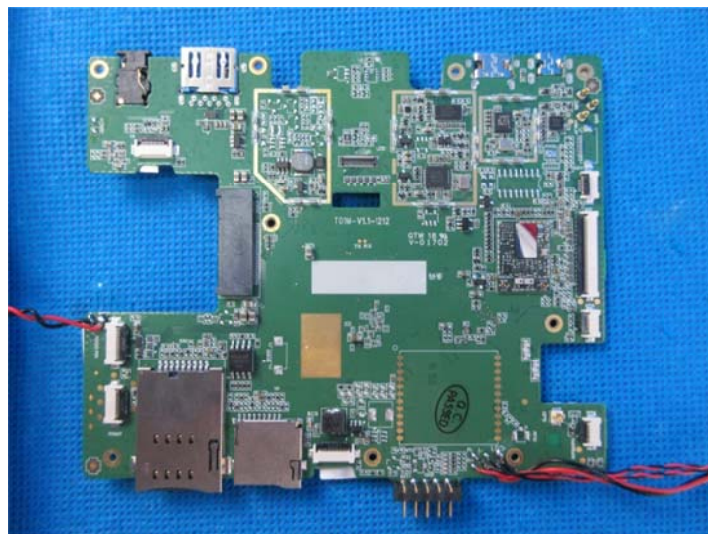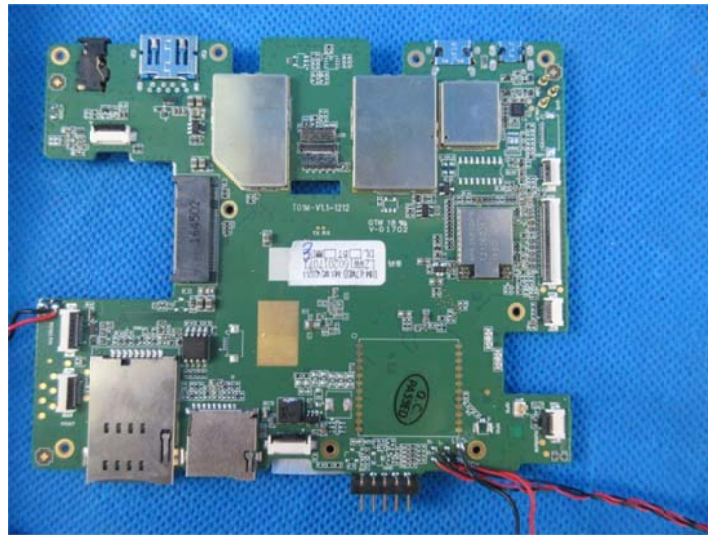



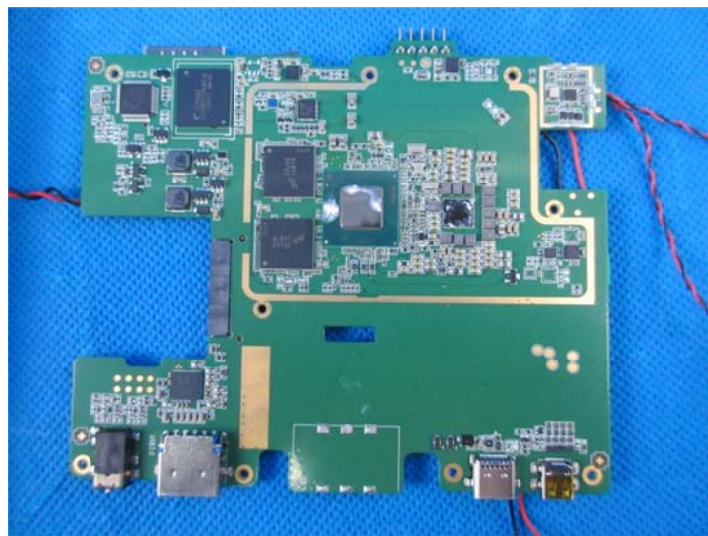

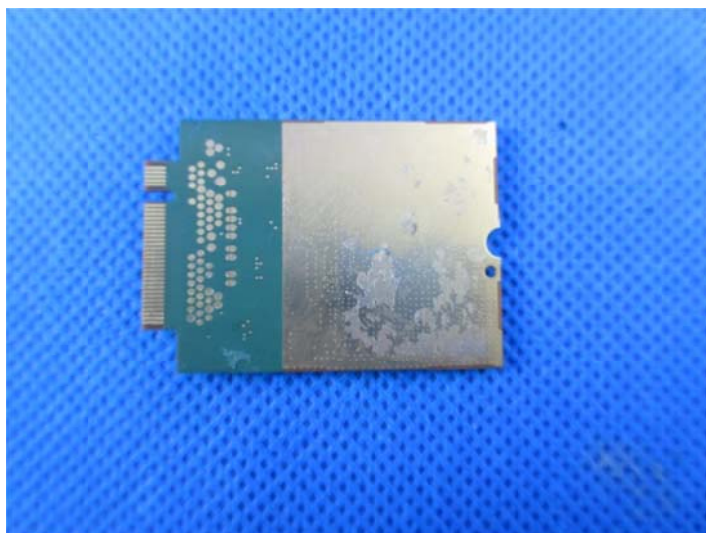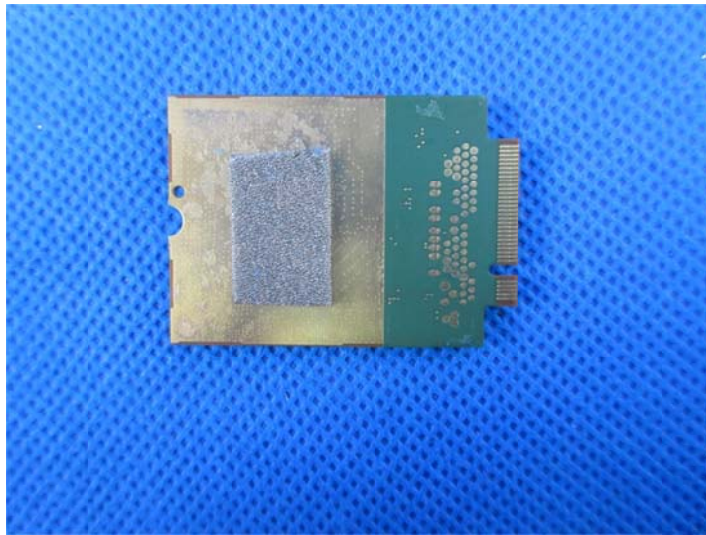



.....End of Report.....

## Appendix A: Conducted Output Power

### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	24.15	PASS
Band2	1.4MHz	QPSK	18607	1RB#2	24.32	PASS
Band2	1.4MHz	QPSK	18607	1RB#5	24.24	PASS
Band2	1.4MHz	QPSK	18607	3RB#0	24.01	PASS
Band2	1.4MHz	QPSK	18607	3RB#1	24.10	PASS
Band2	1.4MHz	QPSK	18607	3RB#3	24.07	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	23.08	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	24.25	PASS
Band2	1.4MHz	QPSK	18900	1RB#2	24.21	PASS
Band2	1.4MHz	QPSK	18900	1RB#5	24.20	PASS
Band2	1.4MHz	QPSK	18900	3RB#0	23.99	PASS
Band2	1.4MHz	QPSK	18900	3RB#1	24.06	PASS
Band2	1.4MHz	QPSK	18900	3RB#3	24.08	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	23.05	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	24.21	PASS
Band2	1.4MHz	QPSK	19193	1RB#2	24.18	PASS
Band2	1.4MHz	QPSK	19193	1RB#5	24.07	PASS
Band2	1.4MHz	QPSK	19193	3RB#0	24.07	PASS
Band2	1.4MHz	QPSK	19193	3RB#1	24.13	PASS
Band2	1.4MHz	QPSK	19193	3RB#3	24.07	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	23.01	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	23.49	PASS
Band2	1.4MHz	16QAM	18607	1RB#2	23.47	PASS
Band2	1.4MHz	16QAM	18607	1RB#5	23.52	PASS
Band2	1.4MHz	16QAM	18607	3RB#0	23.23	PASS
Band2	1.4MHz	16QAM	18607	3RB#1	23.30	PASS
Band2	1.4MHz	16QAM	18607	3RB#3	23.22	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	22.04	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	23.56	PASS
Band2	1.4MHz	16QAM	18900	1RB#2	23.72	PASS
Band2	1.4MHz	16QAM	18900	1RB#5	23.63	PASS
Band2	1.4MHz	16QAM	18900	3RB#0	23.05	PASS
Band2	1.4MHz	16QAM	18900	3RB#1	23.08	PASS
Band2	1.4MHz	16QAM	18900	3RB#3	23.12	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	22.01	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	23.34	PASS
Band2	1.4MHz	16QAM	19193	1RB#2	23.51	PASS

Band2	1.4MHz	16QAM	19193	1RB#5	23.35	PASS
Band2	1.4MHz	16QAM	19193	3RB#0	23.14	PASS
Band2	1.4MHz	16QAM	19193	3RB#1	23.18	PASS
Band2	1.4MHz	16QAM	19193	3RB#3	23.16	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	22.15	PASS
Band2	3MHz	QPSK	18615	1RB#0	24.38	PASS
Band2	3MHz	QPSK	18615	1RB#8	24.25	PASS
Band2	3MHz	QPSK	18615	1RB#14	24.40	PASS
Band2	3MHz	QPSK	18615	8RB#0	23.16	PASS
Band2	3MHz	QPSK	18615	8RB#4	23.20	PASS
Band2	3MHz	QPSK	18615	8RB#7	23.20	PASS
Band2	3MHz	QPSK	18615	15RB#0	23.20	PASS
Band2	3MHz	QPSK	18900	1RB#0	24.19	PASS
Band2	3MHz	QPSK	18900	1RB#8	24.21	PASS
Band2	3MHz	QPSK	18900	1RB#14	24.16	PASS
Band2	3MHz	QPSK	18900	8RB#0	23.18	PASS
Band2	3MHz	QPSK	18900	8RB#4	23.20	PASS
Band2	3MHz	QPSK	18900	8RB#7	23.18	PASS
Band2	3MHz	QPSK	18900	15RB#0	23.09	PASS
Band2	3MHz	QPSK	19185	1RB#0	24.16	PASS
Band2	3MHz	QPSK	19185	1RB#8	24.17	PASS
Band2	3MHz	QPSK	19185	1RB#14	24.14	PASS
Band2	3MHz	QPSK	19185	8RB#0	23.06	PASS
Band2	3MHz	QPSK	19185	8RB#4	23.15	PASS
Band2	3MHz	QPSK	19185	8RB#7	23.11	PASS
Band2	3MHz	QPSK	19185	15RB#0	23.13	PASS
Band2	3MHz	16QAM	18615	1RB#0	23.58	PASS
Band2	3MHz	16QAM	18615	1RB#8	23.71	PASS
Band2	3MHz	16QAM	18615	1RB#14	23.50	PASS
Band2	3MHz	16QAM	18615	8RB#0	22.17	PASS
Band2	3MHz	16QAM	18615	8RB#4	22.19	PASS
Band2	3MHz	16QAM	18615	8RB#7	22.14	PASS
Band2	3MHz	16QAM	18615	15RB#0	22.16	PASS
Band2	3MHz	16QAM	18900	1RB#0	23.46	PASS
Band2	3MHz	16QAM	18900	1RB#8	23.46	PASS
Band2	3MHz	16QAM	18900	1RB#14	23.41	PASS
Band2	3MHz	16QAM	18900	8RB#0	22.14	PASS
Band2	3MHz	16QAM	18900	8RB#4	22.17	PASS
Band2	3MHz	16QAM	18900	8RB#7	22.12	PASS
Band2	3MHz	16QAM	18900	15RB#0	22.13	PASS
Band2	3MHz	16QAM	19185	1RB#0	23.38	PASS
Band2	3MHz	16QAM	19185	1RB#8	23.59	PASS
Band2	3MHz	16QAM	19185	1RB#14	23.51	PASS

Band2	3MHz	16QAM	19185	8RB#0	22.12	PASS
Band2	3MHz	16QAM	19185	8RB#4	22.18	PASS
Band2	3MHz	16QAM	19185	8RB#7	22.18	PASS
Band2	3MHz	16QAM	19185	15RB#0	22.10	PASS
Band2	5MHz	QPSK	18625	1RB#0	24.27	PASS
Band2	5MHz	QPSK	18625	1RB#12	24.19	PASS
Band2	5MHz	QPSK	18625	1RB#24	24.16	PASS
Band2	5MHz	QPSK	18625	12RB#0	23.12	PASS
Band2	5MHz	QPSK	18625	12RB#6	23.08	PASS
Band2	5MHz	QPSK	18625	12RB#13	23.11	PASS
Band2	5MHz	QPSK	18625	25RB#0	23.03	PASS
Band2	5MHz	QPSK	18900	1RB#0	24.32	PASS
Band2	5MHz	QPSK	18900	1RB#12	24.10	PASS
Band2	5MHz	QPSK	18900	1RB#24	24.33	PASS
Band2	5MHz	QPSK	18900	12RB#0	23.04	PASS
Band2	5MHz	QPSK	18900	12RB#6	23.09	PASS
Band2	5MHz	QPSK	18900	12RB#13	23.05	PASS
Band2	5MHz	QPSK	18900	25RB#0	23.09	PASS
Band2	5MHz	QPSK	19175	1RB#0	24.45	PASS
Band2	5MHz	QPSK	19175	1RB#12	24.14	PASS
Band2	5MHz	QPSK	19175	1RB#24	24.36	PASS
Band2	5MHz	QPSK	19175	12RB#0	23.06	PASS
Band2	5MHz	QPSK	19175	12RB#6	23.10	PASS
Band2	5MHz	QPSK	19175	12RB#13	23.07	PASS
Band2	5MHz	QPSK	19175	25RB#0	23.06	PASS
Band2	5MHz	16QAM	18625	1RB#0	23.39	PASS
Band2	5MHz	16QAM	18625	1RB#12	24.32	PASS
Band2	5MHz	16QAM	18625	1RB#24	23.39	PASS
Band2	5MHz	16QAM	18625	12RB#0	22.20	PASS
Band2	5MHz	16QAM	18625	12RB#6	22.13	PASS
Band2	5MHz	16QAM	18625	12RB#13	22.13	PASS
Band2	5MHz	16QAM	18625	25RB#0	22.09	PASS
Band2	5MHz	16QAM	18900	1RB#0	23.36	PASS
Band2	5MHz	16QAM	18900	1RB#12	23.16	PASS
Band2	5MHz	16QAM	18900	1RB#24	23.47	PASS
Band2	5MHz	16QAM	18900	12RB#0	22.18	PASS
Band2	5MHz	16QAM	18900	12RB#6	22.19	PASS
Band2	5MHz	16QAM	18900	12RB#13	22.17	PASS
Band2	5MHz	16QAM	18900	25RB#0	22.13	PASS
Band2	5MHz	16QAM	19175	1RB#0	23.48	PASS
Band2	5MHz	16QAM	19175	1RB#12	23.46	PASS
Band2	5MHz	16QAM	19175	1RB#24	23.58	PASS
Band2	5MHz	16QAM	19175	12RB#0	22.08	PASS

Band2	5MHz	16QAM	19175	12RB#6	22.12	PASS
Band2	5MHz	16QAM	19175	12RB#13	22.10	PASS
Band2	5MHz	16QAM	19175	25RB#0	22.04	PASS
Band2	10MHz	QPSK	18650	1RB#0	24.26	PASS
Band2	10MHz	QPSK	18650	1RB#24	24.12	PASS
Band2	10MHz	QPSK	18650	1RB#49	24.05	PASS
Band2	10MHz	QPSK	18650	25RB#0	23.16	PASS
Band2	10MHz	QPSK	18650	25RB#12	23.10	PASS
Band2	10MHz	QPSK	18650	25RB#25	23.03	PASS
Band2	10MHz	QPSK	18650	50RB#0	23.11	PASS
Band2	10MHz	QPSK	18900	1RB#0	24.15	PASS
Band2	10MHz	QPSK	18900	1RB#24	24.23	PASS
Band2	10MHz	QPSK	18900	1RB#49	24.15	PASS
Band2	10MHz	QPSK	18900	25RB#0	23.06	PASS
Band2	10MHz	QPSK	18900	25RB#12	23.07	PASS
Band2	10MHz	QPSK	18900	25RB#25	23.11	PASS
Band2	10MHz	QPSK	18900	50RB#0	23.13	PASS
Band2	10MHz	QPSK	19150	1RB#0	24.15	PASS
Band2	10MHz	QPSK	19150	1RB#24	24.16	PASS
Band2	10MHz	QPSK	19150	1RB#49	23.98	PASS
Band2	10MHz	QPSK	19150	25RB#0	23.10	PASS
Band2	10MHz	QPSK	19150	25RB#12	23.07	PASS
Band2	10MHz	QPSK	19150	25RB#25	23.05	PASS
Band2	10MHz	QPSK	19150	50RB#0	23.07	PASS
Band2	10MHz	16QAM	18650	1RB#0	23.89	PASS
Band2	10MHz	16QAM	18650	1RB#24	23.77	PASS
Band2	10MHz	16QAM	18650	1RB#49	23.80	PASS
Band2	10MHz	16QAM	18650	25RB#0	22.14	PASS
Band2	10MHz	16QAM	18650	25RB#12	22.14	PASS
Band2	10MHz	16QAM	18650	25RB#25	22.07	PASS
Band2	10MHz	16QAM	18650	50RB#0	22.10	PASS
Band2	10MHz	16QAM	18900	1RB#0	23.34	PASS
Band2	10MHz	16QAM	18900	1RB#24	23.38	PASS
Band2	10MHz	16QAM	18900	1RB#49	23.43	PASS
Band2	10MHz	16QAM	18900	25RB#0	22.06	PASS
Band2	10MHz	16QAM	18900	25RB#12	22.16	PASS
Band2	10MHz	16QAM	18900	25RB#25	22.11	PASS
Band2	10MHz	16QAM	18900	50RB#0	22.16	PASS
Band2	10MHz	16QAM	19150	1RB#0	23.66	PASS
Band2	10MHz	16QAM	19150	1RB#24	23.58	PASS
Band2	10MHz	16QAM	19150	1RB#49	23.52	PASS
Band2	10MHz	16QAM	19150	25RB#0	22.07	PASS
Band2	10MHz	16QAM	19150	25RB#12	22.13	PASS

Band2	10MHz	16QAM	19150	25RB#25	22.05	PASS
Band2	10MHz	16QAM	19150	50RB#0	22.07	PASS
Band2	15MHz	QPSK	18675	1RB#0	23.93	PASS
Band2	15MHz	QPSK	18675	1RB#38	23.79	PASS
Band2	15MHz	QPSK	18675	1RB#74	23.79	PASS
Band2	15MHz	QPSK	18675	38RB#0	22.85	PASS
Band2	15MHz	QPSK	18675	38RB#18	22.91	PASS
Band2	15MHz	QPSK	18675	38RB#37	22.83	PASS
Band2	15MHz	QPSK	18675	75RB#0	22.86	PASS
Band2	15MHz	QPSK	18900	1RB#0	23.97	PASS
Band2	15MHz	QPSK	18900	1RB#38	24.06	PASS
Band2	15MHz	QPSK	18900	1RB#74	23.97	PASS
Band2	15MHz	QPSK	18900	38RB#0	22.89	PASS
Band2	15MHz	QPSK	18900	38RB#18	22.97	PASS
Band2	15MHz	QPSK	18900	38RB#37	23.07	PASS
Band2	15MHz	QPSK	18900	75RB#0	22.92	PASS
Band2	15MHz	QPSK	19125	1RB#0	24.18	PASS
Band2	15MHz	QPSK	19125	1RB#38	24.19	PASS
Band2	15MHz	QPSK	19125	1RB#74	23.92	PASS
Band2	15MHz	QPSK	19125	38RB#0	23.06	PASS
Band2	15MHz	QPSK	19125	38RB#18	23.14	PASS
Band2	15MHz	QPSK	19125	38RB#37	23.05	PASS
Band2	15MHz	QPSK	19125	75RB#0	23.09	PASS
Band2	15MHz	16QAM	18675	1RB#0	23.24	PASS
Band2	15MHz	16QAM	18675	1RB#38	23.23	PASS
Band2	15MHz	16QAM	18675	1RB#74	23.03	PASS
Band2	15MHz	16QAM	18675	38RB#0	21.88	PASS
Band2	15MHz	16QAM	18675	38RB#18	21.93	PASS
Band2	15MHz	16QAM	18675	38RB#37	21.86	PASS
Band2	15MHz	16QAM	18675	75RB#0	21.94	PASS
Band2	15MHz	16QAM	18900	1RB#0	23.11	PASS
Band2	15MHz	16QAM	18900	1RB#38	23.31	PASS
Band2	15MHz	16QAM	18900	1RB#74	23.19	PASS
Band2	15MHz	16QAM	18900	38RB#0	21.91	PASS
Band2	15MHz	16QAM	18900	38RB#18	21.96	PASS
Band2	15MHz	16QAM	18900	38RB#37	22.01	PASS
Band2	15MHz	16QAM	18900	75RB#0	21.92	PASS
Band2	15MHz	16QAM	19125	1RB#0	23.37	PASS
Band2	15MHz	16QAM	19125	1RB#38	23.45	PASS
Band2	15MHz	16QAM	19125	1RB#74	23.26	PASS
Band2	15MHz	16QAM	19125	38RB#0	21.98	PASS
Band2	15MHz	16QAM	19125	38RB#18	22.10	PASS
Band2	15MHz	16QAM	19125	38RB#37	22.02	PASS



Band2	15MHz	16QAM	19125	75RB#0	22.02	PASS
Band2	20MHz	QPSK	18700	1RB#0	23.93	PASS
Band2	20MHz	QPSK	18700	1RB#49	23.71	PASS
Band2	20MHz	QPSK	18700	1RB#99	23.66	PASS
Band2	20MHz	QPSK	18700	50RB#0	22.84	PASS
Band2	20MHz	QPSK	18700	50RB#25	22.87	PASS
Band2	20MHz	QPSK	18700	50RB#50	22.83	PASS
Band2	20MHz	QPSK	18700	100RB#0	22.83	PASS
Band2	20MHz	QPSK	18900	1RB#0	23.88	PASS
Band2	20MHz	QPSK	18900	1RB#49	23.80	PASS
Band2	20MHz	QPSK	18900	1RB#99	23.84	PASS
Band2	20MHz	QPSK	18900	50RB#0	22.93	PASS
Band2	20MHz	QPSK	18900	50RB#25	23.03	PASS
Band2	20MHz	QPSK	18900	50RB#50	22.94	PASS
Band2	20MHz	QPSK	18900	100RB#0	22.97	PASS
Band2	20MHz	QPSK	19100	1RB#0	24.20	PASS
Band2	20MHz	QPSK	19100	1RB#49	24.08	PASS
Band2	20MHz	QPSK	19100	1RB#99	23.87	PASS
Band2	20MHz	QPSK	19100	50RB#0	22.99	PASS
Band2	20MHz	QPSK	19100	50RB#25	23.08	PASS
Band2	20MHz	QPSK	19100	50RB#50	22.94	PASS
Band2	20MHz	QPSK	19100	100RB#0	23.03	PASS
Band2	20MHz	16QAM	18700	1RB#0	23.26	PASS
Band2	20MHz	16QAM	18700	1RB#49	23.05	PASS
Band2	20MHz	16QAM	18700	1RB#99	22.95	PASS
Band2	20MHz	16QAM	18700	50RB#0	21.88	PASS
Band2	20MHz	16QAM	18700	50RB#25	21.92	PASS
Band2	20MHz	16QAM	18700	50RB#50	21.84	PASS
Band2	20MHz	16QAM	18700	100RB#0	21.89	PASS
Band2	20MHz	16QAM	18900	1RB#0	22.97	PASS
Band2	20MHz	16QAM	18900	1RB#49	23.11	PASS
Band2	20MHz	16QAM	18900	1RB#99	23.08	PASS
Band2	20MHz	16QAM	18900	50RB#0	21.93	PASS
Band2	20MHz	16QAM	18900	50RB#25	22.06	PASS
Band2	20MHz	16QAM	18900	50RB#50	21.95	PASS
Band2	20MHz	16QAM	18900	100RB#0	21.97	PASS
Band2	20MHz	16QAM	19100	1RB#0	23.25	PASS
Band2	20MHz	16QAM	19100	1RB#49	23.27	PASS
Band2	20MHz	16QAM	19100	1RB#99	23.12	PASS
Band2	20MHz	16QAM	19100	50RB#0	21.98	PASS
Band2	20MHz	16QAM	19100	50RB#25	22.04	PASS
Band2	20MHz	16QAM	19100	50RB#50	21.91	PASS
Band2	20MHz	16QAM	19100	100RB#0	22.03	PASS

Band4	1.4MHz	QPSK	19957	1RB#0	23.60	PASS
Band4	1.4MHz	QPSK	19957	1RB#2	23.63	PASS
Band4	1.4MHz	QPSK	19957	1RB#5	23.52	PASS
Band4	1.4MHz	QPSK	19957	3RB#0	23.26	PASS
Band4	1.4MHz	QPSK	19957	3RB#1	23.43	PASS
Band4	1.4MHz	QPSK	19957	3RB#3	23.36	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	22.42	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	23.30	PASS
Band4	1.4MHz	QPSK	20175	1RB#2	23.30	PASS
Band4	1.4MHz	QPSK	20175	1RB#5	23.23	PASS
Band4	1.4MHz	QPSK	20175	3RB#0	23.20	PASS
Band4	1.4MHz	QPSK	20175	3RB#1	23.23	PASS
Band4	1.4MHz	QPSK	20175	3RB#3	23.15	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	22.07	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	23.24	PASS
Band4	1.4MHz	QPSK	20393	1RB#2	23.25	PASS
Band4	1.4MHz	QPSK	20393	1RB#5	23.33	PASS
Band4	1.4MHz	QPSK	20393	3RB#0	23.30	PASS
Band4	1.4MHz	QPSK	20393	3RB#1	23.31	PASS
Band4	1.4MHz	QPSK	20393	3RB#3	23.26	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	22.17	PASS
Band4	1.4MHz	16QAM	19957	1RB#0	22.87	PASS
Band4	1.4MHz	16QAM	19957	1RB#2	23.09	PASS
Band4	1.4MHz	16QAM	19957	1RB#5	22.84	PASS
Band4	1.4MHz	16QAM	19957	3RB#0	22.57	PASS
Band4	1.4MHz	16QAM	19957	3RB#1	22.53	PASS
Band4	1.4MHz	16QAM	19957	3RB#3	22.49	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	21.36	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	22.64	PASS
Band4	1.4MHz	16QAM	20175	1RB#2	22.82	PASS
Band4	1.4MHz	16QAM	20175	1RB#5	22.72	PASS
Band4	1.4MHz	16QAM	20175	3RB#0	22.11	PASS
Band4	1.4MHz	16QAM	20175	3RB#1	22.22	PASS
Band4	1.4MHz	16QAM	20175	3RB#3	22.17	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	21.06	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	22.54	PASS
Band4	1.4MHz	16QAM	20393	1RB#2	22.70	PASS
Band4	1.4MHz	16QAM	20393	1RB#5	22.55	PASS
Band4	1.4MHz	16QAM	20393	3RB#0	22.31	PASS
Band4	1.4MHz	16QAM	20393	3RB#1	22.33	PASS
Band4	1.4MHz	16QAM	20393	3RB#3	22.33	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	21.33	PASS
Band4	3MHz	QPSK	19965	1RB#0	23.66	PASS

Band4	3MHz	QPSK	19965	1RB#8	23.78	PASS
Band4	3MHz	QPSK	19965	1RB#14	23.63	PASS
Band4	3MHz	QPSK	19965	8RB#0	22.43	PASS
Band4	3MHz	QPSK	19965	8RB#4	22.57	PASS
Band4	3MHz	QPSK	19965	8RB#7	22.49	PASS
Band4	3MHz	QPSK	19965	15RB#0	22.44	PASS
Band4	3MHz	QPSK	20175	1RB#0	23.27	PASS
Band4	3MHz	QPSK	20175	1RB#8	23.23	PASS
Band4	3MHz	QPSK	20175	1RB#14	23.17	PASS
Band4	3MHz	QPSK	20175	8RB#0	22.17	PASS
Band4	3MHz	QPSK	20175	8RB#4	22.10	PASS
Band4	3MHz	QPSK	20175	8RB#7	22.06	PASS
Band4	3MHz	QPSK	20175	15RB#0	22.07	PASS
Band4	3MHz	QPSK	20385	1RB#0	23.27	PASS
Band4	3MHz	QPSK	20385	1RB#8	23.30	PASS
Band4	3MHz	QPSK	20385	1RB#14	23.24	PASS
Band4	3MHz	QPSK	20385	8RB#0	22.05	PASS
Band4	3MHz	QPSK	20385	8RB#4	22.17	PASS
Band4	3MHz	QPSK	20385	8RB#7	22.21	PASS
Band4	3MHz	QPSK	20385	15RB#0	22.17	PASS
Band4	3MHz	16QAM	19965	1RB#0	22.94	PASS
Band4	3MHz	16QAM	19965	1RB#8	23.06	PASS
Band4	3MHz	16QAM	19965	1RB#14	23.16	PASS
Band4	3MHz	16QAM	19965	8RB#0	21.34	PASS
Band4	3MHz	16QAM	19965	8RB#4	21.51	PASS
Band4	3MHz	16QAM	19965	8RB#7	21.42	PASS
Band4	3MHz	16QAM	19965	15RB#0	21.39	PASS
Band4	3MHz	16QAM	20175	1RB#0	22.57	PASS
Band4	3MHz	16QAM	20175	1RB#8	22.46	PASS
Band4	3MHz	16QAM	20175	1RB#14	22.46	PASS
Band4	3MHz	16QAM	20175	8RB#0	21.11	PASS
Band4	3MHz	16QAM	20175	8RB#4	21.07	PASS
Band4	3MHz	16QAM	20175	8RB#7	20.99	PASS
Band4	3MHz	16QAM	20175	15RB#0	21.09	PASS
Band4	3MHz	16QAM	20385	1RB#0	22.49	PASS
Band4	3MHz	16QAM	20385	1RB#8	22.74	PASS
Band4	3MHz	16QAM	20385	1RB#14	22.57	PASS
Band4	3MHz	16QAM	20385	8RB#0	21.07	PASS
Band4	3MHz	16QAM	20385	8RB#4	21.25	PASS
Band4	3MHz	16QAM	20385	8RB#7	21.20	PASS
Band4	3MHz	16QAM	20385	15RB#0	21.11	PASS
Band4	5MHz	QPSK	19975	1RB#0	23.93	PASS
Band4	5MHz	QPSK	19975	1RB#12	23.34	PASS

Band4	5MHz	QPSK	19975	1RB#24	23.88	PASS
Band4	5MHz	QPSK	19975	12RB#0	22.50	PASS
Band4	5MHz	QPSK	19975	12RB#6	22.55	PASS
Band4	5MHz	QPSK	19975	12RB#13	22.39	PASS
Band4	5MHz	QPSK	19975	25RB#0	22.41	PASS
Band4	5MHz	QPSK	20175	1RB#0	23.27	PASS
Band4	5MHz	QPSK	20175	1RB#12	23.15	PASS
Band4	5MHz	QPSK	20175	1RB#24	23.31	PASS
Band4	5MHz	QPSK	20175	12RB#0	22.12	PASS
Band4	5MHz	QPSK	20175	12RB#6	22.07	PASS
Band4	5MHz	QPSK	20175	12RB#13	22.19	PASS
Band4	5MHz	QPSK	20175	25RB#0	22.03	PASS
Band4	5MHz	QPSK	20375	1RB#0	23.42	PASS
Band4	5MHz	QPSK	20375	1RB#12	23.38	PASS
Band4	5MHz	QPSK	20375	1RB#24	23.58	PASS
Band4	5MHz	QPSK	20375	12RB#0	22.19	PASS
Band4	5MHz	QPSK	20375	12RB#6	22.22	PASS
Band4	5MHz	QPSK	20375	12RB#13	22.26	PASS
Band4	5MHz	QPSK	20375	25RB#0	22.17	PASS
Band4	5MHz	16QAM	19975	1RB#0	22.69	PASS
Band4	5MHz	16QAM	19975	1RB#12	22.81	PASS
Band4	5MHz	16QAM	19975	1RB#24	22.93	PASS
Band4	5MHz	16QAM	19975	12RB#0	21.47	PASS
Band4	5MHz	16QAM	19975	12RB#6	21.48	PASS
Band4	5MHz	16QAM	19975	12RB#13	21.33	PASS
Band4	5MHz	16QAM	19975	25RB#0	21.41	PASS
Band4	5MHz	16QAM	20175	1RB#0	22.50	PASS
Band4	5MHz	16QAM	20175	1RB#12	23.59	PASS
Band4	5MHz	16QAM	20175	1RB#24	22.50	PASS
Band4	5MHz	16QAM	20175	12RB#0	21.12	PASS
Band4	5MHz	16QAM	20175	12RB#6	21.12	PASS
Band4	5MHz	16QAM	20175	12RB#13	21.20	PASS
Band4	5MHz	16QAM	20175	25RB#0	21.07	PASS
Band4	5MHz	16QAM	20375	1RB#0	22.52	PASS
Band4	5MHz	16QAM	20375	1RB#12	22.28	PASS
Band4	5MHz	16QAM	20375	1RB#24	22.72	PASS
Band4	5MHz	16QAM	20375	12RB#0	21.23	PASS
Band4	5MHz	16QAM	20375	12RB#6	21.28	PASS
Band4	5MHz	16QAM	20375	12RB#13	21.35	PASS
Band4	5MHz	16QAM	20375	25RB#0	21.21	PASS
Band4	10MHz	QPSK	20000	1RB#0	23.45	PASS
Band4	10MHz	QPSK	20000	1RB#24	23.52	PASS
Band4	10MHz	QPSK	20000	1RB#49	23.27	PASS

Band4	10MHz	QPSK	20000	25RB#0	22.42	PASS
Band4	10MHz	QPSK	20000	25RB#12	22.44	PASS
Band4	10MHz	QPSK	20000	25RB#25	22.37	PASS
Band4	10MHz	QPSK	20000	50RB#0	22.47	PASS
Band4	10MHz	QPSK	20175	1RB#0	23.37	PASS
Band4	10MHz	QPSK	20175	1RB#24	23.42	PASS
Band4	10MHz	QPSK	20175	1RB#49	23.21	PASS
Band4	10MHz	QPSK	20175	25RB#0	22.13	PASS
Band4	10MHz	QPSK	20175	25RB#12	22.18	PASS
Band4	10MHz	QPSK	20175	25RB#25	22.14	PASS
Band4	10MHz	QPSK	20175	50RB#0	22.10	PASS
Band4	10MHz	QPSK	20350	1RB#0	23.17	PASS
Band4	10MHz	QPSK	20350	1RB#24	23.08	PASS
Band4	10MHz	QPSK	20350	1RB#49	23.16	PASS
Band4	10MHz	QPSK	20350	25RB#0	22.04	PASS
Band4	10MHz	QPSK	20350	25RB#12	22.06	PASS
Band4	10MHz	QPSK	20350	25RB#25	22.09	PASS
Band4	10MHz	QPSK	20350	50RB#0	22.09	PASS
Band4	10MHz	16QAM	20000	1RB#0	23.29	PASS
Band4	10MHz	16QAM	20000	1RB#24	23.43	PASS
Band4	10MHz	16QAM	20000	1RB#49	23.13	PASS
Band4	10MHz	16QAM	20000	25RB#0	21.41	PASS
Band4	10MHz	16QAM	20000	25RB#12	21.49	PASS
Band4	10MHz	16QAM	20000	25RB#25	21.35	PASS
Band4	10MHz	16QAM	20000	50RB#0	21.43	PASS
Band4	10MHz	16QAM	20175	1RB#0	22.69	PASS
Band4	10MHz	16QAM	20175	1RB#24	22.46	PASS
Band4	10MHz	16QAM	20175	1RB#49	22.43	PASS
Band4	10MHz	16QAM	20175	25RB#0	21.10	PASS
Band4	10MHz	16QAM	20175	25RB#12	21.23	PASS
Band4	10MHz	16QAM	20175	25RB#25	21.16	PASS
Band4	10MHz	16QAM	20175	50RB#0	21.11	PASS
Band4	10MHz	16QAM	20350	1RB#0	22.66	PASS
Band4	10MHz	16QAM	20350	1RB#24	22.68	PASS
Band4	10MHz	16QAM	20350	1RB#49	22.78	PASS
Band4	10MHz	16QAM	20350	25RB#0	20.99	PASS
Band4	10MHz	16QAM	20350	25RB#12	21.12	PASS
Band4	10MHz	16QAM	20350	25RB#25	21.13	PASS
Band4	10MHz	16QAM	20350	50RB#0	21.07	PASS
Band4	15MHz	QPSK	20025	1RB#0	23.44	PASS
Band4	15MHz	QPSK	20025	1RB#38	23.47	PASS
Band4	15MHz	QPSK	20025	1RB#74	23.21	PASS
Band4	15MHz	QPSK	20025	38RB#0	22.40	PASS

Band4	15MHz	QPSK	20025	38RB#18	22.41	PASS
Band4	15MHz	QPSK	20025	38RB#37	22.32	PASS
Band4	15MHz	QPSK	20025	75RB#0	22.35	PASS
Band4	15MHz	QPSK	20175	1RB#0	23.37	PASS
Band4	15MHz	QPSK	20175	1RB#38	23.21	PASS
Band4	15MHz	QPSK	20175	1RB#74	23.13	PASS
Band4	15MHz	QPSK	20175	38RB#0	22.23	PASS
Band4	15MHz	QPSK	20175	38RB#18	22.22	PASS
Band4	15MHz	QPSK	20175	38RB#37	22.12	PASS
Band4	15MHz	QPSK	20175	75RB#0	22.18	PASS
Band4	15MHz	QPSK	20325	1RB#0	23.17	PASS
Band4	15MHz	QPSK	20325	1RB#38	23.22	PASS
Band4	15MHz	QPSK	20325	1RB#74	23.17	PASS
Band4	15MHz	QPSK	20325	38RB#0	22.09	PASS
Band4	15MHz	QPSK	20325	38RB#18	22.21	PASS
Band4	15MHz	QPSK	20325	38RB#37	22.20	PASS
Band4	15MHz	QPSK	20325	75RB#0	22.18	PASS
Band4	15MHz	16QAM	20025	1RB#0	22.96	PASS
Band4	15MHz	16QAM	20025	1RB#38	23.00	PASS
Band4	15MHz	16QAM	20025	1RB#74	22.41	PASS
Band4	15MHz	16QAM	20025	38RB#0	21.39	PASS
Band4	15MHz	16QAM	20025	38RB#18	21.35	PASS
Band4	15MHz	16QAM	20025	38RB#37	21.20	PASS
Band4	15MHz	16QAM	20025	75RB#0	21.32	PASS
Band4	15MHz	16QAM	20175	1RB#0	22.60	PASS
Band4	15MHz	16QAM	20175	1RB#38	22.44	PASS
Band4	15MHz	16QAM	20175	1RB#74	22.37	PASS
Band4	15MHz	16QAM	20175	38RB#0	21.22	PASS
Band4	15MHz	16QAM	20175	38RB#18	21.22	PASS
Band4	15MHz	16QAM	20175	38RB#37	21.11	PASS
Band4	15MHz	16QAM	20175	75RB#0	21.20	PASS
Band4	15MHz	16QAM	20325	1RB#0	22.40	PASS
Band4	15MHz	16QAM	20325	1RB#38	22.50	PASS
Band4	15MHz	16QAM	20325	1RB#74	22.44	PASS
Band4	15MHz	16QAM	20325	38RB#0	21.04	PASS
Band4	15MHz	16QAM	20325	38RB#18	21.24	PASS
Band4	15MHz	16QAM	20325	38RB#37	21.15	PASS
Band4	15MHz	16QAM	20325	75RB#0	21.14	PASS
Band4	20MHz	QPSK	20050	1RB#0	23.57	PASS
Band4	20MHz	QPSK	20050	1RB#49	23.38	PASS
Band4	20MHz	QPSK	20050	1RB#99	23.12	PASS
Band4	20MHz	QPSK	20050	50RB#0	22.45	PASS
Band4	20MHz	QPSK	20050	50RB#25	22.37	PASS

Band4	20MHz	QPSK	20050	50RB#50	22.37	PASS
Band4	20MHz	QPSK	20050	100RB#0	22.30	PASS
Band4	20MHz	QPSK	20175	1RB#0	23.08	PASS
Band4	20MHz	QPSK	20175	1RB#49	23.17	PASS
Band4	20MHz	QPSK	20175	1RB#99	22.95	PASS
Band4	20MHz	QPSK	20175	50RB#0	22.18	PASS
Band4	20MHz	QPSK	20175	50RB#25	22.15	PASS
Band4	20MHz	QPSK	20175	50RB#50	22.16	PASS
Band4	20MHz	QPSK	20175	100RB#0	22.15	PASS
Band4	20MHz	QPSK	20300	1RB#0	23.25	PASS
Band4	20MHz	QPSK	20300	1RB#49	23.26	PASS
Band4	20MHz	QPSK	20300	1RB#99	23.18	PASS
Band4	20MHz	QPSK	20300	50RB#0	22.06	PASS
Band4	20MHz	QPSK	20300	50RB#25	22.16	PASS
Band4	20MHz	QPSK	20300	50RB#50	22.12	PASS
Band4	20MHz	QPSK	20300	100RB#0	22.11	PASS
Band4	20MHz	16QAM	20050	1RB#0	22.78	PASS
Band4	20MHz	16QAM	20050	1RB#49	22.69	PASS
Band4	20MHz	16QAM	20050	1RB#99	22.46	PASS
Band4	20MHz	16QAM	20050	50RB#0	21.37	PASS
Band4	20MHz	16QAM	20050	50RB#25	21.36	PASS
Band4	20MHz	16QAM	20050	50RB#50	21.30	PASS
Band4	20MHz	16QAM	20050	100RB#0	21.30	PASS
Band4	20MHz	16QAM	20175	1RB#0	22.63	PASS
Band4	20MHz	16QAM	20175	1RB#49	22.40	PASS
Band4	20MHz	16QAM	20175	1RB#99	22.21	PASS
Band4	20MHz	16QAM	20175	50RB#0	21.09	PASS
Band4	20MHz	16QAM	20175	50RB#25	21.25	PASS
Band4	20MHz	16QAM	20175	50RB#50	21.17	PASS
Band4	20MHz	16QAM	20175	100RB#0	21.15	PASS
Band4	20MHz	16QAM	20300	1RB#0	22.35	PASS
Band4	20MHz	16QAM	20300	1RB#49	22.33	PASS
Band4	20MHz	16QAM	20300	1RB#99	22.34	PASS
Band4	20MHz	16QAM	20300	50RB#0	21.06	PASS
Band4	20MHz	16QAM	20300	50RB#25	21.05	PASS
Band4	20MHz	16QAM	20300	50RB#50	21.09	PASS
Band4	20MHz	16QAM	20300	100RB#0	21.11	PASS
Band13	5MHz	QPSK	23205	1RB#0	25.27	PASS
Band13	5MHz	QPSK	23205	1RB#12	25.23	PASS
Band13	5MHz	QPSK	23205	1RB#24	25.37	PASS
Band13	5MHz	QPSK	23205	12RB#0	24.25	PASS
Band13	5MHz	QPSK	23205	12RB#6	24.30	PASS
Band13	5MHz	QPSK	23205	12RB#13	24.35	PASS

Band13	5MHz	QPSK	23205	25RB#0	24.25	PASS
Band13	5MHz	QPSK	23230	1RB#0	25.50	PASS
Band13	5MHz	QPSK	23230	1RB#12	25.34	PASS
Band13	5MHz	QPSK	23230	1RB#24	25.43	PASS
Band13	5MHz	QPSK	23230	12RB#0	24.24	PASS
Band13	5MHz	QPSK	23230	12RB#6	24.29	PASS
Band13	5MHz	QPSK	23230	12RB#13	24.35	PASS
Band13	5MHz	QPSK	23230	25RB#0	24.22	PASS
Band13	5MHz	QPSK	23255	1RB#0	25.41	PASS
Band13	5MHz	QPSK	23255	1RB#12	25.59	PASS
Band13	5MHz	QPSK	23255	1RB#24	25.36	PASS
Band13	5MHz	QPSK	23255	12RB#0	24.34	PASS
Band13	5MHz	QPSK	23255	12RB#6	24.32	PASS
Band13	5MHz	QPSK	23255	12RB#13	24.27	PASS
Band13	5MHz	QPSK	23255	25RB#0	24.24	PASS
Band13	5MHz	16QAM	23205	1RB#0	24.35	PASS
Band13	5MHz	16QAM	23205	1RB#12	24.44	PASS
Band13	5MHz	16QAM	23205	1RB#24	24.64	PASS
Band13	5MHz	16QAM	23205	12RB#0	23.31	PASS
Band13	5MHz	16QAM	23205	12RB#6	23.39	PASS
Band13	5MHz	16QAM	23205	12RB#13	23.40	PASS
Band13	5MHz	16QAM	23205	25RB#0	23.40	PASS
Band13	5MHz	16QAM	23230	1RB#0	24.70	PASS
Band13	5MHz	16QAM	23230	1RB#12	24.55	PASS
Band13	5MHz	16QAM	23230	1RB#24	24.65	PASS
Band13	5MHz	16QAM	23230	12RB#0	23.22	PASS
Band13	5MHz	16QAM	23230	12RB#6	23.27	PASS
Band13	5MHz	16QAM	23230	12RB#13	23.27	PASS
Band13	5MHz	16QAM	23230	25RB#0	23.21	PASS
Band13	5MHz	16QAM	23255	1RB#0	24.66	PASS
Band13	5MHz	16QAM	23255	1RB#12	25.49	PASS
Band13	5MHz	16QAM	23255	1RB#24	24.71	PASS
Band13	5MHz	16QAM	23255	12RB#0	23.29	PASS
Band13	5MHz	16QAM	23255	12RB#6	23.30	PASS
Band13	5MHz	16QAM	23255	12RB#13	23.31	PASS
Band13	5MHz	16QAM	23255	25RB#0	23.23	PASS
Band13	10MHz	QPSK	23230	1RB#0	25.06	PASS
Band13	10MHz	QPSK	23230	1RB#24	25.24	PASS
Band13	10MHz	QPSK	23230	1RB#49	25.48	PASS
Band13	10MHz	QPSK	23230	25RB#0	24.30	PASS
Band13	10MHz	QPSK	23230	25RB#12	24.30	PASS
Band13	10MHz	QPSK	23230	25RB#25	24.31	PASS
Band13	10MHz	QPSK	23230	50RB#0	24.33	PASS



Band13	10MHz	16QAM	23230	1RB#0	24.84	PASS
Band13	10MHz	16QAM	23230	1RB#24	24.95	PASS
Band13	10MHz	16QAM	23230	1RB#49	25.05	PASS
Band13	10MHz	16QAM	23230	25RB#0	23.31	PASS
Band13	10MHz	16QAM	23230	25RB#12	23.29	PASS
Band13	10MHz	16QAM	23230	25RB#25	23.33	PASS
Band13	10MHz	16QAM	23230	50RB#0	23.29	PASS

## Appendix B: Peak-to-Average Ratio(CCDF)

### Test Result

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dB)	Limit(dB)	Verdict
Band2	1.4MHz	QPSK	18607	1RB#0	4.01	13	PASS
Band2	1.4MHz	QPSK	18607	6RB#0	5.09	13	PASS
Band2	1.4MHz	QPSK	18900	1RB#0	4.36	13	PASS
Band2	1.4MHz	QPSK	18900	6RB#0	5.45	13	PASS
Band2	1.4MHz	QPSK	19193	1RB#0	3.87	13	PASS
Band2	1.4MHz	QPSK	19193	6RB#0	4.77	13	PASS
Band2	1.4MHz	16QAM	18607	1RB#0	4.69	13	PASS
Band2	1.4MHz	16QAM	18607	6RB#0	6.07	13	PASS
Band2	1.4MHz	16QAM	18900	1RB#0	5.24	13	PASS
Band2	1.4MHz	16QAM	18900	6RB#0	6.32	13	PASS
Band2	1.4MHz	16QAM	19193	1RB#0	4.67	13	PASS
Band2	1.4MHz	16QAM	19193	6RB#0	5.72	13	PASS
Band2	3MHz	QPSK	18615	1RB#0	3.83	13	PASS
Band2	3MHz	QPSK	18615	15RB#0	5.02	13	PASS
Band2	3MHz	QPSK	18900	1RB#0	4.37	13	PASS
Band2	3MHz	QPSK	18900	15RB#0	5.25	13	PASS
Band2	3MHz	QPSK	19185	1RB#0	3.99	13	PASS
Band2	3MHz	QPSK	19185	15RB#0	4.81	13	PASS
Band2	3MHz	16QAM	18615	1RB#0	4.68	13	PASS
Band2	3MHz	16QAM	18615	15RB#0	6.01	13	PASS
Band2	3MHz	16QAM	18900	1RB#0	5.08	13	PASS
Band2	3MHz	16QAM	18900	15RB#0	6.17	13	PASS
Band2	3MHz	16QAM	19185	1RB#0	4.71	13	PASS
Band2	3MHz	16QAM	19185	15RB#0	5.82	13	PASS
Band2	5MHz	QPSK	18625	1RB#0	3.86	13	PASS
Band2	5MHz	QPSK	18625	25RB#0	5.10	13	PASS
Band2	5MHz	QPSK	18900	1RB#0	4.21	13	PASS
Band2	5MHz	QPSK	18900	25RB#0	5.22	13	PASS
Band2	5MHz	QPSK	19175	1RB#0	3.96	13	PASS
Band2	5MHz	QPSK	19175	25RB#0	4.94	13	PASS
Band2	5MHz	16QAM	18625	1RB#0	4.48	13	PASS
Band2	5MHz	16QAM	18625	25RB#0	6.01	13	PASS
Band2	5MHz	16QAM	18900	1RB#0	5.21	13	PASS
Band2	5MHz	16QAM	18900	25RB#0	6.18	13	PASS
Band2	5MHz	16QAM	19175	1RB#0	4.88	13	PASS

Band2	5MHz	16QAM	19175	25RB#0	5.94	13	PASS
Band2	10MHz	QPSK	18650	1RB#0	3.85	13	PASS
Band2	10MHz	QPSK	18650	50RB#0	5.20	13	PASS
Band2	10MHz	QPSK	18900	1RB#0	4.45	13	PASS
Band2	10MHz	QPSK	18900	50RB#0	5.31	13	PASS
Band2	10MHz	QPSK	19150	1RB#0	4.59	13	PASS
Band2	10MHz	QPSK	19150	50RB#0	5.26	13	PASS
Band2	10MHz	16QAM	18650	1RB#0	4.35	13	PASS
Band2	10MHz	16QAM	18650	50RB#0	6.08	13	PASS
Band2	10MHz	16QAM	18900	1RB#0	5.37	13	PASS
Band2	10MHz	16QAM	18900	50RB#0	6.17	13	PASS
Band2	10MHz	16QAM	19150	1RB#0	5.15	13	PASS
Band2	10MHz	16QAM	19150	50RB#0	6.11	13	PASS
Band2	15MHz	QPSK	18675	1RB#0	4.26	13	PASS
Band2	15MHz	QPSK	18675	75RB#0	5.43	13	PASS
Band2	15MHz	QPSK	18900	1RB#0	4.59	13	PASS
Band2	15MHz	QPSK	18900	75RB#0	5.52	13	PASS
Band2	15MHz	QPSK	19125	1RB#0	4.65	13	PASS
Band2	15MHz	QPSK	19125	75RB#0	5.44	13	PASS
Band2	15MHz	16QAM	18675	1RB#0	5.05	13	PASS
Band2	15MHz	16QAM	18675	75RB#0	6.18	13	PASS
Band2	15MHz	16QAM	18900	1RB#0	5.43	13	PASS
Band2	15MHz	16QAM	18900	75RB#0	6.23	13	PASS
Band2	15MHz	16QAM	19125	1RB#0	5.54	13	PASS
Band2	15MHz	16QAM	19125	75RB#0	6.19	13	PASS
Band2	20MHz	QPSK	18700	1RB#0	4.26	13	PASS
Band2	20MHz	QPSK	18700	100RB#0	5.27	13	PASS
Band2	20MHz	QPSK	18900	1RB#0	4.60	13	PASS
Band2	20MHz	QPSK	18900	100RB#0	5.27	13	PASS
Band2	20MHz	QPSK	19100	1RB#0	4.38	13	PASS
Band2	20MHz	QPSK	19100	100RB#0	5.23	13	PASS
Band2	20MHz	16QAM	18700	1RB#0	5.02	13	PASS
Band2	20MHz	16QAM	18700	100RB#0	6.08	13	PASS
Band2	20MHz	16QAM	18900	1RB#0	5.34	13	PASS
Band2	20MHz	16QAM	18900	100RB#0	6.11	13	PASS
Band2	20MHz	16QAM	19100	1RB#0	5.11	13	PASS
Band2	20MHz	16QAM	19100	100RB#0	6.09	13	PASS
Band4	1.4MHz	QPSK	19957	1RB#0	5.05	13	PASS
Band4	1.4MHz	QPSK	19957	6RB#0	5.66	13	PASS
Band4	1.4MHz	QPSK	20175	1RB#0	4.80	13	PASS
Band4	1.4MHz	QPSK	20175	6RB#0	5.54	13	PASS
Band4	1.4MHz	QPSK	20393	1RB#0	4.17	13	PASS
Band4	1.4MHz	QPSK	20393	6RB#0	5.10	13	PASS

Band4	1.4MHz	16QAM	19957	1RB#0	5.89	13	PASS
Band4	1.4MHz	16QAM	19957	6RB#0	6.62	13	PASS
Band4	1.4MHz	16QAM	20175	1RB#0	5.63	13	PASS
Band4	1.4MHz	16QAM	20175	6RB#0	6.32	13	PASS
Band4	1.4MHz	16QAM	20393	1RB#0	4.94	13	PASS
Band4	1.4MHz	16QAM	20393	6RB#0	6.08	13	PASS
Band4	3MHz	QPSK	19965	1RB#0	4.94	13	PASS
Band4	3MHz	QPSK	19965	15RB#0	5.56	13	PASS
Band4	3MHz	QPSK	20175	1RB#0	4.72	13	PASS
Band4	3MHz	QPSK	20175	15RB#0	5.41	13	PASS
Band4	3MHz	QPSK	20385	1RB#0	4.41	13	PASS
Band4	3MHz	QPSK	20385	15RB#0	5.23	13	PASS
Band4	3MHz	16QAM	19965	1RB#0	5.78	13	PASS
Band4	3MHz	16QAM	19965	15RB#0	6.36	13	PASS
Band4	3MHz	16QAM	20175	1RB#0	5.54	13	PASS
Band4	3MHz	16QAM	20175	15RB#0	6.24	13	PASS
Band4	3MHz	16QAM	20385	1RB#0	5.34	13	PASS
Band4	3MHz	16QAM	20385	15RB#0	6.27	13	PASS
Band4	5MHz	QPSK	19975	1RB#0	4.88	13	PASS
Band4	5MHz	QPSK	19975	25RB#0	5.56	13	PASS
Band4	5MHz	QPSK	20175	1RB#0	4.72	13	PASS
Band4	5MHz	QPSK	20175	25RB#0	5.52	13	PASS
Band4	5MHz	QPSK	20375	1RB#0	4.64	13	PASS
Band4	5MHz	QPSK	20375	25RB#0	5.42	13	PASS
Band4	5MHz	16QAM	19975	1RB#0	5.63	13	PASS
Band4	5MHz	16QAM	19975	25RB#0	6.27	13	PASS
Band4	5MHz	16QAM	20175	1RB#0	5.55	13	PASS
Band4	5MHz	16QAM	20175	25RB#0	6.17	13	PASS
Band4	5MHz	16QAM	20375	1RB#0	5.58	13	PASS
Band4	5MHz	16QAM	20375	25RB#0	6.33	13	PASS
Band4	10MHz	QPSK	20000	1RB#0	4.86	13	PASS
Band4	10MHz	QPSK	20000	50RB#0	5.53	13	PASS
Band4	10MHz	QPSK	20175	1RB#0	4.65	13	PASS
Band4	10MHz	QPSK	20175	50RB#0	5.43	13	PASS
Band4	10MHz	QPSK	20350	1RB#0	4.61	13	PASS
Band4	10MHz	QPSK	20350	50RB#0	5.41	13	PASS
Band4	10MHz	16QAM	20000	1RB#0	5.43	13	PASS
Band4	10MHz	16QAM	20000	50RB#0	6.27	13	PASS
Band4	10MHz	16QAM	20175	1RB#0	5.48	13	PASS
Band4	10MHz	16QAM	20175	50RB#0	6.16	13	PASS
Band4	10MHz	16QAM	20350	1RB#0	5.26	13	PASS
Band4	10MHz	16QAM	20350	50RB#0	6.24	13	PASS
Band4	15MHz	QPSK	20025	1RB#0	4.88	13	PASS

Band4	15MHz	QPSK	20025	75RB#0	5.51	13	PASS
Band4	15MHz	QPSK	20175	1RB#0	4.58	13	PASS
Band4	15MHz	QPSK	20175	75RB#0	5.59	13	PASS
Band4	15MHz	QPSK	20325	1RB#0	4.56	13	PASS
Band4	15MHz	QPSK	20325	75RB#0	5.55	13	PASS
Band4	15MHz	16QAM	20025	1RB#0	5.72	13	PASS
Band4	15MHz	16QAM	20025	75RB#0	6.24	13	PASS
Band4	15MHz	16QAM	20175	1RB#0	5.42	13	PASS
Band4	15MHz	16QAM	20175	75RB#0	6.25	13	PASS
Band4	15MHz	16QAM	20325	1RB#0	5.46	13	PASS
Band4	15MHz	16QAM	20325	75RB#0	6.28	13	PASS
Band4	20MHz	QPSK	20050	1RB#0	4.77	13	PASS
Band4	20MHz	QPSK	20050	100RB#0	5.12	13	PASS
Band4	20MHz	QPSK	20175	1RB#0	3.43	13	PASS
Band4	20MHz	QPSK	20175	100RB#0	5.26	13	PASS
Band4	20MHz	QPSK	20300	1RB#0	4.62	13	PASS
Band4	20MHz	QPSK	20300	100RB#0	5.29	13	PASS
Band4	20MHz	16QAM	20050	1RB#0	5.52	13	PASS
Band4	20MHz	16QAM	20050	100RB#0	5.99	13	PASS
Band4	20MHz	16QAM	20175	1RB#0	5.52	13	PASS
Band4	20MHz	16QAM	20175	100RB#0	6.06	13	PASS
Band4	20MHz	16QAM	20300	1RB#0	5.34	13	PASS
Band4	20MHz	16QAM	20300	100RB#0	6.12	13	PASS
Band13	5MHz	QPSK	23205	1RB#0	3.43	13	PASS
Band13	5MHz	QPSK	23205	25RB#0	4.88	13	PASS
Band13	5MHz	QPSK	23230	1RB#0	3.85	13	PASS
Band13	5MHz	QPSK	23230	25RB#0	4.84	13	PASS
Band13	5MHz	QPSK	23255	1RB#0	3.39	13	PASS
Band13	5MHz	QPSK	23255	25RB#0	5.22	13	PASS
Band13	5MHz	16QAM	23205	1RB#0	4.23	13	PASS
Band13	5MHz	16QAM	23205	25RB#0	5.76	13	PASS
Band13	5MHz	16QAM	23230	1RB#0	4.33	13	PASS
Band13	5MHz	16QAM	23230	25RB#0	5.77	13	PASS
Band13	5MHz	16QAM	23255	1RB#0	4.18	13	PASS
Band13	5MHz	16QAM	23255	25RB#0	6.02	13	PASS
Band13	10MHz	QPSK	23230	1RB#0	3.42	13	PASS
Band13	10MHz	QPSK	23230	50RB#0	5.15	13	PASS
Band13	10MHz	16QAM	23230	1RB#0	4.21	13	PASS
Band13	10MHz	16QAM	23230	50RB#0	6.05	13	PASS

# Test Graphs

Band2\_1.4MHz\_QPSK\_18607\_1RB#0



Band2\_1.4MHz\_QPSK\_18607\_6RB#0



Band2\_1.4MHz\_QPSK\_18900\_1RB#0



Band2\_1.4MHz\_QPSK\_18900\_6RB#0



Band2\_1.4MHz\_QPSK\_19193\_1RB#0



Band2\_1.4MHz\_QPSK\_19193\_6RB#0



Band2\_1.4MHz\_16QAM\_18607\_1RB#0



Band2\_1.4MHz\_16QAM\_18607\_6RB#0



Band2\_1.4MHz\_16QAM\_18900\_1RB#0





Band2\_1.4MHz\_16QAM\_18900\_6RB#0



Band2\_1.4MHz\_16QAM\_19193\_1RB#0




Band2\_1.4MHz\_16QAM\_19193\_6RB#0



Band2\_3MHz\_QPSK\_18615\_1RB#0



Band2\_3MHz\_QPSK\_18615\_15RB#0

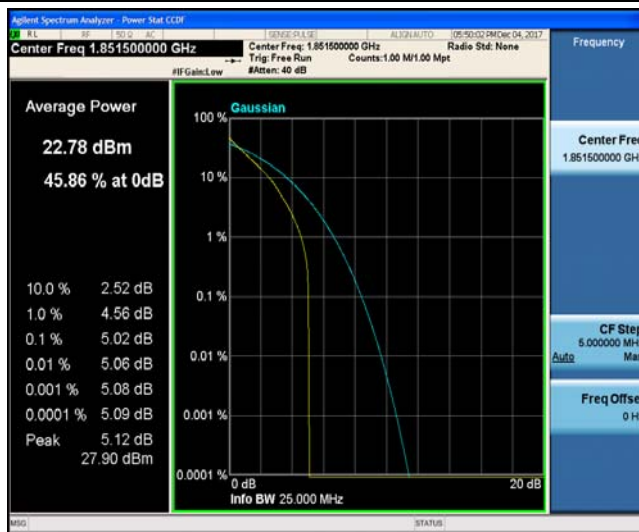


Band2\_3MHz\_QPSK\_18900\_1RB#0



Band2\_3MHz\_QPSK\_18900\_15RB#0



Band2\_3MHz\_QPSK\_19185\_1RB#0

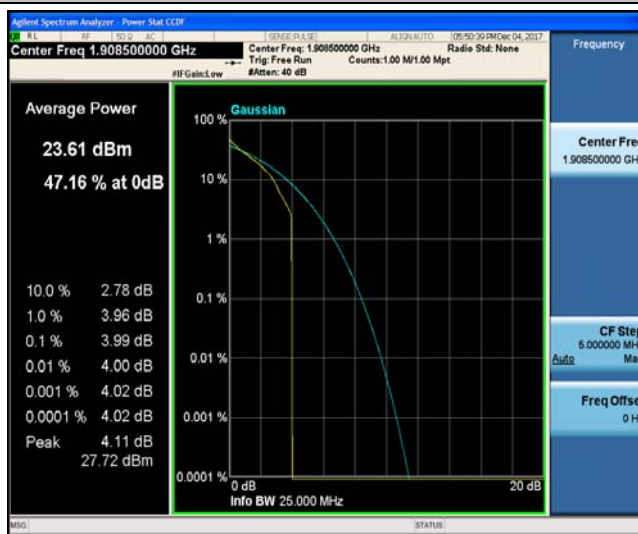

Band2\_3MHz\_QPSK\_19185\_15RB#0



Band2\_3MHz\_16QAM\_18615\_1RB#0



Band2\_3MHz\_16QAM\_18615\_15RB#0



Band2\_3MHz\_16QAM\_18900\_1RB#0




Band2\_3MHz\_16QAM\_18900\_15RB#0



Band2\_3MHz\_16QAM\_19185\_1RB#0




Band2\_3MHz\_16QAM\_19185\_15RB#0

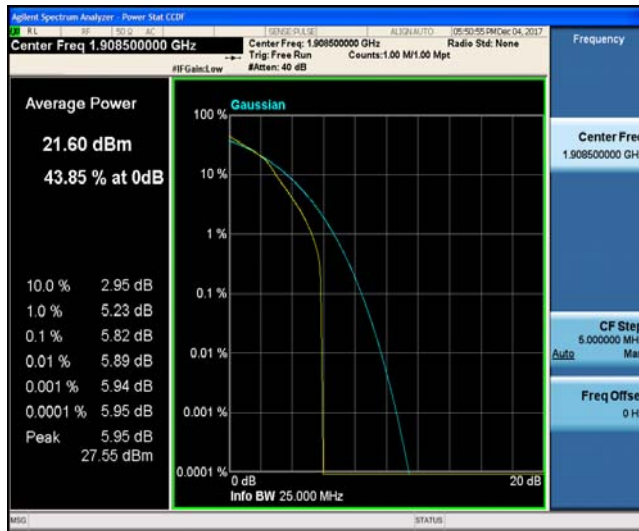

Band2\_5MHz\_QPSK\_18625\_1RB#0




Band2\_5MHz\_QPSK\_18625\_25RB#0

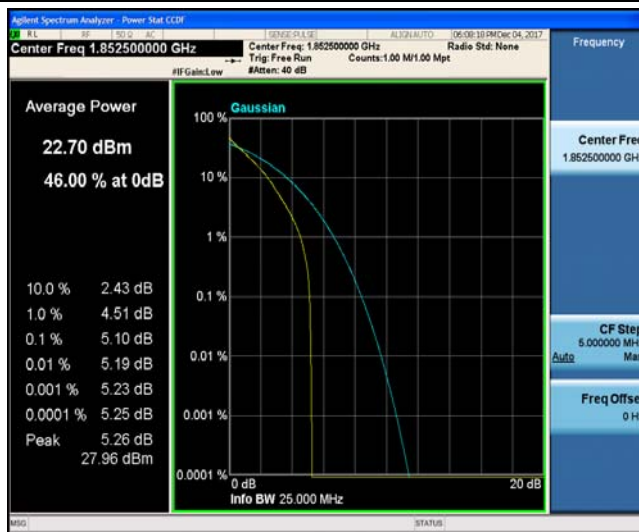

Band2\_5MHz\_QPSK\_18900\_1RB#0



Band2\_5MHz\_QPSK\_18900\_25RB#0

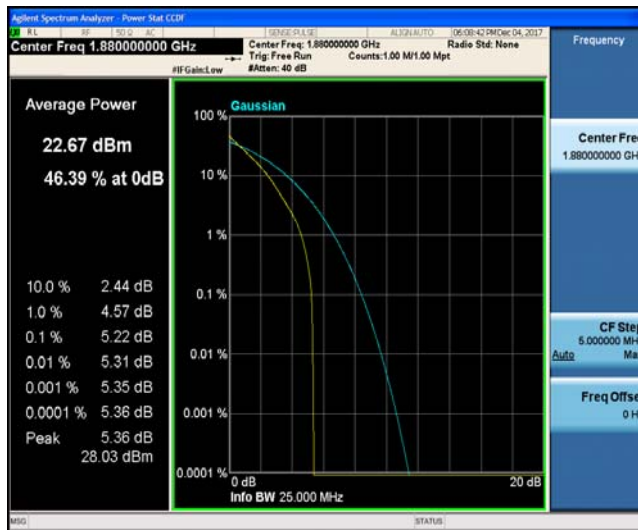

Band2\_5MHz\_QPSK\_19175\_1RB#0



Band2\_5MHz\_QPSK\_19175\_25RB#0



Band2\_5MHz\_16QAM\_18625\_1RB#0



Band2\_5MHz\_16QAM\_18625\_25RB#0



Band2\_5MHz\_16QAM\_18900\_1RB#0







Band2\_5MHz\_16QAM\_18900\_25RB#0



Band2\_5MHz\_16QAM\_19175\_1RB#0

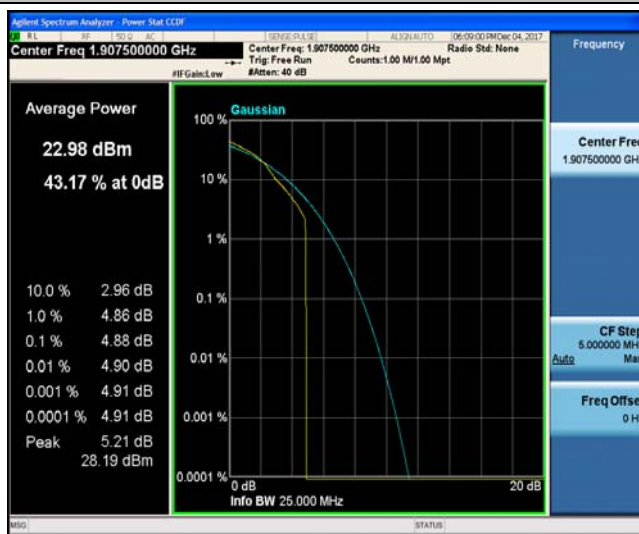

Band2\_5MHz\_16QAM\_19175\_25RB#0

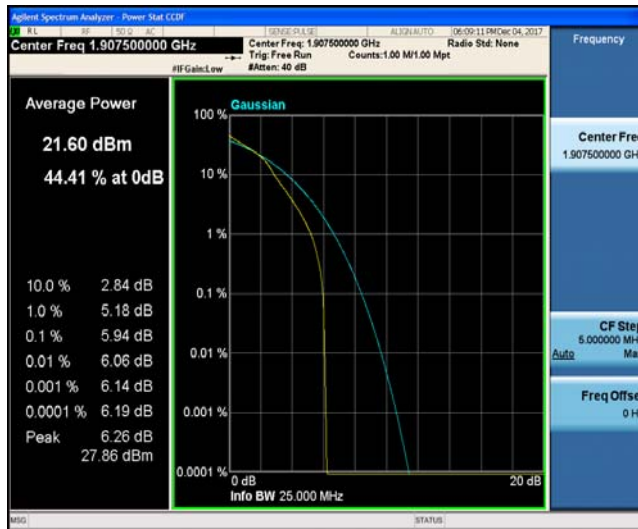

Band2\_10MHz\_QPSK\_18650\_1RB#0




Band2\_10MHz\_QPSK\_18650\_50RB#0



Band2\_10MHz\_QPSK\_18900\_1RB#0



Band2\_10MHz\_QPSK\_18900\_50RB#0

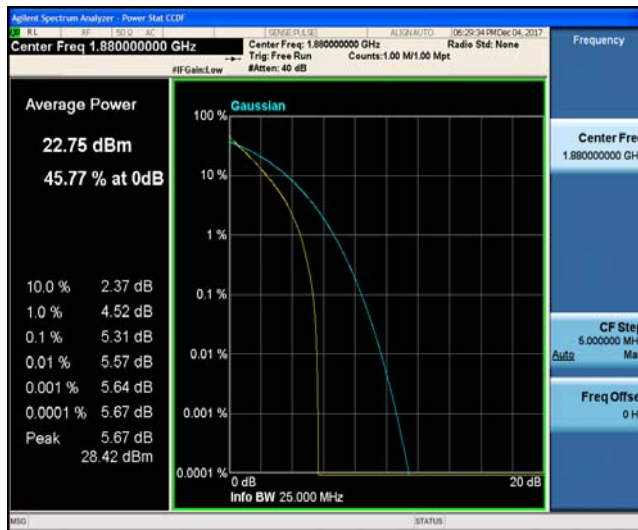

Band2\_10MHz\_QPSK\_19150\_1RB#0



Band2\_10MHz\_QPSK\_19150\_50RB#0



Band2\_10MHz\_16QAM\_18650\_1RB#0



Band2\_10MHz\_16QAM\_18650\_50RB#0



Band2\_10MHz\_16QAM\_18900\_1RB#0



Band2\_10MHz\_16QAM\_18900\_50RB#0



Band2\_10MHz\_16QAM\_19150\_1RB#0




Band2\_10MHz\_16QAM\_19150\_50RB#0



Band2\_15MHz\_QPSK\_18675\_1RB#0



Band2\_15MHz\_QPSK\_18675\_75RB#0

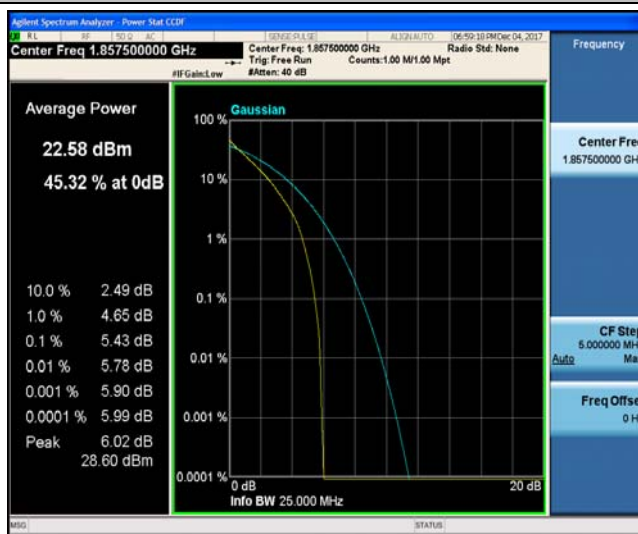

Band2\_15MHz\_QPSK\_18900\_1RB#0



Band2\_15MHz\_QPSK\_18900\_75RB#0



Band2\_15MHz\_QPSK\_19125\_1RB#0



Band2\_15MHz\_QPSK\_19125\_75RB#0



Band2\_15MHz\_16QAM\_18675\_1RB#0



Band2\_15MHz\_16QAM\_18675\_75RB#0



Band2\_15MHz\_16QAM\_18900\_1RB#0





Band2\_15MHz\_16QAM\_18900\_75RB#0




Band2\_15MHz\_16QAM\_19125\_1RB#0




Band2\_15MHz\_16QAM\_19125\_75RB#0




Band2\_20MHz\_QPSK\_18700\_1RB#0

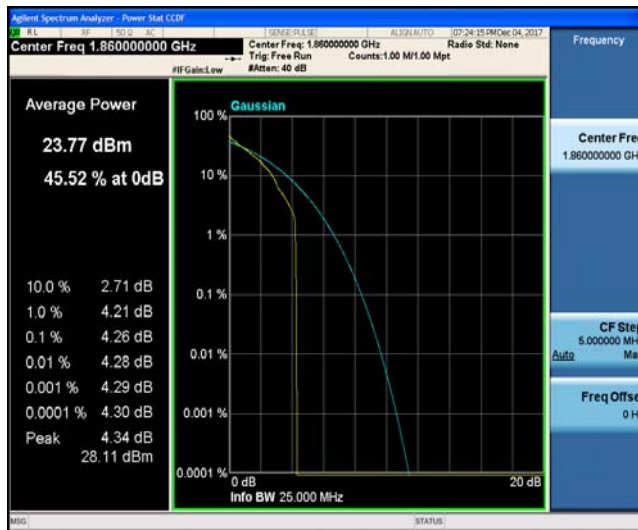

Band2\_20MHz\_QPSK\_18700\_100RB#0

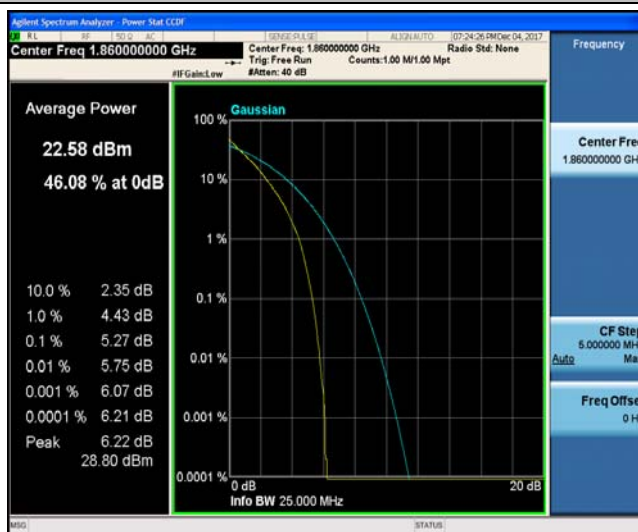

Band2\_20MHz\_QPSK\_18900\_1RB#0

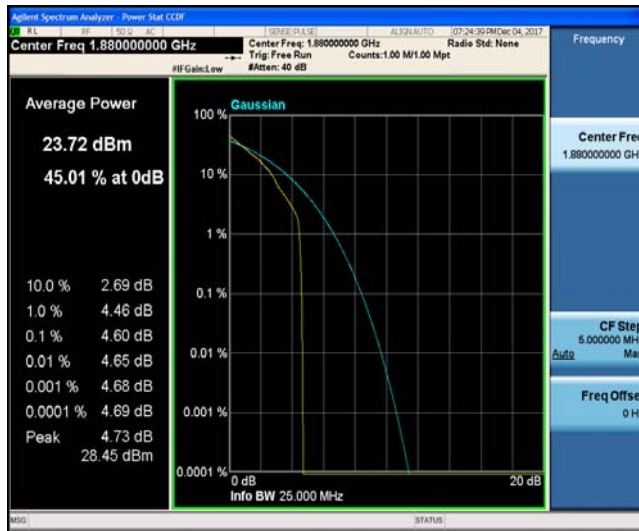

Band2\_20MHz\_QPSK\_18900\_100RB#0



Band2\_20MHz\_QPSK\_19100\_1RB#0



Band2\_20MHz\_QPSK\_19100\_100RB#0



Band2\_20MHz\_16QAM\_18700\_1RB#0




Band2\_20MHz\_16QAM\_18700\_100RB#0



Band2\_20MHz\_16QAM\_18900\_1RB#0



Band2\_20MHz\_16QAM\_18900\_100RB#0

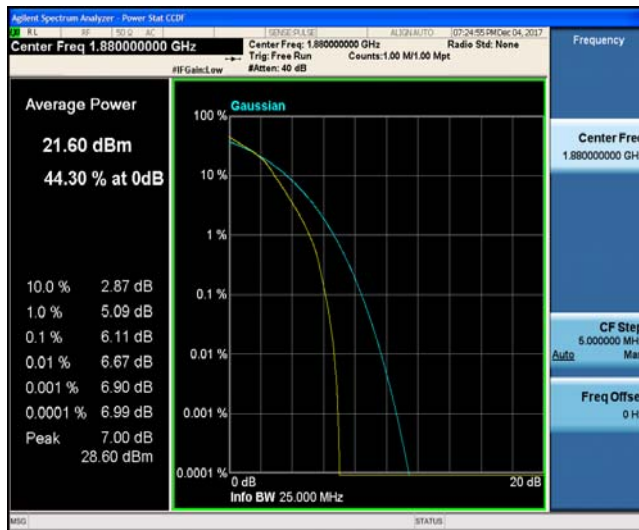

Band2\_20MHz\_16QAM\_19100\_1RB#0




Band2\_20MHz\_16QAM\_19100\_100RB#0



Band4\_1.4MHz\_QPSK\_19957\_1RB#0




Band4\_1.4MHz\_QPSK\_19957\_6RB#0

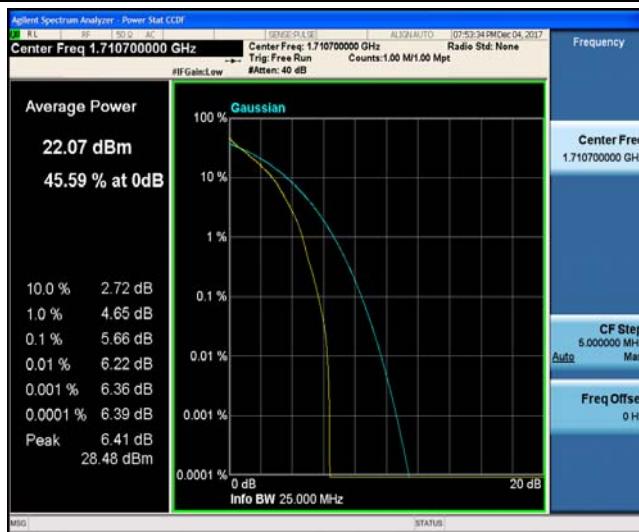

Band4\_1.4MHz\_QPSK\_20175\_1RB#0



Band4\_1.4MHz\_QPSK\_20175\_6RB#0

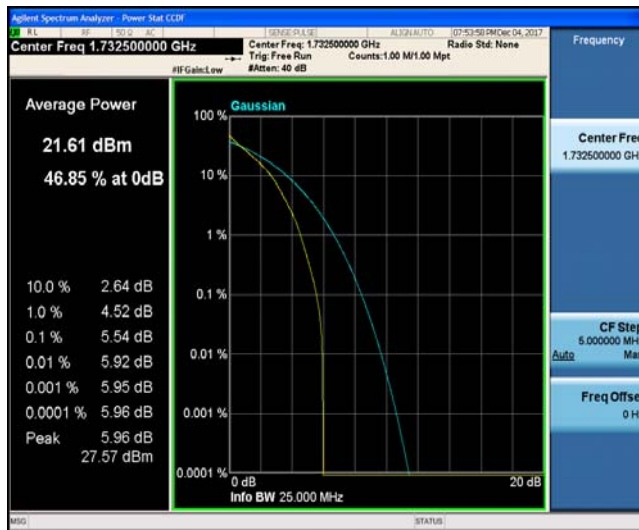

Band4\_1.4MHz\_QPSK\_20393\_1RB#0




Band4\_1.4MHz\_QPSK\_20393\_6RB#0



Band4\_1.4MHz\_16QAM\_19957\_1RB#0



Band4\_1.4MHz\_16QAM\_19957\_6RB#0

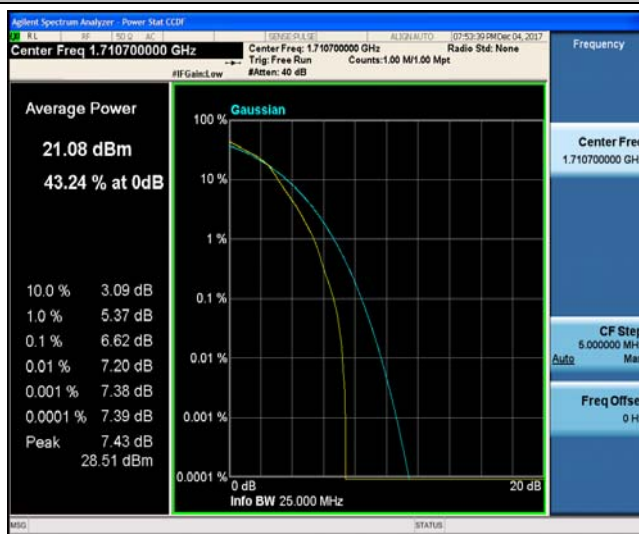

Band4\_1.4MHz\_16QAM\_20175\_1RB#0





Band4\_1.4MHz\_16QAM\_20175\_6RB#0




Band4\_1.4MHz\_16QAM\_20393\_1RB#0



Band4\_1.4MHz\_16QAM\_20393\_6RB#0



Band4\_3MHz\_QPSK\_19965\_1RB#0

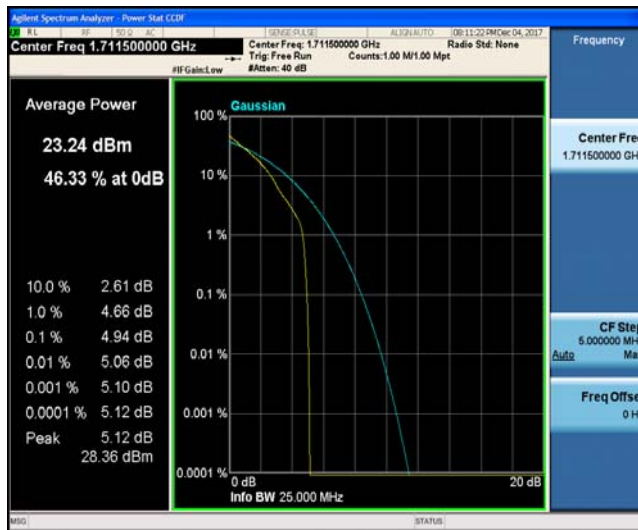

Band4\_3MHz\_QPSK\_19965\_15RB#0



Band4\_3MHz\_QPSK\_20175\_1RB#0