


HB635 1 说明书 (HelloBaby)

说明书为折疊式
尺寸: 540*120MM
材质: 100g双胶纸 (彩色)
版本: V1.0
类型: 环保

版本	修改内容	日期
Ver: 1.0	首次发行.	2022/03/10

设计	审核	审批
王勇		
2022/03/10		

540.00 mm

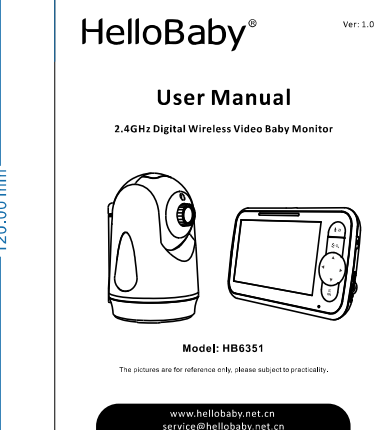

Model: HB6351

www.hellobaby.net.cn
service@hellobaby.net.cn

1. Thank you for purchasing the HB6351 Baby Monitor. With our baby monitor, you could see and hear your baby sleeping or playing in their room anytime.

2. Please return your original dated sales receipt for your records. For warranty service of your product, you will need to provide a copy of your dated sales receipt to confirm warranty status. Registration is not required for warranty coverage.

3. Please make sure the following included in your package
Parent unit x 1 Wall-mounting kit x 1 Power Adapter x 2 User manual x 1

4. **1. SAFETY INSTRUCTIONS**
CAUTION: Keep the device away from children.
Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3ft (0.9m) away). Never use extension cords with AC Adapters. Only use the AC Adapters provided.
Choking hazard: This product contains small parts, please be careful when unpack and assemble the product.
Read and keep to instructions: All the safety and operating instructions should be read before the video baby monitor is operated. This product cannot replace responsible adult supervision.
Water and moisture: This product is designed for indoor use only. The unit should not be exposed to rain, moisture, dripping or splashing. No objects filled with liquid should be placed on top of, or beside the product, such as a glass or vase. This item should not be used near water.
DO NOT: Use the appliance if the cord or plug is damaged. If your baby monitor is not operating properly or has suffered any damage, contact "VideoTimes" service center to request inspection and repair of the appliance in order to avoid any possible risk.
DO NOT: Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit. Otherwise, the guarantee will be made void.
Ventilation: This baby monitor should not be used on a bed, sofa, rug or similar surface that may block the ventilation openings, or in an enclosed space such as a bookcase or a drawer that may impede air flow.
Keep away from sources of heat: This unit should not be exposed to direct heat sources such as candles, radiators, heat registers, stoves or any appliance that emits heat. This unit should not be left in direct sunlight.
Power source: This unit should only be used with the AC power adapters included in this package (rated 5V DC 1A).
Damage requiring service: This unit should be serviced by qualified personnel only when:
- Objects have fallen or liquid has been spilled into the product.
- The units have been exposed to rain.

5. **3. INSTALLATION GUIDELINES**
* To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions.
* Any large metal objects, like a refrigerator, a mirror, a filing cabinet, metallic doors or reinforced concrete between the baby and parent unit may block the radio signal.
* The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
* Use of other 2.4GHz products, such as wireless networks (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away at least 5ft (1.5m) from such products, or turn them off if they cause interference.

6. **4. PLACEMENT OF THE BABY MONITOR**
The camera can be placed on the desktop or mounted on the wall. Do not place baby monitor on soft quilted blankets or in the corners of cupboards, shelves, etc. Keep the baby monitor away from heat sources such as radiators, chandeliers, cookers and direct sunlight. Keep the baby unit away from TV sets, microwave oven and radios. If interference occurs, move the camera to elsewhere.
* Place the camera within 6 feet (2 meters) of the area being monitored for optimum performance.

7. **5. GETTING STARTED**
5.1 TURN ON THE BABY UNIT:
1. Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit;
2. Insert the other end of the power adapter into suitable electrical outlet.
3. Once the power is connected, the power LED will light up.
5.2 TURN ON THE PARENT UNIT:
1. Insert the DC plug of the power adapter into the DC Jack in the side of the parent Unit.
2. Insert the other end of the power adapter into a suitable electrical outlet.
3. Press and hold the power key 3 seconds on the top of the parent unit;
4. Once parent unit is on, the power LED will light up and the image will display on the LCD.

8. **6.3 BABY UNIT OVERVIEW:**
MIC
Light sensor
Infrared LEDs
Lens
Speaker
Power LED
Antenna
DC Jack
Parent key
Temperature sensor

7. **7. KEY OPERATION**
7.1 TURN ON/OFF: Press and hold the power key for 3 seconds to turn on/off the parents unit.
7.2 UP / DOWN KEY: Press to tilt the camera up by one step. Press and hold to tilt continuously.
7.3 RIGHT / LEFT KEY: Press to pan the camera left by one step. Press and hold to pan continuously.
7.4 LEFT / RIGHT KEY: Press once to pan the camera right by one step. Press and hold to pan continuously.
7.5 CAMERA VIEW/SCAN: Press once to view/scan camera: during scan mode, the scan icon will be displayed on the top of screen. Each camera's video will be displayed on the LCD around 10 seconds then change to next camera.
7.6 DIGITAL ZOOM: Press and hold the zoom key around 2 seconds to operate zoom in/out;
7.7 Two Way Talk: Press and hold the two-way talk mode. A microphone icon will be displayed in the corner of the LCD screen. Release the key to stop.
8. MENU OPERATION
8.1 PANNING THE CAMERA AND PARENT UNITS
The baby unit is pre-registed to your parent unit. You do not need to register it again unless the baby unit loses its link with the parent unit. To re-register your baby unit, or register a

120.00 mm

1

2

3

4

5

6

7

8

9

10

1. The unit does not appear to operate normally or exhibits a distinct change in performance. The units have been dropped or the enclosure damaged.

2. **WARRANTY TERMS**
We offer one year warranty from the original purchase date against defects in workmanship and materials. If you have warranty or support issues, please contact our after-sales service via email.

3. **INSTALLATION GUIDELINES**
* To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions.
* Any large metal objects, like a refrigerator, a mirror, a filing cabinet, metallic doors or reinforced concrete between the baby and parent unit may block the radio signal.
* The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
* Use of other 2.4GHz products, such as wireless networks (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away at least 5ft (1.5m) from such products, or turn them off if they cause interference.

4. **PLACEMENT OF THE BABY MONITOR**
The camera can be placed on the desktop or mounted on the wall. Do not place baby monitor on soft quilted blankets or in the corners of cupboards, shelves, etc. Keep the baby monitor away from heat sources such as radiators, chandeliers, cookers and direct sunlight. Keep the baby unit away from TV sets, microwave oven and radios. If interference occurs, move the camera to elsewhere.
* Place the camera within 6 feet (2 meters) of the area being monitored for optimum performance.

5. **GETTING STARTED**
5.1 TURN ON THE BABY UNIT:
1. Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit;
2. Insert the other end of the power adapter into suitable electrical outlet.
3. Once the power is connected, the power LED will light up.
5.2 TURN ON THE PARENT UNIT:
1. Insert the DC plug of the power adapter into the DC Jack in the side of the parent Unit.
2. Insert the other end of the power adapter into a suitable electrical outlet.
3. Press and hold the power key 3 seconds on the top of the parent unit;
4. Once parent unit is on, the power LED will light up and the image will display on the LCD.

6. **6.3 BABY UNIT OVERVIEW:**
MIC
Light sensor
Infrared LEDs
Lens
Speaker
Power LED
Antenna
DC Jack
Parent key
Temperature sensor

7. **KEY OPERATION**
7.1 TURN ON/OFF: Press and hold the power key for 3 seconds to turn on/off the parents unit.
7.2 UP / DOWN KEY: Press to tilt the camera up by one step. Press and hold to tilt continuously.
7.3 RIGHT / LEFT KEY: Press to pan the camera left by one step. Press and hold to pan continuously.
7.4 LEFT / RIGHT KEY: Press once to pan the camera right by one step. Press and hold to pan continuously.
7.5 CAMERA VIEW/SCAN: Press once to view/scan camera: during scan mode, the scan icon will be displayed on the top of screen. Each camera's video will be displayed on the LCD around 10 seconds then change to next camera.
7.6 DIGITAL ZOOM: Press and hold the zoom key around 2 seconds to operate zoom in/out;
7.7 Two Way Talk: Press and hold the two-way talk mode. A microphone icon will be displayed in the corner of the LCD screen. Release the key to stop.
8. MENU OPERATION
8.1 PANNING THE CAMERA AND PARENT UNITS
The baby unit is pre-registed to your parent unit. You do not need to register it again unless the baby unit loses its link with the parent unit. To re-register your baby unit, or register a

8. **1. ADD CAMERA:**
1. Press the MENU key then the menu will pop up;
2. Press the ADD CAMERA key until the camera icon is selected by red box;
3. Press the CAMERA key to enter into sub-menu, then press the CAMERA key to select your desired camera;
4. Press the CAMERA key enter into sub-menu, Press the CAMERA key to select the camera you want to delete;
5. Press the CAMERA key to delete the camera;
6. Press the CAMERA key to confirm the option.

9. **2. DISPLAY BRIGHTNESS**
1. Press the MENU key then the menu will pop up;
2. Press the DISPLAY BRIGHTNESS key until the brightness icon is selected by red box;
3. Press the DISPLAY BRIGHTNESS key to select the desired brightness level from level 1 ~ 5.
(The auto brightness level setting is level 3.)

10. **TEMPERATURE UNIT SETTING**
1. Press the MENU key then the menu will pop up;
2. Press the TEMPERATURE UNIT SETTING key until the temperature icon is selected by red box;
3. Press the TEMPERATURE UNIT SETTING key enter into sub-menu;
4. Press the TEMPERATURE UNIT SETTING key to select the "F" or "C" for setting temperature unit;
5. Press the TEMPERATURE UNIT SETTING key to confirm;
6. Press the TEMPERATURE UNIT SETTING key to Exit.
Note: The detected temperature range is 0°~40°C.

11. **TEMPERATURE ALARM SETTING**
1. Press the MENU key then the menu will pop up;
2. Press the TEMPERATURE ALARM SETTING key until the alarm function icon is selected by red box;
3. Press the TEMPERATURE ALARM SETTING key to confirm;
4. Press the TEMPERATURE ALARM SETTING key to turn on alarm function; Press the TEMPERATURE ALARM SETTING key to confirm;
5. Press the TEMPERATURE ALARM SETTING key to select the alarm function icon is selected by red box;
6. Press the TEMPERATURE ALARM SETTING key to adjust the alarm function icon is selected by red box;
7. Press the TEMPERATURE ALARM SETTING key to select the desired level;
8. Press the TEMPERATURE ALARM SETTING key to confirm;
9. Press the TEMPERATURE ALARM SETTING key to Exit.
Note: The alarm sensitivity level, the baby have to make a lot of sound before the VOX function will be activate;
Note: The alarm sensitivity level, the baby don't have to make a lot of sound before the VOX function will be activate.

12. **LANGUAGE SETTING**
1. Press the MENU key then the menu will pop up;
2. Press the LANGUAGE SETTING key until the language icon is selected by red box;
3. Press the LANGUAGE SETTING key enter into sub-menu, then press the LANGUAGE SETTING key to select the language you need;
4. Press the LANGUAGE SETTING key to confirm;
5. Press the LANGUAGE SETTING key to Exit.

13. **TECHNICAL DATA**
Frequency: 2412MHz~2485MHz
Parent Unit Input: 100~240VAC 50/60Hz
Output: 5V DC 1A
Camera Unit Input: 100~240VAC 50/60Hz
Output: 5V DC 1A
Operating Range: Up to 1000ft (300m) outdoor (line of sight)
Up to 165ft (50m) indoor
Display: 5.0" Diagonal TFT LCD
Battery (Parent Unit): Li-ion 3.7V 2000mAh (7.4Wh)
Battery (Baby Unit): Ni-MH 1.2V 100mAh
Max. Power: <150mW
Operation Temperature: +32F~+104F (0°C~40°C)
Battery Charging Temperature: +59F~+104F (15°C~40°C)
Relative Humidity: 15%~85%

14. **8.1 TROUBLE SHOOTING**
No reception on the monitor
Interference or poor reception
Audio feedback (high pitched noise)
Frozen picture on screen
The power adapters may not be properly connected.
Confirm that the camera and monitor are ON.
Camera may be far away from the monitor.
Camera and monitor may not be properly paired. Follow PAIRING instructions.
Move the monitor closer to the camera.
The camera or monitor may be placed too close to many metal objects.
Other electronic devices may be interfering with the signal.
The battery power may be too low.
The camera and monitor may be charged too closed.
The volume of the monitor may be set too high.
Remove the baby unit (plug out the adapter, then plug it into the socket again).
Press the RESET key at the back of parent unit.

15. **11. MAINTENANCE**
Clean your baby monitor with a slightly damp or anti-static cloth.
Never use cleaning agents or solvents.
Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit.
Remember to dispose of the product in an environmentally responsible way.
For proper collection and processing of these products, take them to the collection points designated by local authorities. You can also contact the store where you purchased the product.
Improper or incorrect use of batteries may cause corrosion or battery leakage, which could cause personal injury or damage to property. Use only the types of the batteries which are indicated in this manual.
CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 45 Degree C or Incinerate. Follow Manufacturer's Instructions.
Disposal of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion.
Leaving a battery in an extremely high temperature surrounding condition can result in an explosion or the leakage of flammable liquid or gas.
A battery subjected to extremely low air pressure that may result in an explosion or the leakage of flammable liquid or gas.
The battery should not be exposed to excessive heat such as sunshine, fire or a hot liquid.

16. **FC, AND IC REGULATIONS**
FC PART 15 E
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
FC Caution:
Changes or modifications not expressly approved by the part responsible for compliance could void the user's authority to operate the equipment.
FC Statement:
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
—Reorient or relocate the receiving antenna.
—Increase the separation between the equipment and receiver.
—Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
—Consult the dealer or an experienced radio/TV technician for help.

17. **Industry Canada**
This device complies with Industry Canada licence exempt RSS standard(s).
Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference that may cause undesired operation of the device.
Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique susceptible d'être subi.
This equipment complies with Industry Canada radiation exposure limits set forth for an uncontrolled environment.
Cet équipement est conforme à l'exposition aux rayonnements Industry Canada limites établies pour un environnement non contrôlé.
This device meets the exemption from the routine evaluation tests in section 2.5 of RSS 102 and complies with RSS-102 requirements, unless an order Canadian information on RF exposure, and compliance on device met conform a l'exemption des limites d'évaluation courante dans la section 2.5 de RSS-102 et respecte les exigences de RSS-102, à moins d'un ordre canadien sur l'exposition aux champs RF et de conformité.

18. **For Canada Use**
This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.
Get Equipment that are suitable to use in a distance minimum de 20 cm entre le radiateur et votre corps.
For These Link Specific Absorption Rate (SAR) information:
This device meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were developed by independent scientific organizations through prudence and thorough evaluation of scientific studies. The guidelines include a substantial safety margin designed to assure the safety of persons regardless of age or health. FCC/ISED RF Exposure Information and Statement the SAR limit of FCC/ISED/IC (Canada) is 1.6 W/kg, averaged over one gram of tissue. Device types: Device has also been tested against the SAR limit. The device was tested for typical body-worn operations on the back of the phone and over the head. To maintain compliance with FCC/ISED/RF exposure requirements, use accessories that maintain an 0mm separation distance between the user's body and the back of the device. The use of third party, custom and other accessories should not contain metallic components or assembly. The use of accessories that do not satisfy these requirements may not comply with FCC/ISED/RF exposure requirements, and should be avoided.
Information sur le décalage d'absorption spécifique (DAS):
Cet équipement respecte les exigences de gouvernement en matière d'exposition aux ondes radio. Les lignes directrices sont basées sur des normes élaborées par des organisations scientifiques indépendantes à travers une évaluation approfondie et soignée de études scientifiques. Les lignes directrices incluent une marge de sécurité substantielle conçue pour assurer la sécurité de toutes les personnes, quel que soit leur âge ou leur état de santé. Information sur le décalage d'absorption (DAS) pour l'exposition aux RF: L'exposition aux ondes radio est évaluée en fonction de la limite de l'absorption spécifique (SAR) de 1,6 W/kg en moyenne sur un gramme de tissu. Types d'appareils: L'appareil a également été testé par rapport à la limite de SAR. L'appareil a été testé pour des opérations typiques sur le dos de l'utilisateur et au-dessus de la tête. Pour maintenir la conformité avec les exigences d'exposition aux RF, utilisez des accessoires qui maintiennent une distance de séparation de 0 mm entre le corps de l'utilisateur et l'arrière de l'appareil. L'utilisation de accessoires personnalisés ou de accessoires similaires ne doit pas contenir de composants métalliques dans ses assemblages. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF d'ISED et de l'IC.

19. **EU Declaration of Conformity (DOC)**
Hereby, we/our company declares that the radio equipment type(s) in compliance with RED Directive 2014/53/EU.
The full text of the EU declaration of conformity is available on the website: www.hellobaby.net.cn
Model: HB6351
Responsible Party (UK): Startline LLC
Addr: 22 Haverhill Drive, Jerricho, NY 11753 Tel: 1-516-683-3729
Authorized UK Representative (UK): Safestore wen bnt
Addr: 22 Haverhill Drive, Jerricho, NY 11753 Tel: 1-516-683-3729
Shenzhen Division: Shenzhen Technology Co., Ltd.
7001, Building 3, No. 1, Xinhua Road, Gaikou Community, Jihua Street Office, Longgang District, Shenzhen
Risk Group 1
WARNING! RF emitted from this product. Do not stare at operating lamp
Product tested against EN62471