

HB26说明书 (hellobaby)

说明书为折叠式
尺寸: 540*120mm
材质: 100g双胶纸 (彩色)
版本: V1.0
类型: 环保

版本	修改内容
Ver: 1.0	首次发行.

日期
2022/06/29

设计	审核	审批
王勇		
2022/06/29	2022/07/19	2022/7/19

540.00 mm

HelloBaby®
User Manual
2.4GHz Digital Wireless Video Baby Monitor

Model: HB26

The pictures are for reference only, please subject to practically.

www.hellobaby.net.cn
service@hellobaby.net.cn

Thank you for purchasing the HB26 Baby Monitor. With our baby monitor, you could see and hear your baby sleeping or playing in their room anytime.

Please retain your original dated sales receipt for your records. For warranty service of your product, you will need to provide a copy of your dated sales receipt to confirm warranty status. Registration is not required for warranty coverage.

Please make sure the following included in your package

Parent unit x 1	Camera unit x 1	Power Adapter x 2
Parent manual x 1	Wall-mounting kit x 1	

1. SAFETY INSTRUCTIONS

CAUTION: Keep this device away from children.

Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3ft (0.9m) away). Never use extension cords with AC Adapters. Only use the AC Adapters provided.

Choking hazard: This product contains small parts, please be careful when unpack and assemble the product.

Read and keep to instructions: All the safety and operating instructions should be read before the video baby monitor is used. This product cannot replace responsible adult supervision.

Water and moisture: This product is designed for indoor use only. The unit should not be exposed to rain, moisture, dripping or splashing. No objects filled with liquid should be placed on top of, or beside the product, such as a glass or vase. This item should not be used near water.

DO NOT: Use the appliance if the cord or plug is damaged. If your baby monitor is not operating properly or has suffered any damage, contact "VideoItems" service center to request inspection and repair of the appliance in order to avoid any possible risk.

DO NOT: Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit. Otherwise, the guarantee will be made void.

Ventilation: This baby monitor should not be used on a bed, sofa, rug or similar surface that may block the ventilation openings, or be placed in an enclosed area such as a bookcase or drawer that may impede air flow.

Keep away from sources of heat: This unit should not be exposed to direct heat sources such as a candle, radiator, heat register, stove or other appliance that emits heat. The unit should not be left in direct sunlight.

Power sources: This unit should only be used with the AC power adapters included in this package (rated 5V DC 1A).

Damage requiring service: This unit should be serviced by qualified personnel only when: Objects have fallen or liquid has been spilled into the product.
The units have been exposed to rain.

The units do not appear to operate normally or exhibits a distinct change in performance; The units have been dropped or the enclosure damaged;

2. WARRANTY TERMS

We offer one-year warranty from the original purchase date against defects in workmanship and materials. If you have warranty or support issues, please contact our after-sales service via email.

3. INSTALLATION GUIDELINES

To use your parent unit and camera unit together, you have to establish a radio link between them, and the range will be affected by environmental conditions.

- * Any large metal object, like a refrigerator, a mirror, a filling cabinet, metallic doors or reinforced concrete between the baby and parent unit may block the radio signal.
- * The signal strength may also be reduced by other solid structures, like walls, or by radio or electrical equipment, such as TV, computers, cordless or mobile phones, fluorescent lights or dimmer switches.
- * Use of other 2.4GHz product, such as wireless networks (Wi-Fi routers), Bluetooth systems, or microwave ovens, may cause interference with this product, so keep the baby monitor away from least 5ft (1.5m) from such products, or turn them off if they cause interference.

4. PLACEMENT OF THE VIDEO BABY MONITOR

The camera can be placed on the desktop or mounted on the wall. Don't place baby monitor on soft outdoor blankets or in the corners of cupboards, shelves, etc; keep the baby monitor away from heat sources such as radiators, chimneys, cookers and direct sunlight; Keep the baby unit away from TV sets, microwave oven and radios; If interference occurs, move the camera to elsewhere;

- * Place the camera within 6 feet (2 meters) of the area being monitored for optimum performance.


5. GETTING STARTED

5.1 TURN ON THE BABY UNIT:

1. Insert the DC plug of the power adapter into the DC jack in the rear of the Baby Unit;
2. Insert the other end of the power adapter into a suitable electrical outlet;
3. Once the adapter is connected, the power LED will light up.

5.2 TURN ON THE PARENT UNIT:

1. Insert the DC plug of the power adapter into the DC jack in the side of the parent unit;
2. Insert the other end of the power adapter into a suitable electrical outlet;
3. Press and hold the power key 3 seconds on the side of the parent unit;
4. Once parent unit is on, the power LED will light up and the image will display on the LCD.

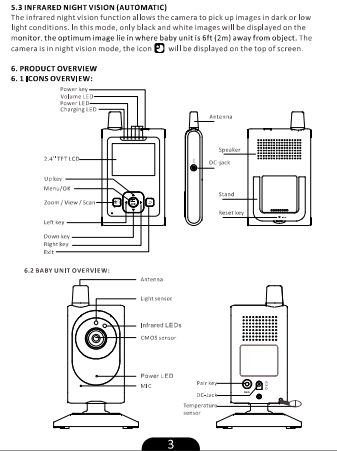

6.3 ICONS OVERVIEW:

Signal Strength Volume Zoom
 Alarm Brightness Battery level
 Camera Night vision VOX

7. KEY OPERATION

7.1 POWER SAVE / SCREEN OFF

Short press the power key to turn on/off the screen.

7.2 VOLUME ADJUSTMENT

Press the key to increase the volume; Press the key to decrease the volume;

7.3 BRIGHTNESS ADJUSTMENT

Press the key to increase the brightness; Press the key to decrease the brightness;

7.4 CAMERA VIEW / SCAN

Press Scan key to view/scan camera; During scan mode, the scan icon will be displayed on the top of screen. And each camera's video will stay on the LCD around 10 seconds and then turn to next camera alternately;

7.5 DIGITAL ZOOM & PAN / TILT

Press and hold the key around 2 seconds to operate Zoom in / out; At the Zoom mode, press the key to Pan left; Press key to Pan right; Press key to tilt down; During digital zoom mode, the zoom icon will be displayed on the top of screen.

Warm reminder: If you want to adjust the volume/brightness, you have to exit the Zoom mode before you operate it.

8. MENU OPERATION

8.1 PAIRING THE CAMERA AND PARENT UNITS

The baby unit is pre-registered to your parent unit. You do not need to register it again unless the baby unit is connected with the parent unit. To re-register your baby unit, or register a new baby unit, follow the steps below:

Note: Camera icon with will be well-registered. You should select and pair with the camera icon without sign.

8.1.1 ADD CAMERA

1. Press the MENU key then the menu will pop up;
2. Press the key until the camera icon is selected by red box;
3. Press OK key to enter into sub-menu, then press key to select your desired camera;
4. Press OK key to confirm.

8.1.2 ALARM SETTING

You can use the alarm to remind yourself to feed your baby / change diaper / sleeping, etc.

1. Press the MENU button and the menu bar will pop up;
2. Press the key until the alarm icon is selected by red box;
3. Press OK key to enter into sub-menu, then press key to select the alarm time you want;
4. Press OK key to confirm;
5. Press OK key to exit.

8.2 ALARM SETTING

You can use the alarm to remind yourself to feed your baby / change diaper / sleeping, etc.

1. Press the MENU button and the menu bar will pop up;
2. Press the key until the alarm icon is selected by red box;
3. Press OK key to enter into sub-menu, then press the key to select the alarm time you want;
4. Press OK key to confirm;
5. Press OK key to exit.

Note 1: The minimum unit is 5 hours. The maximum setting is 5 hours (7 levels).

Note 2: Once the alarm is turned on, alarm icon will display on top of the screen.

Note 3: The alarm default setting is OFF.

Note 4: When the alarm is ringing, press any key on the parent unit to turn the alarm off.

Note 5: If you don't turn off the alarm, the alarm will ring for 3 minutes. After three minutes the alarm will ring again for 1 minute. The alarm will ring for three times in total, after this the alarm goes off.

5. When the icon displayed on the LCD screen, press the PAIR button on the back of camera;

6. Once paired, Successful pairing icon shows on the LCD screen;

7. If fails, repeat the above steps.

8.1.1 SELECTING CAMERA

1. Press the MENU key and the menu will pop up;
2. Press the key until the camera icon is selected by red box;
3. Press OK key to enter into sub-menu, then press key to select your desired camera;
4. Press OK key to enter into sub-menu, then press key to select your desired camera;
5. Press key to confirm;
6. Press OK key to exit.

8.2 ALARM SETTING

You can use the alarm to remind yourself to feed your baby / change diaper / sleeping, etc.

1. Press the MENU button and the menu bar will pop up;
2. Press the key until the alarm icon is selected by red box;
3. Press OK key to enter into sub-menu, then press the key to select the alarm time you want;
4. Press OK key to confirm;
5. Press OK key to exit.

Note 1: The minimum unit is 5 hours. The maximum setting is 5 hours (7 levels).

Note 2: Once the alarm is turned on, alarm icon will display on top of the screen.

Note 3: The alarm default setting is OFF.

Note 4: When the alarm is ringing, press any key on the parent unit to turn the alarm off.

Note 5: If you don't turn off the alarm, the alarm will ring for 3 minutes. After three minutes the alarm will ring again for 1 minute. The alarm will ring for three times in total, after this the alarm goes off.

8.3 VOX SETTING

This mode allow you to control the sound activation of your baby unit. If there is no sound around the baby unit within 30 seconds, it will stop audio transmission and turn off the screen of the parent unit. When the baby unit detects any sounds louder than the sensitivity level, it will start transmitting the signal to the parent unit again and turn on the screen of the parent unit. To change the VOX level, please follow the below instructions.

1. Press the MENU key then the menu will pop up;
2. Press the key until the VOX icon is selected by red box;
3. Press OK key to enter into sub-menu, then press key to select desired level;
4. Press OK key to confirm;
5. Press OK key to exit.

Note: Low sensitivity level, the baby have to make a lot of sound before the VOX function will be activated;

Note: Middle sensitivity level;

Note: High sensitivity level, the baby don't have to make a lot of sound before the VOX function will be activate.

8.4 TEMPERATURE UNIT SETTING

1. Press the MENU key then the menu will pop up;
2. Press the key until the temperature icon is selected by red box;
3. Press the key to enter into sub-menu;
4. Press the key to select the "F" or "C" for setting temperature unit;
5. Press key to confirm;

Note: The detected temperature range is 0°-50 °C.

8.4.1 TEMPERATURE ALARM SETTING

1. Press the key to select for turn on alarm function; Press key to confirm;
2. Press the key to select for turn off alarm function; Press key to confirm;

8.4.2 SET TEMPERATURE HI/LO ALERT LIMITS

1. Press to select for Hi/Low limits settings;
2. Press key to adjust the Hi limit when (red) is selected;
3. Press key to adjust the Lo limit when (green) is selected;

Note: The high temperature alarm range is 39~40 °C, and the low temperature alarm range is 0~19 °C. The high temperature alarm default setting is 36 °C, and the low temperature alarm default setting is 18 °C. When the temperature goes above or below the settings, the temperature icon turns red, it will flash to alert user by audio tones. Press any key on the parent unit to stop beeping and flashing.

9. TECHNICAL DATA

Frequency	2415-2471.625MHz
Parent Unit: Input	100~240VAC 50/60Hz
Output: 5V DC 1A	
Camera Unit: Input	100~240VAC 50/60Hz
Output: 5V DC 1A	
Operating Range	Up to 1000ft (300m) outdoor / line of sight Up to 335ft (100m) indoor
Display	2.5" TFT LCD
Rechargeable battery (for monitor)	3.7V, 950mAh, 3.15Wh
Battery life	Up to 6 hours
Camera and parent unit RF power (for CE)	Less than 20dBm
Operation Temperature	+32F~+104F (0°C~40°C)
Battery Charging Temperature	+59F~+104F (10°C~40°C)
Relative Humidity	15%~95%

10. TROUBLE SHOOTING

- * The power adapters may not be properly connected;
- * Confirm the camera and monitor are ON;
- * Camera may be far away from the monitor;
- * Camera and monitor may not be properly paired; follow PWB (see instructions).

Interference or poor reception

- * Move the monitor closer to the camera;
- * The camera or monitor may be placed too close to many metal objects;
- * Other electronic devices may be interfering with the signal;
- * The battery power is running low.

Audio feedback (high pitched noise)

- * The camera and monitor may be placed too close;
- * The volume on the monitor may be set too high;

Frozen Picture on Screen

- * Repower the baby unit (plug out the adapter, then plug it into the socket again);
- * Press the RESET key at the back of parent unit

11. MAINTENANCE

- * Clean your baby monitor with a slightly damp or antistatic cloth.
- * Never use cleaning agents or solvents.

12. DISPOSAL GUIDE FOR BATTERY AND PRODUCT

- * Do not attempt to repair or adjust any of the electrical or mechanical functions of the unit;
- * Remember to dispose of the product in an environmentally responsible way;
- * For proper collection and processing of these products, take them to the collection points designated by local authorities. You can also contact the store where you purchased the product.

Improper or incorrect use of batteries may cause corrosion or battery leakage, which could cause personal injury or damage to property. Use only the types of batteries which are indicated in this manual.

CAUTION: Risk of Fire and Burns. Do Not Open, Crush, Heat Above 45 degrees C or Incinerate. Follow Manufacturer's Instructions.

- * Dispose of a battery into fire or a hot oven, or mechanically crushing or cutting of a battery, that can result in an explosion;
- * Leaving a battery in an extremely high temperature surrounding environment can result in the expansion of the leakage of flammable liquid or gas;
- * A battery subjected to an unreasonably low air pressure that may result in an explosion or the leakage of flammable liquid or gas;
- * The battery shall not be exposed to excessive heat such as sunshine, fire or the like;

RFCC & ISDE STATEMENT

This device complies with Part 15 of the FCC Rules and with Industry Canada license exempt RSS standards. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Cet appareil est conforme à la partie 15 des règles de la FCC et aux normes RSS exemptes de licence d'Industrie Canada. Le fonctionnement est soumis aux déclarations suivantes: (1) cet appareil ne doit pas causer d'interférences nuisibles, et (2) cet appareil doit accepter toute interférence reçue, y compris les interférences pouvant entraîner un fonctionnement indésirable.

Charges or modifications to this unit not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 RF exposure, users can also contact Canadian information on RF exposure and compliance.

Cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 de l'annexe 2 des normes canadiennes sur l'exposition aux champs de RF et la conformité.

Cet appareil est conforme aux limites d'exposition aux champs de RF de l'annexe 2 des normes canadiennes sur l'exposition aux champs de RF et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies par l'annexe 2 des normes canadiennes sur l'exposition aux champs de RF et la conformité.

Cet équipement doit être installé et utilisé à une distance minimale de 20 cm entre le radiateur et votre corps.

SAR Statement for Monitor

Specific Absorption Rate (SAR) information:

"This Monitor meets the government's requirements for exposure to radio waves. The

guidelines are based on standards that were developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health. ISD RF Exposure Information and Statement the SAR limit of Canada (ISD) is 1.6 W/kg averaged over one gram of tissue. Device types: Monitor has also been tested against this SAR limit. This device was tested for typical body-worn operations with the back of the Monitor kept 0mm from the body. To maintain compliance with ISD RF exposure requirements, use accessories that maintain an 8mm separation distance between the user's body and the back of the Monitor. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with ISD RF exposure requirements, and should be avoided.

Informations sur le débit d'absorption spécifique (DAS): Cette Monitor répond aux exigences du gouvernement en matière d'exposition aux ondes radio. Les lignes directrices sont basées sur des normes élaborées par des organisations scientifiques indépendantes à travers une évaluation périodique et approfondie de ses études scientifiques. Les normes comprennent une marge de sécurité substantielle conçue pour assurer la sécurité de toutes les personnes, quel que soit leur âge ou leur état de santé. Informations sur l'évaluation de l'exposition aux RF de l'annexe 2 du Canada (ISD) est de 1,6 W/kg en moyenne sur un gramme de tissu. Types d'appareils: La Monitor a également été testée par rapport à cette limite SAR. Cet appareil a été testé pour des opérations typiques portées sur le corps avec le dos de la Monitor gardé à 0 mm du corps. Pour maintenir la conformité avec les exigences d'exposition RF de l'ISD, utilisez des accessoires qui maintiennent une distance de séparation de 8 mm entre le corps de l'utilisateur et l'arrière de la Monitor. L'utilisation de clips de ceinture, d'étuis et d'accessoires similaires ne doit pas contenir de composants métalliques dans son assemblage. L'utilisation d'accessoires qui ne satisfont pas à ces exigences peut ne pas être conforme aux exigences d'exposition aux RF de l'ISD et doit être évité.

EU Declaration of Conformity (DOP)

Hereby, videolines declares that the radio equipment type is in compliance with RED Directive 2014/53/EU.

The full text of the EU Declaration of conformity is available on the website: www.hellobaby.net.cn

Model: HB26
Responsible Party(UK): Starline LLC
Add: 27 Haverhill Street, Jamaica, NY 11433 Tel: +1-346-683-3729
Authorized UK Representative(UK): APEX CE SPECIALISTS LIMITED
Add: 89 Princess Street, Manchester, M2 4BN, UK Tel: +44(0)161-275-8600
Shenzhen Videotek Technology Co., Ltd
7013, Building 3, No. 1, Zhenhan Road, Gangkeng Community, Jihu Street Office, Longgang District, Shenzhen

WARNING

Strangulation Hazard: Children have STRANGLED in cords. Keep this cord out of the reach of children (more than 3 ft (0.9 m) away). Do not remove this tag.

AVERTISSEMENT

DANGER D'ÉTRANGLEMENT: Des enfants se sont ÉTRANGLÉS avec des cordons électriques. Gardez le cordon électrique hors de la portée des enfants (à plus de 0.9m/3 pi du lit d'enfant). Ne pas enlever cette étiquette.

Risk Group 1
WARNING:RF emitted from this product. Do not stare at operating lamp
Product tested against EN62471

Model: HB26
Responsible Party(UK): Starline LLC
Add: 27 Haverhill Street, Jamaica, NY 11433 Tel: +1-346-683-3729
Authorized UK Representative(UK): APEX CE SPECIALISTS LIMITED
Add: 89 Princess Street, Manchester, M2 4BN, UK Tel: +44(0)161-275-8600
Shenzhen Videotek Technology Co., Ltd
7013, Building 3, No. 1, Zhenhan Road, Gangkeng Community, Jihu Street Office, Longgang District, Shenzhen

Made in China