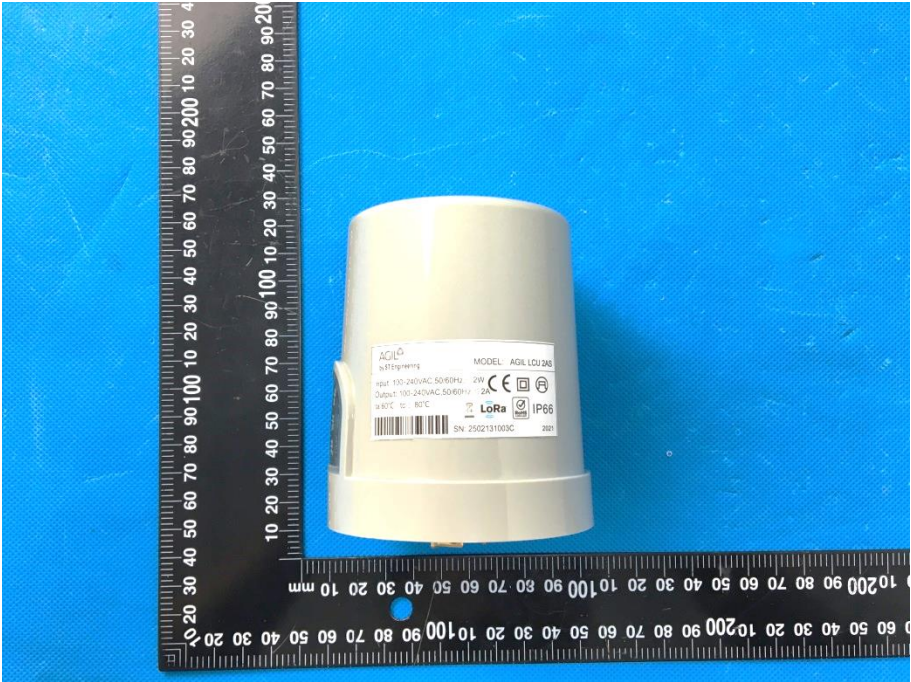
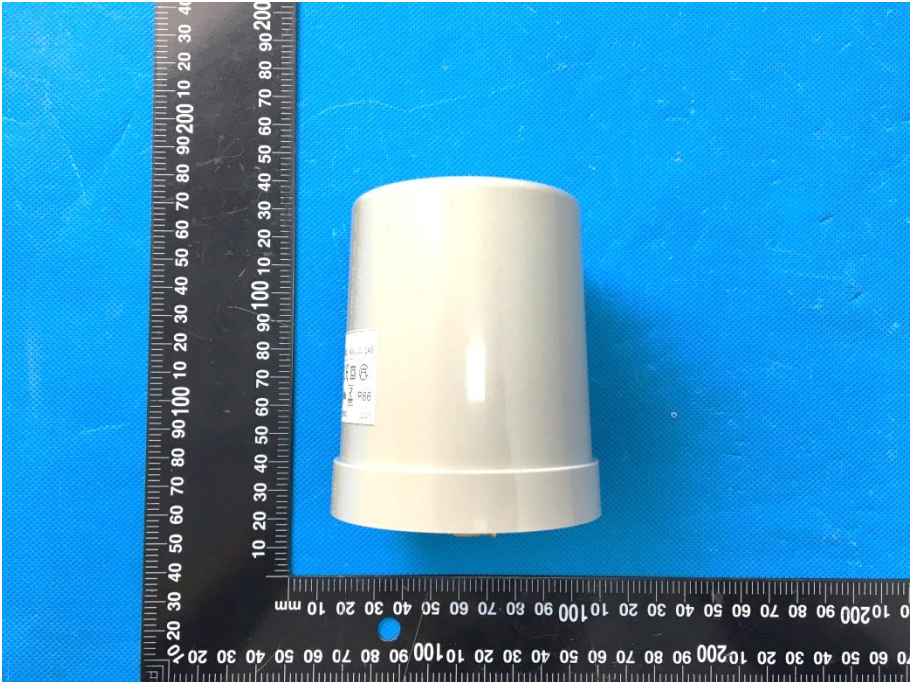
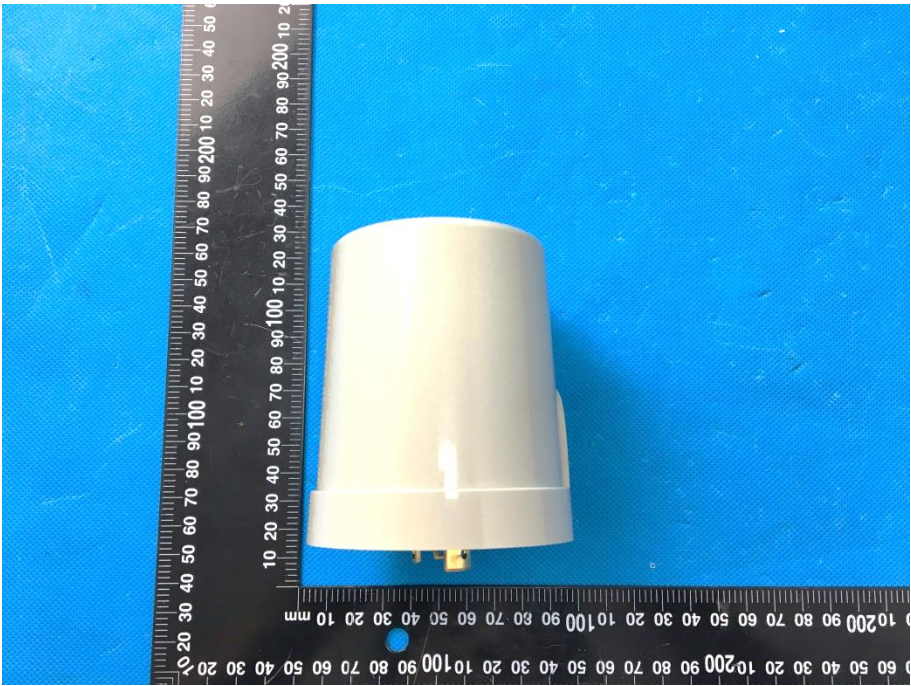


EXHIBIT 2 - EUT EXTERNAL PHOTOGRAPHS

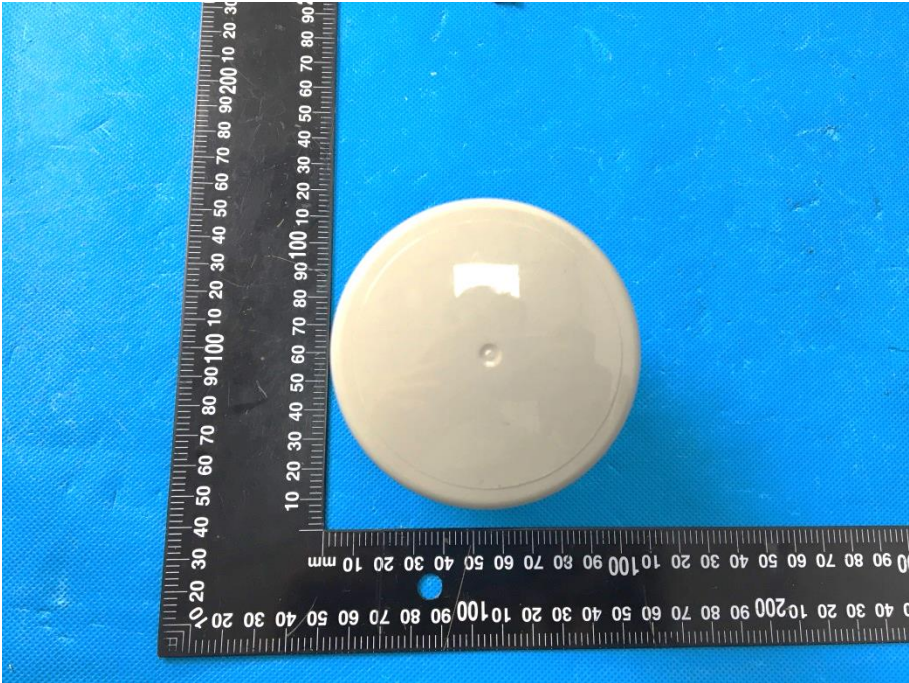
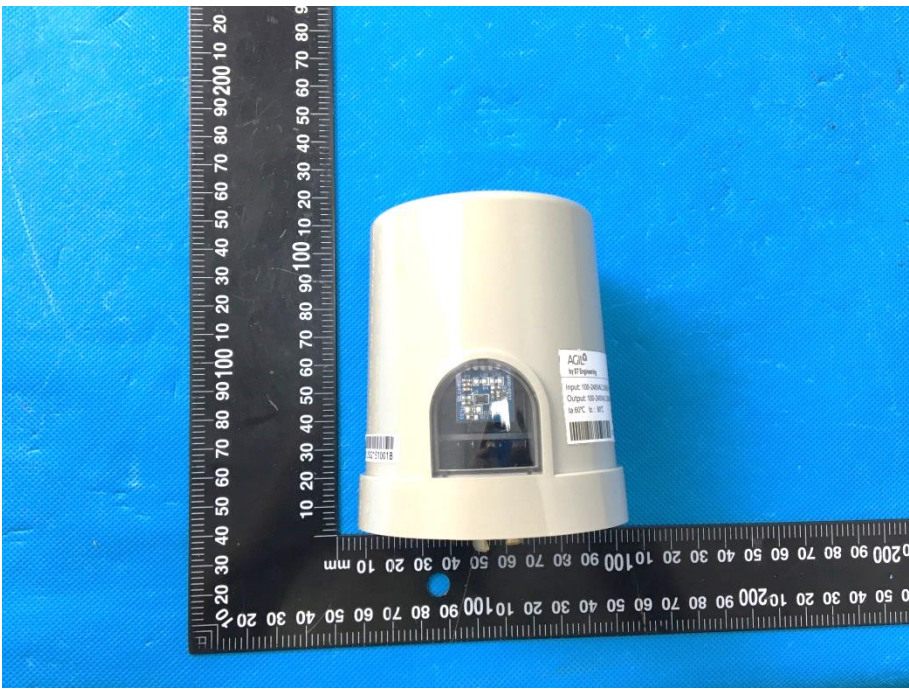
Model: AGIL LCU 2AS

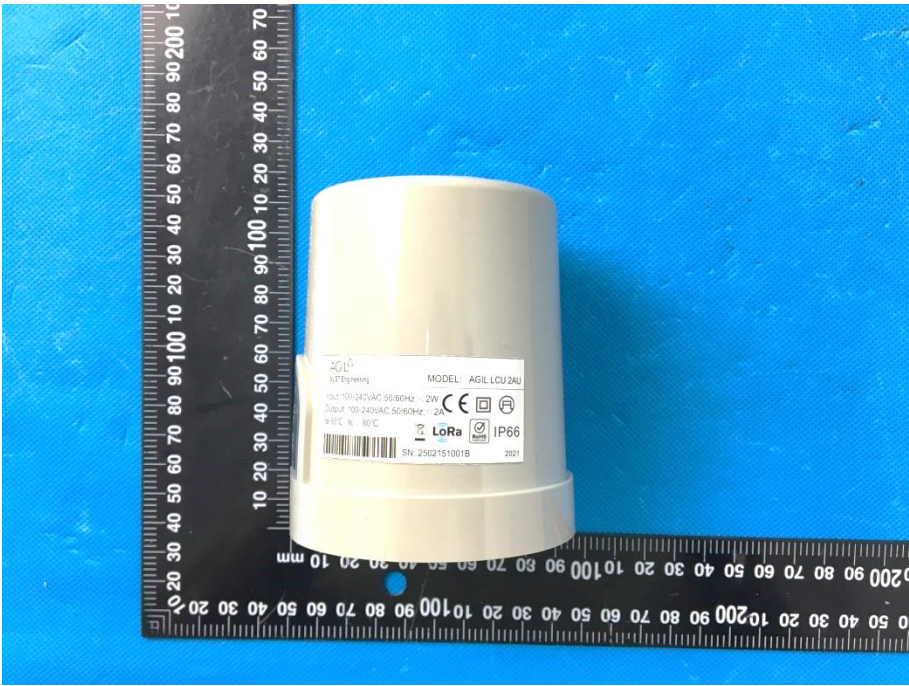
EUT View 1	 A top-down photograph of the AGIL LCU 2AS device. The device is a small, white, cylindrical component with a flat top surface. It is positioned next to a black ruler with white markings for scale. The ruler shows measurements in millimeters and centimeters. The background is a solid blue surface.
EUT View 2	 A side-view photograph of the AGIL LCU 2AS device. The device is shown from the side, revealing its cylindrical shape and a small, dark, rectangular opening on the front face. A black ruler with white markings is placed next to the device for scale. The background is a solid blue surface.

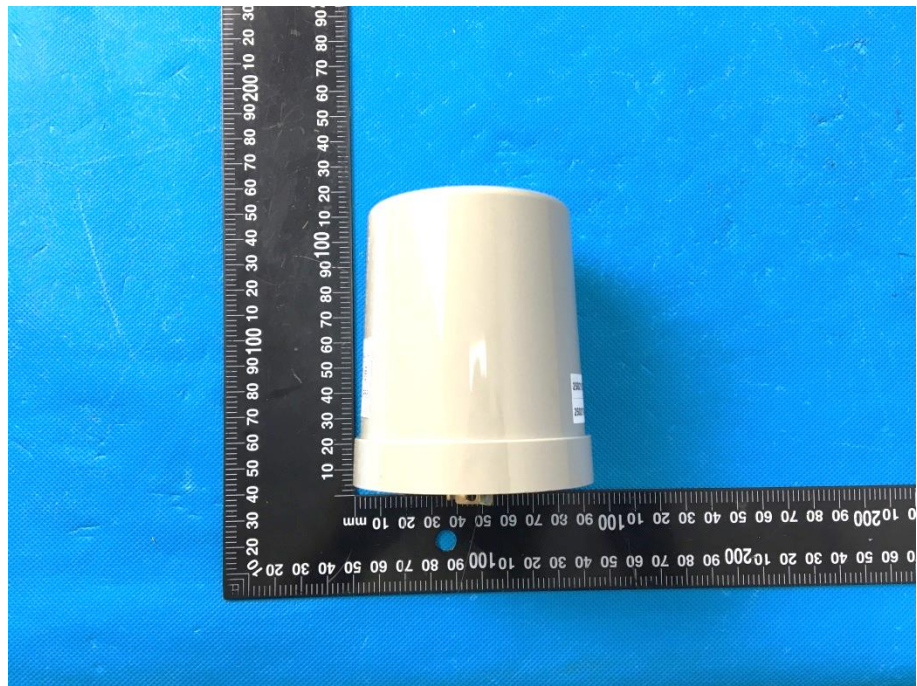
EUT View 3	
EUT View 4	

EUT View 5	
EUT View 6	

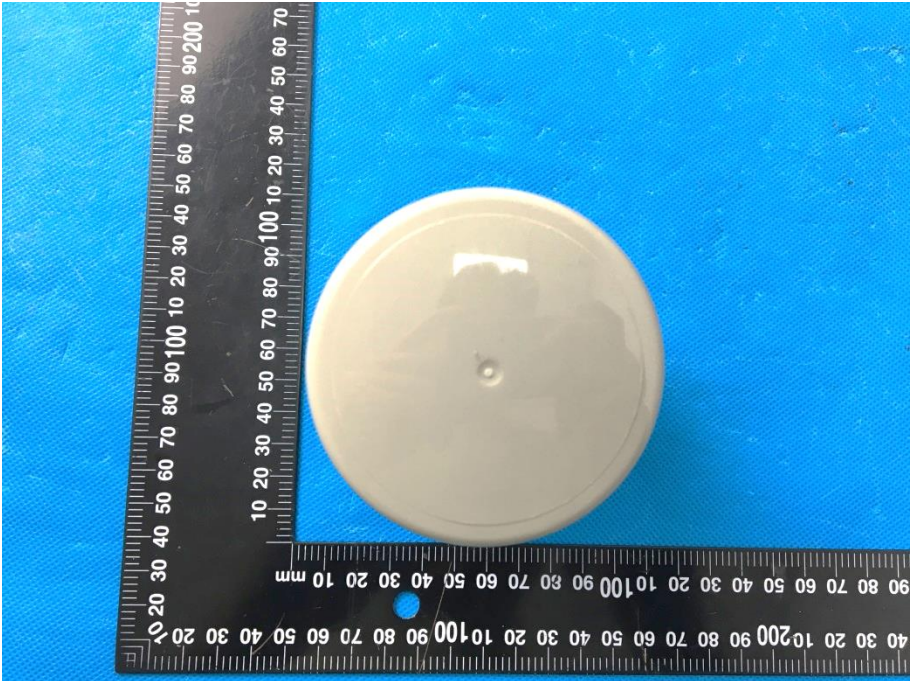
Model: AGIL LCU 2AU

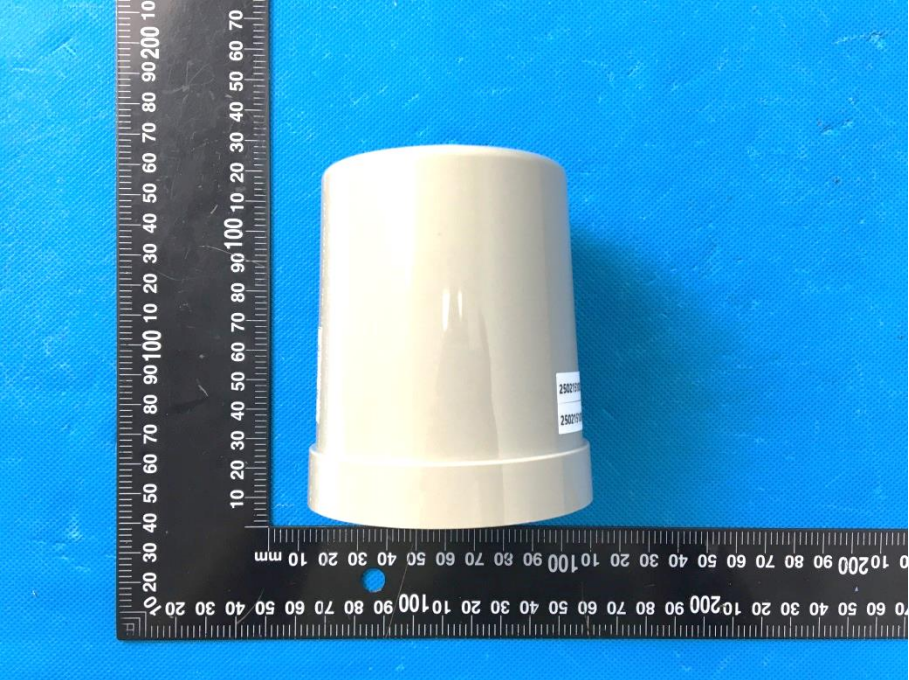
EUT View 1	
EUT View 2	

EUT View 3	 A photograph of a white, cylindrical electronic unit (EUT) from a top-down perspective. The unit is positioned next to a black ruler with white markings, which is placed on a blue textured surface. The ruler shows measurements in both centimeters and inches. The unit's label includes the following information: hTPEngineering, MODEL: AGIL LCU 2AU, 100-100-242VAC 50/60Hz - 2W, 24x24 100-242VAC 50/60Hz - 2A, 0-10VDC 1% 80°C, LoRa, IP66, SN: 2502151001B, and a date of 2021. The unit has a slightly wider base.
EUT View 4	 A photograph of the same white cylindrical unit from a bottom-up perspective. The unit is placed on a blue textured surface next to a black ruler with white markings. The label on the bottom of the unit displays the serial number 2502151001B, a barcode, and the UID 2502151001B. The unit's base features a small, rectangular gold-colored connector.

EUT View 5**EUT View 6**

Model: AGIL LCU 2US

EUT View 1	
EUT View 2	

EUT View 3	
EUT View 4	

EUT View 5	
EUT View 6	