

Test Data for Bluetooth

Product Name: RZBoard V2L

Test Model(HVIN): AES-RZB-V2L-SK-G



1. Bandwidth

1.1 OBW


1.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	99% Occupied Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	0.882	Pass
		2441	DH5	1	0.883	Pass
		2480	DH5	1	0.880	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.171	Pass
		2441	2DH5	1	1.171	Pass
		2480	2DH5	1	1.169	Pass
8DPSK	SISO	2402	3DH5	1	1.180	Pass
		2441	3DH5	1	1.178	Pass
		2480	3DH5	1	1.181	Pass


1.1.2 Test Graph

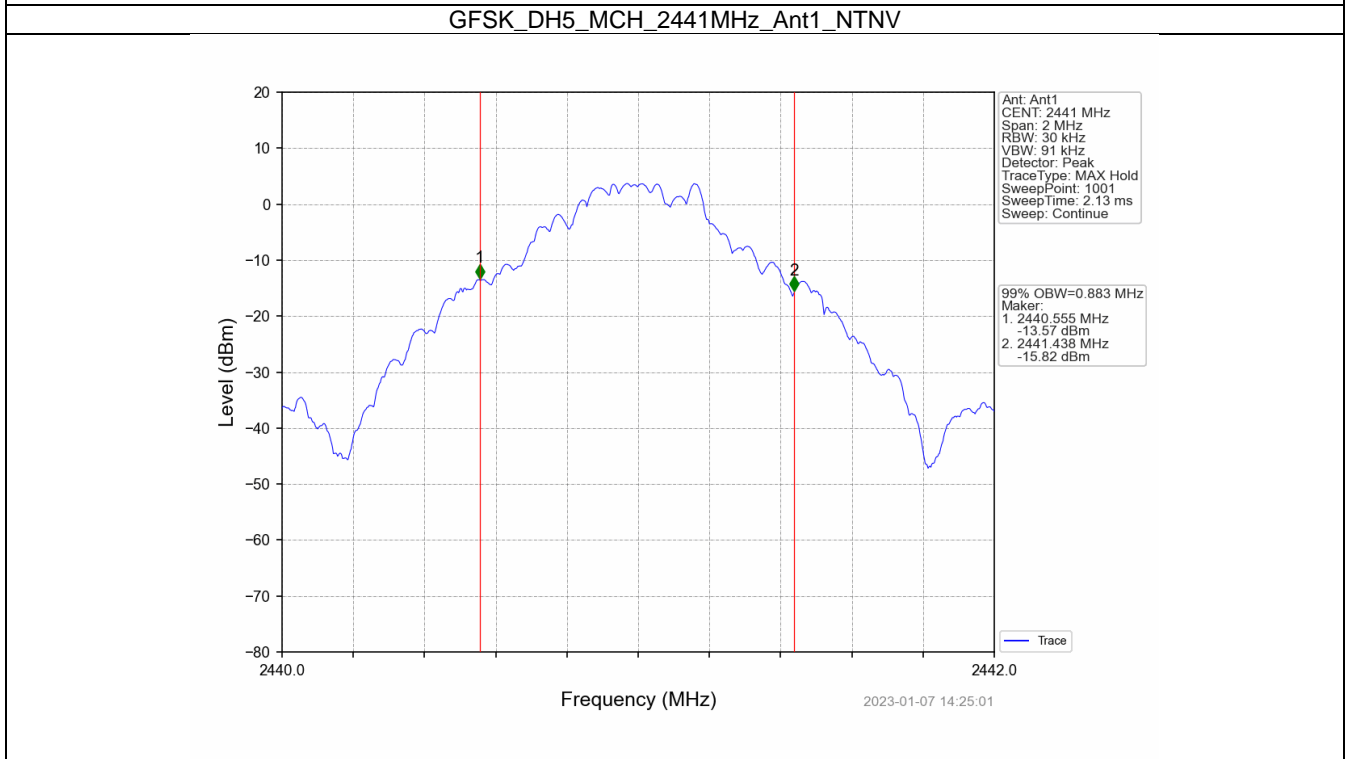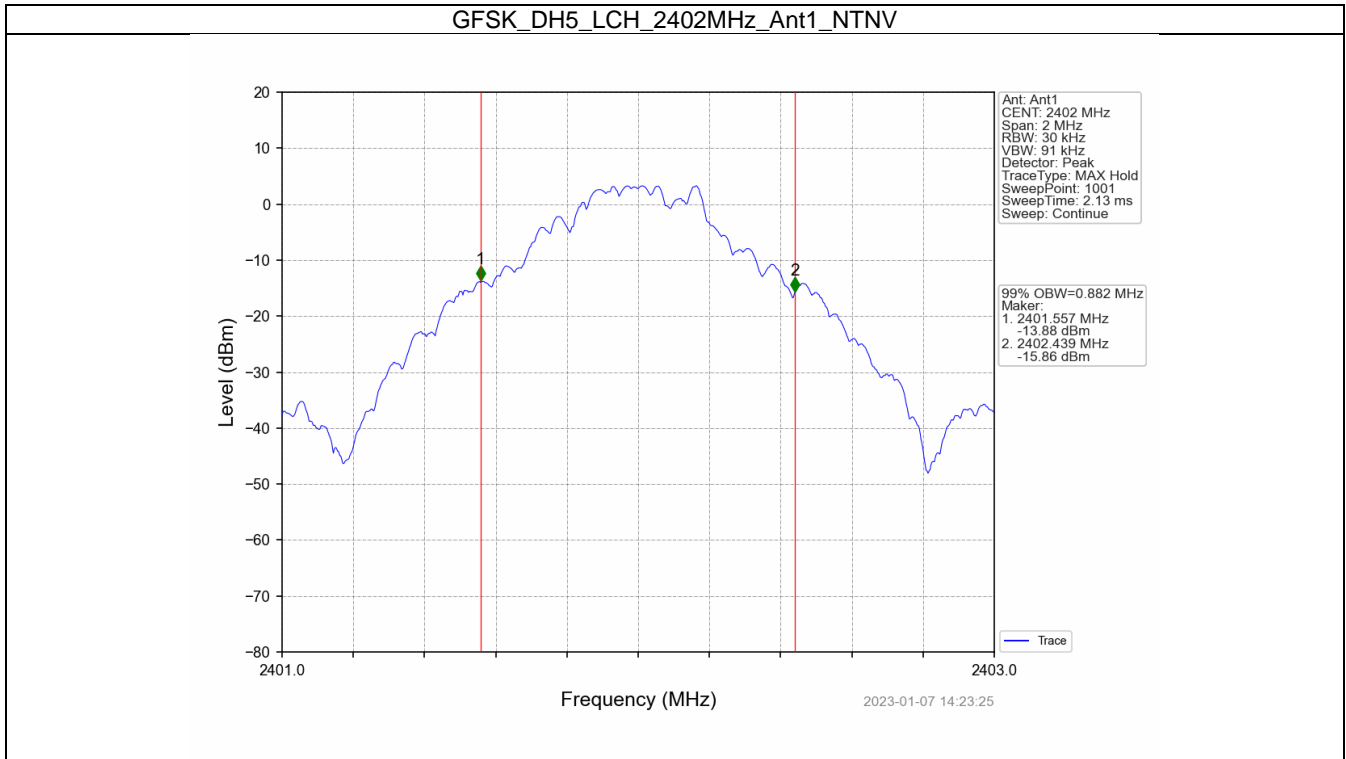


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

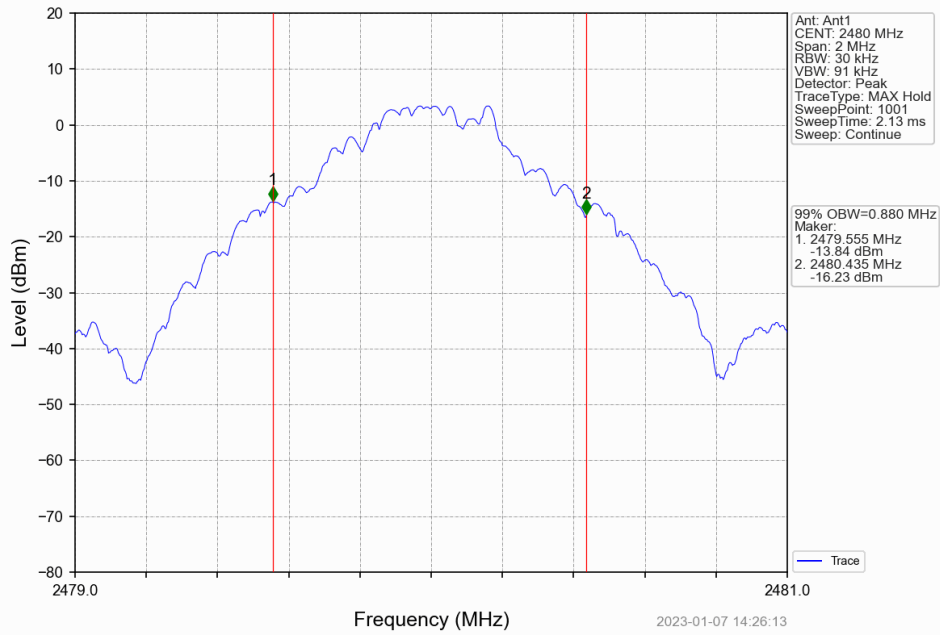


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

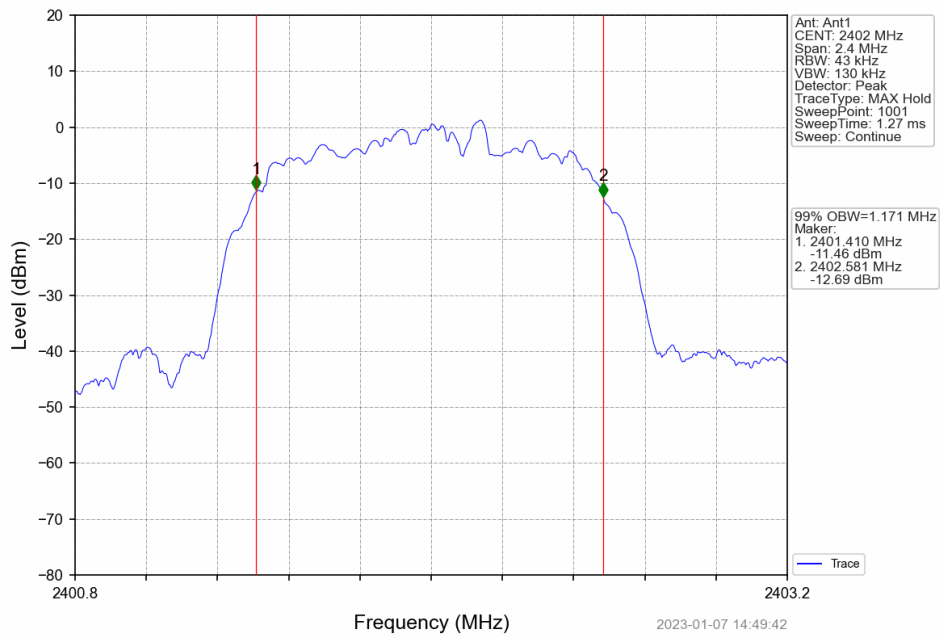


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

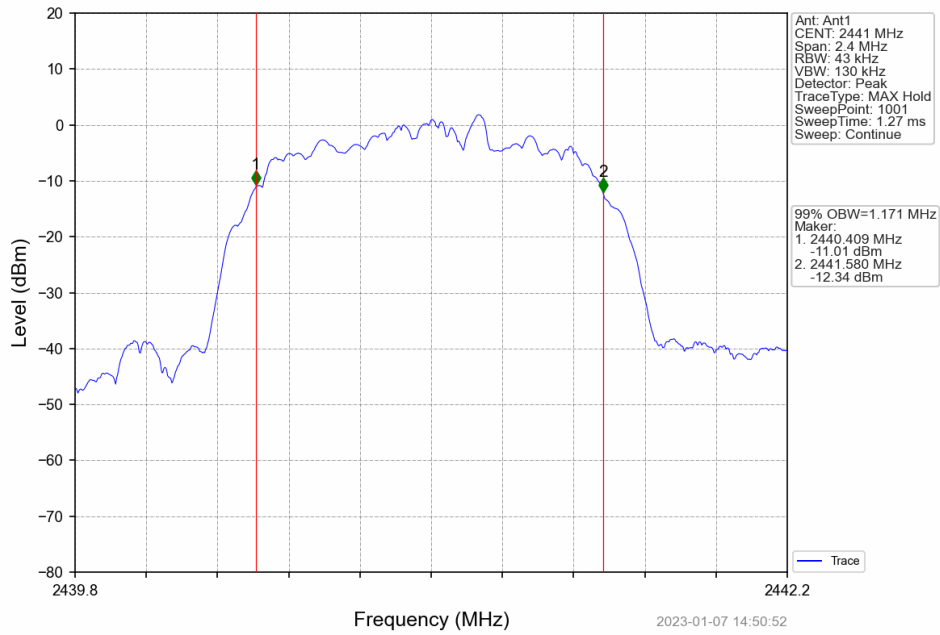


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

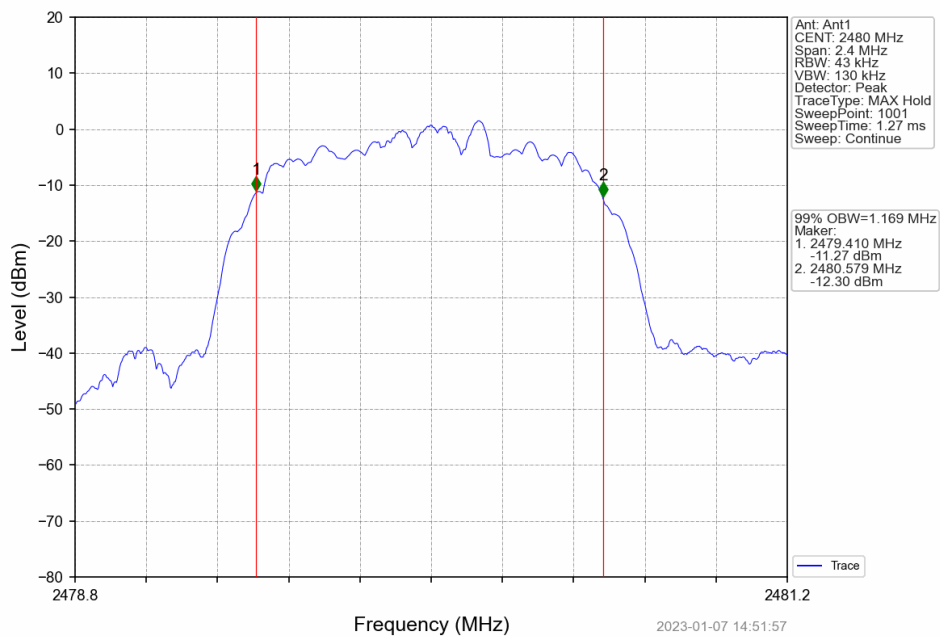


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

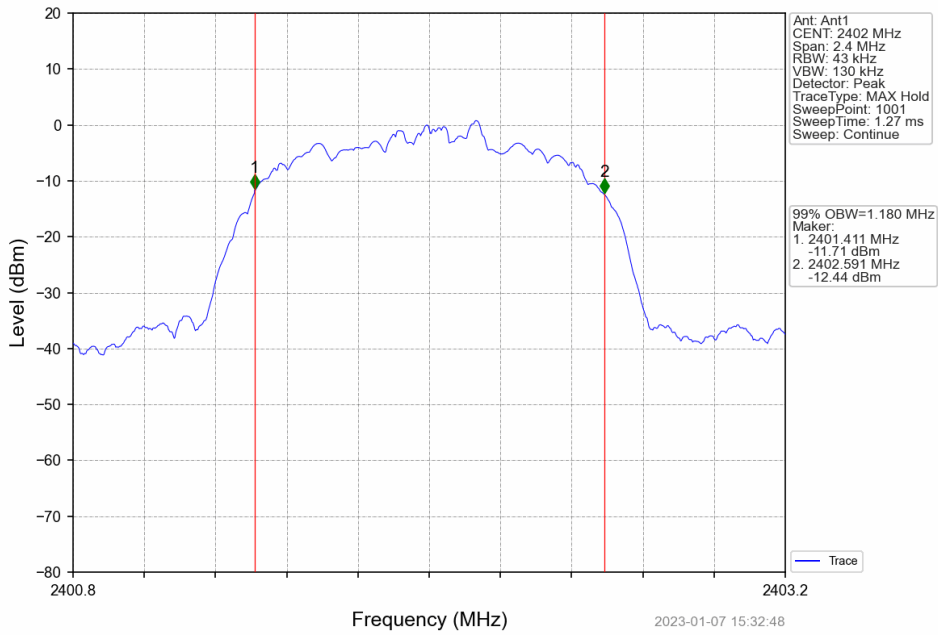

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

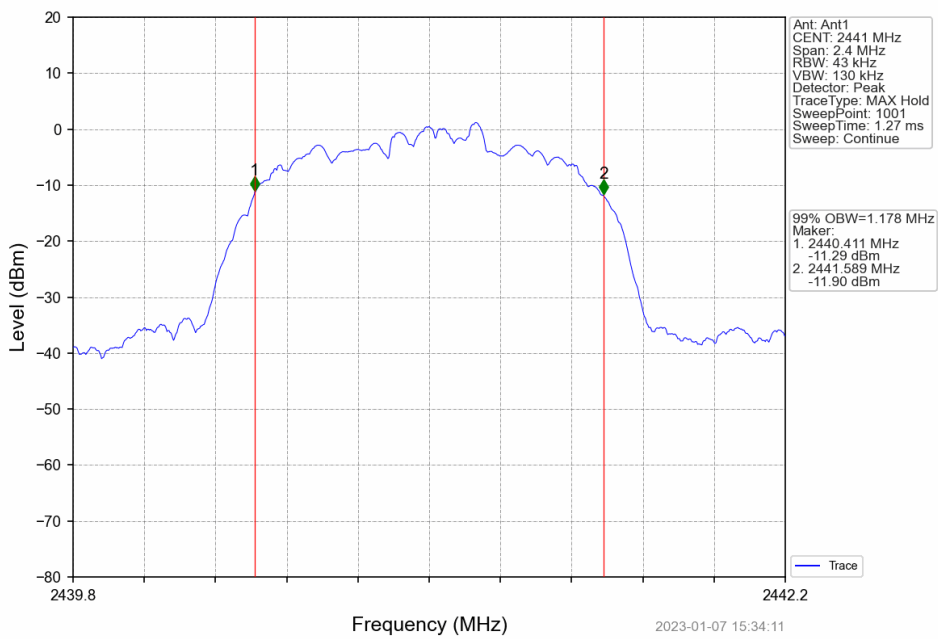


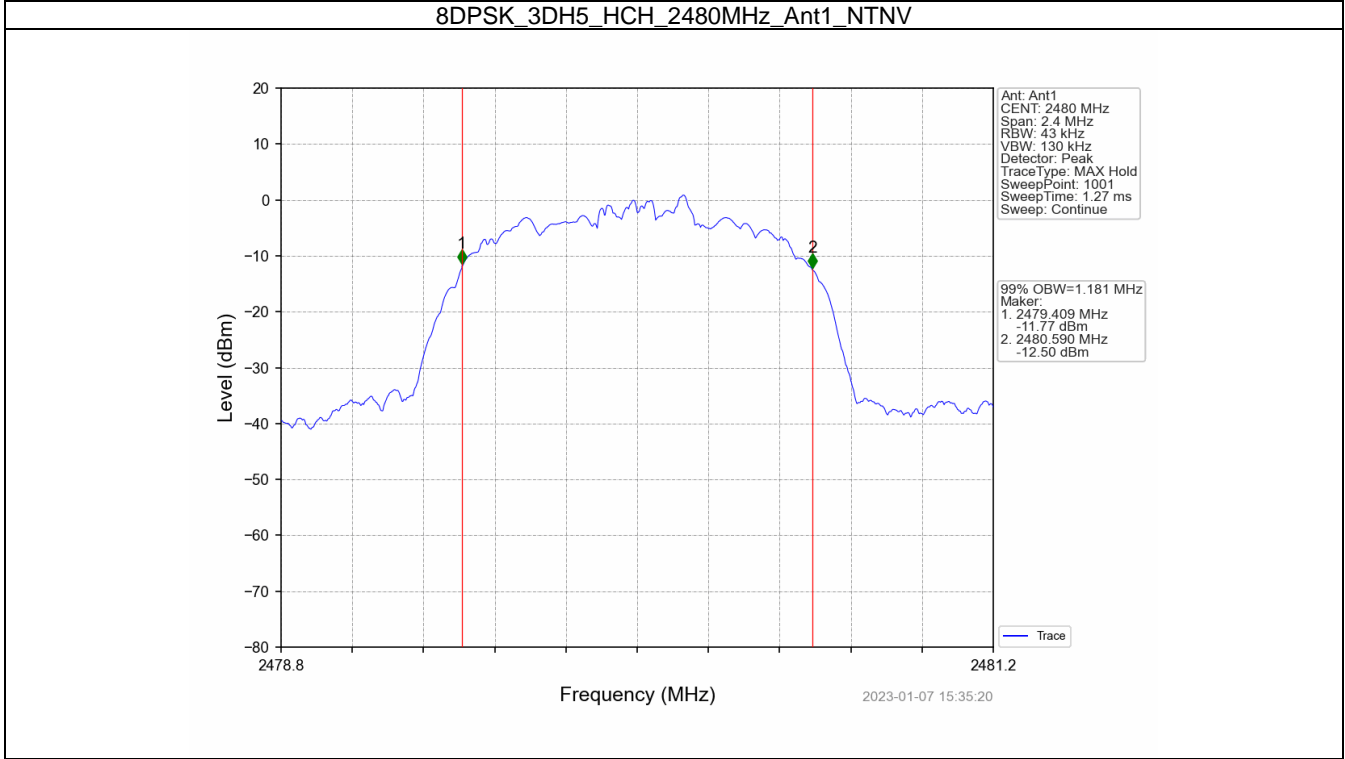


1.2 20dB BW


1.2.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	ANT	20dB Bandwidth (MHz)	Verdict
					Result	
GFSK	SISO	2402	DH5	1	1.020	Pass
		2441	DH5	1	1.026	Pass
		2480	DH5	1	1.022	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	1.324	Pass
		2441	2DH5	1	1.328	Pass
		2480	2DH5	1	1.325	Pass
8DPSK	SISO	2402	3DH5	1	1.315	Pass
		2441	3DH5	1	1.319	Pass
		2480	3DH5	1	1.315	Pass


1.2.2 Test Graph

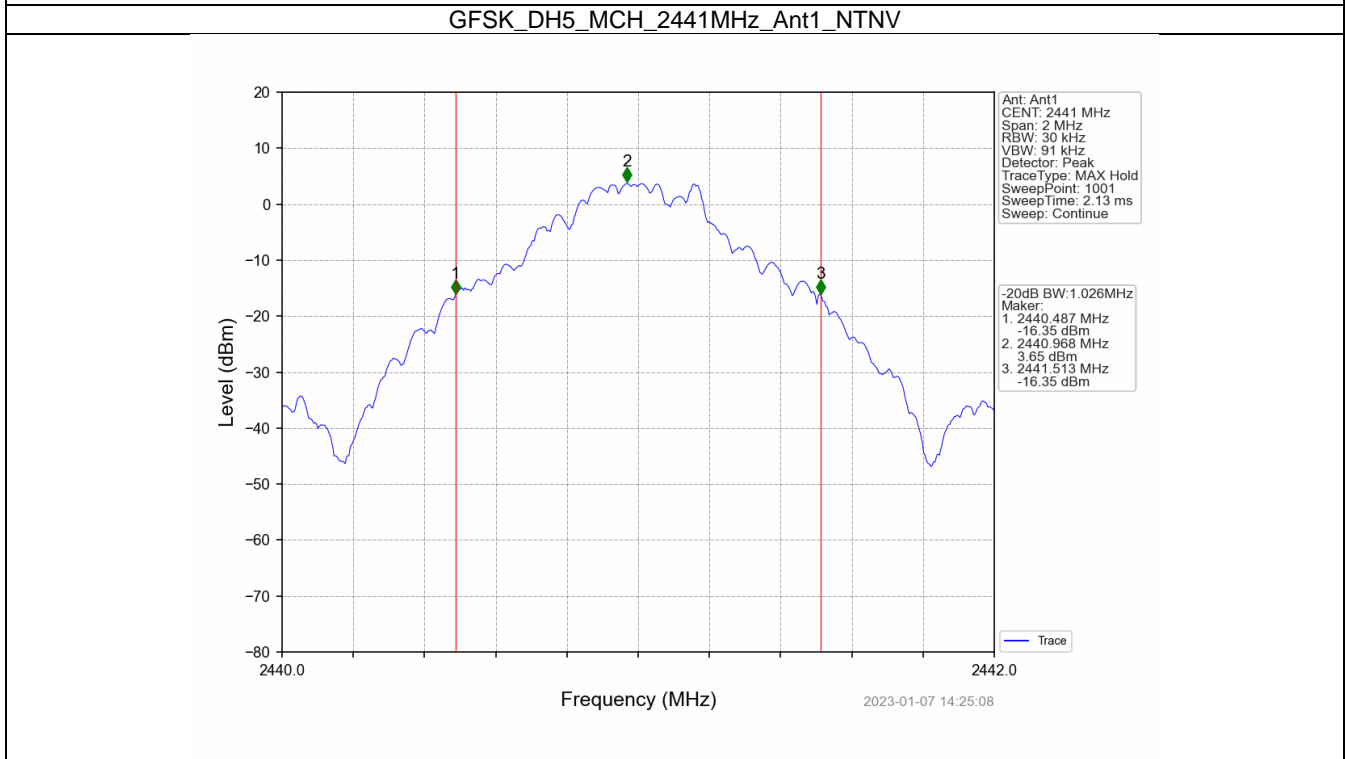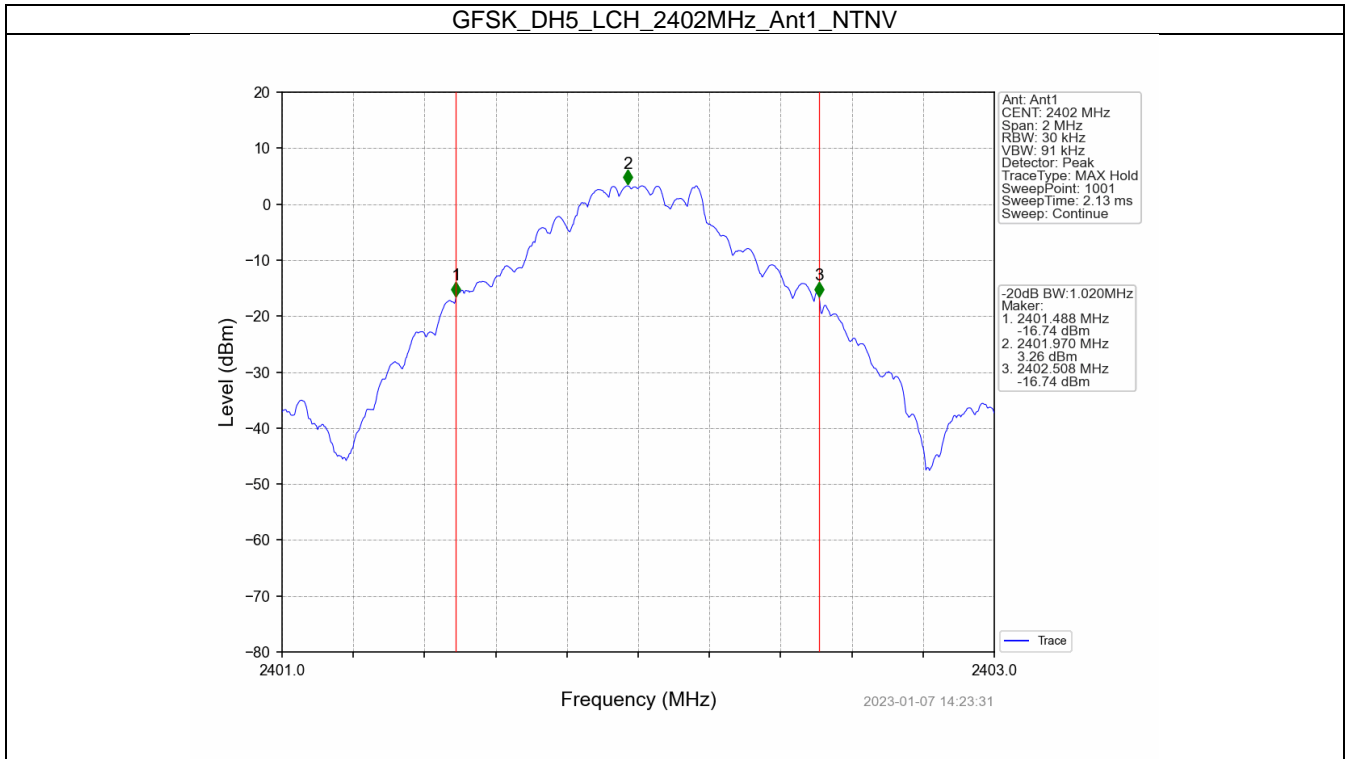


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

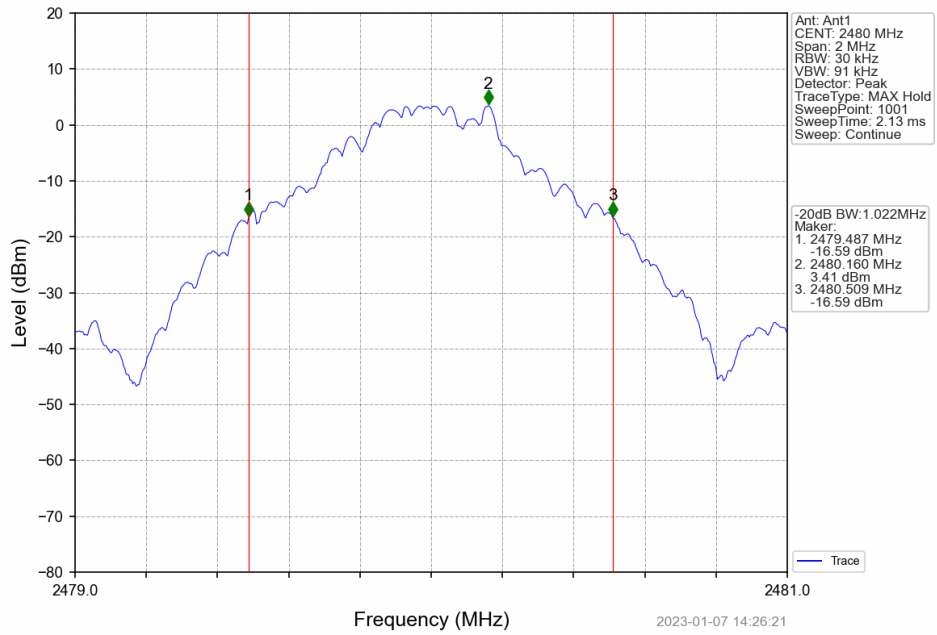


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

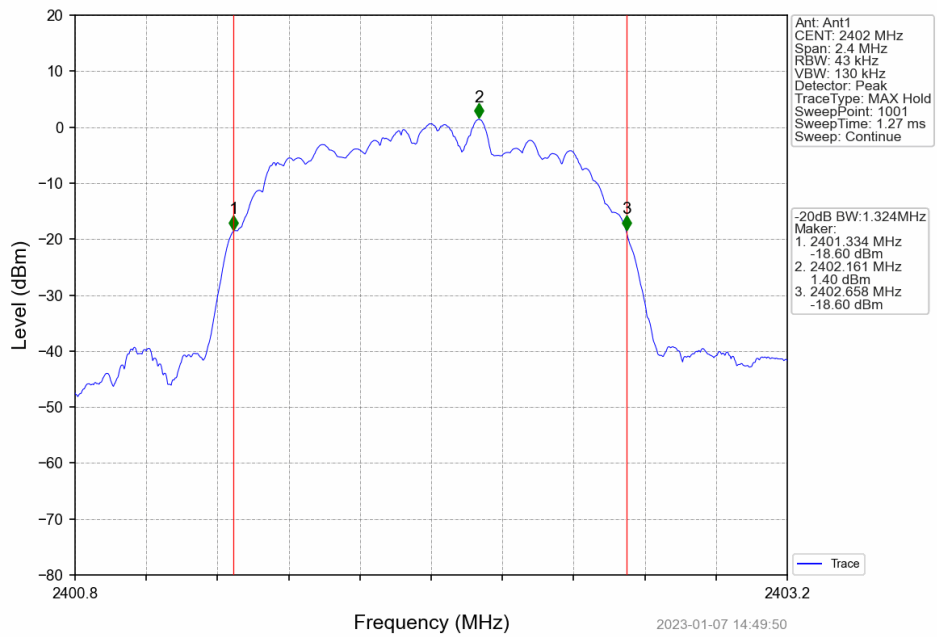


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

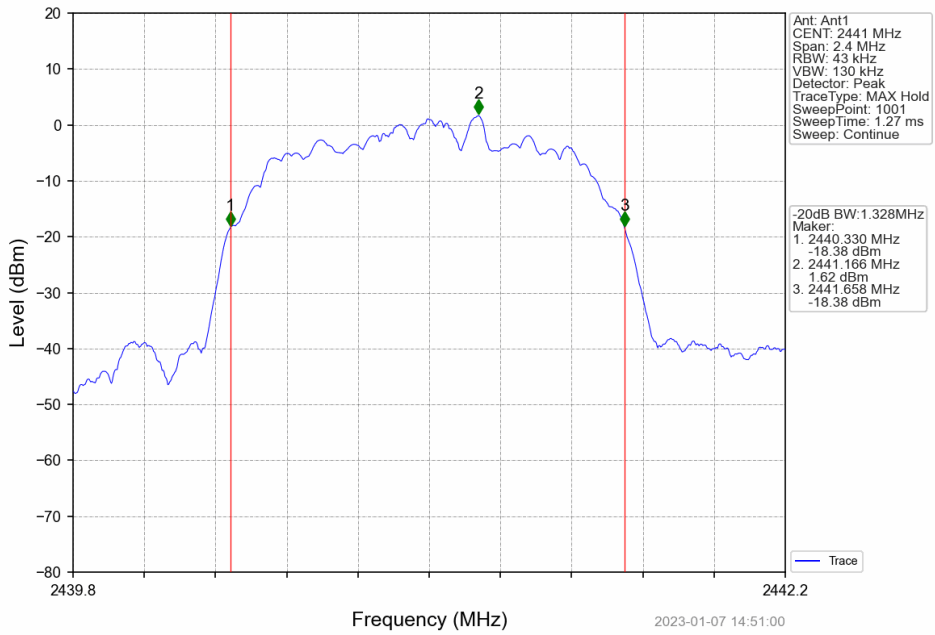


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

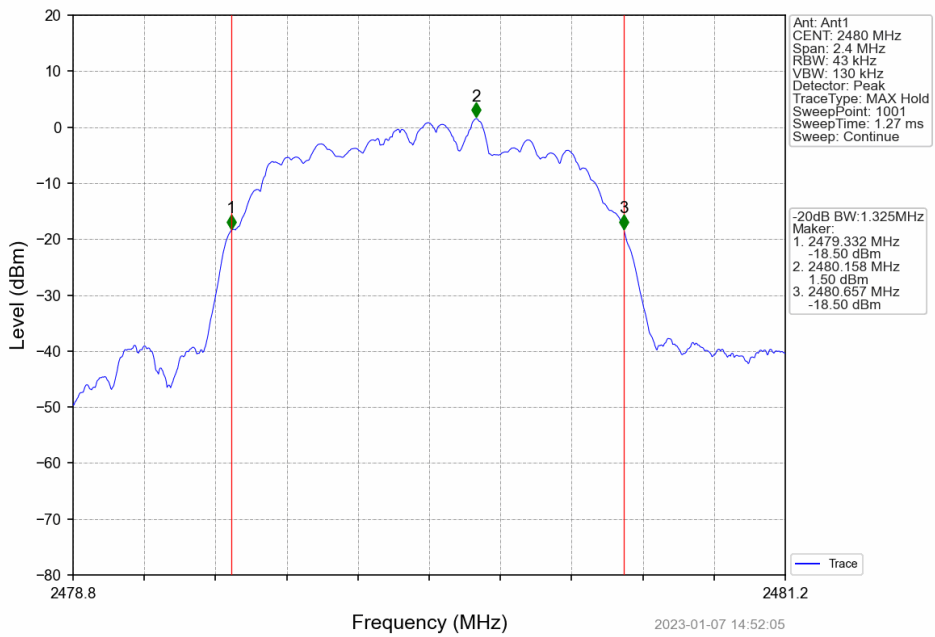


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

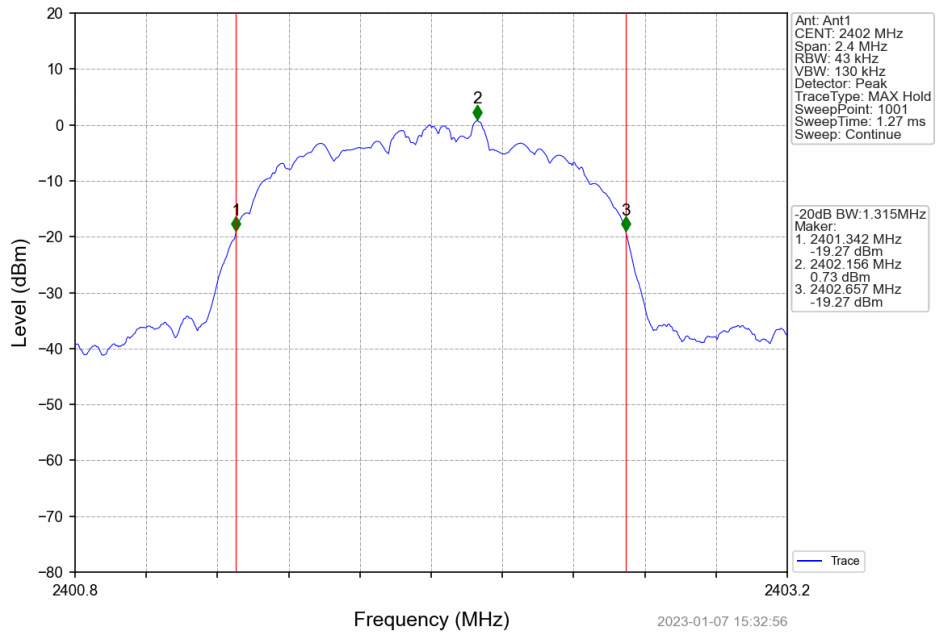

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

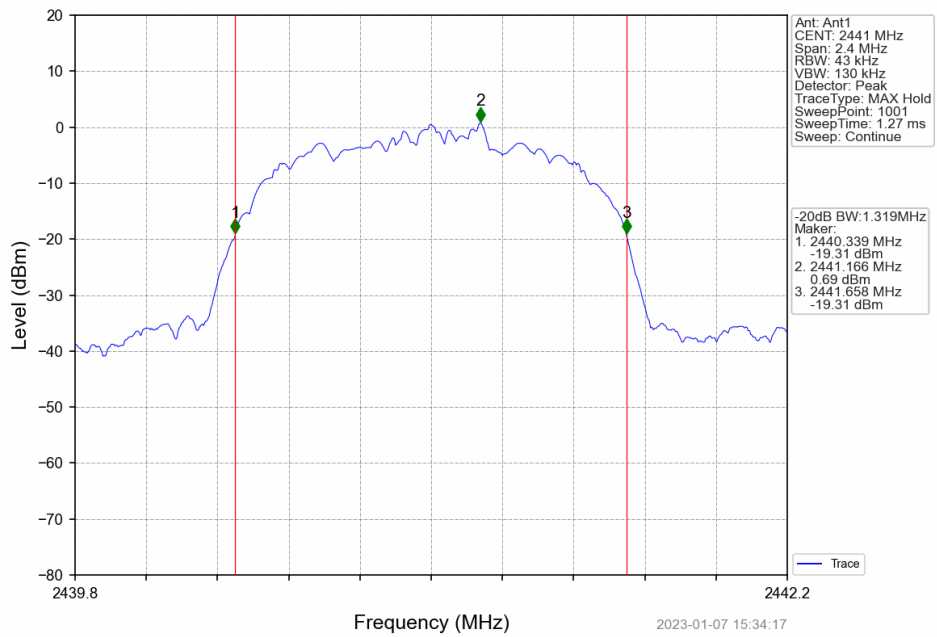

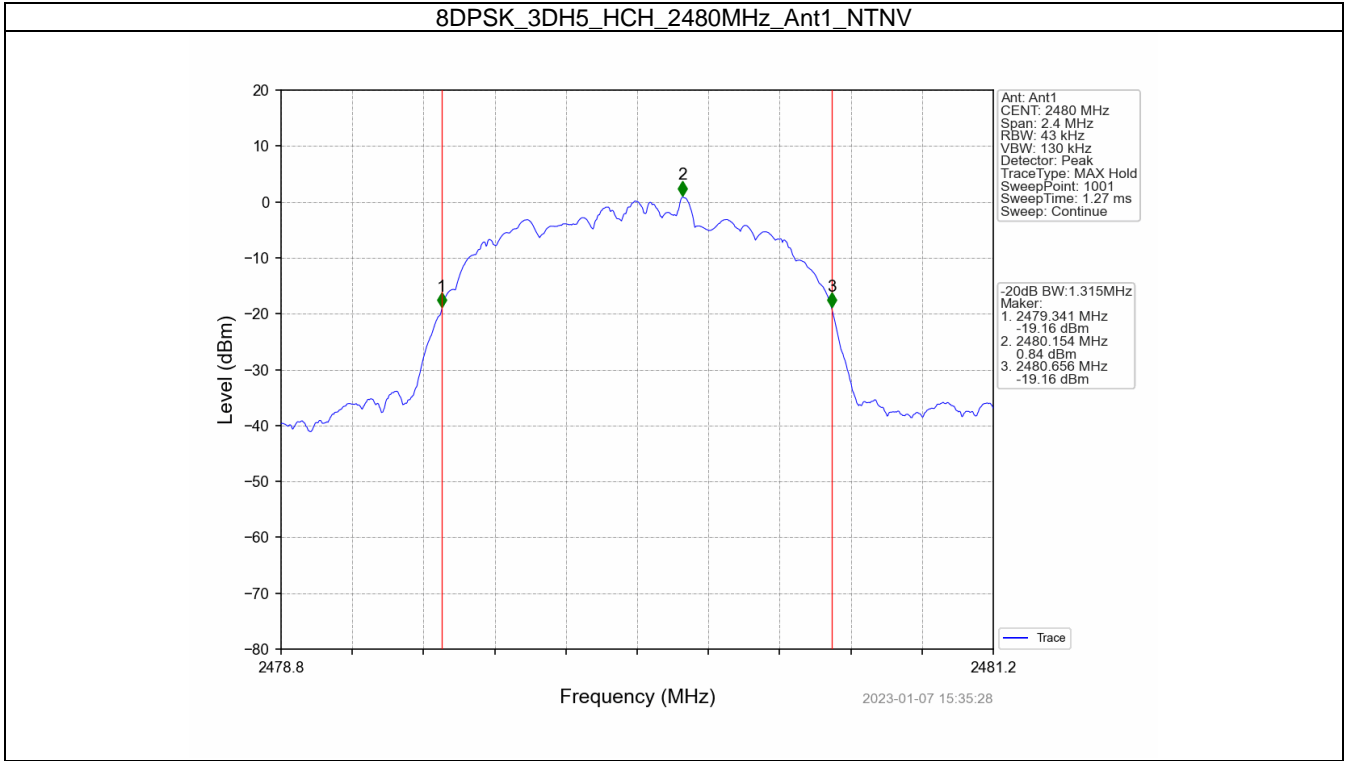

2. Maximum Conducted Output Power



2.1 Power

2.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	Maximum Peak Conducted Output Power (dBm)				Verdict
				ANT1	Limit	EIRP	Limit	
GFSK	SISO	2402	DH5	5.92	<=20.97	9.12	<=36	Pass
		2441	DH5	6.30	<=20.97	9.50	<=36	Pass
		2480	DH5	6.07	<=20.97	9.27	<=36	Pass
Pi/4DQPSK	SISO	2402	2DH5	5.17	<=20.97	8.37	<=36	Pass
		2441	2DH5	5.59	<=20.97	8.79	<=36	Pass
		2480	2DH5	5.29	<=20.97	8.49	<=36	Pass
8DPSK	SISO	2402	3DH5	4.90	<=20.97	8.10	<=36	Pass
		2441	3DH5	5.33	<=20.97	8.53	<=36	Pass
		2480	3DH5	5.03	<=20.97	8.23	<=36	Pass

Note1: Antenna Gain: Ant1: 3.20dBi;


2.1.2 Test Graph

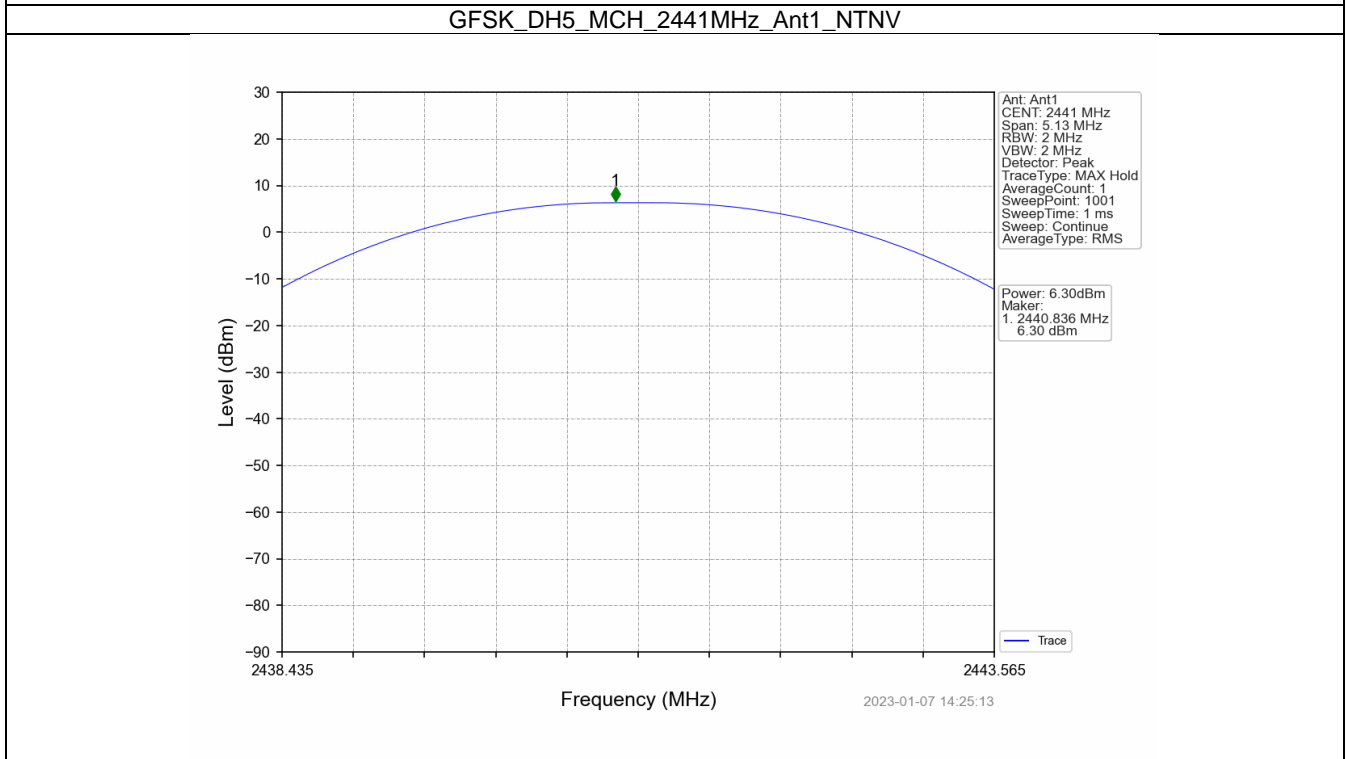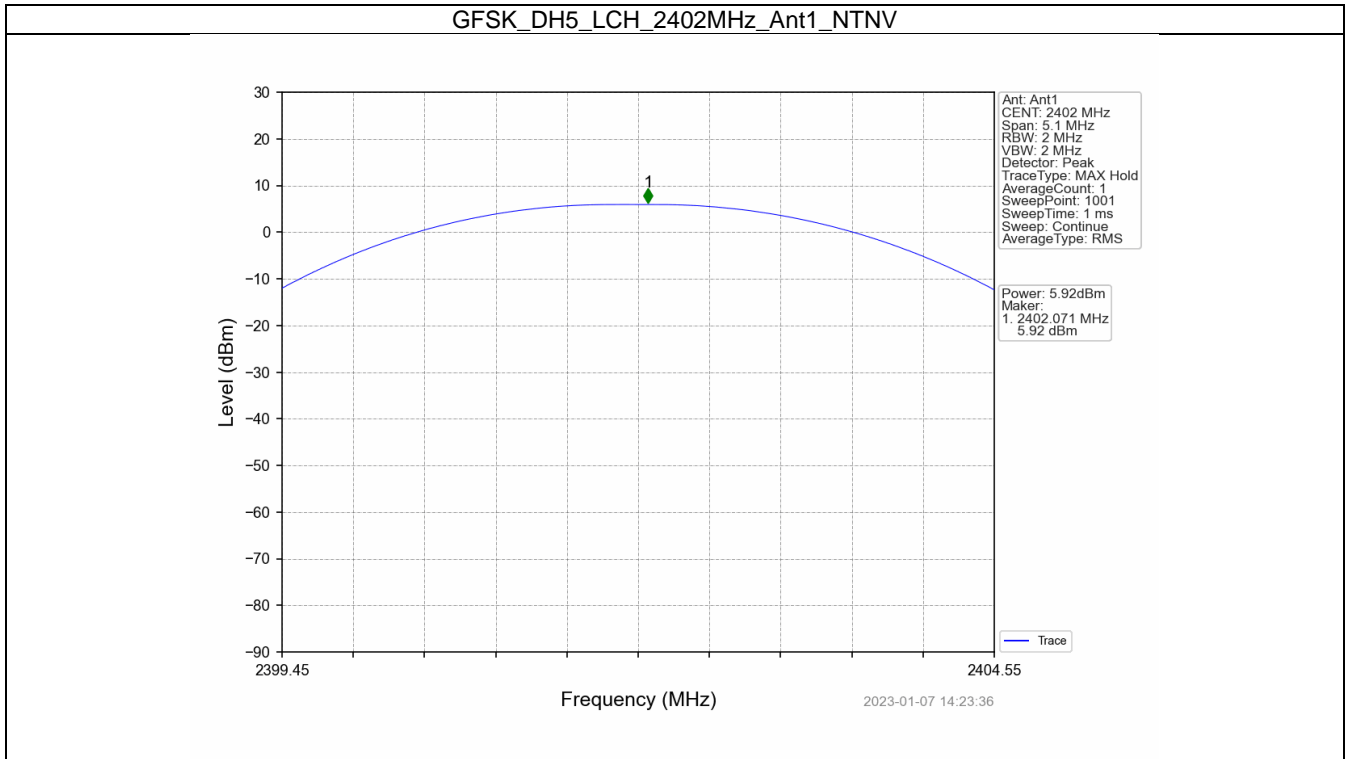


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

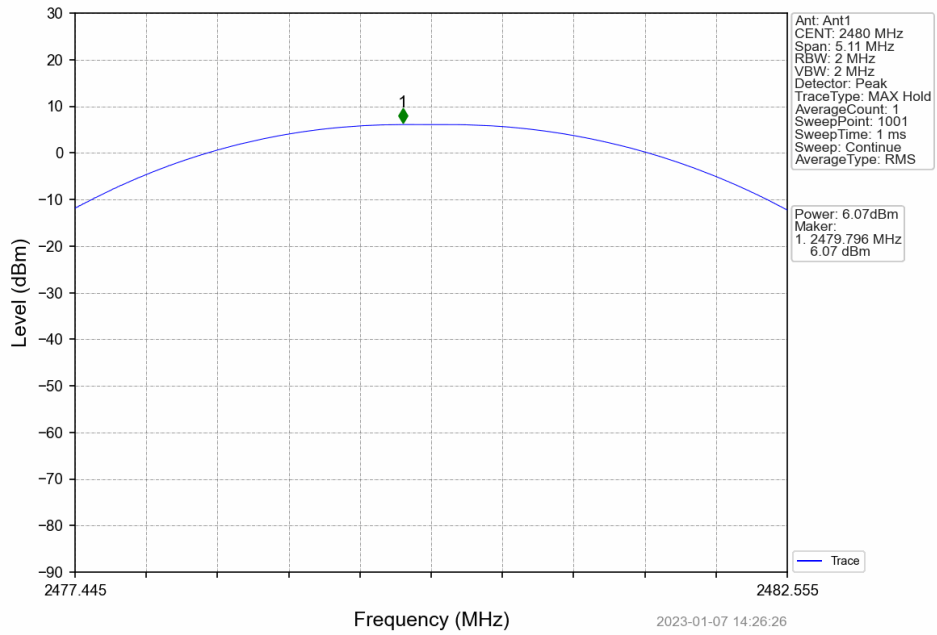


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

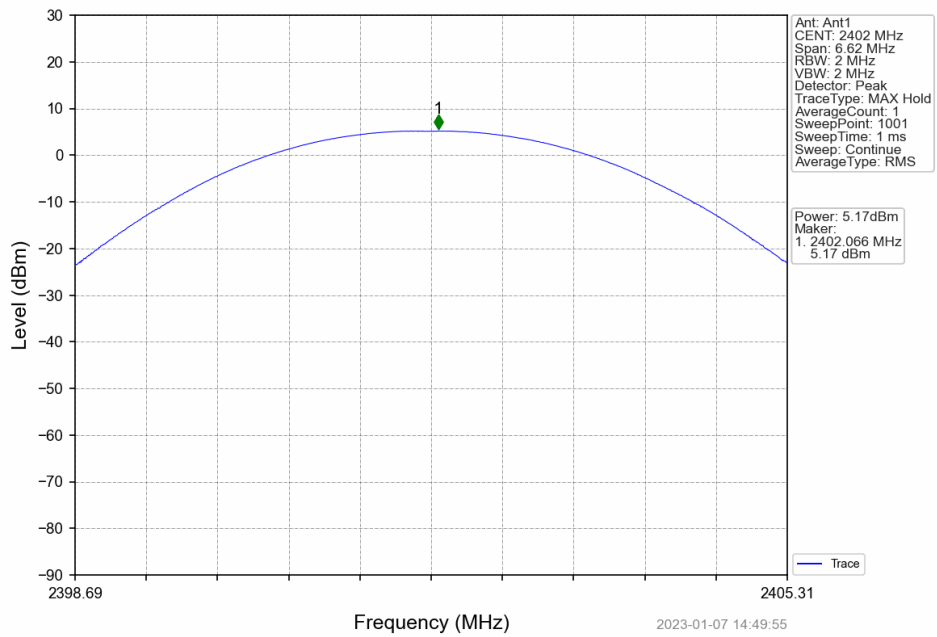


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

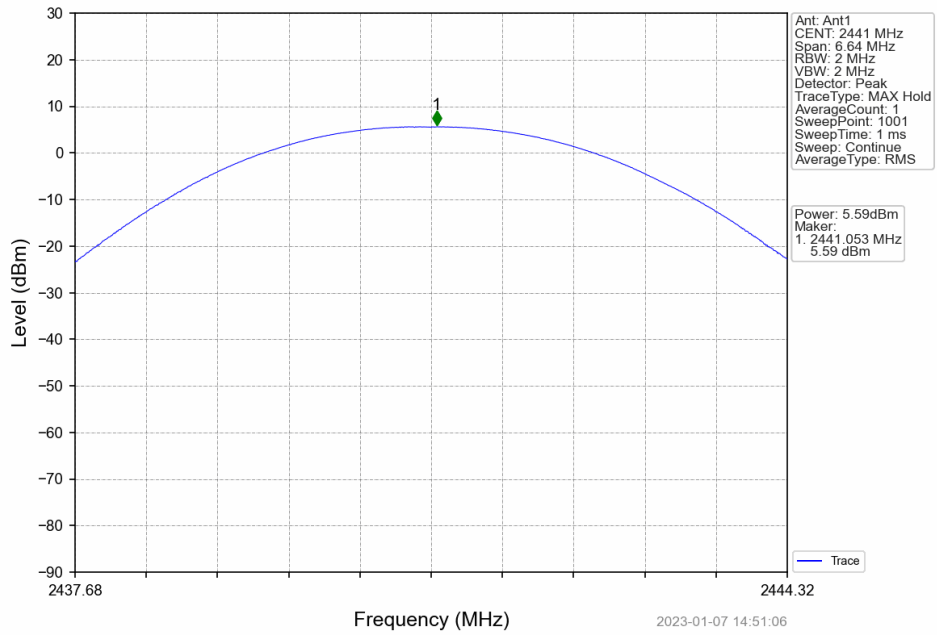


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

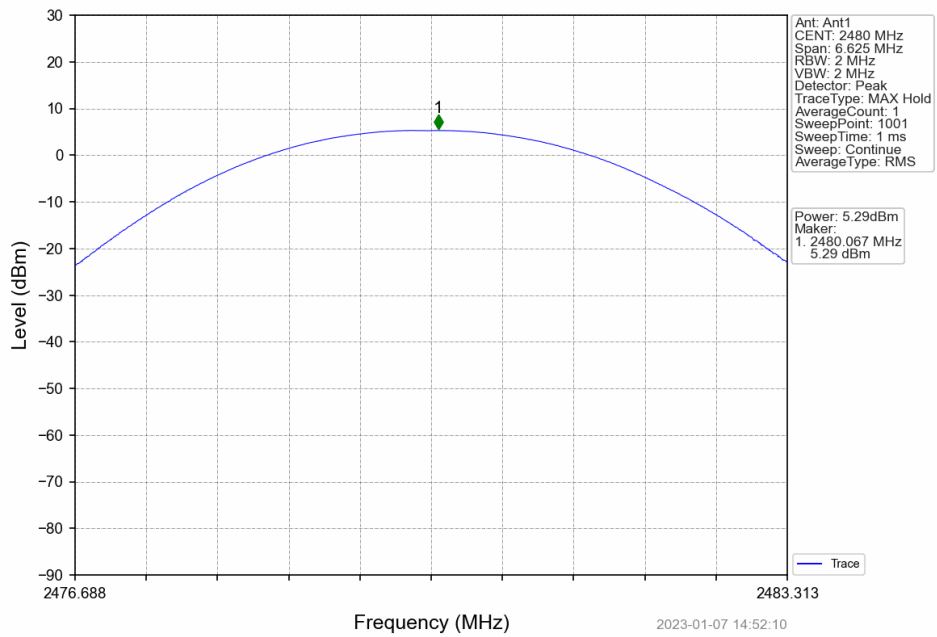


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

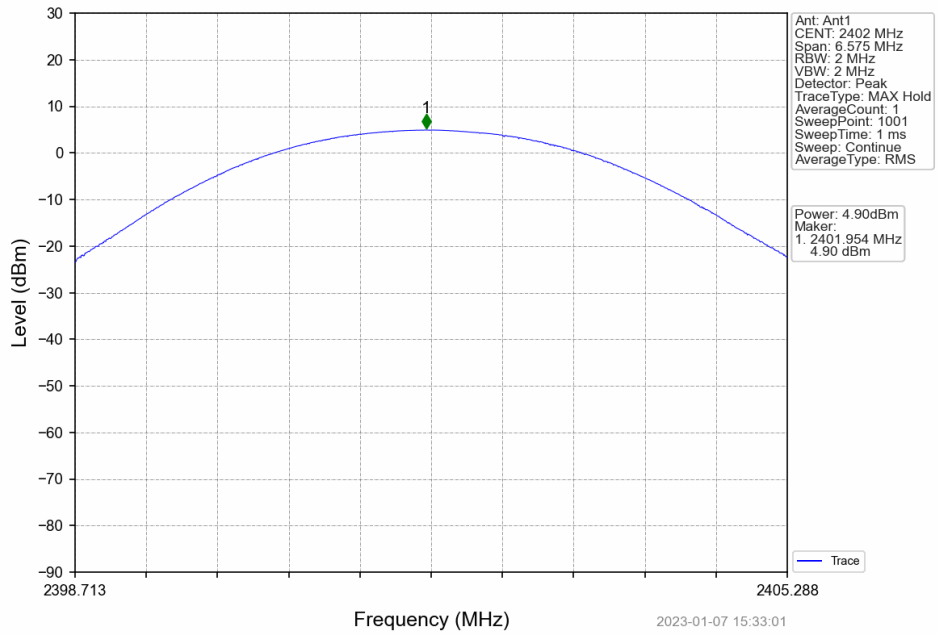

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

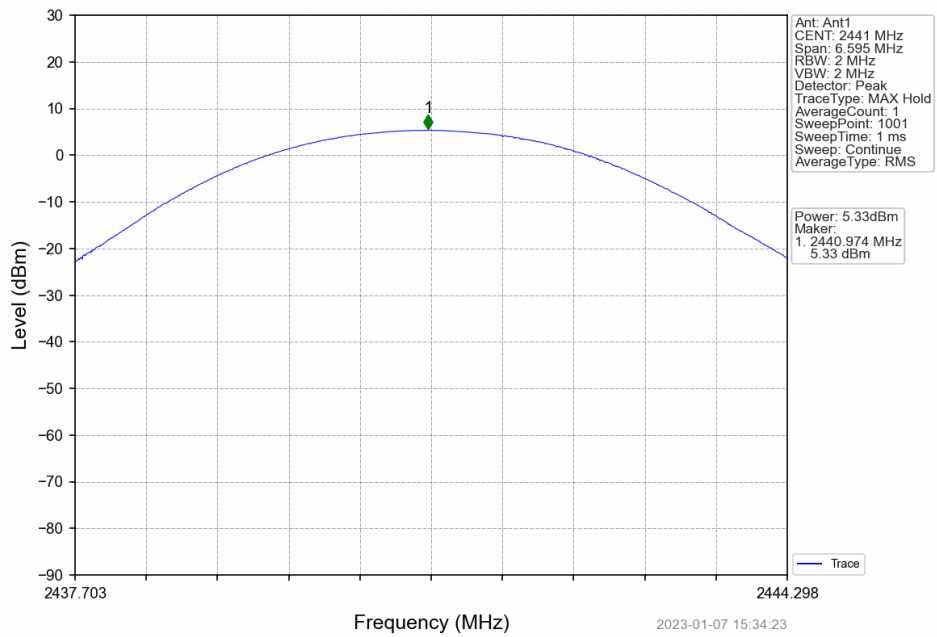

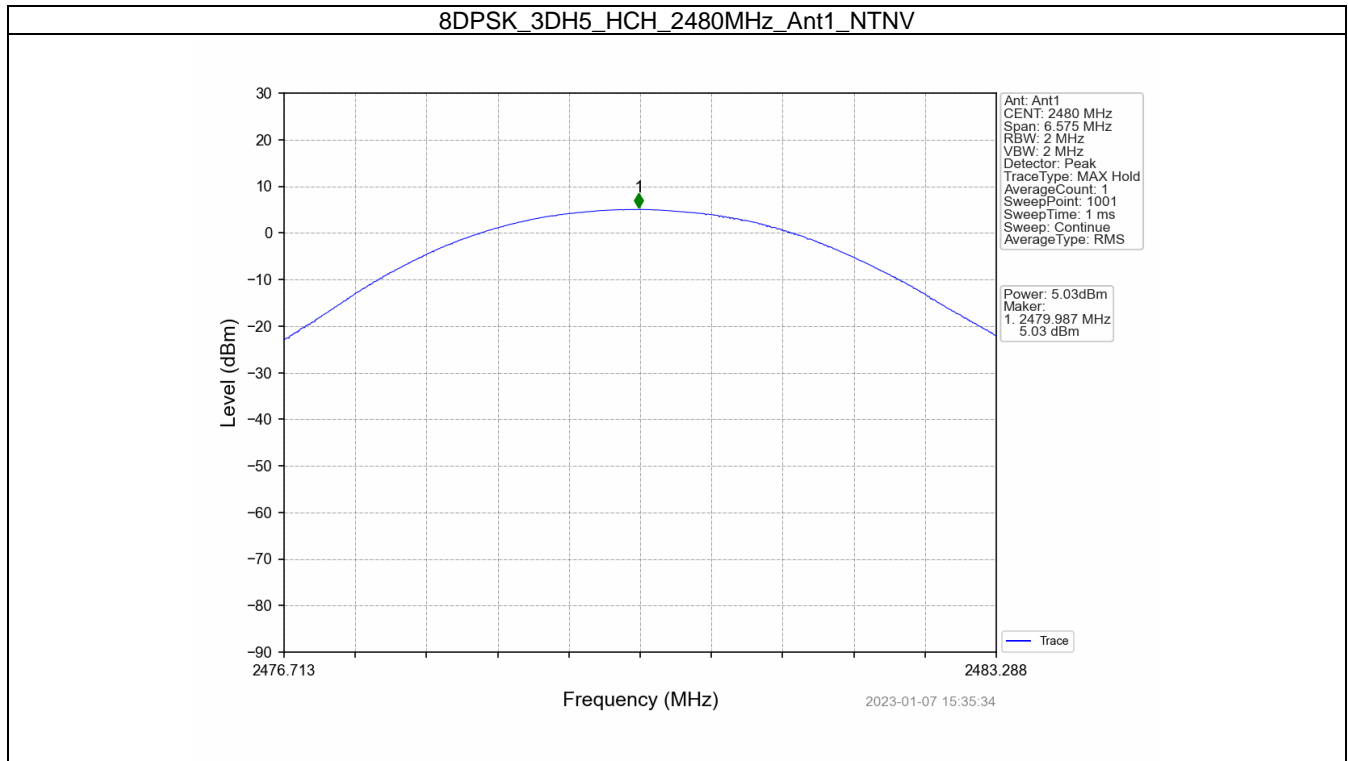



3. Carrier Frequency Separation


3.1 Ant1

3.1.1 Test Result

Ant1							
Mode	TX Type	Frequency (MHz)	Packet Type	Channel Separation (MHz)	20dB Bandwidth (MHz)	Limit (MHz)	Verdict
GFSK	SISO	HOPP	DH5	1.000	1.026	≥ 0.684	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	1.001	1.328	≥ 0.885	Pass
8DPSK	SISO	HOPP	3DH5	1.003	1.319	≥ 0.879	Pass

3.1.2 Test Graph

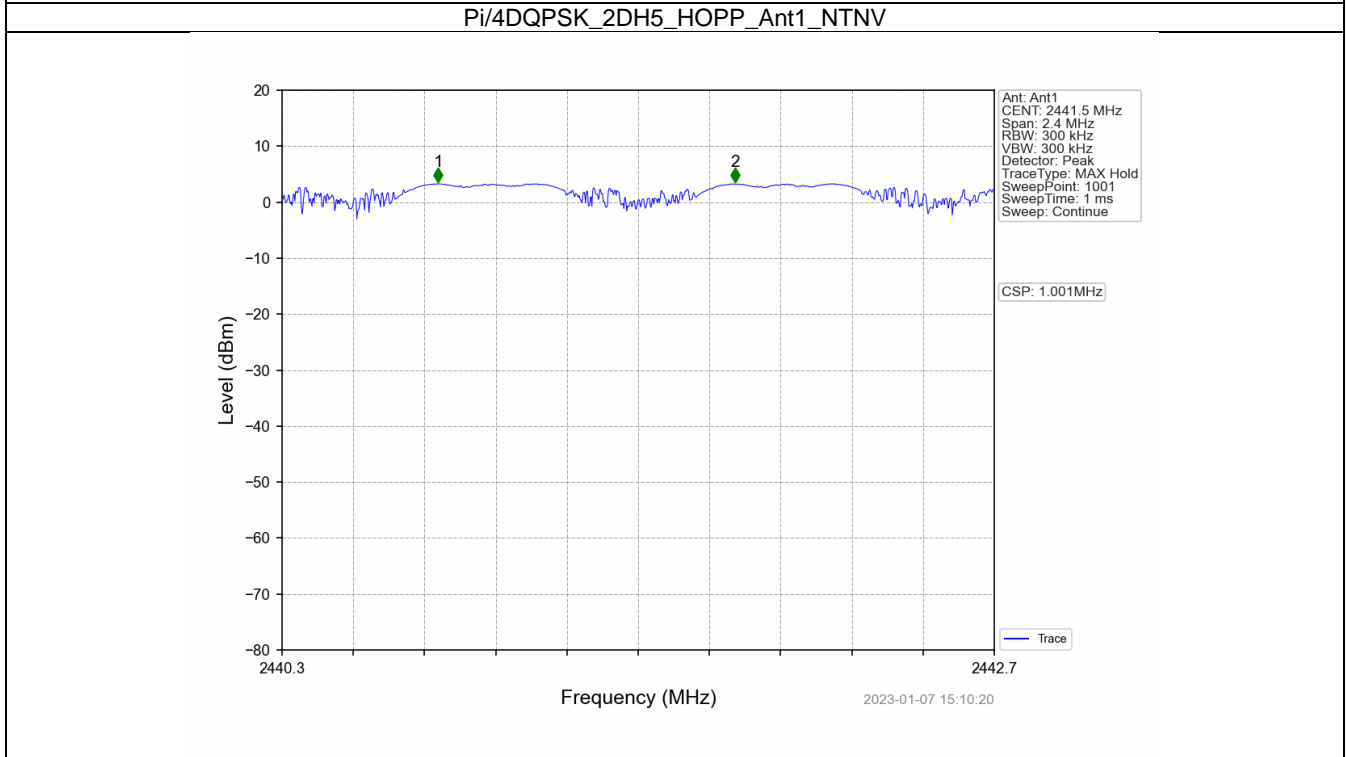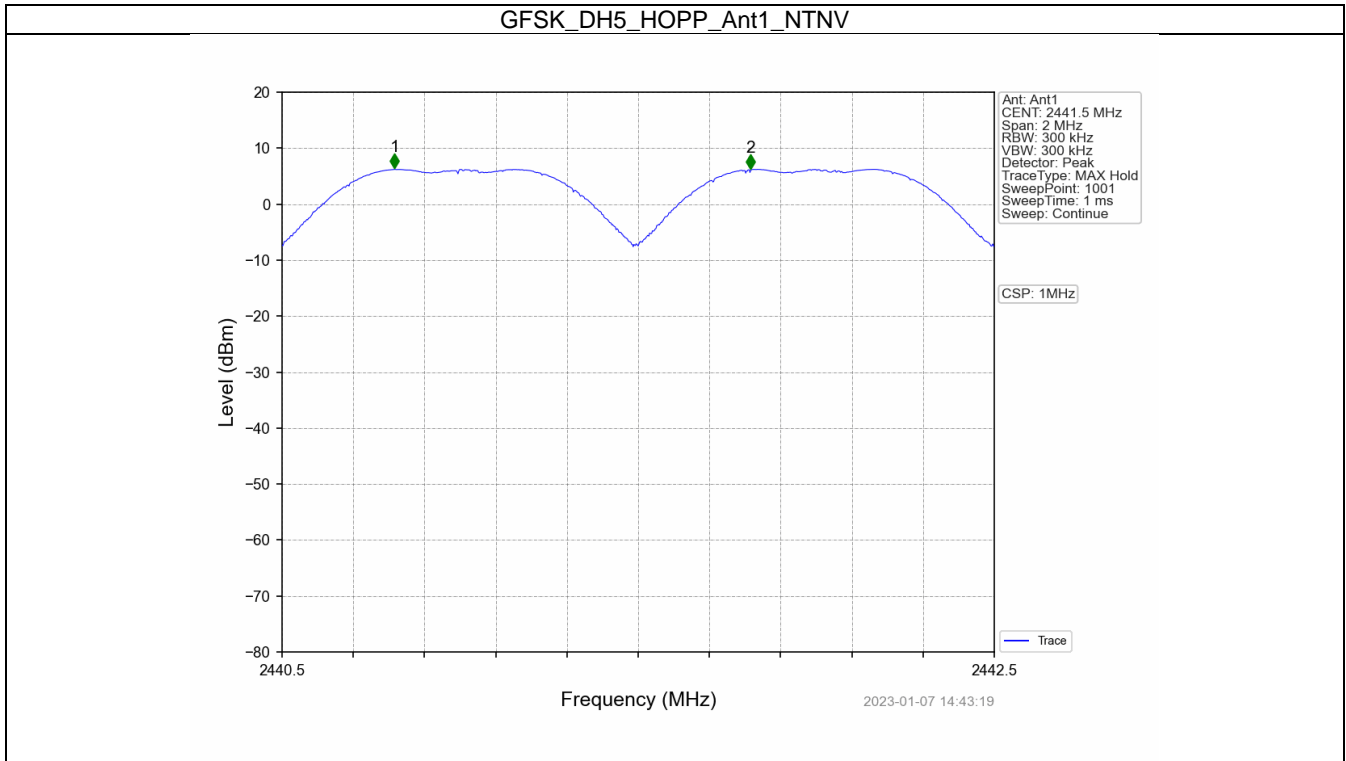

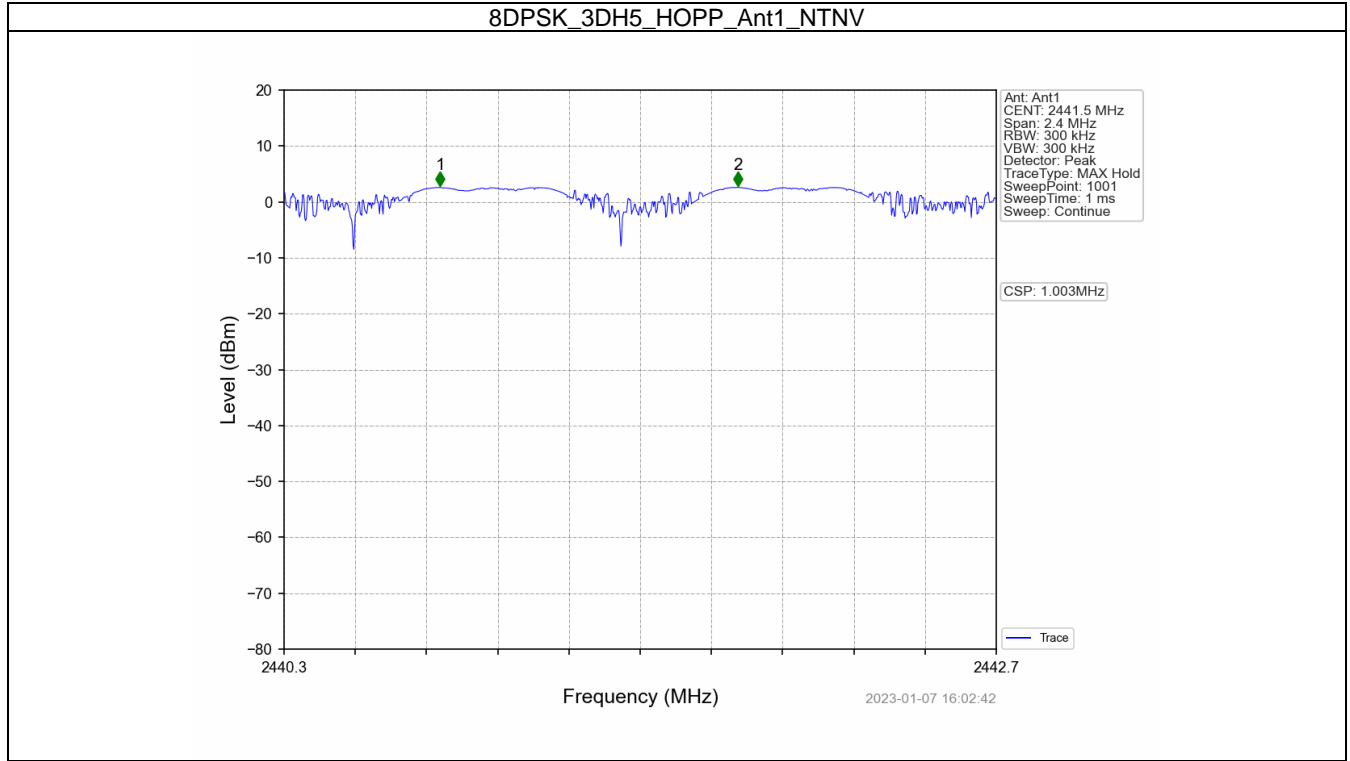



4. Number of Hopping Frequencies


4.1 HoppNum

4.1.1 Test Result

Mode	TX Type	Frequency (MHz)	Packet Type	Num of Hopping Frequencies		Verdict
				ANT1	Limit	
GFSK	SISO	HOPP	DH5	79	>=15	Pass
Pi/4DQPSK	SISO	HOPP	2DH5	79	>=15	Pass
8DPSK	SISO	HOPP	3DH5	79	>=15	Pass

4.1.2 Test Graph

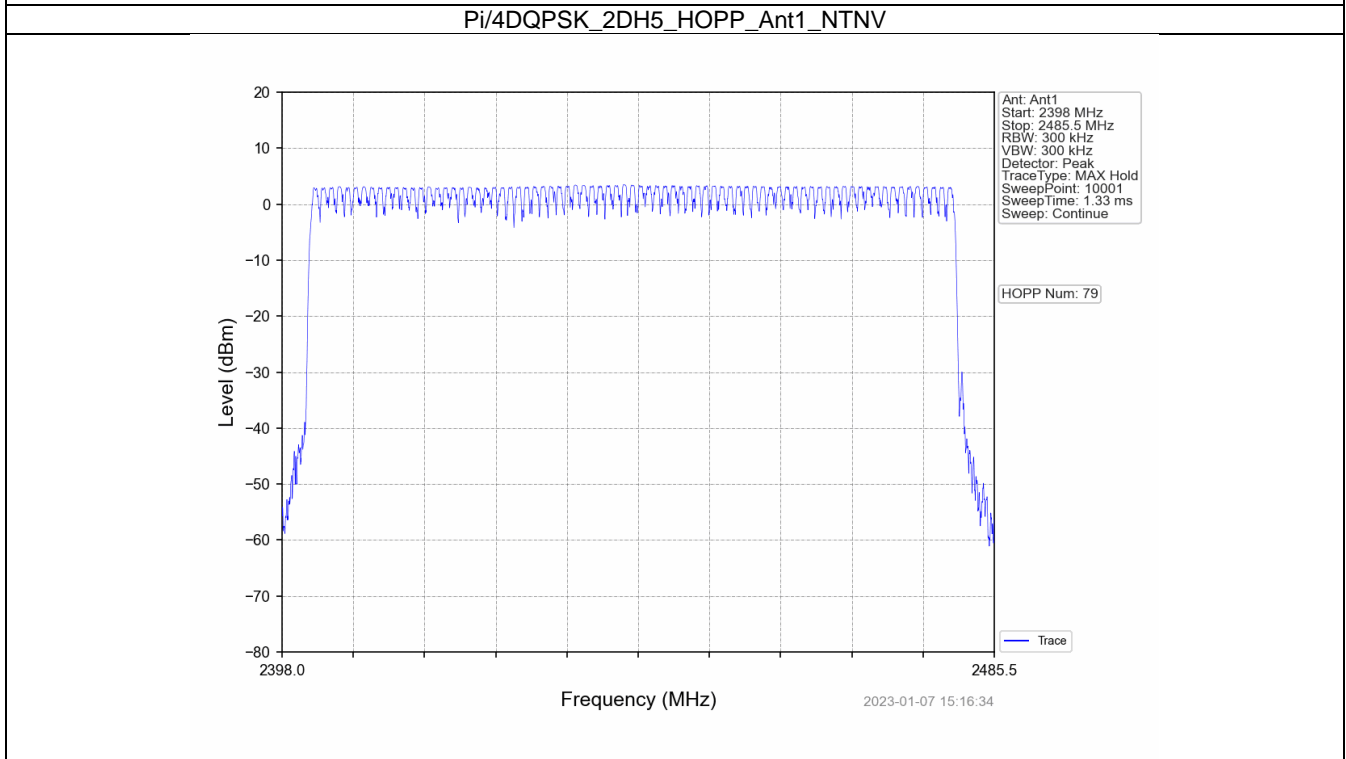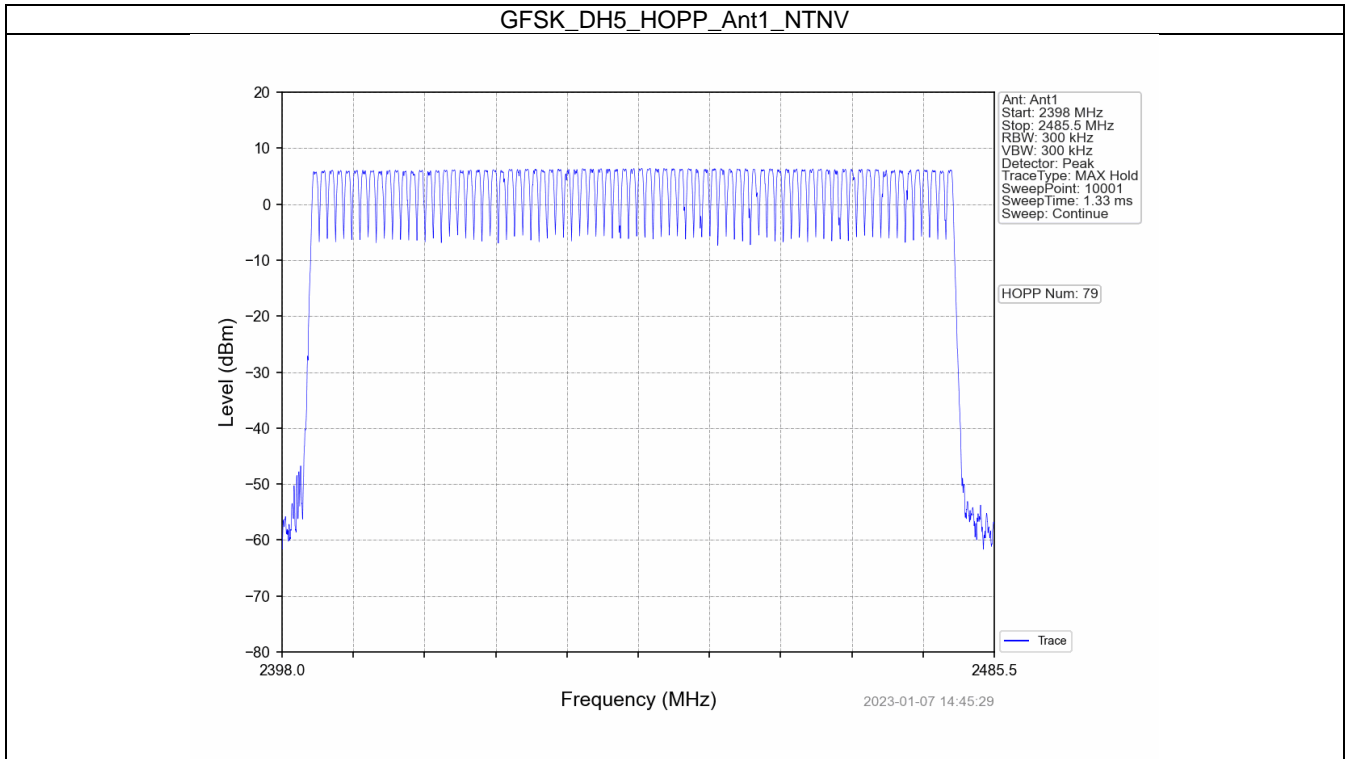

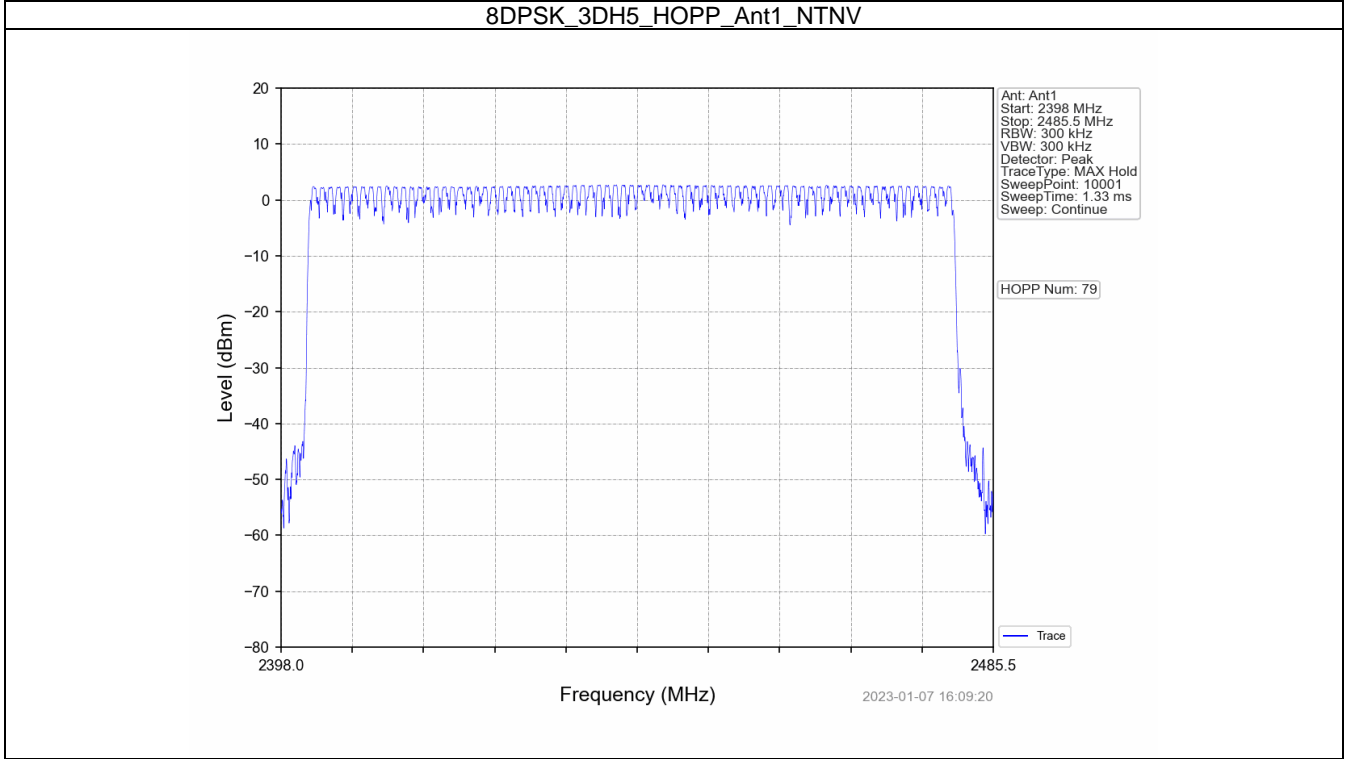



5. Time of Occupancy (Dwell Time)

5.1 Ant1


5.1.1 Test Result

Ant1									
Mode	TX Type	Frequency (MHz)	Packet Type	Duration of Single Pulse (ms)	Observation Period (s)	Num of Pulse in Observation Period	Dwell Time (ms)	Limit (ms)	Verdict
GFSK	SISO	HOPP	DH1	0.186	31.600	320	59.520	<=400	Pass
			DH3	0.194	31.600	154	29.876	<=400	Pass
			DH5	0.194	31.600	97	18.818	<=400	Pass
Pi/4DQPSK	SISO	HOPP	2DH1	0.178	31.600	320	56.960	<=400	Pass
			2DH3	0.180	31.600	156	28.080	<=400	Pass
			2DH5	0.182	31.600	105	19.110	<=400	Pass
8DPSK	SISO	HOPP	3DH1	0.172	31.600	319	54.868	<=400	Pass
			3DH3	0.172	31.600	152	26.144	<=400	Pass
			3DH5	0.174	31.600	115	20.010	<=400	Pass


5.1.2 Test Graph

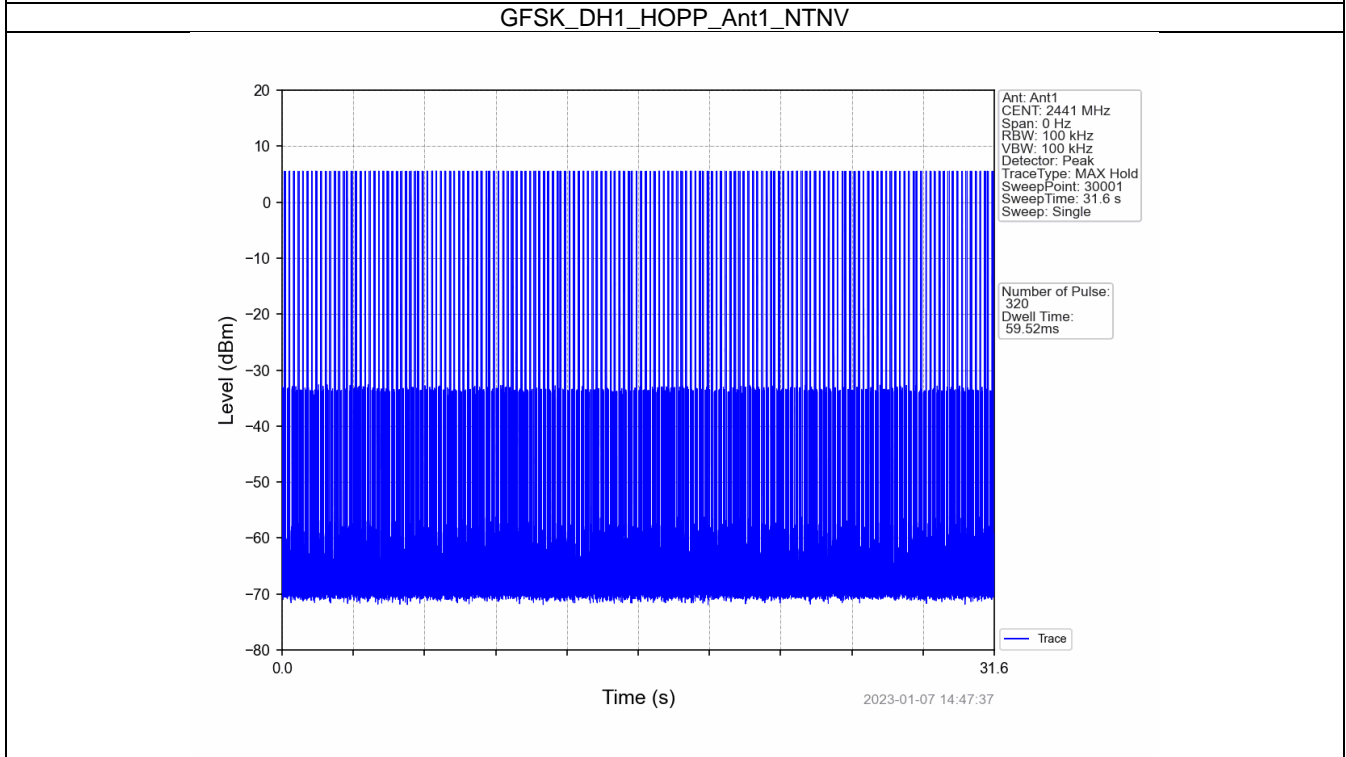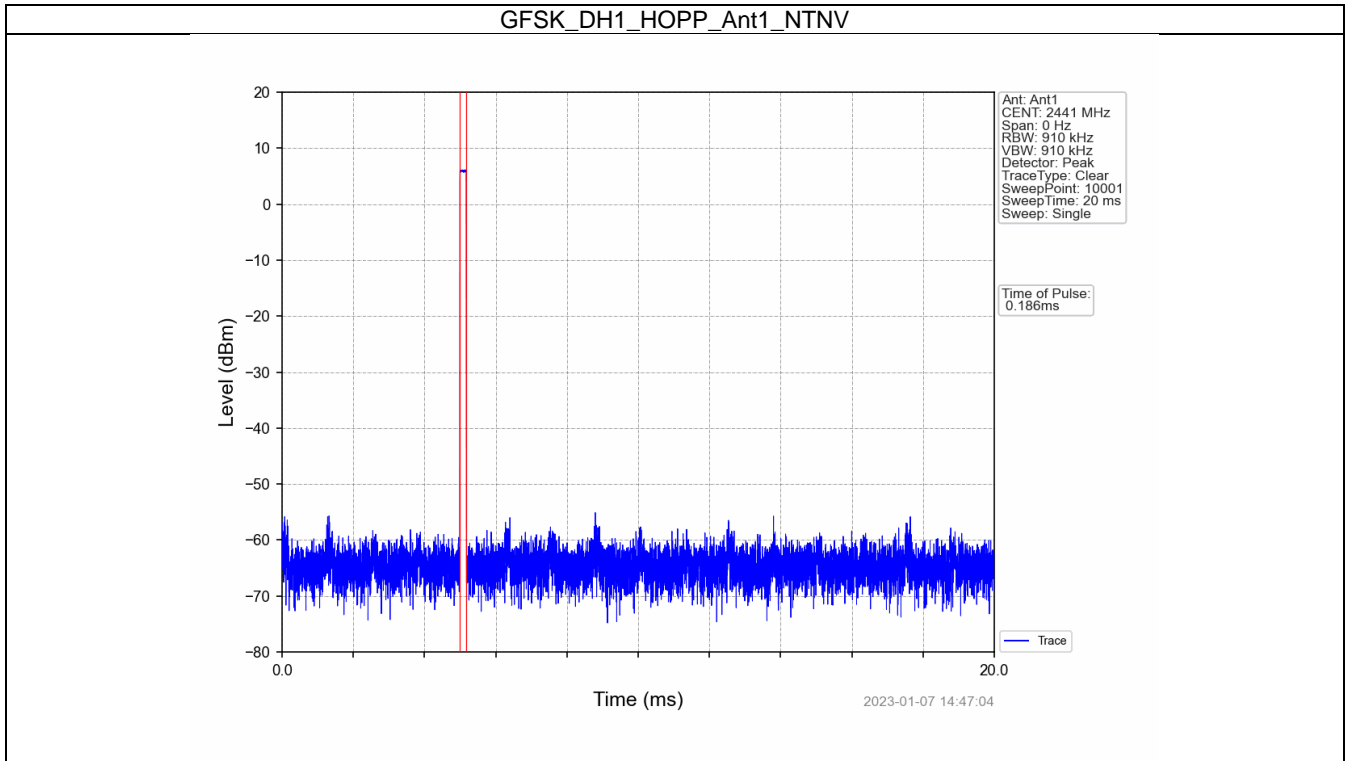


GFSK_DH3_HOPP_Ant1_NTNV

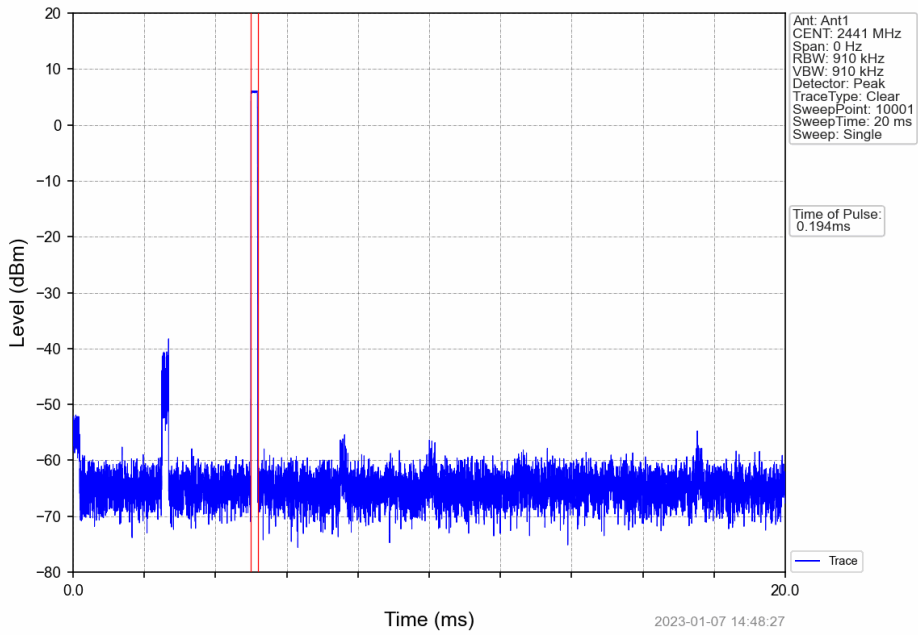


GFSK_DH3_HOPP_Ant1_NTNV

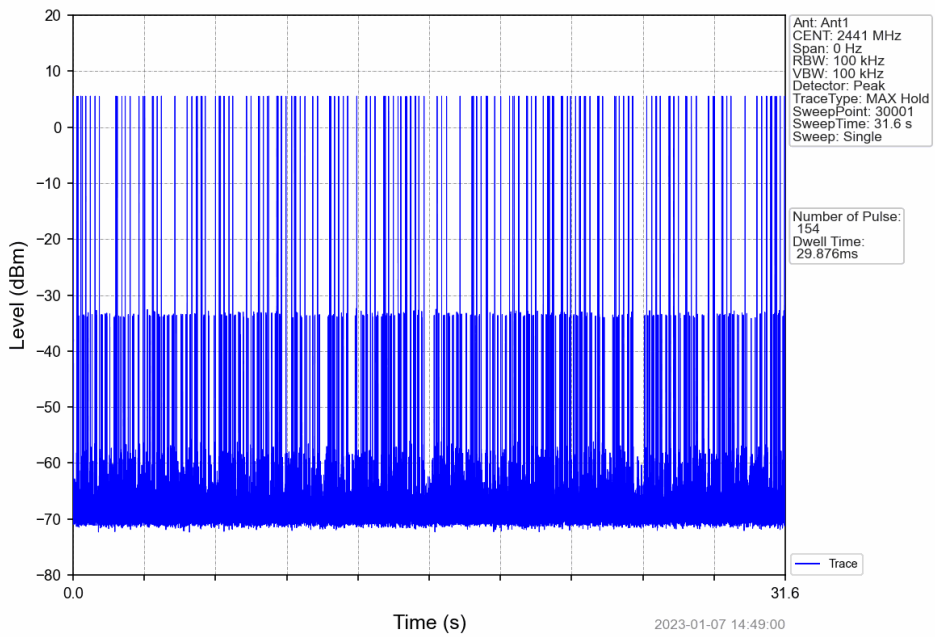


GFSK_DH5_HOPP_Ant1_NTNV

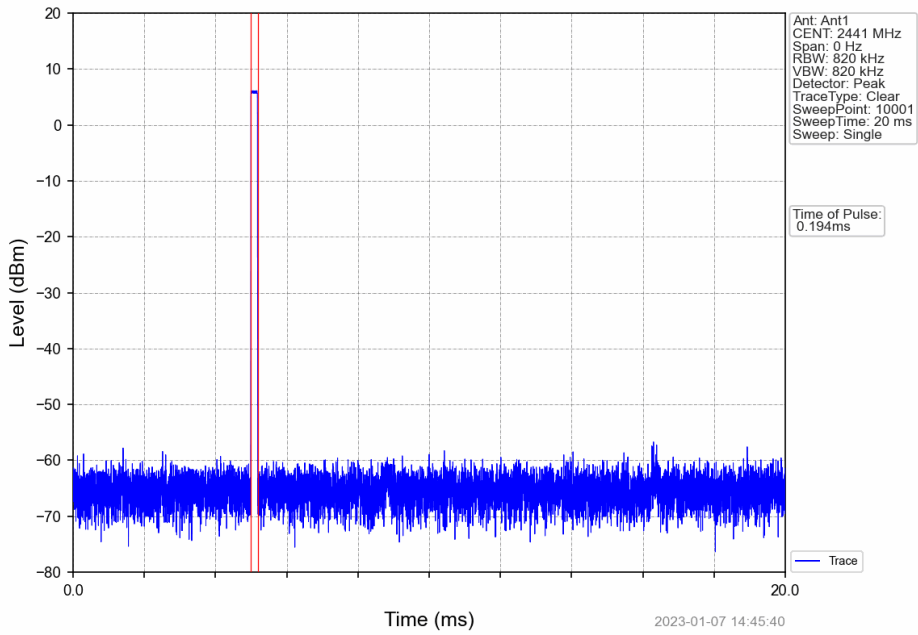


GFSK_DH5_HOPP_Ant1_NTNV

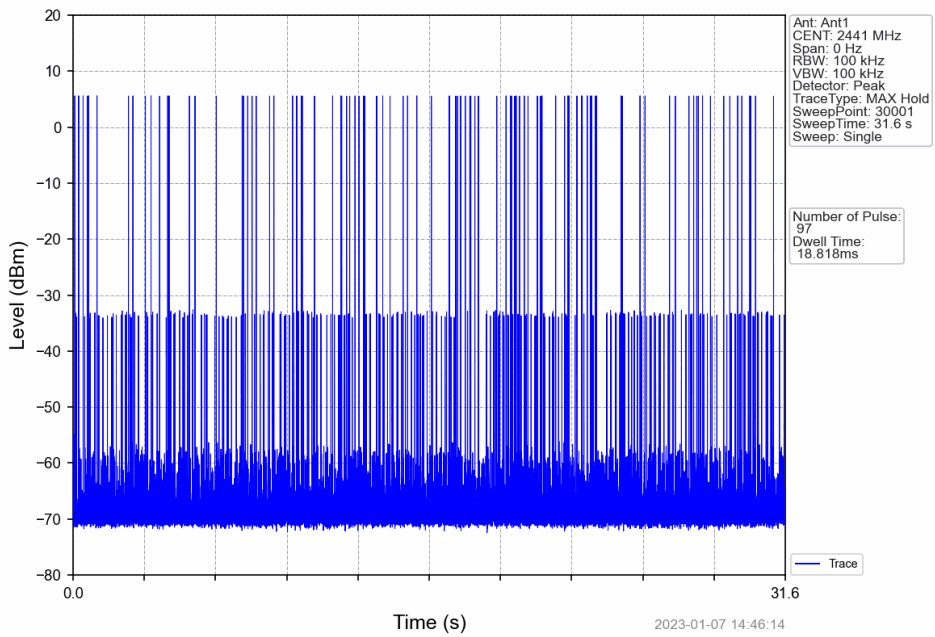


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

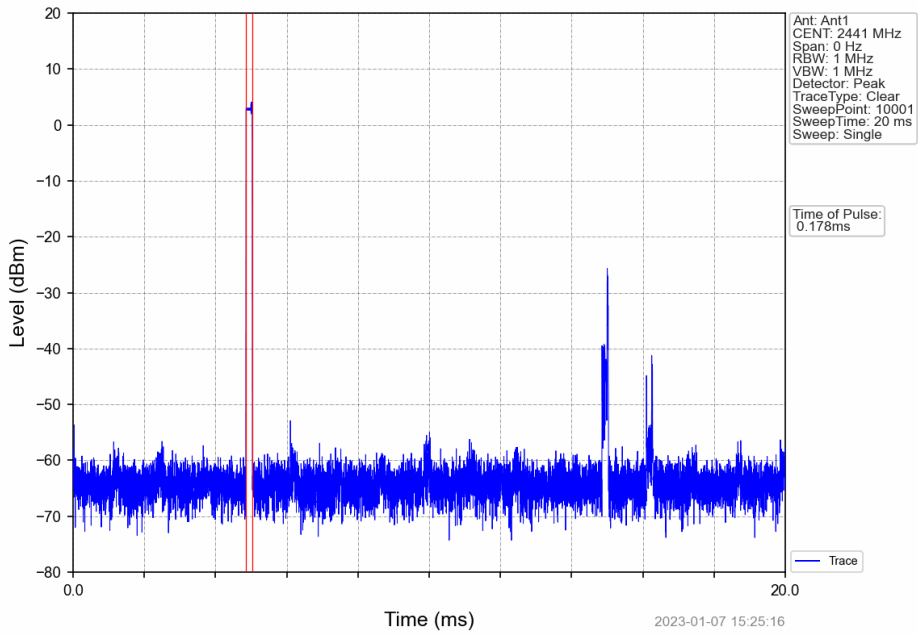


Pi/4DQPSK_2DH1_HOPP_Ant1_NTNV

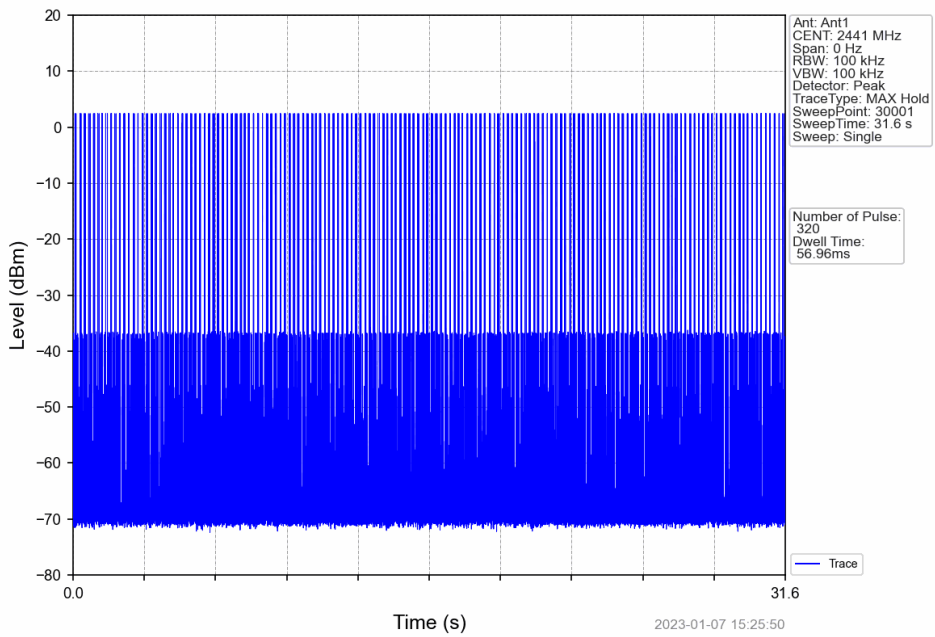


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

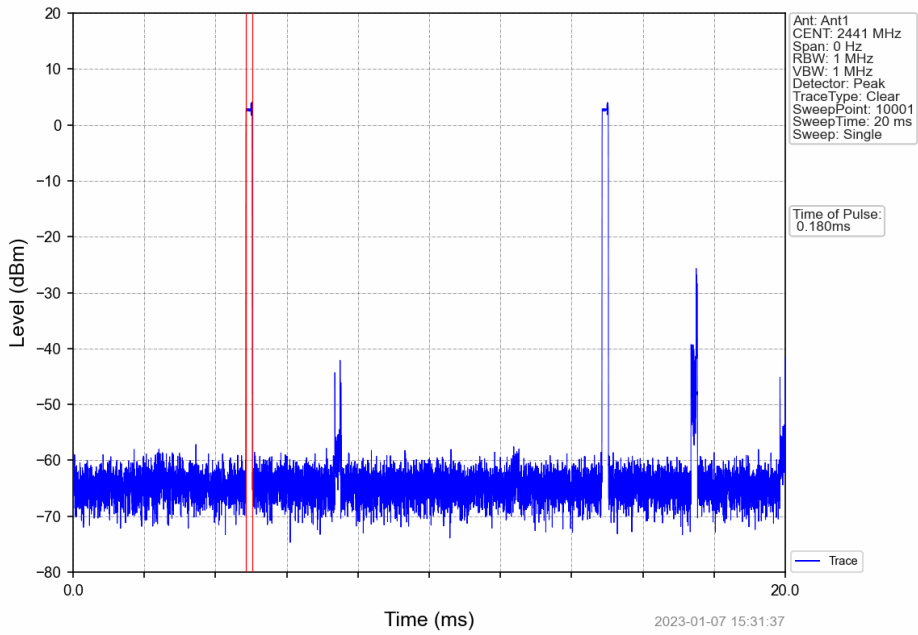


Pi/4DQPSK_2DH3_HOPP_Ant1_NTNV

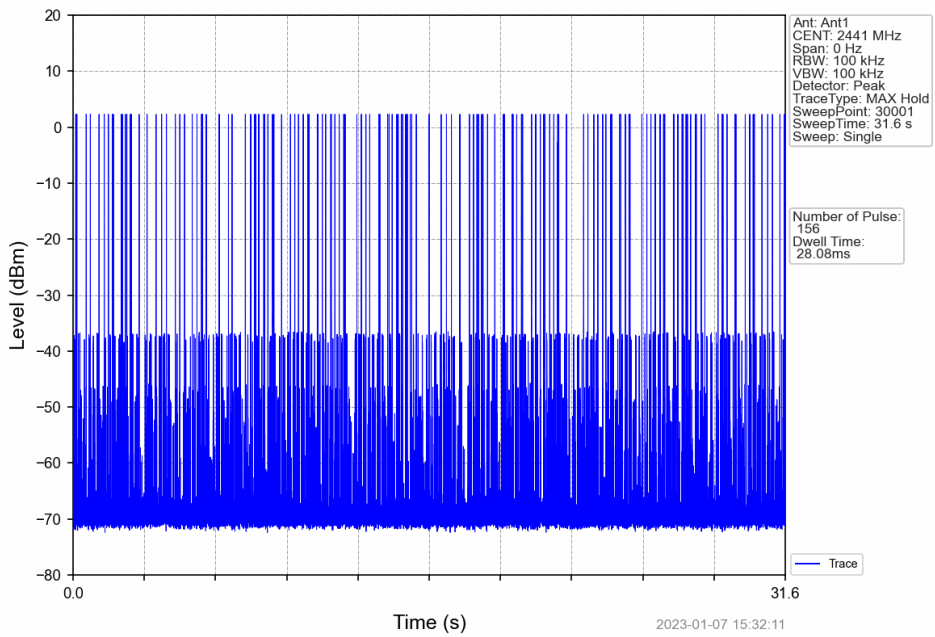


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

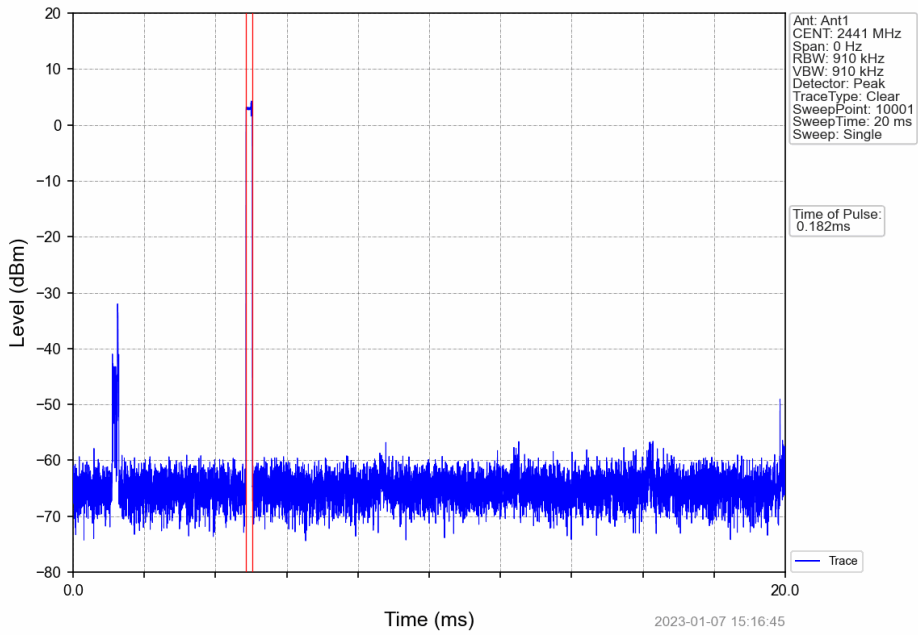


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

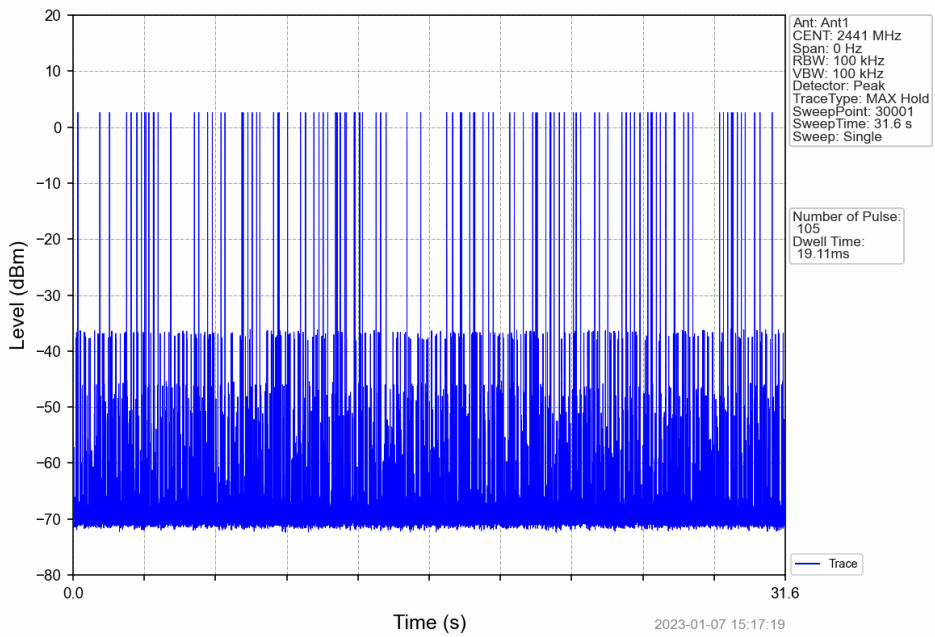


8DPSK_3DH1_HOPP_Ant1_NTNV

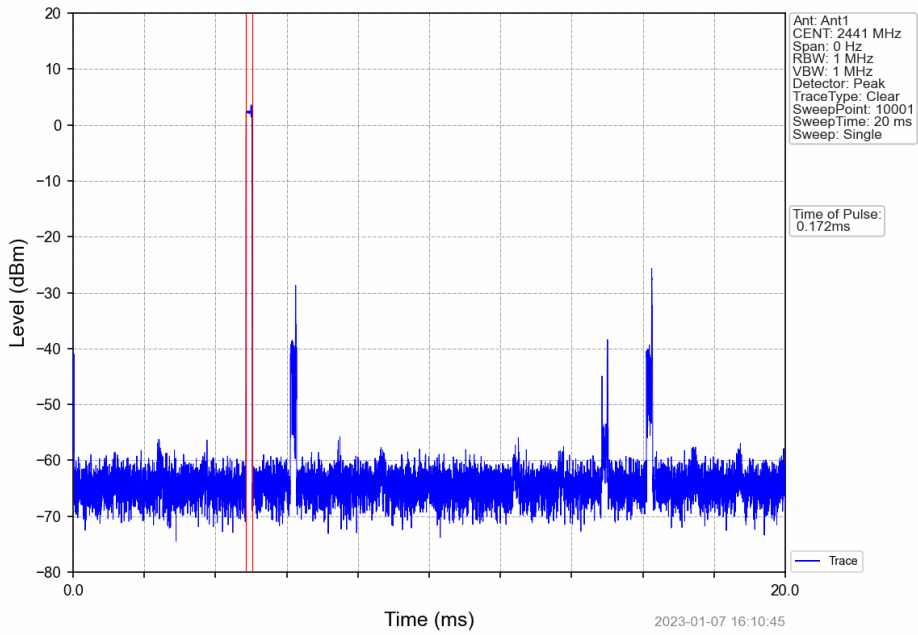


8DPSK_3DH1_HOPP_Ant1_NTNV

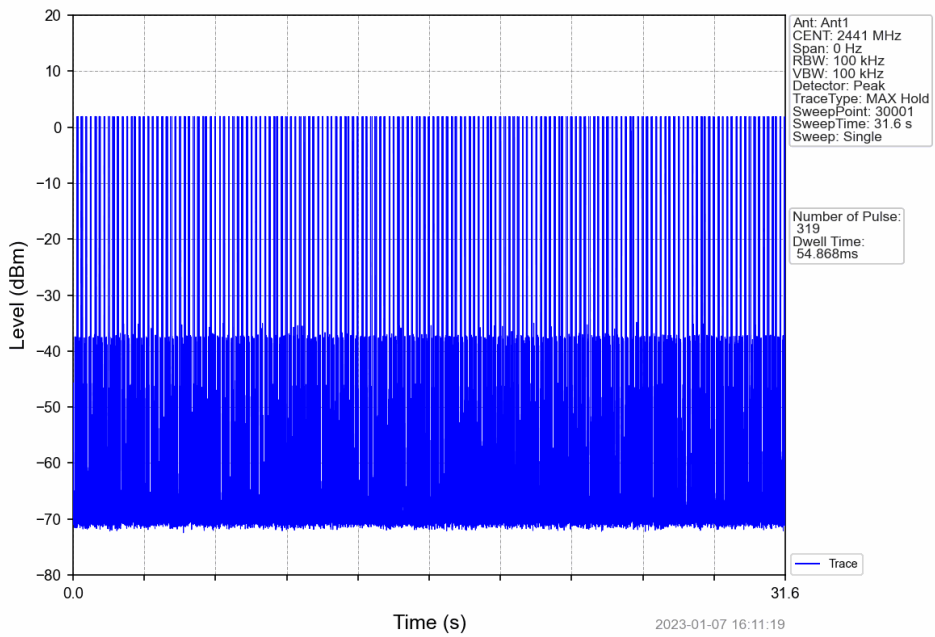


8DPSK_3DH3_HOPP_Ant1_NTNV

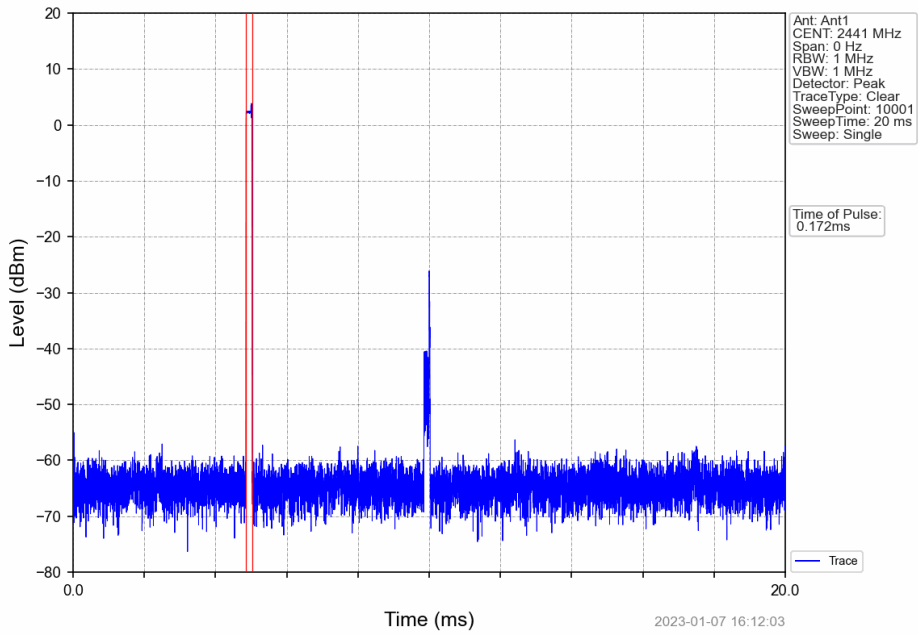


8DPSK_3DH3_HOPP_Ant1_NTNV

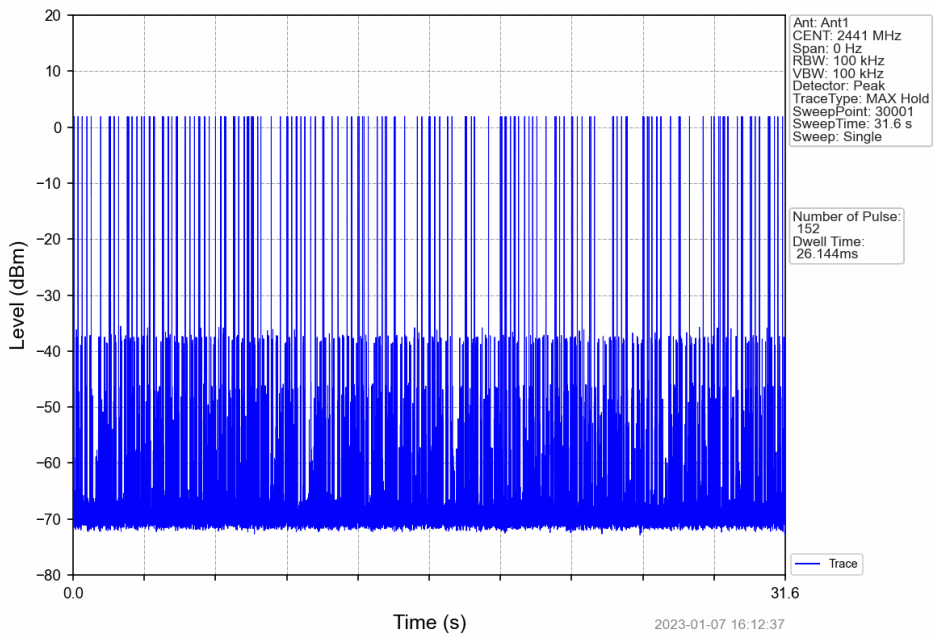

8DPSK_3DH5_HOPP_Ant1_NTNV

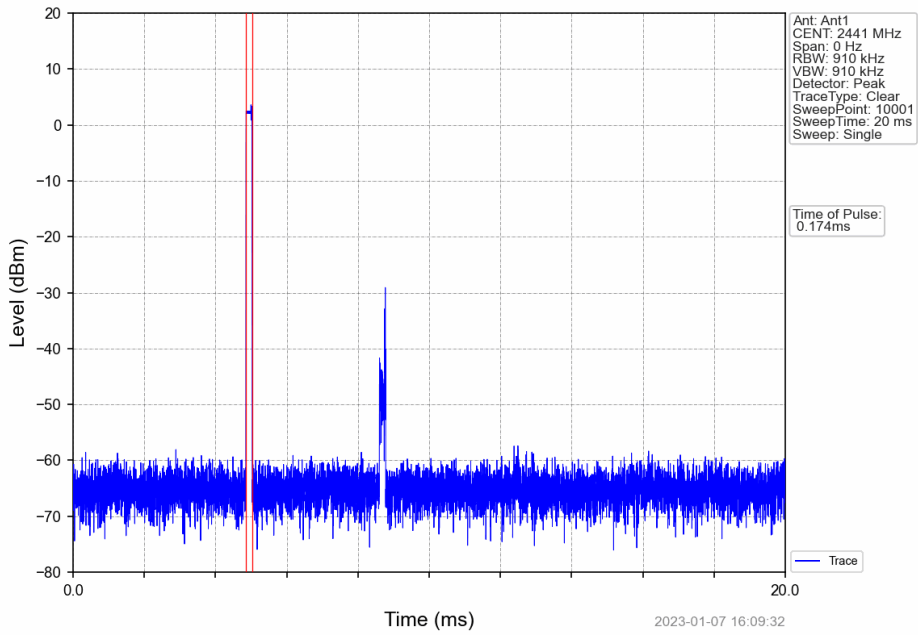

8DPSK_3DH5_HOPP_Ant1_NTNV

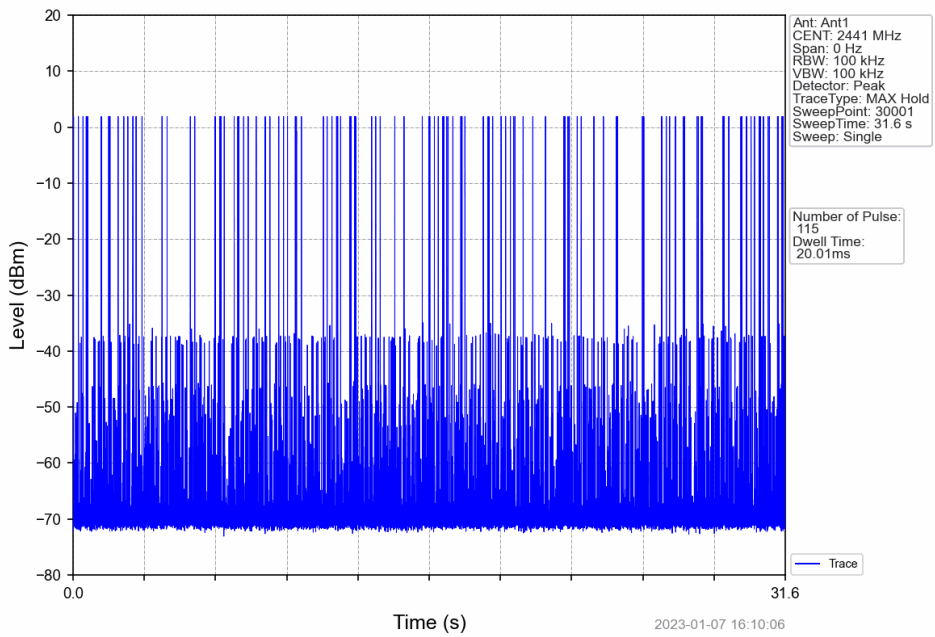

6. Unwanted Emissions In Non-restricted Frequency Bands



6.1 Ref

6.1.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)
GFSK	SISO	2402	DH5	1	5.74
		2441	DH5	1	6.06
		2480	DH5	1	5.87
Pi/4DQPSK	SISO	2402	2DH5	1	2.78
		2441	2DH5	1	3.20
		2480	2DH5	1	2.89
8DPSK	SISO	2402	3DH5	1	2.16
		2441	3DH5	1	2.52
		2480	3DH5	1	2.22

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.1.2 Test Graph

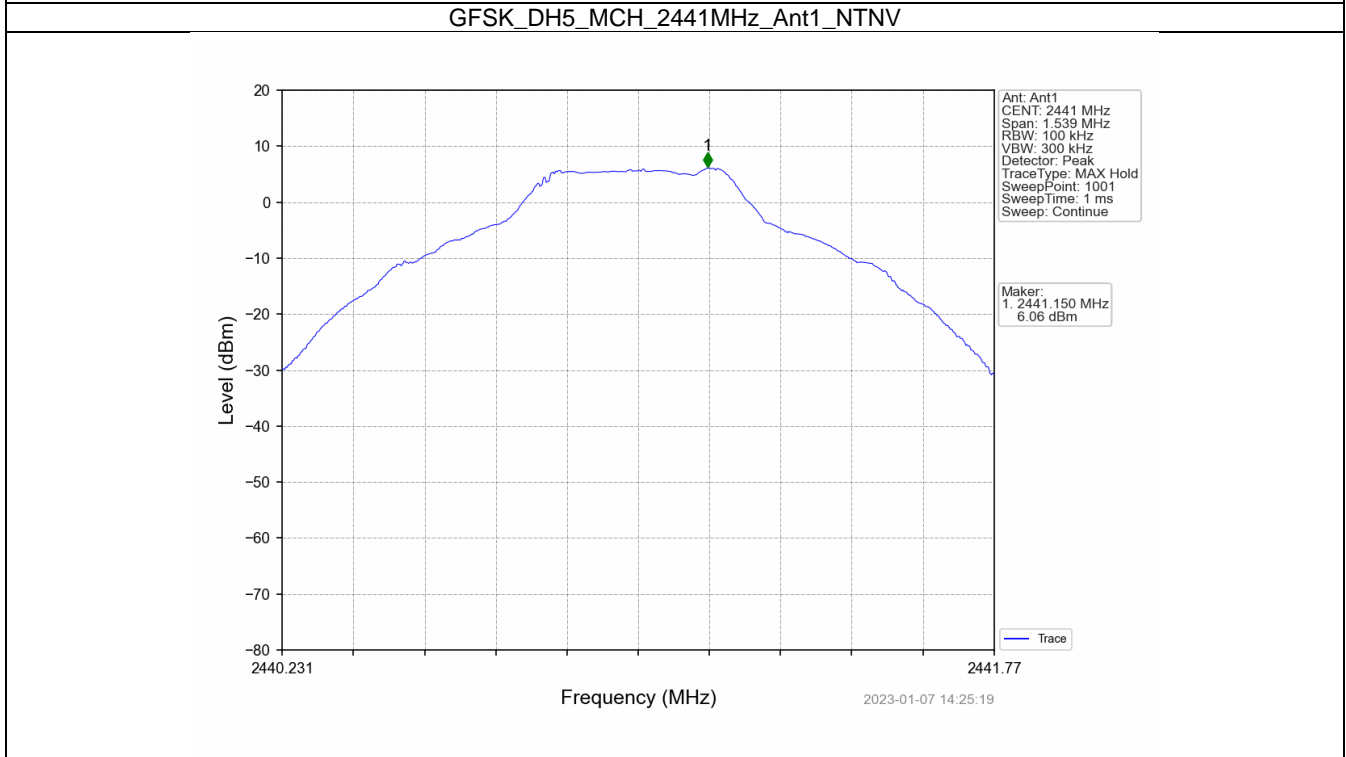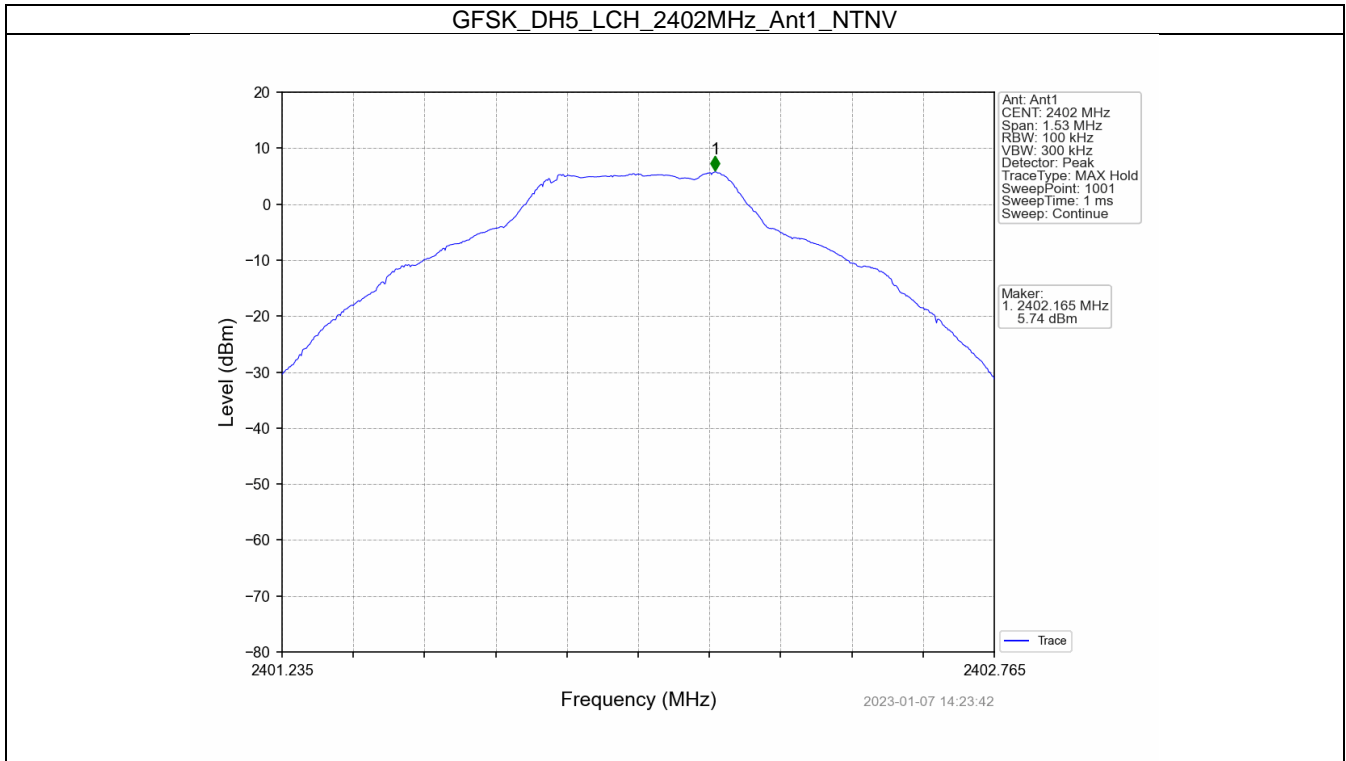


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

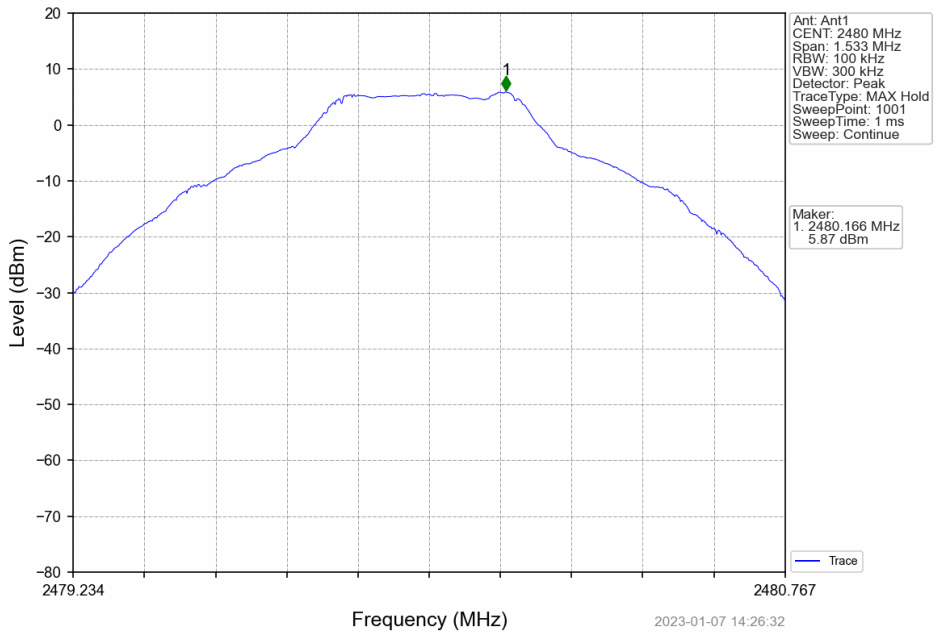


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

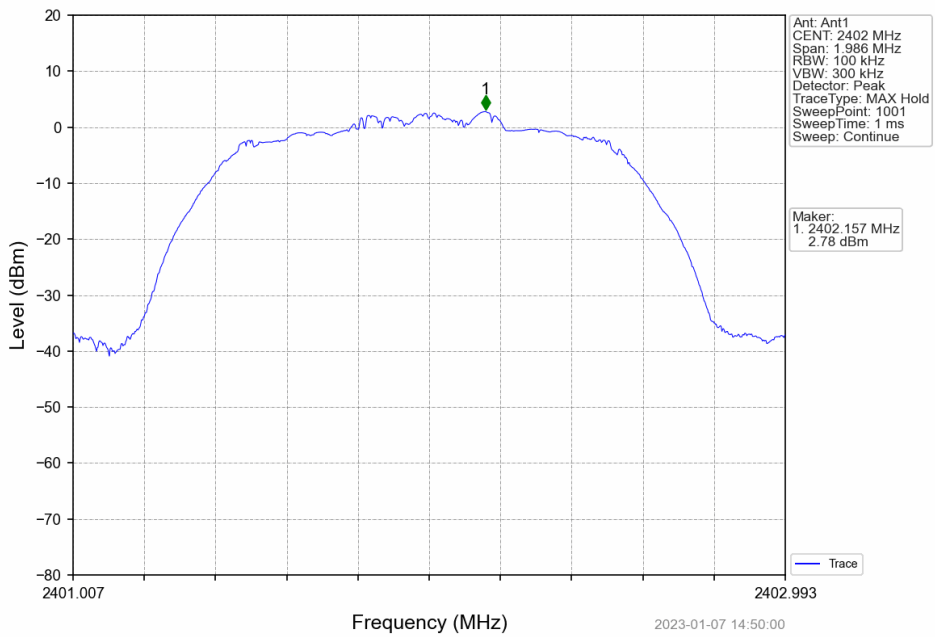


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

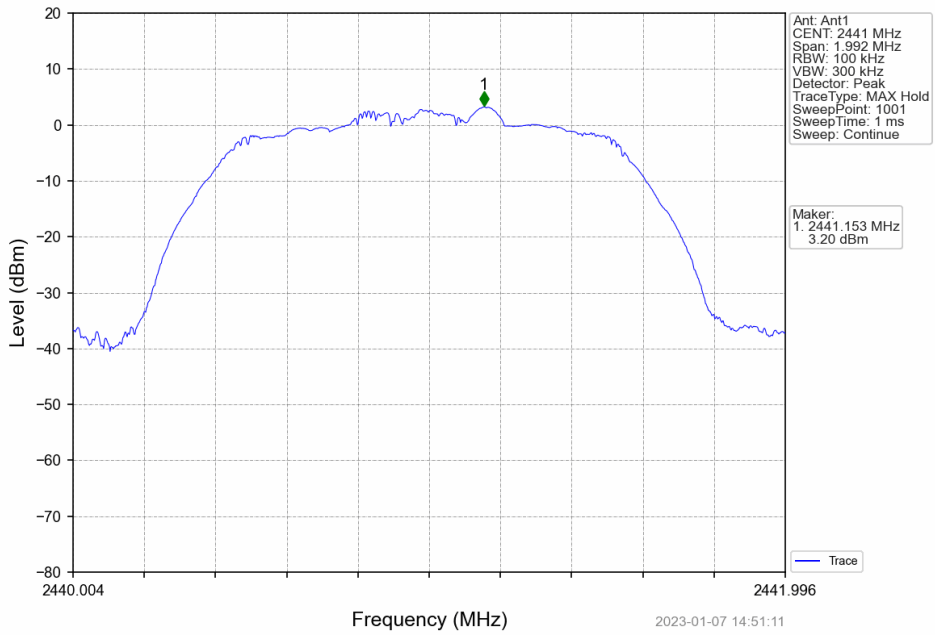


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

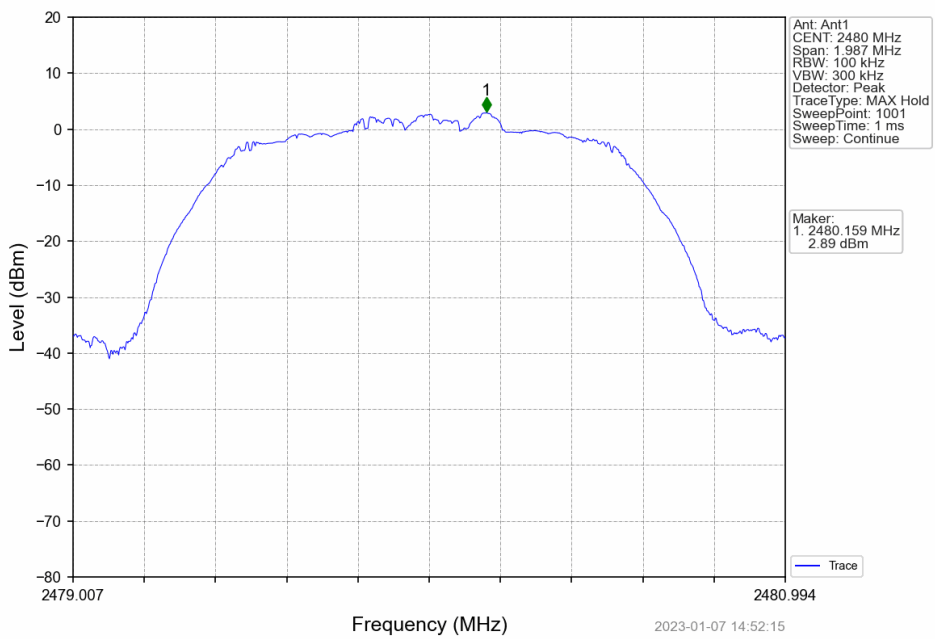


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

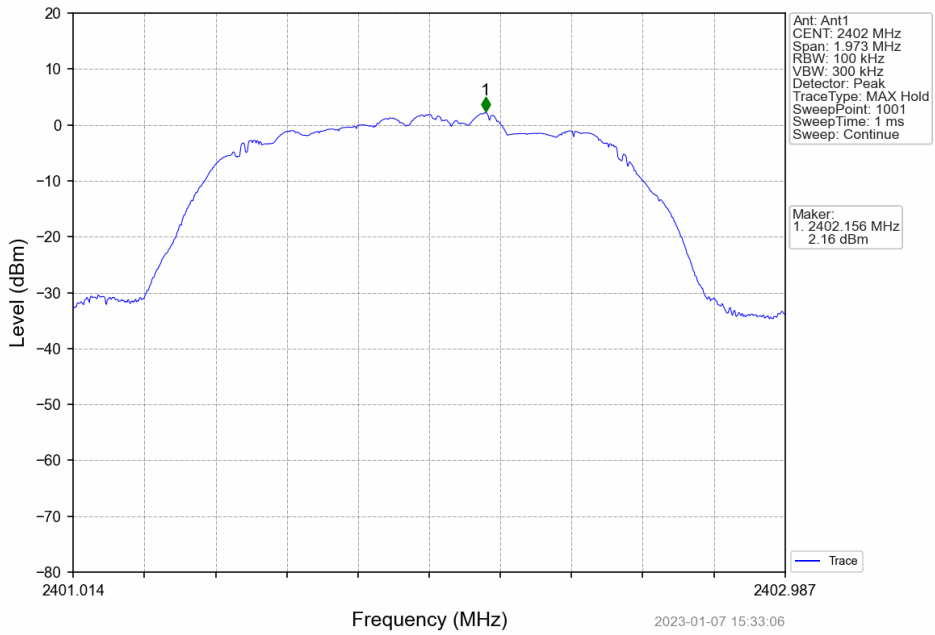

8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

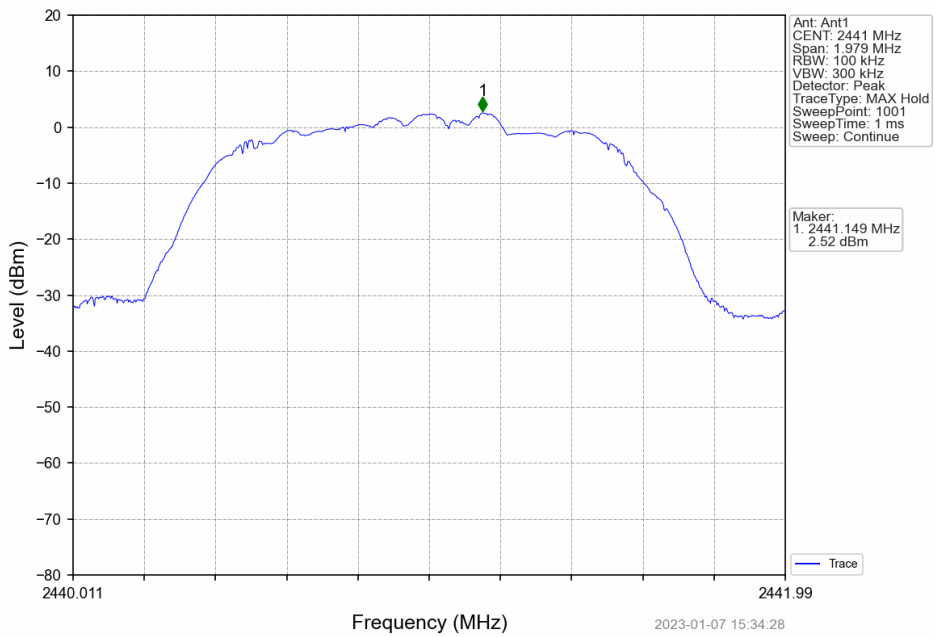

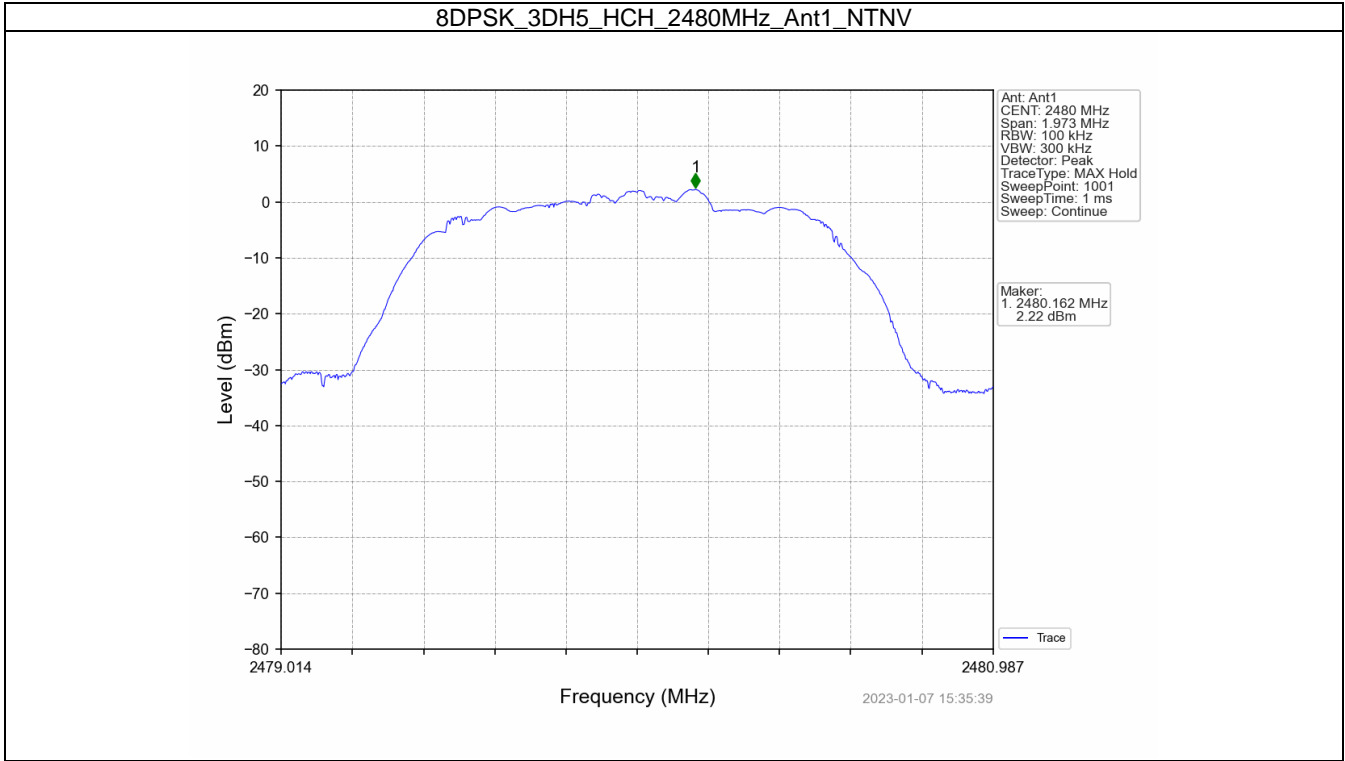



6.2 CSE

6.2.1 Test Result


Mode	TX Type	Frequency (MHz)	Packet Type	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
GFSK	SISO	2402	DH5	1	6.06	-13.94	Pass
		2441	DH5	1	6.06	-13.94	Pass
		2480	DH5	1	6.06	-13.94	Pass
		HOPP	DH5	1	6.06	-13.94	Pass
Pi/4DQPSK	SISO	2402	2DH5	1	3.20	-16.80	Pass
		2441	2DH5	1	3.20	-16.80	Pass
		2480	2DH5	1	3.20	-16.80	Pass
		HOPP	2DH5	1	3.20	-16.80	Pass
8DPSK	SISO	2402	3DH5	1	2.52	-17.48	Pass
		2441	3DH5	1	2.52	-17.48	Pass
		2480	3DH5	1	2.52	-17.48	Pass
		HOPP	3DH5	1	2.52	-17.48	Pass

Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2013, the channel contains the maximum PSD level was used to establish the reference level.


6.2.2 Test Graph

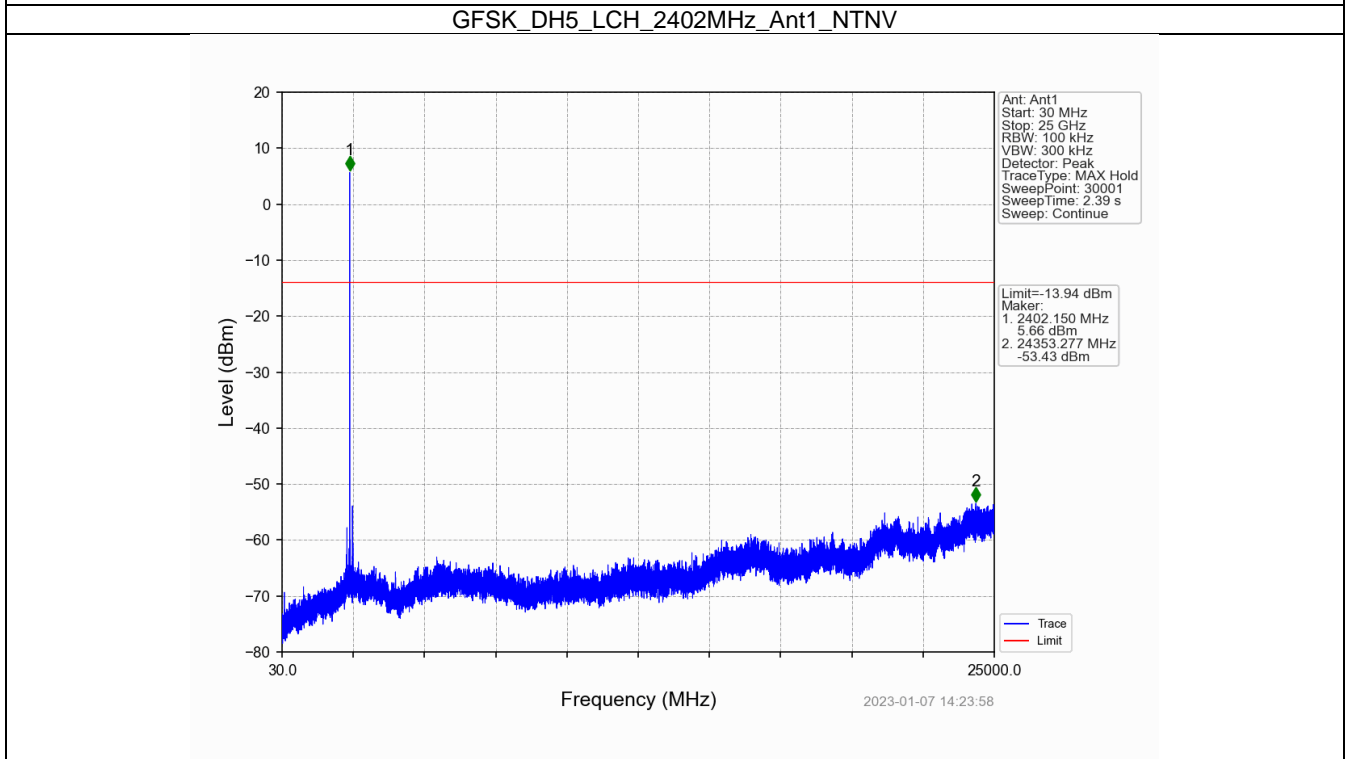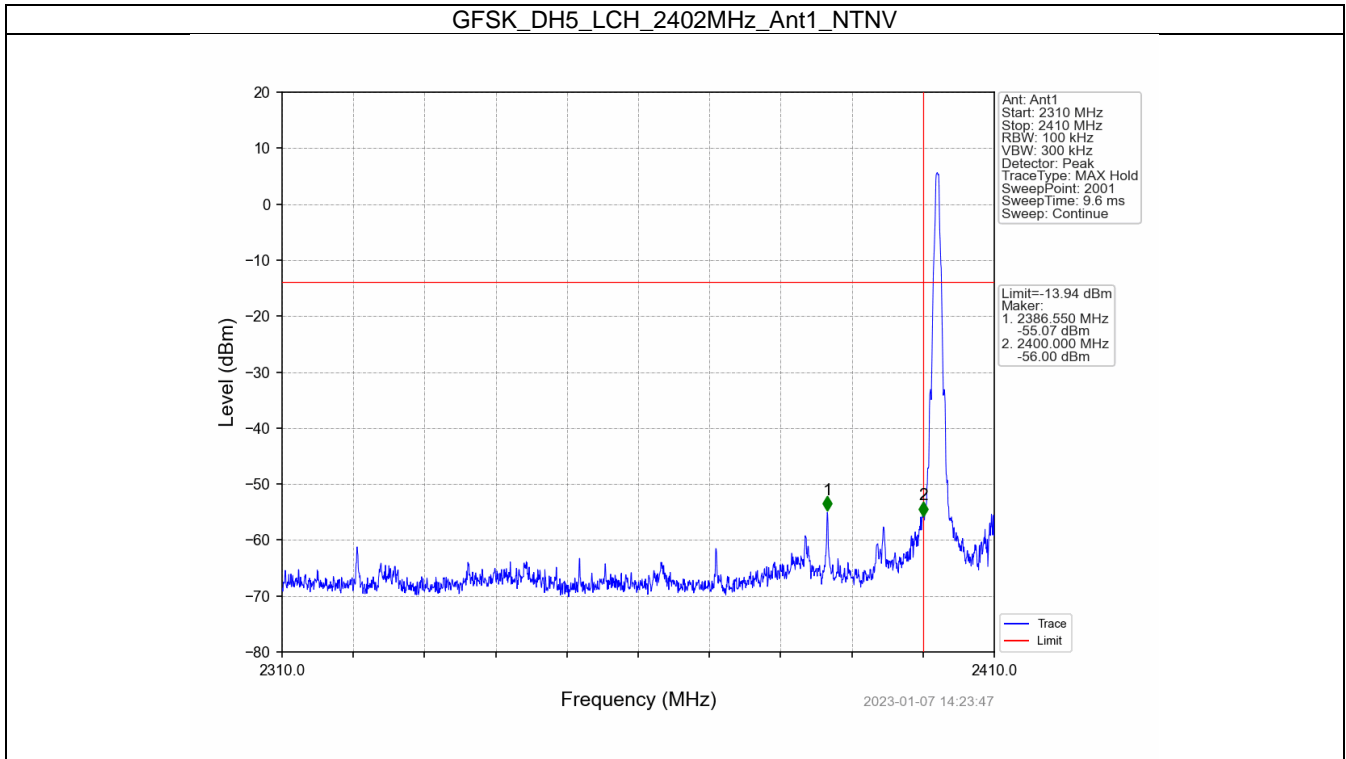


GFSK_DH5_MCH_2441MHz_Ant1_NTNV

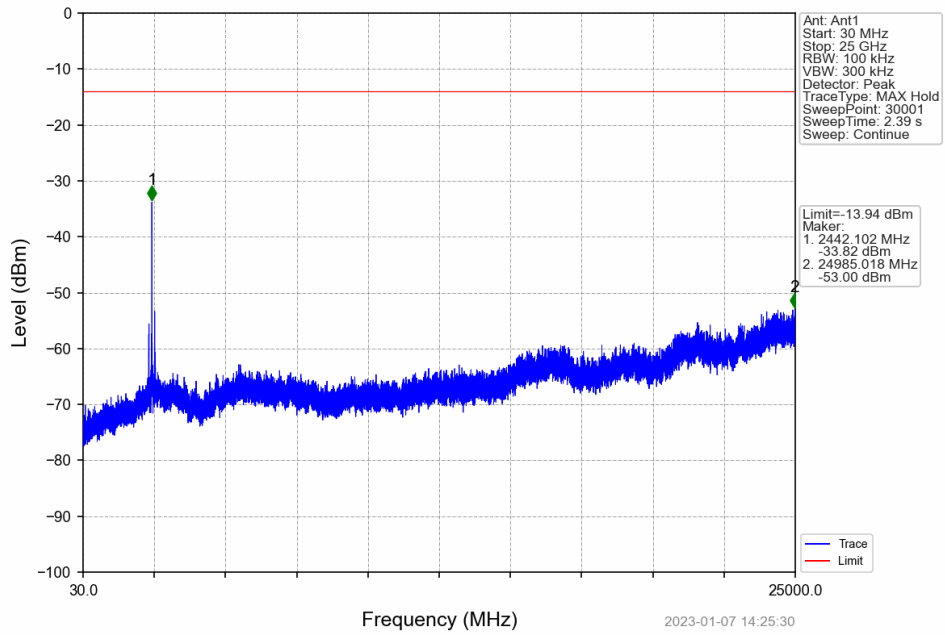


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

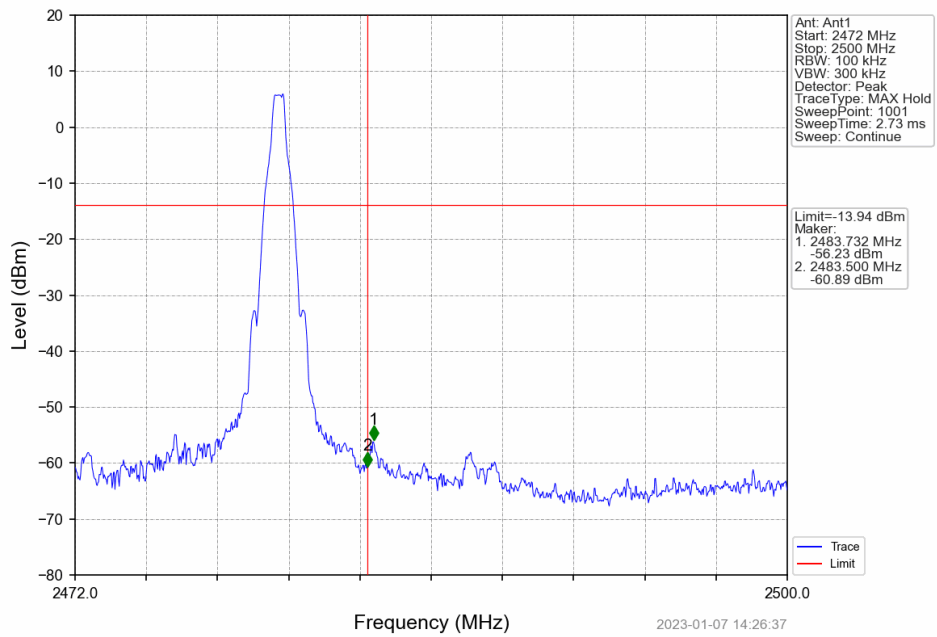


GFSK_DH5_HCH_2480MHz_Ant1_NTNV

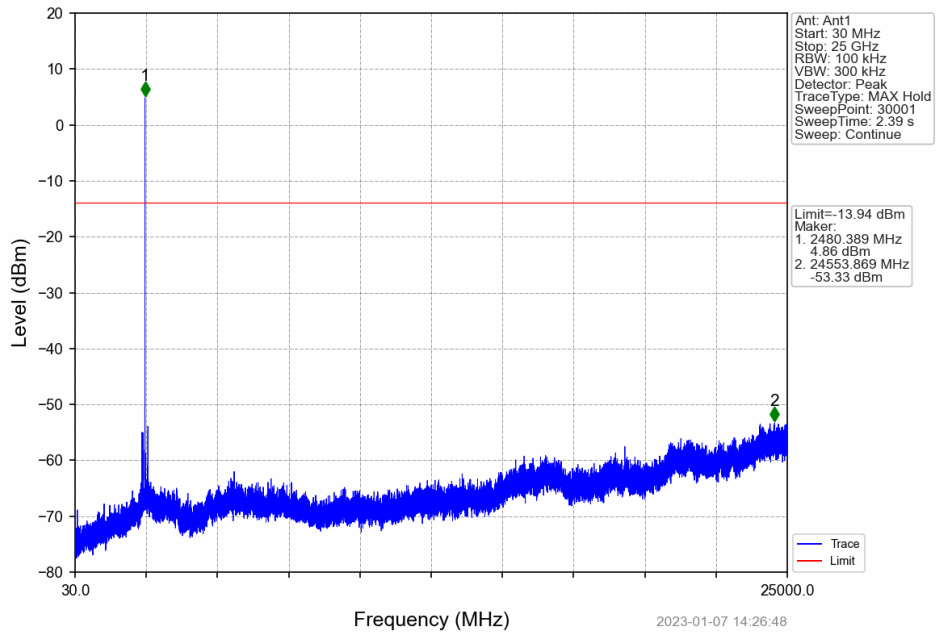


GFSK_DH5_HOPP_Ant1_NTNV

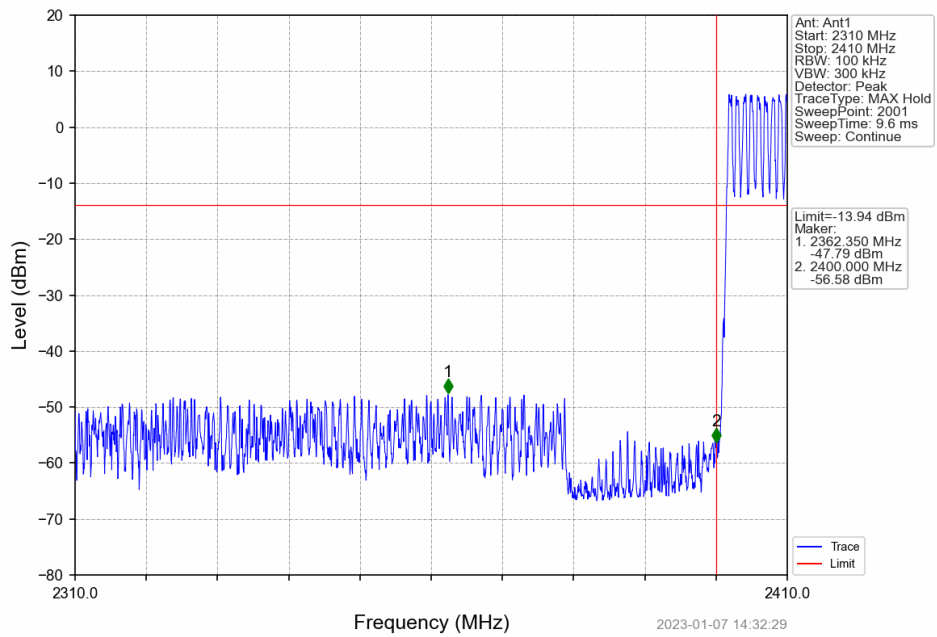


GFSK_DH5_HOPP_Ant1_NTNV

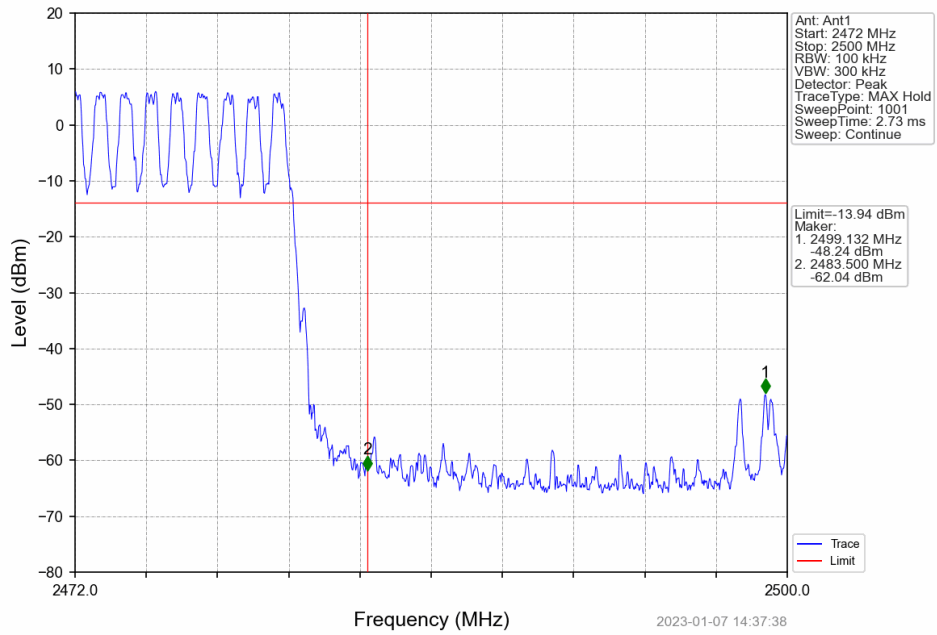


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

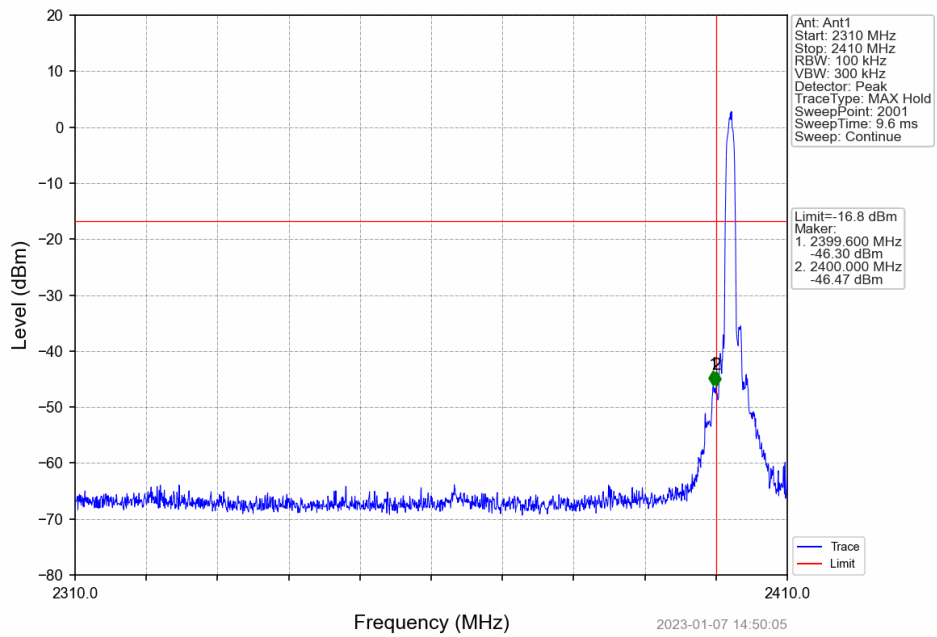


Pi/4DQPSK_2DH5_LCH_2402MHz_Ant1_NTNV

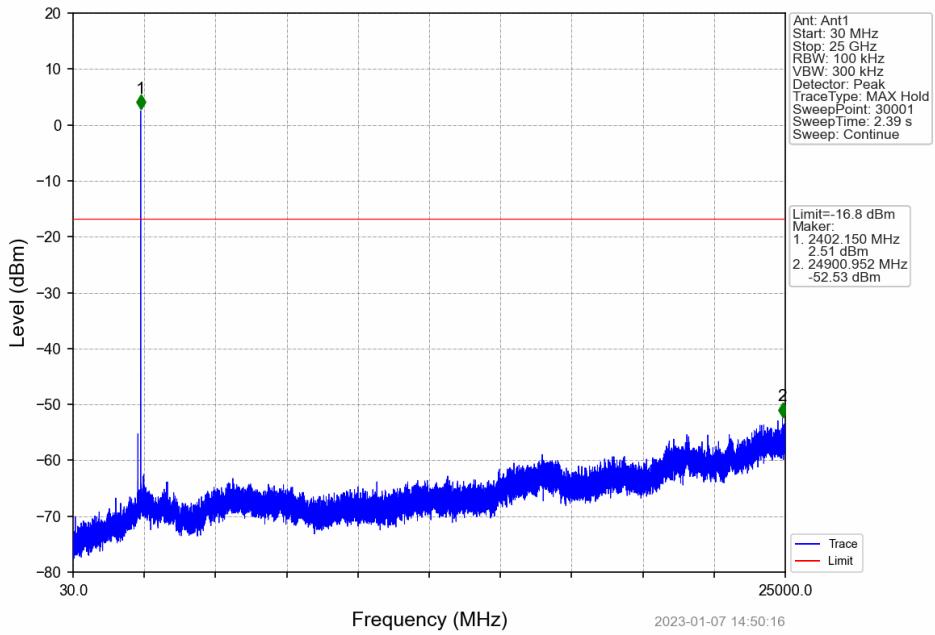


Pi/4DQPSK_2DH5_MCH_2441MHz_Ant1_NTNV

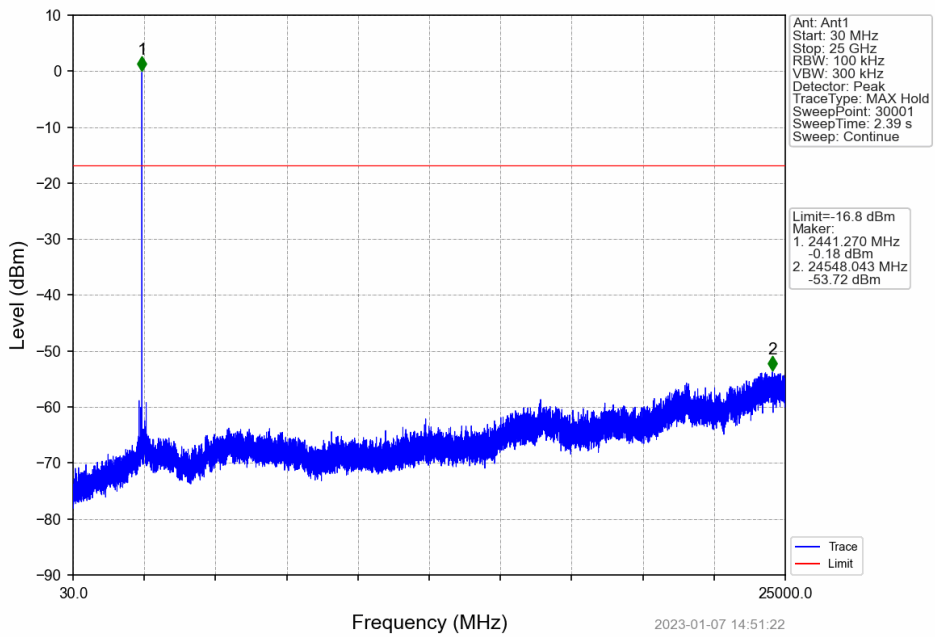


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

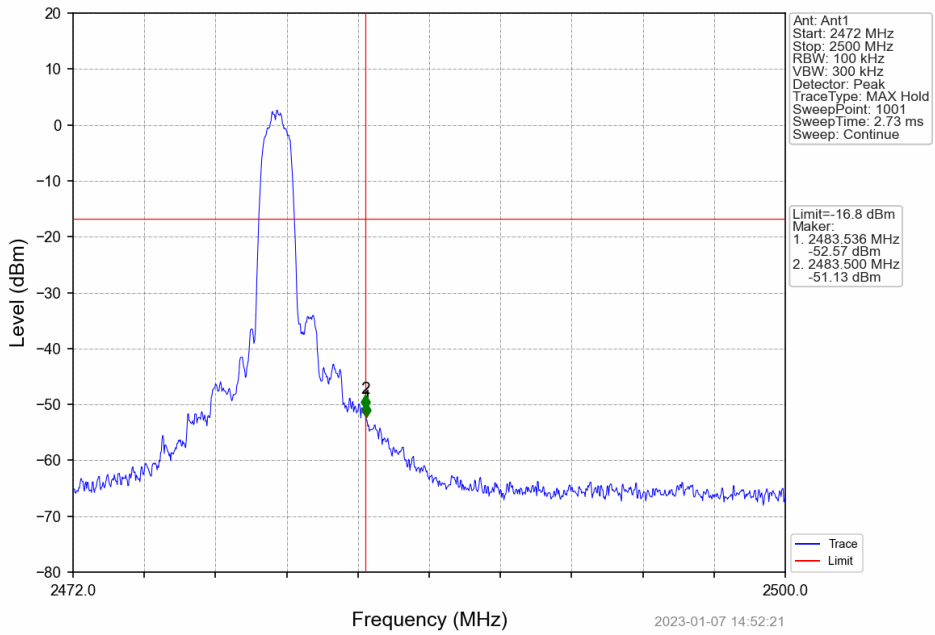


Pi/4DQPSK_2DH5_HCH_2480MHz_Ant1_NTNV

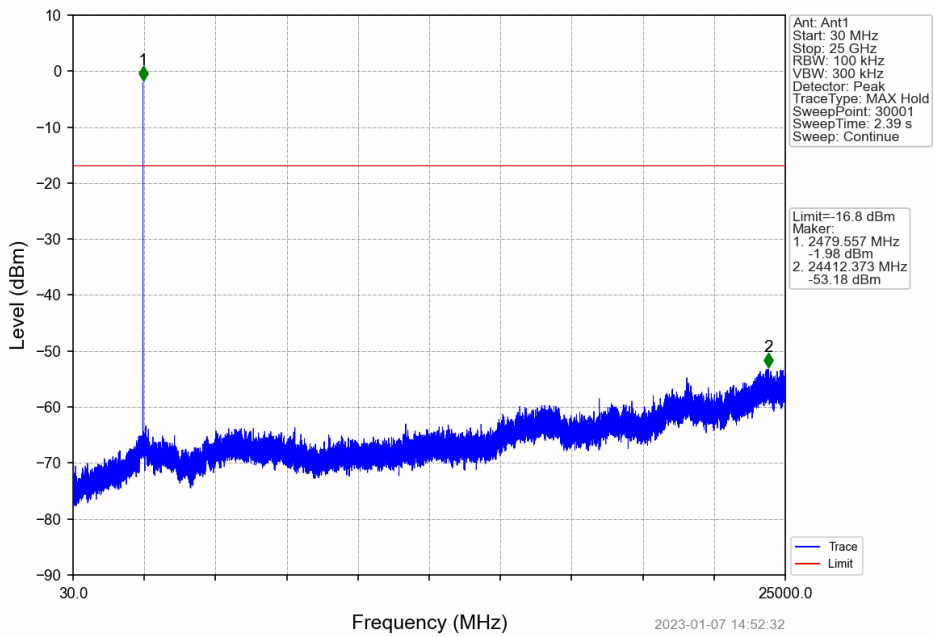


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

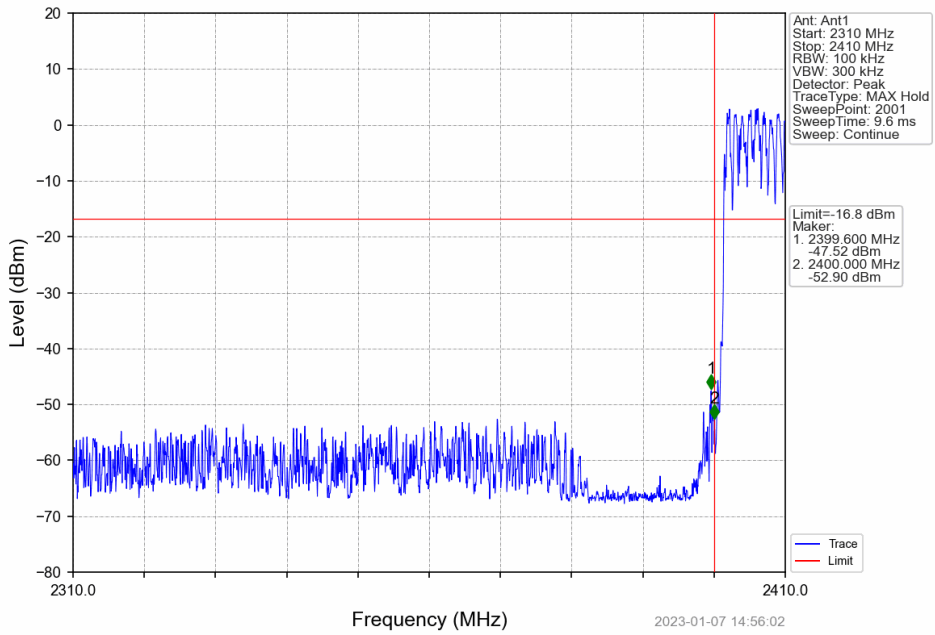


Pi/4DQPSK_2DH5_HOPP_Ant1_NTNV

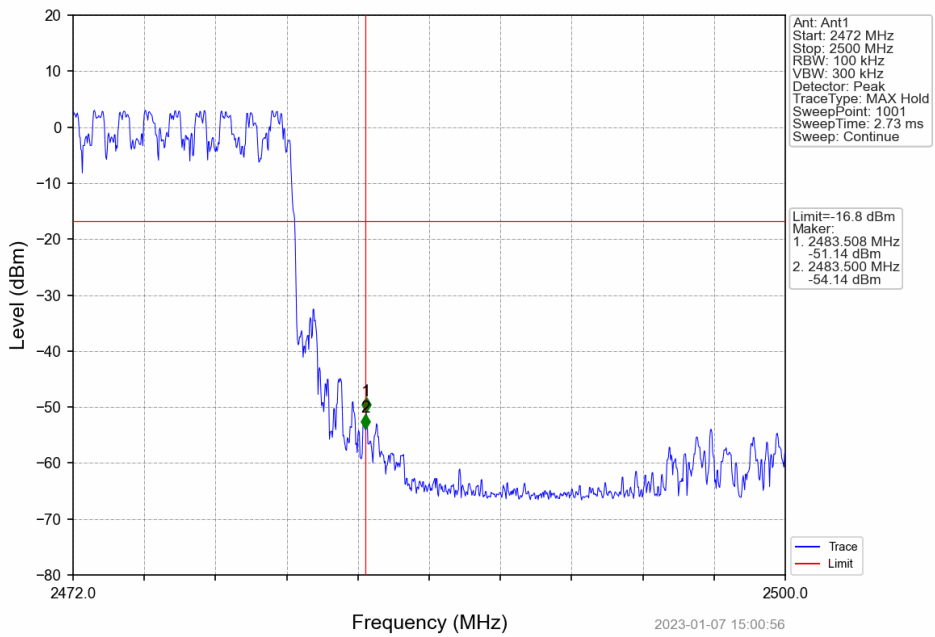


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

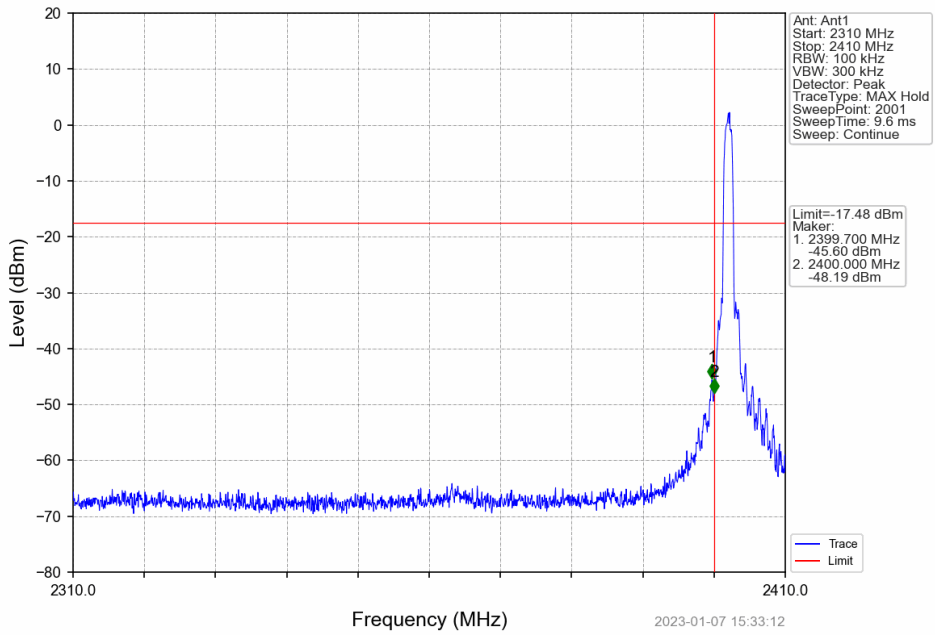


8DPSK_3DH5_LCH_2402MHz_Ant1_NTNV

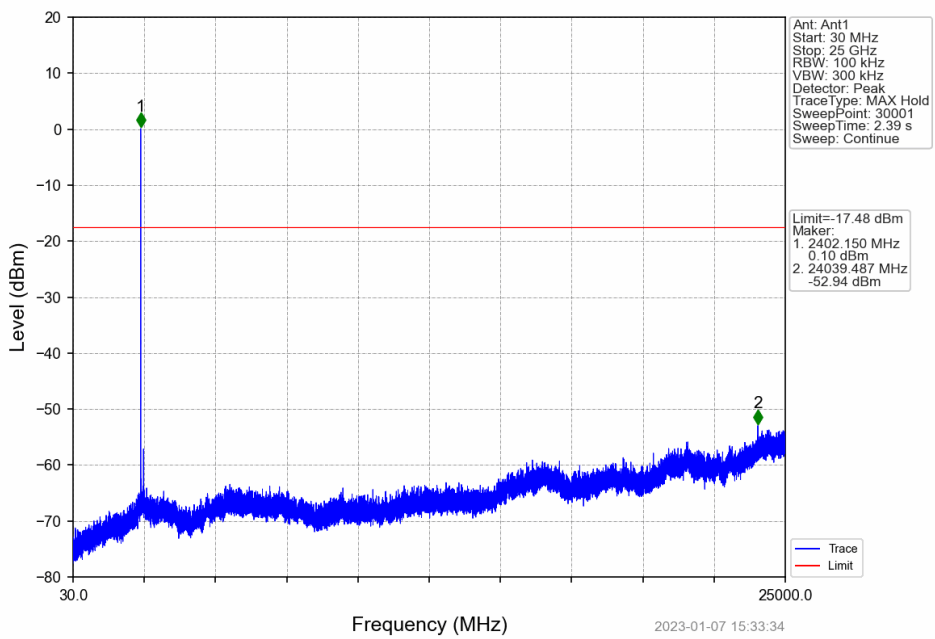


8DPSK_3DH5_MCH_2441MHz_Ant1_NTNV

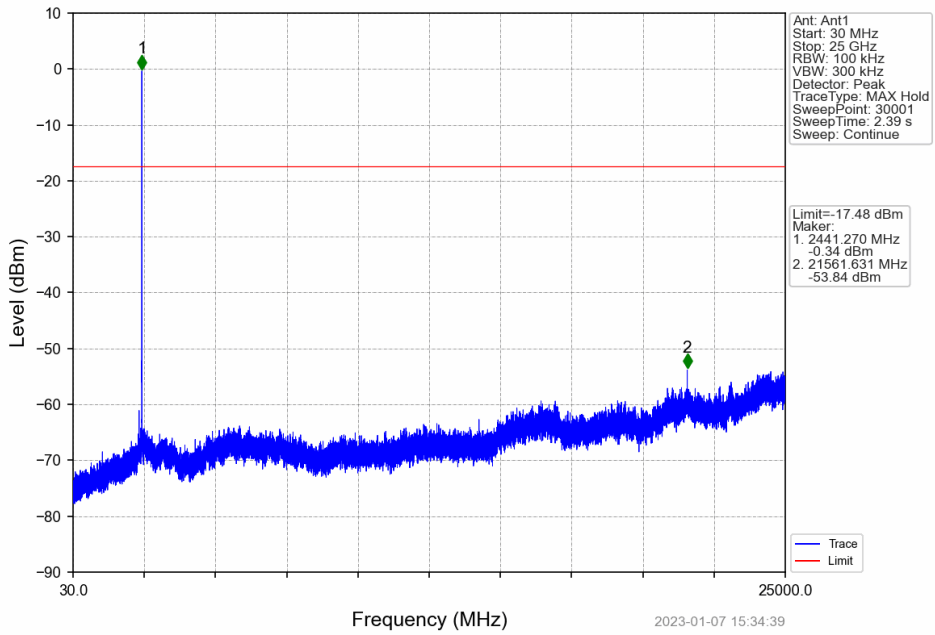

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

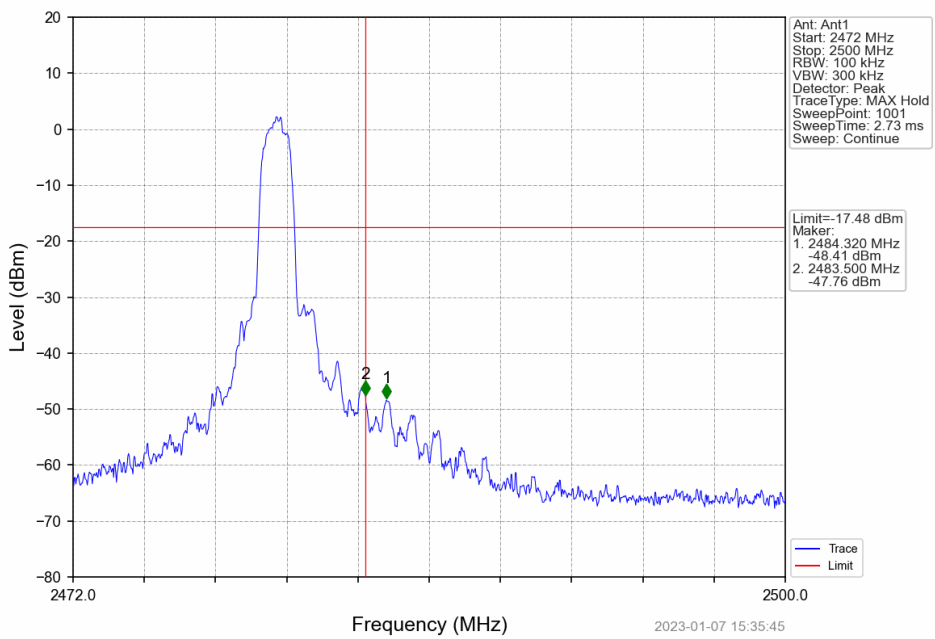

8DPSK_3DH5_HCH_2480MHz_Ant1_NTNV

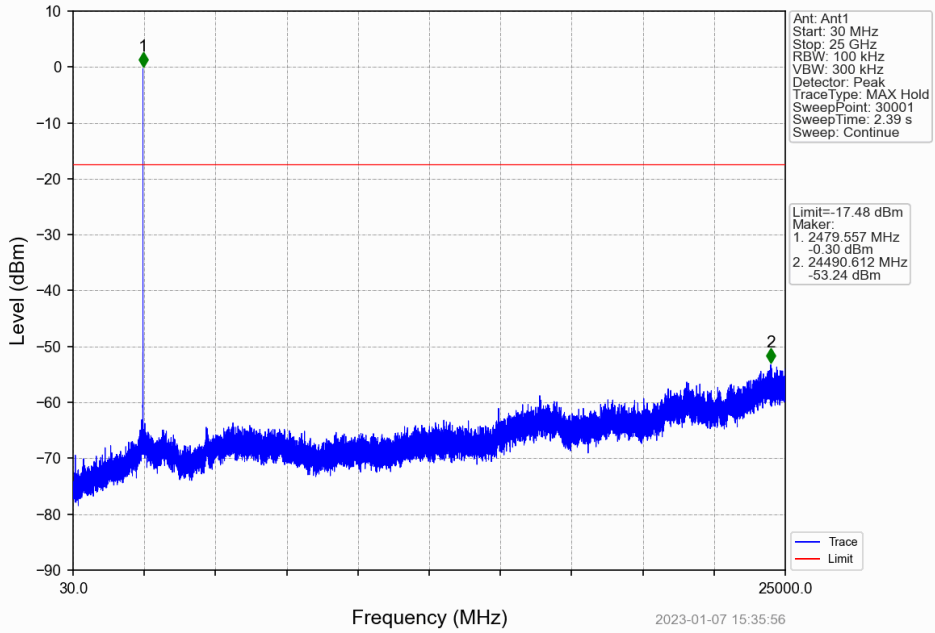

8DPSK_3DH5_HOPP_Ant1_NTNV

