


# 英语



## GAMESIR GALILEO + Wireless Mobile Gaming Controller

[E-manual]  
<https://www.gamesir.hk/pages/manuals-gamesir-g8>

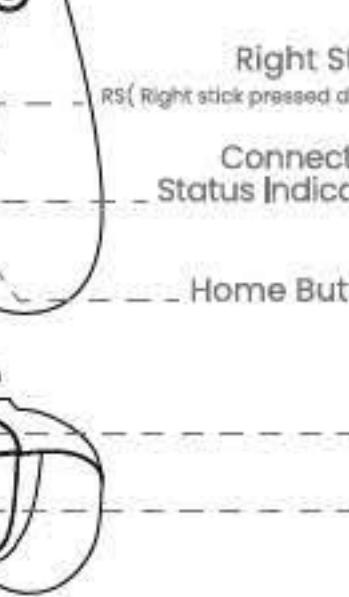

ENGLISH


### PACKAGING CONTENTS

G8+ Controller \*1 Small Thumstick \*1 Heightened Thumstick \*1 Round Thumstick \*1  
1m Type-C Cable \*1 User Manual \*1 Thank You & After-sale Service Card \*1  
Gamesir Sticker \*1 Certification \*1

### COMPATIBILITY

• Android 8.0 or later versions  
• Switch  
• iOS 13 or later versions

### DEVICE LAYOUT

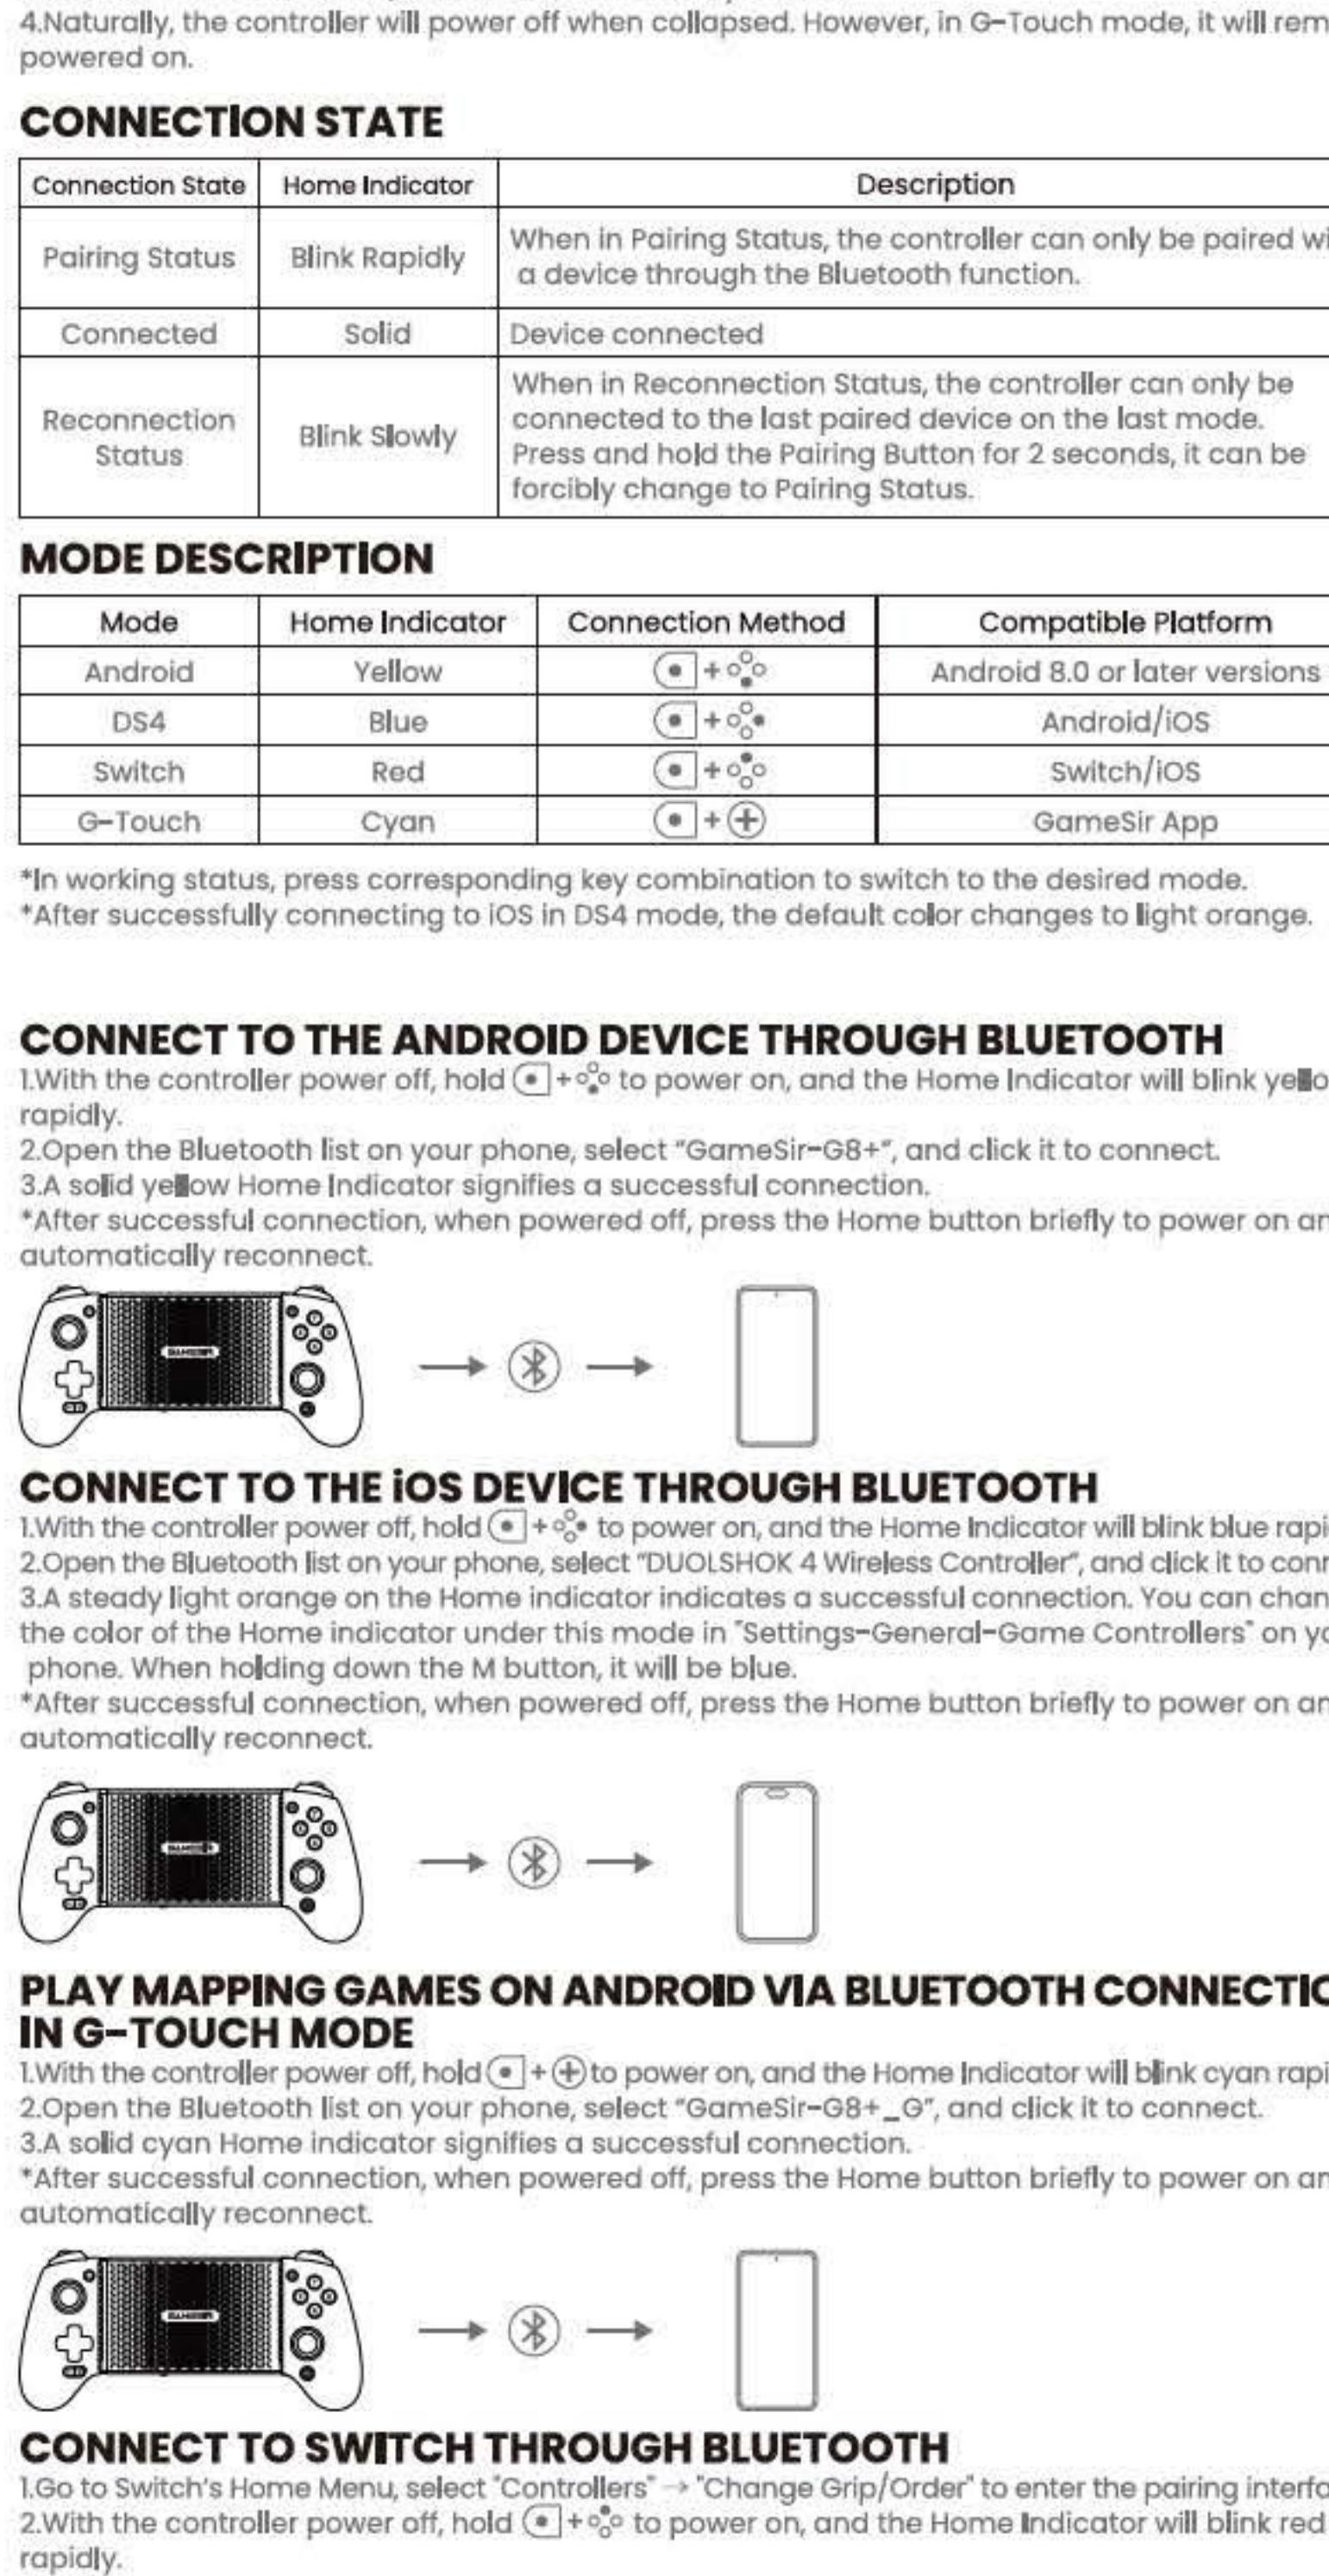

### POWER ON/POWER OFF

1.Hold  $\ominus$  for 1 second to power on.  
2.Hold  $\ominus$  for 5 seconds to power off.  
3.Stretch out the controller, and it will automatically turn on.  
4.Naturally, the controller will power off when collapsed. However, in G-Touch mode, it will remain powered on.

### CONNECTION STATE

Connection State	Home Indicator	Description
Pairing Status	Blink Rapidly	When in Pairing Status, the controller can only be paired with a device through the Bluetooth function.
Connected	Solid	Device connected
Reconnection Status	Blink Slowly	When in Reconnection Status, the controller can only be connected to the last paired device on the last mode. Press and hold the Pairing Button for 2 seconds, it can be forcibly change to Pairing Status.

### MODE DESCRIPTION

Mode	Home Indicator	Connection Method	Compatible Platform
Android	Yellow	( $\ominus$ ) + $\oplus$	Android 8.0 or later versions
DS4	Blue	( $\ominus$ ) + $\oplus$	Android / iOS
Switch	Red	( $\ominus$ ) + $\oplus$	Switch / iOS
G-Touch	Cyan	( $\ominus$ ) + $\oplus$	Gamesir App


\*In working status, press corresponding key combination to switch to the desired mode.

\*After successfully connecting to iOS in DS4 mode, the default color changes to light orange.

### CONNECT TO THE ANDROID DEVICE THROUGH BLUETOOTH

1.With the controller power off, hold  $\ominus$  +  $\oplus$  to power on, and the Home Indicator will blink yellow rapidly.  
2.Open the Bluetooth list on your phone, select "GameSir-G8+", and click it to connect.  
3.A solid yellow Home Indicator signifies a successful connection.


\*After successful connection, when powered off, press the Home button briefly to power on and automatically reconnect.

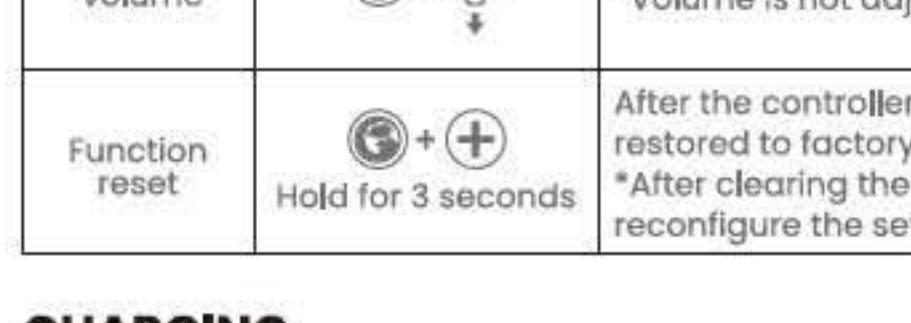

### CONNECT TO THE iOS DEVICE THROUGH BLUETOOTH

1.With the controller power off, hold  $\ominus$  +  $\oplus$  to power on, and the Home Indicator will blink blue rapidly.  
2.Open the Bluetooth list on your phone, select "GameSir-G8+", and click it to connect.  
3.A solid cyan Home indicator signifies a successful connection.


\*After successful connection, when powered off, press the Home button briefly to power on and automatically reconnect.

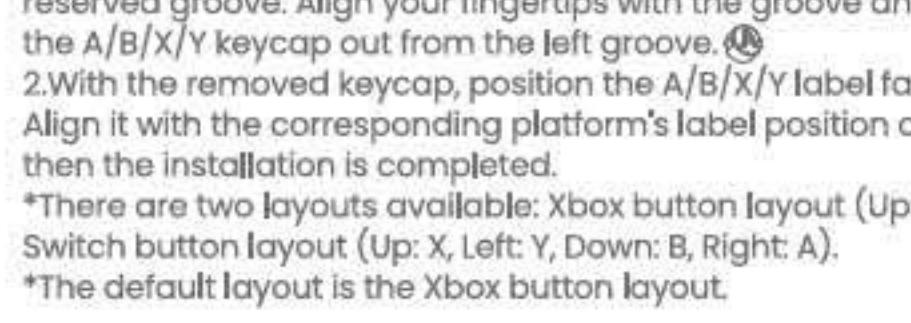

### PLAY MAPPING GAMES ON ANDROID VIA BLUETOOTH CONNECTION IN G-TOUCH MODE

1.With the controller power off, hold  $\ominus$  +  $\oplus$  to power on, and the Home Indicator will blink cyan rapidly.  
2.Open the Bluetooth list on your phone, select "GameSir-G8+", and click it to connect.  
3.A solid cyan Home indicator signifies a successful connection.

\*After successful connection, when powered off, press the Home button briefly to power on and automatically reconnect.

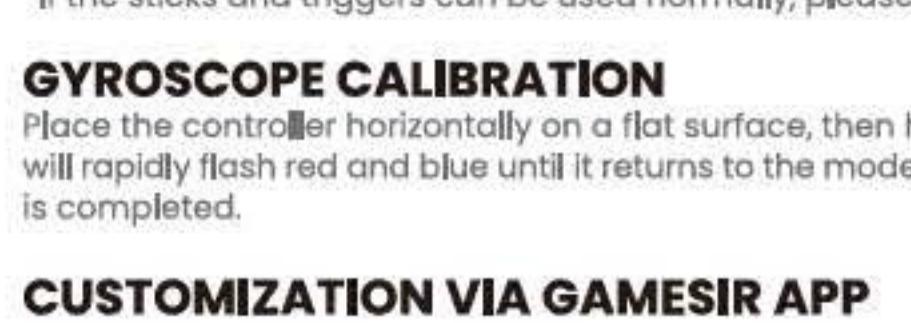


### CONNECT TO SWITCH THROUGH BLUETOOTH

1.Go to Switch's Home Menu, select "Controllers" → "Change Grip/Order" to enter the pairing interface.  
2.With the controller power off, hold  $\ominus$  +  $\oplus$  to power on, and the Home Indicator will blink red rapidly.

3.A solid red Home Indicator signifies a successful connection.

\*After successful connection, when powered off, press the Home button briefly to power on and automatically reconnect.

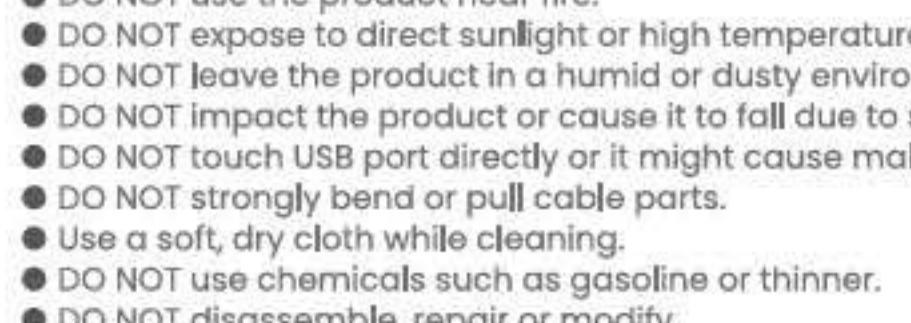


### CONNECT TO A DEVICE THROUGH WIRED CONNECTION

1.Use the provided Type-C cable to complete the connection and it will automatically recognize the device directly.  
2.After connecting to the device, the controller will automatically switch to the corresponding mode, then it can be used normally. Press and hold  $\ominus$  +  $\oplus$ , the controller will change between Xbox/Switch/DS4 mode in consequence.

\*For Switch device: After connecting to the Switch with cable, please open the "Settings-Controllers & Sensors-Pro Controller wired communication".

\*Supported in Receiver and Wired mode only.

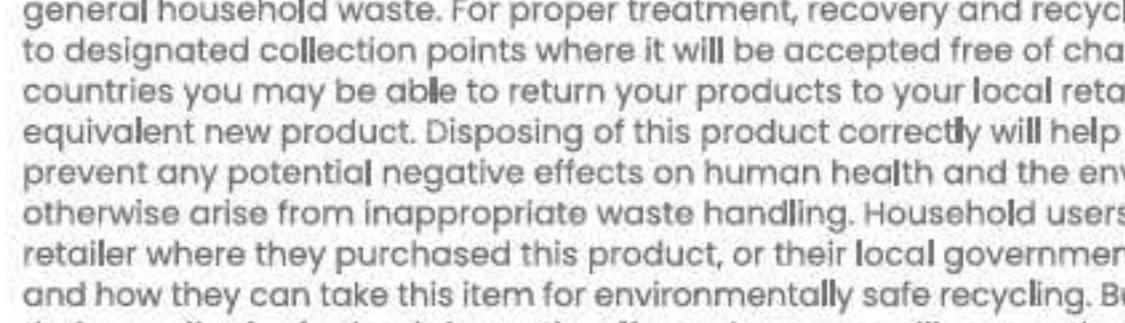

### BACK BUTTON SETTING



(The mappable buttons are: A/B/X/Y/LB/RB/LT/RT/LS/RS/D-pad/-/+)

1.Set the L4/R4 button value: Hold the M+L4/R4 buttons simultaneously until the Mode/Home Indicator blinks white slowly. Then press the button (a single button or key combo) you want to map, then press the L4/R4 button. When the Mode/Home Indicator return to the corresponding mode light, the L4/R4 button value is set. In the key combi setting, the interval time for each button will be triggered according to the operation time set during programming.

2.Cancel the L4/R4 button value: Hold the M+L4/R4 buttons simultaneously until the Mode/Home Indicator blinks white slowly, then press the L4/R4 button. When the Mode Indicator return to the corresponding mode light, the L4/R4 button value is canceled.

\*It can be set to trigger a single key or multiple buttons for L4/R4 (up to a maximum of 16 button values triggered).

\*After 10 seconds of inactivity when setting, the controller will automatically exit the setting mode and the operation will not be saved.

### TURBO FUNCTION SETTING

(Programmable button: A/B/X/Y/LB/RS/LT/RT button).

Four-speed adjustment: Slow gear with 8Hz, Medium gear with 12Hz, Fast gear with 20Hz. Off.

1.Set the Turbo Function: Hold the M button + the desired button. When the Home Indicator flashes, it indicates a successful activation. Repeat the operation to cycle through the gears.

2.Clear Turbo Function: Double-click the M button to clear all Turbo setting. The Home light flashes green twice to indicate a successful operation.

\*If the sticks and triggers can be used normally, please do not calibrate.

### GYROSCOPE CALIBRATION


Place the controller horizontally on a flat surface, then hold  $\ominus$  +  $\oplus$  buttons. The Home Indicator will rapidly flash red and blue until it returns to the mode indication, indicating that the calibration is completed.

### CUSTOMIZATION VIA GAMESIR APP

Download GameSir App at [gamesir.hk](http://gamesir.hk) on phone or scan the QR code on the right. Use GameSir App for firmware upgrade, stick & trigger zones adjustment, vibration intensity adjustment, button testing, etc.

ENGLISH

# 日本語

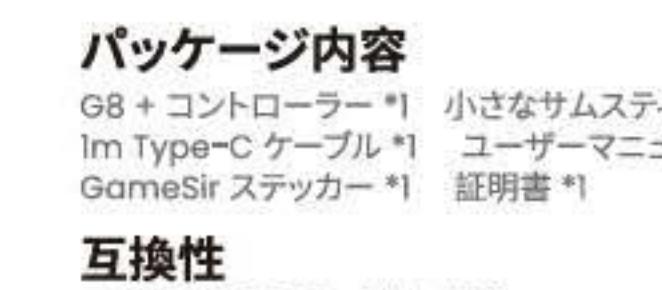

## GAMESIR GALILEO + Wireless Mobile Gaming Controller

[電子マニュアル]  
<https://www.gamesir.hk/pages/manuals-gamesir-g8>

日本語



### パッケージ内容

G8+ コントローラー \*1 小さなサムスティック \*1 高くなったサムスティック \*1 丸いサムスティック \*1  
1m Type-C ケーブル \*1 ユーザーマニュアル \*1 感謝および販売後のサービスに関するカード \*1  
Gamesir ステッカー \*1 証明書 \*1

### 互換性

• Android 8.0 バージョン以降  
• Switch  
• iOS 13 バージョン以降

### デバイスのレイアウト



### 電源オン/電源オフ

1.ホット  $\ominus$  を長押しして電源をオンにします。  
2.5秒間  $\ominus$  を長押しして電源をオフにします。  
3.コントローラーを広げると、自動的にオンになります。  
4.折りたむと、コントローラーの電源はオフになります。ただし、G-Touchモードでは、電源はオフのまま維持されます。

### 接続状態

接続状態	ホームインジケーター	説明
ペアリング状態	ゆっくりな点滅	ペアリング状態にある時、コントローラーはBluetooth機能を通してのみデバイスとペアリングすることができます。
接続済み	点灯	設備は接続されています。
再接続状態	速い点滅	再接続状態にある時、コントローラーは最後のモードで最後にペアリングした際のペアリングとのみ接続できます。 Mボタンを長押しすると、青になります。 Mボタンを長押しすると、青になります。

### モード説明

モード	ホームインジケーター	接続方法	互換性ありのプラットフォーム
Android	黄	( $\ominus$ ) + $\oplus$	Android 8.0 バージョン以降
DS4	青	( $\ominus$ ) + $\oplus$	Android / iOS
Switch	赤	( $\ominus$ ) + $\oplus$	Switch / iOS
G-Touch	青緑	( $\ominus$ ) + $\oplus$	GameSir アプリ

\*動作している状態で、該当するキーの組み合わせを押し、好きなモードに切替えてください。

\*DS4 モードで iOS に接続できたら、デフォルトの色が薄いオレンジに変わります。


### ANDROID デバイスを BLUETOOTH を通して接続

1.コントローラーが電源オフの状態で、 $\ominus$  +  $\oplus$  を長押しして電源をオンにすると、ホームインジケーターが素早く青色に点滅します。

2.電話のBluetoothリストを開き、「GameSir-G8+」を選択して、クリックして接続します。

3.ホームインジケーターが青色に点灯することによって、接続に成功したことが示されます。

\*接続が成功した後は、電源をオフにした時に軽くホームボタンを押し、電源をオンにすると、自動的に再接続します。

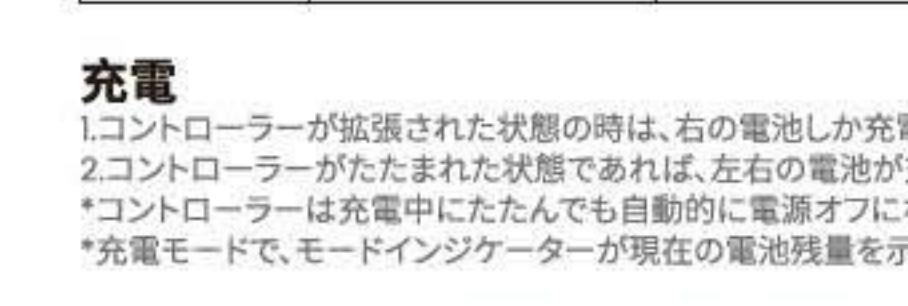


### iOS デバイスを BLUETOOTH を通して接続

1.コントローラーが電源オフの状態で、 $\ominus$  +  $\oplus$  を長押しして電源をオンにすると、ホームインジケーターが素早く青色に点滅します。

2.電話のBluetoothリストを開き、「GameSir-G8+」を選択して、クリックして接続します。

3.ホームインジケーターが青緑色に点灯することによって、接続に成功したことが示されます。

\*接続が成功した後は、電源をオフにした時に軽くホームボタンを押し、電源をオンにすると、自動的に再接続します。

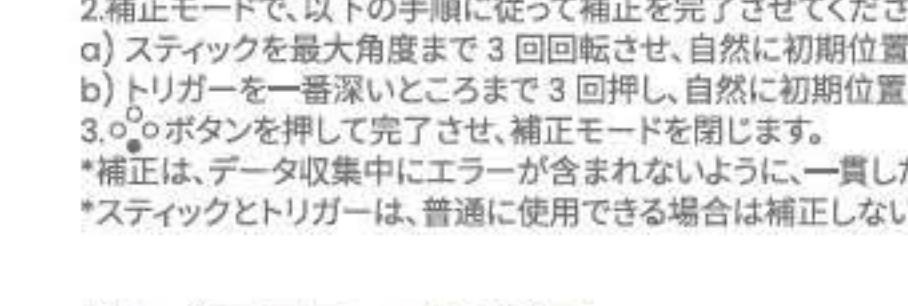

### BLUETOOTH で接続された ANDROID で G-TOUCH モードでマッピング


ゲームプレイ

1.コントローラーが電源オフの状態で、 $\ominus$  +  $\oplus$  を長押しして電源をオンにすると、ホームインジケーターが素早く青色に点滅します。

2.電話のBluetoothリストを開き、「GameSir-G8+」を選択して、クリックして接続します。

3.ホームインジケーターが青緑色に点灯することによって、接続に成功したことが示されます。

\*接続が成功した後は、電源をオフにした時に軽くホームボタンを押し、電源をオンにすると、自動的に再接続します。

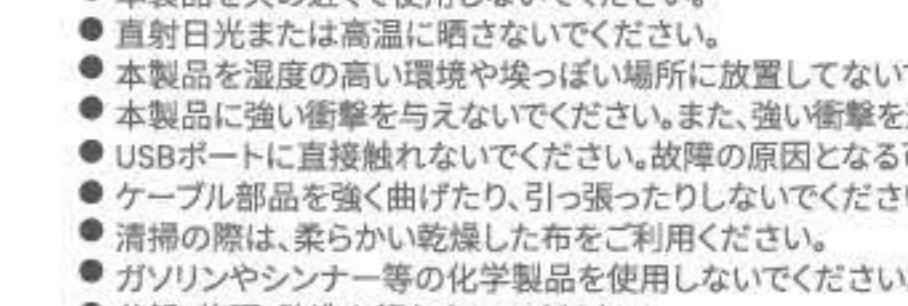

### BLUETOOTH を通して SWITCH に接続する

&lt;p

IC Caution.

CAN RSS-Gen/CNR-Gen.

English: This device complies with Industry Canada licence-exempt RSSs standard(s). Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including

interference that may cause undesired operation of the device.

- French: Ce pr é sent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.

L'exploitation est autoris e aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur

de l'appareil doit accepter tout brouillage radioélectrique subi, m e mes le brouillage est susceptible

d'en compromettre le

fonctionnement.

RF warning for Portable device.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable

exposure condition without restriction.

According to § 15.247(e)(i) and § 1.1307(b)(1), systems operating under the provisions of this section shall

be operated in a manner that assures that the public is not exposed to radio frequency energy level in excess

of the Commission's guidelines.

According to KDB-447498 (2)(a)(i)