

Antenna

YCIS003AA Datasheet

Antenna Services

Version: 1.1

Date: 2022-09-20

Status: Released



At Quectel, our aim is to provide timely and comprehensive services to our customers. If you require any assistance, please contact our headquarters:

Quectel Wireless Solutions Co., Ltd.

Building 5, Shanghai Business Park Phase III (Area B), No.1016 Tianlin Road, Minhang District, Shanghai 200233, China

Tel: +86 21 5108 6236

Email: info@quectel.com

Or our local offices. For more information, please visit:

<http://www.quectel.com/support/sales.htm>.

For technical support, or to report documentation errors, please visit:

<http://www.quectel.com/support/technical.htm>.

Or email us at: support@quectel.com.

Legal Notices

We offer information as a service to you. The provided information is based on your requirements and we make every effort to ensure its quality. You agree that you are responsible for using independent analysis and evaluation in designing intended products, and we provide reference designs for illustrative purposes only. Before using any hardware, software or service guided by this document, please read this notice carefully. Even though we employ commercially reasonable efforts to provide the best possible experience, you hereby acknowledge and agree that this document and related services hereunder are provided to you on an "as available" basis. We may revise or restate this document from time to time at our sole discretion without any prior notice to you.

Use and Disclosure Restrictions

License Agreements

Documents and information provided by us shall be kept confidential, unless specific permission is granted. They shall not be accessed or used for any purpose except as expressly provided herein.

Copyright

Our and third-party products hereunder may contain copyrighted material. Such copyrighted material shall not be copied, reproduced, distributed, merged, published, translated, or modified without prior written consent. We and the third party have exclusive rights over copyrighted material. No license shall be granted or conveyed under any patents, copyrights, trademarks, or service mark rights. To avoid ambiguities, purchasing in any form cannot be deemed as granting a license other than the normal non-exclusive, royalty-free license to use the material. We reserve the right to take legal action for noncompliance with abovementioned requirements, unauthorized use, or other illegal or malicious use of the material.

Trademarks

Except as otherwise set forth herein, nothing in this document shall be construed as conferring any rights to use any trademark, trade name or name, abbreviation, or counterfeit product thereof owned by Quectel or any third party in advertising, publicity, or other aspects.

Third-Party Rights

This document may refer to hardware, software and/or documentation owned by one or more third parties ("third-party materials"). Use of such third-party materials shall be governed by all restrictions and obligations applicable thereto.

We make no warranty or representation, either express or implied, regarding the third-party materials, including but not limited to any implied or statutory, warranties of merchantability or fitness for a particular purpose, quiet enjoyment, system integration, information accuracy, and non-infringement of any third-party intellectual property rights with regard to the licensed technology or use thereof. Nothing herein constitutes a representation or warranty by us to either develop, enhance, modify, distribute, market, sell, offer for sale, or otherwise maintain production of any our products or any other hardware, software, device, tool, information, or product. We moreover disclaim any and all warranties arising from the course of dealing or usage of trade.

Privacy Policy

To implement module functionality, certain device data are uploaded to Quectel's or third-party's servers, including carriers, chipset suppliers or customer-designated servers. Quectel, strictly abiding by the relevant laws and regulations, shall retain, use, disclose or otherwise process relevant data for the purpose of performing the service only or as permitted by applicable laws. Before data interaction with third parties, please be informed of their privacy and data security policy.

Disclaimer

- a) We acknowledge no liability for any injury or damage arising from the reliance upon the information.
- b) We shall bear no liability resulting from any inaccuracies or omissions, or from the use of the information contained herein.
- c) While we have made every effort to ensure that the functions and features under development are free from errors, it is possible that they could contain errors, inaccuracies, and omissions. Unless otherwise provided by valid agreement, we make no warranties of any kind, either implied or express, and exclude all liability for any loss or damage suffered in connection with the use of features and functions under development, to the maximum extent permitted by law, regardless of whether such loss or damage may have been foreseeable.
- d) We are not responsible for the accessibility, safety, accuracy, availability, legality, or completeness of information, advertising, commercial offers, products, services, and materials on third-party websites and third-party resources.

Copyright © Quectel Wireless Solutions Co., Ltd. 2022. All rights reserved.

About the Document

Revision History

Version	Date	Author	Note
-	2022-05-21	Junsen LI/ Joye WANG	Creation of the document
1.0	2022-05-21	Junsen LI/ Joye WANG	First official release
1.1	2022-09-20	Junsen LI	Added Chapter 6.

Contents

About the Document	3
Contents	4
1 Product Description	5
2 Product Features	5
3 Product Specifications	6
4 Overall Performance	7
4.1. Test Environment	7
4.2. VSWR	8
4.3. Efficiency	9
4.4. Gain	10
4.5. Radiation Pattern	11
5 PCB Footprint Recommendation	13
6 Frequency Tuning and Matching Circuit	14
7 Product Size	15
8 Packing Details	16
8.1. Reel Drawing (Unit: mm)	17
8.2. Carton Size (Unit: mm)	17
8.4. Process of Packing	18
9 Soldering Conditions	21

1 Product Description

The antenna is designed for superior performance, and can be widely used for wireless applications.

We provide comprehensive antenna design support such as simulation, testing and manufacturing for custom antenna solutions to meet your specific application needs.

2 Product Features

- ISM 915 MHz
- High efficiency
- AEC-Q200 compliant
- Low profile, compact size
- Excellent performance



3 Product Specifications

Passive Electrical Specifications

Frequency Range	902–928 MHz
Input Impedence	50 Ω
VSWR	≤ 2.0
Gain	≤ 0.9 dBi
Polarization Type	Linear

Mechanical Specifications

Antenna Size (mm)	10 × 3.2 × 0.5
Materia	Ceramic
Cable Type	NA
Connector	NA
Antenna Color	Green
Weight	Typ. 0.052 g
Mounting Type	SMD
Working Temperature	-40 °C to +85 °C


4 Overall Performance

4.1. Test Environment

- KEYSIGHT ENA Network Analyzer E5063A 100 kHz – 8.5 GHz
- RayZone® 2800 Chamber 5G (FR1) SISO/MIMO, 600 MHz – 8.5 GHz




4.2. VSWR

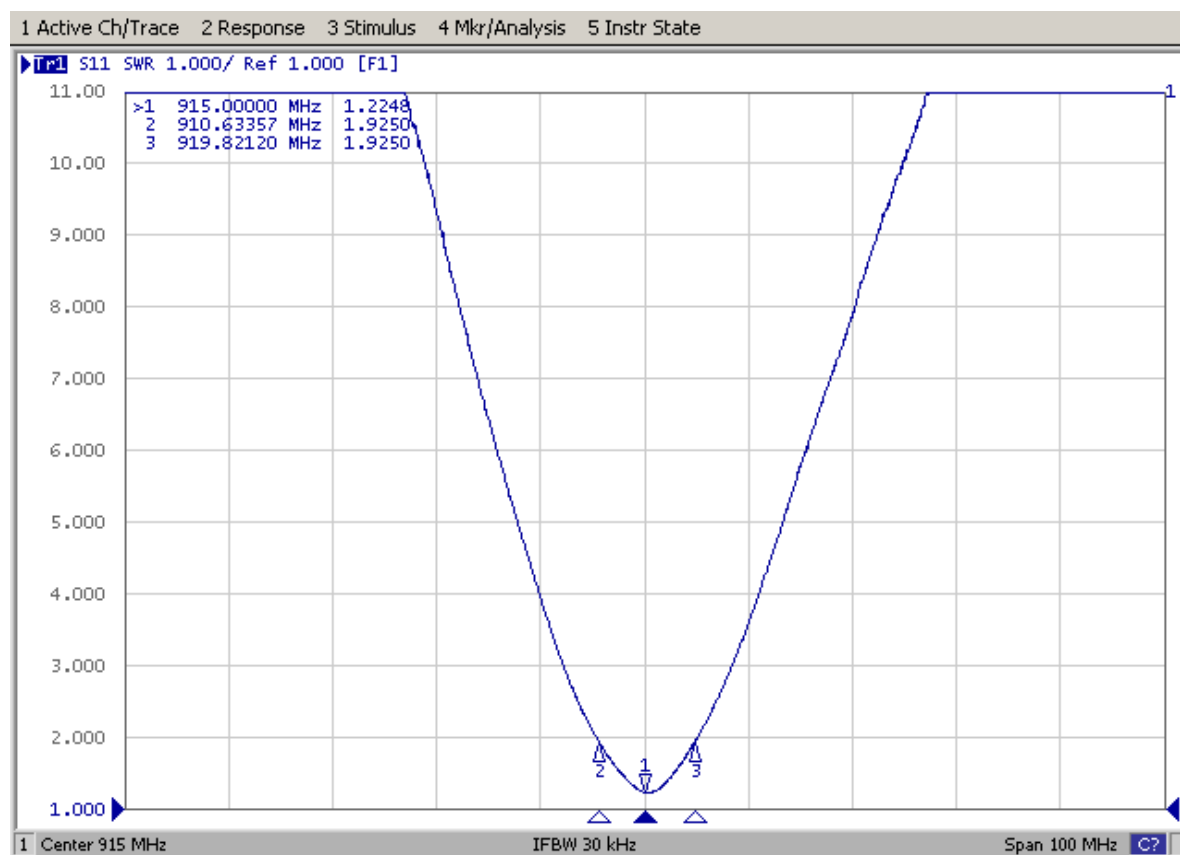

Frequency (MHz)	915
VSWR	1.22

4.3. Efficiency

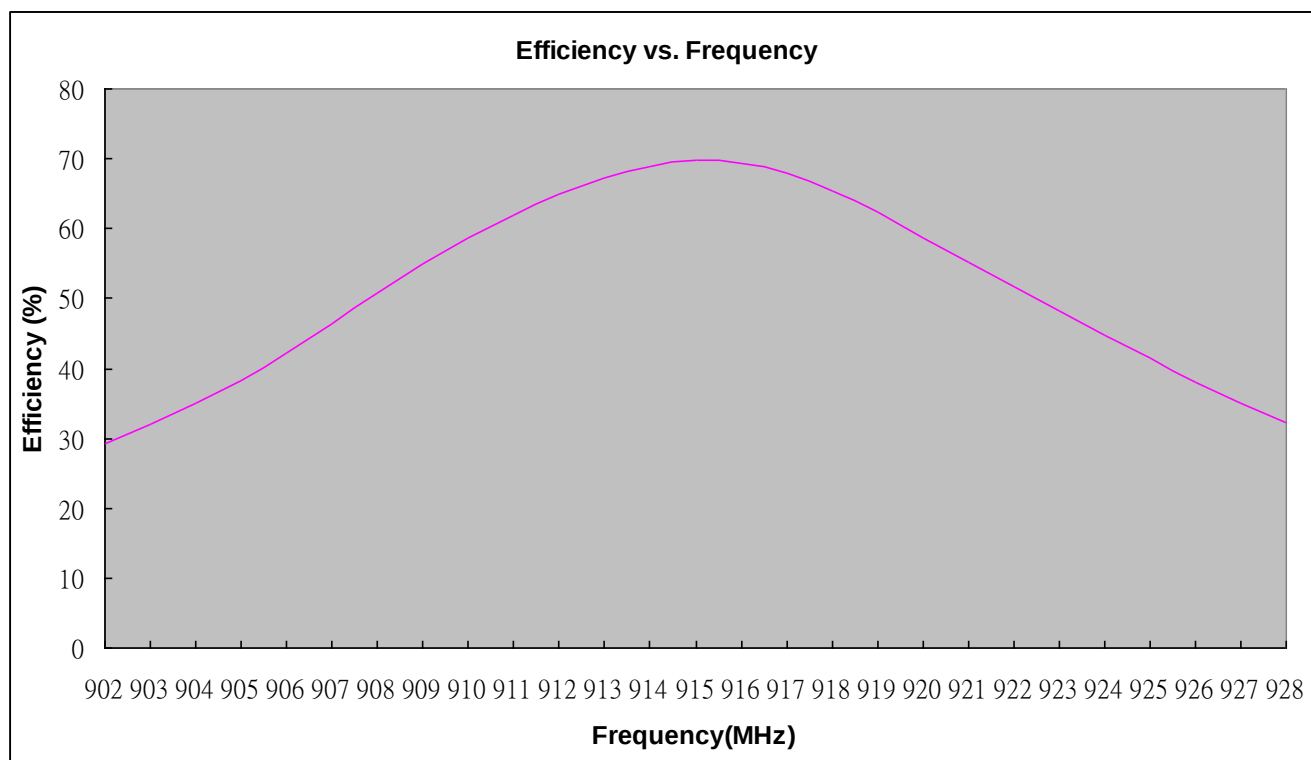


Frequency (MHz)	902	903	904	905	906	907	908	909	910	911
Efficiency (%)	29.29	31.93	34.91	38.31	42.22	46.45	50.71	54.87	58.73	61.95

Frequency (MHz)	912	913	914	915	916	917	918	919	920	921
Efficiency (%)	65.04	67.18	68.94	69.78	69.33	67.94	65.48	62.29	58.73	55.18

Frequency (MHz)	922	923	924	925	926	927	928
Efficiency (%)	51.79	48.33	44.85	41.5	38.08	34.98	32.21

4.4. Gain

Gain vs. Frequency

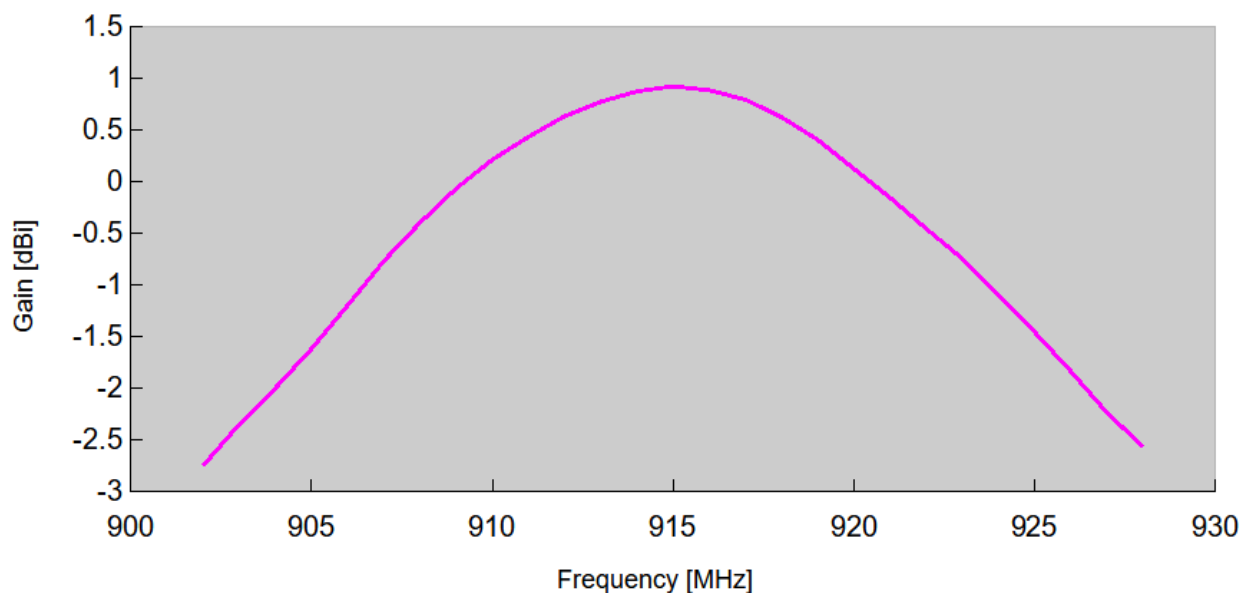


Frequency (MHz)	902	903	904	905	906	907	908	909	910	911
Gain (dBi)	-2.75	-2.35	-2	-1.62	-1.2	-0.77	-0.4	-0.07	0.21	0.43

Frequency (MHz)	912	913	914	915	916	917	918	919	920	921
Gain (dBi)	0.63	0.77	0.87	0.92	0.88	0.79	0.62	0.4	0.12	-0.16



Frequency (MHz)	922	923	924	925	926	927	928
Gain (dBi)	-0.46	-0.75	-1.11	-1.46	-1.84	-2.24	-2.57

4.5. Radiation Pattern


- Test condition: with ground plane (80 mm × 40 mm).

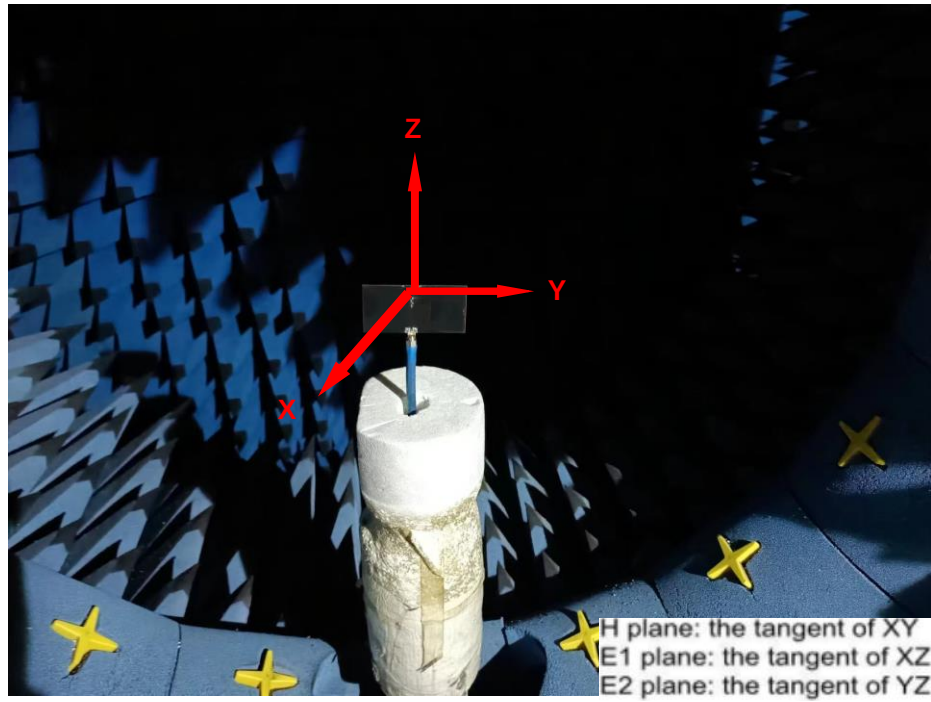


- 915 MHz

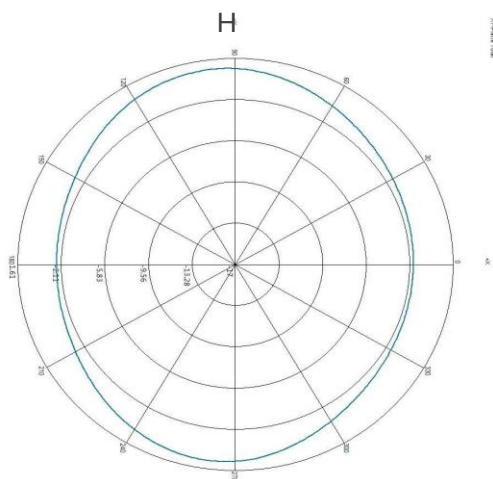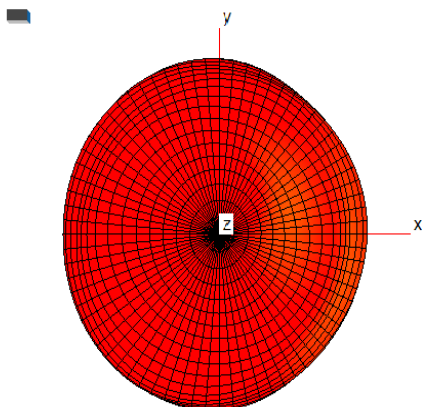


E1

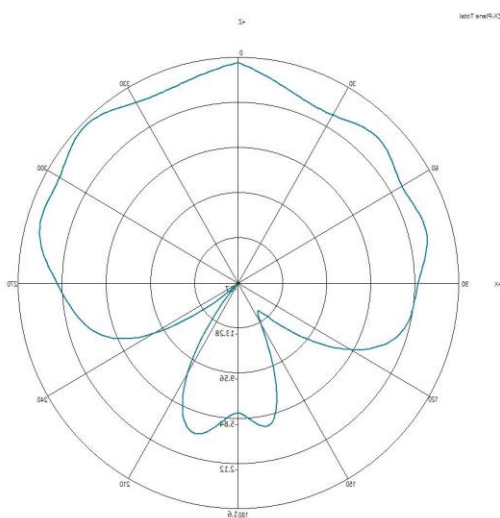

E2

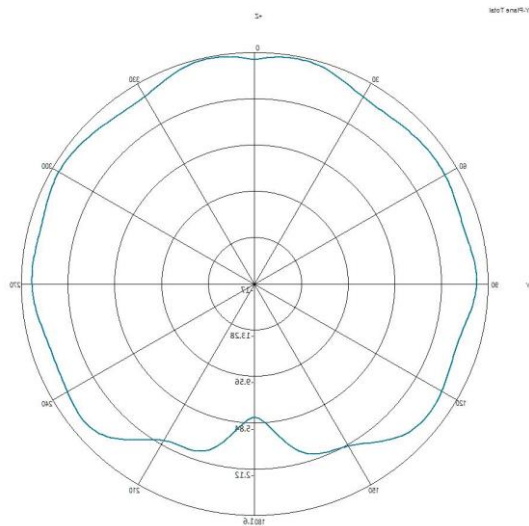


5 PCB Footprint Recommendation

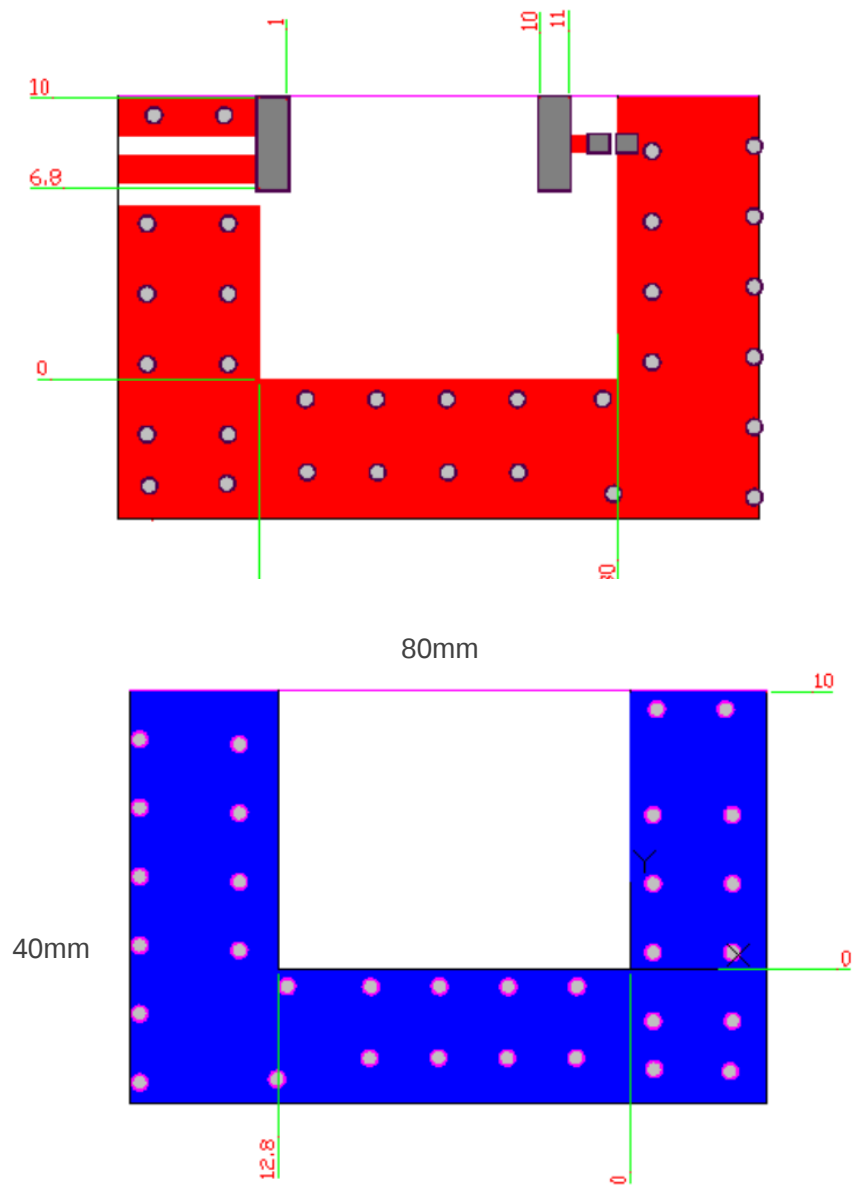


- **Note: The minimum PCB size is recommended to be 30 mm × 50 mm.**

6 Frequency Tuning and Matching Circuit

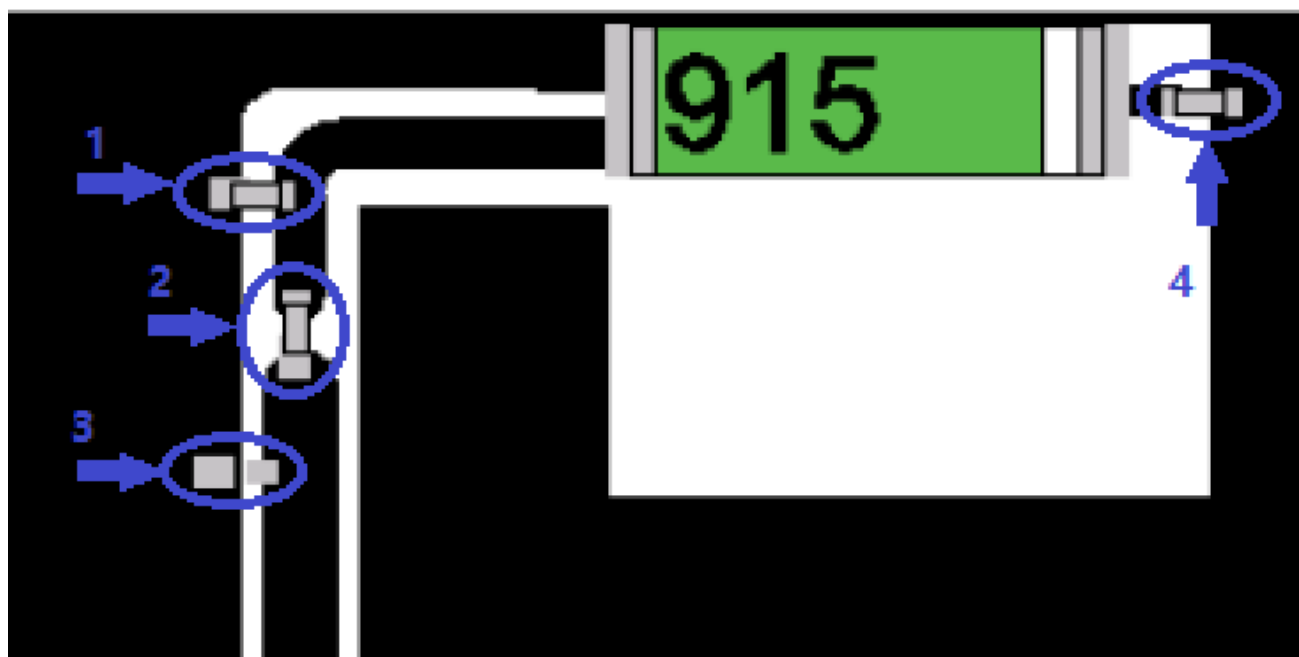


Matching circuit: (Center frequency is about 868 MHz at @ 80 x 40 mm² Evaluation Board)

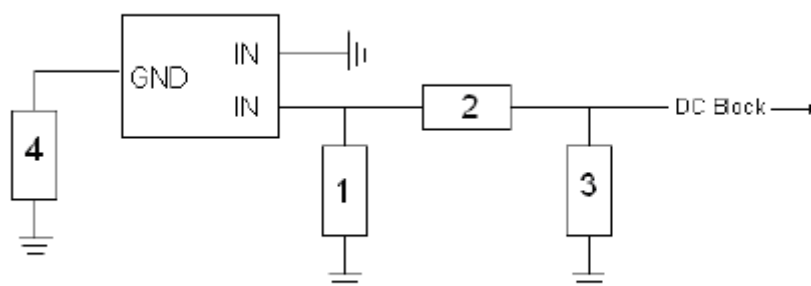


System Matching Circuit Component			
Location	Description	Vendor	Tolerance
1	N/A		
2	0Ω, (0402)		
3	5.0pF,(0402)	Murata	±0.05pF
4	10 pF,(0402)	Murata	±5%

7 Product Size

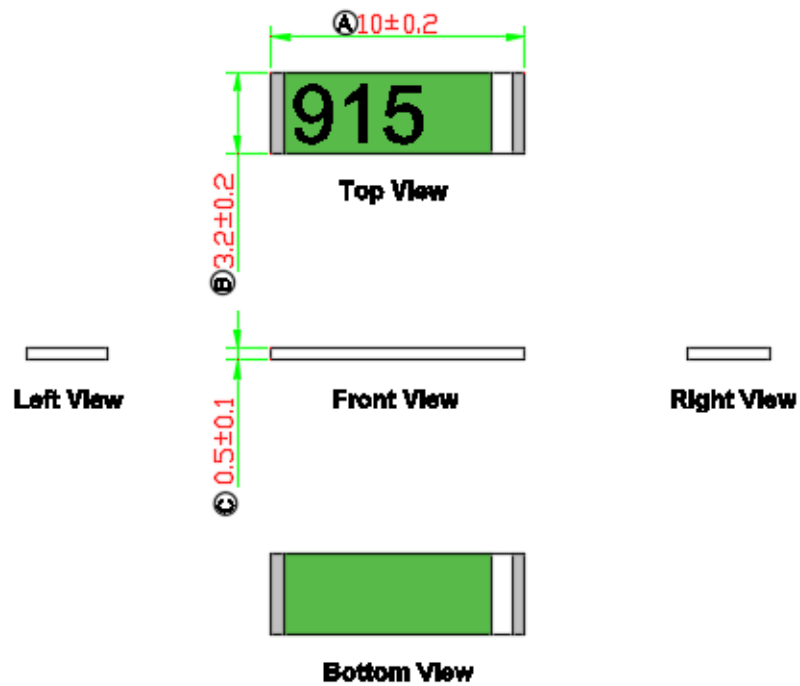


8.1. Reel Drawing (Unit: mm)

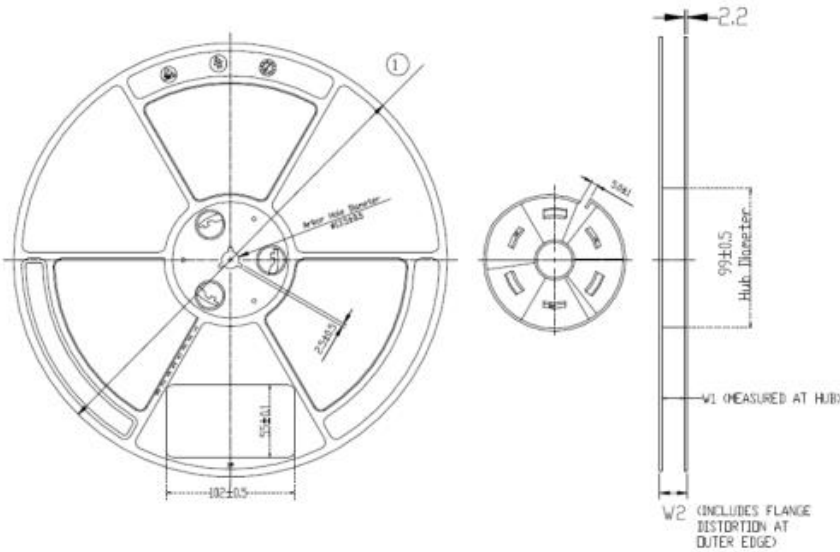


	D	ID	OD
	①	W1	W2
13"24MMCSBY(24.6)	330 ± 1	25.4 ± 1	29.8 ± 1

8.2. Carton Size (Unit: mm)

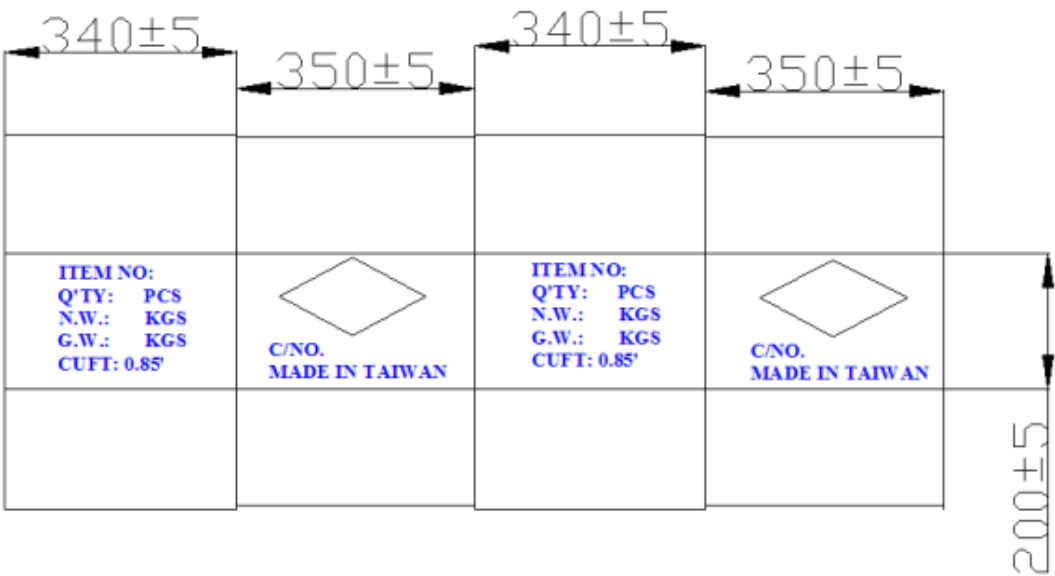

8.3. Picture of Reel Label

Quectel O/C	XXXXXXXXXX	
P/N	Q8 – XXXX	
Quantity	XXXXPCS 	
Lot No	XXXXXXXXXX 	
D/C	XXXXXXXXXX 	RoHS

8.4 Process of Packing

1. Attach the reel label on the reel.



2. Seal the labeled reel in a vacuum and dry package.



- Put ten reels into a carton. After sealing the carton, attach the labels.



- Pictures of carton labels.

- Label 1

PKG ID: XXXXXXXX0001 XXXXXXXXXXXXXXXXXXXX	Quectel OC: XXXXXXXX XXXXXXXXXXXXXXXXXXXX
Quantity: XXX XXXXXXXXXXXXXXXXXXXX	Lot No.: XXXXXXXX XXXXXXXXXXXXXXXXXXXX
D/C: XXXXXXXX XXXXXXXXXXXXXXXXXXXX	P/N: Q8-DXXXX XXXXXXXXXXXXXXXXXXXX
Model: XXXXXX Packer: XXXXXXXX MADE IN CHINA	QUECTEL Antenna Product RoHS 上海移远通信技术股份有限公司

- Label 2

Quality Certification	
Model: XXXXXX	P/N: Q8-DXXXX
Quantity: XXX	N.W: XXXX KG
QC: _____	G.W: XXXX KG
Lot No.:XXXXXXXXXXXXXX	Date: XXXX/XX/XX
Carton No.:XXXXXXXXXXXXX0001	
Ordering Code: XXXXXXXX	
CTN Size (mm): XXX*XXX*XXX	
Designed By: Quectel Wireless Solutions Co.,Ltd	
QUECTEL RoHS MADE IN CHINA	

- Label 3

Paste this label in the carton containing the inspection report, if there are mantissa products.

备注Remark:

附检验报告
Attached Inspection Report


QUECTEL[®]

上海移远通信技术股份有限公司

尾数箱

9 Soldering Conditions

Typical Soldering Profile for Lead-free Process

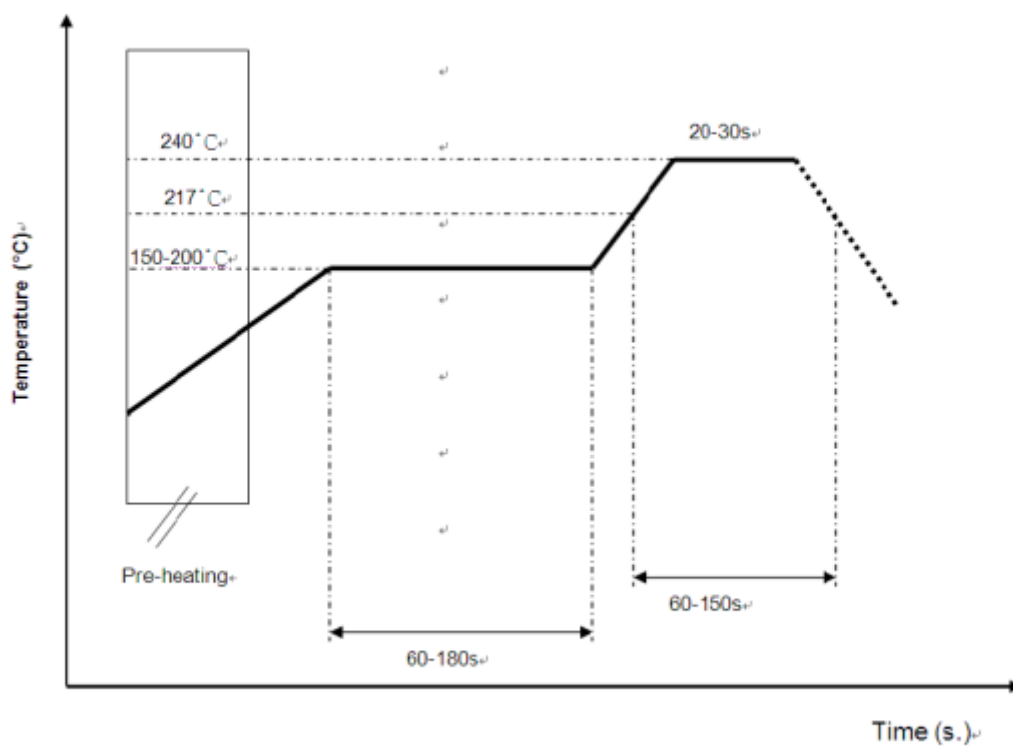

*Recommended solder paste alloy: SAC305 (Sn96.5 /Ag3 /Cu0.5) Lead Free solder paste.