

Product Model 产品型号	LC26C	Brand 品牌	中性	Part number 物料编号	
Product Type 产品类	无线充电器说明书	Description 描述	/	Job No. 图档编码	
Dimension 尺寸	65*85mm	Original Designer 原设计师		Date 日期	2021.10.21
Scale 比例	1:1	Technology 工艺	105g铜版纸, 双面四色 印刷	Verifying 审核	
Revision 版本号	1.1	Change description 版本变更描述	2021.06.29变更丝印内容。		


### Desktop Magnetic Wireless Charger

### User Manual


#### User Manual

Thank you for using this product! This product is a Magnetic desktop stand wireless charger, support iPhone 12 series devices/Airpods simultaneous charging. The product has a dedicated charging position for iPhone and Airpods, can ensure the device wireless charging starts at the moment of contact. It can get rid of the limitation of complicated route connection and connection distance, so that users can enjoy the fun of wireless charging of digital products.

Before using the Magnetic desktop wireless charger, please read this manual carefully and keep it for future reference.




#### Connect to Adapter

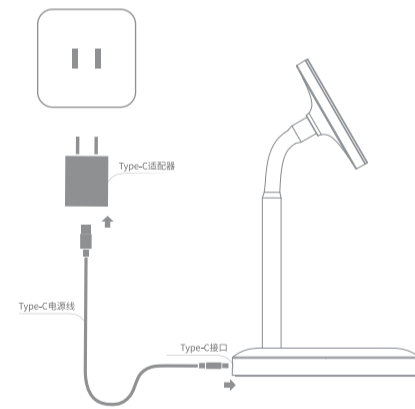

- ① Connect the power adapter to socket.
- ② Type-C cable one interface connected to the power adapter, the other interface to magnetic desktop wireless charger.

Note: This product is also compatible with USB-A to USB-C cables. Only QC2.0 & QC3.0 or PD standard power adapter support this product's quick charge function. USB-A to USB-C cable and power adapter need to buy separately.


#### Method of Application

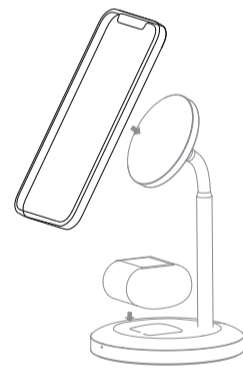

When the wireless charger is connected to an ordinary 5V adapter through Type-C to Type-C cable (Standard cable for this product) or USB-A to USB-C cable, the product works in ordinary wireless charging mode and only supports single 5W load. If you use QC, PD standard adapter, the product will work in quick wireless charging mode and supports 7.5W/10W/15W load.

Recommendation: Use adapters of 20W and above.

#### Charging Diagram



- ① Power on: After the blue indicator light flashes for 1s, the green indicator light flashes for 1s, then the blue and red lights are on at the same time, and then the green light stays on to enter the standby mode.
- ② Standby: the indicator light is always green.
- ③ Charging: the indicator light will stay blue, remove the receiver, the indicator light will turn green and enter the standby mode.
- ④ Charging Full: the indicator light is steady green.
- ⑤ 5.FOD and abnormal: blue light flashes.

#### Notes

1. Do not squeeze or collisions.
2. Do not disassemble or throw into fire or water, to avoid causing a short circuit leakage.
3. Do not use wireless charger in severely hot, humid or corrosive environments, to avoid circuit damage and occurs leakage phenomenon.
4. Do not place too close with magnetic stripe or chip card (ID card, bank cards, etc.) to avoid magnetic failure.
5. Please keep the distance at least 20cm between implantable medical devices (pacemakers, implantable cochlear, etc.) and the wireless charger, to avoid potential interference with the medical device.
6. To take care of the children, to ensure that they won't play the wireless charger as a toy, to avoid unnecessary accidents.

#### Specification

Input	5V/3A, 9V/3A, 12V/2.5A
Output: (phone)	5W/7.5W/10W/15W
Output: (airpods)	5W
Charging Distance	≤10mm
Dimensions	100x100x143mm
Frequency	115-205KHz
Conversion	≥72%
Weight	218g

#### FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception,

which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
 -- Reorient or relocate the receiving antenna.  
 -- Increase the separation between the equipment and receiver.  
 -- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
 -- Consult the dealer or an experienced radio/TV technician for help.

#### FCC RF exposure statement:

The equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance between 20cm the radiator your body.  
 FCC ID: 2AFF2LC26C