


JB-304 User's manual

(Door stations Model No.15 series)

1. Door stations



Model No. 15C flush mount
93X168X52(mm)




Model No. 15D flush mount,
card reader. 93X168X52(mm)


2. Technical parameters

Camera:	1/3" SONY CCD or 1/3" CMOS
Viewing angle:	92°
Lens:	F=3.6
Resolution:	420TV Line
Min. illumination:	0.01 LUX
Video output:	1Vp-p/75Ω
Audio SNR:	≥25dB
Audio distortion:	≤7%
Standby current:	≤60mA
Working current:	≤230mA
Working voltage:	DC18V ± 10%
Environment temperature:	-40℃ ~ +45℃

3. Structure




4. Installation

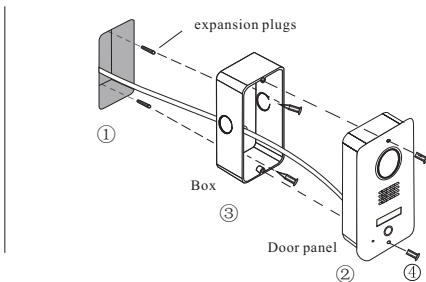


- a. Produce a groove (75x150x50mm) on a proper position of the wall(①).
- b. Take off the door panel from the box with the enclosed screw driver(②③).
- c. Fix the box in the groove with screws and expansion plugs or cement(①).
- d. Fix the door panel in the box with the screws(④).

5. Operation on door stations






A. Call residents



B. Use cards to release doors



6. Door station list

Product photos	Model names	Series model numbers	Sizes: L x W x D (mm)	Exclusive features
	Model No.15A	JB-304MNCW-S15	79X148X45	With name tag and surface mount
	Model No.15B	JB-304MGCQ-S15	79X148X45	With card reader and surface mount
	Model No.15C	JB-304MGCW-S15	93X168X52	With name tag and flush mount
	Model No.15D	JB-304MNCQ-S15	93X168X52	With card reader and flush mount
	Model No.18	JB-304MCQ-S18A JB-304MGCQ-S18A	102X175X39	With keypad With keypad and card reader

XIMAN LEELEN TECHNOLOGY CO.,LTD.
65, SUNBAN SOUTH ROAD, JIMEI, XIAMEN, 361021 CHINA



This appliance shall not be disposed together with the normal waste. It must be recycled.

Attitude during operation below 2000m.

FCC Statement:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.