

FCC Report (Bluetooth)

Applicant: FengShun Peiyong Electro-Acoustic Co., Ltd

Address of Applicant: No.8, Fengda Road, Tangkeng Town Industrial Area,
Fengshun County, Meizhou City, Guangdong Province, P.R.
China

Manufacturer/Factory: FengShun Peiyong Electro-Acoustic Co., Ltd

Address of Manufacturer/Factory: No.8, Fengda Road, Tangkeng Town Industrial Area,
Fengshun County, Meizhou City, Guangdong Province, P.R.
China

Equipment Under Test (EUT)

Product Name: Car Multimedia Player

Model No.: VX3518

Trade Mark: JENSEN

FCC ID: 2AFXA-VX3518

Applicable standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247

Date of sample receipt: July 09, 2018

Date of Test: July 09-July 12, 2018

Date of report issued: July 13, 2018

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

Authorized Signature:



Robinson Lo


Laboratory Manager

This results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company. The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

2 Version

| Version No. | Date | Description |
|-------------|---------------|-------------|
| 00 | July 13, 2018 | Original |
| | | |
| | | |
| | | |
| | | |

Prepared By:




Date:

July 13, 2018

Project Engineer

Check By:



Date:

July 13, 2018

Reviewer

3 Contents

Page

| | | |
|-------|--|----|
| 1 | COVER PAGE | 1 |
| 2 | VERSION | 2 |
| 3 | CONTENTS | 3 |
| 4 | TEST SUMMARY | 4 |
| 5 | GENERAL INFORMATION | 5 |
| 5.1 | GENERAL DESCRIPTION OF EUT | 5 |
| 5.2 | TEST MODE | 7 |
| 5.3 | TEST FACILITY..... | 7 |
| 5.4 | TEST LOCATION..... | 7 |
| 5.5 | OTHER INFORMATION REQUESTED BY THE CUSTOMER..... | 7 |
| 5.6 | DESCRIPTION OF SUPPORT UNITS | 7 |
| 5.7 | ADDITIONAL INSTRUCTIONS..... | 8 |
| 6 | TEST INSTRUMENTS LIST | 9 |
| 7 | TEST RESULTS AND MEASUREMENT DATA | 10 |
| 7.1 | ANTENNA REQUIREMENT | 10 |
| 7.2 | CONDUCTED PEAK OUTPUT POWER..... | 11 |
| 7.3 | 20dB EMISSION BANDWIDTH..... | 15 |
| 7.4 | CARRIER FREQUENCIES SEPARATION..... | 19 |
| 7.5 | HOPPING CHANNEL NUMBER | 23 |
| 7.6 | DWELL TIME..... | 24 |
| 7.7 | PSEUDORANDOM FREQUENCY HOPPING SEQUENCE | 26 |
| 7.8 | BAND EDGE..... | 27 |
| 7.8.1 | <i>Conducted Emission Method</i> | 27 |
| 7.8.2 | <i>Radiated Emission Method</i> | 31 |
| 7.9 | SPURIOUS EMISSION | 33 |
| 7.9.1 | <i>Conducted Emission Method</i> | 33 |
| 7.9.2 | <i>Radiated Emission Method</i> | 35 |
| 8 | TEST SETUP PHOTO | 43 |
| 9 | EUT CONSTRUCTIONAL DETAILS..... | 44 |

4 Test Summary

| Test Item | Section in CFR 47 | Result |
|---|-------------------|--------|
| Antenna Requirement | 15.203/15.247 (c) | Pass |
| AC Power Line Conducted Emission | 15.207 | N/A |
| Conducted Peak Output Power | 15.247 (b)(1) | Pass |
| 20dB Occupied Bandwidth | 15.247 (a)(1) | Pass |
| Carrier Frequencies Separation | 15.247 (a)(1) | Pass |
| Hopping Channel Number | 15.247 (a)(1) | Pass |
| Dwell Time | 15.247 (a)(1) | Pass |
| Pseudorandom Frequency Hopping Sequence | 15.247(b)(4) | Pass |
| Radiated Emission | 15.205/15.209 | Pass |
| Band Edge | 15.247(d) | Pass |

Pass: The EUT complies with the essential requirements in the standard.

N/A: no applicable

Remark: Test according to ANSI C63.10:2013

Measurement Uncertainty

| Test Item | Frequency Range | Measurement Uncertainty | Notes |
|----------------------------------|-----------------|-------------------------|-------|
| Radiated Emission | 9kHz ~ 30MHz | ± 4.34dB | (1) |
| Radiated Emission | 30MHz ~ 1000MHz | ± 4.24dB | (1) |
| Radiated Emission | 1GHz ~ 26.5GHz | ± 4.68dB | (1) |
| AC Power Line Conducted Emission | 0.15MHz ~ 30MHz | ± 3.45dB | (1) |

Note (1): The measurement uncertainty is for coverage factor of k=2 and a level of confidence of 95%.

5 General Information

5.1 General Description of EUT

| | |
|----------------------|-----------------------------|
| Product Name: | Car Multimedia Player |
| Model No.: | VX3518 |
| Serial No.: | NSD0001001 |
| Test sample(s) ID: | GTS201807000120-1 |
| Sample(s) Status | Engineer sample |
| Hardware: | 06-103518-2002 VER1.3 |
| Software: | SRV5.5 NC |
| Operation Frequency: | 2402MHz-2480MHz |
| Channel numbers: | 79 |
| Channel separation: | 1MHz |
| Modulation type: | GFSK, $\pi/4$ -DQPSK, 8DPSK |
| Antenna Type: | PCB Antenna |
| Antenna gain: | 1.2dBi |
| Power supply: | 12V |

| Operation Frequency each of channel | | | | | | | |
|-------------------------------------|-----------|---------|-----------|---------|-----------|---------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 1 | 2402MHz | 21 | 2422MHz | 41 | 2442MHz | 61 | 2462MHz |
| 2 | 2403MHz | 22 | 2423MHz | 42 | 2443MHz | 62 | 2463MHz |
| 3 | 2404MHz | 23 | 2424MHz | 43 | 2444MHz | 63 | 2464MHz |
| 4 | 2405MHz | 24 | 2425MHz | 44 | 2445MHz | 64 | 2465MHz |
| 5 | 2406MHz | 25 | 2426MHz | 45 | 2446MHz | 65 | 2466MHz |
| 6 | 2407MHz | 26 | 2427MHz | 46 | 2447MHz | 66 | 2467MHz |
| 7 | 2408MHz | 27 | 2428MHz | 47 | 2448MHz | 67 | 2468MHz |
| 8 | 2409MHz | 28 | 2429MHz | 48 | 2449MHz | 68 | 2469MHz |
| 9 | 2410MHz | 29 | 2430MHz | 49 | 2450MHz | 69 | 2470MHz |
| 10 | 2411MHz | 30 | 2431MHz | 50 | 2451MHz | 70 | 2471MHz |
| 11 | 2412MHz | 31 | 2432MHz | 51 | 2452MHz | 71 | 2472MHz |
| 12 | 2413MHz | 32 | 2433MHz | 52 | 2453MHz | 72 | 2473MHz |
| 13 | 2414MHz | 33 | 2434MHz | 53 | 2454MHz | 73 | 2474MHz |
| 14 | 2415MHz | 34 | 2435MHz | 54 | 2455MHz | 74 | 2475MHz |
| 15 | 2416MHz | 35 | 2436MHz | 55 | 2456MHz | 75 | 2476MHz |
| 16 | 2417MHz | 36 | 2437MHz | 56 | 2457MHz | 76 | 2477MHz |
| 17 | 2418MHz | 37 | 2438MHz | 57 | 2458MHz | 77 | 2478MHz |
| 18 | 2419MHz | 38 | 2439MHz | 58 | 2459MHz | 78 | 2479MHz |
| 19 | 2420MHz | 39 | 2440MHz | 59 | 2460MHz | 79 | 2480MHz |
| 20 | 2421MHz | 40 | 2441MHz | 60 | 2461MHz | | |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

| | |
|---------------------|-----------|
| Channel | Frequency |
| The lowest channel | 2402MHz |
| The middle channel | 2441MHz |
| The Highest channel | 2480MHz |

5.2 Test mode

| | |
|--|---|
| Transmitting mode | Keep the EUT in continuously transmitting mode. |
| <i>Remark: During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and found that the worst case was under the nominal rated supply condition. So the report just shows that condition's data.</i> | |

5.3 Test Facility

| |
|--|
| <p>The test facility is recognized, certified, or accredited by the following organizations:</p> <ul style="list-style-type: none"> ● FCC —Registration No.: 381383 Global United Technology Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in files. Registration 381383, January 08, 2018. ● Industry Canada (IC) —Registration No.: 9079A-2 The 3m Semi-anechoic chamber of Global United Technology Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 9079A-2, August 15, 2016. |
|--|

5.4 Test Location

| |
|--|
| All tests were performed at: |
| <p>Global United Technology Services Co., Ltd. Address: No. 301-309, 3/F., Jinyuan Business Building, No.2, Laodong Industrial Zone, Xixiang Road, Baoan District, Shenzhen, Guangdong, China 518102 Tel: 0755-27798480 Fax: 0755-27798960</p> |

5.5 Other Information Requested by the Customer

| |
|-------|
| None. |
|-------|

5.6 Description of Support Units


| Manufacturer | Description | Model | Serial Number |
|--------------|--------------------------|------------|---------------|
| GS | Supreme maintenance Free | S5D26R-MFZ | 9442804454 |

5.7 Additional Instructions

EUT fixed frequency Settings:

| Power level setup | | | |
|------------------------|-------------------------------------|-----------------|--------------------|
| Support Units | Description | Manufacturer | Model |
| | Wideband Radio Communication Tester | Rohde & Schwarz | CMW 500 |
| Mode | Channel | Frequency (MHz) | Level Set |
| GFSK, PI/4 QPSK, 8DPSK | CH1 | 2402 | TX level : maximum |
| | CH40 | 2441 | |
| | CH79 | 2480 | |

Run Software

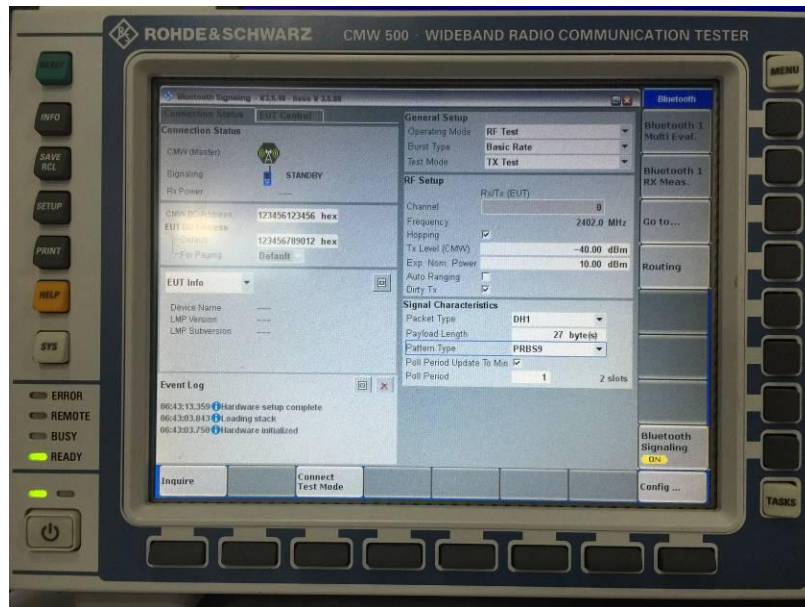


6 Test Instruments list

| Radiated Emission: | | | | | | |
|--------------------|-------------------------------------|--------------------------------|-----------------------------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | 3m Semi- Anechoic Chamber | ZhongYu Electron | 9.2(L)*6.2(W)* 6.4(H) | GTS250 | July. 03 2015 | July. 02 2020 |
| 2 | Control Room | ZhongYu Electron | 6.2(L)*2.5(W)* 2.4(H) | GTS251 | N/A | N/A |
| 3 | EMI Test Receiver | Rohde & Schwarz | ESU26 | GTS203 | June. 27 2018 | June. 26 2019 |
| 4 | BiConiLog Antenna | SCHWARZBECK MESS-ELEKTRONIK | VULB9163 | GTS214 | June. 27 2018 | June. 26 2019 |
| 5 | Double -ridged waveguide horn | SCHWARZBECK MESS-ELEKTRONIK | BBHA 9120 D | GTS208 | June. 27 2018 | June. 26 2019 |
| 6 | Horn Antenna | ETS-LINDGREN | 3160 | GTS217 | June. 27 2018 | June. 26 2019 |
| 7 | EMI Test Software | AUDIX | E3 | N/A | N/A | N/A |
| 8 | Coaxial Cable | GTS | N/A | GTS213 | June. 27 2018 | June. 26 2019 |
| 9 | Coaxial Cable | GTS | N/A | GTS211 | June. 27 2018 | June. 26 2019 |
| 10 | Coaxial cable | GTS | N/A | GTS210 | June. 27 2018 | June. 26 2019 |
| 11 | Coaxial Cable | GTS | N/A | GTS212 | June. 27 2018 | June. 26 2019 |
| 12 | Amplifier(100kHz-3GHz) | HP | 8347A | GTS204 | June. 27 2018 | June. 26 2019 |
| 13 | Amplifier(2GHz-20GHz) | HP | 84722A | GTS206 | June. 27 2018 | June. 26 2019 |
| 14 | Amplifier (18-26GHz) | Rohde & Schwarz | AFS33-18002 650-30-8P-44 | GTS218 | June. 27 2018 | June. 26 2019 |
| 15 | Band filter | Amindeon | 82346 | GTS219 | June. 27 2018 | June. 26 2019 |
| 16 | Power Meter | Anritsu | ML2495A | GTS540 | June. 27 2018 | June. 26 2019 |
| 17 | Power Sensor | Anritsu | MA2411B | GTS541 | June. 27 2018 | June. 26 2019 |
| 18 | Wideband Radio Communication Tester | Rohde & Schwarz | CMW500 | GTS575 | June. 27 2018 | June. 26 2019 |
| 19 | Splitter | Agilent | 11636B | GTS237 | June. 27 2018 | June. 26 2019 |
| 20 | Loop Antenna | ZHINAN | ZN30900A | GTS534 | June. 27 2018 | June. 26 2019 |


| General used equipment: | | | | | | |
|-------------------------|------------------------------------|--------------|-----------|---------------|---------------------|-------------------------|
| Item | Test Equipment | Manufacturer | Model No. | Inventory No. | Cal.Date (mm-dd-yy) | Cal.Due date (mm-dd-yy) |
| 1 | Humidity/ Temperature Indicator | KTJ | TA328 | GTS243 | June. 27 2018 | June. 26 2019 |
| 2 | Barometer | ChangChun | DYM3 | GTS255 | June. 27 2018 | June. 26 2019 |

7 Test results and Measurement Data

7.1 Antenna requirement
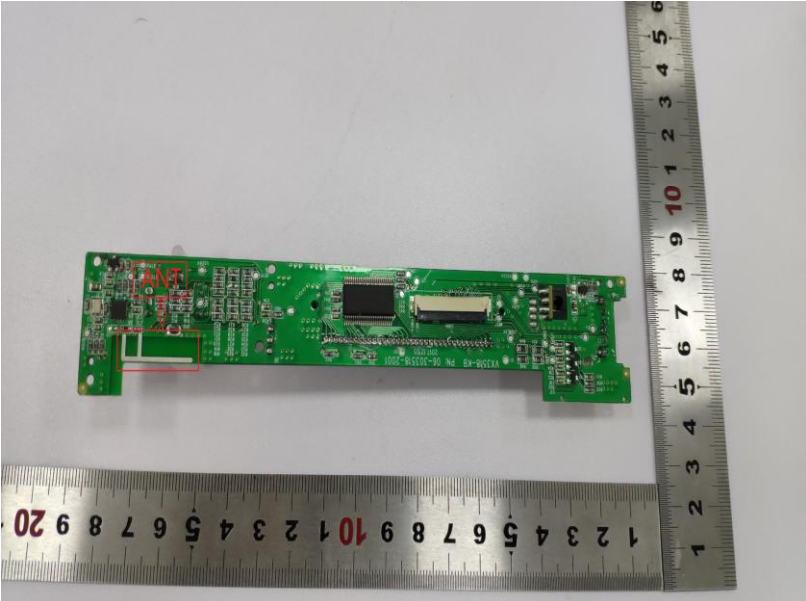
| | |
|--|-------------------------------------|
| Standard requirement: | FCC Part15 C Section 15.203 /247(c) |
| <p>15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.</p> <p>15.247(c) (1)(i) requirement: (i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.</p> | |
| E.U.T Antenna: | |
| <p><i>The antenna is PCB antenna, the best case gain of the antenna is 1.2dBi</i></p>  | |


7.2 Conducted Peak Output Power

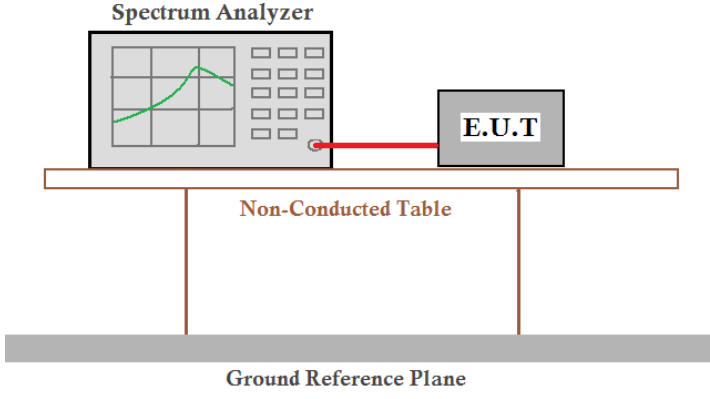
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (b)(3) |
| Test Method: | ANSI C63.10:2013 |
| Limit: | 30dBm(for GFSK),20.97dBm(for EDR) |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Data

| Mode | Test channel | Peak Output Power (dBm) | Limit (dBm) | Result |
|----------|--------------|-------------------------|-------------|--------|
| GFSK | Lowest | 1.47 | 30.00 | Pass |
| | Middle | 2.31 | | |
| | Highest | 2.86 | | |
| Pi/4QPSK | Lowest | 3.62 | 20.97 | Pass |
| | Middle | 4.48 | | |
| | Highest | 5.00 | | |
| 8DPSK | Lowest | 3.81 | 20.97 | Pass |
| | Middle | 4.60 | | |
| | Highest | 5.30 | | |


Test plot as follows:

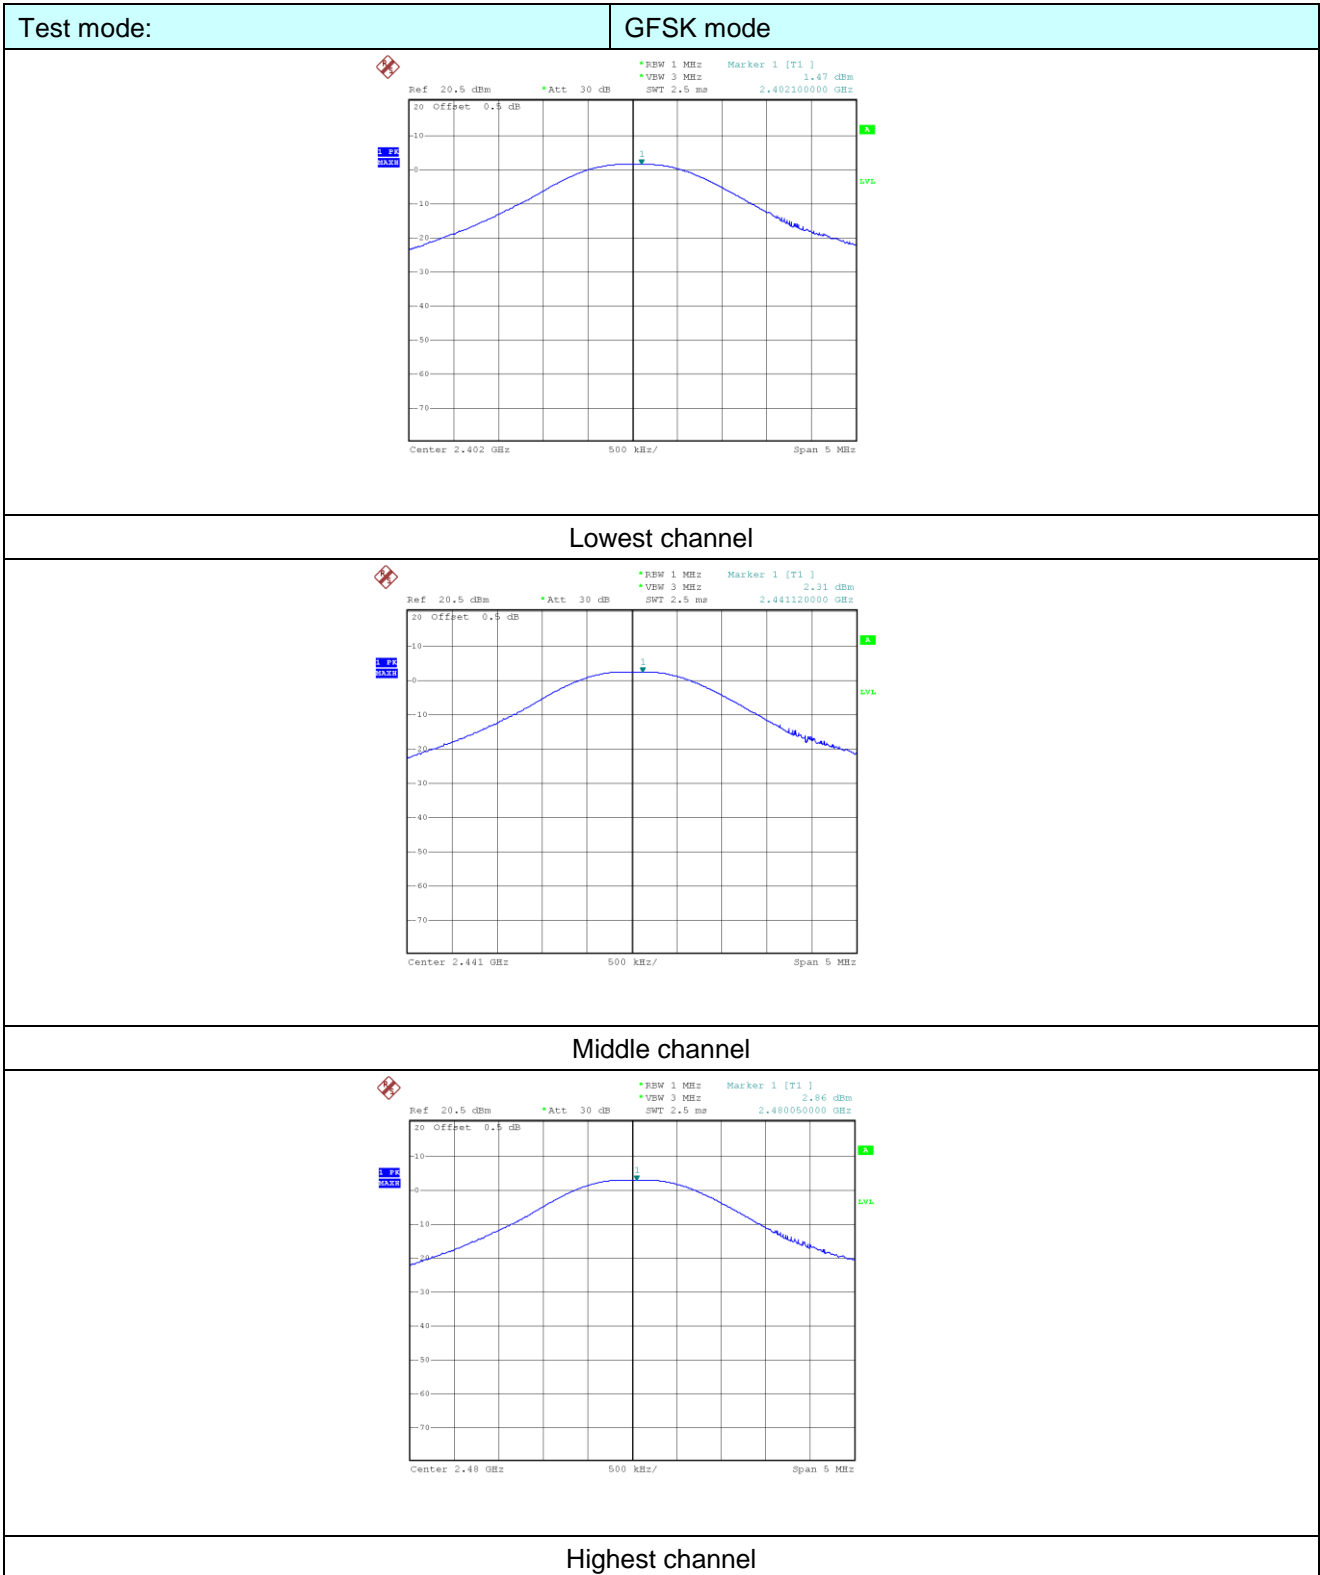

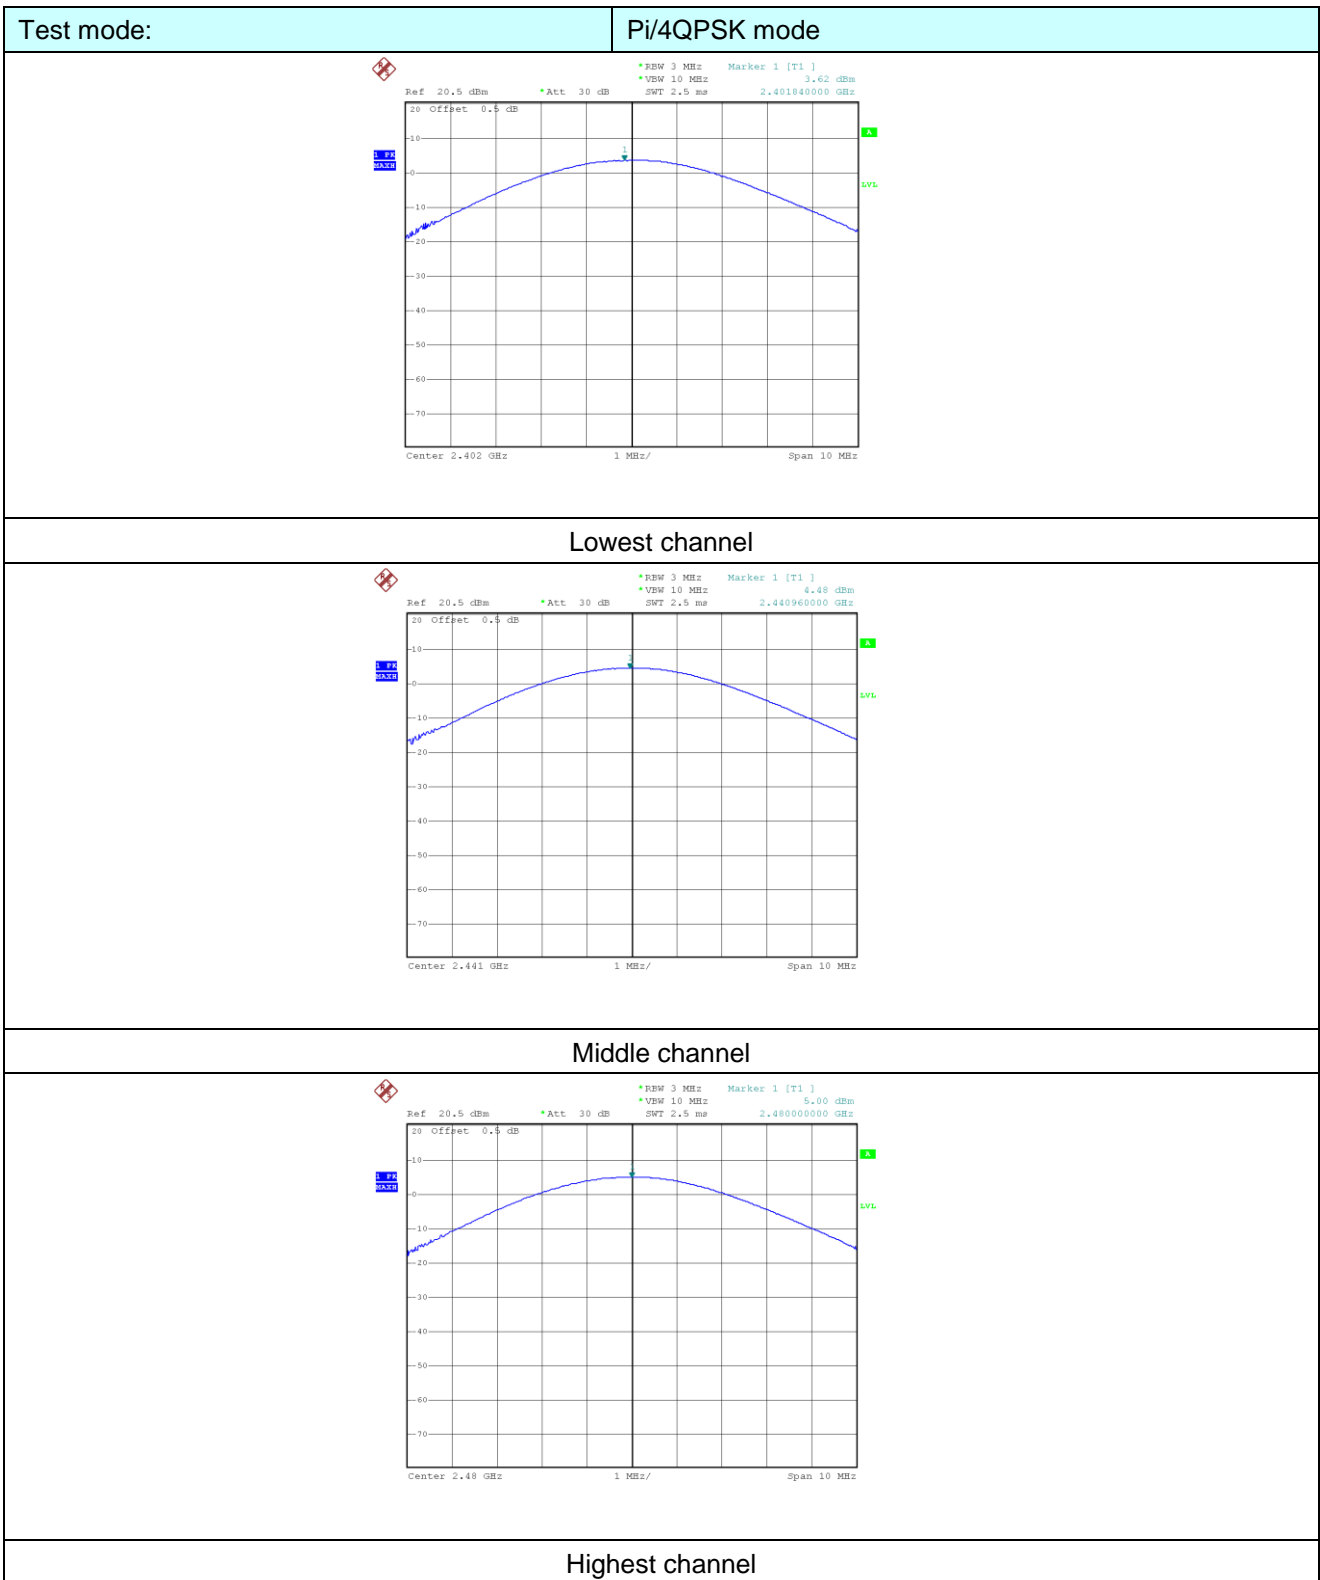

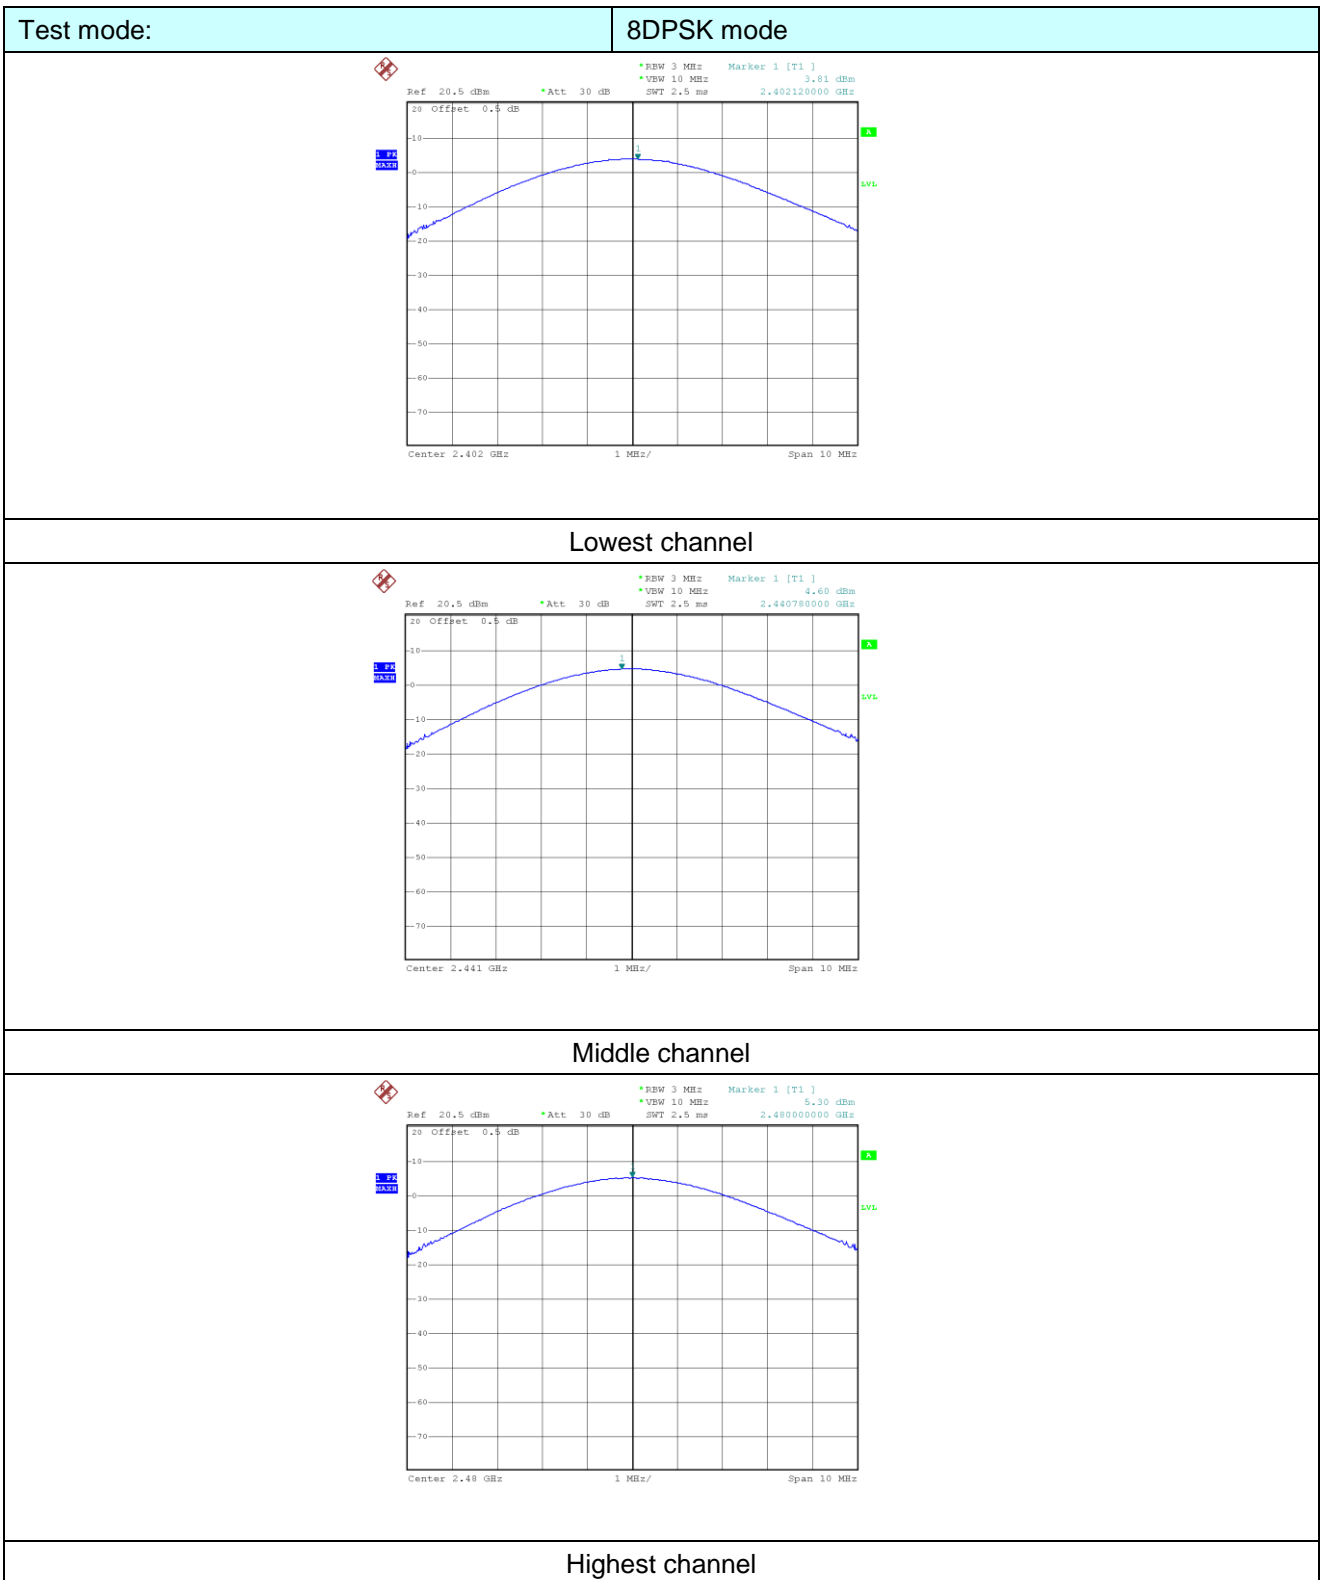


7.3 20dB Emission Bandwidth

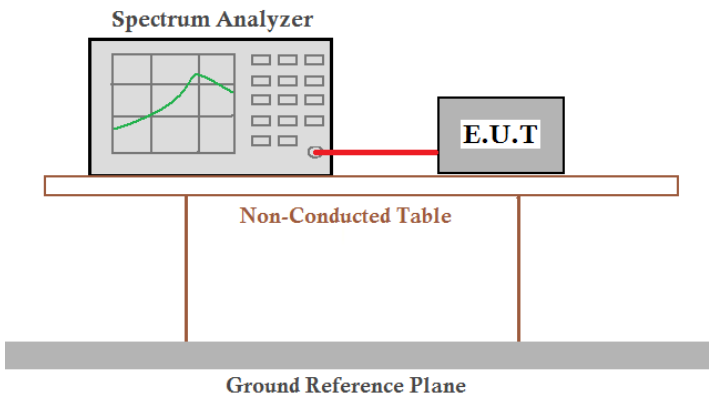
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(2) |
| Test Method: | ANSI C63.10:2013 |
| Limit: | N/A |
| Test setup: |  |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Data

| Mode | Test channel | 20dB Emission Bandwidth (MHz) | Result |
|----------|--------------|-------------------------------|--------|
| GFSK | Lowest | 0.980 | Pass |
| | Middle | 0.976 | |
| | Highest | 0.984 | |
| Pi/4QPSK | Lowest | 1.362 | Pass |
| | Middle | 1.368 | |
| | Highest | 1.368 | |
| 8DPSK | Lowest | 1.362 | Pass |
| | Middle | 1.362 | |
| | Highest | 1.314 | |


Test plot as follows:

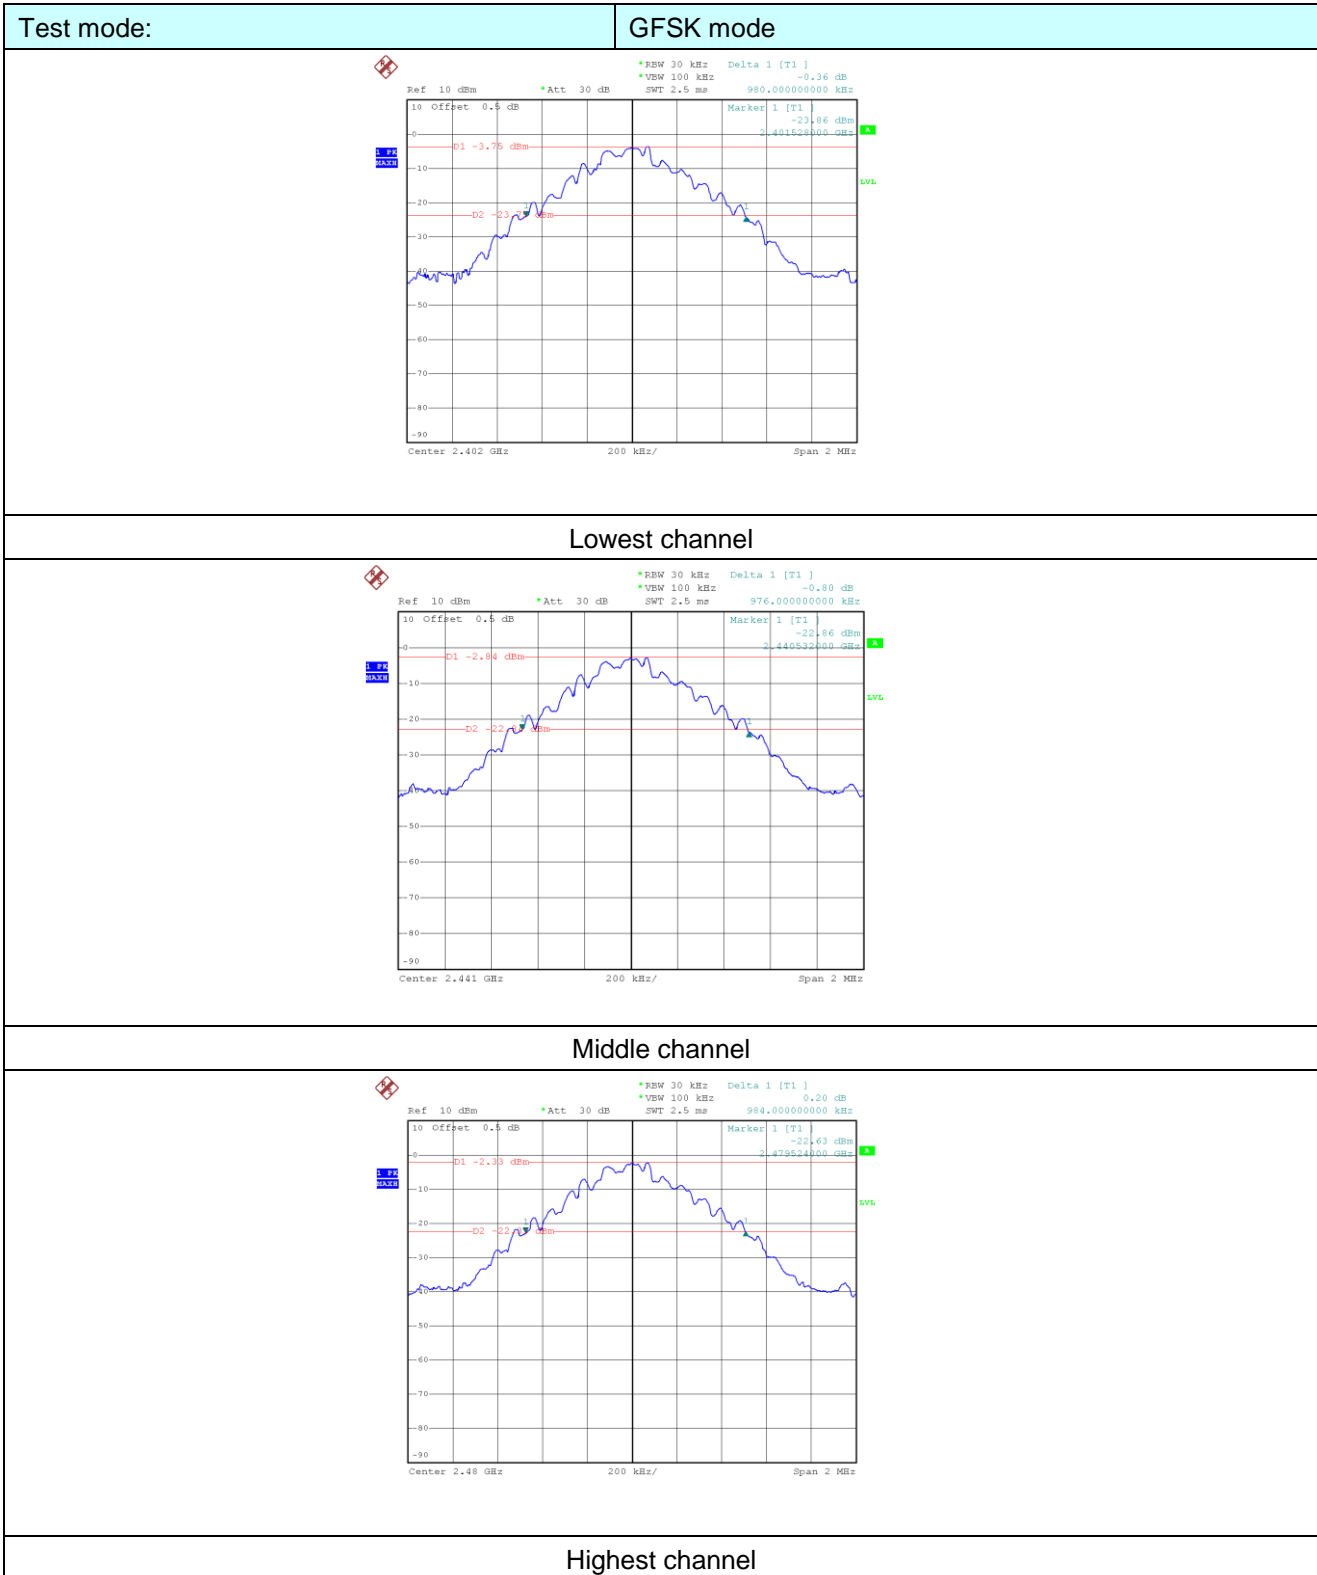

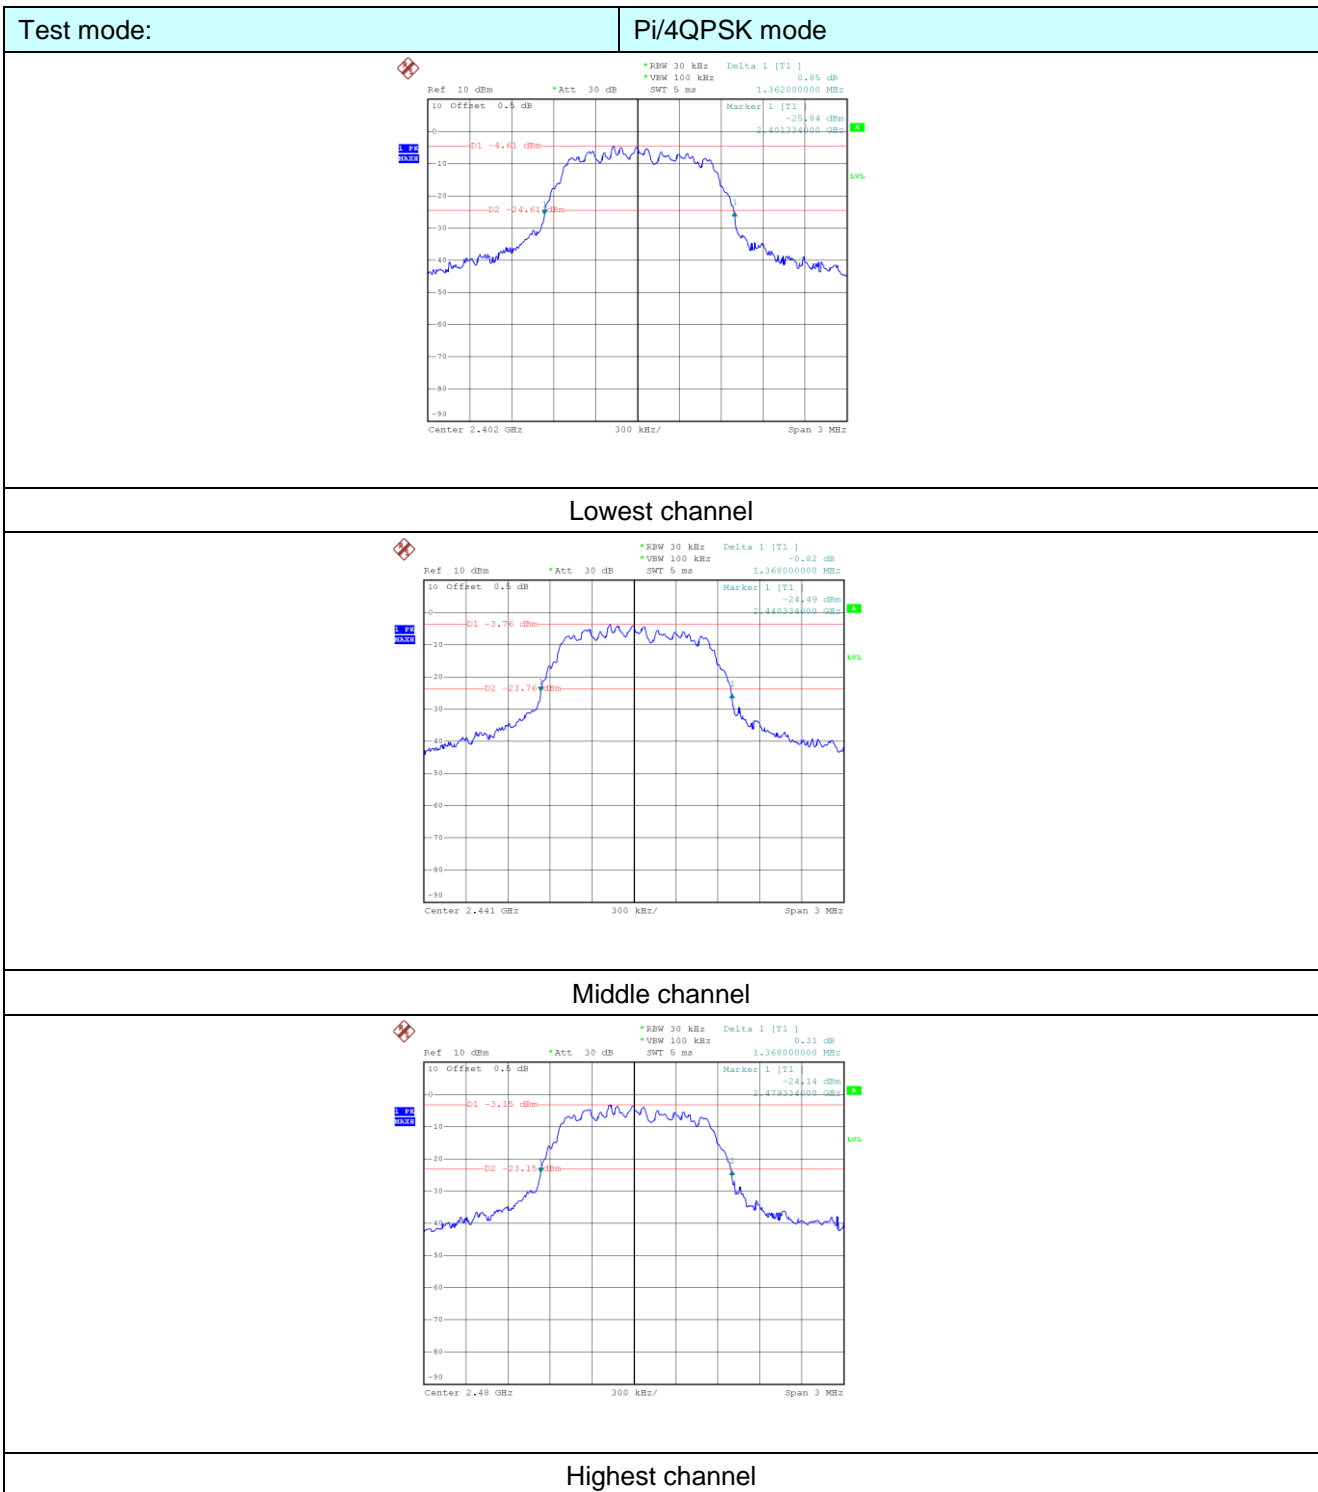

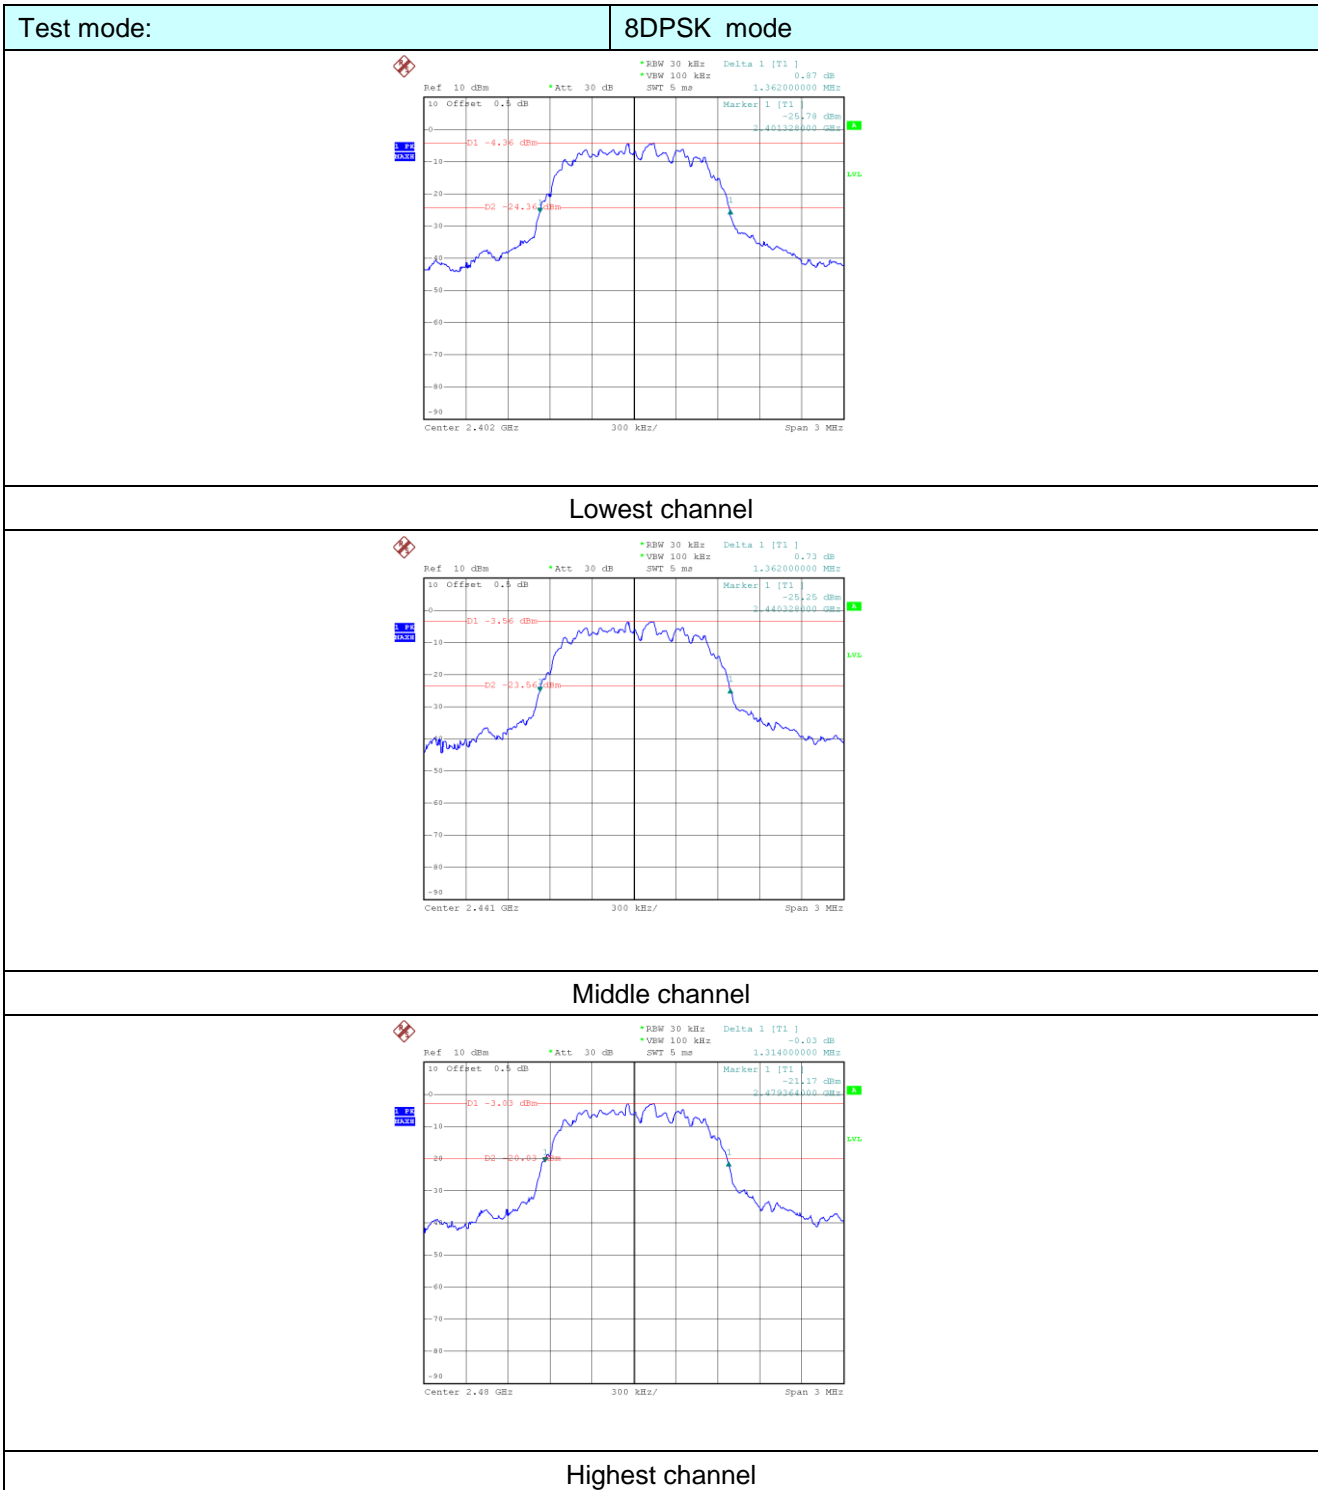

7.4 Carrier Frequencies Separation
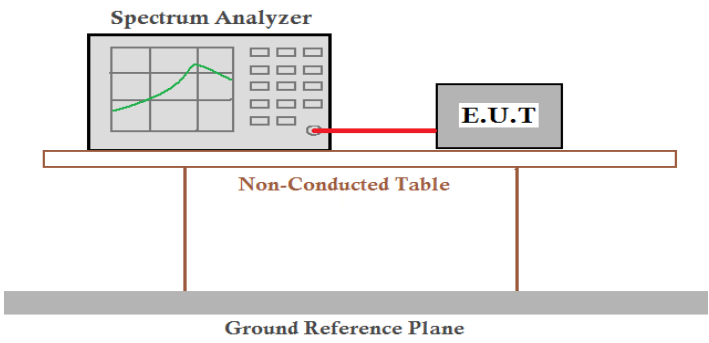
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 |
| Receiver setup: | RBW=100KHz, VBW=300KHz, detector=Peak |
| Limit: | 0.025MHz or 2/3 of the 20dB bandwidth (whichever is greater) |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected via a red cable to an E.U.T. (Equipment Under Test). Both are placed on a Non-Conducted Table. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Measurement Data


| Mode | Test channel | Carrier Frequencies Separation (kHz) | Limit (kHz) | Result |
|----------|--------------|--------------------------------------|-------------|--------|
| GFSK | Lowest | 1004 | 656 | Pass |
| | Middle | 1000 | 656 | Pass |
| | Highest | 1000 | 656 | Pass |
| Pi/4QPSK | Lowest | 1004 | 912 | Pass |
| | Middle | 1004 | 912 | Pass |
| | Highest | 1004 | 912 | Pass |
| 8DSK | Lowest | 1004 | 908 | Pass |
| | Middle | 1004 | 908 | Pass |
| | Highest | 1004 | 908 | Pass |


Note: According to section 7.4

| Mode | 20dB bandwidth (kHz) (worse case) | Limit (kHz) (Carrier Frequencies Separation) |
|----------|--------------------------------------|---|
| GFSK | 984 | 656 |
| Pi/4QPSK | 1368 | 912 |
| 8DSK | 1362 | 908 |


Test plot as follows:

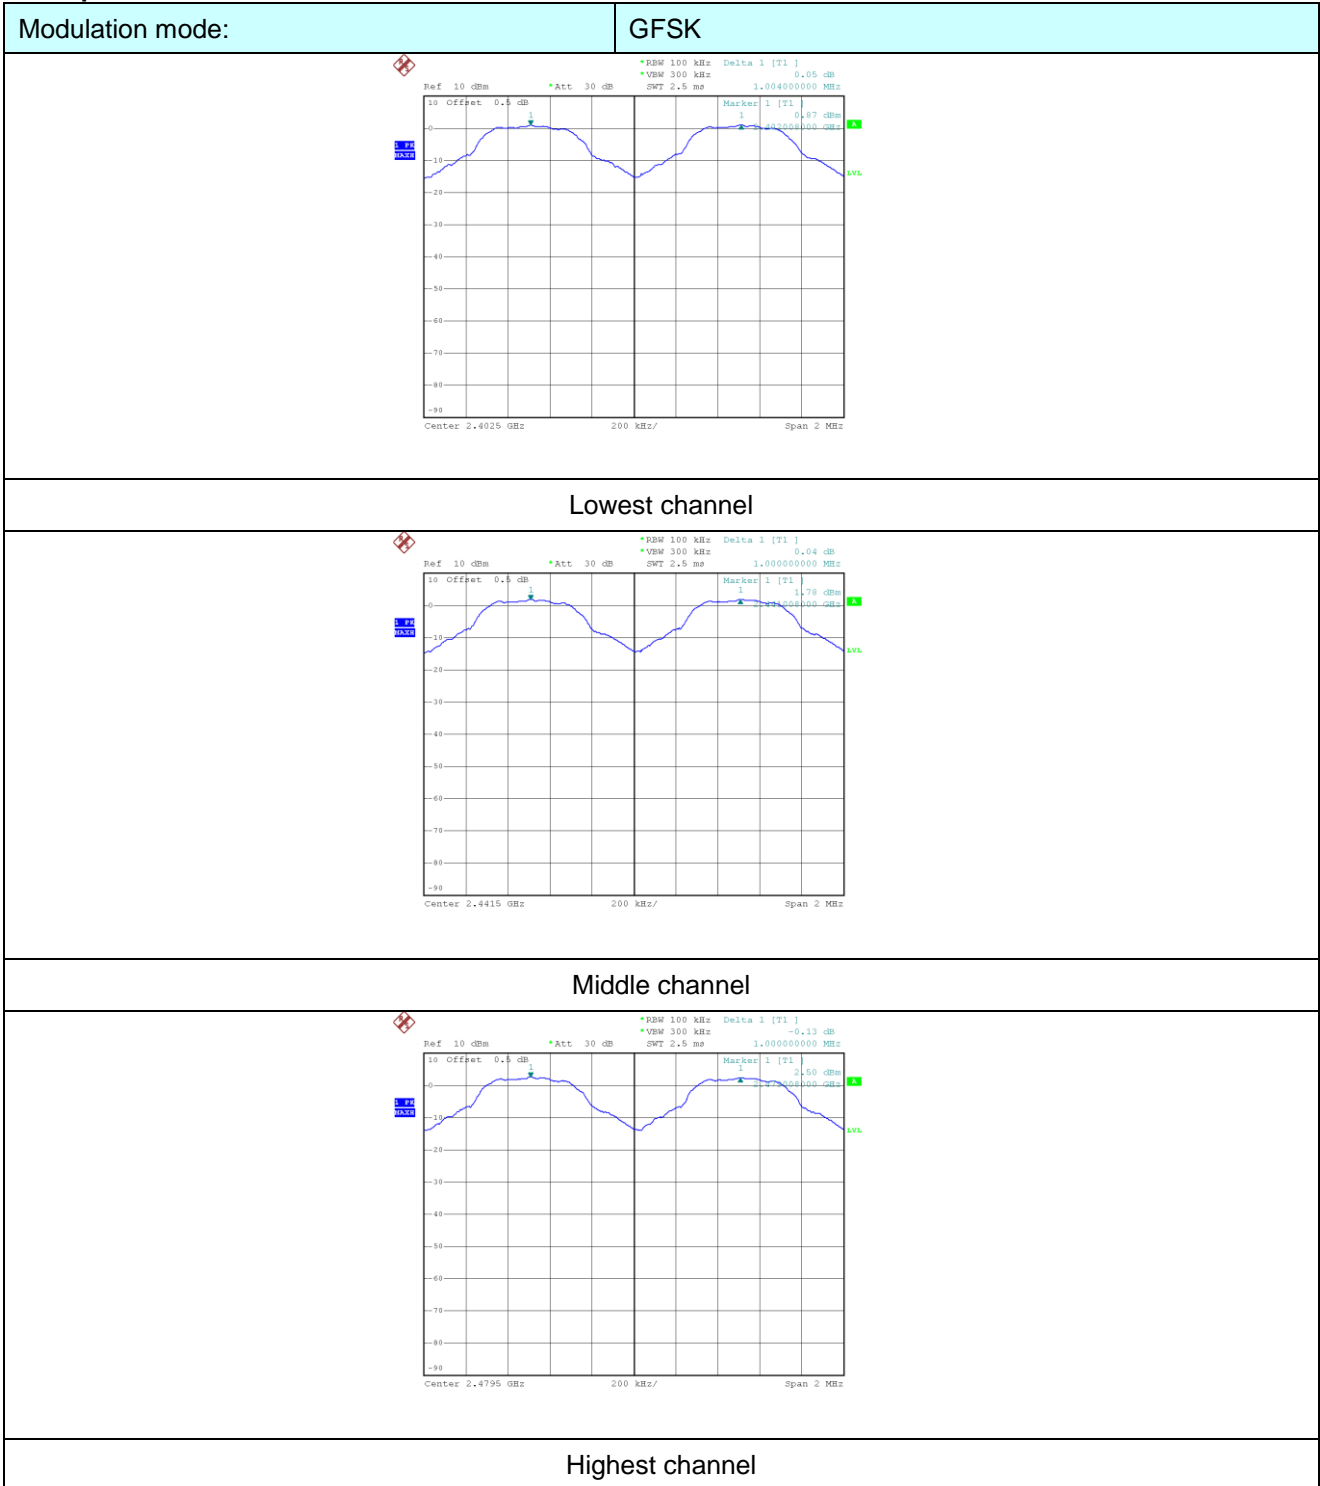

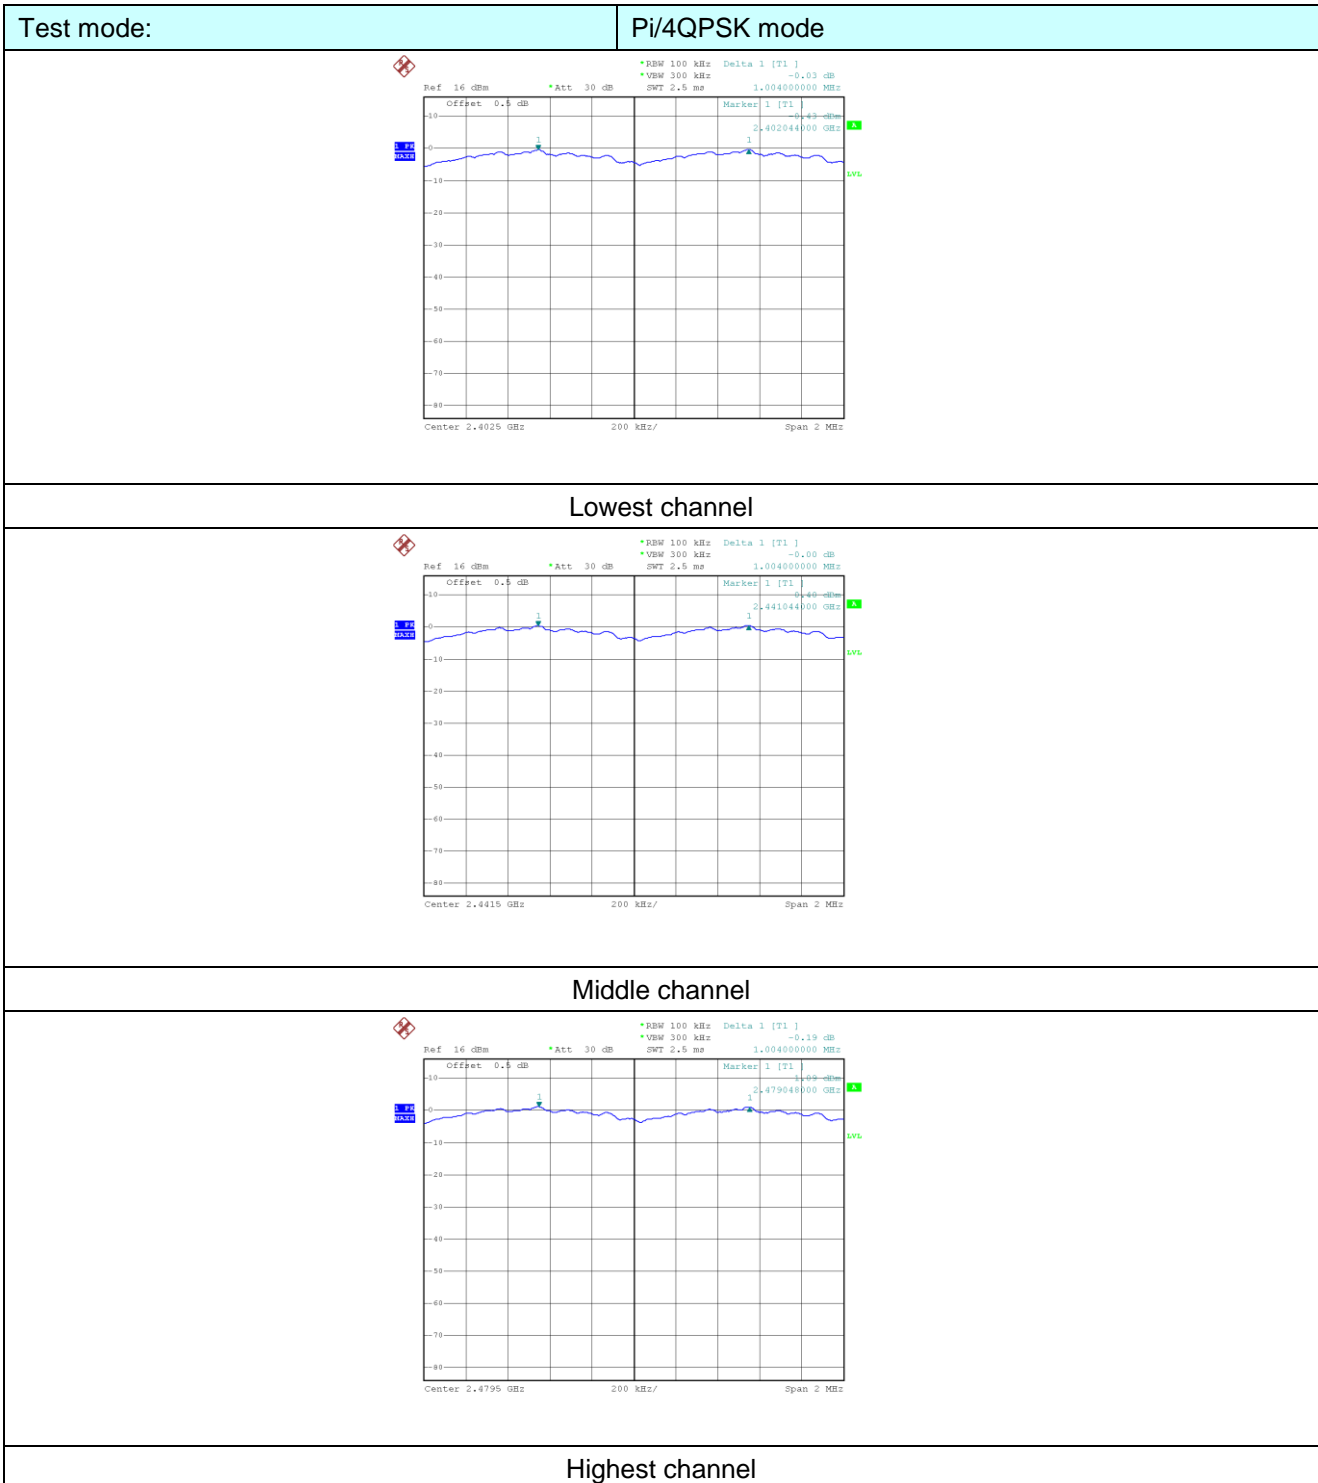

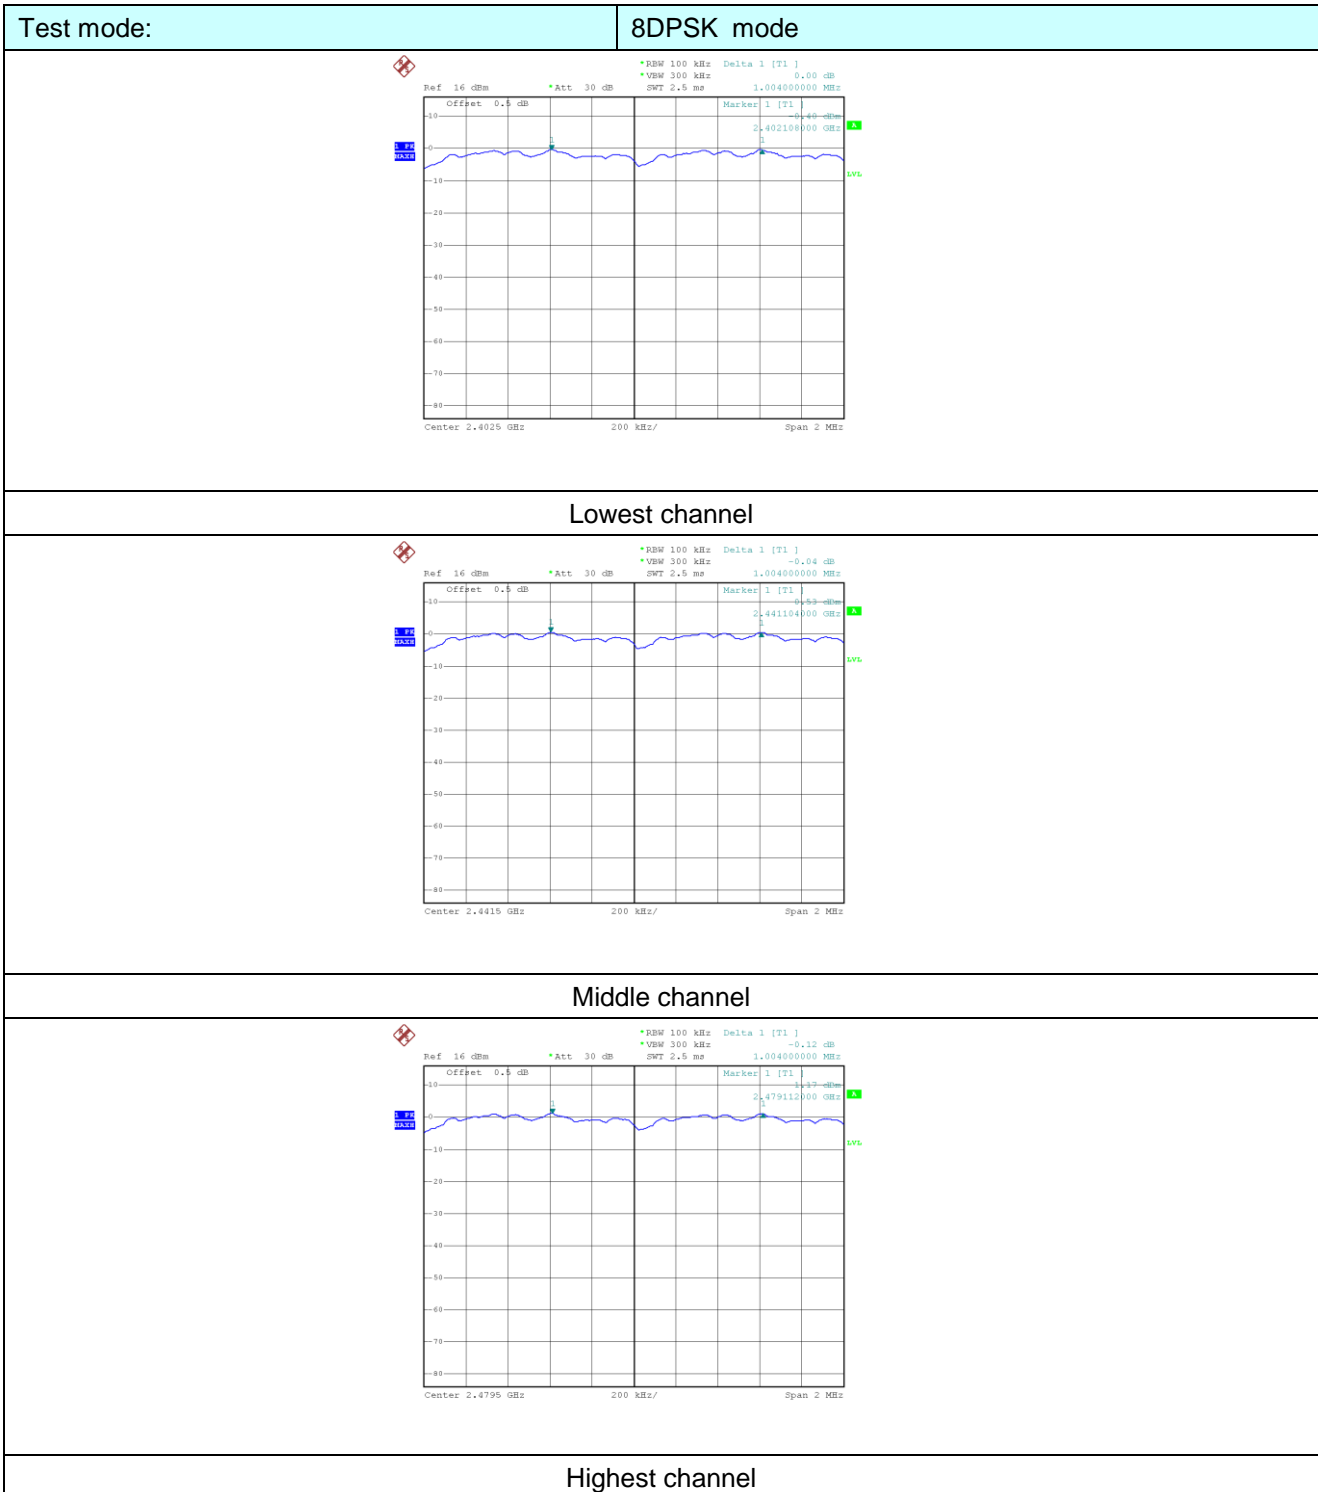


7.5 Hopping Channel Number

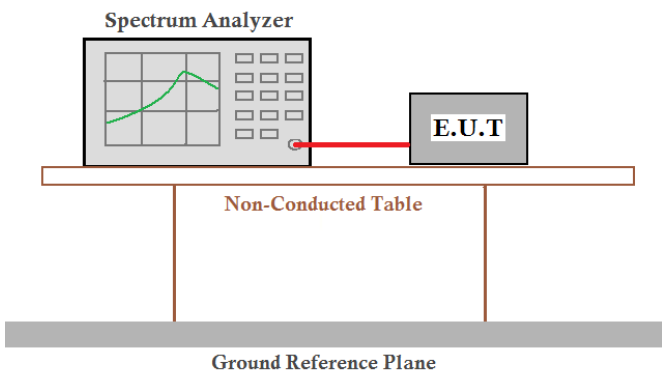
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 |
| Receiver setup: | RBW=100kHz, VBW=300kHz, Frequency range=2400MHz-2483.5MHz, Detector=Peak |
| Limit: | 15 channels |
| Test setup: |  |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement Data:

| Mode | Hopping channel numbers | Limit | Result |
|----------|-------------------------|-------|--------|
| GFSK | 79 | 15 | Pass |
| Pi/4QPSK | 79 | 15 | Pass |
| 8DPSK | 79 | 15 | Pass |

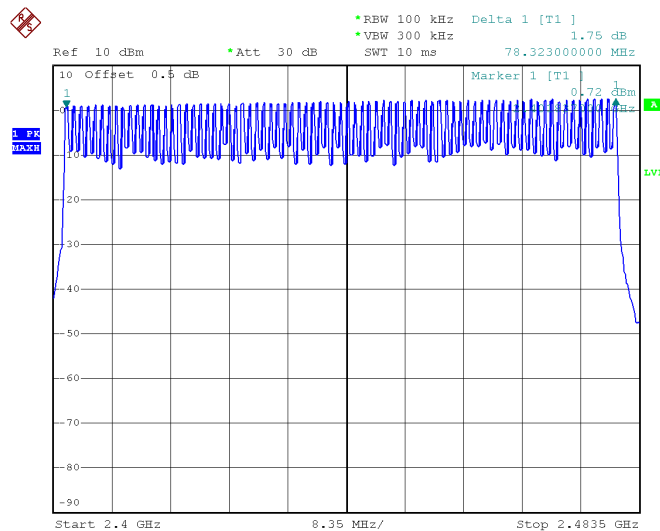

7.6 Dwell Time
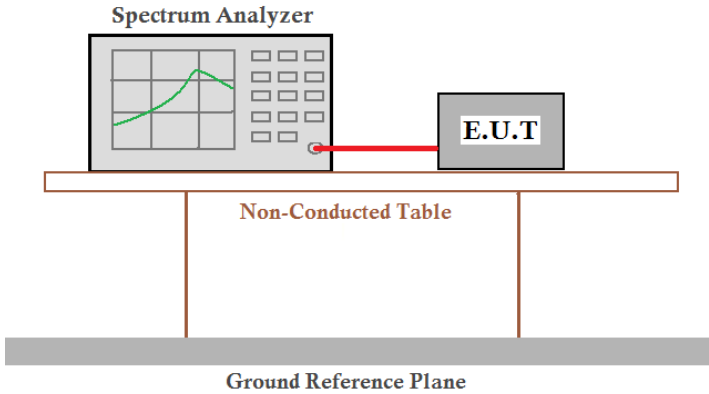
| | |
|-------------------|--|
| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) |
| Test Method: | ANSI C63.10:2013 |
| Receiver setup: | RBW=1MHz, VBW=1MHz, Span=0Hz, Detector=Peak |
| Limit: | 0.4 Second |
| Test setup: |  |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement Data

The EUT was tested in GFSK, $\pi/4$ -DQPSK and 8DPSK modulation, and found the GFSK modulation is the worst case, only show the worst case.

| Frequency | Packet | Dwell time(ms) | Limit(ms) | Result |
|-----------|--------|----------------|-----------|--------|
| 2441MHz | DH1 | 128.64 | 400 | Pass |
| 2441MHz | DH3 | 273.60 | 400 | Pass |
| 2441MHz | DH5 | 317.44 | 400 | Pass |

The test period: $T = 0.4 \text{ Second/Channel} \times 79 \text{ Channel} = 31.6 \text{ s}$

Test channel: 2402MHz/2441MHz/2480MHz as blow


DH1 time slot = $0.402(\text{ms}) \times (1600 / (2 \times 79)) \times 31.6 = 128.64\text{ms}$

DH3 time slot = $1.710(\text{ms}) \times (1600 / (4 \times 79)) \times 31.6 = 273.60\text{ms}$


DH5 time slot = $2.976(\text{ms}) \times (1600 / (6 \times 79)) \times 31.6 = 317.44\text{ms}$

Test plot as follows:


Test channel: 2441MHz

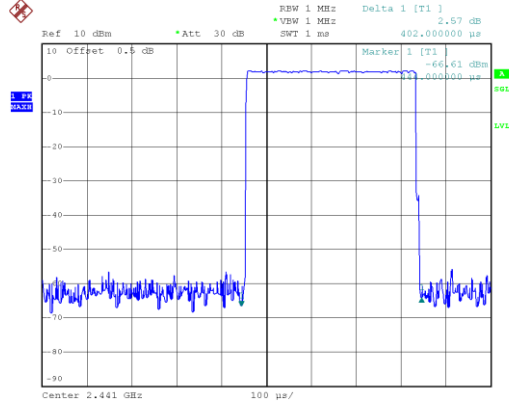

DH1

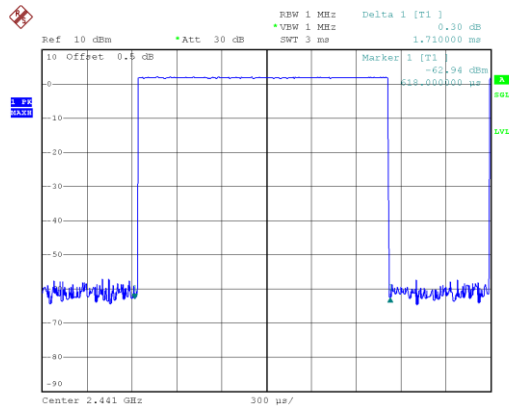

DH3

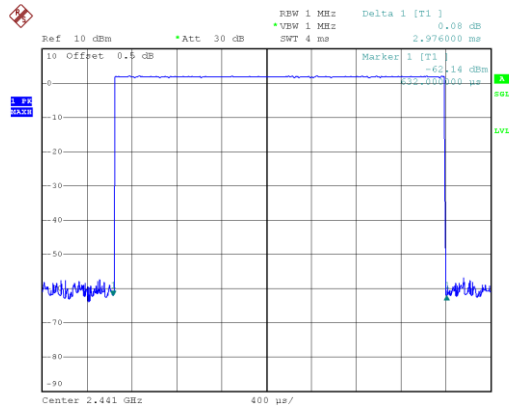


DH5

7.7 Pseudorandom Frequency Hopping Sequence

| Test Requirement: | FCC Part15 C Section 15.247 (a)(1) requirement: |
|--|---|
| <p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p> | |
| EUT Pseudorandom Frequency Hopping Sequence | |
| <p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> • Number of shift register stages: 9 • Length of pseudo-random sequence: $2^9 - 1 = 511$ bits • Longest sequence of zeros: 8 (non-inverted signal) <div data-bbox="244 1016 1297 1167" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="244 1267 1240 1417" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter.</p> <p>The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p> | |

7.8 Band Edge


7.8.1 Conducted Emission Method
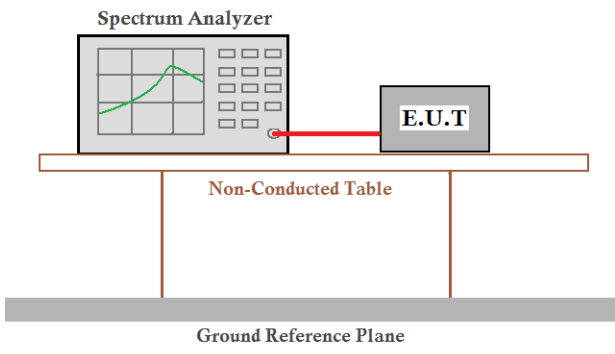
| | |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | ANSI C63.10:2013 |
| Receiver setup: | RBW=100kHz, VBW=300kHz, Detector=Peak |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |


Test plot as follows:

GFSK Mode:

| | |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

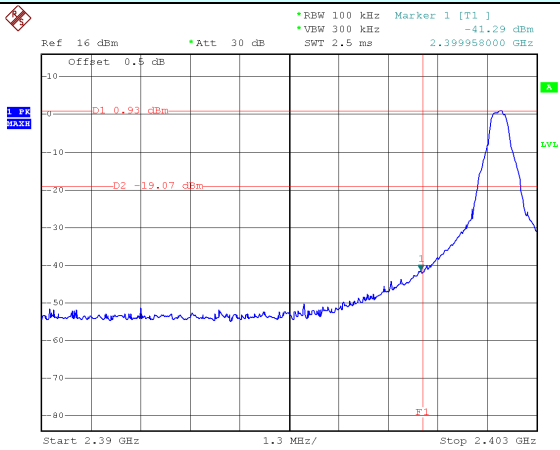


No-hopping mode

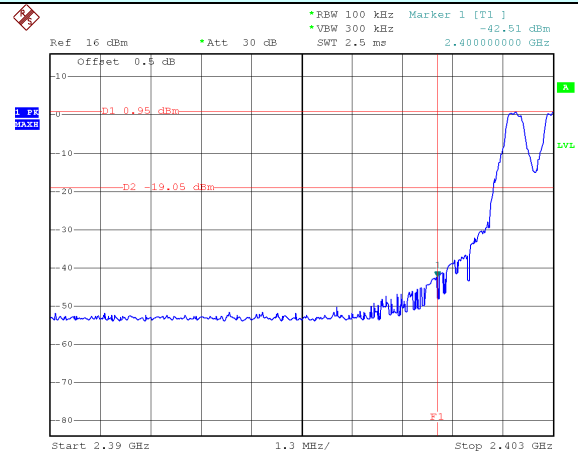


Hopping mode

| | |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

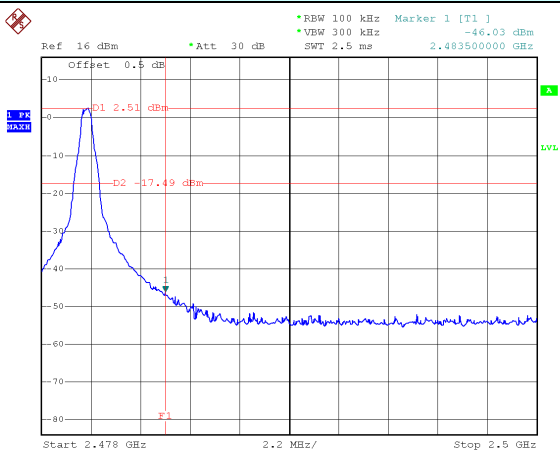


No-hopping mode

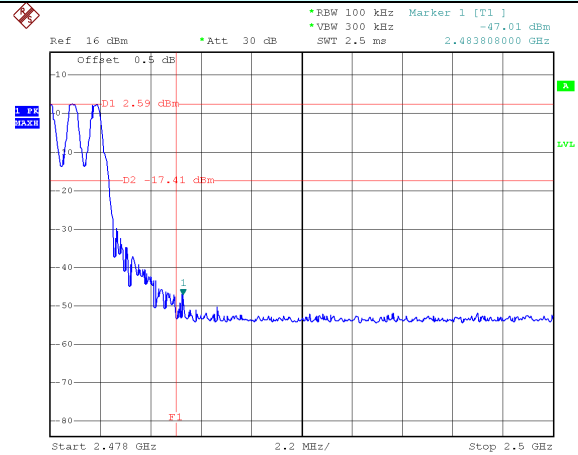


Hopping mode

Pi/4QPSK Mode:

| | |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

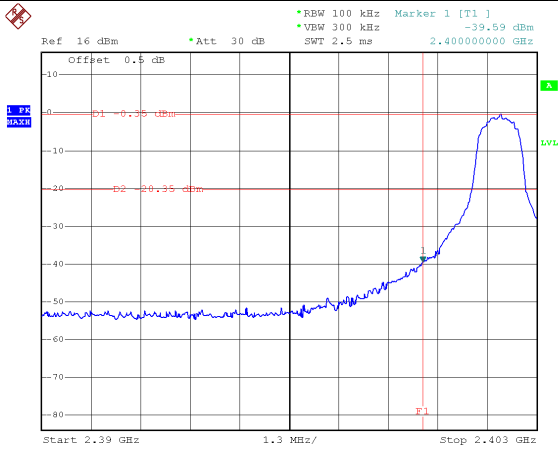


No-hopping mode

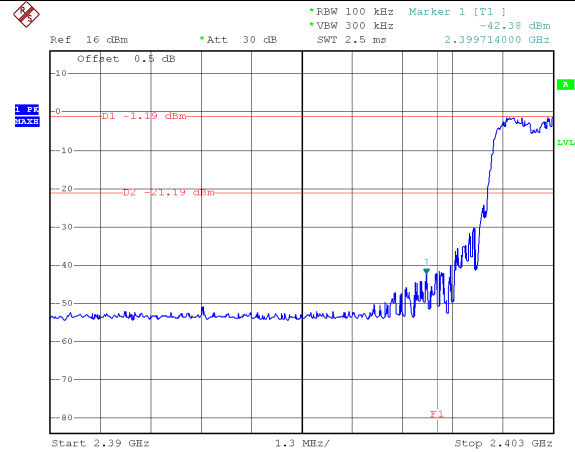


Hopping mode

| | |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

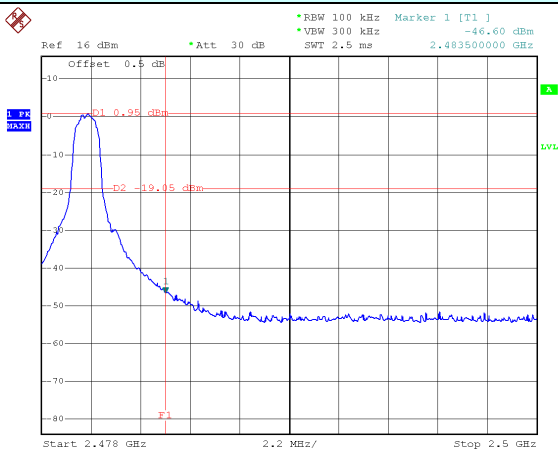


No-hopping mode

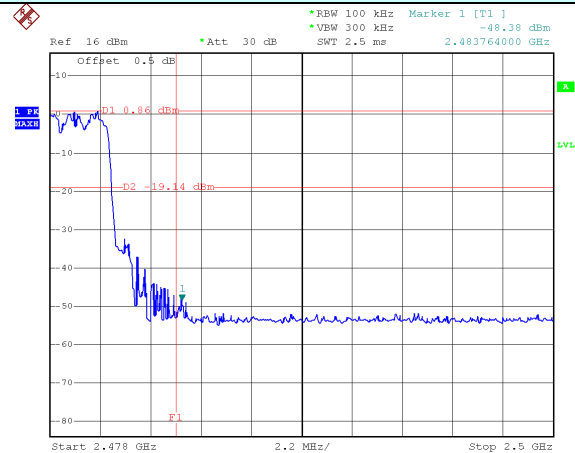


Hopping mode

8DPSK Mode:

| | |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

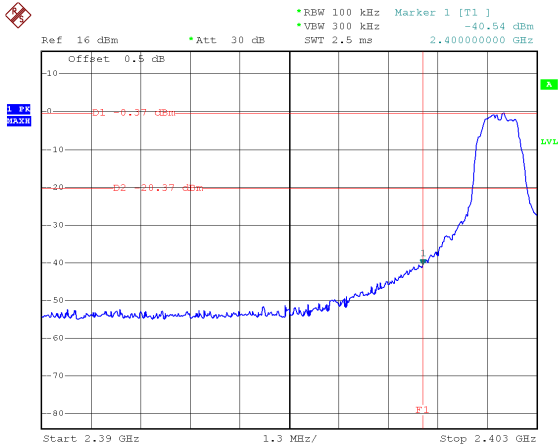


No-hopping mode

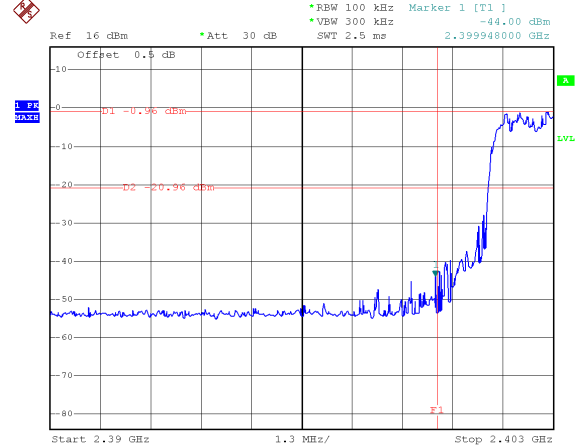


Hopping mode

| | |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

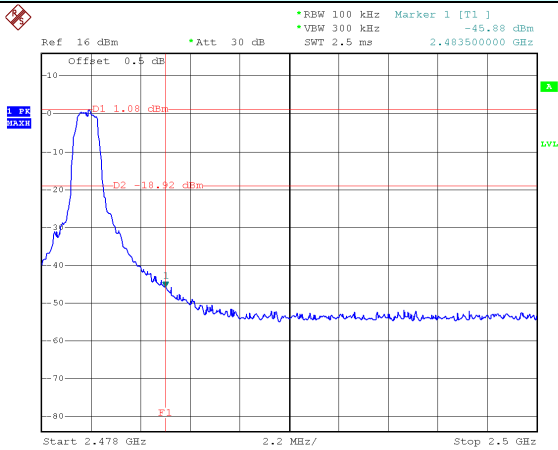

No-hopping mode

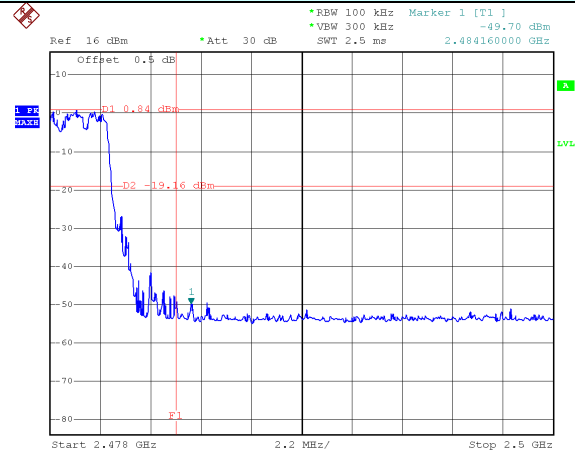

Hopping mode

7.8.2 Radiated Emission Method

| | | | | | |
|-----------------------|---|----------|--------------------|------|---------------|
| Test Requirement: | FCC Part15 C Section 15.209 and 15.205 | | | | |
| Test Method: | ANSI C63.10:2013 | | | | |
| Test Frequency Range: | All restriction band have been tested, and 2310MHz to 2390MHz, 2483.5MHz to 2500MHz band is the worse case | | | | |
| Test site: | Measurement Distance: 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Remark |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value |
| | | Peak | 1MHz | 10Hz | Average Value |
| Limit: | Frequency | | Limit (dBuV/m @3m) | | Remark |
| | Above 1GHz | | 54.00 | | Average Value |
| | | | 74.00 | | Peak Value |
| Test setup: | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 1.5 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. | | | | |
| Test Instruments: | Refer to section 6.0 for details | | | | |
| Test mode: | Refer to section 5.2 for details | | | | |
| Test results: | Pass | | | | |

Remark:

1. During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

| | |
|---------------|--------|
| Test channel: | Lowest |
|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2310.00 | 54.32 | -15.12 | 39.20 | 74.00 | -34.80 | Horizontal |
| 2390.00 | 55.29 | -15.05 | 40.24 | 74.00 | -33.76 | Horizontal |
| 2310.00 | 53.27 | -15.12 | 38.15 | 74.00 | -35.85 | Vertical |
| 2390.00 | 55.04 | -15.05 | 39.99 | 74.00 | -34.01 | Vertical |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2310.00 | 43.69 | -15.12 | 28.57 | 54.00 | -25.43 | Horizontal |
| 2390.00 | 41.10 | -15.05 | 26.05 | 54.00 | -27.95 | Horizontal |
| 2310.00 | 42.53 | -15.12 | 27.41 | 54.00 | -26.59 | Vertical |
| 2390.00 | 41.29 | -15.05 | 26.24 | 54.00 | -27.76 | Vertical |

| | |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 71.74 | -14.68 | 57.06 | 74.00 | -16.94 | Horizontal |
| 2500.00 | 54.76 | -14.60 | 40.16 | 74.00 | -33.84 | Horizontal |
| 2483.50 | 73.39 | -14.68 | 58.71 | 74.00 | -15.29 | Vertical |
| 2500.00 | 53.94 | -14.60 | 39.34 | 74.00 | -34.66 | Vertical |

Average value:


| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 2483.50 | 52.33 | -14.68 | 37.65 | 54.00 | -16.35 | Horizontal |
| 2500.00 | 40.77 | -14.60 | 26.17 | 54.00 | -27.83 | Horizontal |
| 2483.50 | 53.41 | -14.68 | 38.73 | 54.00 | -15.27 | Vertical |
| 2500.00 | 40.93 | -14.60 | 26.33 | 54.00 | -27.67 | Vertical |

Remark:

1. Final Level = Receiver Read level + Correct factor
2. The emission levels of other frequencies are very lower than the limit and not show in test report.
3. Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor

7.9 Spurious Emission


7.9.1 Conducted Emission Method
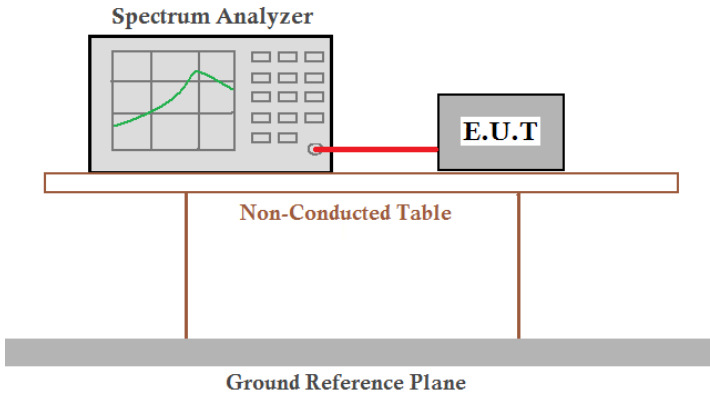
| | |
|-------------------|---|
| Test Requirement: | FCC Part15 C Section 15.247 (d) |
| Test Method: | ANSI C63.10:2013 |
| Limit: | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. |
| Test setup: |  <p>The diagram illustrates the test setup. A Spectrum Analyzer is connected to an E.U.T. (Equipment Under Test) via a red cable. Both are placed on a Non-Conducted Table, which is supported by two legs. Below the table is a Ground Reference Plane.</p> |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Remark:


During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.

| | |
|---------------|----------------|
| Test channel: | Lowest channel |
|---------------|----------------|

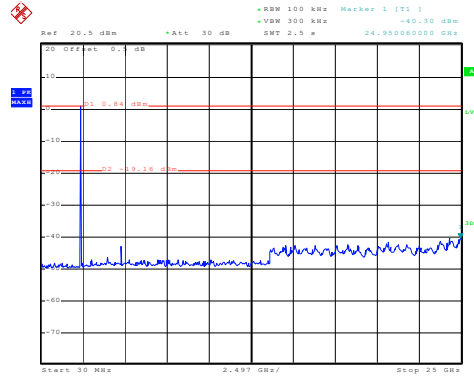


30MHz~25GHz

| | |
|---------------|----------------|
| Test channel: | Middle channel |
|---------------|----------------|

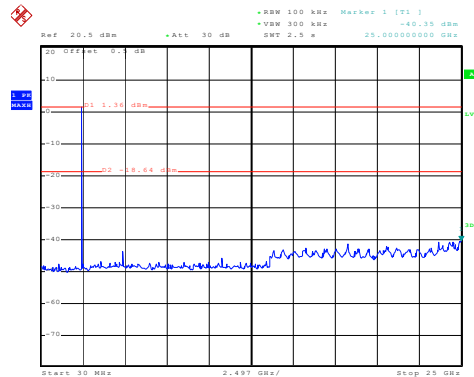

30MHz~25GHz




| | |
|---------------|-----------------|
| Test channel: | Highest channel |
|---------------|-----------------|

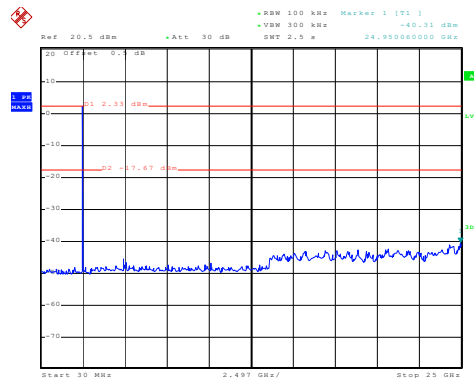

30MHz~25GHz

7.9.2 Radiated Emission Method

| | | | | | |
|--------------------------------|--|--------------|---------|----------------------|------------|
| Test Requirement: | FCC Part15 C Section 15.209 | | | | |
| Test Method: | ANSI C63.10:2013 | | | | |
| Test Frequency Range: | 9kHz to 25GHz | | | | |
| Test site: | Measurement Distance: 3m | | | | |
| Receiver setup: | Frequency | Detector | RBW | VBW | Value |
| | 9KHz-150KHz | Quasi-peak | 200Hz | 600Hz | Quasi-peak |
| | 150KHz-30MHz | Quasi-peak | 9KHz | 30KHz | Quasi-peak |
| | 30MHz-1GHz | Quasi-peak | 100KHz | 300KHz | Quasi-peak |
| | Above 1GHz | Peak | 1MHz | 3MHz | Peak |
| Peak | | 1MHz | 10Hz | Average | |
| Limit: (Spurious Emissions) | Frequency | Limit (uV/m) | Value | Measurement Distance | |
| | 0.009MHz-0.490MHz | 2400/F(KHz) | QP | 300m | |
| | 0.490MHz-1.705MHz | 24000/F(KHz) | QP | 300m | |
| | 1.705MHz-30MHz | 30 | QP | 30m | |
| | 30MHz-88MHz | 100 | QP | 3m | |
| | 88MHz-216MHz | 150 | QP | | |
| | 216MHz-960MHz | 200 | QP | | |
| | 960MHz-1GHz | 500 | QP | | |
| | Above 1GHz | 500 | Average | | |
| 5000 | | Peak | | | |
| Limit: (band edge) | Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation. | | | | |
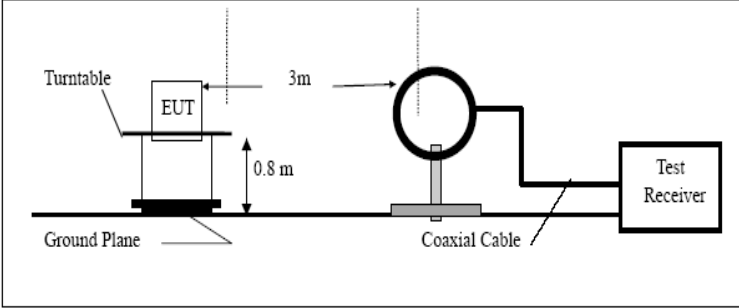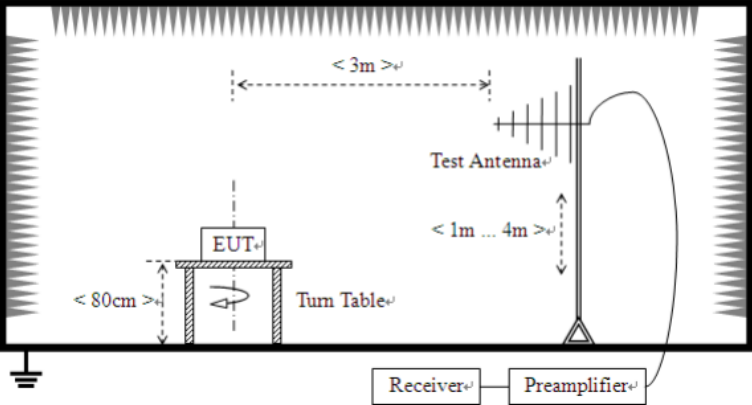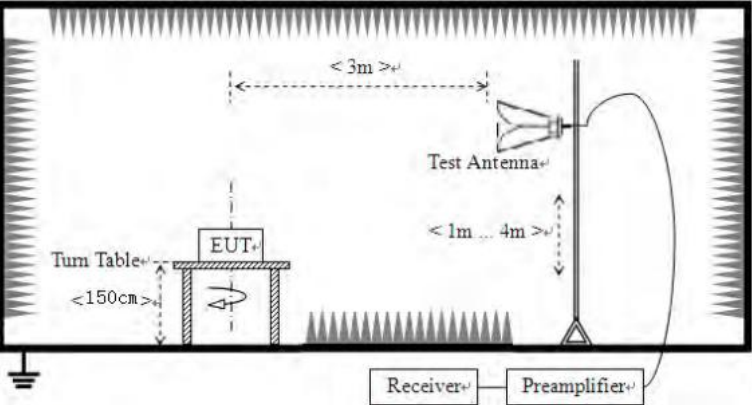
| | |
|------------------------|--|
| <p>Test setup:</p> | <p>Below 30MHz</p>  <p>Below 1GHz</p>  <p>Above 1GHz</p>  |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table (0.8m for below 1G and 1.5m for above 1G) above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. |

| | |
|-------------------|--|
| | <ol style="list-style-type: none"> 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| Test Instruments: | Refer to section 6.0 for details |
| Test mode: | Refer to section 5.2 for details |
| Test results: | Pass |

Measurement data:

Remark:


1. *During the test, pre-scan the GFSK, Pi/4QPSK, 8DPSK modulation, and found the GFSK modulation which it is worse case.*
2. *Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis which it is worse case.*

■ **9 kHz ~ 30 MHz**

The low frequency, which started from 9 kHz to 30 MHz, was pre-scanned and the result which was 20 dB lower than the limit line per 15.31(o) was not reported.


■ Below 1GHz

| | | | |
|-------------------------|------------------------------|----------------------|--------------------|
| EUT: | Car Multimedia Player | Polarziation: | Horizontal |
| Model: | VX3518 | Power Source: | AC120V/60Hz |
| Mode: | BT mode | Test by: | Jason |
| Temp./Hum.(%RH): | 26°C/60%RH | | |

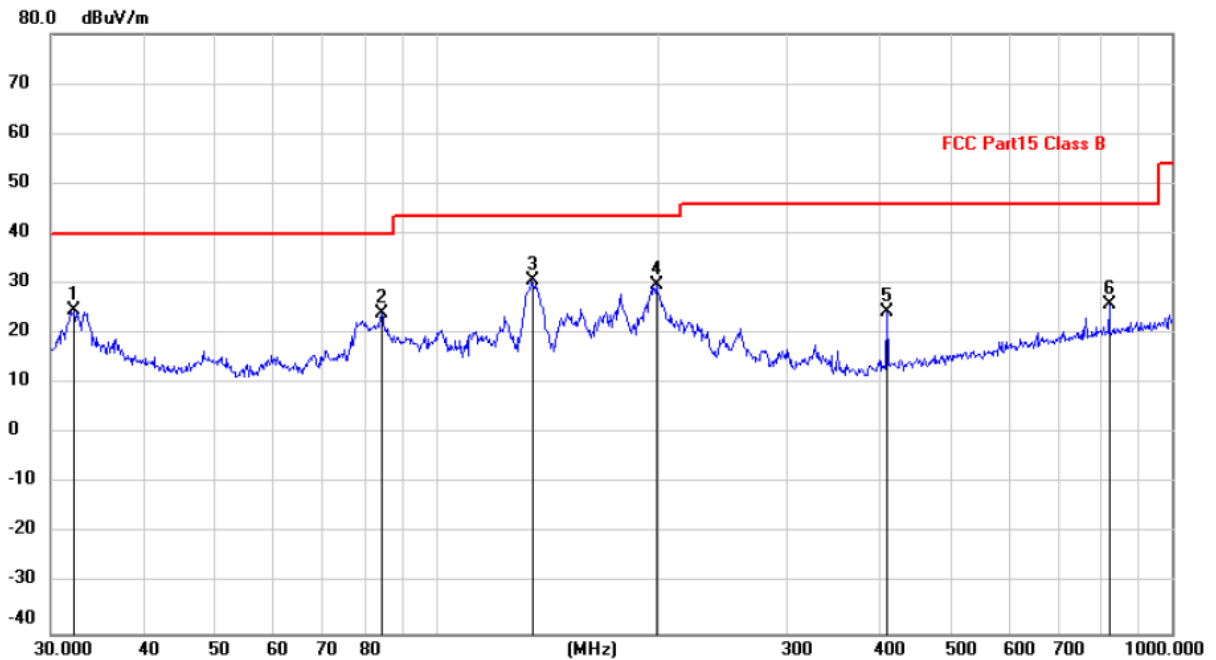

| No. | Mk. | Freq. MHz | Reading Level dBuV | Correct Factor dB | Measure- ment dBuV/m | Limit dBuV/m | Over dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|----------|
| 1 | | 32.2924 | 57.60 | -32.99 | 24.61 | 40.00 | -15.39 | QP |
| 2 | | 84.4054 | 63.01 | -39.02 | 23.99 | 40.00 | -16.01 | QP |
| 3 | * | 135.0319 | 66.12 | -35.56 | 30.56 | 43.50 | -12.94 | QP |
| 4 | | 199.2855 | 68.49 | -38.73 | 29.76 | 43.50 | -13.74 | QP |
| 5 | | 410.3824 | 56.59 | -32.17 | 24.42 | 46.00 | -21.58 | QP |
| 6 | | 821.7103 | 50.57 | -24.79 | 25.78 | 46.00 | -20.22 | QP |

| | | | |
|-------------------------|------------------------------|----------------------|--------------------|
| EUT: | Car Multimedia Player | Polarization: | Vertical |
| Model: | VX3518 | Power Source: | AC120V/60Hz |
| Mode: | BT mode | Test by: | Jason |
| Temp./Hum.(%RH): | 26°C/60%RH | | |

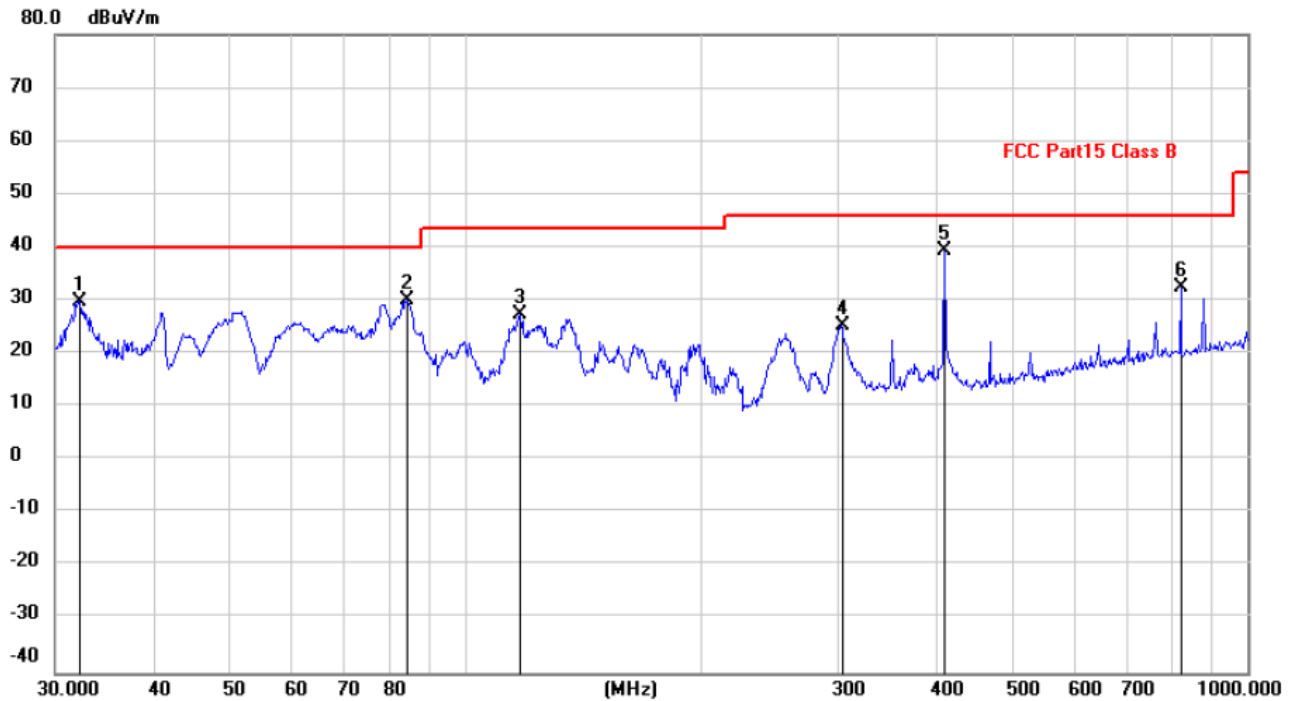

| No. | Mk. | Freq. | Reading Level | Correct Factor | Measurement | Limit | Over | Detector |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|
| | | MHz | dBuV | dB | dBuV/m | dBuV/m | dB | |
| 1 | | 32.1794 | 62.74 | -32.98 | 29.76 | 40.00 | -10.24 | QP |
| 2 | | 84.4054 | 68.97 | -39.02 | 29.95 | 40.00 | -10.05 | QP |
| 3 | | 117.7724 | 64.17 | -36.74 | 27.43 | 43.50 | -16.07 | QP |
| 4 | | 302.4812 | 60.11 | -34.90 | 25.21 | 46.00 | -20.79 | QP |
| 5 | * | 410.3824 | 71.53 | -32.17 | 39.36 | 46.00 | -6.64 | QP |
| 6 | | 821.7103 | 57.31 | -24.79 | 32.52 | 46.00 | -13.48 | QP |

■ Above 1GHz

| | |
|---------------|--------|
| Test channel: | Lowest |
|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4804.00 | 59.81 | -7.43 | 52.38 | 74.00 | -21.62 | Vertical |
| 7206.00 | 57.45 | -2.42 | 55.03 | 74.00 | -18.97 | Vertical |
| 9608.00 | 57.30 | -2.38 | 54.92 | 74.00 | -19.08 | Vertical |
| 12010.00 | * | | | 74.00 | | Vertical |
| 14412.00 | * | | | 74.00 | | Vertical |
| 4804.00 | 60.76 | -7.43 | 53.33 | 74.00 | -20.67 | Horizontal |
| 7206.00 | 58.34 | -2.42 | 55.92 | 74.00 | -18.08 | Horizontal |
| 9608.00 | 57.23 | -2.38 | 54.85 | 74.00 | -19.15 | Horizontal |
| 12010.00 | * | | | 74.00 | | Horizontal |
| 14412.00 | * | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4804.00 | 47.90 | -7.43 | 40.47 | 54.00 | -13.53 | Vertical |
| 7206.00 | 46.32 | -2.42 | 43.90 | 54.00 | -10.1 | Vertical |
| 9608.00 | 45.09 | -2.38 | 42.71 | 54.00 | -11.29 | Vertical |
| 12010.00 | * | | | 54.00 | | Vertical |
| 14412.00 | * | | | 54.00 | | Vertical |
| 4804.00 | 48.68 | -7.43 | 41.25 | 54.00 | -12.75 | Horizontal |
| 7206.00 | 47.58 | -2.42 | 45.16 | 54.00 | -8.84 | Horizontal |
| 9608.00 | 46.23 | -2.38 | 43.85 | 54.00 | -10.15 | Horizontal |
| 12010.00 | * | | | 54.00 | | Horizontal |
| 14412.00 | * | | | 54.00 | | Horizontal |

Remark:

1. *Final Level = Receiver Read level + Correct factor*
2. *Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Factor*
3. *“*”, means this data is too weak instrument of signal is unable to test.*
4. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

| | |
|---------------|--------|
| Test channel: | Middle |
|---------------|--------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4882.00 | 60.34 | -7.49 | 52.85 | 74.00 | -21.15 | Vertical |
| 7323.00 | 58.59 | -2.40 | 56.19 | 74.00 | -17.81 | Vertical |
| 9764.00 | 58.32 | -2.38 | 55.94 | 74.00 | -18.06 | Vertical |
| 12205.00 | * | | | 74.00 | | Vertical |
| 14646.00 | * | | | 74.00 | | Vertical |
| 4882.00 | 59.78 | -7.49 | 52.29 | 74.00 | -21.71 | Horizontal |
| 7323.00 | 58.34 | -2.40 | 55.94 | 74.00 | -18.06 | Horizontal |
| 9764.00 | 57.61 | -2.38 | 55.23 | 74.00 | -18.77 | Horizontal |
| 12205.00 | * | | | 74.00 | | Horizontal |
| 14646.00 | * | | | 74.00 | | Horizontal |

Average value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4882.00 | 51.27 | -7.49 | 43.78 | 54.00 | -10.22 | Vertical |
| 7323.00 | 47.84 | -2.40 | 45.44 | 54.00 | -8.56 | Vertical |
| 9764.00 | 48.15 | -2.38 | 45.77 | 54.00 | -8.23 | Vertical |
| 12205.00 | * | | | 54.00 | | Vertical |
| 14646.00 | * | | | 54.00 | | Vertical |
| 4882.00 | 48.13 | -7.49 | 40.64 | 54.00 | -13.36 | Horizontal |
| 7323.00 | 47.79 | -2.40 | 45.39 | 54.00 | -8.61 | Horizontal |
| 9764.00 | 49.01 | -2.38 | 46.63 | 54.00 | -7.37 | Horizontal |
| 12205.00 | * | | | 54.00 | | Horizontal |
| 14646.00 | * | | | 54.00 | | Horizontal |

Remark:

1. *Final Level = Receiver Read level + Correct factor*
2. *Correct factor = Antenna Factor + Cable Loss – Pre-amplifier Factor*
3. *“*”, means this data is too weak instrument of signal is unable to test.*
4. *The emission levels of other frequencies are very lower than the limit and not show in test report.*

| | |
|---------------|---------|
| Test channel: | Highest |
|---------------|---------|

Peak value:

| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4960.00 | 58.45 | -7.47 | 50.98 | 74.00 | -23.02 | Vertical |
| 7440.00 | 58.30 | -2.45 | 55.85 | 74.00 | -18.15 | Vertical |
| 9920.00 | 57.23 | -2.37 | 54.86 | 74.00 | -19.14 | Vertical |
| 12400.00 | * | | | 74.00 | | Vertical |
| 14880.00 | * | | | 74.00 | | Vertical |
| 4960.00 | 60.03 | -7.47 | 52.56 | 74.00 | -21.44 | Horizontal |
| 7440.00 | 59.41 | -2.45 | 56.96 | 74.00 | -17.04 | Horizontal |
| 9920.00 | 58.37 | -2.37 | 56.00 | 74.00 | -18.00 | Horizontal |
| 12400.00 | * | | | 74.00 | | Horizontal |
| 14880.00 | * | | | 74.00 | | Horizontal |

Average value:



| Frequency (MHz) | Read Level (dBuV) | Correct factor (dB/m) | Level (dBuV/m) | Limit Line (dBuV/m) | Over Limit (dB) | Polarization |
|-----------------|-------------------|-----------------------|----------------|---------------------|-----------------|--------------|
| 4960.00 | 47.71 | -7.47 | 40.24 | 54.00 | -13.76 | Vertical |
| 7440.00 | 48.03 | -2.45 | 45.58 | 54.00 | -8.42 | Vertical |
| 9920.00 | 48.45 | -2.37 | 46.08 | 54.00 | -7.92 | Vertical |
| 12400.00 | * | | | 54.00 | | Vertical |
| 14880.00 | * | | | 54.00 | | Vertical |
| 4960.00 | 51.32 | -7.47 | 43.85 | 54.00 | -10.15 | Horizontal |
| 7440.00 | 50.19 | -2.45 | 47.74 | 54.00 | -6.26 | Horizontal |
| 9920.00 | 47.88 | -2.37 | 45.51 | 54.00 | -8.49 | Horizontal |
| 12400.00 | * | | | 54.00 | | Horizontal |
| 14880.00 | * | | | 54.00 | | Horizontal |

Remark:



1. *Final Level = Receiver Read level + Correct factor*
2. *Correct factor = Antenna Factor + Cable Loss – Preamplifier Factor*
3. *“*”, means this data is the too weak instrument of signal is unable to test.*
4. *The emission levels of other frequencies are very lower than the limit and not show in test report.*


8 Test Setup Photo


Radiated Emission

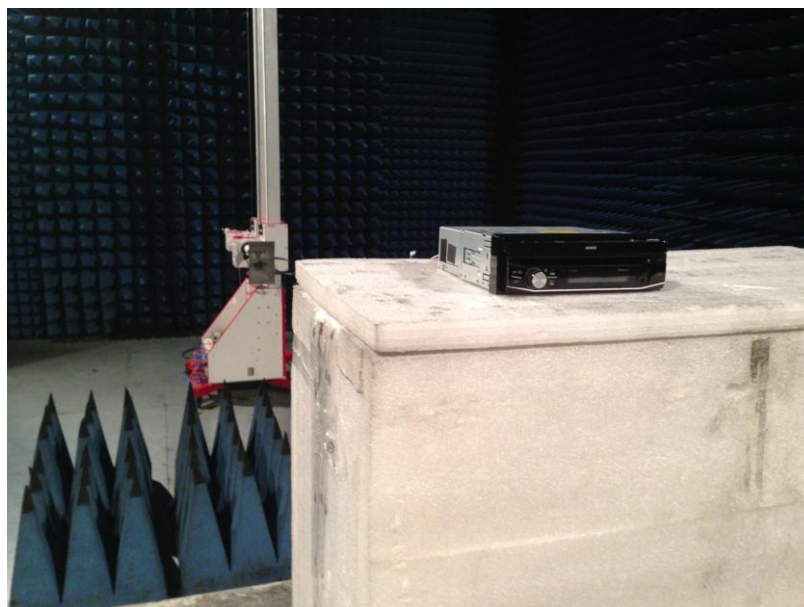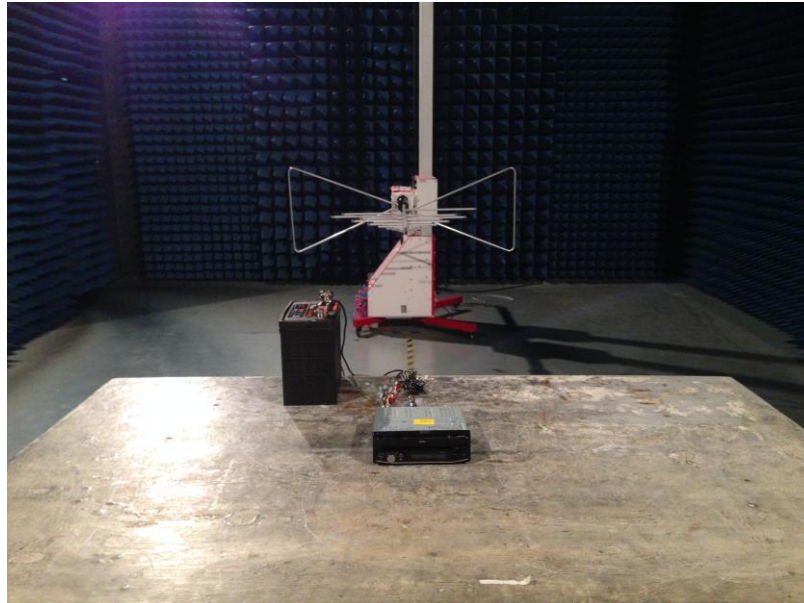




9 EUT Constructional Details

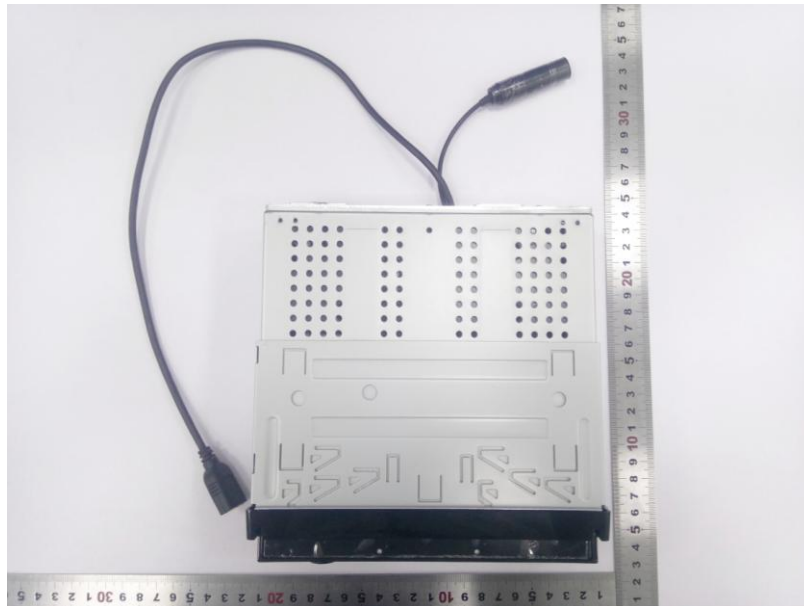
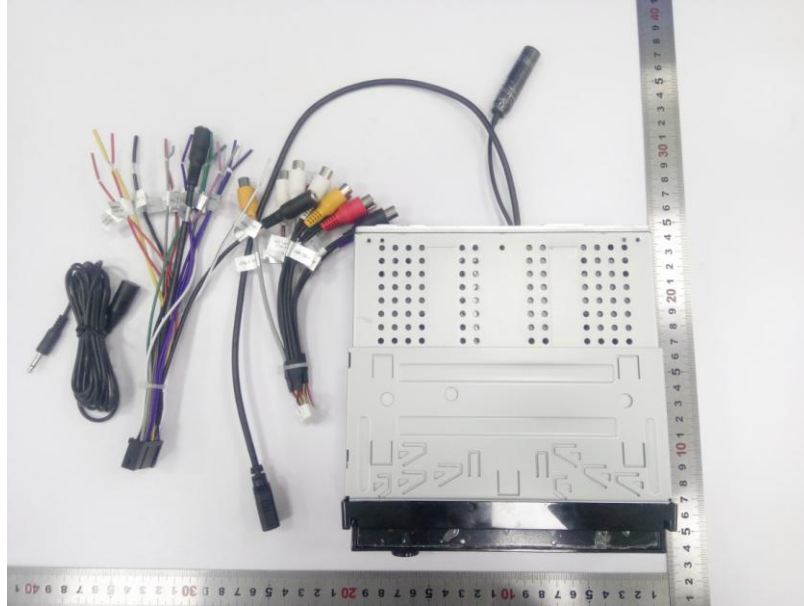


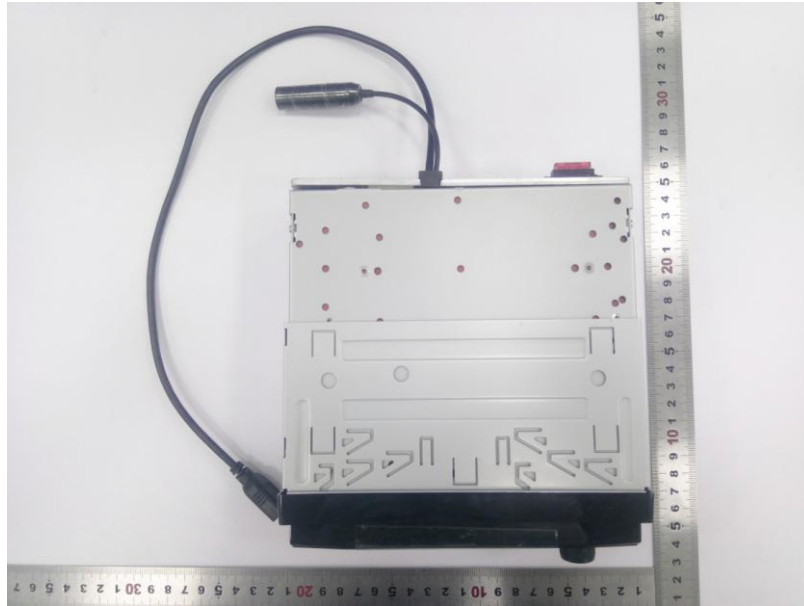



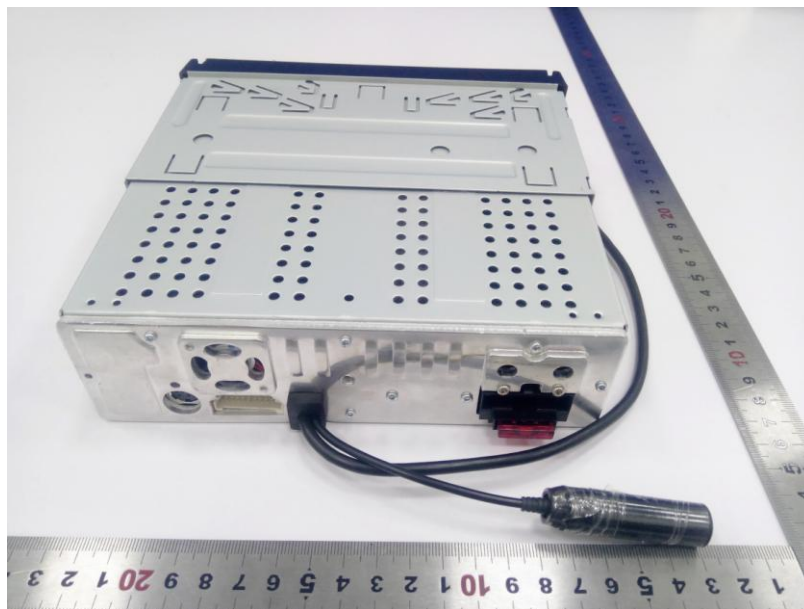



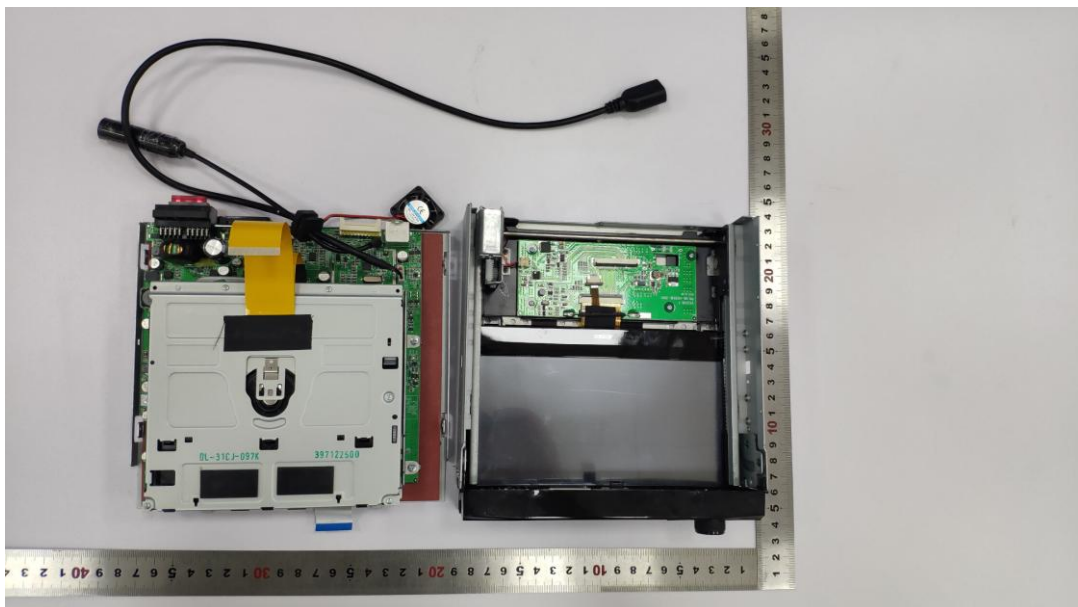


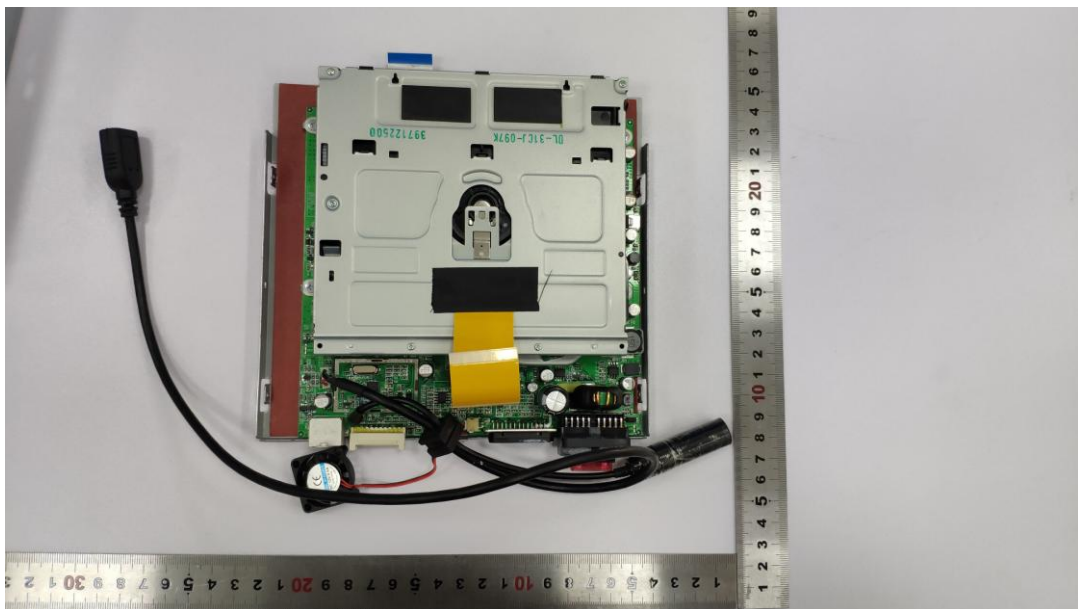
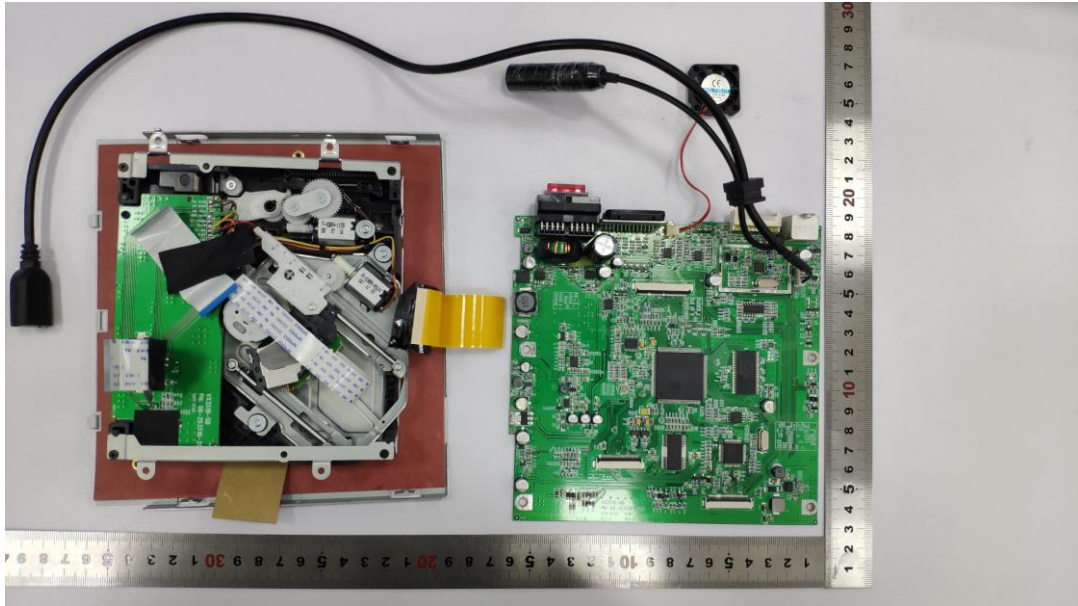


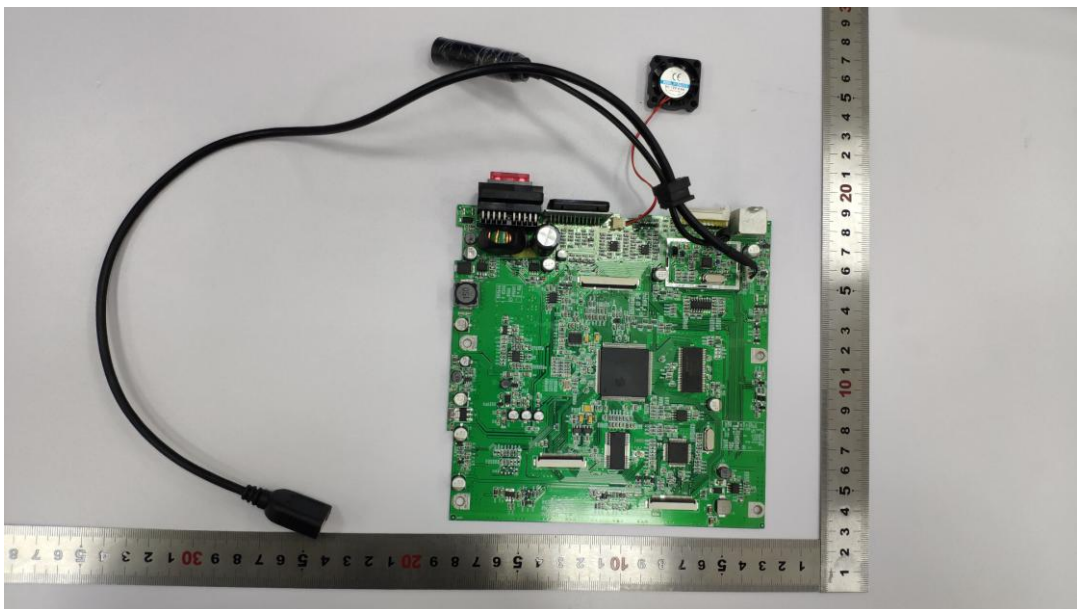
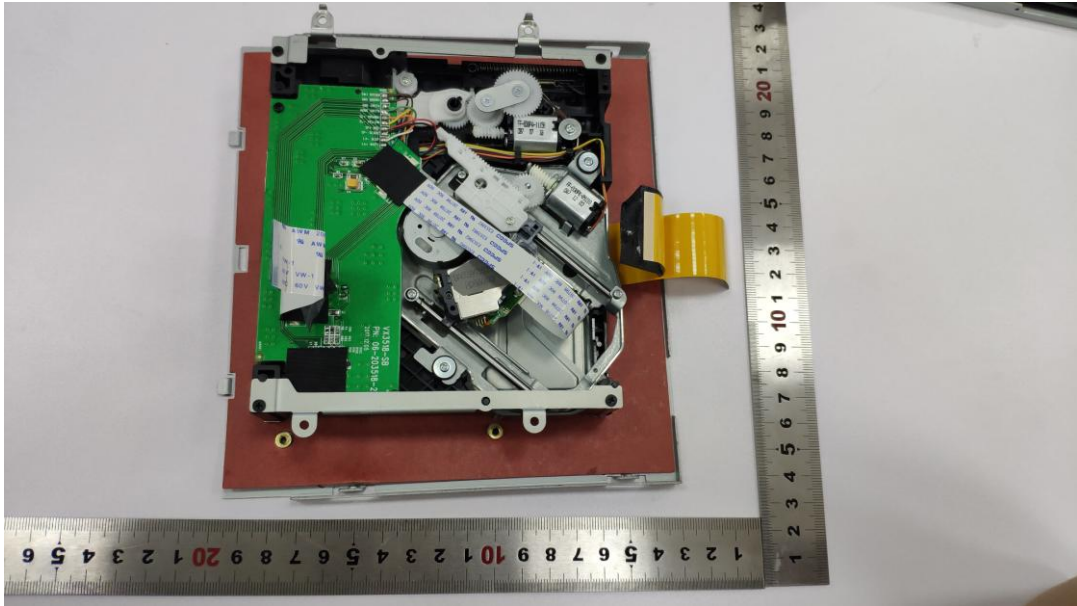



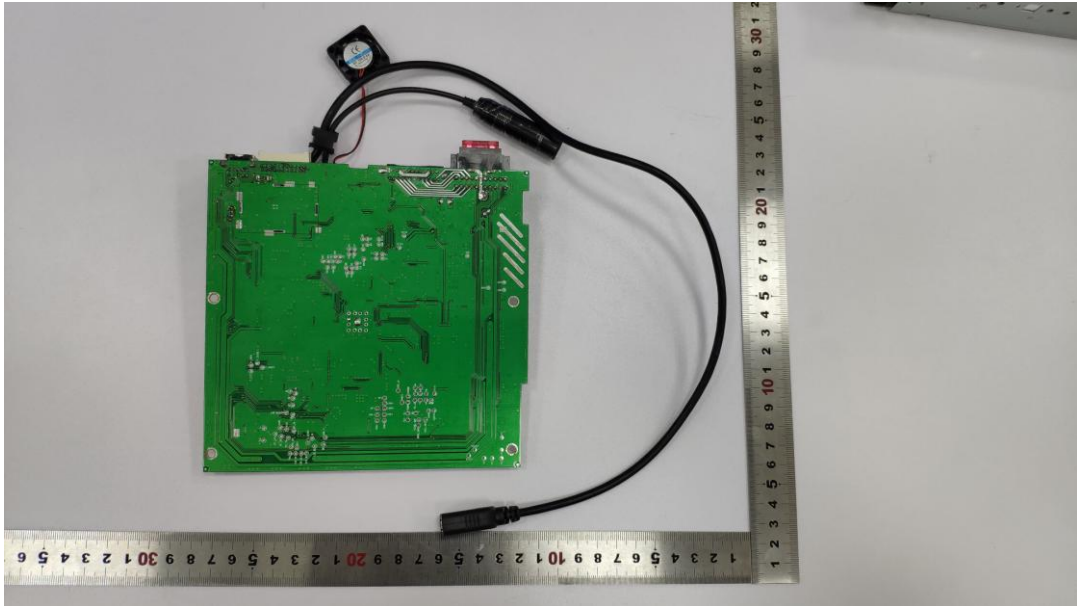


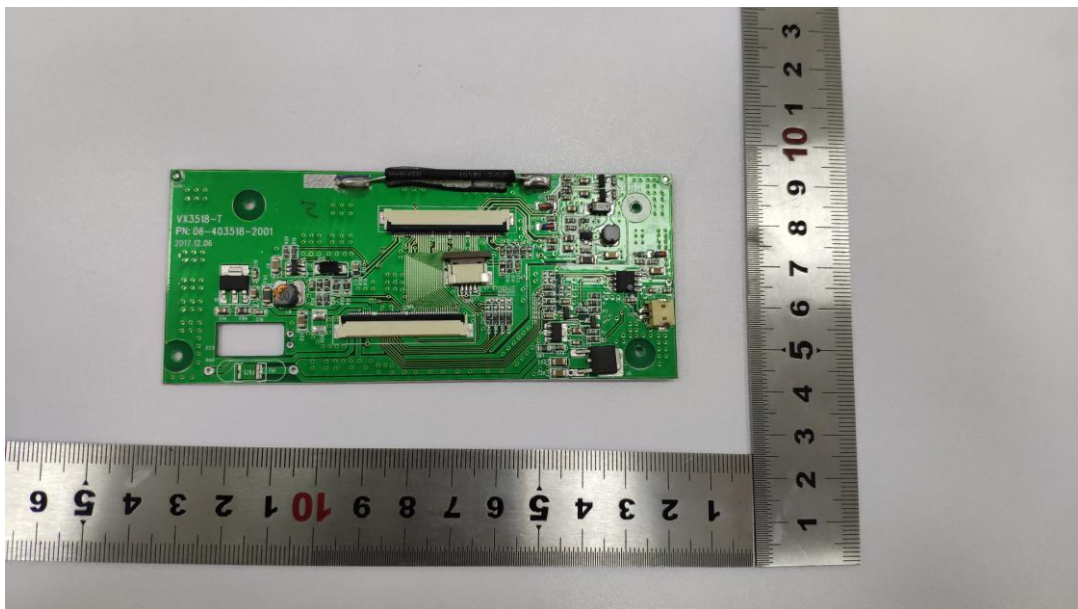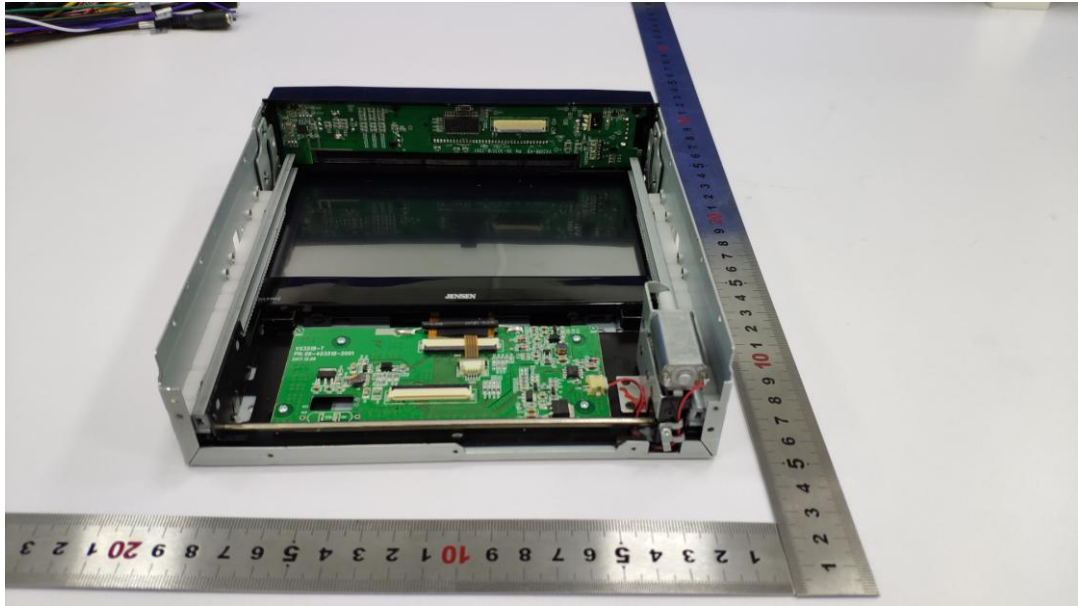

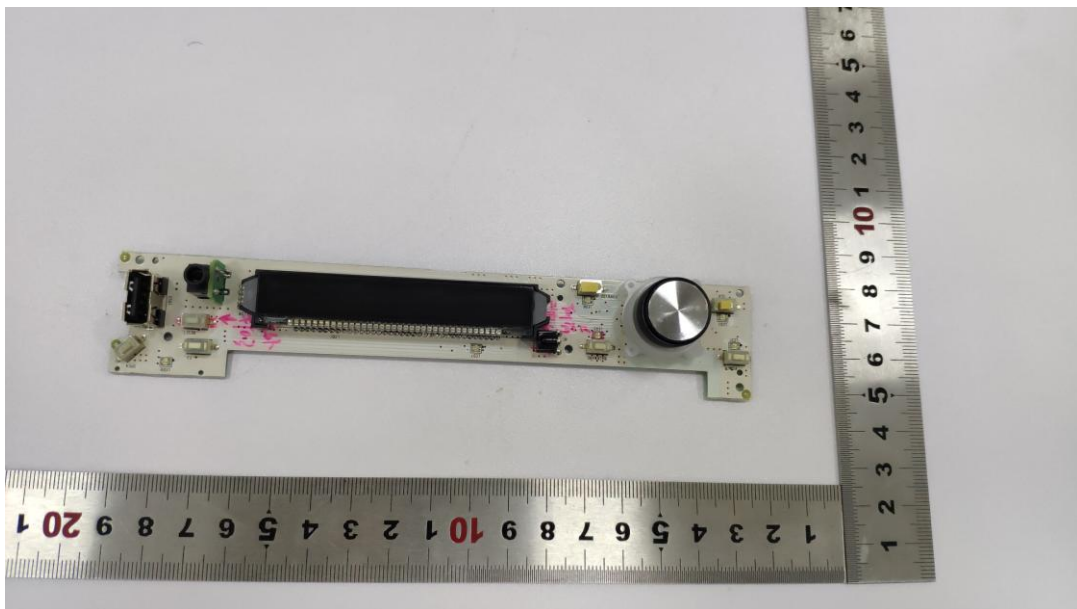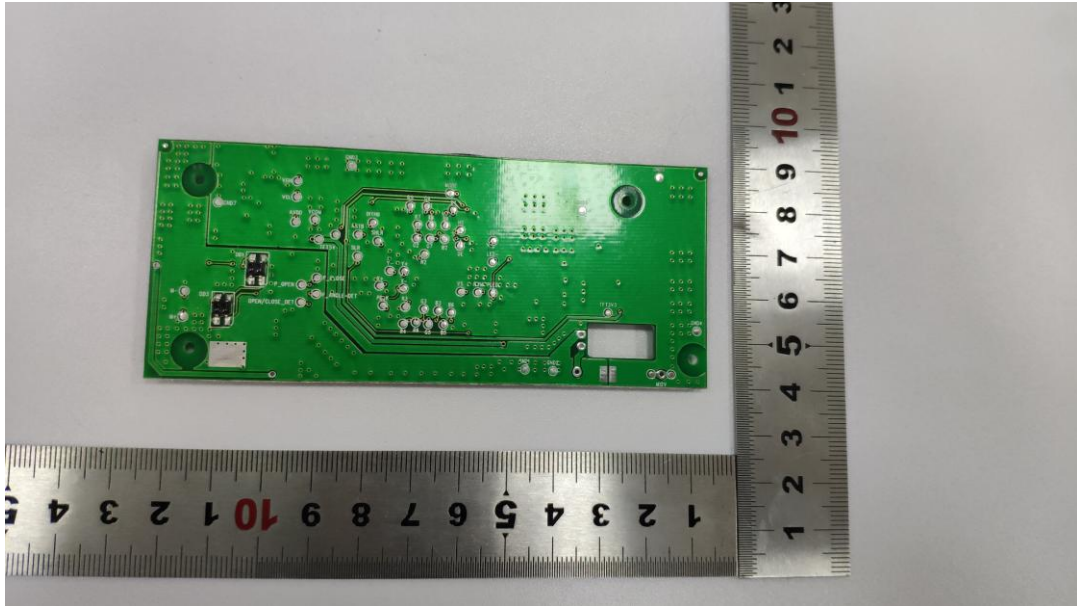

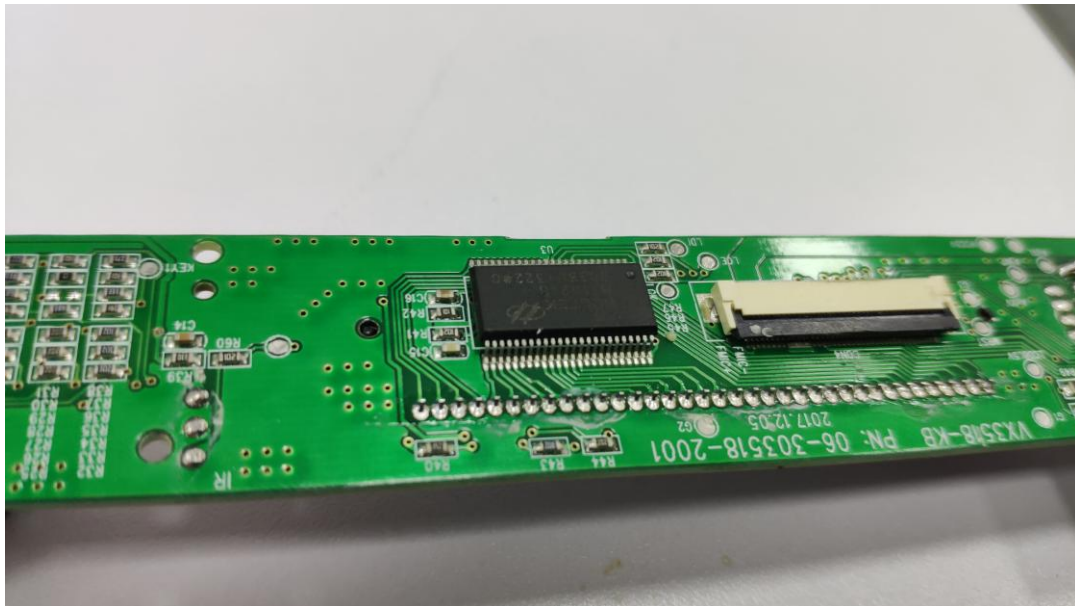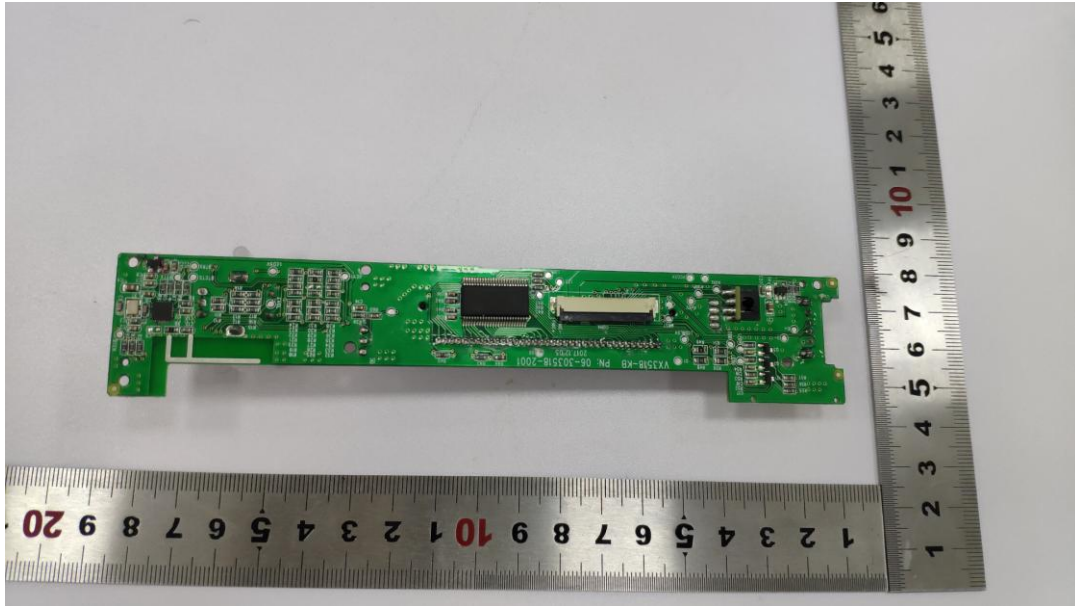

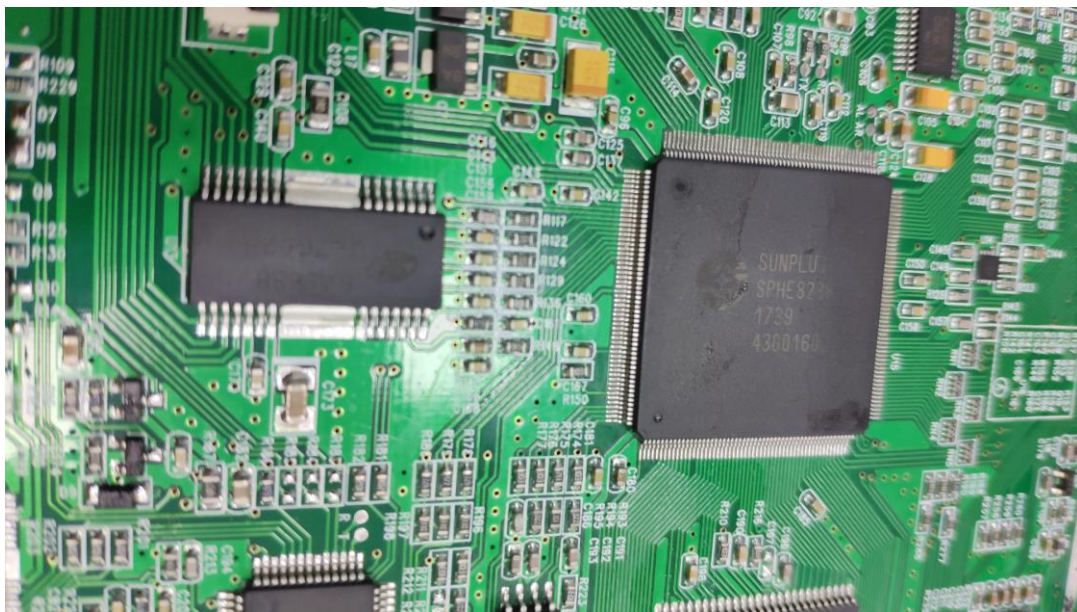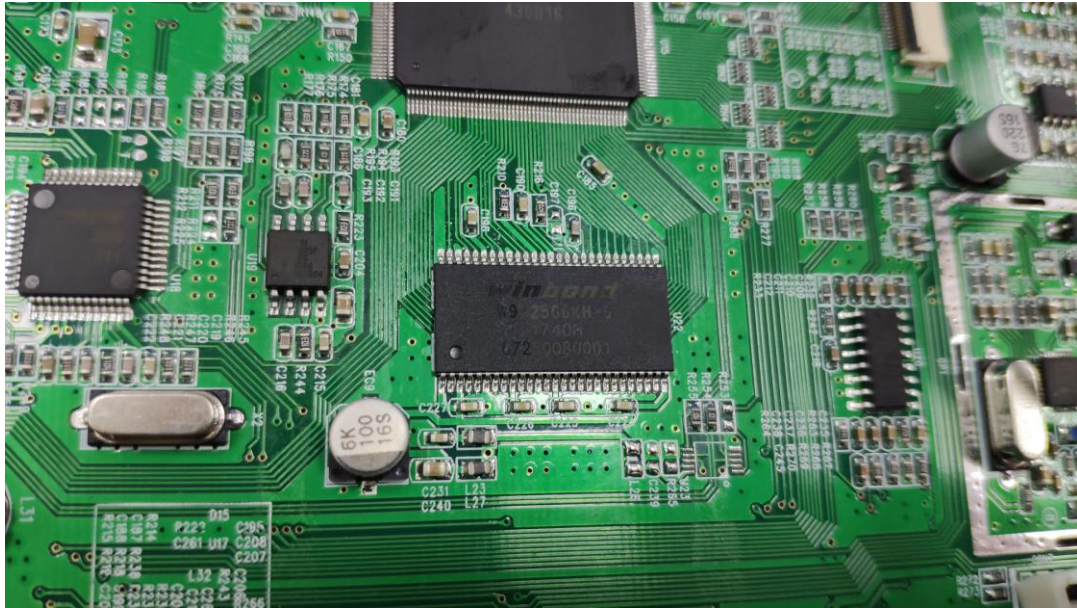

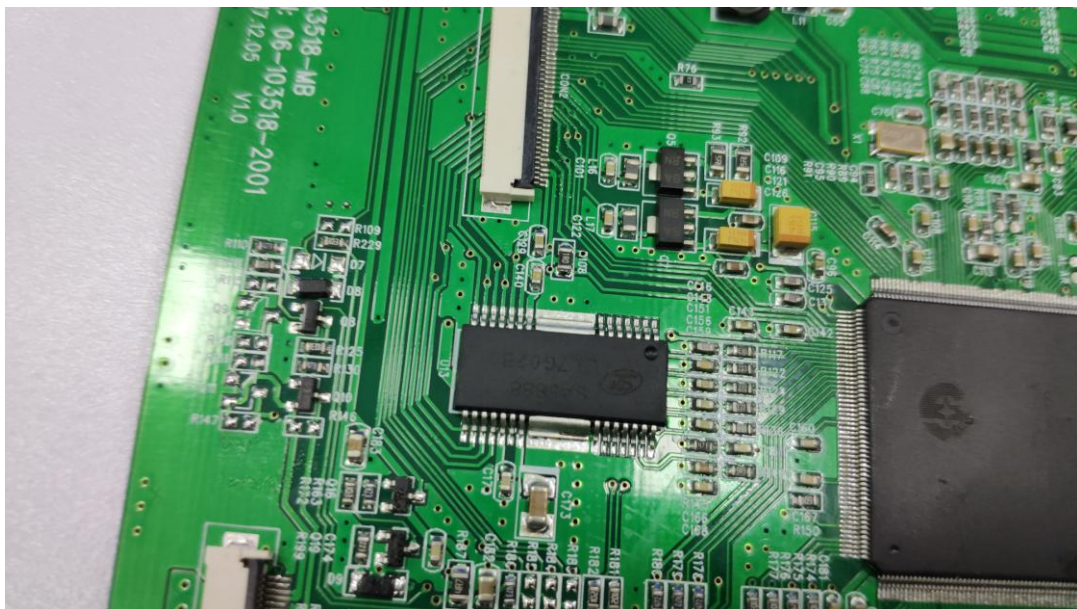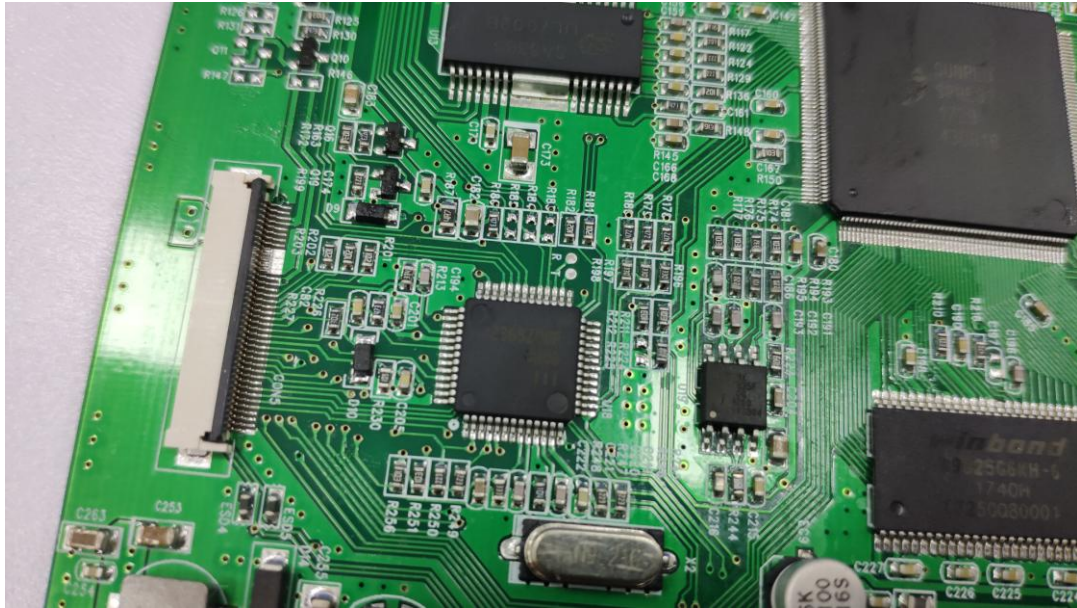

-----End-----