


15.4 TEST DATA

[TestMode: TX low channel]; [Polarity: Horizontal]

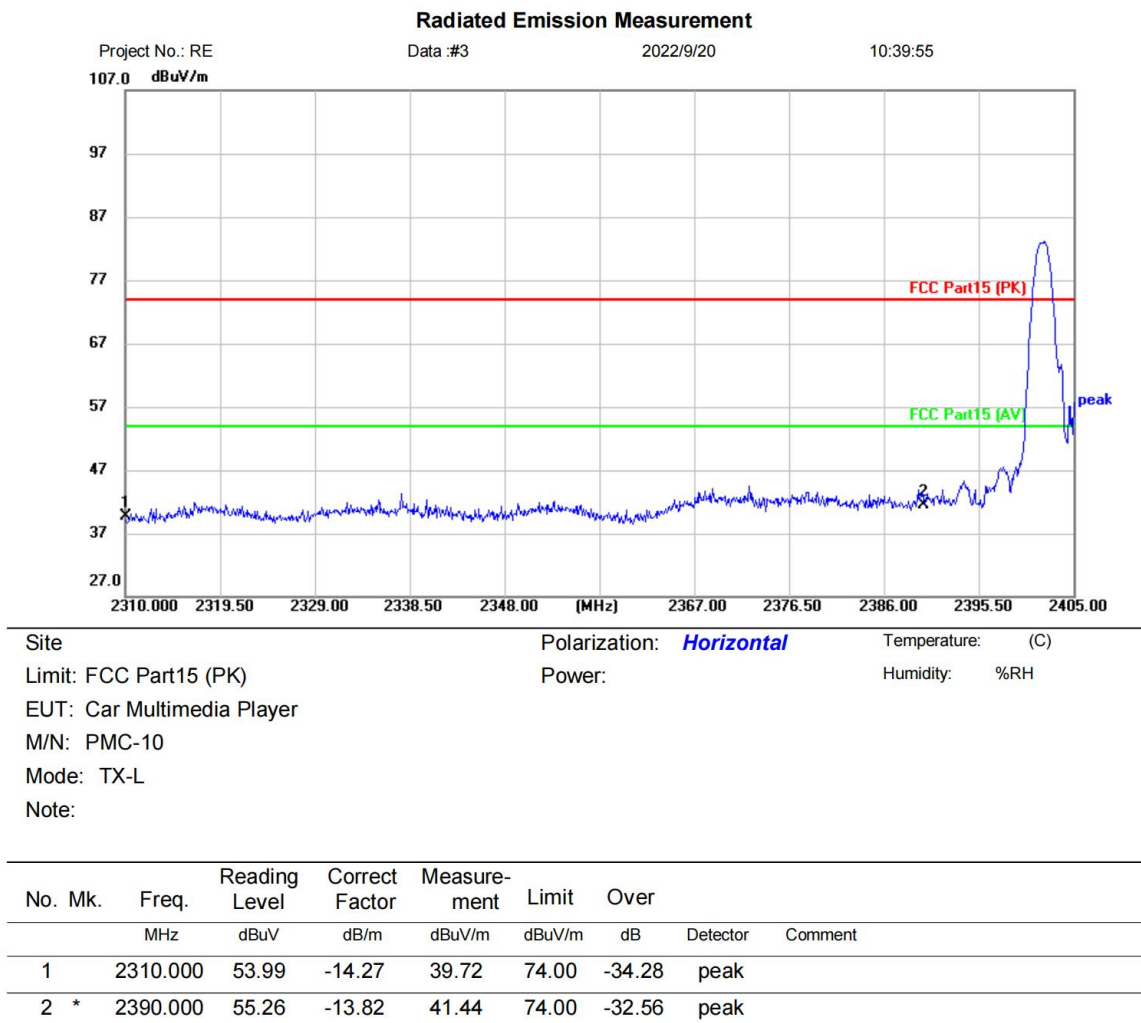


*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX low channel]; [Polarity: Vertical]

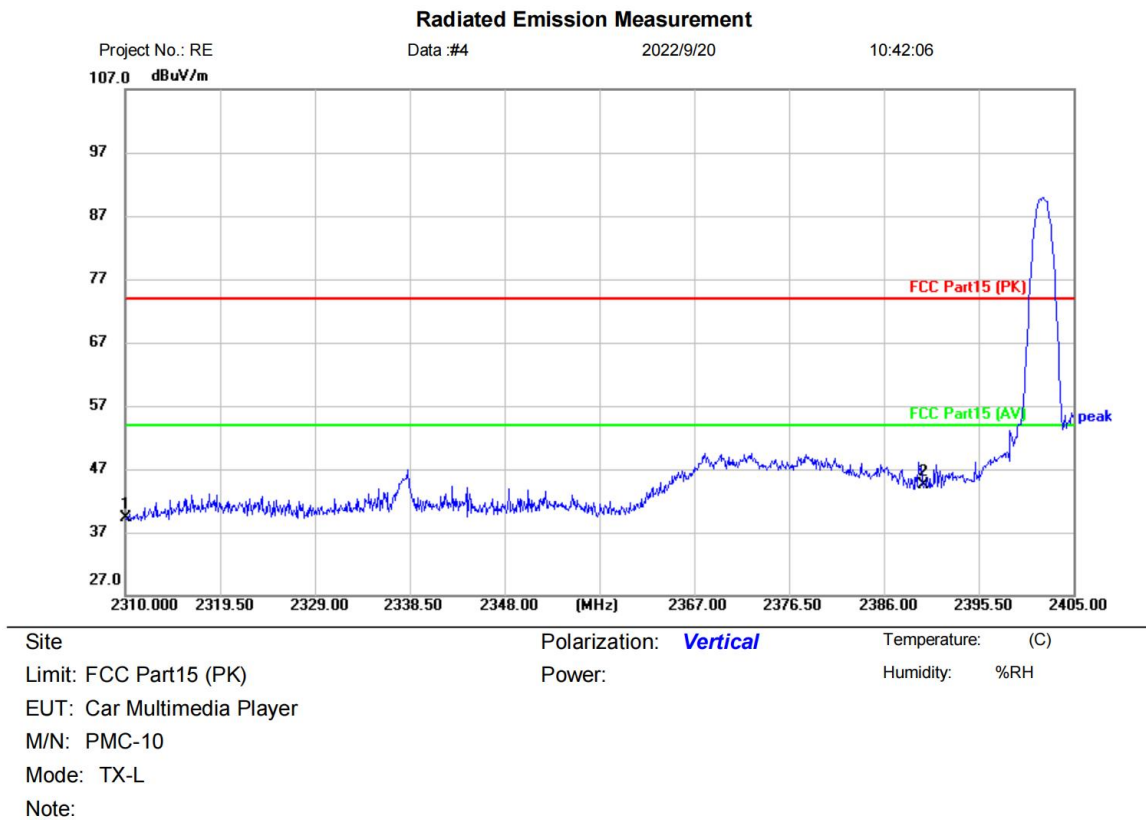


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB/m	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		2310.000	53.54	-14.27	39.27	74.00	-34.73	peak	
2	*	2390.000	58.40	-13.82	44.58	74.00	-29.42	peak	

*:Maximum data x:Over limit !:over margin

⟨Reference Only

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Horizontal]

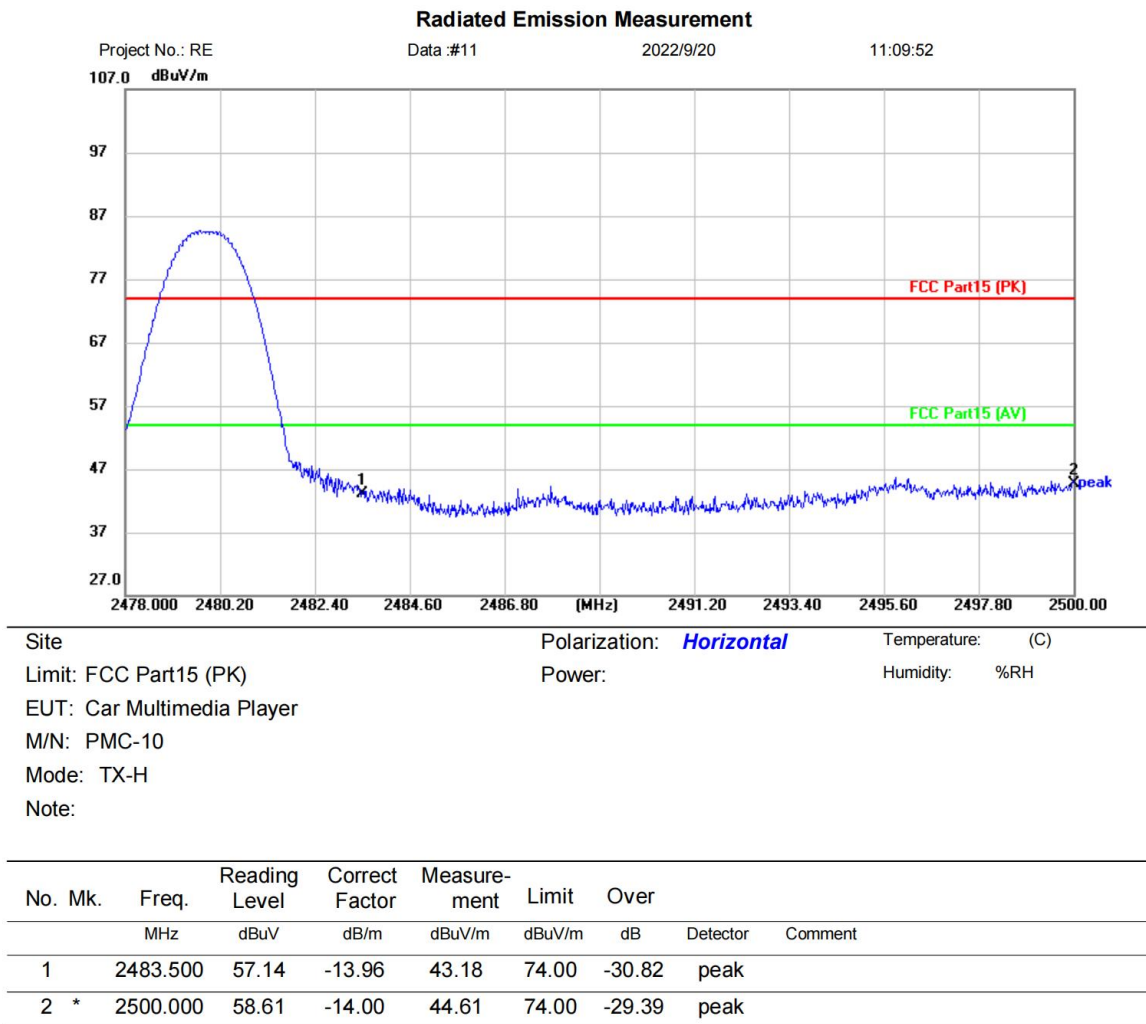


*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass

[TestMode: TX high channel]; [Polarity: Vertical]

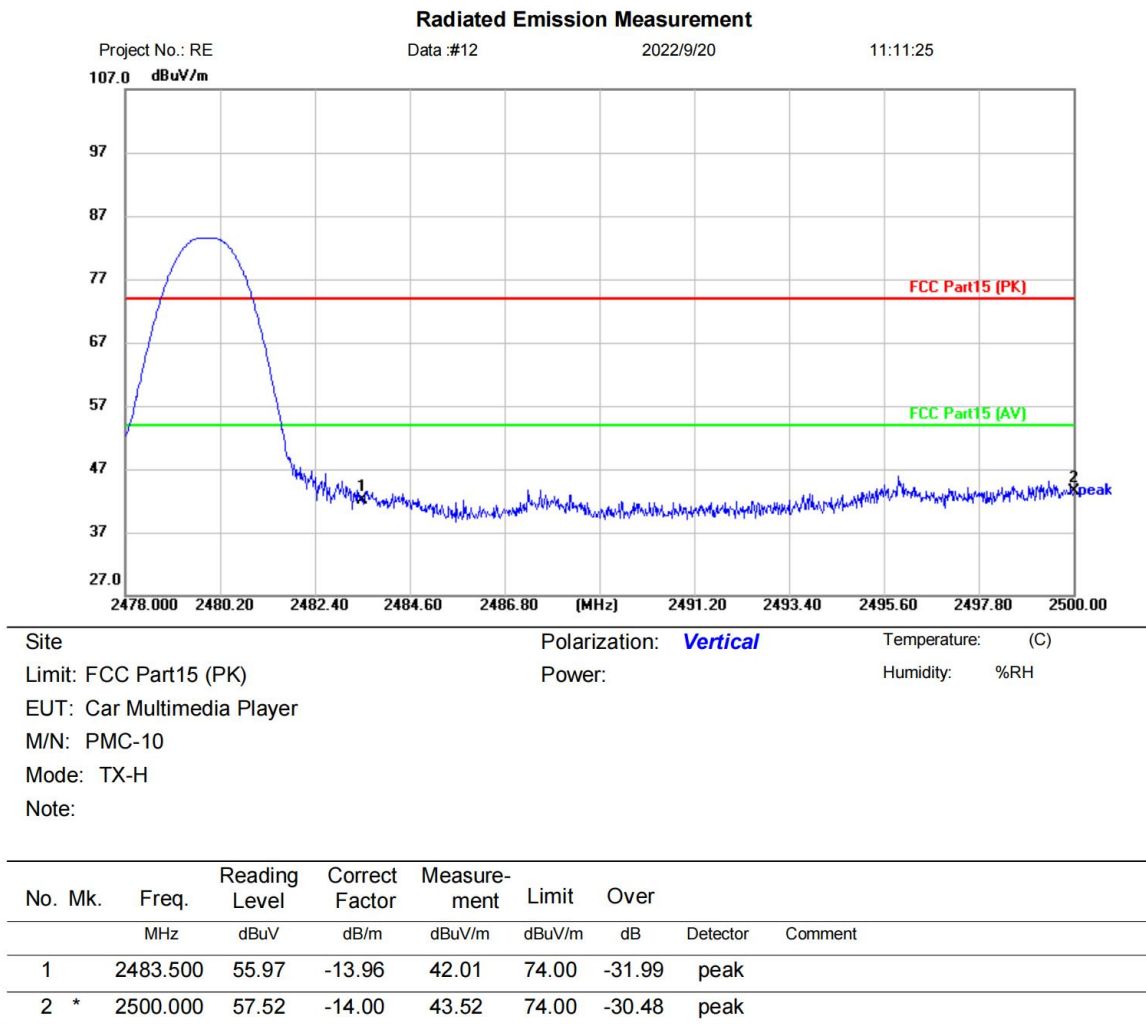

*:Maximum data x:Over limit !:over margin

(Reference Only)

Test Result: Pass


16 CONDUCTED BAND EDGES MEASUREMENT

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.8 & Section 11.13.3.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

16.1 LIMITS

Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).
---------------	--

16.2 BLOCK DIAGRAM OF TEST SETUP

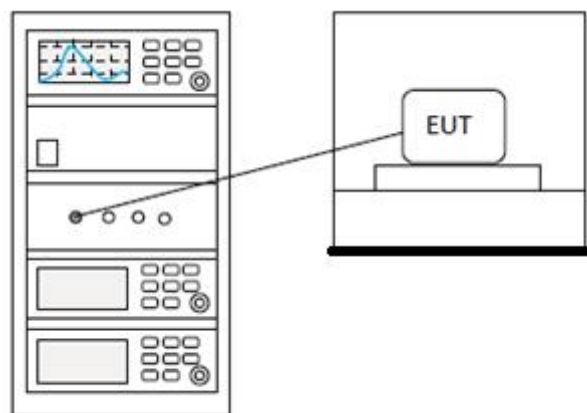

16.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


17 DWELL TIME

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.4
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

17.1 LIMITS

Frequency(MHz)	Limit
902-928	0.4S within a 20S period(20dB bandwidth<250kHz)
	0.4S within a 10S period(20dB bandwidth≥250kHz)
2400-2483.5	0.4S within a period of 0.4S multiplied by the number of hopping channels
5725-5850	0.4S within a 30S period

17.2 BLOCK DIAGRAM OF TEST SETUP

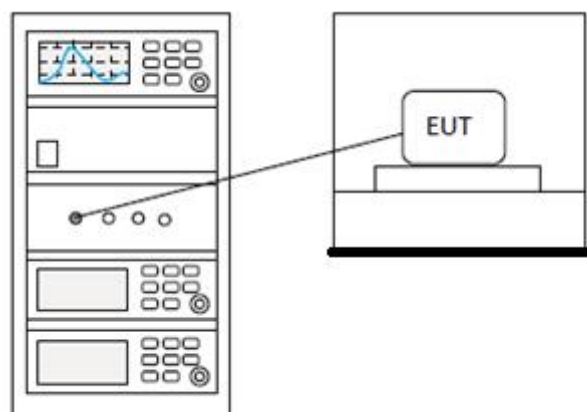

17.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details

BlueAsia


18 HOPPING CHANNEL NUMBER

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.3
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25℃
Humidity	60%

18.1 LIMITS

Frequency range(MHz)	Number of hopping channels (minimum)
902-928	50 for 20dB bandwidth <250kHz
	25 for 20dB bandwidth ≥250kHz
2400-2483.5	15
5725-5850	75

18.2 BLOCK DIAGRAM OF TEST SETUP

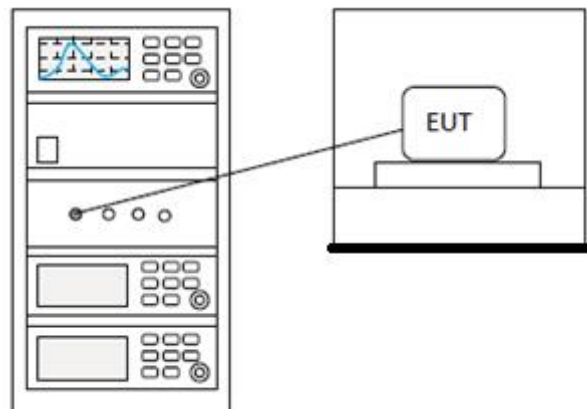

18.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details


19 CARRIER FREQUENCIES SEPARATION

Test Standard	47 CFR Part 15, Subpart C 15.247
Test Method	ANSI C63.10 (2013) Section 7.8.2
Test Mode (Pre-Scan)	TX
Test Mode (Final Test)	TX
Tester	Jozu
Temperature	25°C
Humidity	60%

19.1 LIMITS

Limit:	2/3 of the 20dB bandwidth base on the transmission power is less than 0.125W
---------------	--

19.2 BLOCK DIAGRAM OF TEST SETUP

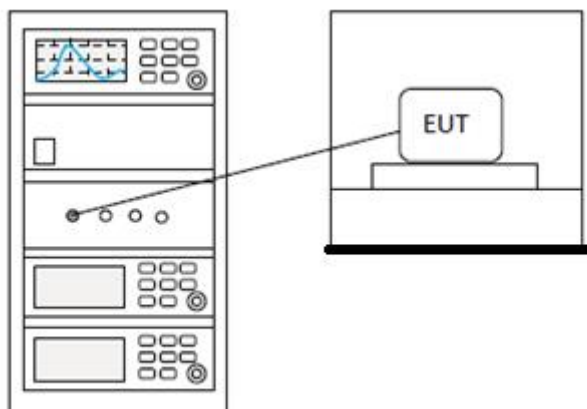

19.3 TEST DATA

Pass: Please Refer To Appendix: Appendix1 For Details
--


20 APPENDIX

Appendix1


Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	1-DH1	2402	Ant1	-4.011	21	Pass
NVNT	1-DH1	2441	Ant1	-4.606	21	Pass
NVNT	1-DH1	2480	Ant1	-5.848	21	Pass
NVNT	2-DH1	2402	Ant1	-2.912	21	Pass
NVNT	2-DH1	2441	Ant1	-3.439	21	Pass
NVNT	2-DH1	2480	Ant1	-4.755	21	Pass
NVNT	3-DH1	2402	Ant1	-2.353	21	Pass
NVNT	3-DH1	2441	Ant1	-2.478	21	Pass
NVNT	3-DH1	2480	Ant1	-3.788	21	Pass


Power NVNT 1-DH1 2402MHz Ant1

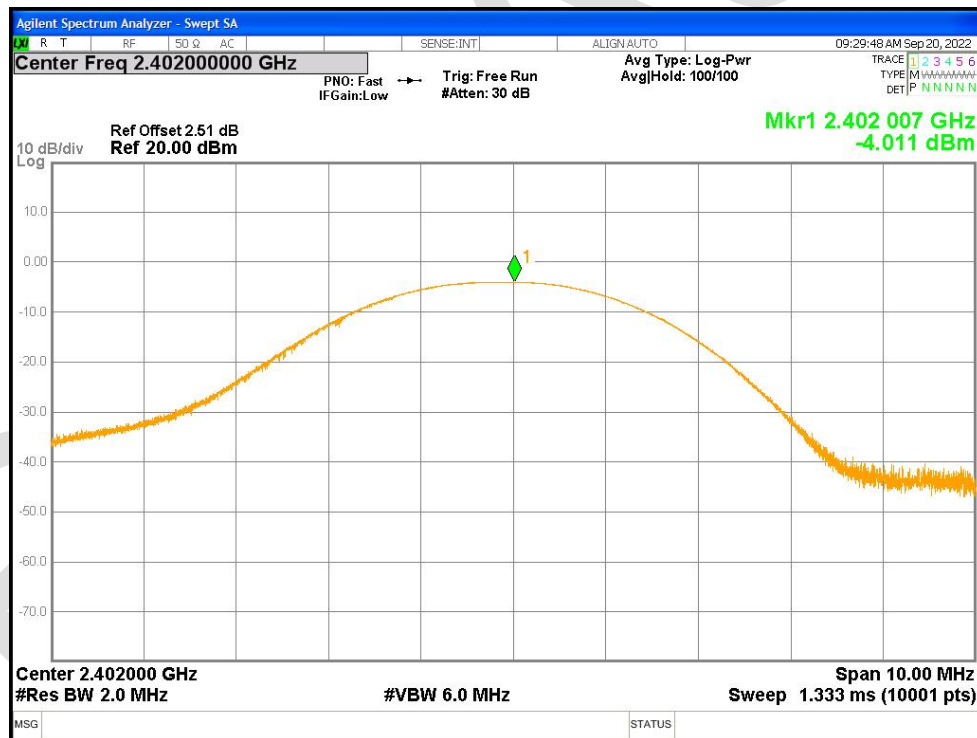


Power NVNT 1-DH1 2441MHz Ant1

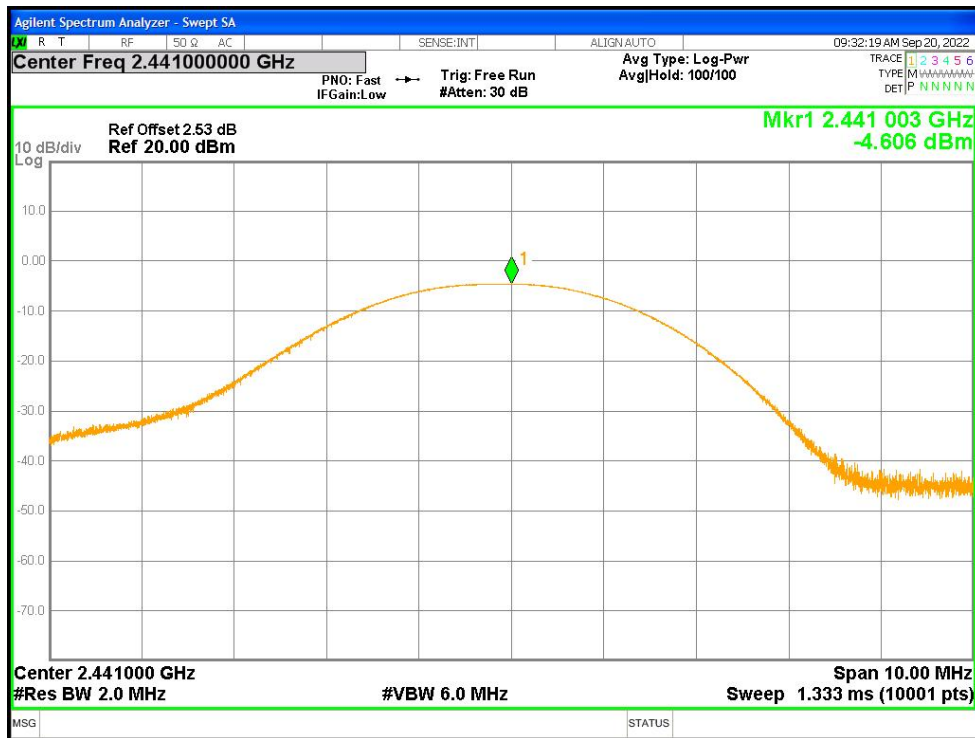


Power NVNT 1-DH1 2480MHz Ant1

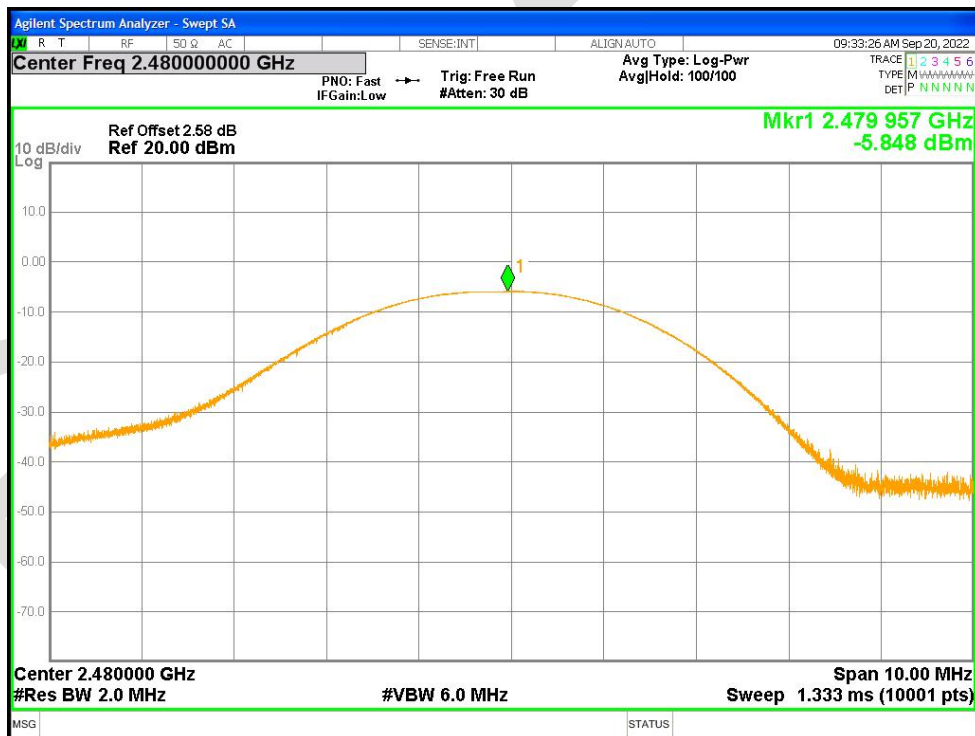


Power NVNT 2-DH1 2402MHz Ant1

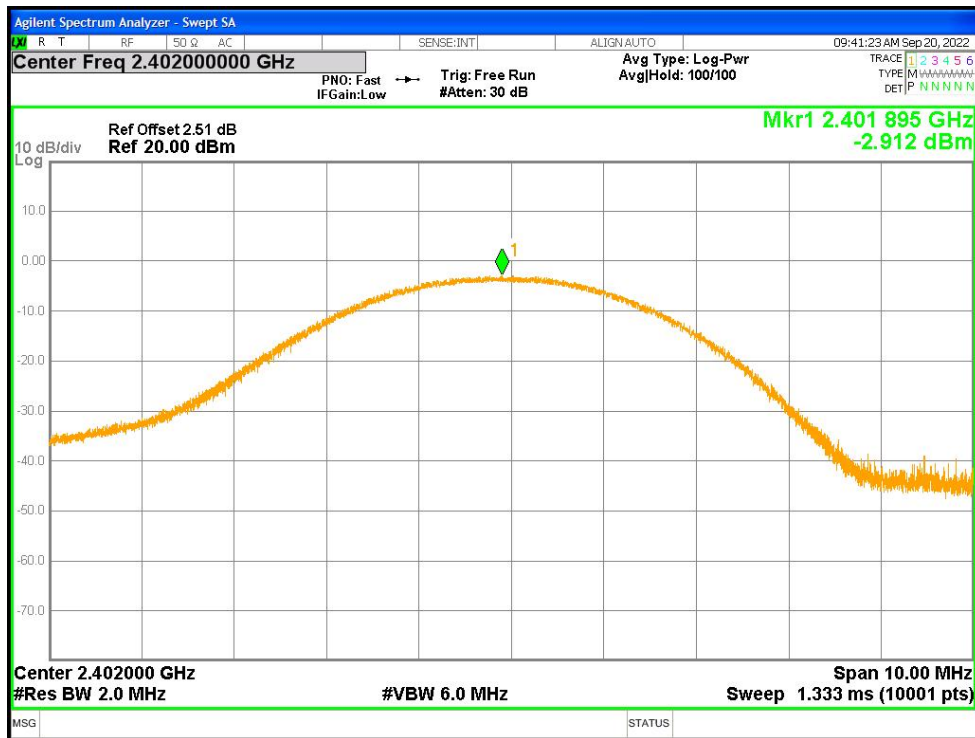


Power NVNT 2-DH1 2441MHz Ant1

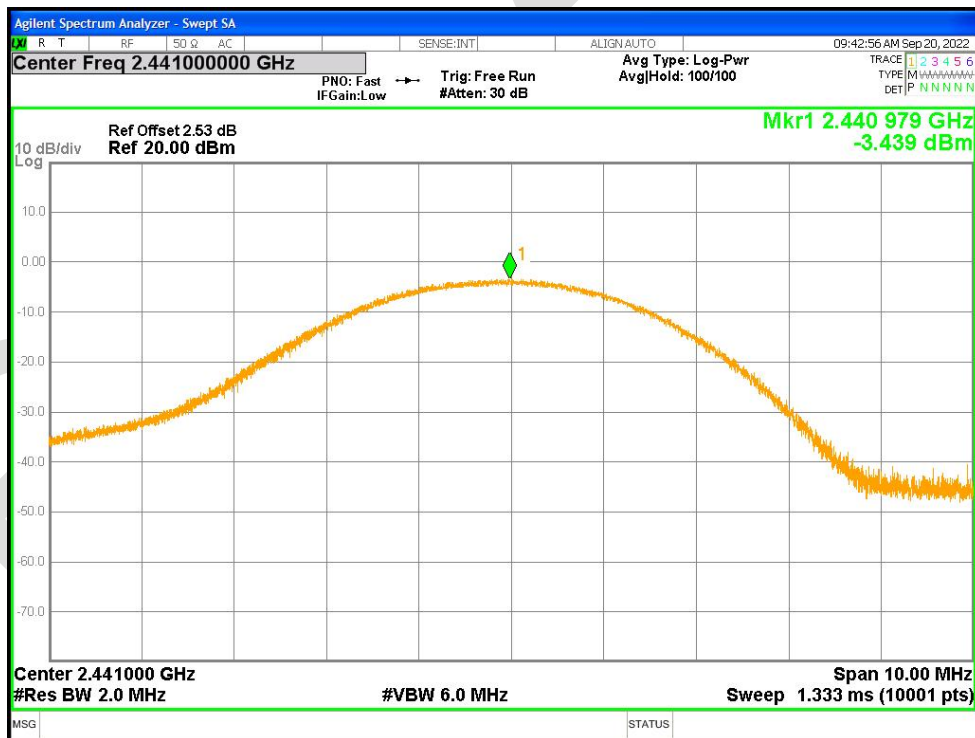


Power NVNT 2-DH1 2480MHz Ant1

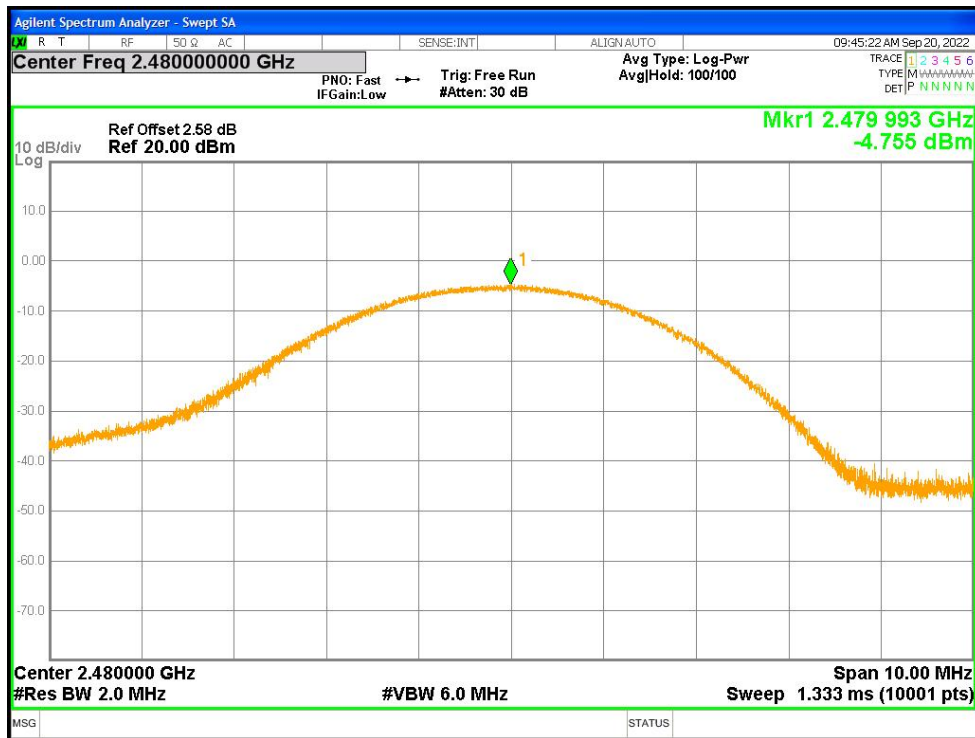


Power NVNT 3-DH1 2402MHz Ant1

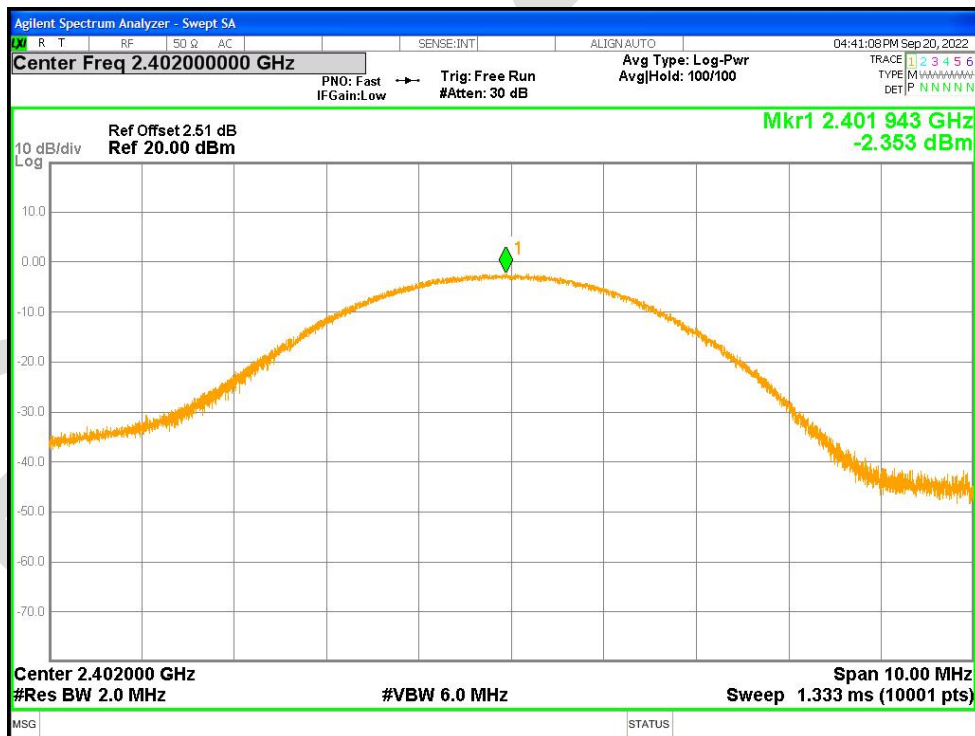

Power NVNT 3-DH1 2441MHz Ant1

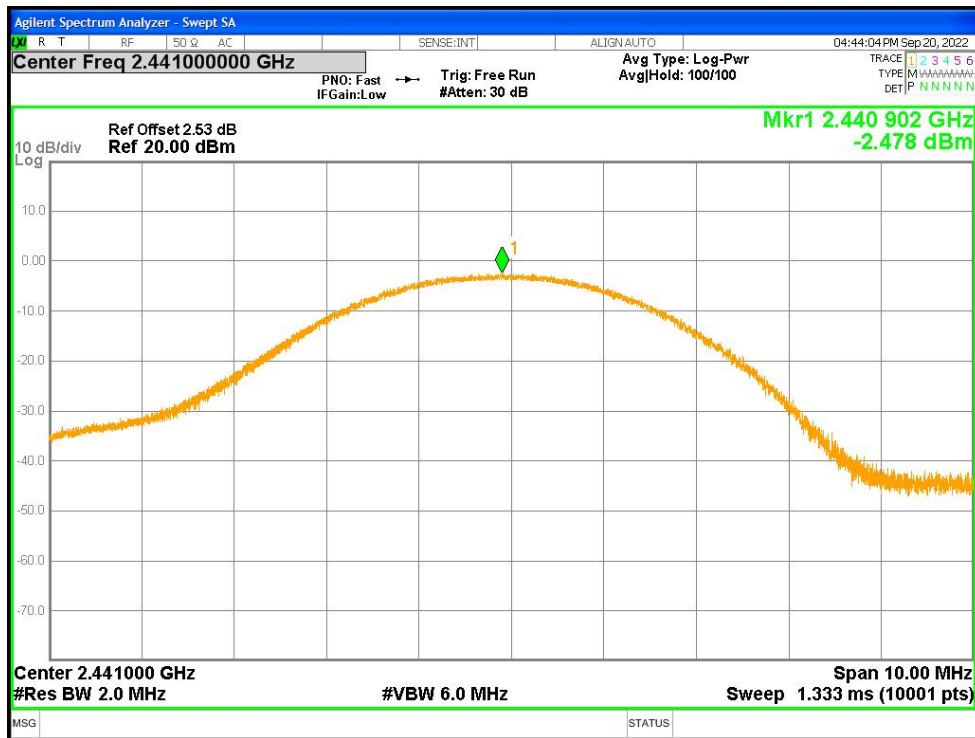


Power NVNT 3-DH1 2480MHz Ant1

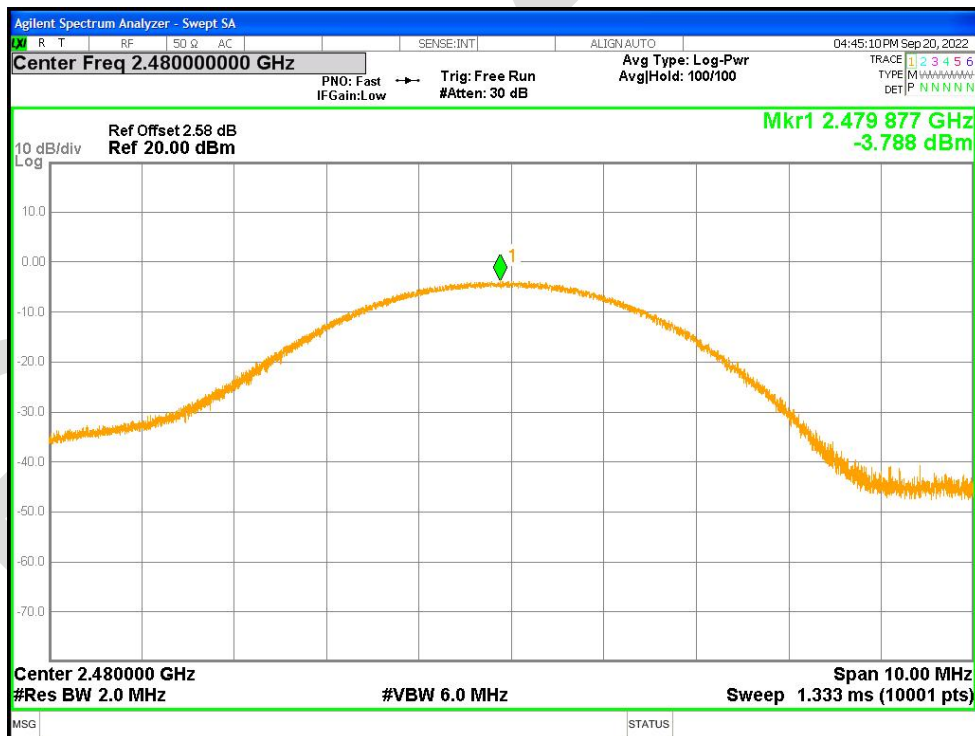


-20dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-20 dB Bandwidth (MHz)	Limit -20 dB Bandwidth (MHz)	Verdict
NVNT	1-DH1	2402	Ant1	0.832	0	Pass
NVNT	1-DH1	2441	Ant1	0.828	0	Pass
NVNT	1-DH1	2480	Ant1	0.874	0	Pass
NVNT	2-DH1	2402	Ant1	1.185	0	Pass
NVNT	2-DH1	2441	Ant1	1.178	0	Pass
NVNT	2-DH1	2480	Ant1	1.188	0	Pass
NVNT	3-DH1	2402	Ant1	1.18	0	Pass
NVNT	3-DH1	2441	Ant1	1.191	0	Pass
NVNT	3-DH1	2480	Ant1	1.212	0	Pass


-20dB Bandwidth NVNT 1-DH1 2402MHz Ant1

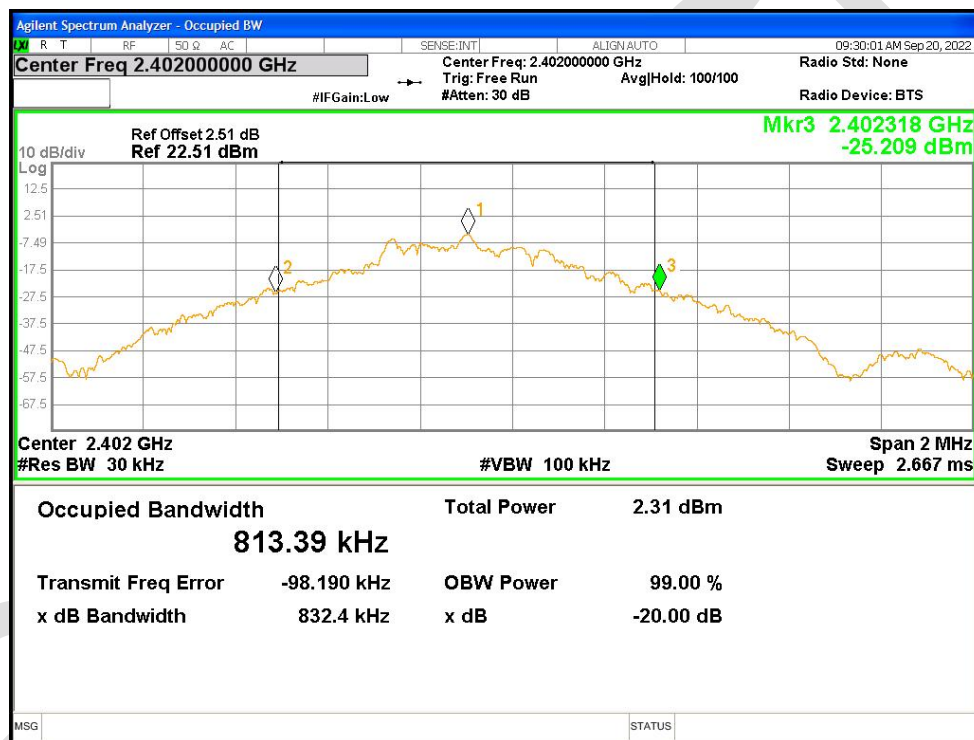


-20dB Bandwidth NVNT 1-DH1 2441MHz Ant1

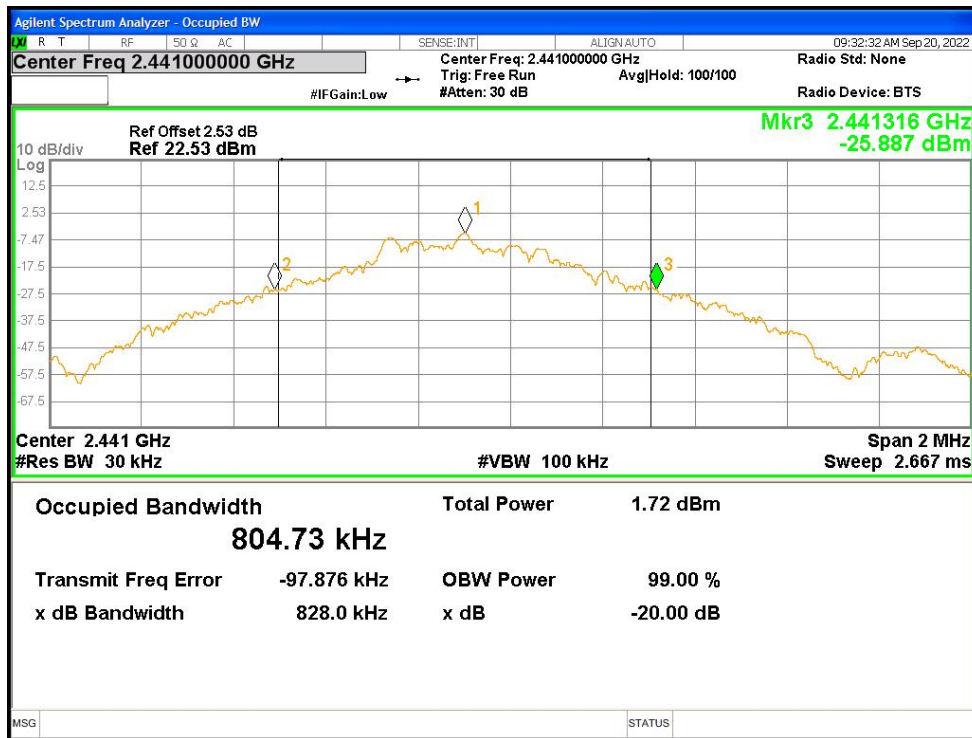


-20dB Bandwidth NVNT 1-DH1 2480MHz Ant1

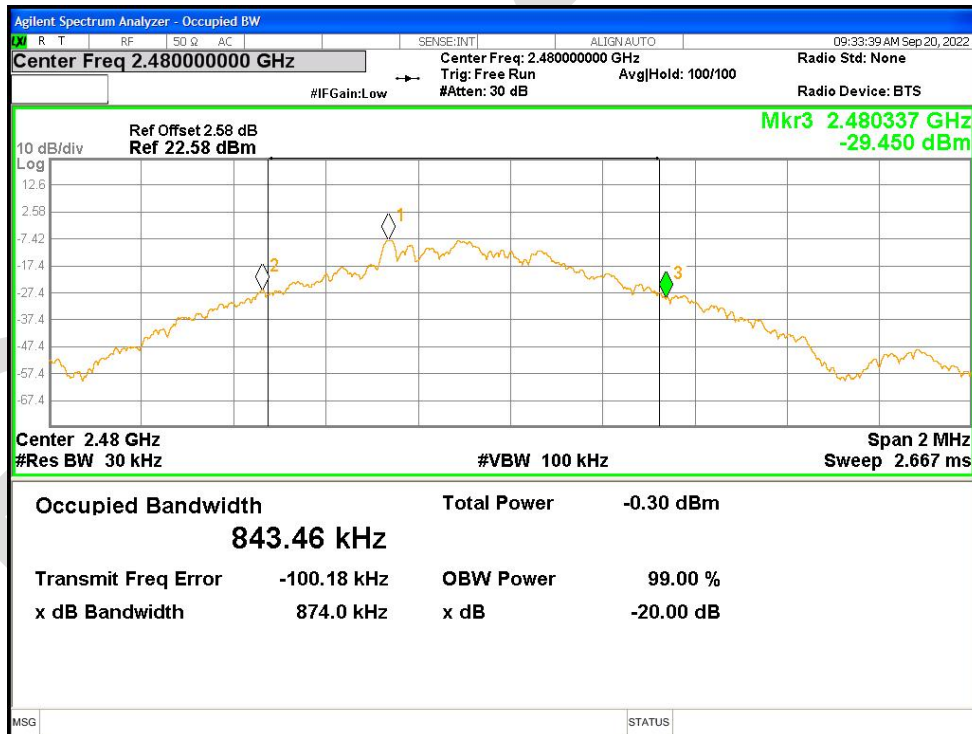


-20dB Bandwidth NVNT 2-DH1 2402MHz Ant1

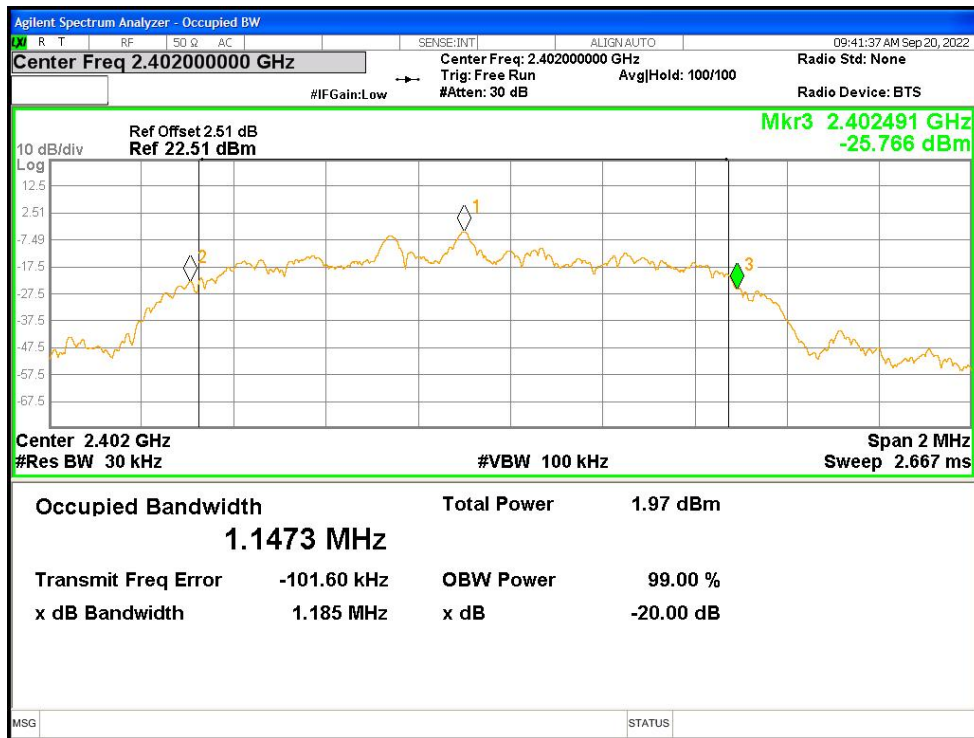


-20dB Bandwidth NVNT 2-DH1 2441MHz Ant1

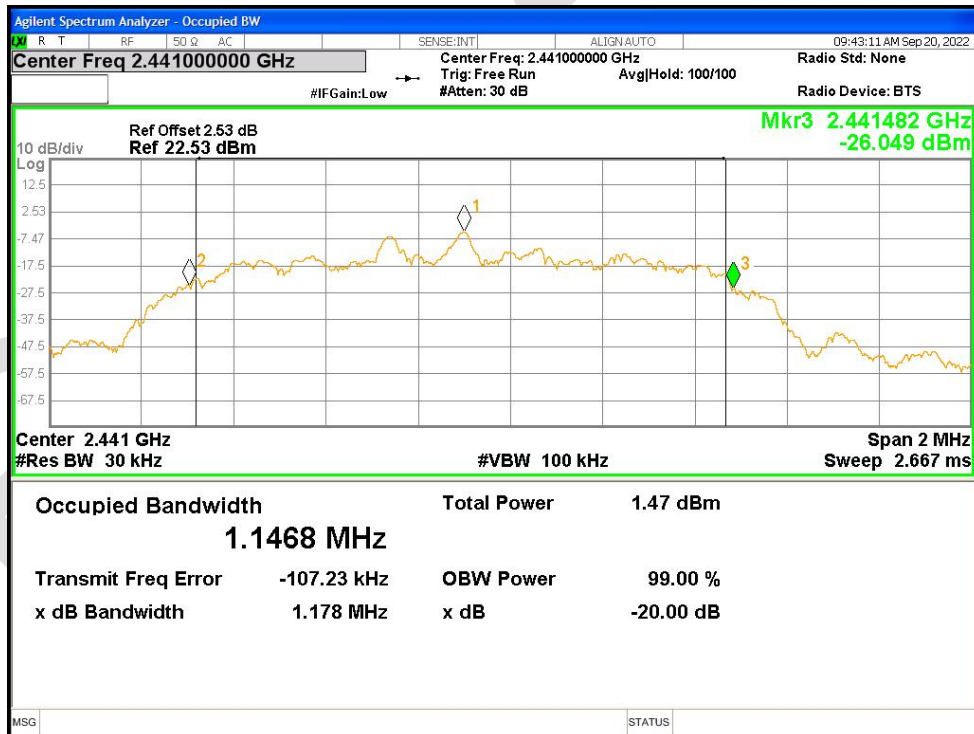


-20dB Bandwidth NVNT 2-DH1 2480MHz Ant1

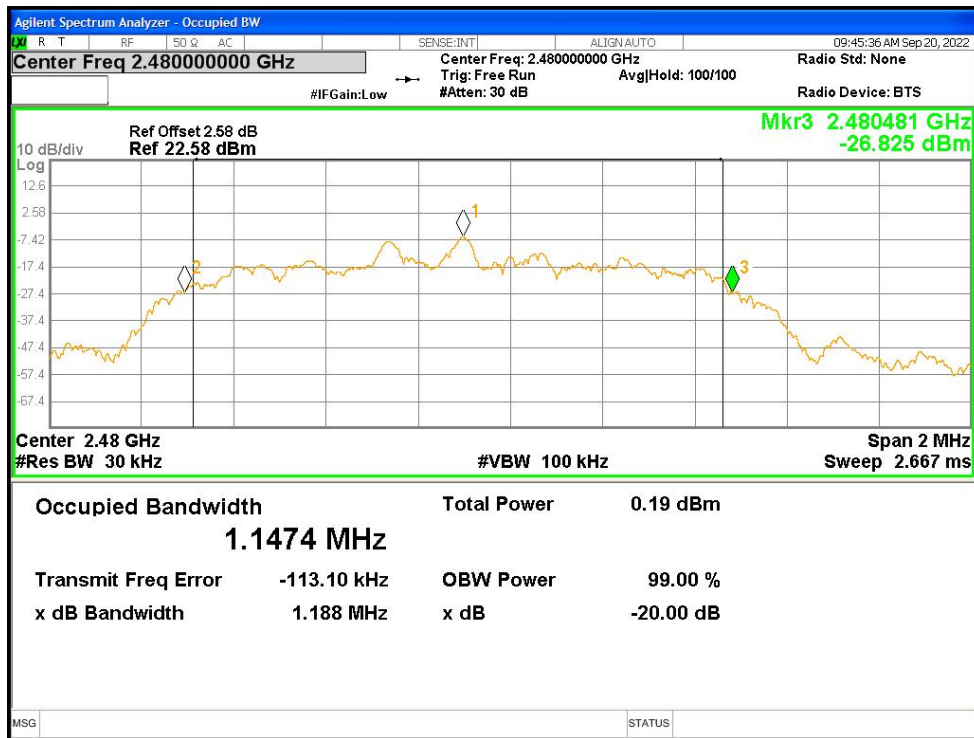


-20dB Bandwidth NVNT 3-DH1 2402MHz Ant1

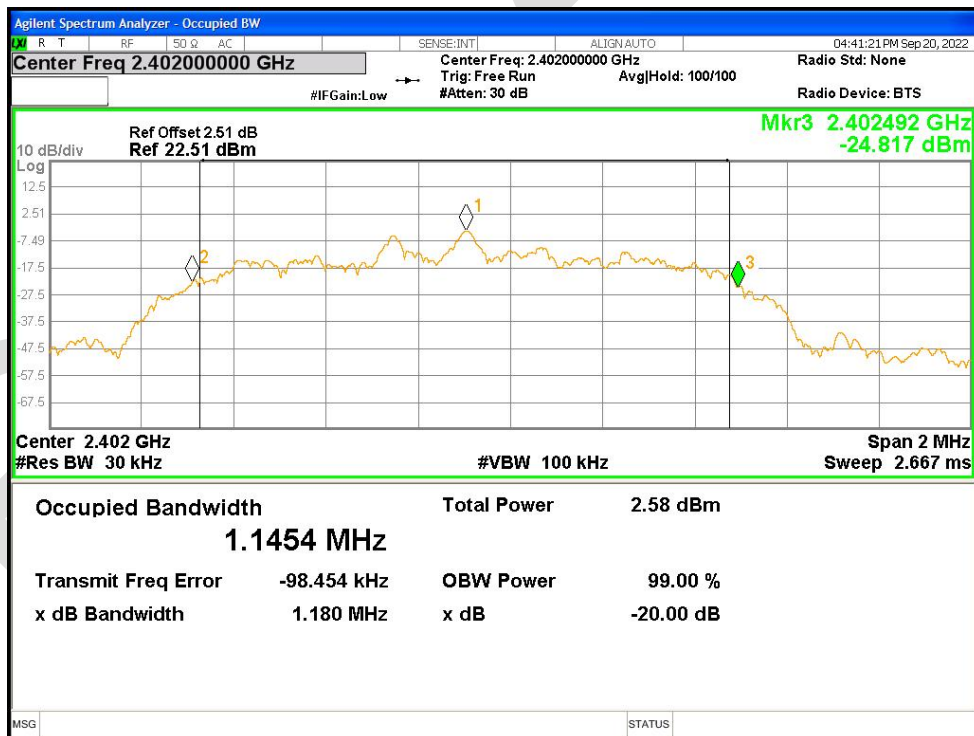

-20dB Bandwidth NVNT 3-DH1 2441MHz Ant1

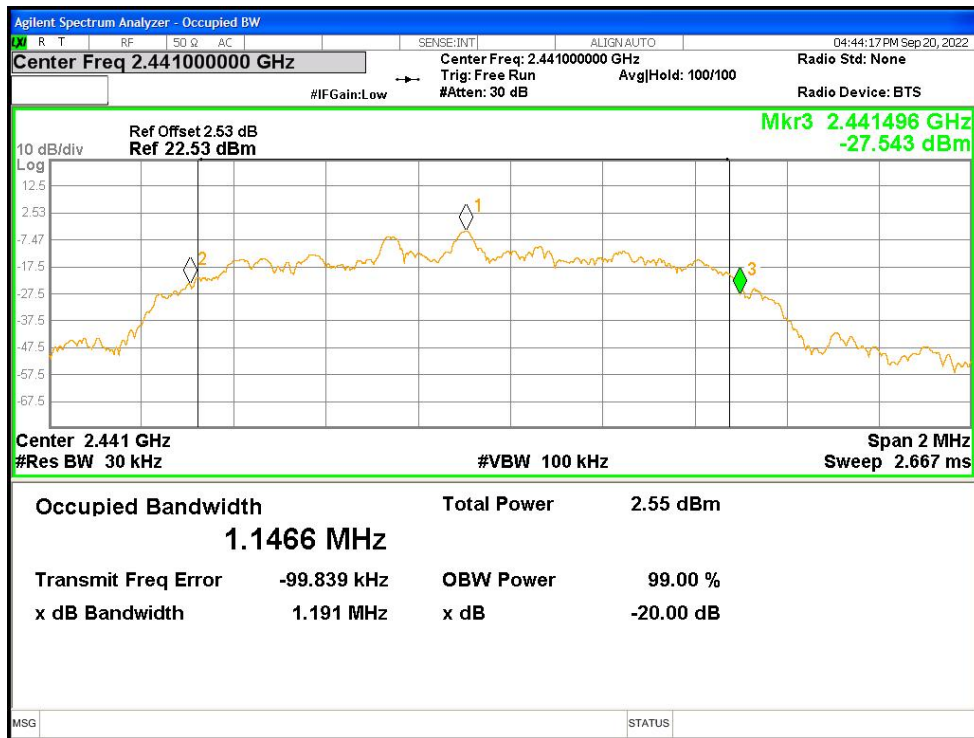


-20dB Bandwidth NVNT 3-DH1 2480MHz Ant1

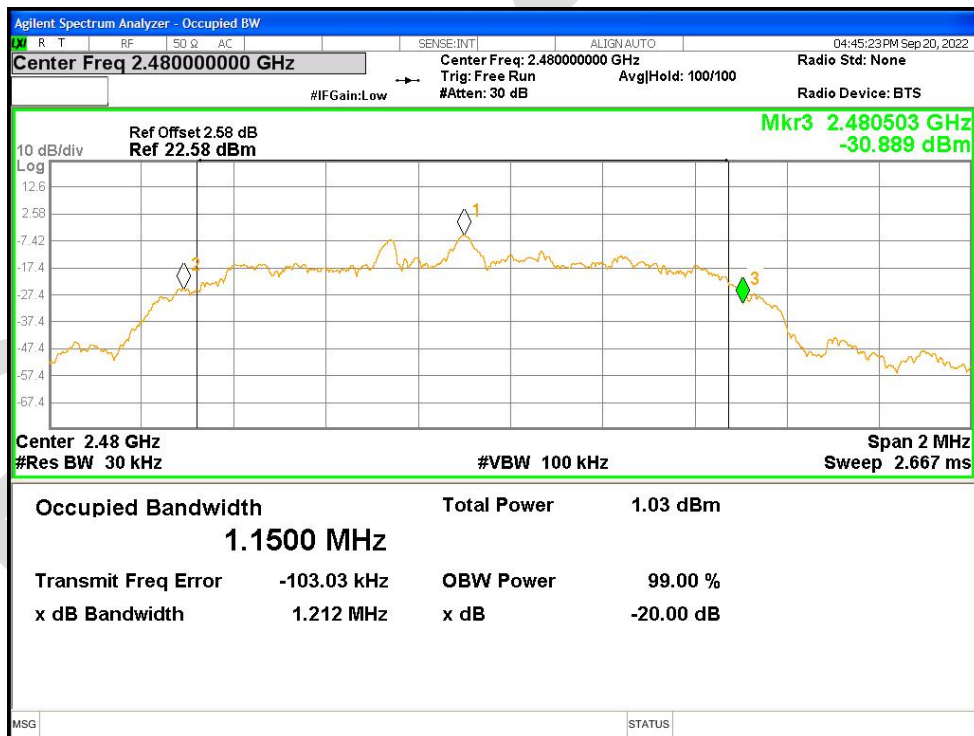


Occupied Channel Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	99% OBW (MHz)
NVNT	1-DH1	2402	Ant1	0.81353
NVNT	1-DH1	2441	Ant1	0.81547
NVNT	1-DH1	2480	Ant1	0.79849
NVNT	2-DH1	2402	Ant1	1.1560
NVNT	2-DH1	2441	Ant1	1.1341
NVNT	2-DH1	2480	Ant1	1.1542
NVNT	3-DH1	2402	Ant1	1.1620
NVNT	3-DH1	2441	Ant1	1.1597
NVNT	3-DH1	2480	Ant1	1.1597


OBW NVNT 1-DH1 2402MHz Ant1

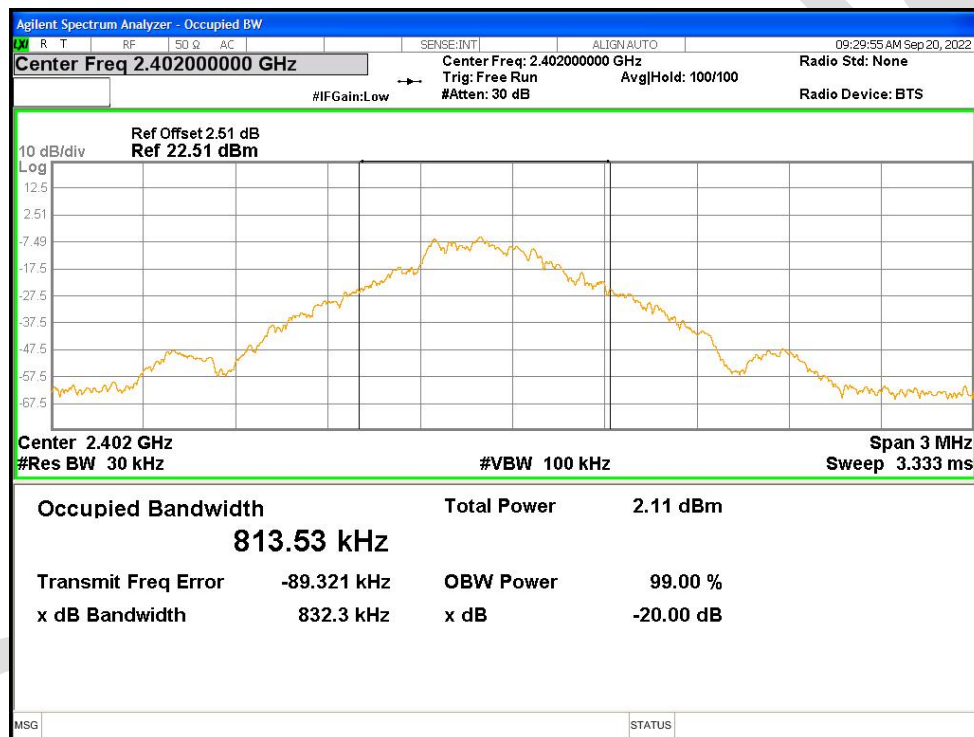


OBW NVNT 1-DH1 2441MHz Ant1

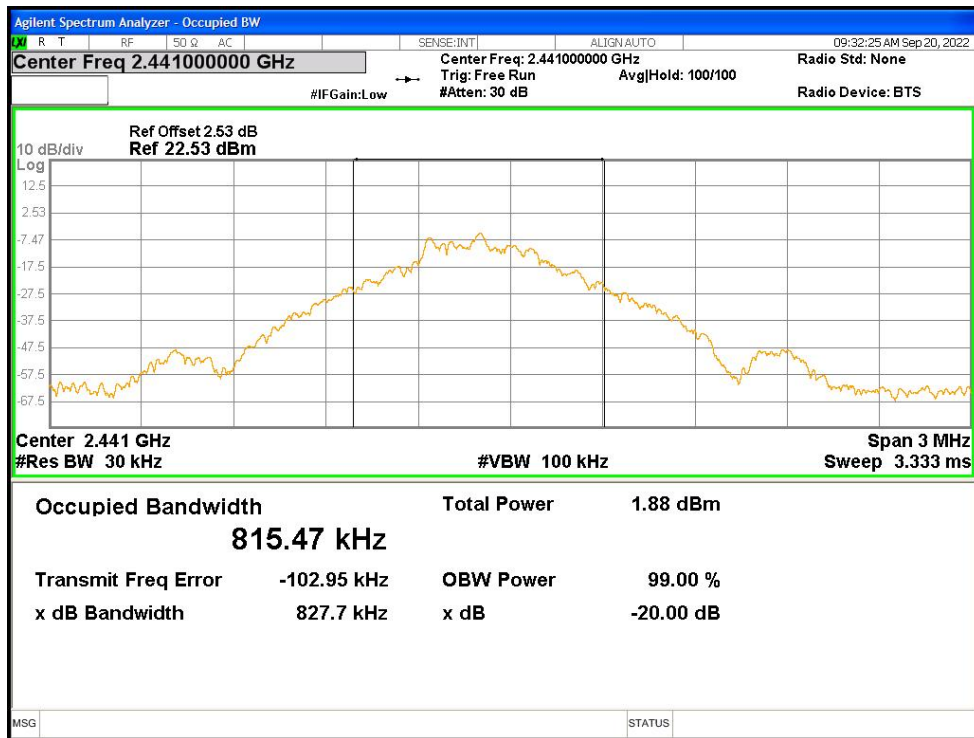


OBW NVNT 1-DH1 2480MHz Ant1

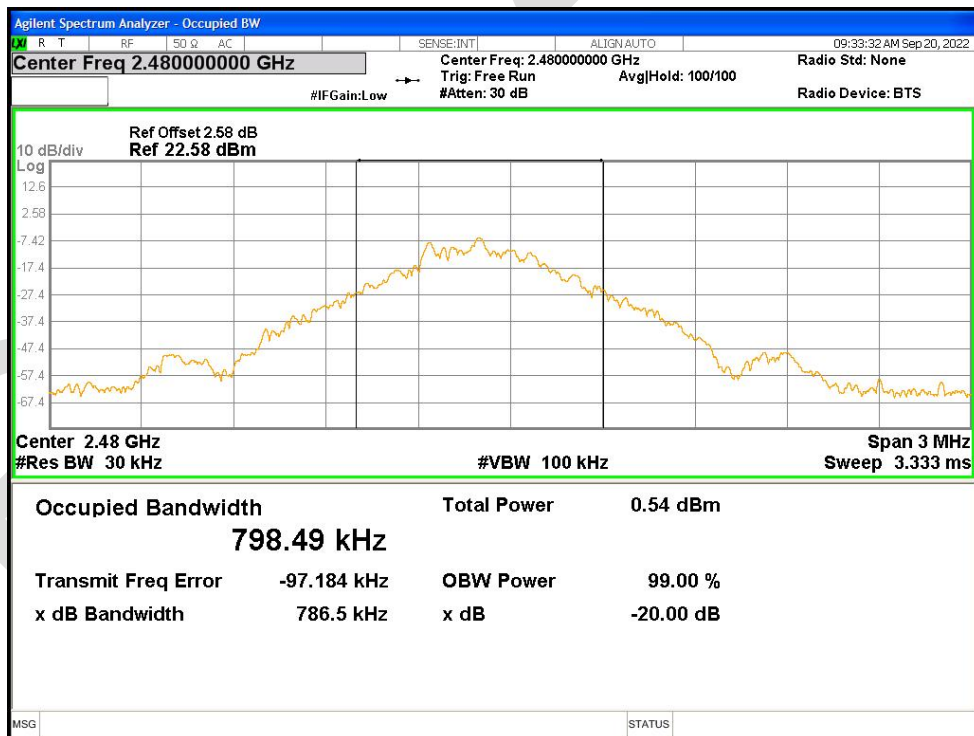


OBW NVNT 2-DH1 2402MHz Ant1

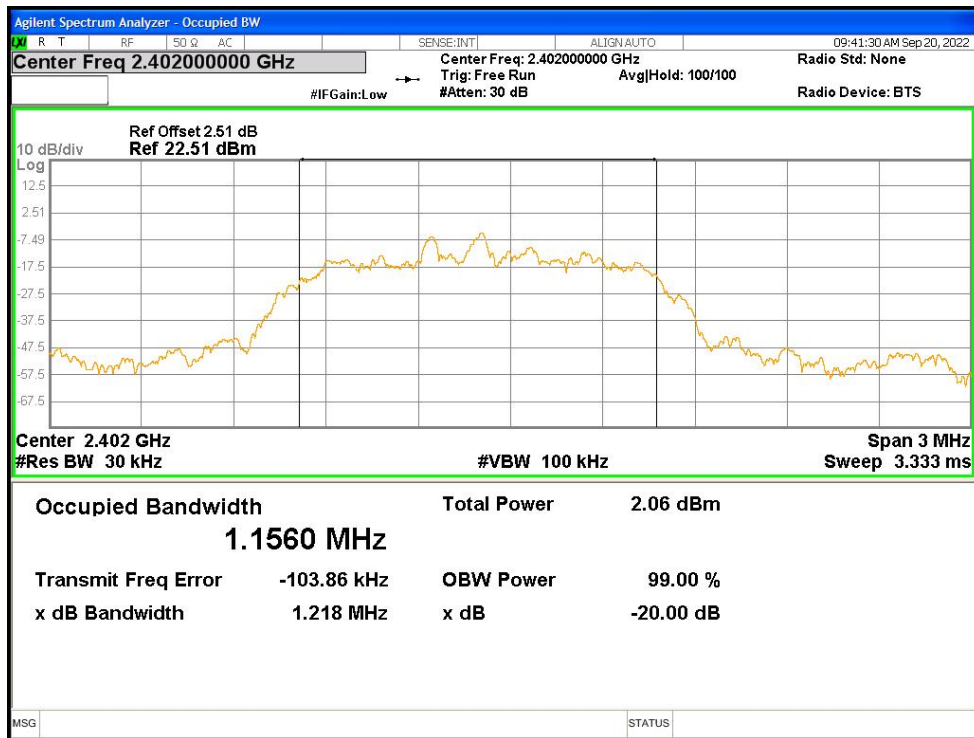


OBW NVNT 2-DH1 2441MHz Ant1

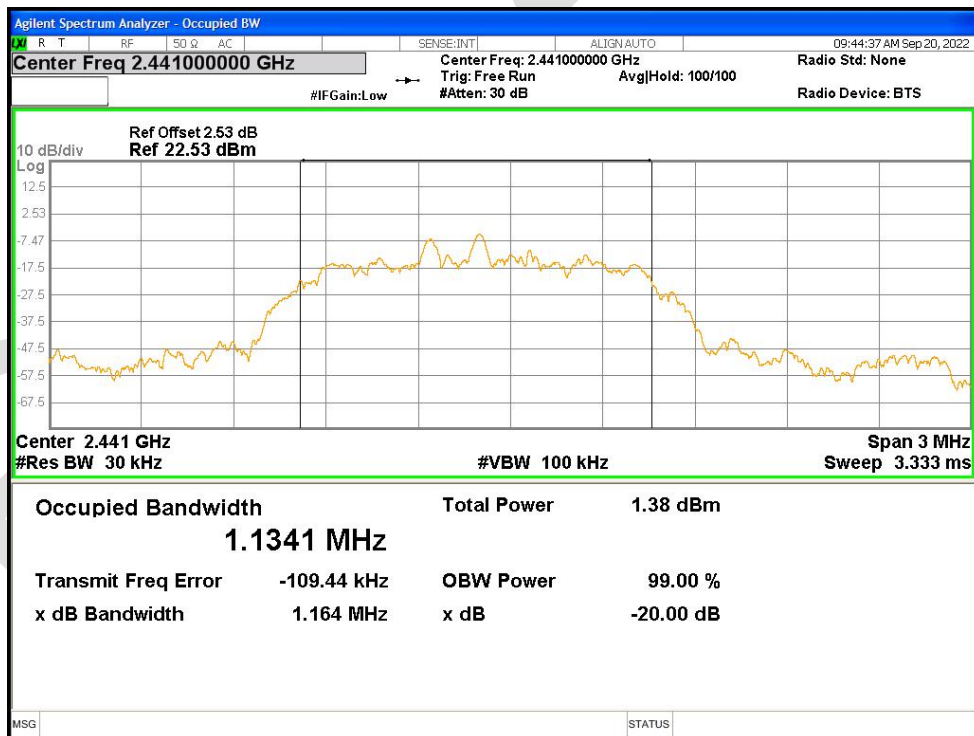


OBW NVNT 2-DH1 2480MHz Ant1

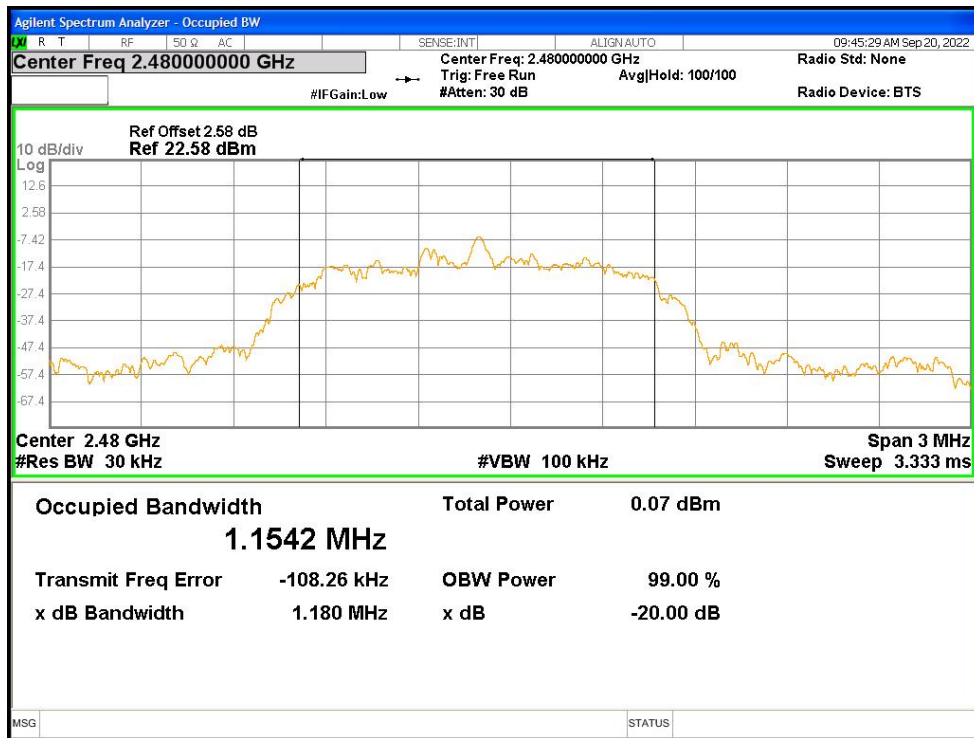


OBW NVNT 3-DH1 2402MHz Ant1

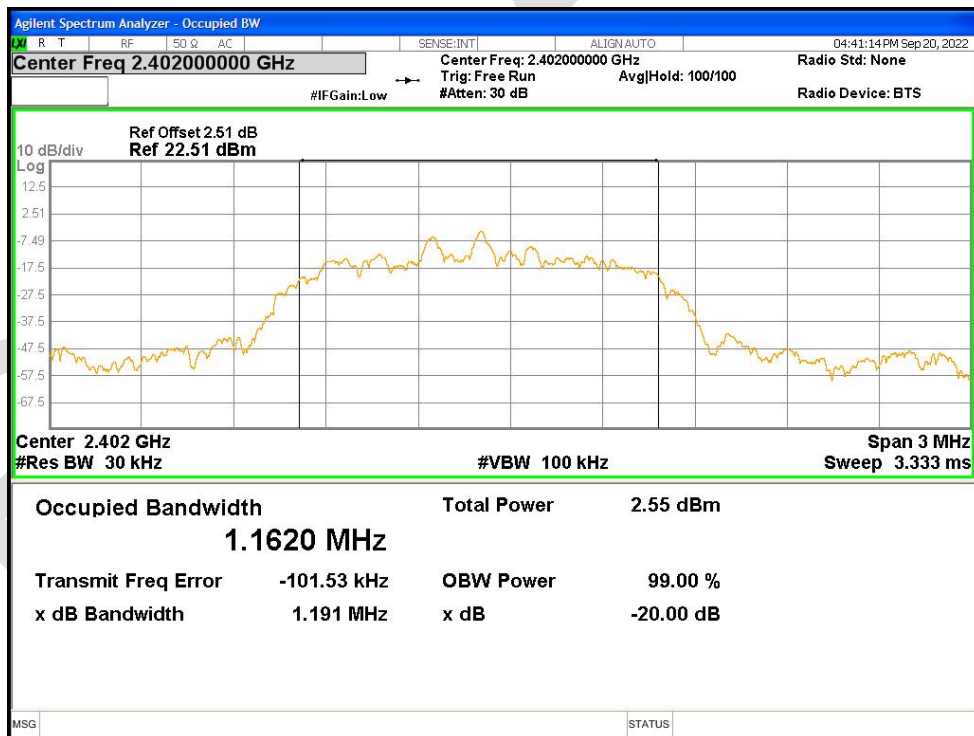

OBW NVNT 3-DH1 2441MHz Ant1

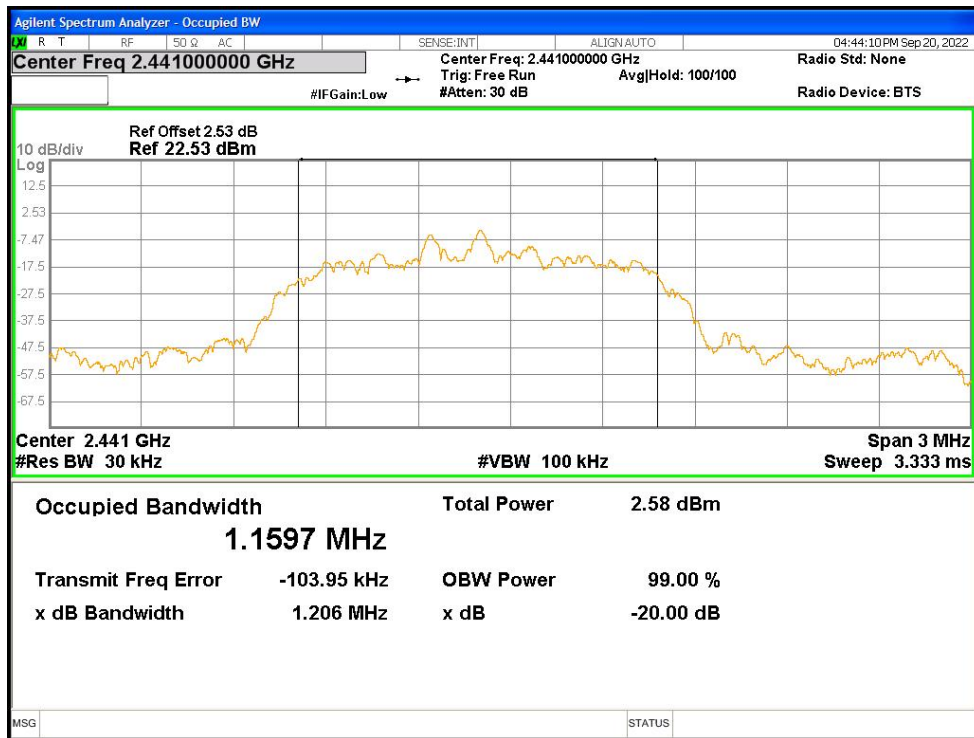

OBW NVNT 3-DH1 2480MHz Ant1

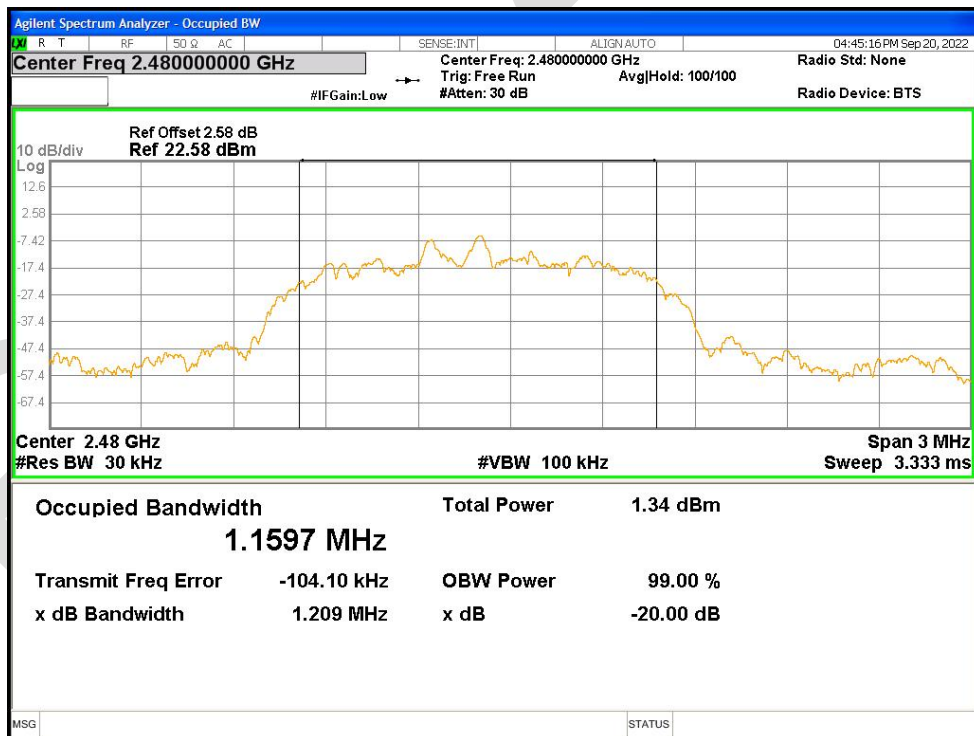


Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Hopping Mode	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	1-DH1	2402	Ant1	No-Hopping	-48.04	-20	Pass
NVNT	1-DH1	2480	Ant1	No-Hopping	-47.55	-20	Pass
NVNT	2-DH1	2402	Ant1	No-Hopping	-47.21	-20	Pass
NVNT	2-DH1	2480	Ant1	No-Hopping	-45.88	-20	Pass
NVNT	3-DH1	2402	Ant1	No-Hopping	-48.11	-20	Pass
NVNT	3-DH1	2480	Ant1	No-Hopping	-47.72	-20	Pass


Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Ref




Band Edge NVNT 1-DH1 2402MHz Ant1 No-Hopping Emission

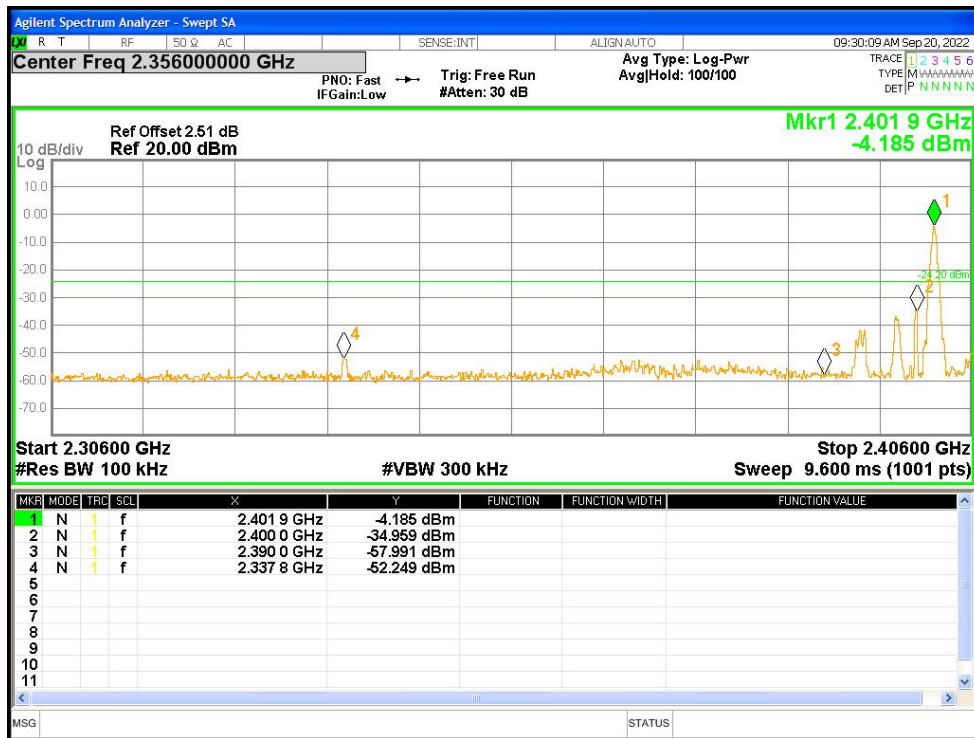


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Ref

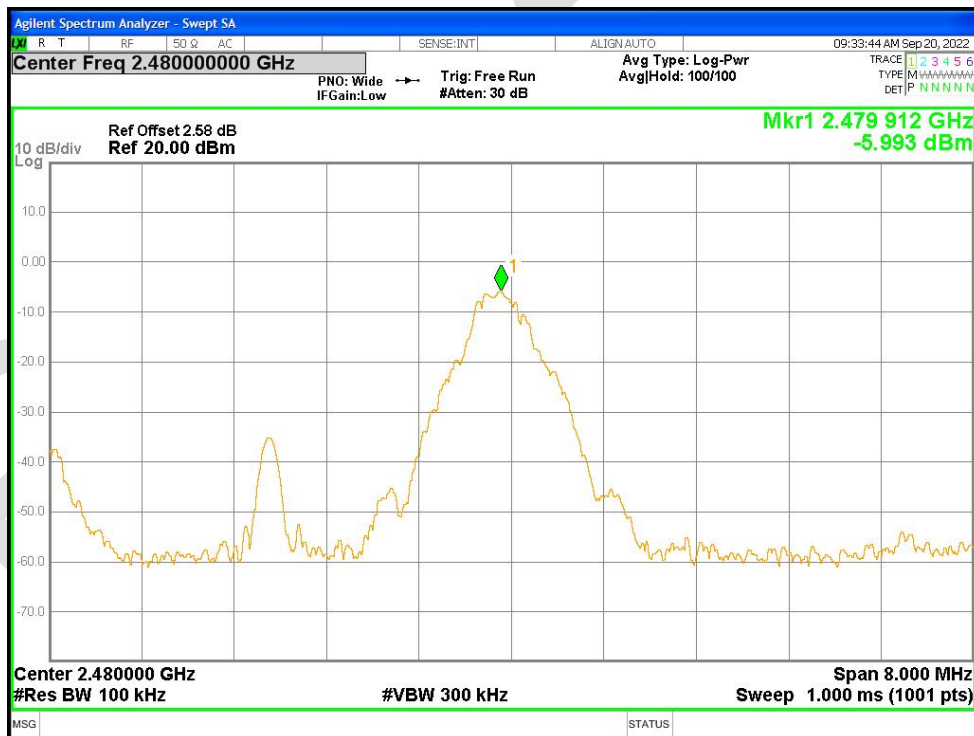


Band Edge NVNT 1-DH1 2480MHz Ant1 No-Hopping Emission

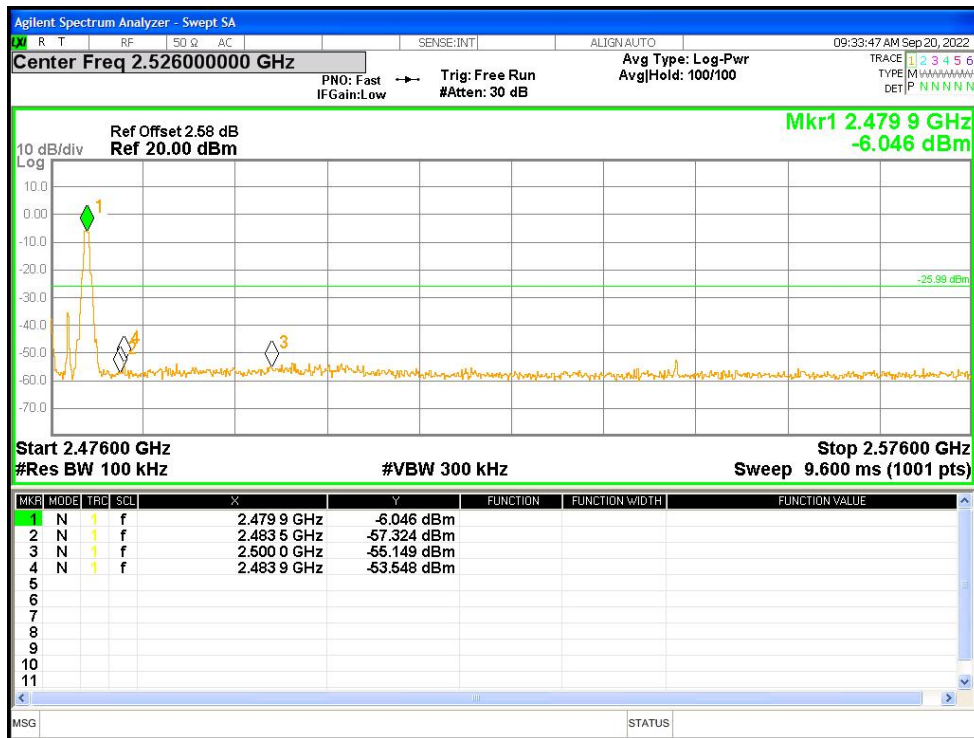


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Ref

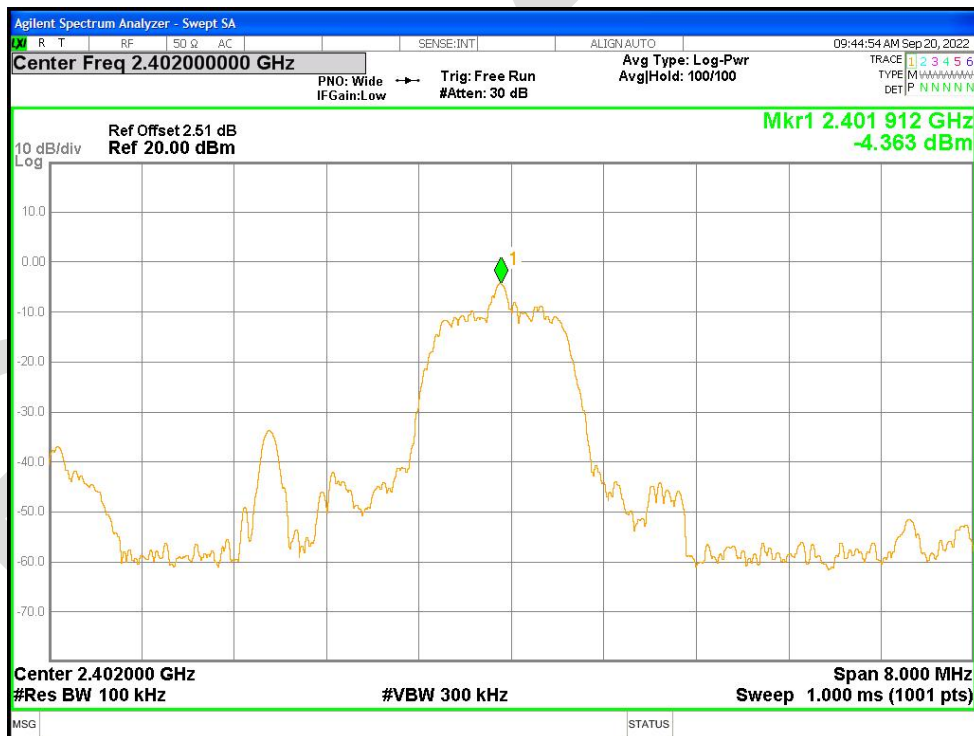


Band Edge NVNT 2-DH1 2402MHz Ant1 No-Hopping Emission

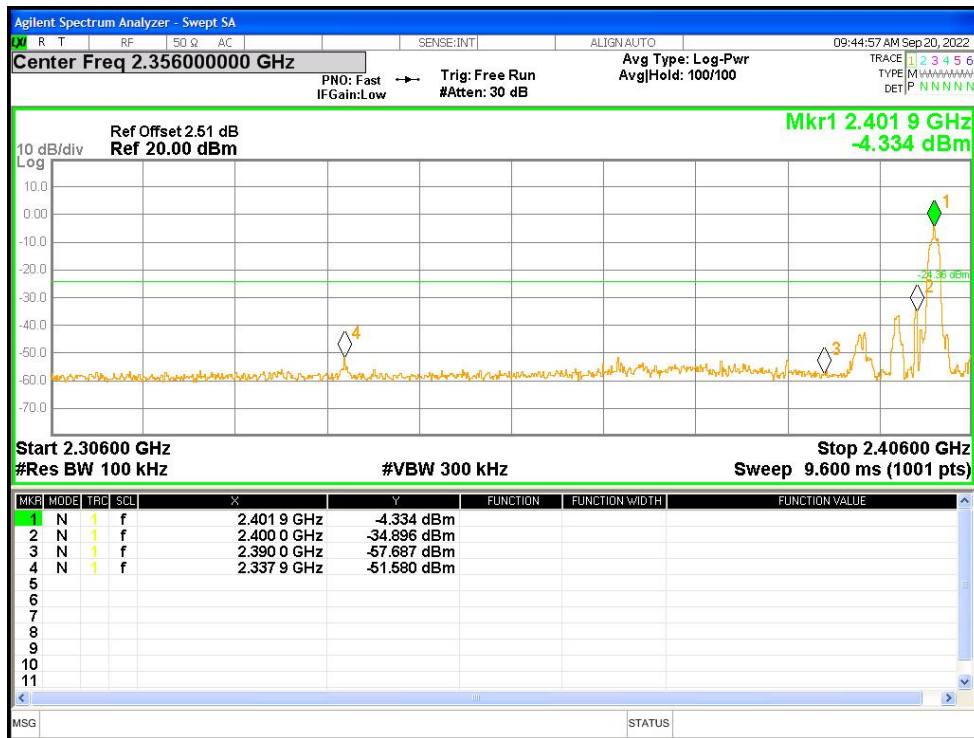

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Ref

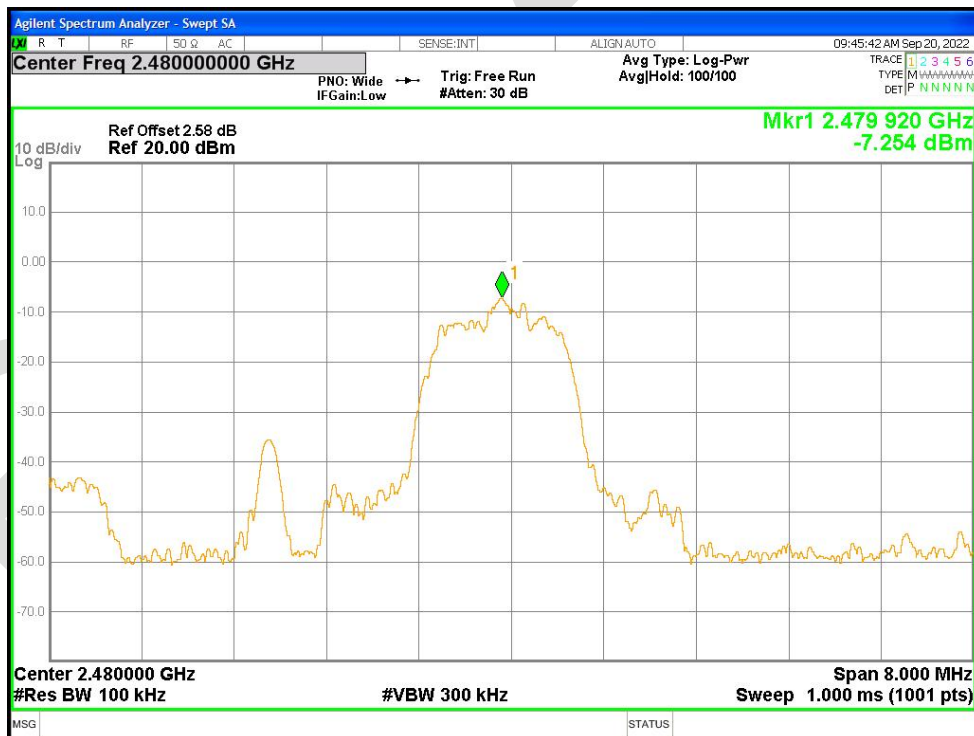

Band Edge NVNT 2-DH1 2480MHz Ant1 No-Hopping Emission

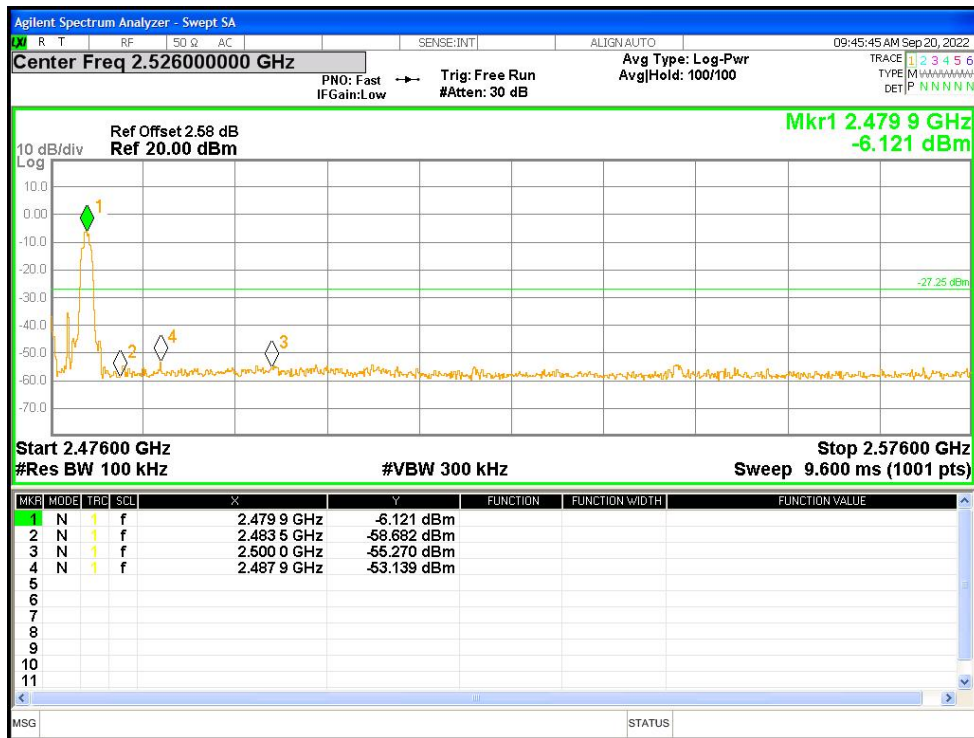

Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Ref



Band Edge NVNT 3-DH1 2402MHz Ant1 No-Hopping Emission