


User Manual & Warranty


Quick Start	_____	1
Introduction	_____	2
Preparation	_____	2
Mounting	_____	3
Specifications	_____	5
Important Safety Instructions	_____	5
Compatibility	_____	5
Troubleshooting Procedures	_____	5
Warranty	_____	5
Regulatory Compliance	_____	6

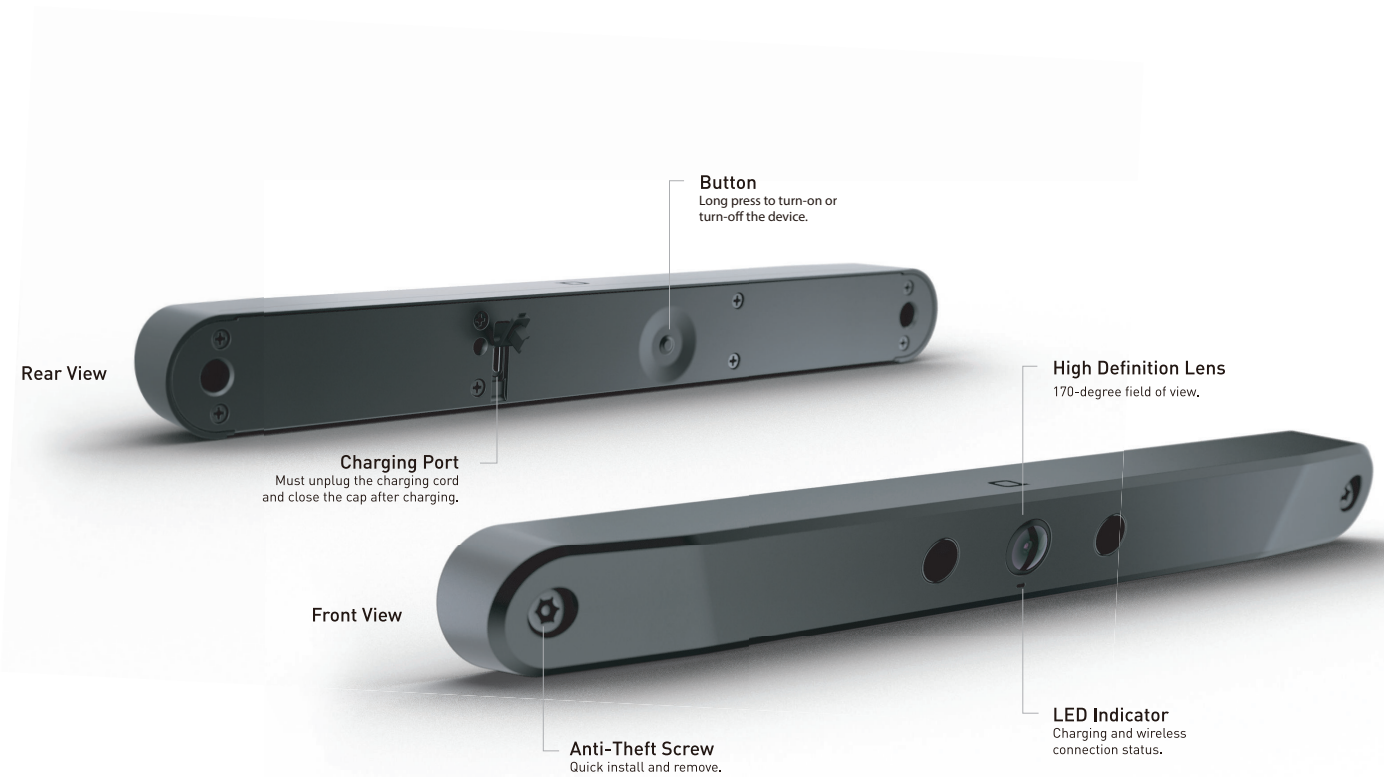

Introduction

The ZUS Wireless Smart Backup Camera 2.0 is easy to install and built to fit your license plate. Install in just 10 minutes and get 170-degree field of view right on your smartphone.

At a Glance

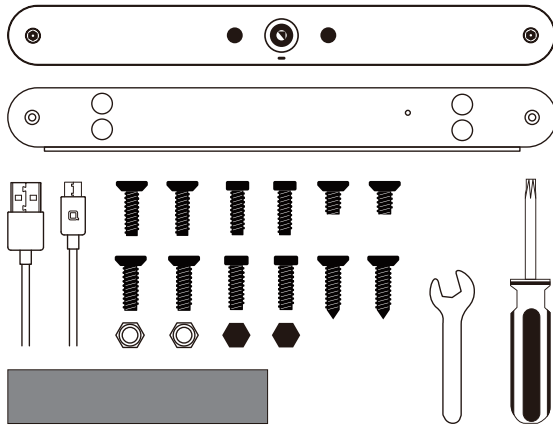


Backup Camera × 1
 Mounting Plate × 1
 USB Charging Cable × 1
 Heavy Duty Mounting Tape × 1
 Screwdriver × 1
 Hex Wrench × 1
 Manual × 1

M6 Flat-Head Long Screw × 2
 M6 Socket-Cap Long Screw × 2
 M6 Flat-Head Short Screw × 2
 M6 Flat-Head Self-Taping Screw × 2
 M5 Flat-Head Long Screw × 2
 M5 Socket-Cap Long Screw × 2
 M6 Locking Nut × 2
 Nut Cap × 2

Preparation: Charging, App Download & Pairing


IMPORTANT:

1 Fully Charge the Device

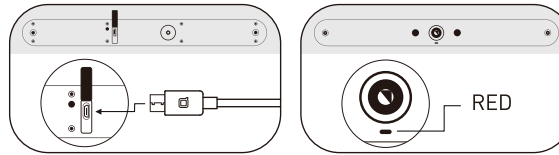

Connect the charging cord to the Backup Camera. Then, plug the charging cord into a USB charger.


The front LED will turn RED when charging.

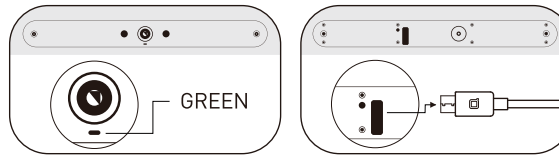

Once the battery is fully charged, the LED will turn Green. (At least 5 hours)

Disconnect the charging cable. Close the cap.

2 Activate the Device



Activate device by long pressing the button until LED light blinking green for 3 times.

3




Search for "ZUS" on the Apple App Store or Google Play. After download the app to your mobile phone, open the ZUS app and click on "add a Smart Backup Camera". Follow the installation steps on the ZUS app.

Mounting


*Only mount the device after you've completed all the Preparation Steps.
*If your license plate doesn't fit none of the following standards, please refer to a relevant mounting guide.

Remove license plate from your car and proceed with one of the installation methods below.

Identify your license plate type:

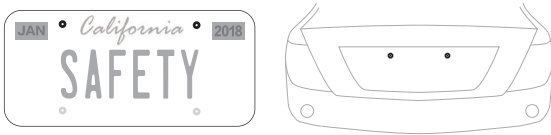

If your registration sticker is located at the **top** of your license plate **AND** there are only **TWO** screw holes on **the back of your car**, please proceed with installation **Method 1**.

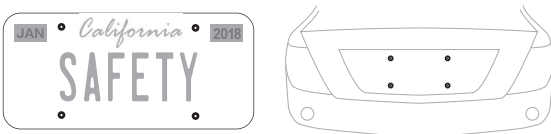


If your registration sticker is located at the **top** of your license plate **AND** there are **FOUR** screw holes on **the back of your car**, please proceed with installation **Method 2**.




If your registration sticker is located at the **bottom** of your license plate, please proceed with installation **Method 3**.


Method 1

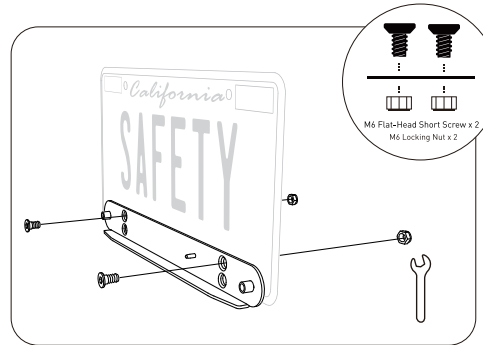

1 Align the top two holes of the mounting plate to the bottom two holes of the license plate. Secure the mounting plate to the license plate with the M6 flat-head short screws and the M6 hex nuts. Tighten with the provided hex wrench and screwdriver.

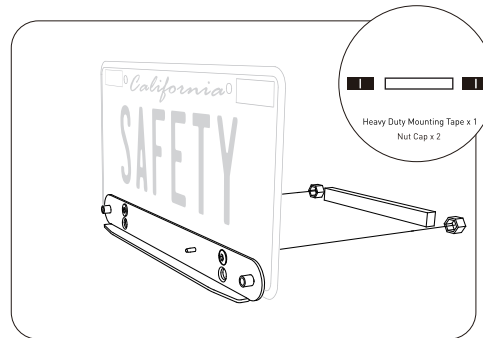


2 Affix the nut caps onto the hex nuts. Peel the mounting strip and attach firmly to the back of the license plate.

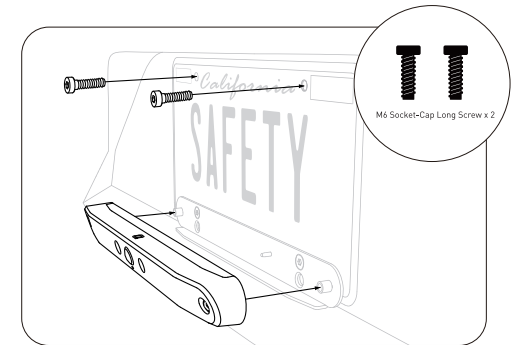


3 Reattach your license plate to your car with the M6 socket-cap long screws (certain cars may require M5 socket-cap long screws instead). Place your ZUS Smart Backup Camera on the mounting plate and tighten the security screws with the screwdriver.


Method 2

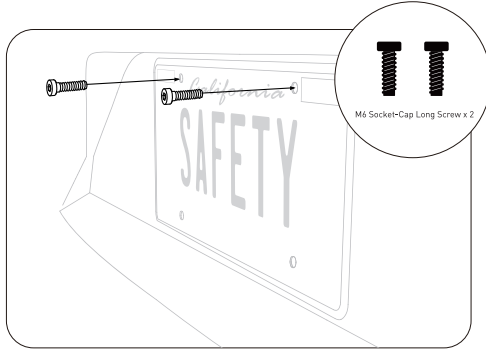

- 1 Reattach the license plate to your car with the two M6 socket-cap long screws. Certain cars may require M5 socket-cap long screws instead.

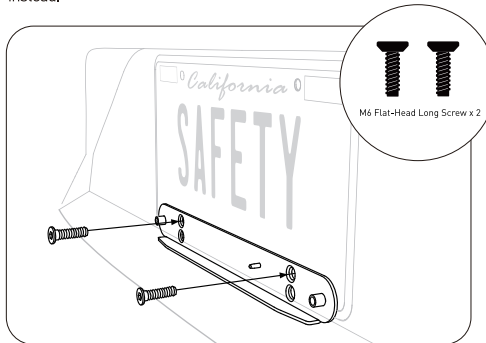


- 2 Align the top two holes of the mounting plate with the bottom two holes of your license plate. Secure the mounting plate to the license plate with the M6 flat-head long screws. Certain cars may require M5 flat-head long screws instead. Tighten with the screwdriver.

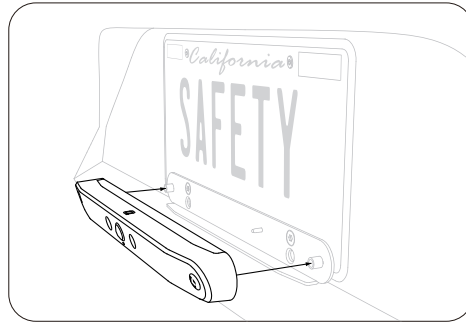

- 3 Place your ZUS Smart Backup Camera on the mounting plate and tighten the security screws with the screwdriver.

Method 3

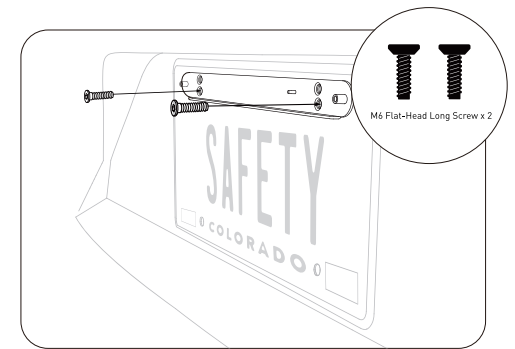

- 1 Align the bottom two holes of the mounting plate with the top two holes of your license plate and the top screw holes on the back of your car. Secure the mounting plate with the M6 flat-head long screws (certain cars may require M5 flat-head long screws instead). Tighten them with the provided screwdriver.



- 2 Place your ZUS Smart Backup Camera on the mounting plate and tighten the security screws with the screwdriver.

Specifications

Features	Specifications
Size	1.29 × 10.74 × 1.14 in / 33 × 273 × 29 mm
Weight	8.48 oz / 240.4 g
Batteries	2 × 18650 (Total 5200 mAh)
Camera	Panasonic 34120
Lens	170 HD wide-angle lens
Operating Temperature	-4 °F ~ 122 °F / -20 °C ~ 50 °C
Storage Temperature	-40 °F ~ 176 °F / -40 °C ~ 80 °C
Wireless Connection	Bluetooth 4.0 WiFi 2.4 Ghz

Important Safety Instructions

Do not submerge or expose to water for an extended period of time.
Do not place near any open flame sources.
Do not disassemble.
Avoid dropping.

Compatibility

Compatible with most smartphones and tablets that support Bluetooth and wifi connection, such as iPhone, iPad, Samsung, LG, HTC, Google Nexus, and etc.

Troubleshooting Procedures

Please check the following if unable to pair the Backup Camera:

1. Pair the device in the ZUS APP instead of via your phone's Bluetooth settings menu.
2. For Android users, please allow location access for ZUS App to pair with devices when using Bluetooth.

3. Long pressing the button on the back till you see the green LED blinks 3 times to activate the device; pairing Backup Camera only works when the device is activated.

Please check our FAQ (<http://nonda.zendesk.com>) for more troubleshooting procedures if problem not solved.

No NDA inc. One year Warranty

nonda warrants that your nonda hardware product (the "Product") will be free from defects in materials and workmanship under normal use for a period of one (1) year from the date of delivery.

REMEDIES

If a hardware defect in the Product arises and a valid claim is received within the Warranty Period, nonda will, at its sole option and subject to applicable laws: (a) repair the Product at no charge with a new or refurbished component or (b) replace the Product with a new or refurbished Product upon return of the defective Product. This Warranty does not apply to Products you purchased from unauthorized resellers, or where the instructions for use and activation of the Product are not complied with or where the Product is damaged as a result of abuse, accident, modification or other causes beyond our reasonable control. Any replacement product will be warranted for the remainder of the original warranty period or 30 calendar days, whichever is longer.

EXCLUSIONS AND LIMITATIONS

This Limited Warranty applies only to the original purchaser of Product that was purchased from an authorized retailer or sales channel. Non-authorized 3rd party receipts or order numbers are NOT accepted for warranty verification. Without limiting the foregoing, the Limited Warranty does not apply to any (a) nonda products and services other than the

Product, (b) Product that is, or nonda reasonably believes to be, stolen, (c) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (d) to damage caused by operating the Product outside the permitted or intended uses described by nonda or with improper voltage or power supply;

OBTAIN WARRANTY SERVICES

To obtain remedies under this Warranty, nonda must receive your claim before the end of the Warranty Period. You also must deliver the Product, in either its original packaging or packaging providing an equal degree of protection, to the address specified by nonda. Consumer shall bear the cost of shipping the device to nonda. By sending the Device, consumer agrees to transfer ownership to nonda. nonda may not return the original device to consumer. If the claim is justified based on this Warranty, nonda shall bear the cost of shipping the repaired or replacement device to the Consumer.

How to Make a Warranty Claim

Read through our warranty above. If you believe you are covered by the warranty, please prepare the following documents and email them to cs@nonda.us.

1. A copy or screenshot of the original purchase invoice to verify your warranty [order ID, purchase date, website or store]
 2. A description of the problem with a photo illustrating the physical damage
 3. Your shipping address including name, postal code and phone number
- If you need software support only, you may contact us with your app account and phone operation system. We would be glad to help.

Please note that, in the European Union, any warranty period less than two years shall be increased to two years.

Regulatory Compliance

FCC Compliance Statement

FCC ID: 2AFZB-ZURCBKUALZ

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

This device is acting as slave and operating in the 2.4 GHz (2412 ~2462 MHz) band. Ad Hoc function is supported but not able to operate on non-US frequencies.

FCC Radio Frequency Exposure Statement

The device has been evaluated to meet general RF exposure requirements. The device can be used in fixed/mobile exposure conditions. The min separation distance is 20cm.

Declaration of Conformity



Refer to article 10(9), shall be provided as follows:

Hereby, No NDA inc. declares that the radio equipment type Wireless Smart Backup Camera is in compliance with Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following Internet address: <https://www.nonda.co/pages/regulation/>.

Please note that, in the European Union, any warranty period less than two years shall be increased to two years.

Manufacturer: No NDA Inc.

Address: 320 Mountain View Avenue, Mountain View, CA 94041 USA.

Developed by nonda in California. Assembled in China.
No NDA Inc., 320 Mountain View Avenue, Mountain View, CA 94041, USA.
No NDA Inc., Günther-Wagner-Allee 13, 30177 Hannover, Germany.
www.nonda.co | TM and © 2017 No NDA Inc. All rights reserved.