


A. RFD1000T Operation Guide

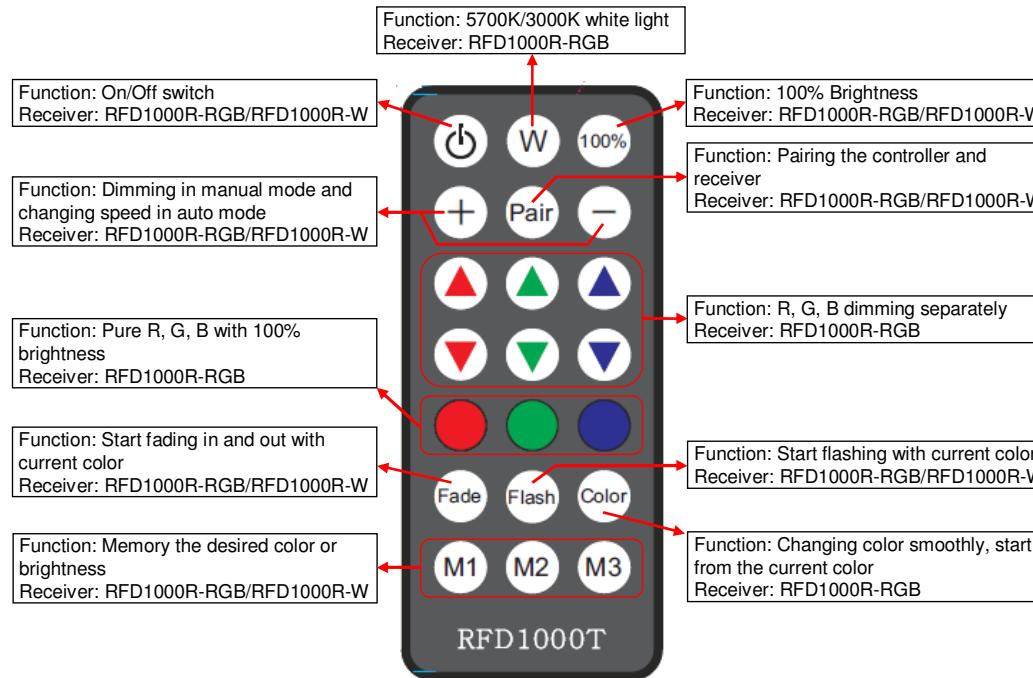

Memory:

- Tune the light bar to preferred color and brightness.
- Press "M1/M2/M3" and don't release(2 seconds) until light bar off-on 1 time.
- The color and brightness is memorized.

Pair(1 receiver can be paired with max. 3 controllers):

- Power on all receiver(connected with light bar) that will be paired with the controller.
- Press "Pair" in 10 second after power on and don't release(2 seconds) until bar off-on 2 times.
- The receivers are paired with the controller and can't be controlled by other controller.


Un-Pair:

- Power on all receiver(connected with light bar) that will be un-paired with the controller.
- Press "Pair" in 10 seconds after power on and don't release.
- The light bar will off-on 2 times first and still don't release the button.
- Don't release the button until the light bar off-on 1 time(20 seconds after off-on 2 times).
- The receivers are un-paired with the controller and can be controlled by other controller.

B. RFD1000R Installation Guide

B-1 Installation Position and Direction

The RFD1000R must be installed at the beginning of light bar chain and with correct direction.

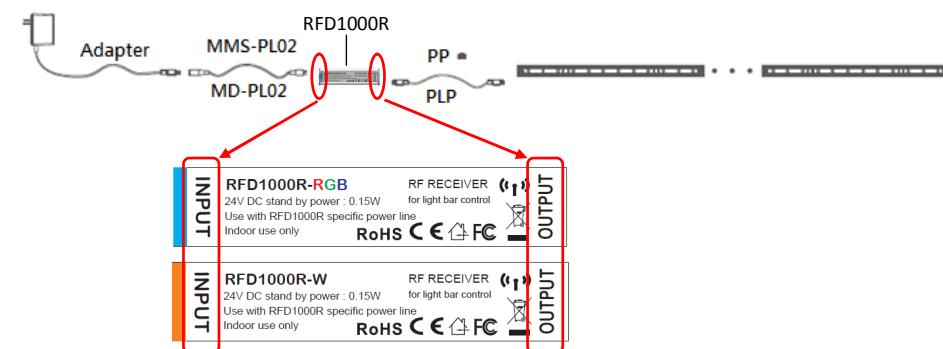

B-2 Channel Connection Rule

Single



*DC 24V power selection guide: Total wattage > (LightBar total wattage) * 1.3