






The test plot as follows:

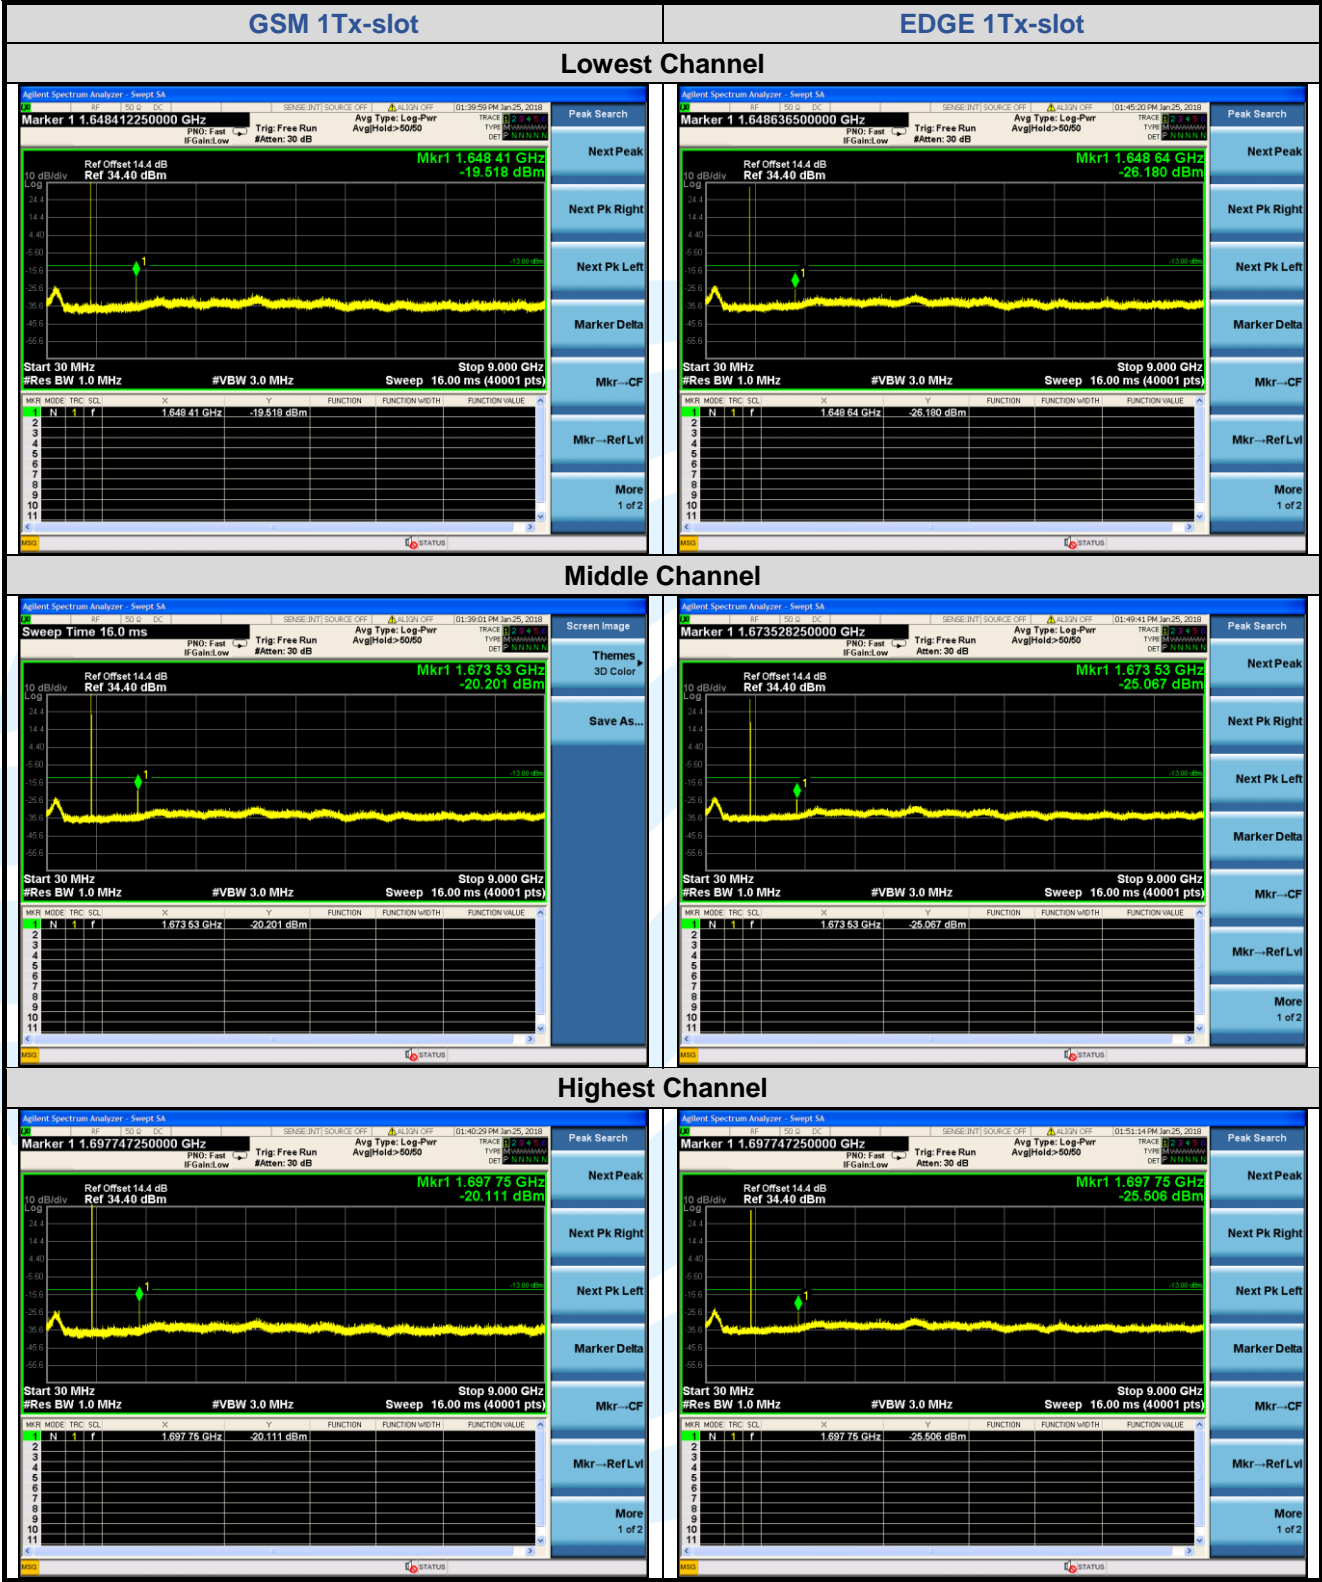


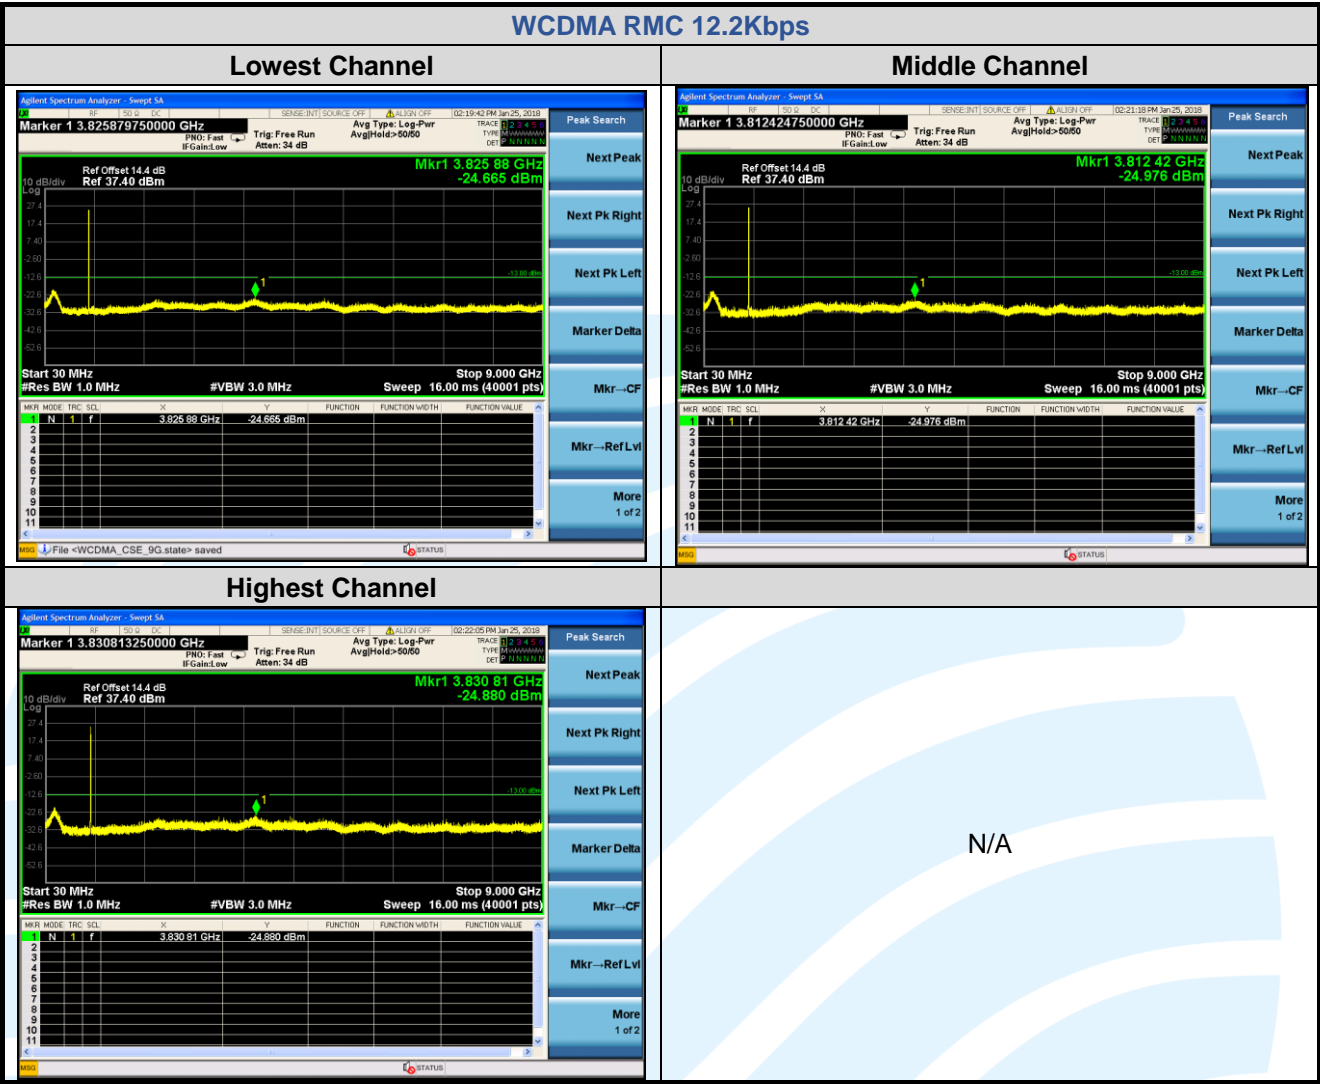


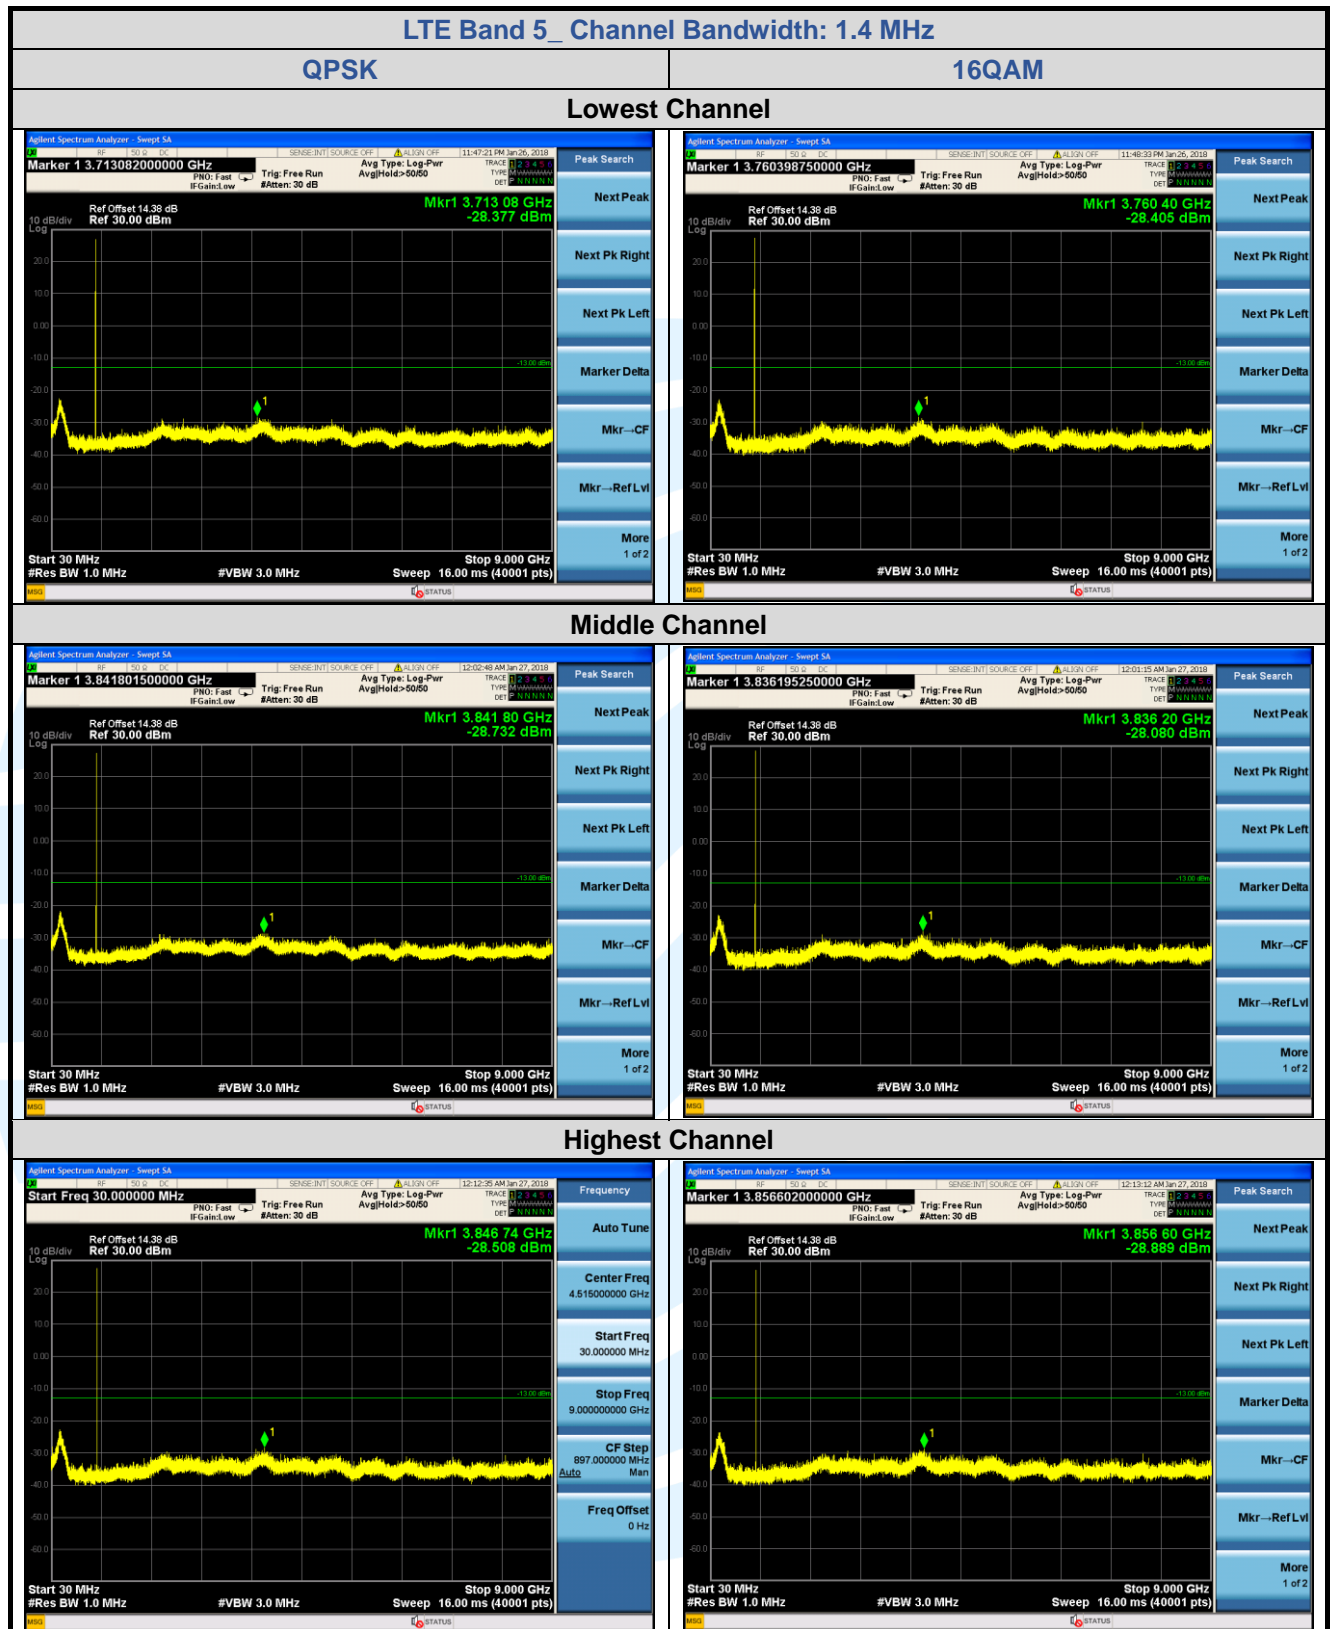


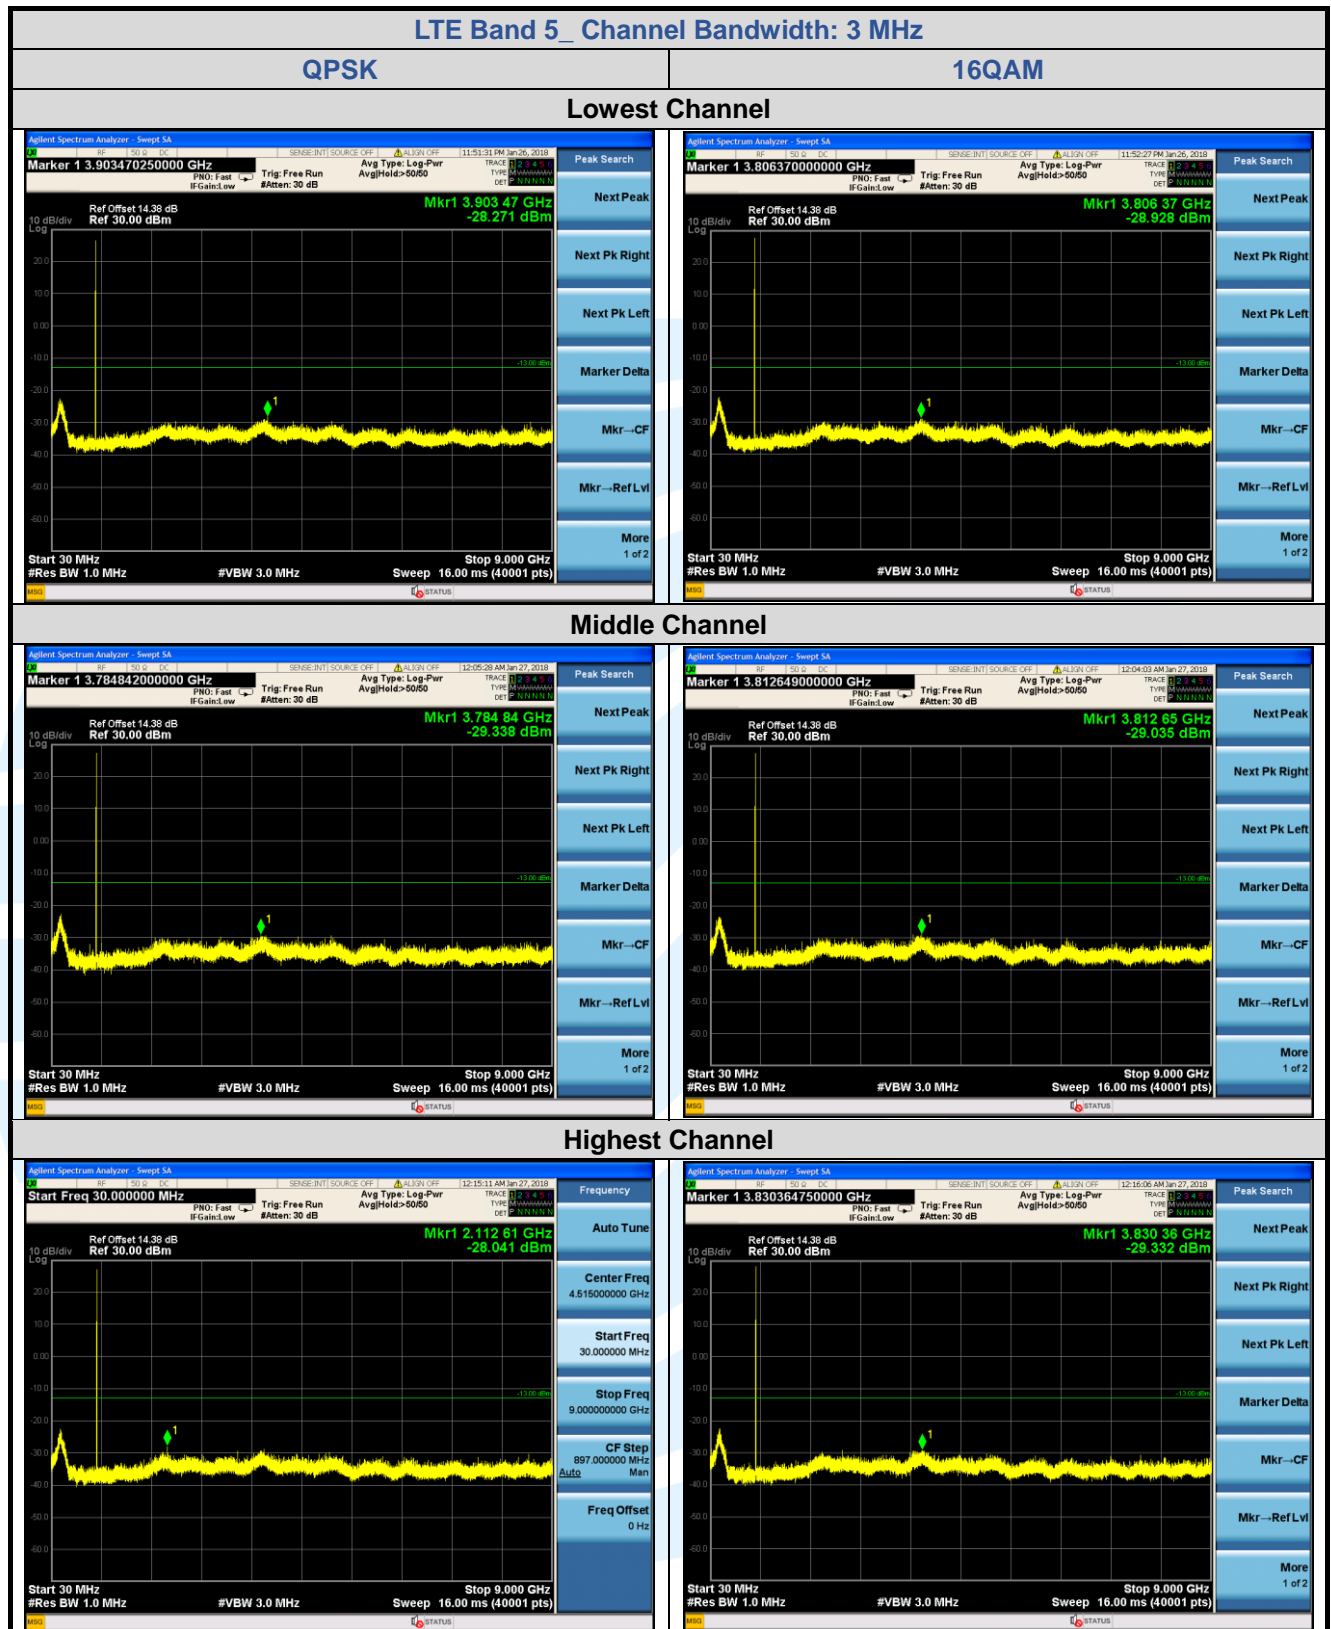

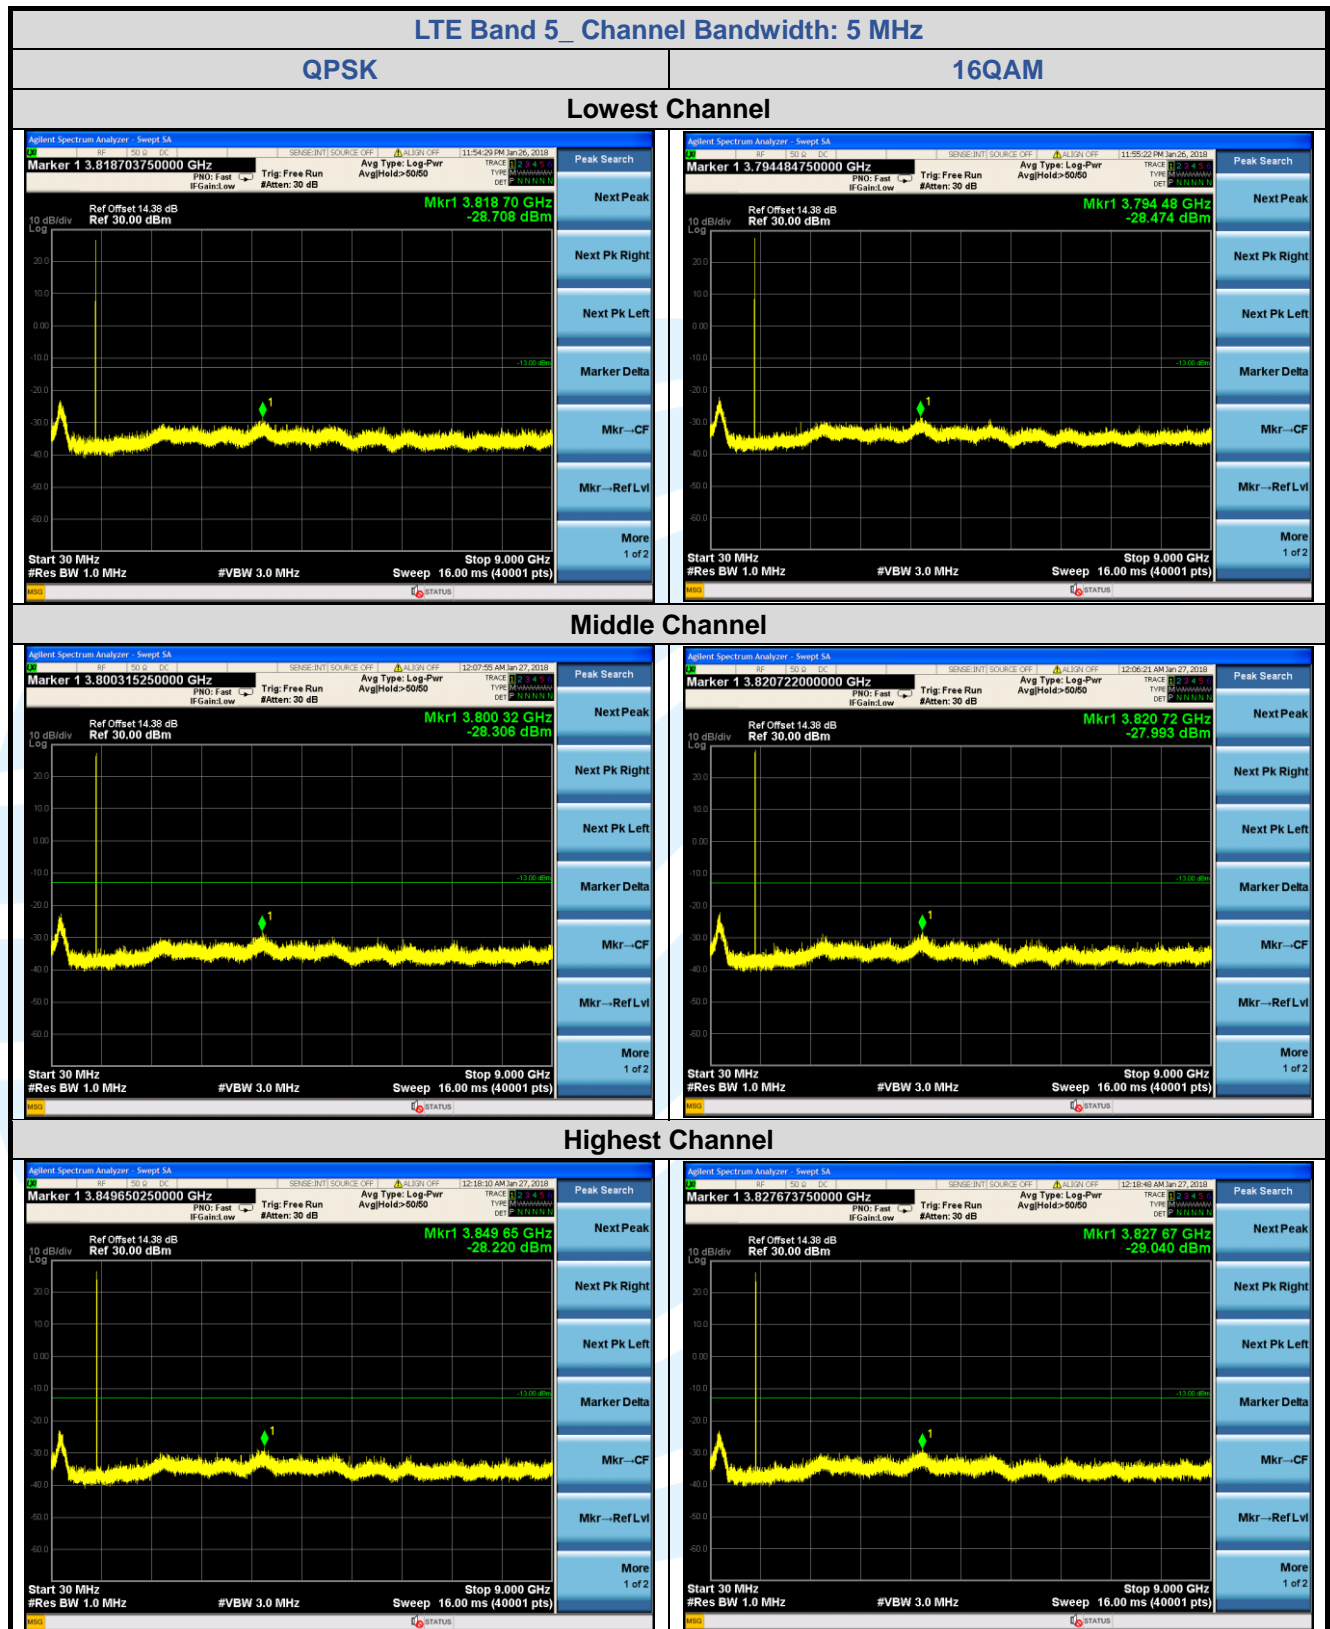

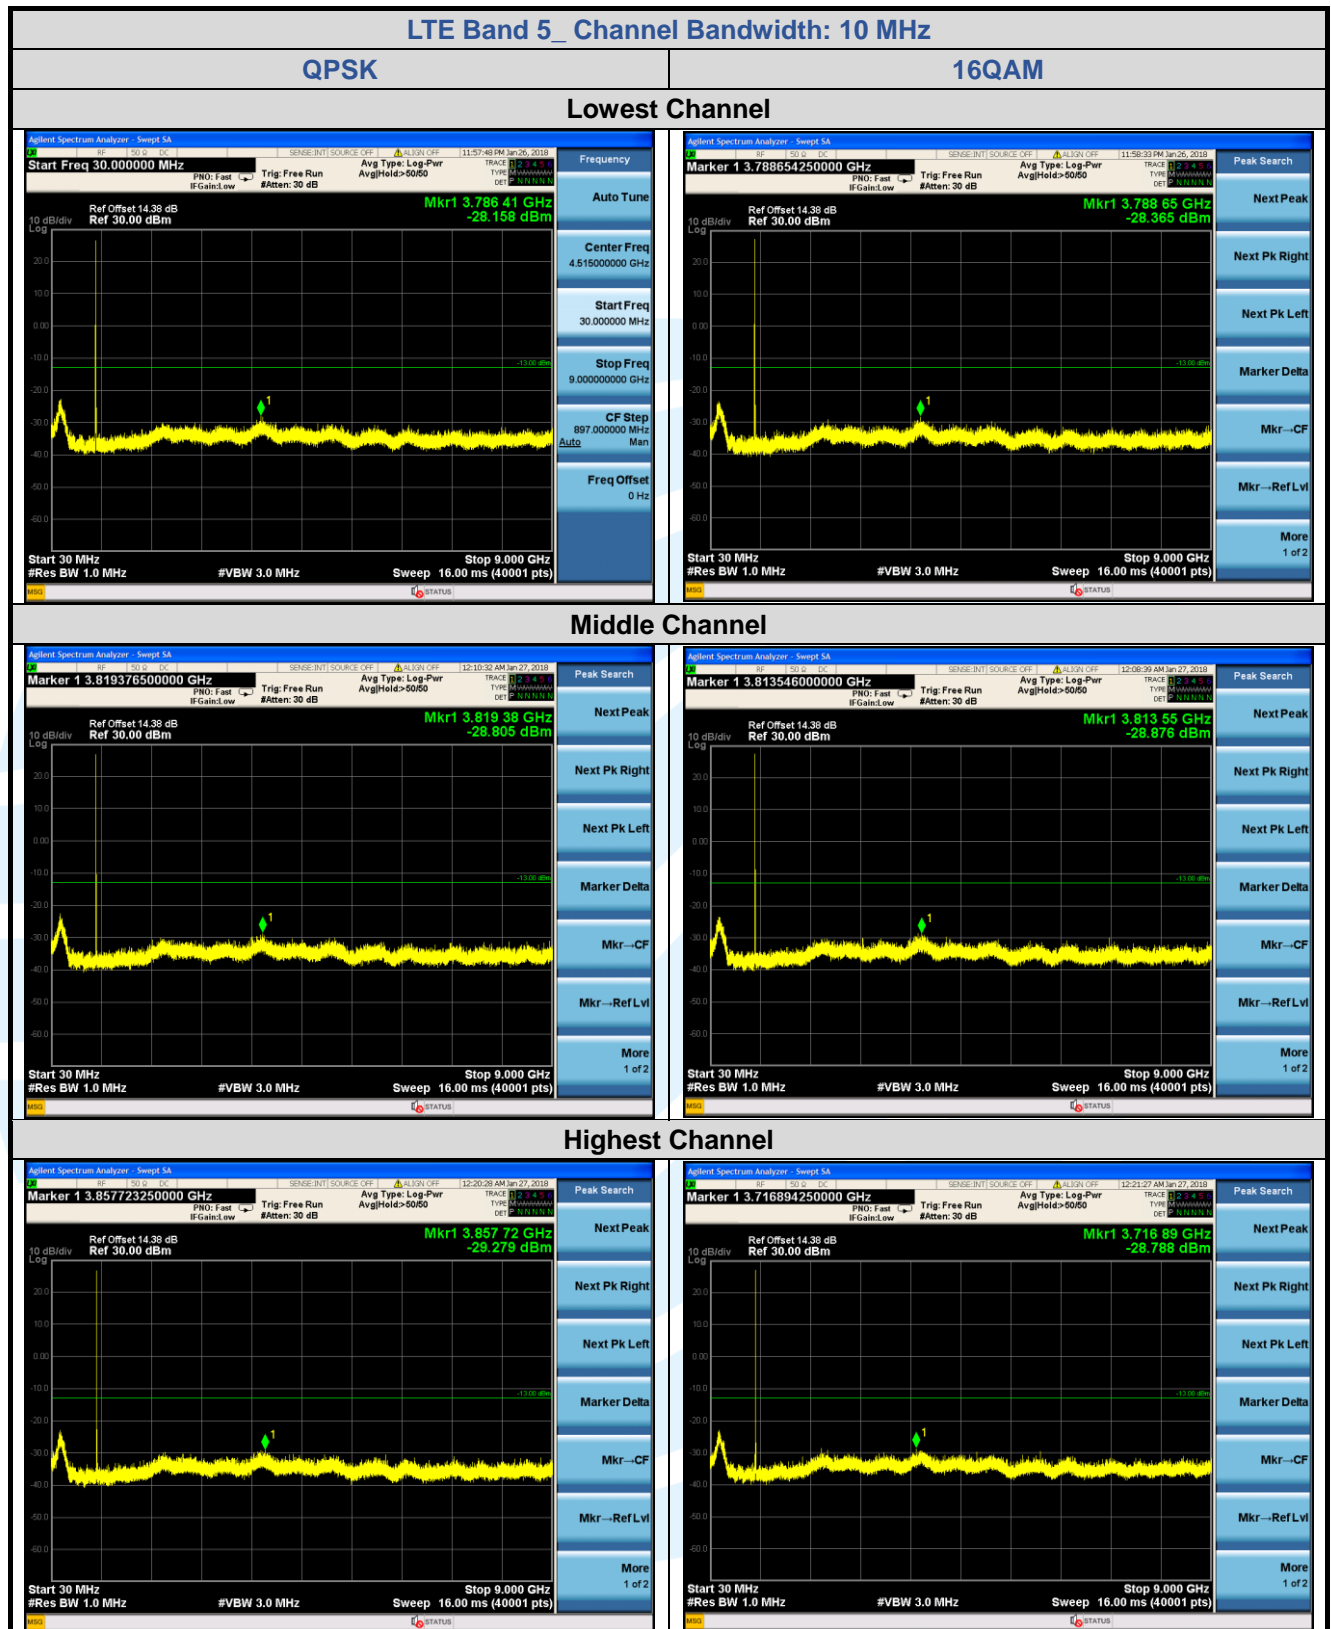

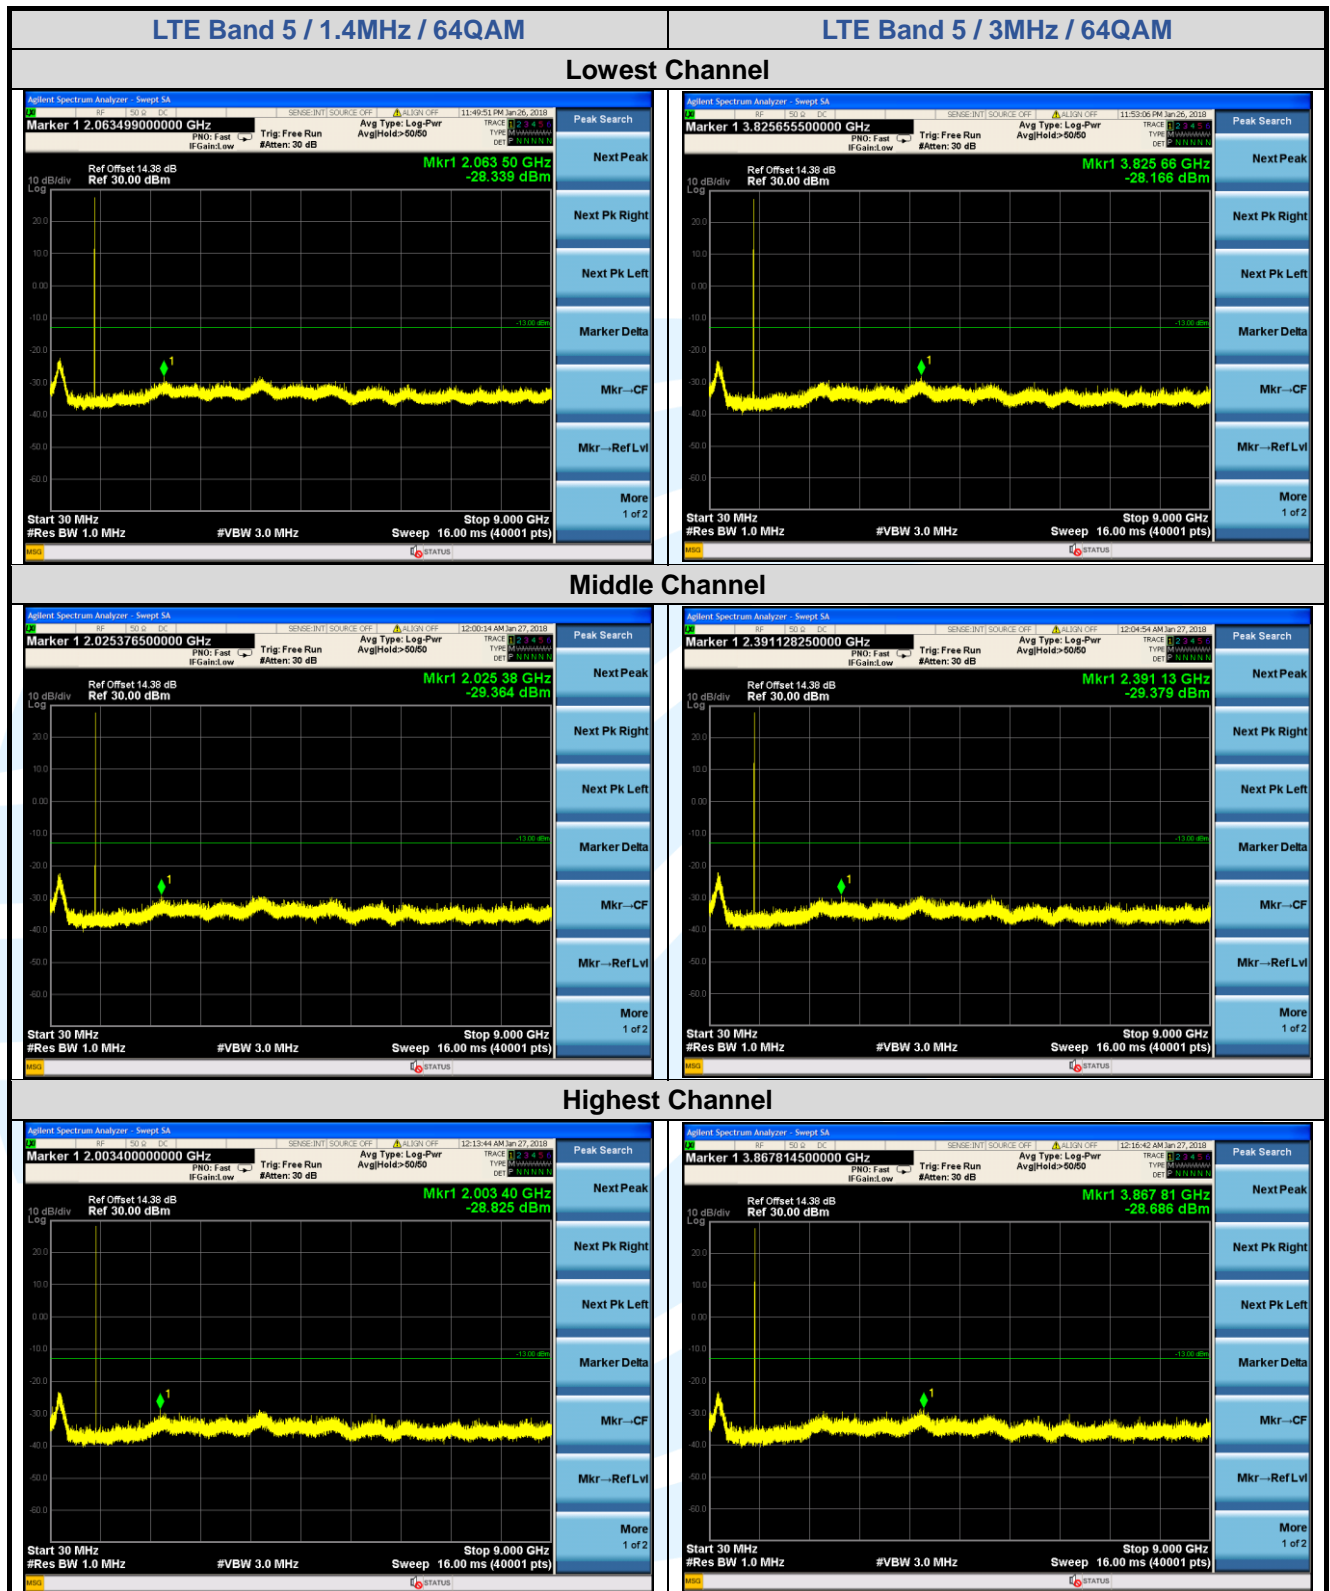

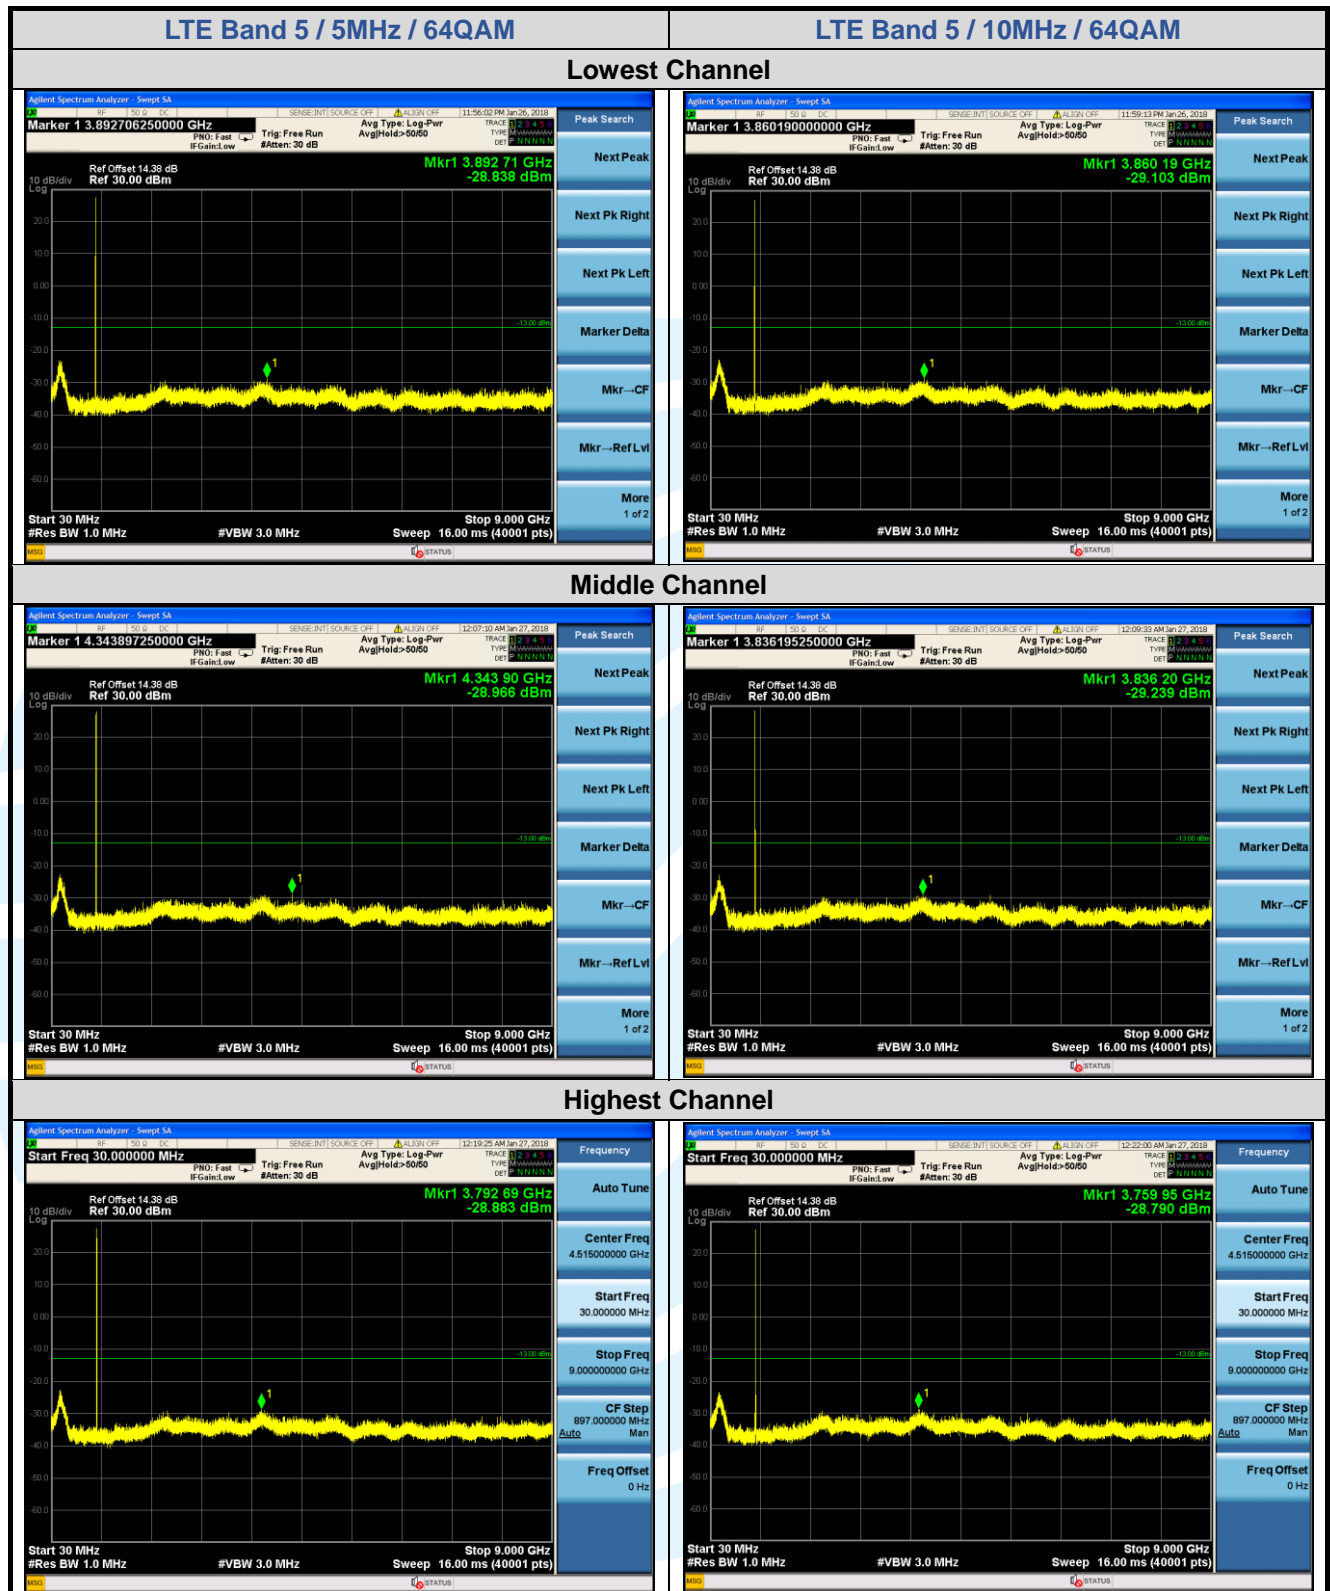

## 5.8 FIELD STRENGTH OF SPURIOUS RADIATION

**Test Requirement:** FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)

**Test Method:** ANSI/TIA-603-E-2016 & KDB 971168 D01v03

**Receiver Setup:**

Frequency	Detector	RBW	VBW	Remark
0.009 MHz-30 MHz	Peak	10 kHz	30 KHz	Peak
30 MHz-1 GHz	Quasi-peak	100 kHz	300 KHz	Peak
Above 1 GHz	Peak	1 MHz	3 MHz	Peak

**Limits:**

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB. The emission limit equal to -13 dBm.

**Test Setup:** Refer to section 4.2.1 for details.

**Test Procedures:**

1. Scan up to 10th harmonic, find the maximum radiation frequency to measure.
2. The technique used to find the Spurious Emissions of the transmitter was the antenna substitution method. Substitution method was performed to determine the actual ERP/EIRP emission levels of the EUT.

Test procedure as below:

- 1) The EUT was powered ON and placed on a 0.8/1.5m high table at a 3 meter semi/fully Anechoic Chamber. The antenna of the transmitter was extended to its maximum length. Modulation mode and the measuring receiver shall be tuned to the frequency of the transmitter under test.
- 2) The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- 3) The disturbance of the transmitter was maximized on the test receiver display by raising and lowering from 1m to 4m the receive antenna and by rotating through 360° the turntable. After the fundamental emission was maximized, a field strength measurement was made.
- 4) Steps 1) to 3) were performed with the EUT and the receive antenna in both vertical and horizontal polarization.
- 5) The transmitter was then removed and replaced with another antenna. The center of the antenna was approximately at the same location as the center of the transmitter.
- 6) A signal at the disturbance was fed to the substitution antenna by means of a non-radiating cable. With both the substitution and the receive antennas horizontally polarized, the receive antenna was raised and lowered to obtain a maximum reading at the test receiver. The level of the signal generator was adjusted until the measured field strength level in step 3) is obtained for this set of conditions.
- 7) The output power into the substitution antenna was then measured.
- 8) Steps 6) and 7) were repeated with both antennas polarized.
- 9) Calculate power in dBm by the following formula:

$$\text{ERP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBd)}$$

$$\text{EIRP(dBm)} = \text{Pg(dBm)} - \text{cable loss (dB)} + \text{antenna gain (dBi)}$$

$$\text{EIRP} = \text{ERP} + 2.15\text{dB}$$

where:

Pg is the generator output power into the substitution antenna.

- 10) Test the EUT in the lowest channel, the middle channel the Highest channel
- 11) The radiation measurements are performed in X, Y, Z axis positioning for EUT operation mode, and found the Z axis positioning which it is worse case.
- 12) Repeat above procedures until all frequencies measured was complete.

**Equipment Used:** Refer to section 3 for details.


**Test Result:** Pass

**The measurement data as follows:**


## Main\_Antenna

### GSM 1Tx-slot\_Middle Channel

#### Horizontal

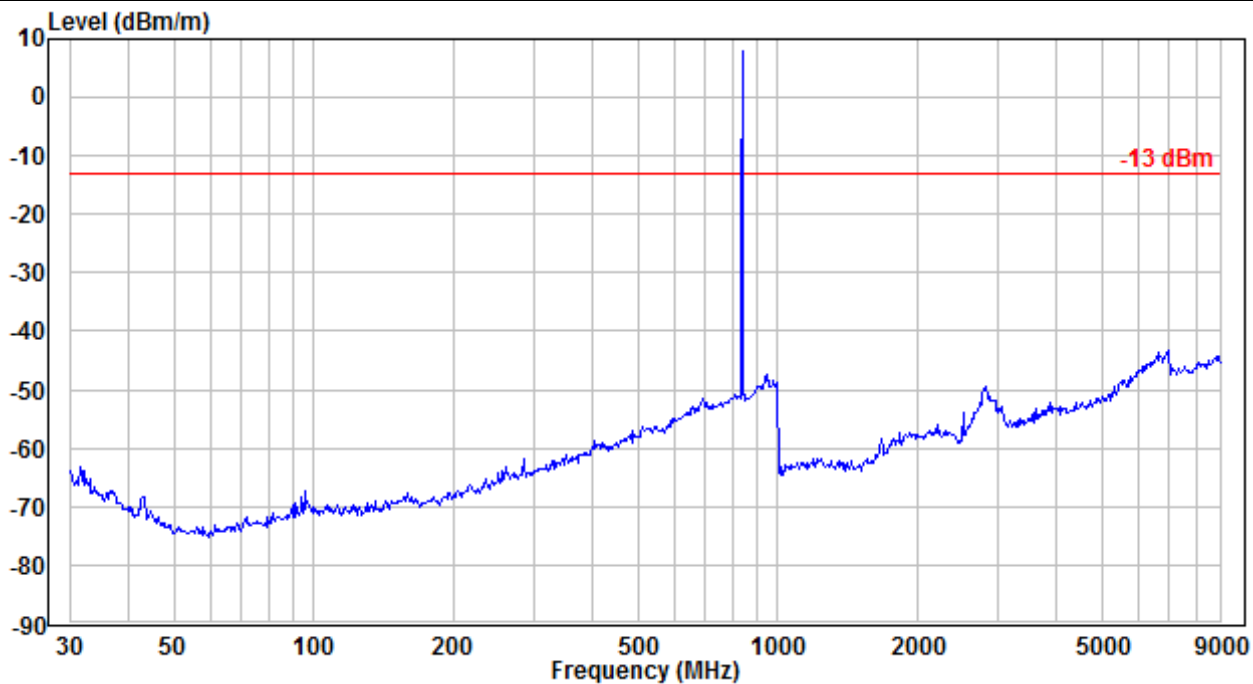

#### Vertical

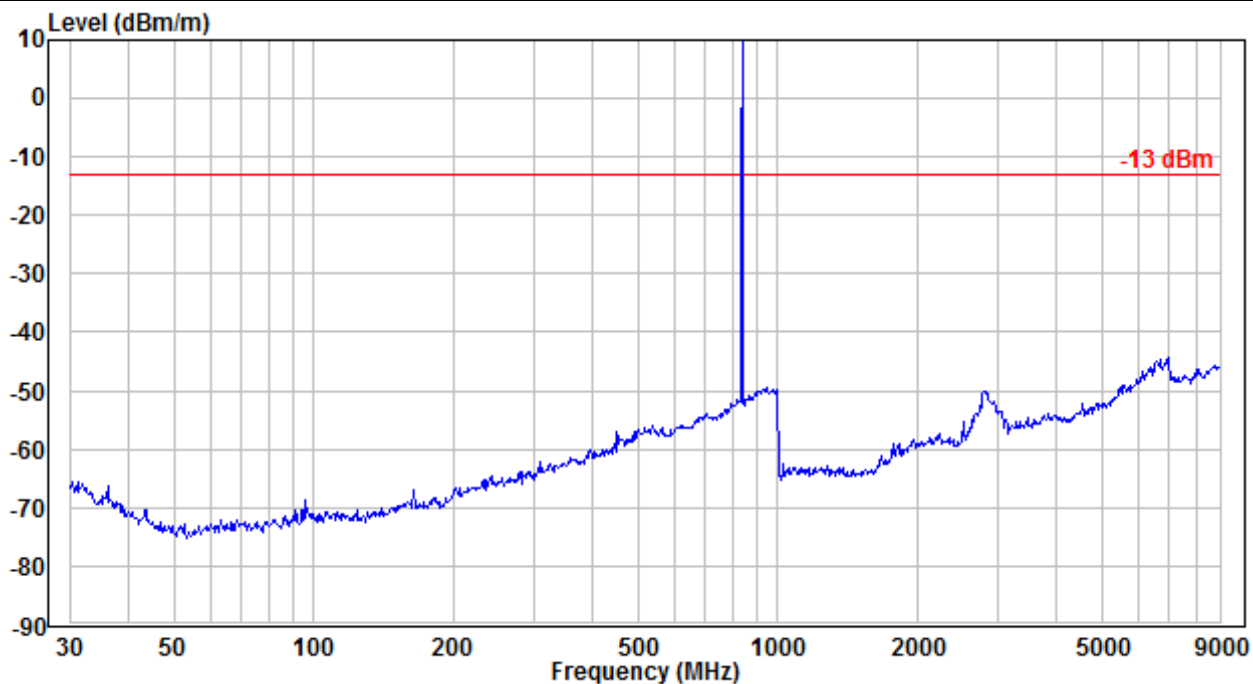

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)


[Http://www.uttlab.com](http://www.uttlab.com)

# EDGE 1Tx-slot\_Middle Channel

## Horizontal

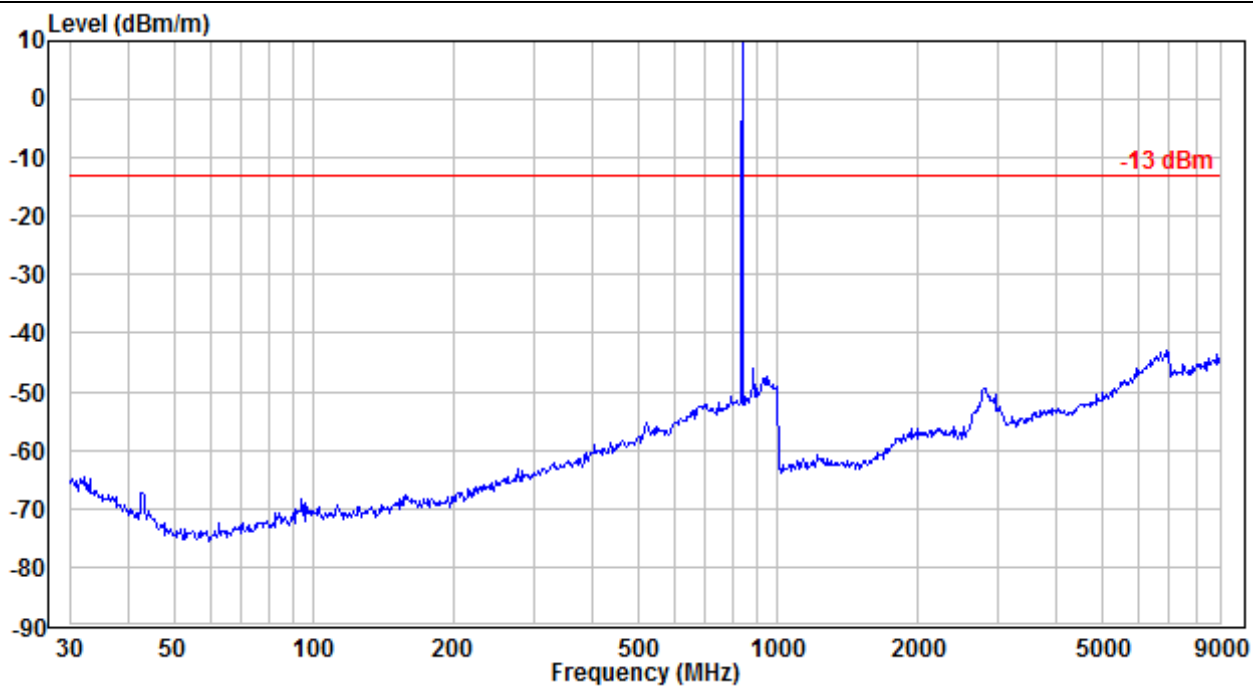

## Vertical

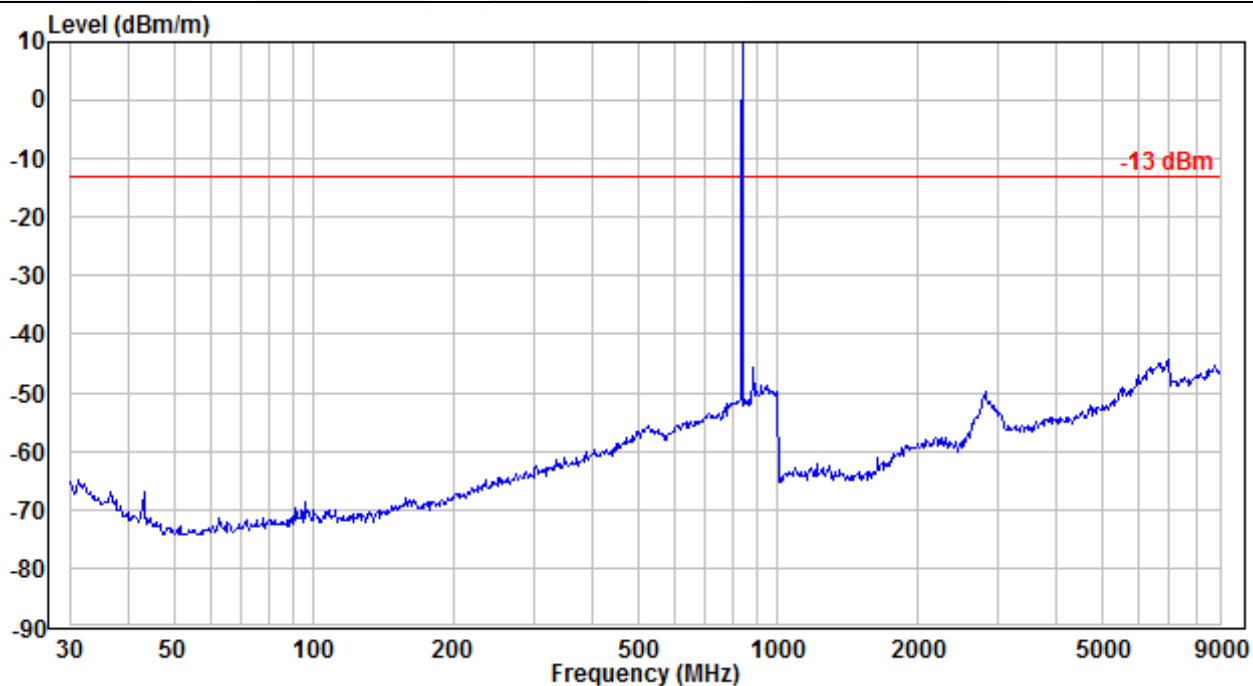

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# WCDMA RMC 12.2Kbps\_Middle Channel

## Horizontal

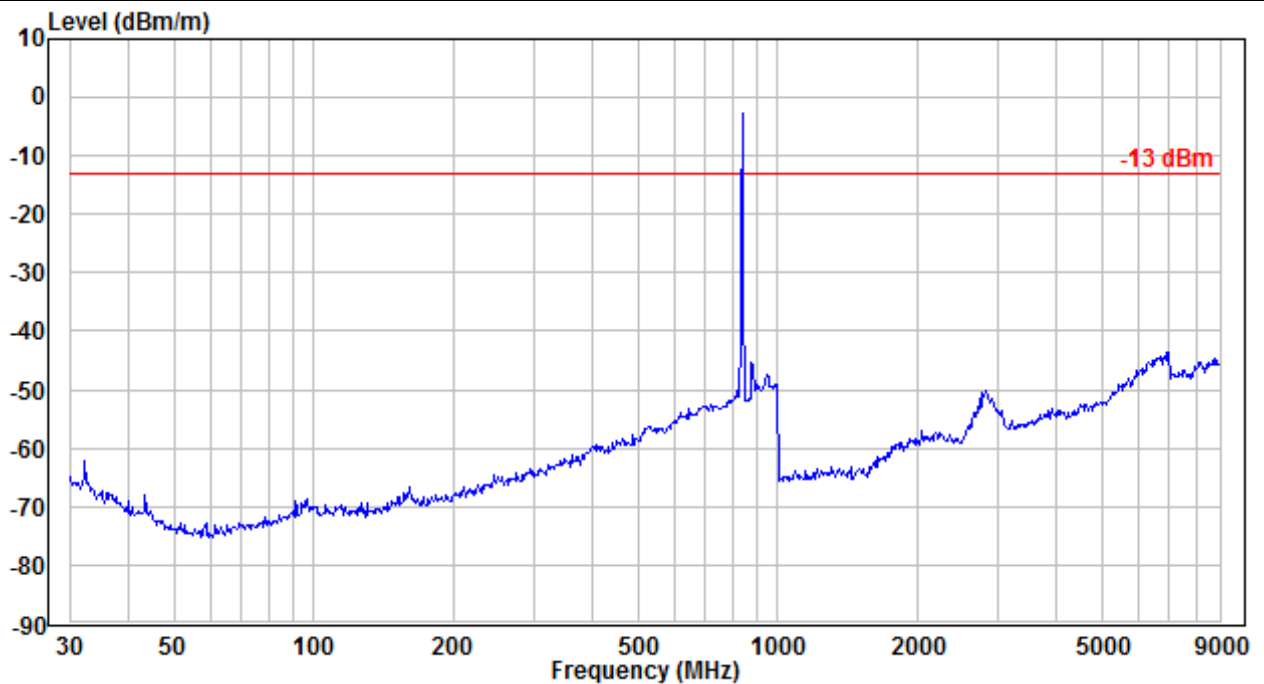

## Vertical

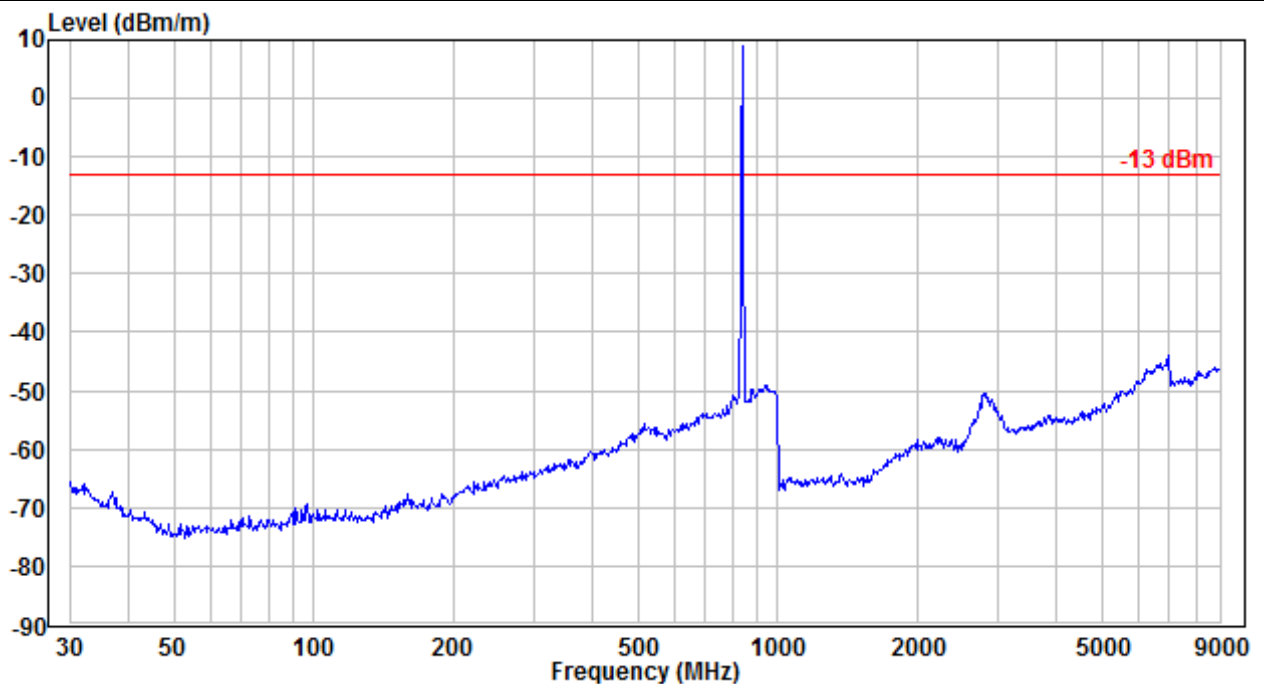

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 1.4 MHz / QPSK\_ Middle Channel

## Horizontal

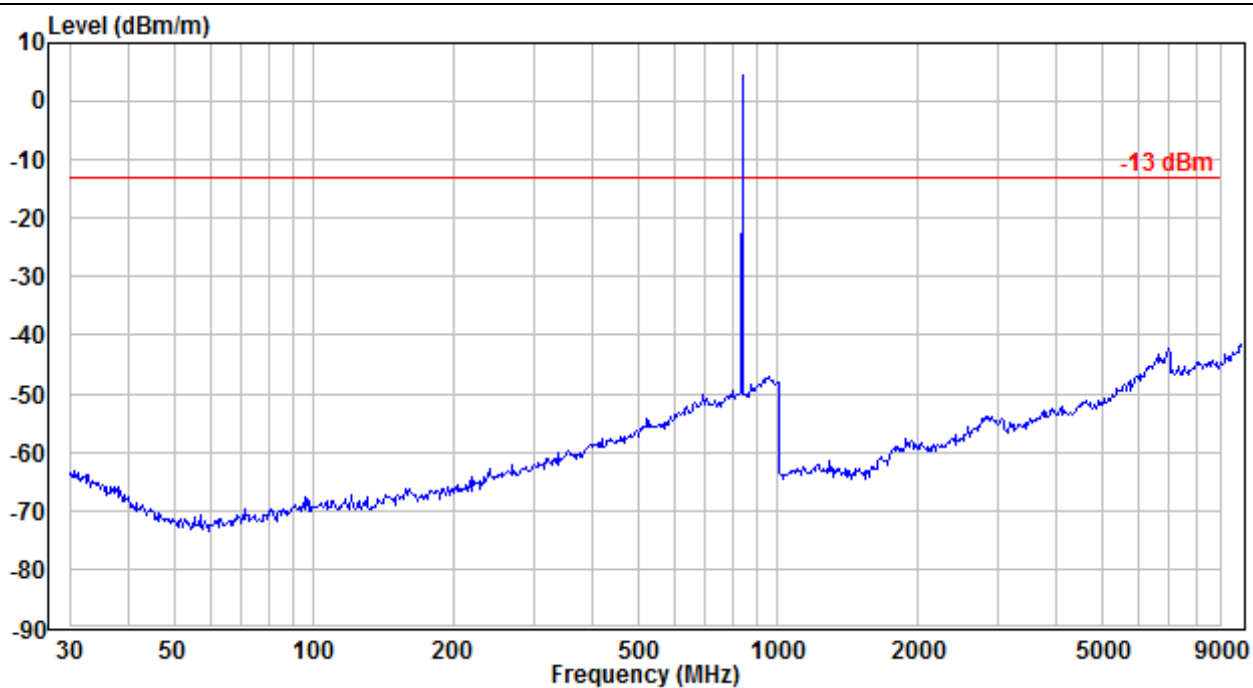

## Vertical

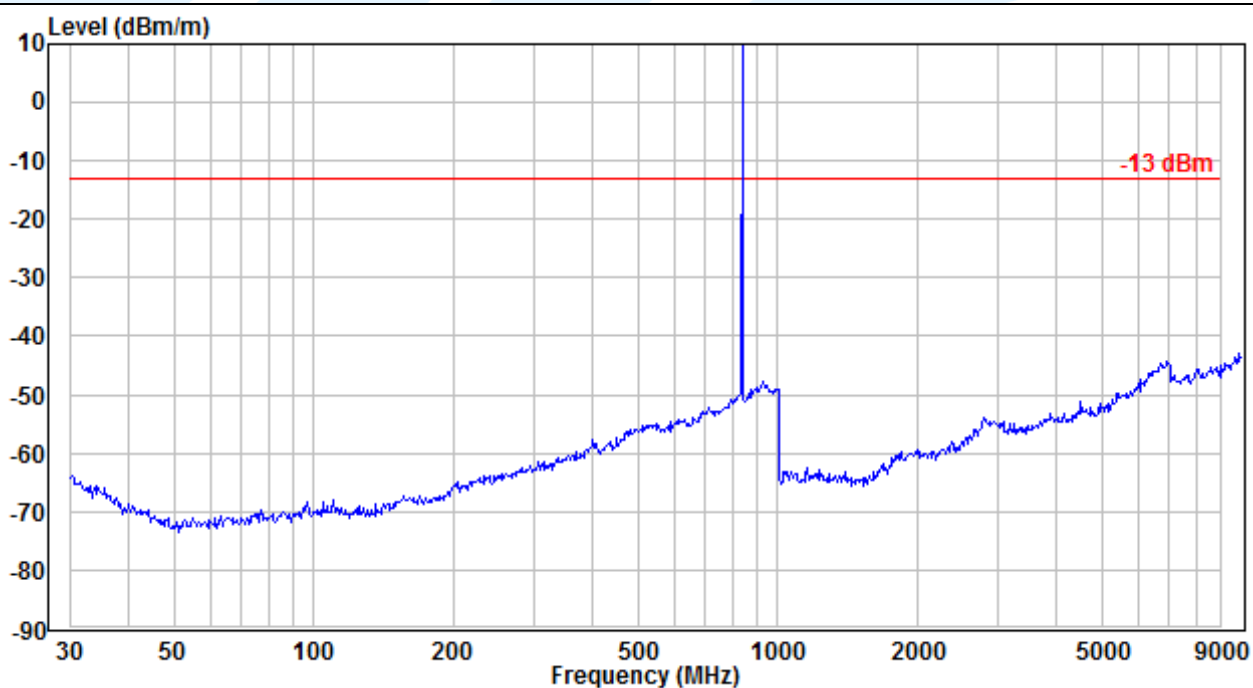

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 3 MHz / QPSK\_ Middle Channel

## Horizontal

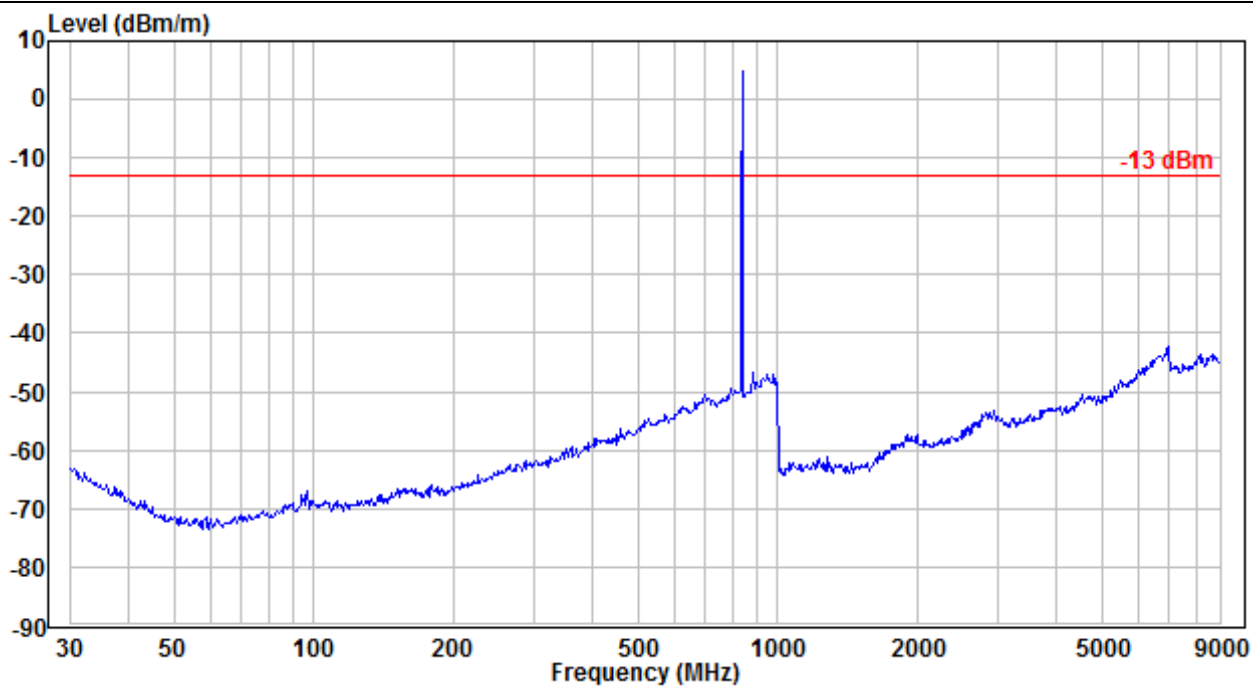

## Vertical

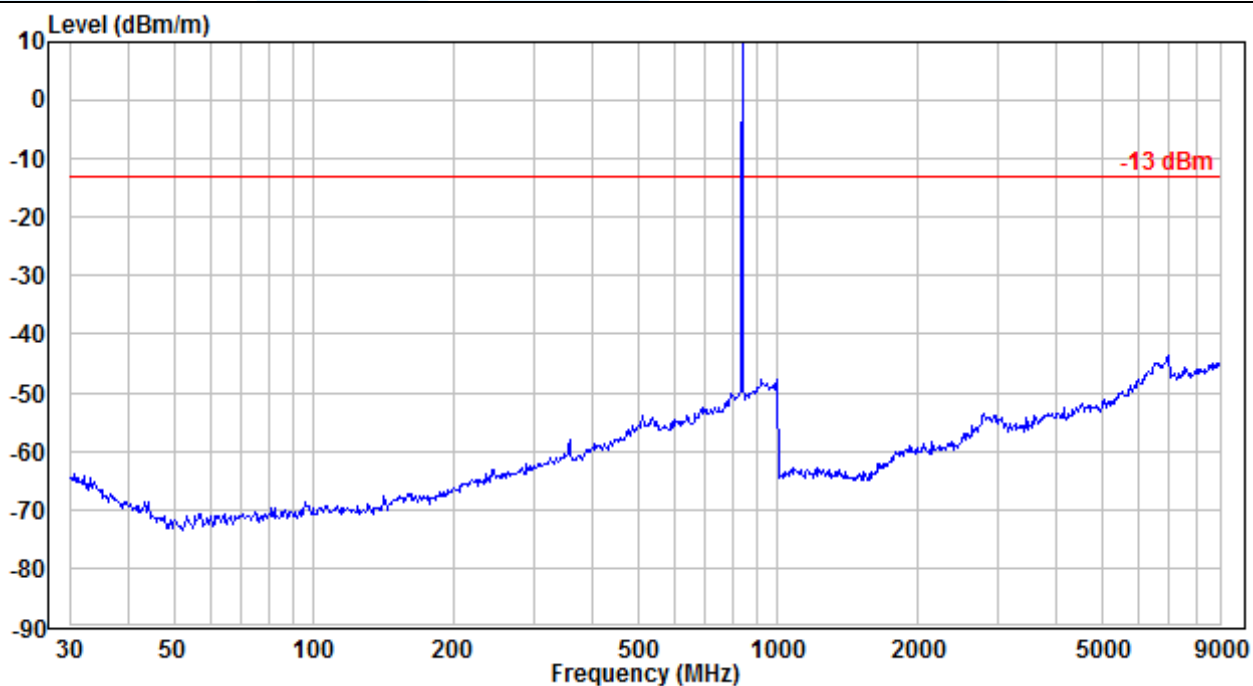

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 5 MHz / QPSK\_ Middle Channel

## Horizontal

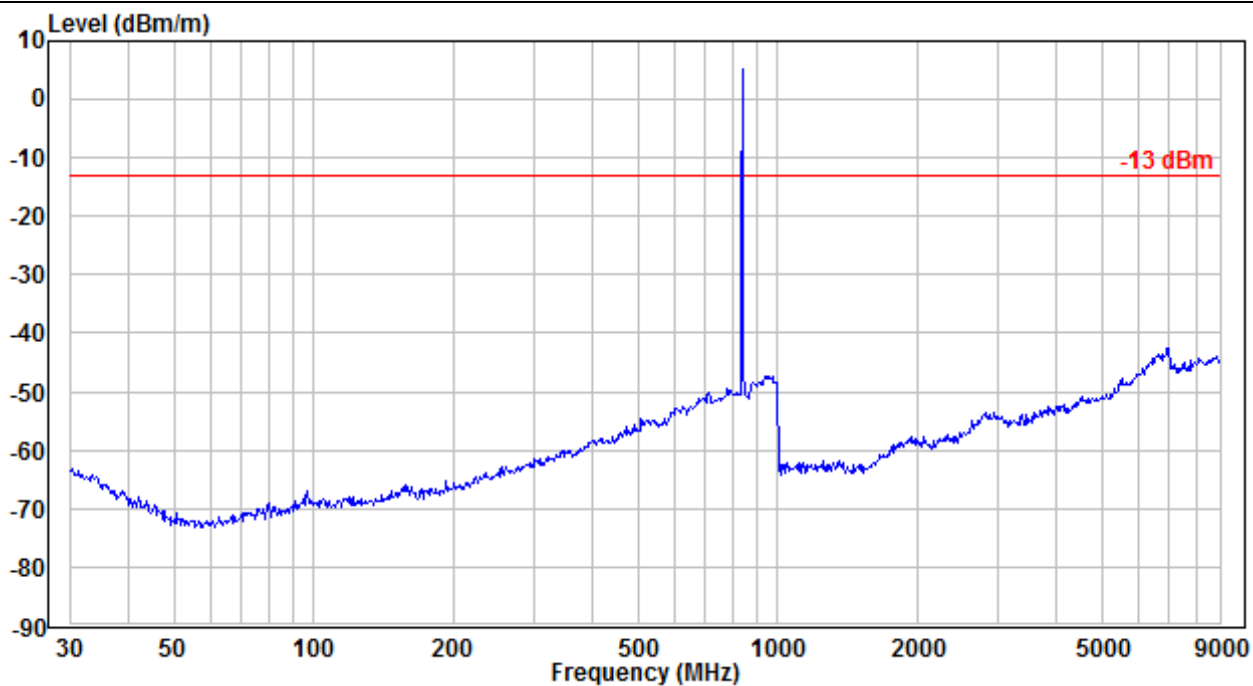

## Vertical

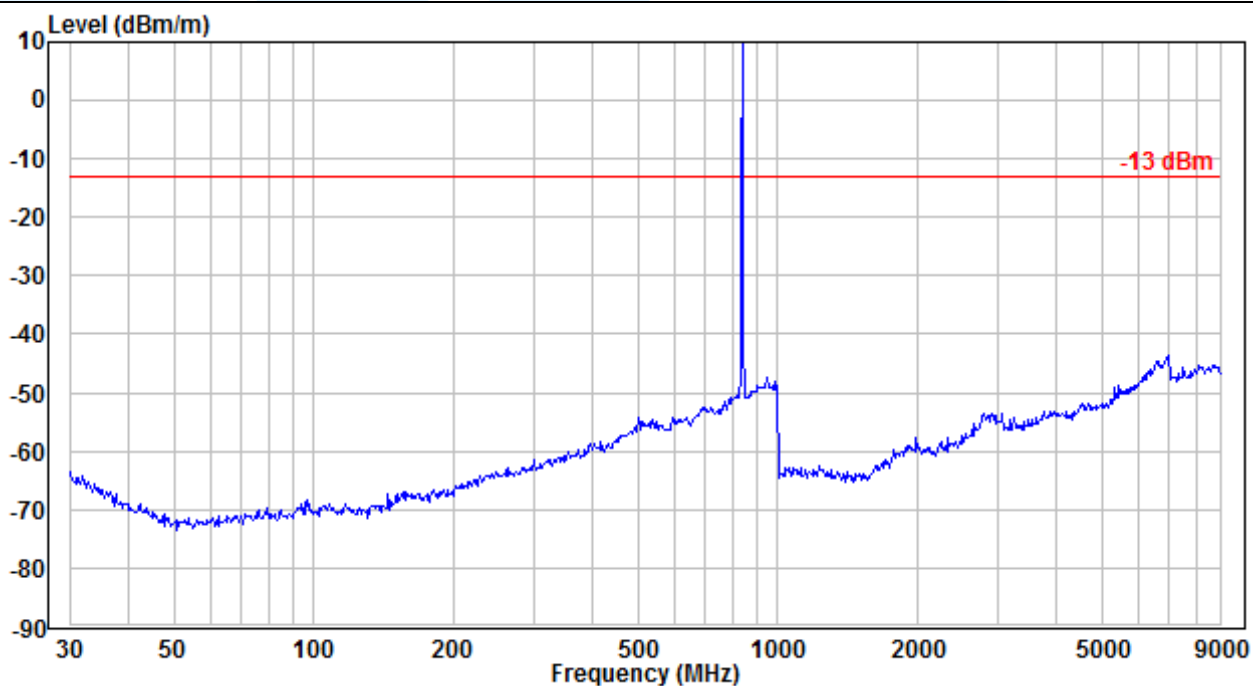

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 10 MHz / QPSK\_ Middle Channel

## Horizontal

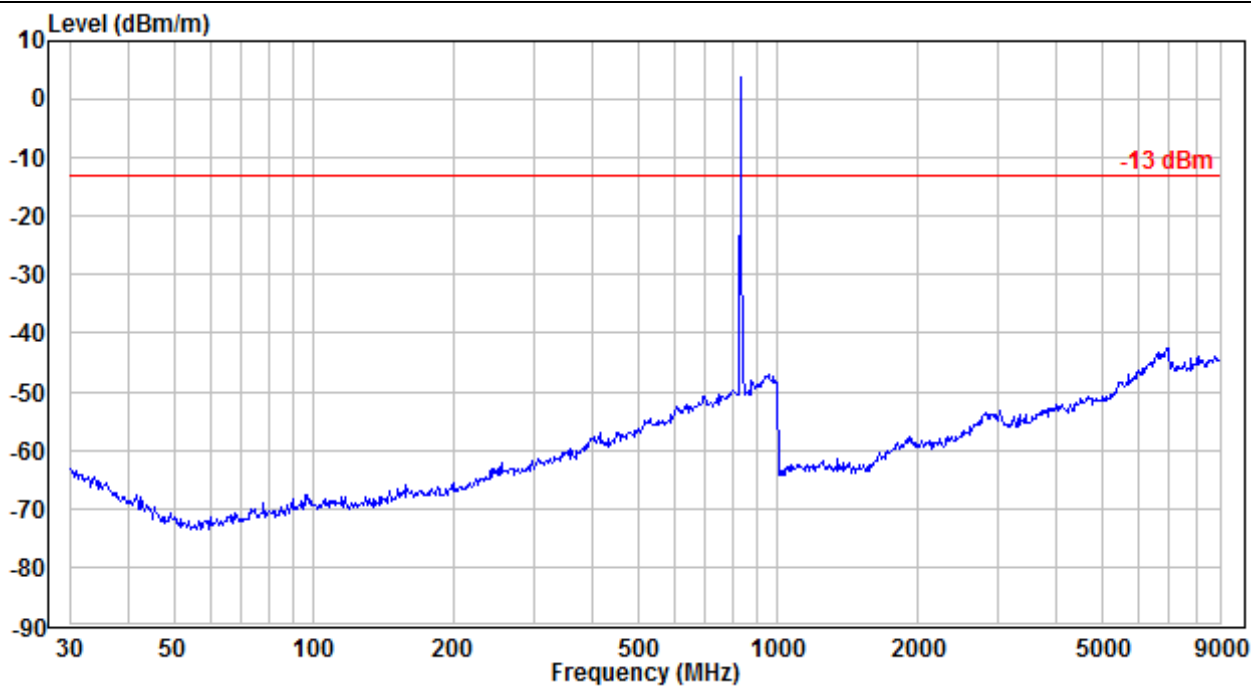

## Vertical

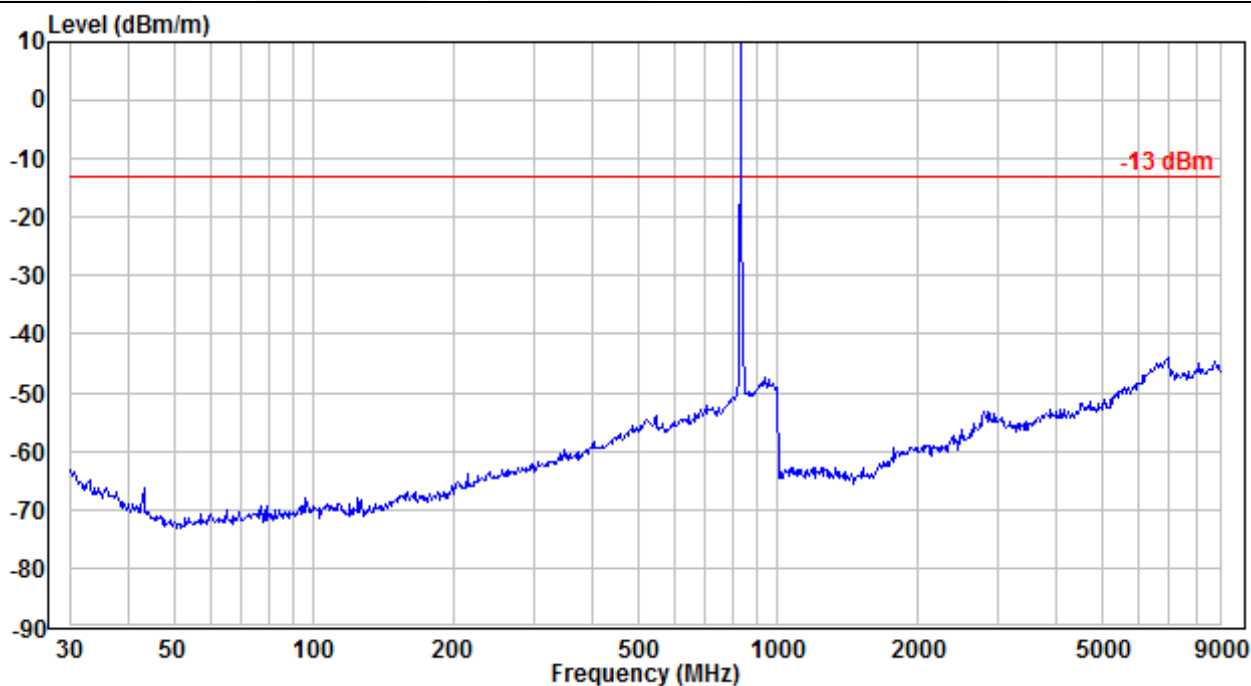

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

[Http://www.uttlab.com](http://www.uttlab.com)


# AUX\_Antenna

## GSM 1Tx-slot\_Middle Channel

### Horizontal

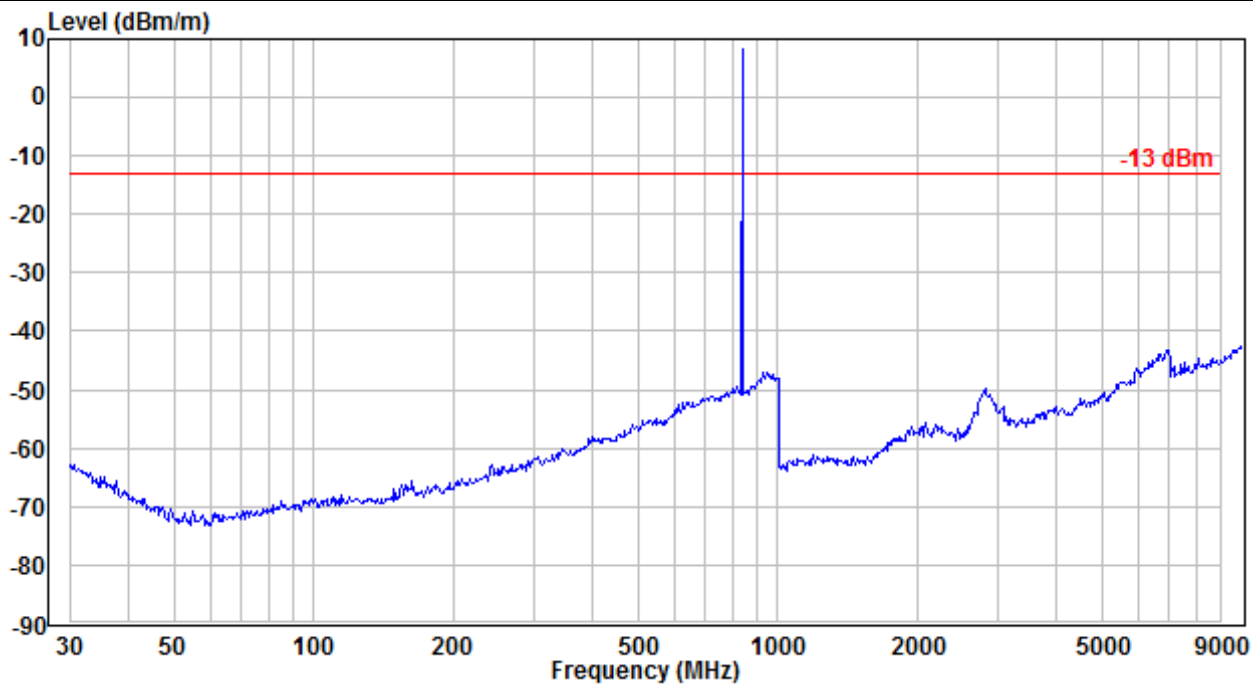

### Vertical

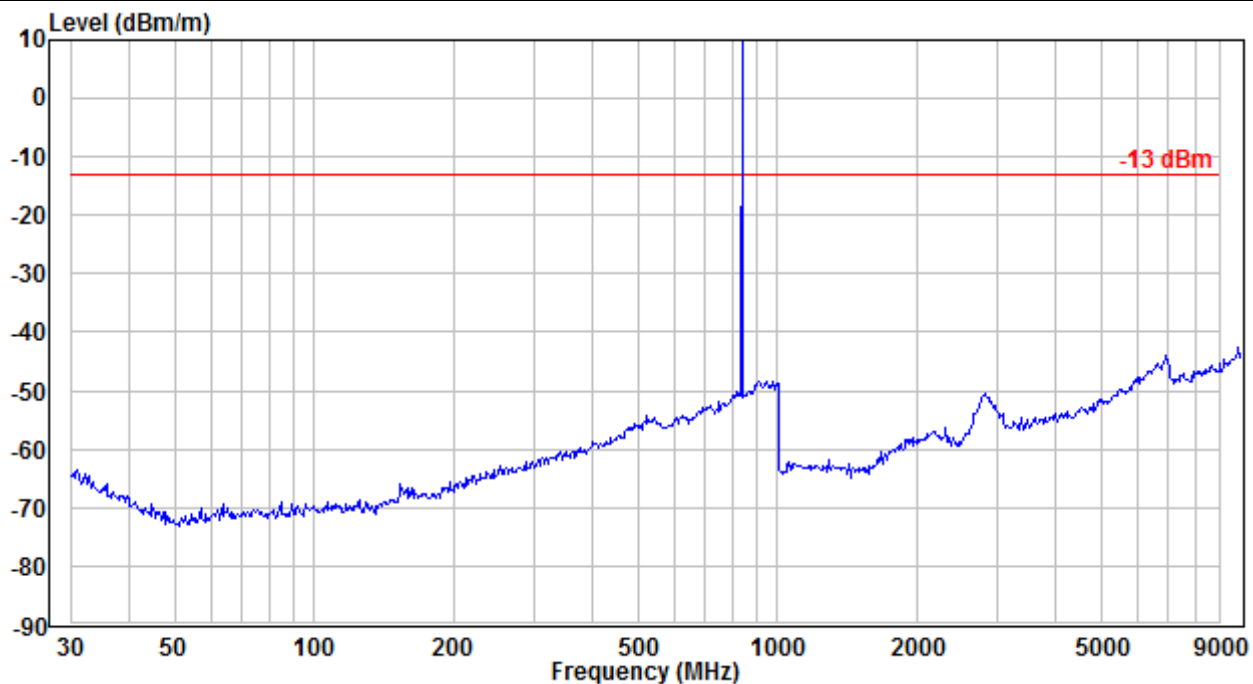

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# EDGE 1Tx-slot\_Middle Channel

## Horizontal

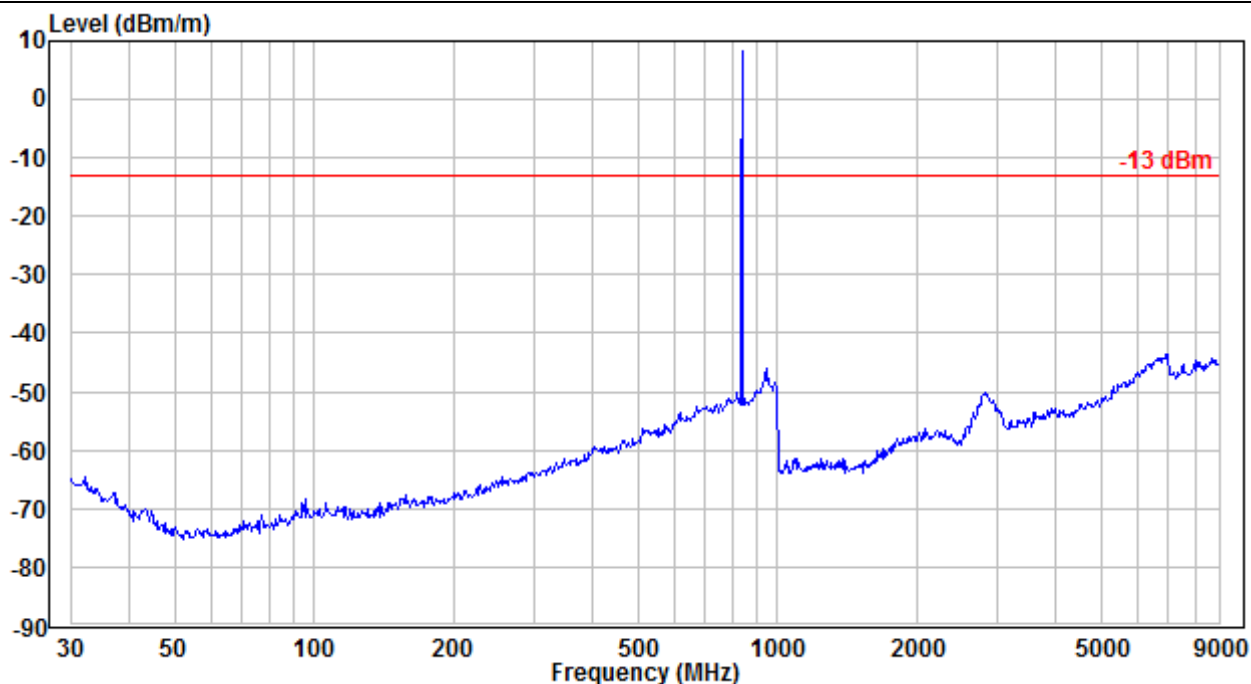

## Vertical

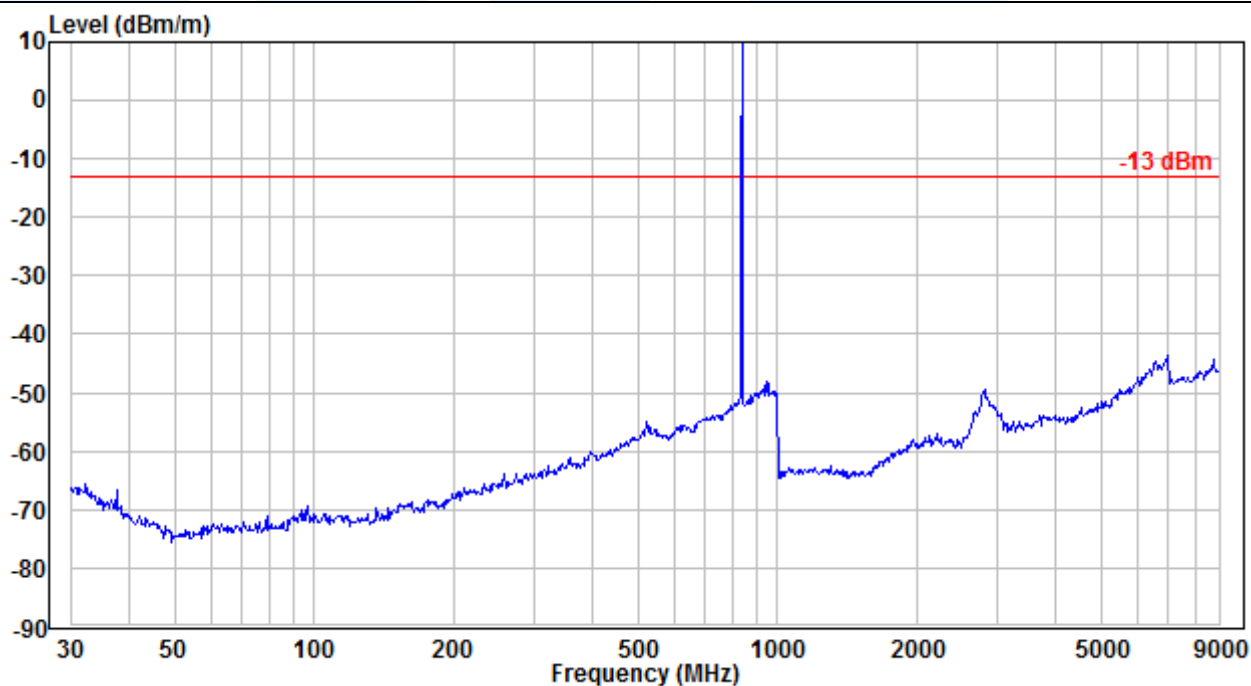

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# WCDMA RMC 12.2Kbps\_Middle Channel

## Horizontal

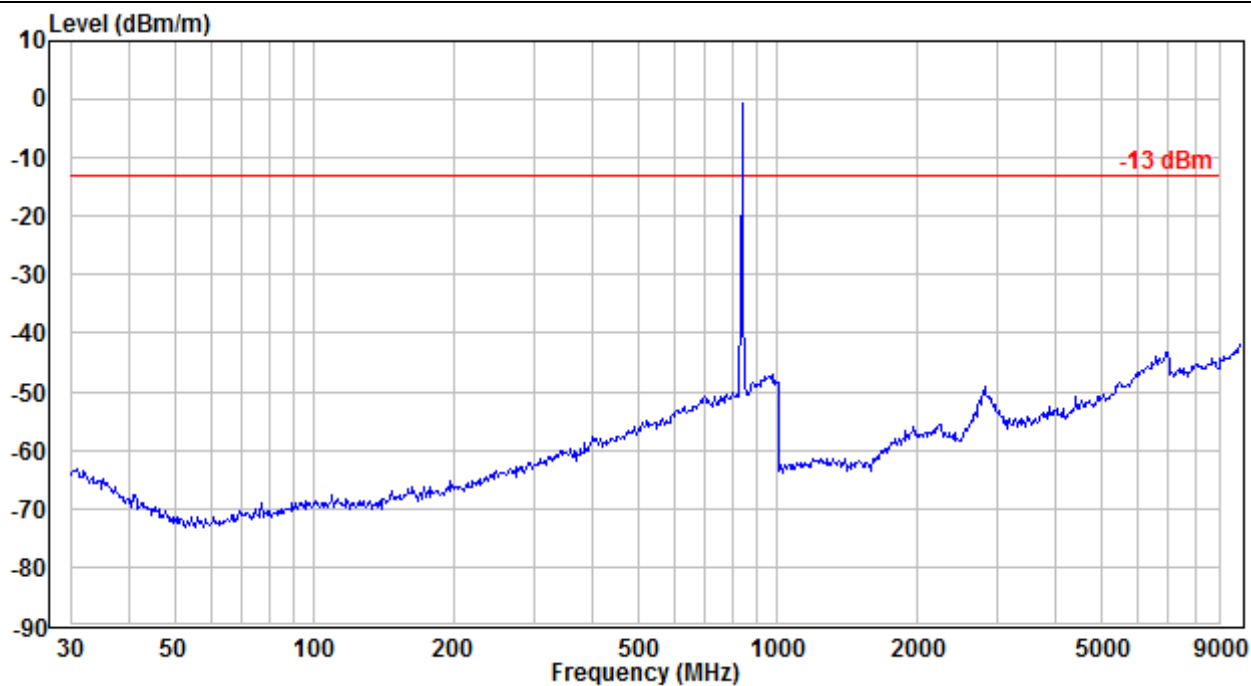

## Vertical

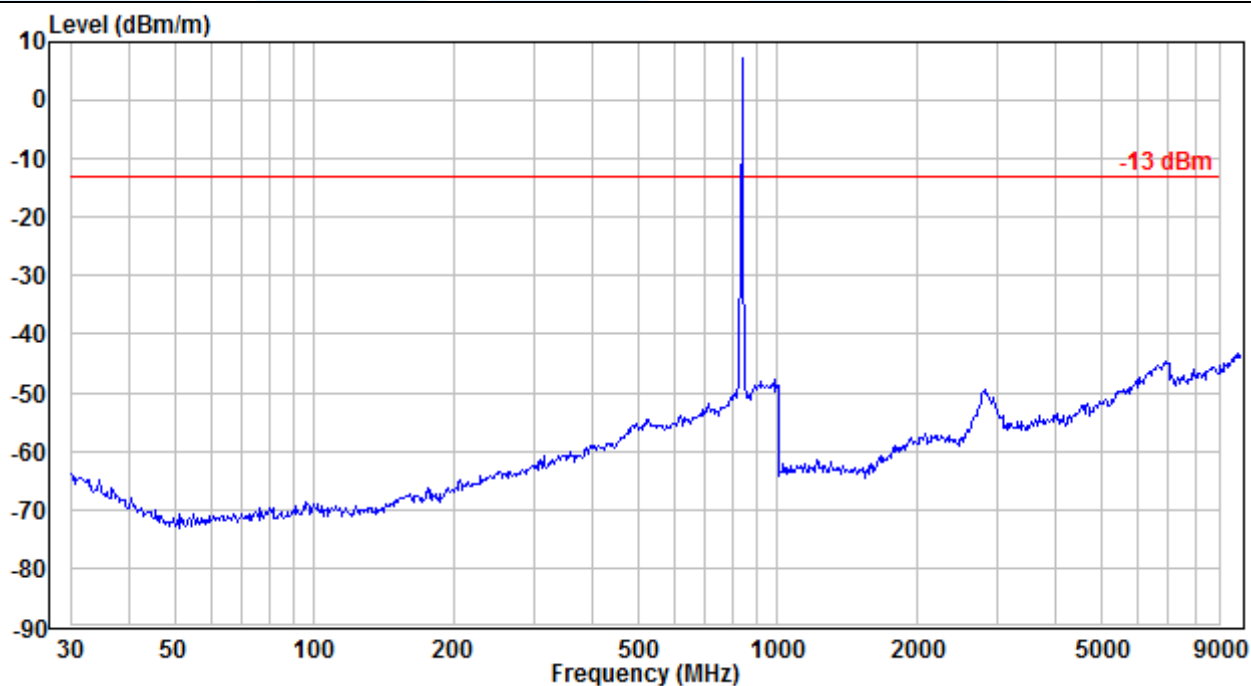

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 1.4 MHz / QPSK\_ Middle Channel

## Horizontal

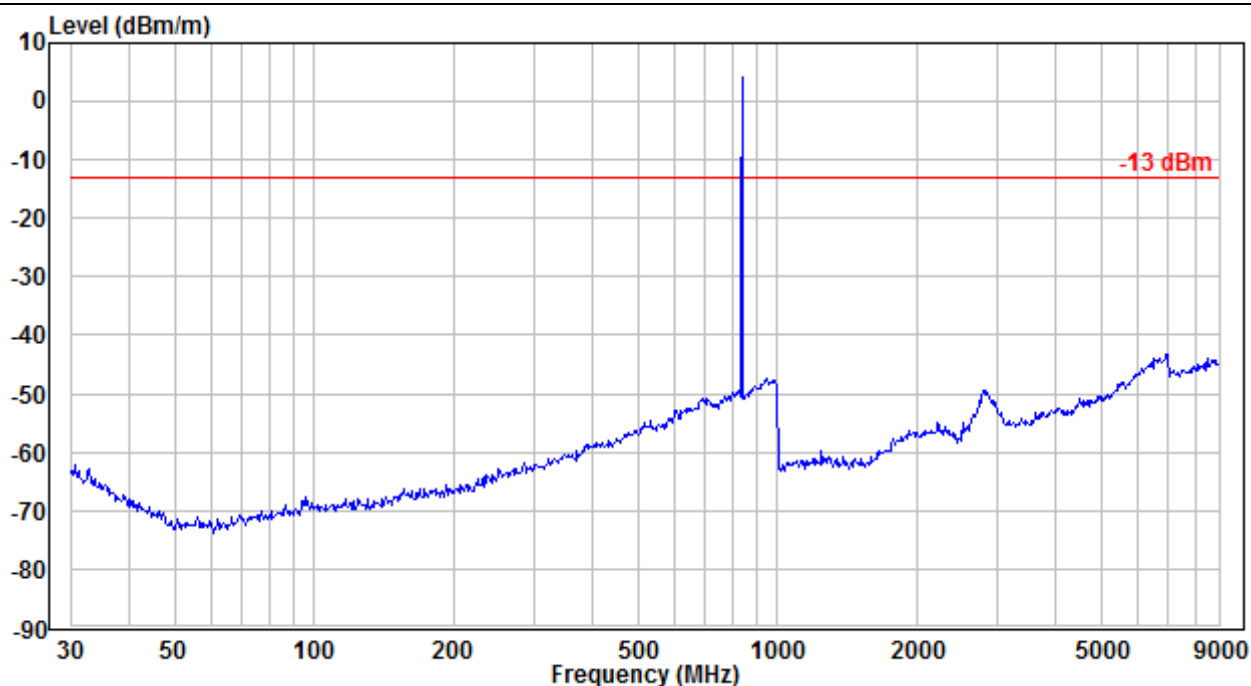

## Vertical

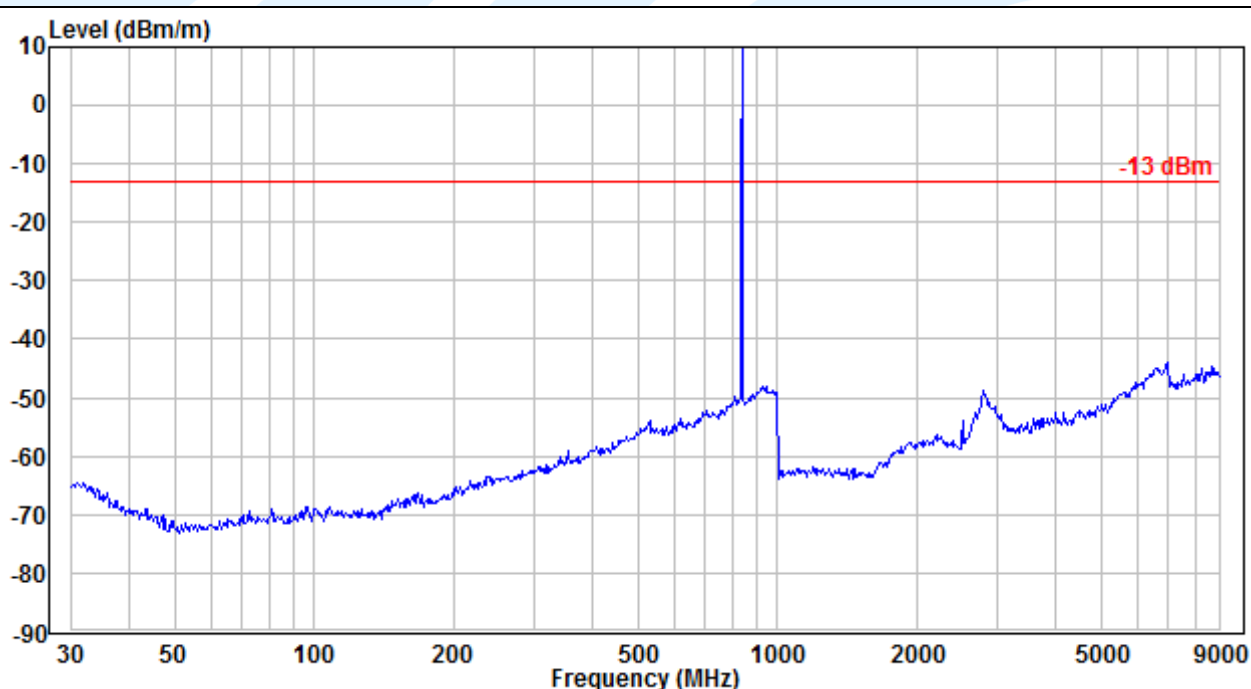

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 3 MHz / QPSK\_ Middle Channel

## Horizontal

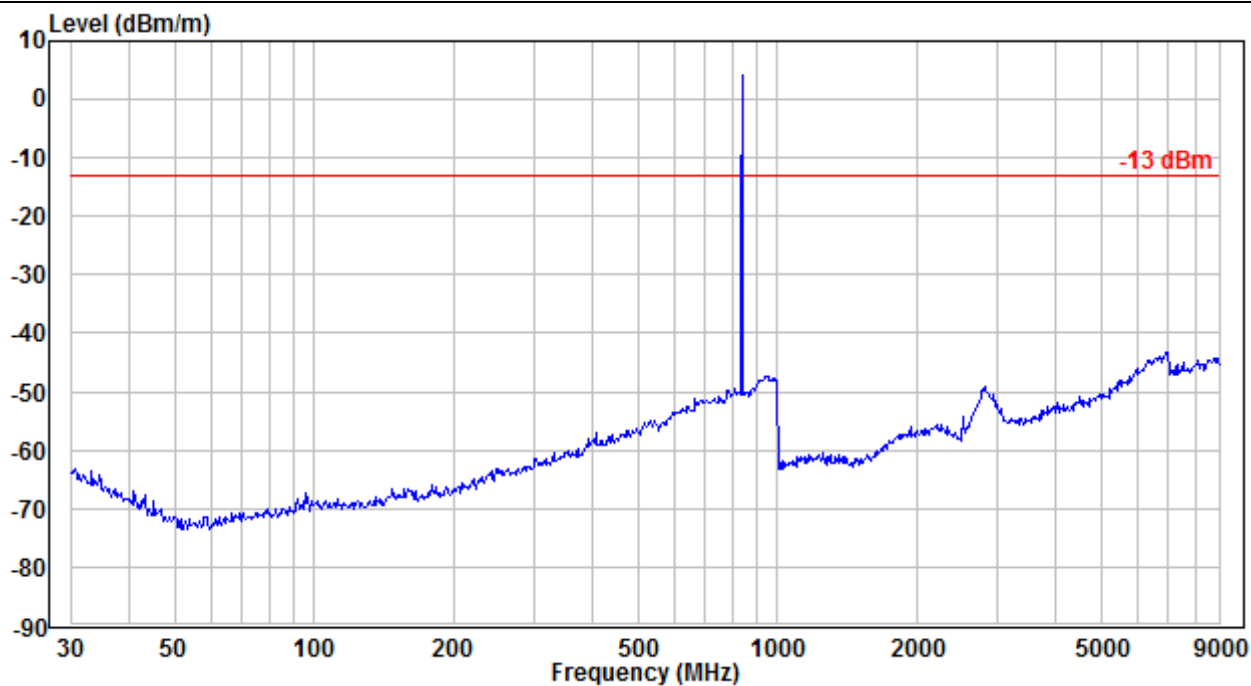

## Vertical

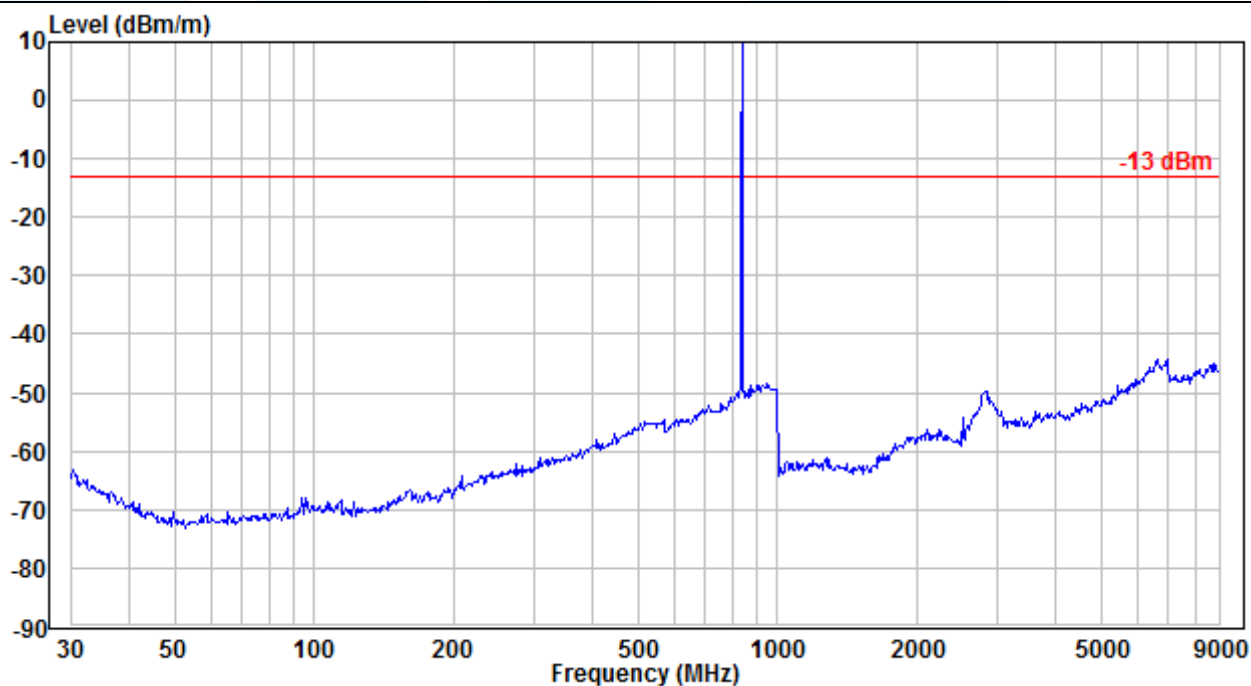

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

# LTE Band 5 / 5 MHz / QPSK\_ Middle Channel

## Horizontal

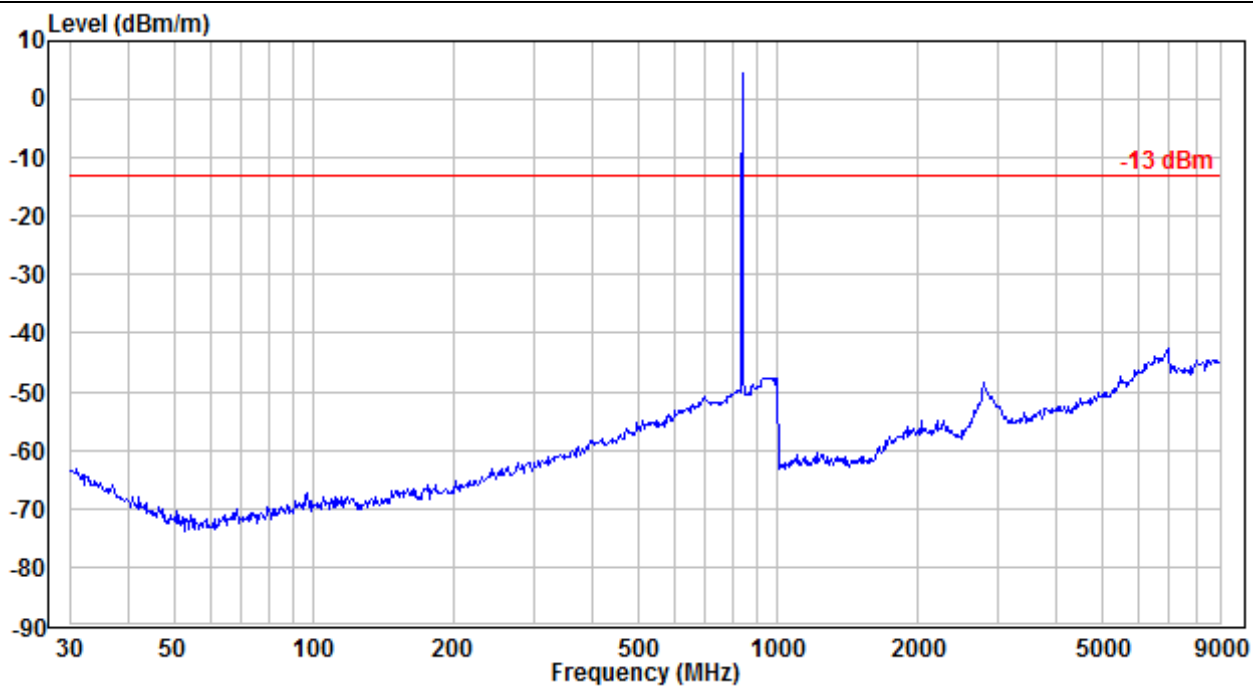

## Vertical

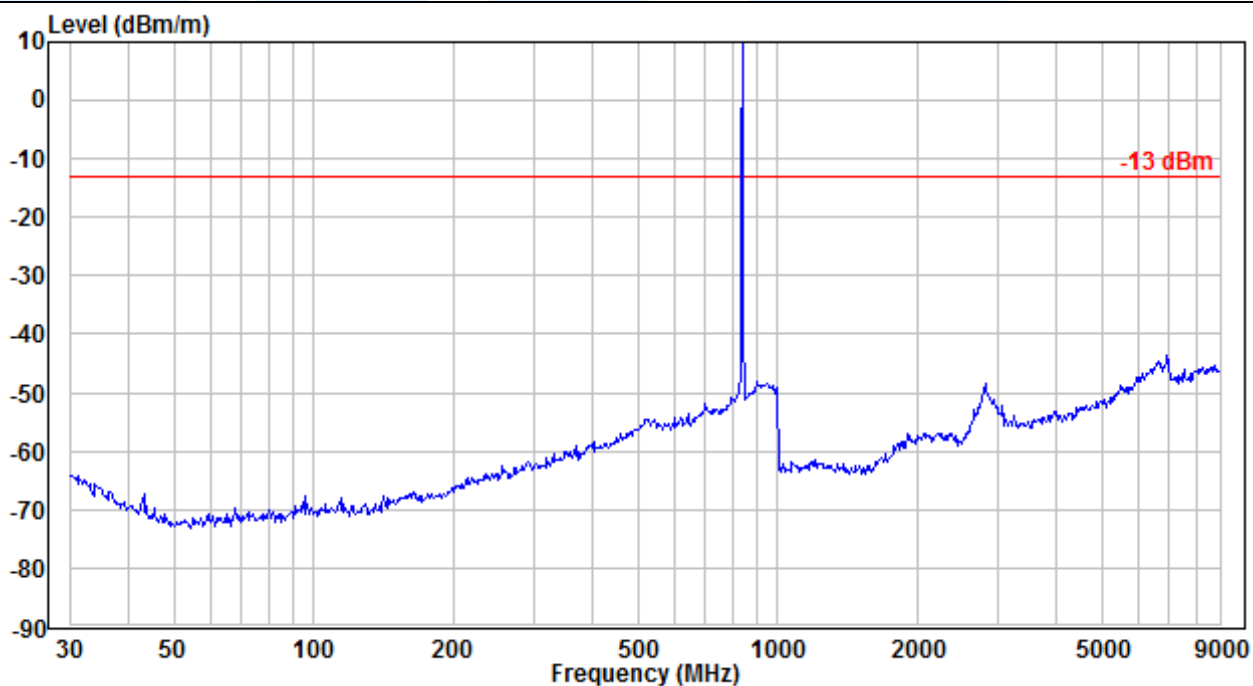

### Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com


[Http://www.uttlab.com](http://www.uttlab.com)

## LTE Band 5 / 10 MHz / QPSK\_ Middle Channel

### Horizontal

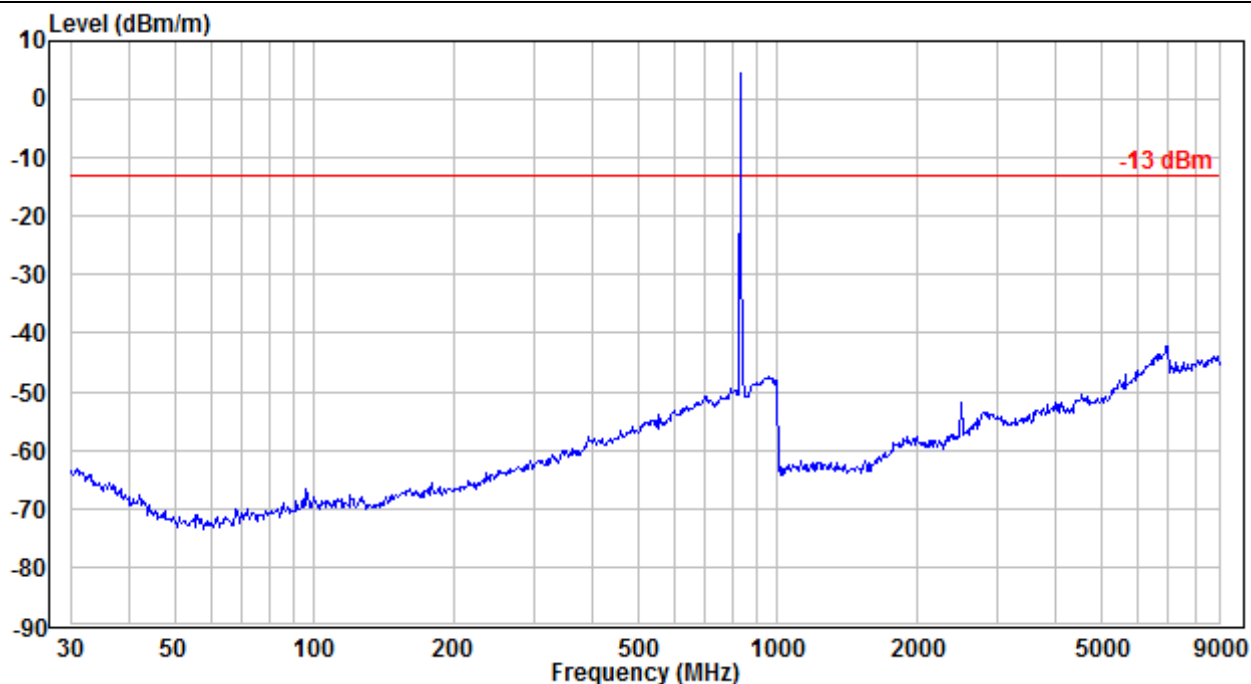

### Vertical

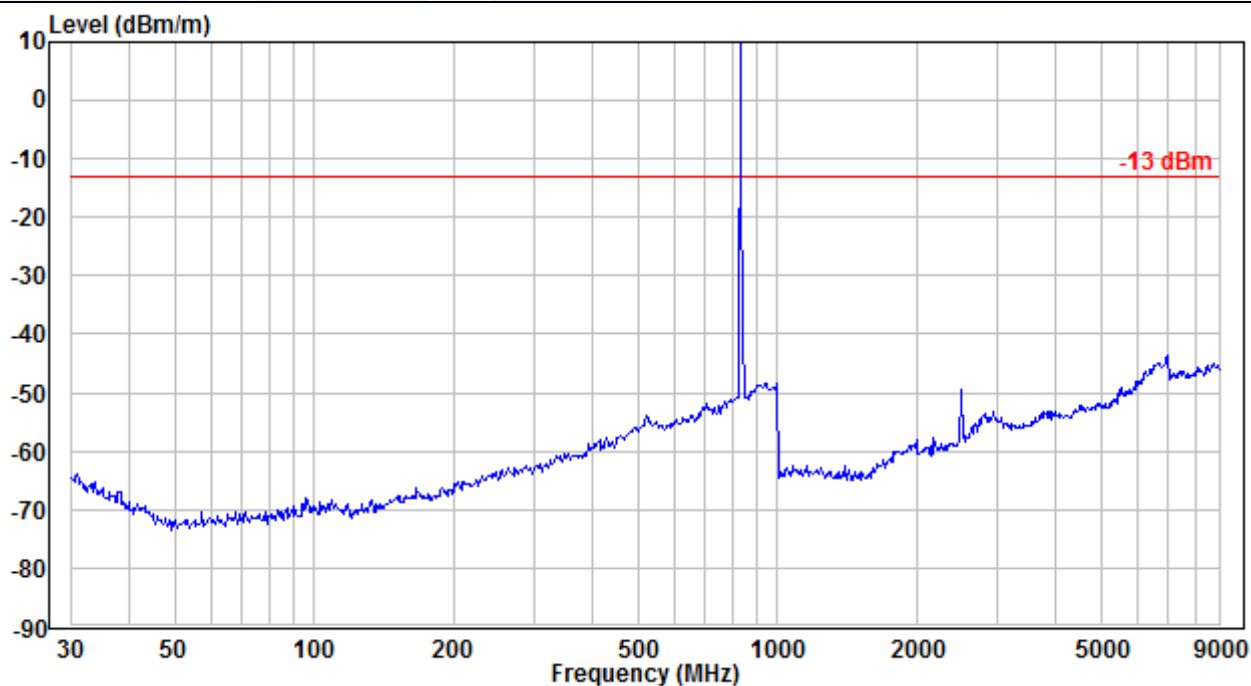

## Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6, Baoneng Science and Technology Park, Qingxiang Road No.1, Longhua New District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: [info@uttlab.com](mailto:info@uttlab.com)

<http://www.uttlab.com>

## 5.9 FREQUENCY STABILITY

**Test Requirement:** FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355

**Test Method:** ANSI/TIA-603-E-2016 & KDB 971168 D01v03

**Limits:** The carrier frequency shall not depart from the reference frequency in excess of  $\pm 2.5$  ppm for mobile stations.

**Test Setup:** Refer to section 4.2.2 for details.

**Test Procedures:**

- 1) Use CMW 500 or CMU 200 with Frequency Error measurement capability.
  - a) Temp. =  $-30^{\circ}$  to  $+50^{\circ}\text{C}$
  - b) Voltage = low voltage, 3.65 Vdc, Normal, 3.85 Vdc and High voltage, 4.40 Vdc.

2) Frequency Stability vs Temperature:

The EUT is placed inside a temperature chamber. The temperature is set to  $20^{\circ}\text{C}$  and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until  $+50^{\circ}\text{C}$  is reached.

3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

**Equipment Used:** Refer to section 3 for details.

**Test Result:** Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature ( $^{\circ}\text{C}$ )	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Pass/ Fail
GSM 1Tx-slot							
GMSK	190 / 836.6	VL	TN	18	0.0215	$\pm 2.5$	Pass
		VN		19	0.0227	$\pm 2.5$	Pass
		VH		16	0.0191	$\pm 2.5$	Pass
		VN	50	17	0.0203	$\pm 2.5$	Pass
			40	18	0.0215	$\pm 2.5$	Pass
			30	20	0.0239	$\pm 2.5$	Pass
			20	17	0.0203	$\pm 2.5$	Pass
			10	20	0.0239	$\pm 2.5$	Pass
			0	19	0.0227	$\pm 2.5$	Pass
			-10	19	0.0227	$\pm 2.5$	Pass
			-20	17	0.0203	$\pm 2.5$	Pass
			-30	18	0.0215	$\pm 2.5$	Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Pass/ Fail
EDGE 1Tx-slot							
8PSK	190 / 836.6	VL	TN	25	0.0299	± 2.5	Pass
		VN		23	0.0275	± 2.5	Pass
		VH		20	0.0239	± 2.5	Pass
		VN	50	28	0.0335	± 2.5	Pass
			40	19	0.0227	± 2.5	Pass
			30	23	0.0275	± 2.5	Pass
			20	23	0.0275	± 2.5	Pass
			10	18	0.0215	± 2.5	Pass
			0	21	0.0251	± 2.5	Pass
			-10	17	0.0203	± 2.5	Pass
			-20	21	0.0251	± 2.5	Pass
			-30	20	0.0239	± 2.5	Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Pass/ Fail
WCDMA RMC 12.2Kbps							
BPSK	4182 / 836.4	VL	TN	-3	-0.0036	± 2.5	Pass
		VN		-7	-0.0084	± 2.5	Pass
		VH		-3	-0.0036	± 2.5	Pass
		VN	50	-5	-0.0060	± 2.5	Pass
			40	-3	-0.0036	± 2.5	Pass
			30	-6	-0.0072	± 2.5	Pass
			20	-4	-0.0048	± 2.5	Pass
			10	-3	-0.0036	± 2.5	Pass
			0	-6	-0.0072	± 2.5	Pass
			-10	-13	-0.0155	± 2.5	Pass
			-20	-7	-0.0084	± 2.5	Pass
			-30	-3	-0.0036	± 2.5	Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature (°C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Pass/ Fail
LTE Band 5 / 10MHz / Full RB							
QPSK	20525 / 836.5	VL	TN	-10	-0.0120	± 2.5	Pass
		VN		-13	-0.0155	± 2.5	Pass
		VH		-18	-0.0215	± 2.5	Pass
		VN	50	-13	-0.0155	± 2.5	Pass
			40	-10	-0.0120	± 2.5	Pass
			30	-13	-0.0155	± 2.5	Pass
			20	-13	-0.0155	± 2.5	Pass
			10	-14	-0.0167	± 2.5	Pass
			0	-12	-0.0143	± 2.5	Pass
			-10	-15	-0.0179	± 2.5	Pass
			-20	-14	-0.0167	± 2.5	Pass
			-30	-8	-0.0096	± 2.5	Pass

## APPENDIX 1 PHOTOS OF TEST SETUP

See test photos attached in Appendix 1 for the actual connections between Product and support equipment.

## APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS

Refer to Appendix 2 for EUT external and internal photos.

\*\*\* End of Report \*\*\*

---

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

---