



Power spectral density for Large RU

Test Result


Test Mode	Antenna	Freq(MHz)	Large RU	configure	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11BE80MIMO	Ant1	5210	484Tone+242Tone	4	-3.05	≤11.00	PASS
	Ant2	5210	484Tone+242Tone	4	-1.78	≤11.00	PASS
	total	5210	484Tone+242Tone	4	0.64	≤11.00	PASS
	Ant1	5290	484Tone+242Tone	2	-5.04	≤11.00	PASS
	Ant2	5290	484Tone+242Tone	2	-3.48	≤11.00	PASS
	total	5290	484Tone+242Tone	2	-1.18	≤11.00	PASS
	Ant1	5530	484Tone+242Tone	4	-2.73	≤11.00	PASS
	Ant2	5530	484Tone+242Tone	4	-0.33	≤11.00	PASS
	total	5530	484Tone+242Tone	4	1.64	≤11.00	PASS
	Ant1	5775	484Tone+242Tone	4	-5.51	≤30.00	PASS
	Ant2	5775	484Tone+242Tone	4	-4.07	≤30.00	PASS
	total	5775	484Tone+242Tone	4	-1.72	≤30.00	PASS
11BE160MIMO	Ant1	5250	996Tone+484Tone	3	-8.08	≤11.00	PASS
			996Tone+996Tone	9	-8.91	≤11.00	PASS
	Ant2	5250	996Tone+484Tone	3	-7.12	≤11.00	PASS
			996Tone+996Tone	9	-7.22	≤11.00	PASS
	total	5250	996Tone+484Tone	3	-4.56	≤11.00	PASS
			996Tone+996Tone	9	-4.97	≤11.00	PASS
	Ant1	5570	996Tone+484Tone	3	-6.62	≤11.00	PASS
			996Tone+996Tone	9	-8.39	≤11.00	PASS
	Ant2	5570	996Tone+484Tone	3	-4.17	≤11.00	PASS
			996Tone+996Tone	9	-6.38	≤11.00	PASS
	total	5570	996Tone+484Tone	3	-2.21	≤11.00	PASS
			996Tone+996Tone	9	-4.26	≤11.00	PASS


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor and is compensated in the graph.





Test Graphs

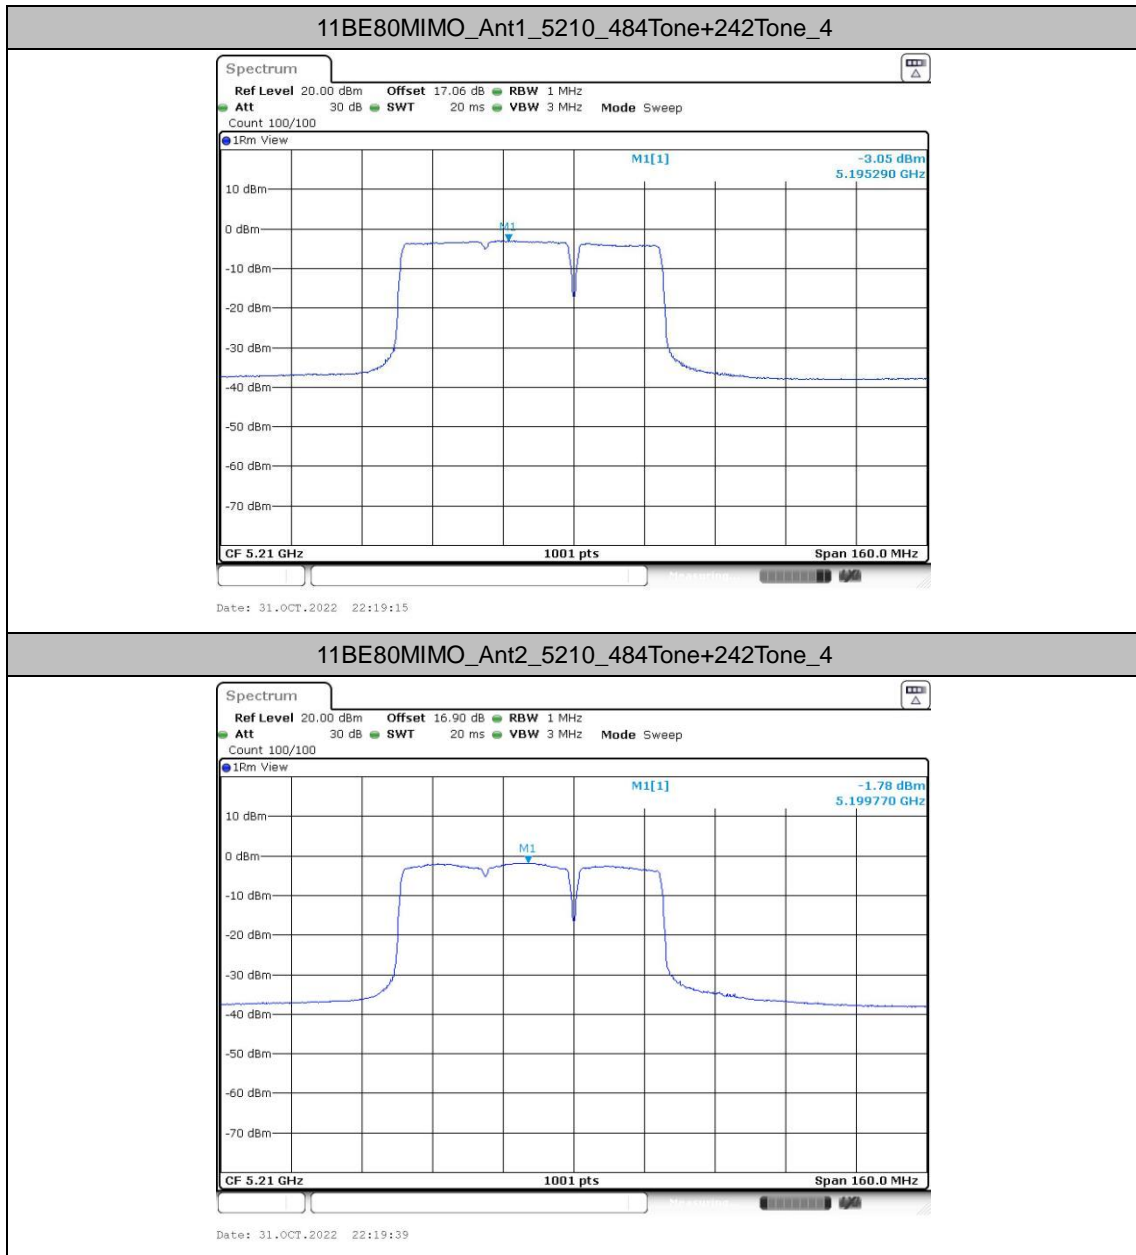


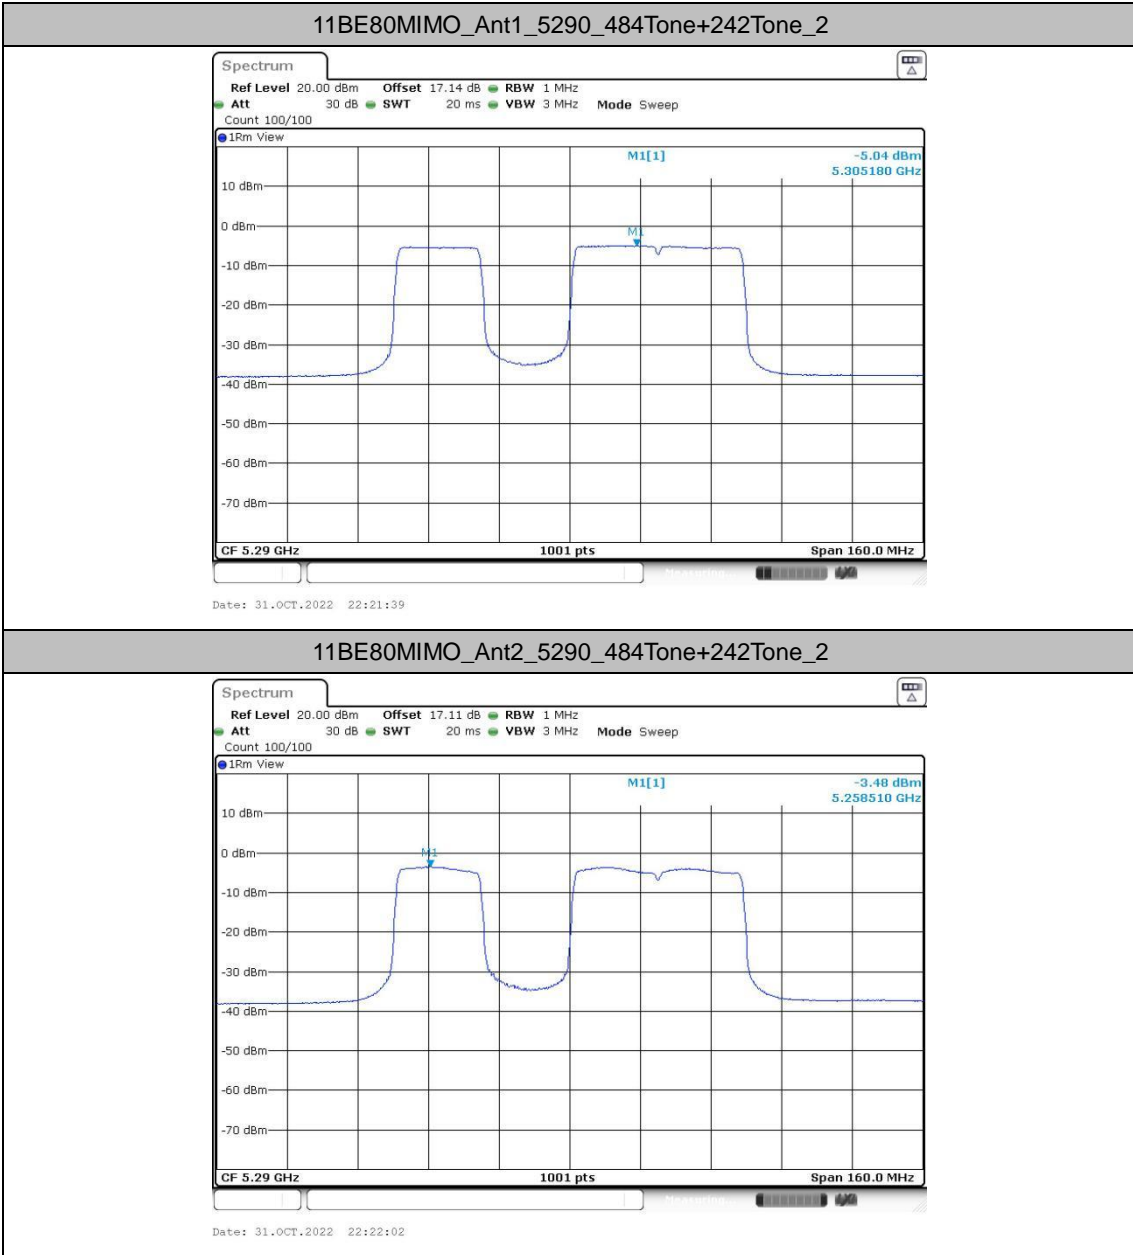


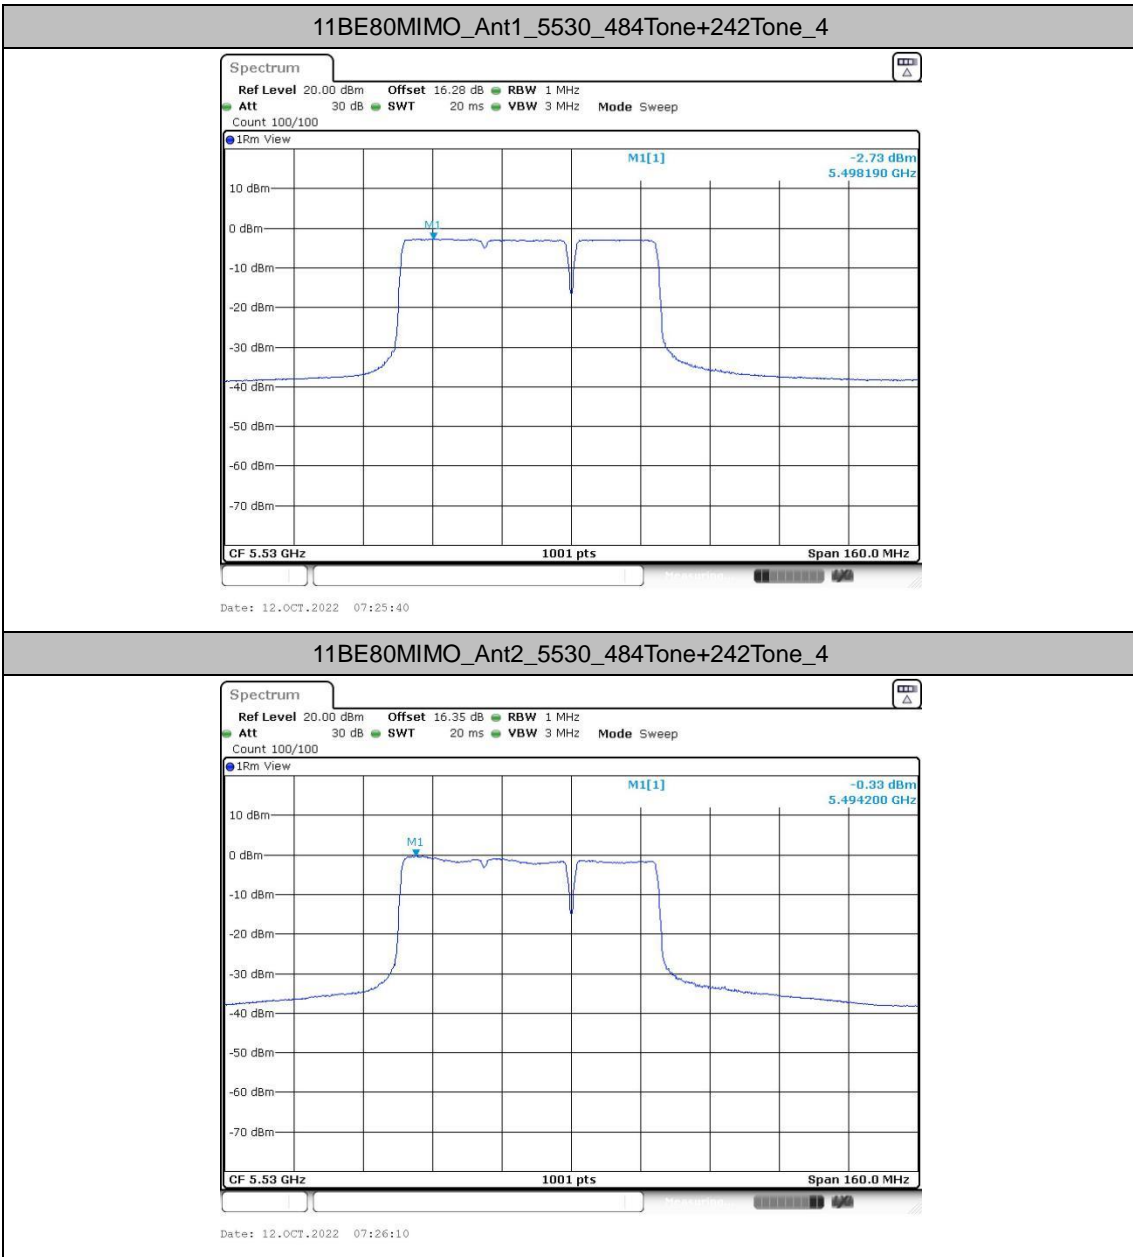


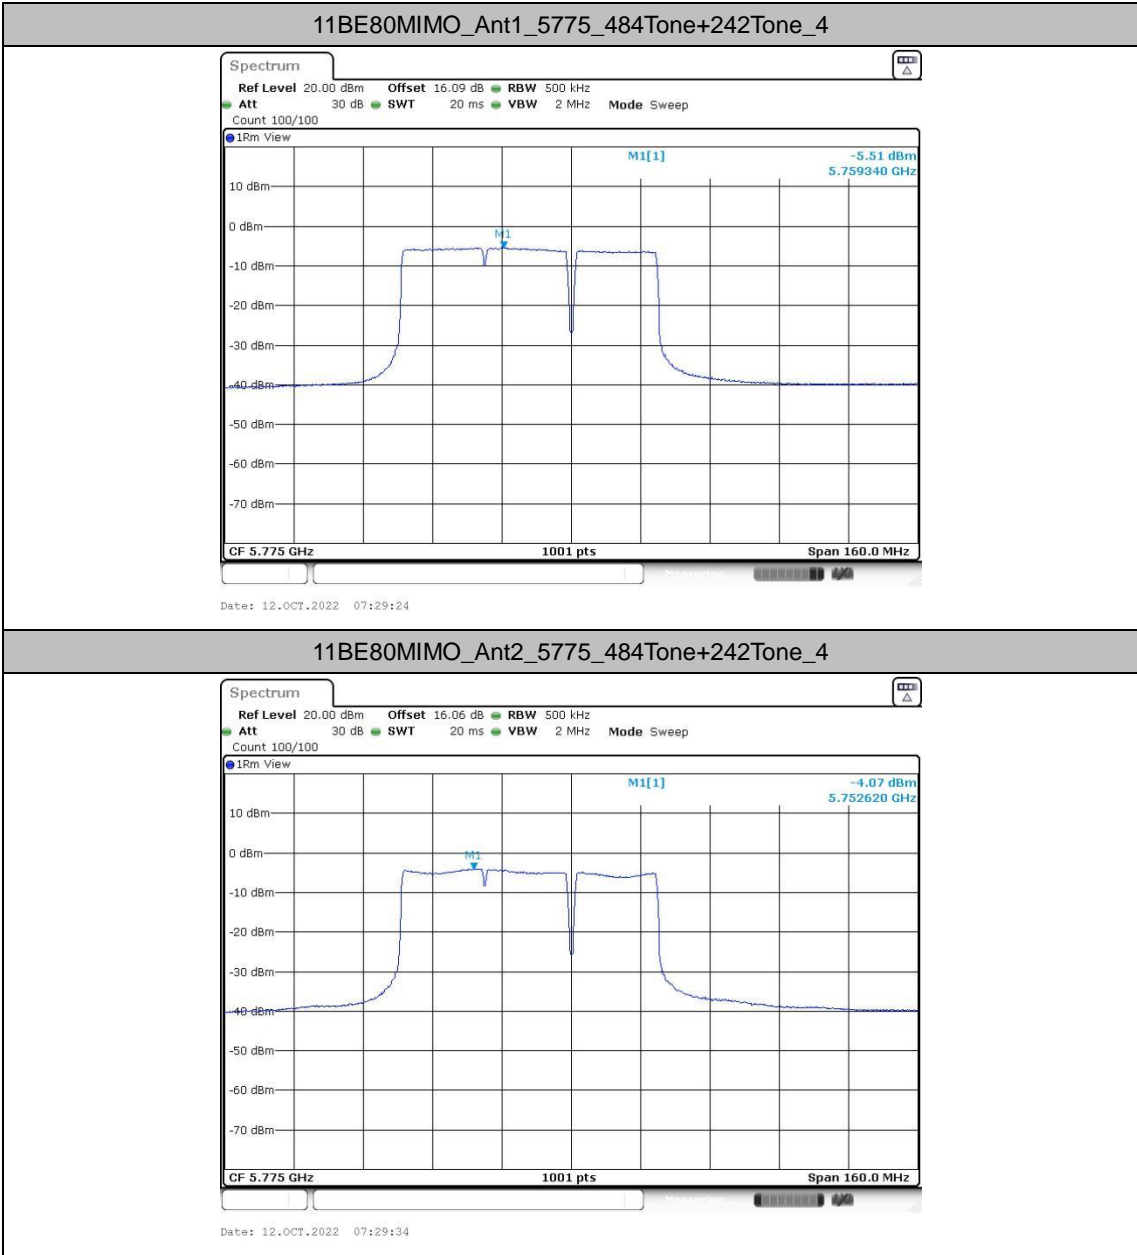

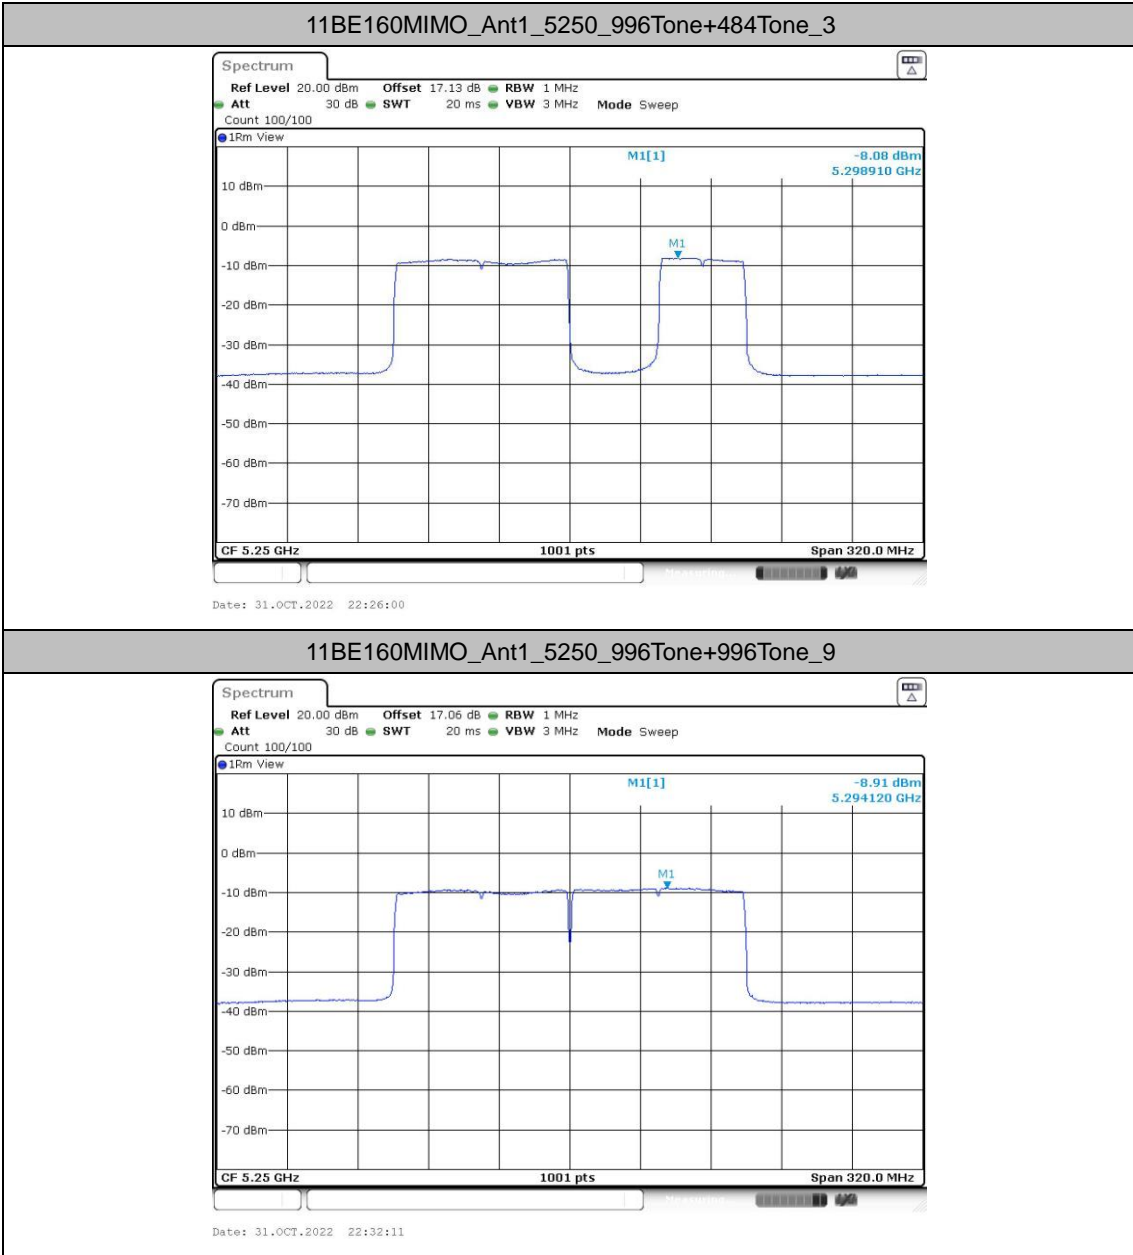

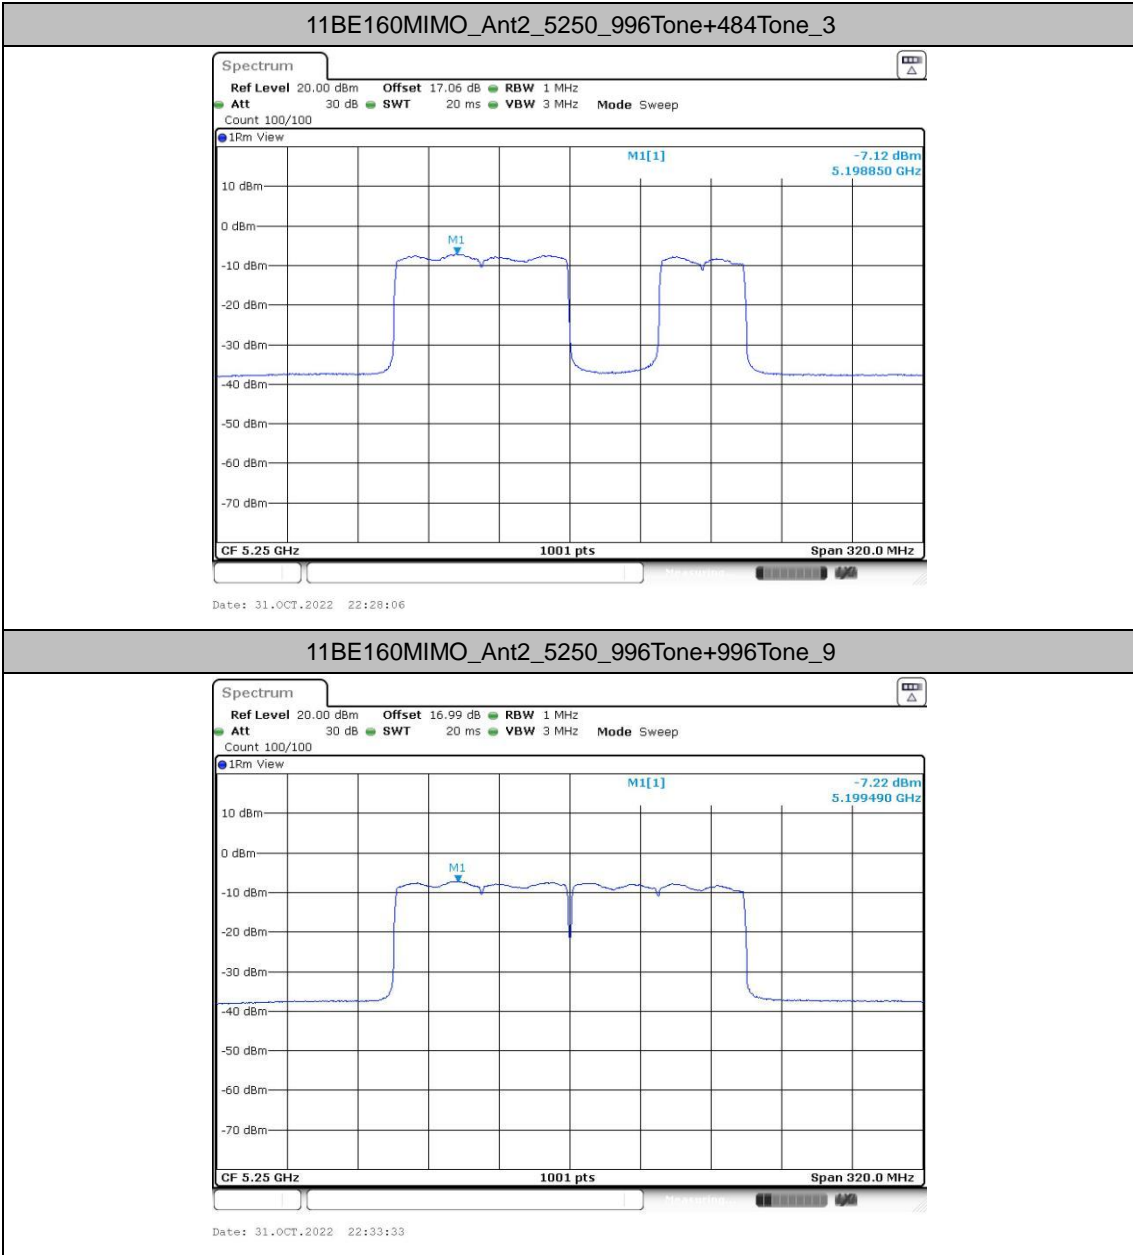

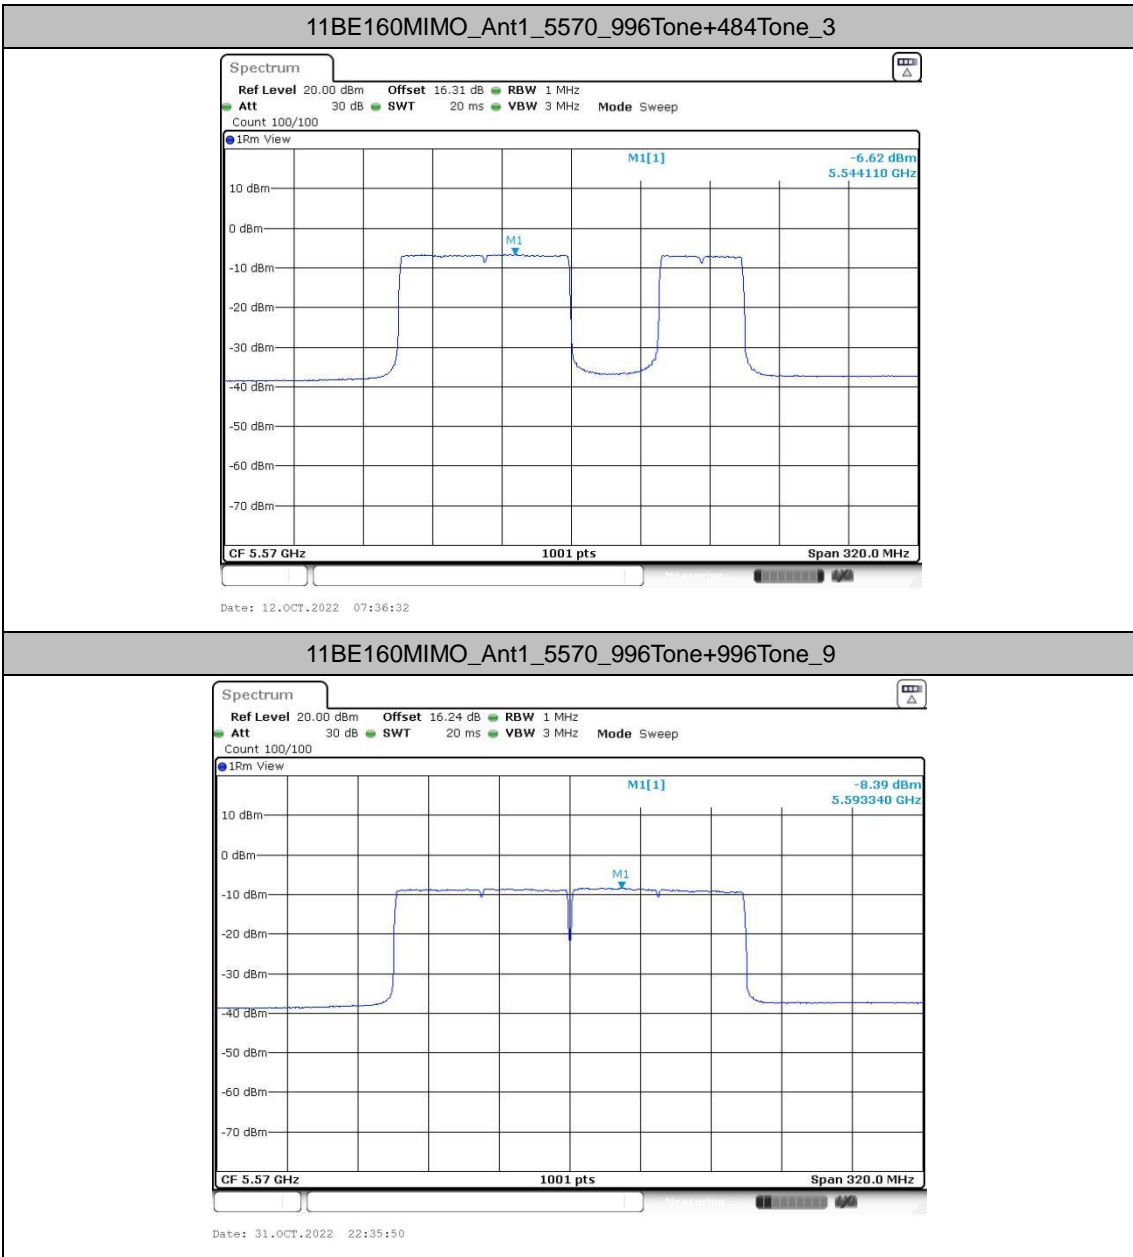

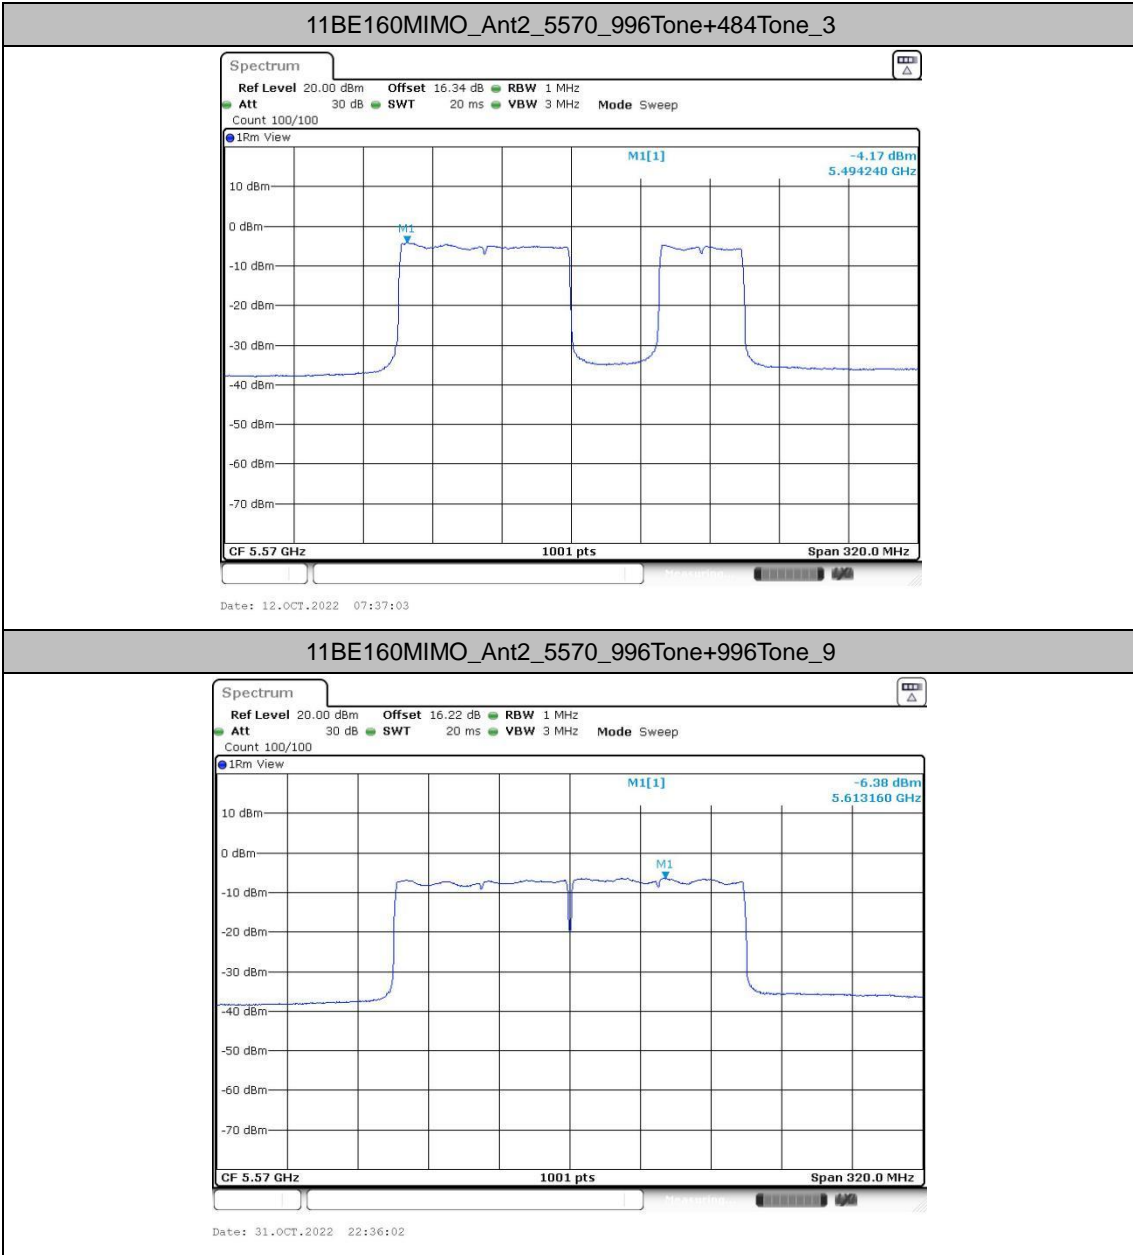



Power spectral density for Puncturing Mode

Test Result


Test Mode	Antenna	Freq(MHz)	Puncturing	Index	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11BE80MIMO	Ant1	5210	Puncturing 20M	3	-3.53	≤11.00	PASS
	Ant2	5210	Puncturing 20M	3	-2.16	≤11.00	PASS
	total	5210	Puncturing 20M	3	0.22	≤11.00	PASS
	Ant1	5290	Puncturing 20M	2	-4.8	≤11.00	PASS
	Ant2	5290	Puncturing 20M	2	-3.29	≤11.00	PASS
	total	5290	Puncturing 20M	2	-0.97	≤11.00	PASS
	Ant1	5530	Puncturing 20M	3	-4.16	≤11.00	PASS
	Ant2	5530	Puncturing 20M	3	-2.29	≤11.00	PASS
	total	5530	Puncturing 20M	3	-0.12	≤11.00	PASS
	Ant1	5775	Puncturing 20M	3	-5.71	≤30.00	PASS
	Ant2	5775	Puncturing 20M	3	-4.34	≤30.00	PASS
	total	5775	Puncturing 20M	3	-1.96	≤30.00	PASS
11BE160MIMO	Ant1	5250	Puncturing 20M	1	-8.61	≤11.00	PASS
			Puncturing 40M	2	-8.36	≤11.00	PASS
				3	-7.84	≤11.00	PASS
	Ant2	5250	Puncturing 20M	8	-6.25	≤11.00	PASS
			Puncturing 40M	1	-6.72	≤11.00	PASS
				2	-6.45	≤11.00	PASS
	total	5250	Puncturing 40M	3	-6.14	≤11.00	PASS
				8	-4.7	≤11.00	PASS
			Puncturing 20M	8	-4.7	≤11.00	PASS
	total	5250	Puncturing 20M	1	-4.55	≤11.00	PASS
			Puncturing 40M	2	-4.29	≤11.00	PASS
				3	-3.9	≤11.00	PASS
	Ant1	5570	Puncturing 20M	8	-2.40	≤11.00	PASS
			Puncturing 40M	3	-8.06	≤11.00	PASS
	Ant2	5570	Puncturing 40M	8	-7.78	≤11.00	PASS
			Puncturing 20M	3	-5.83	≤11.00	PASS
	total	5570	Puncturing 40M	8	-5.59	≤11.00	PASS
			Puncturing 20M	3	-3.79	≤11.00	PASS
total	5570	Puncturing 40M	3	-3.79	≤11.00	PASS	
		Puncturing 20M	8	-3.54	≤11.00	PASS	


Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.


2.The Duty Cycle Factor and is compensated in the graph.





Test Graphs

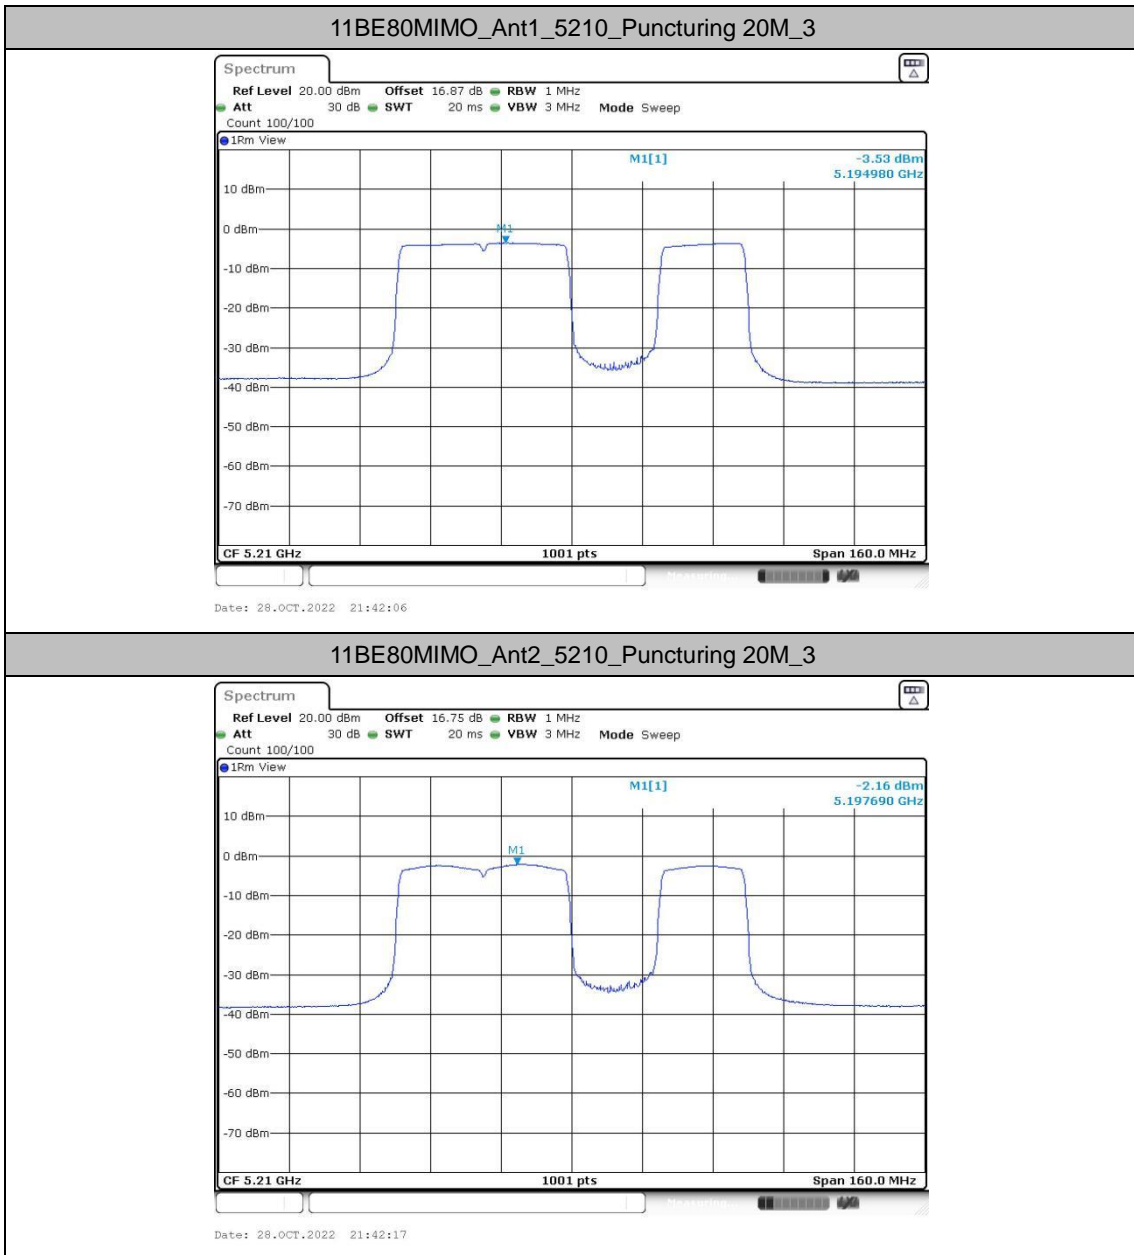


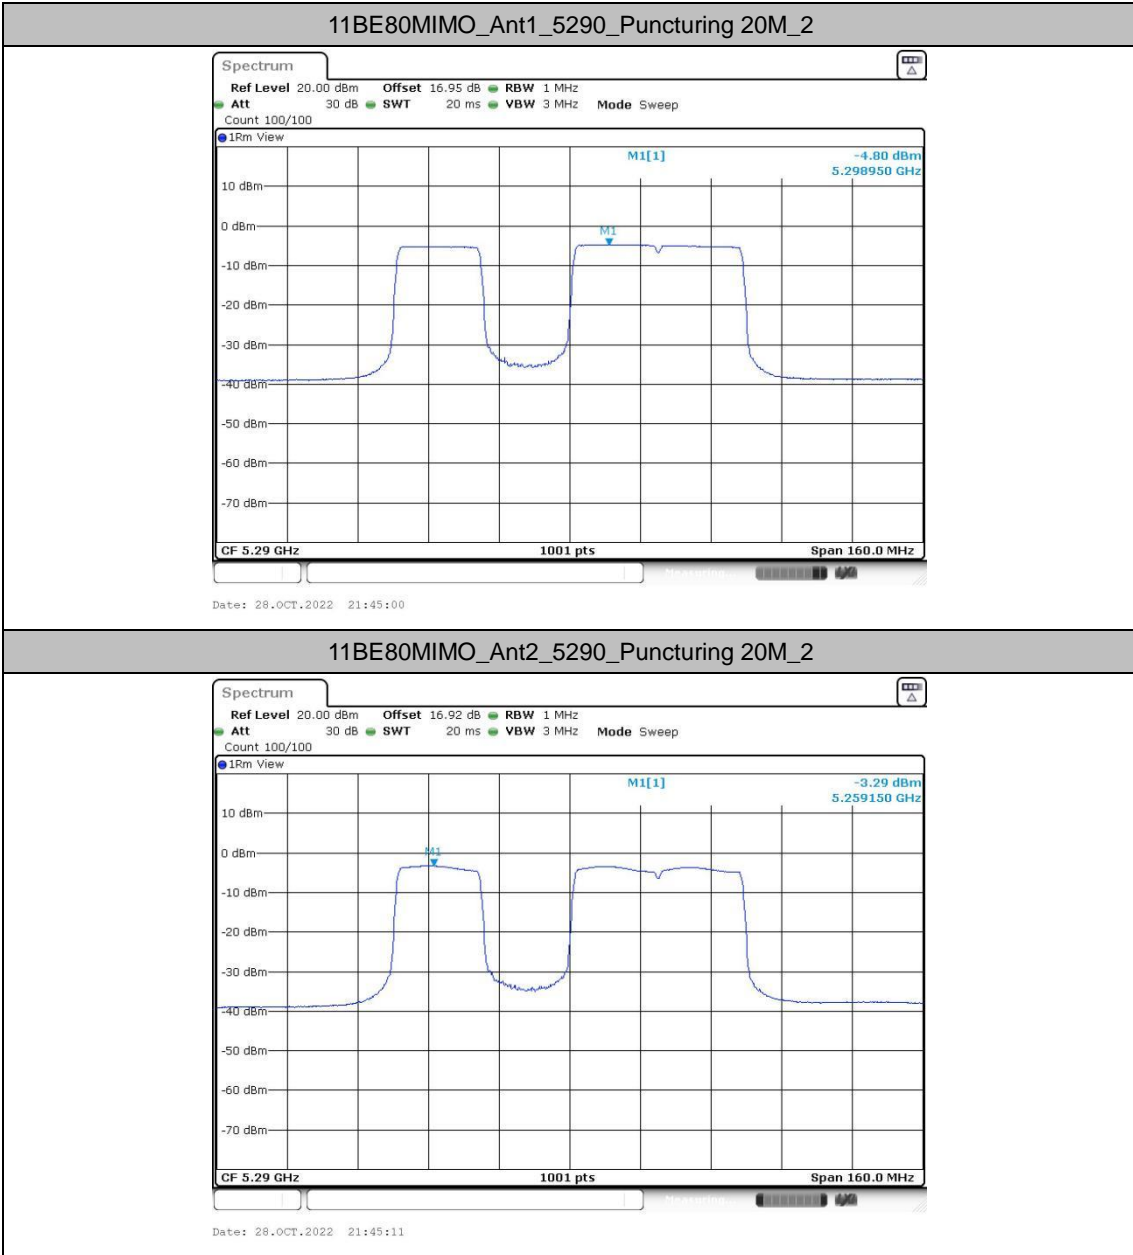


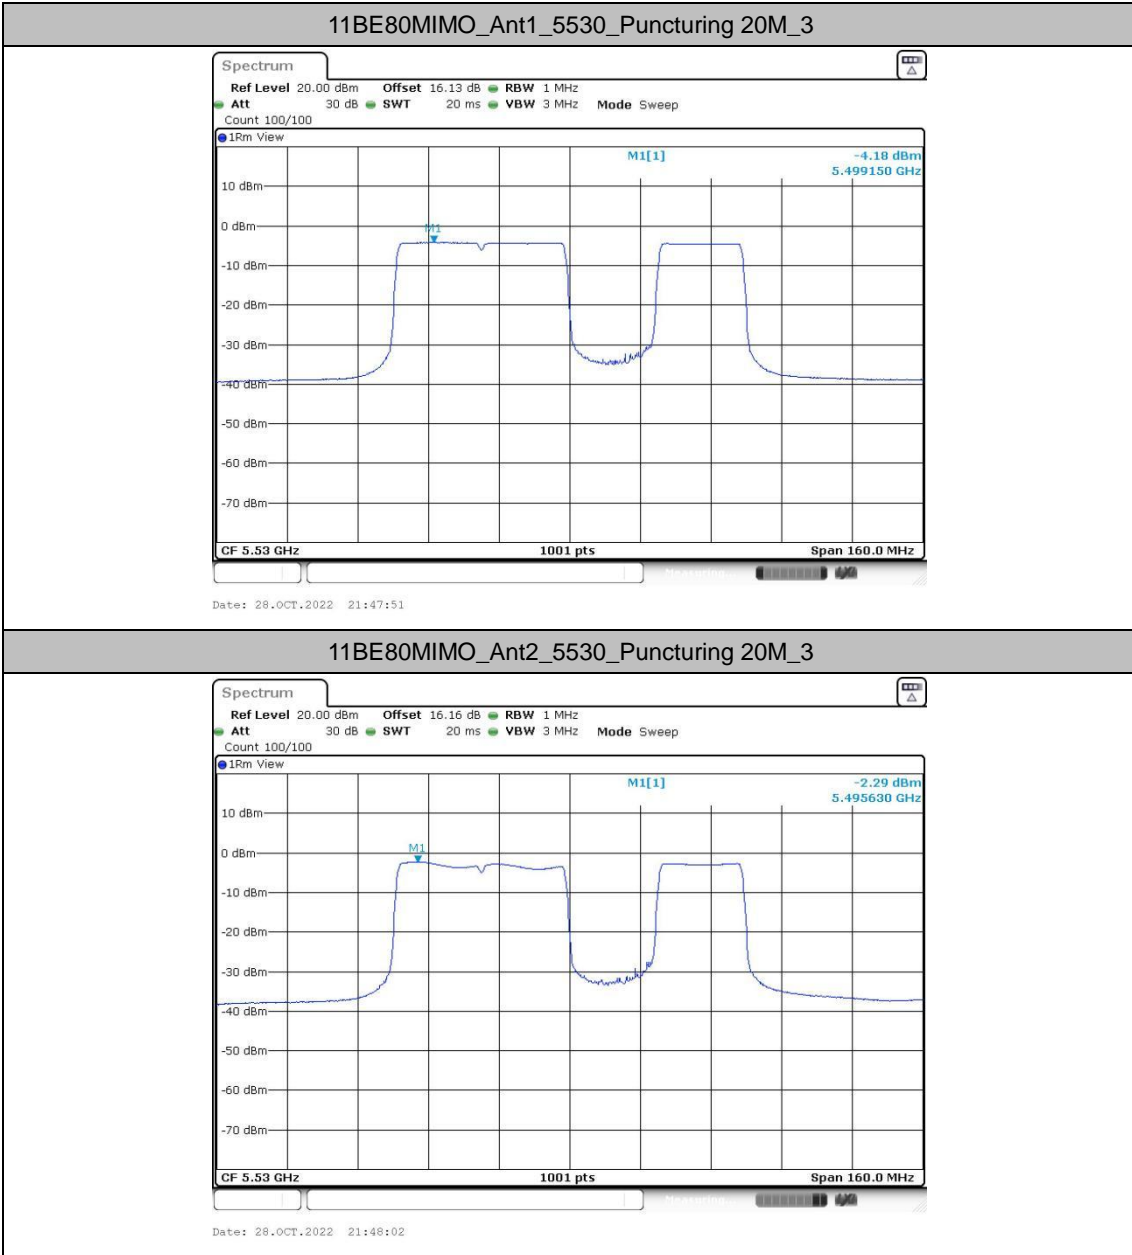


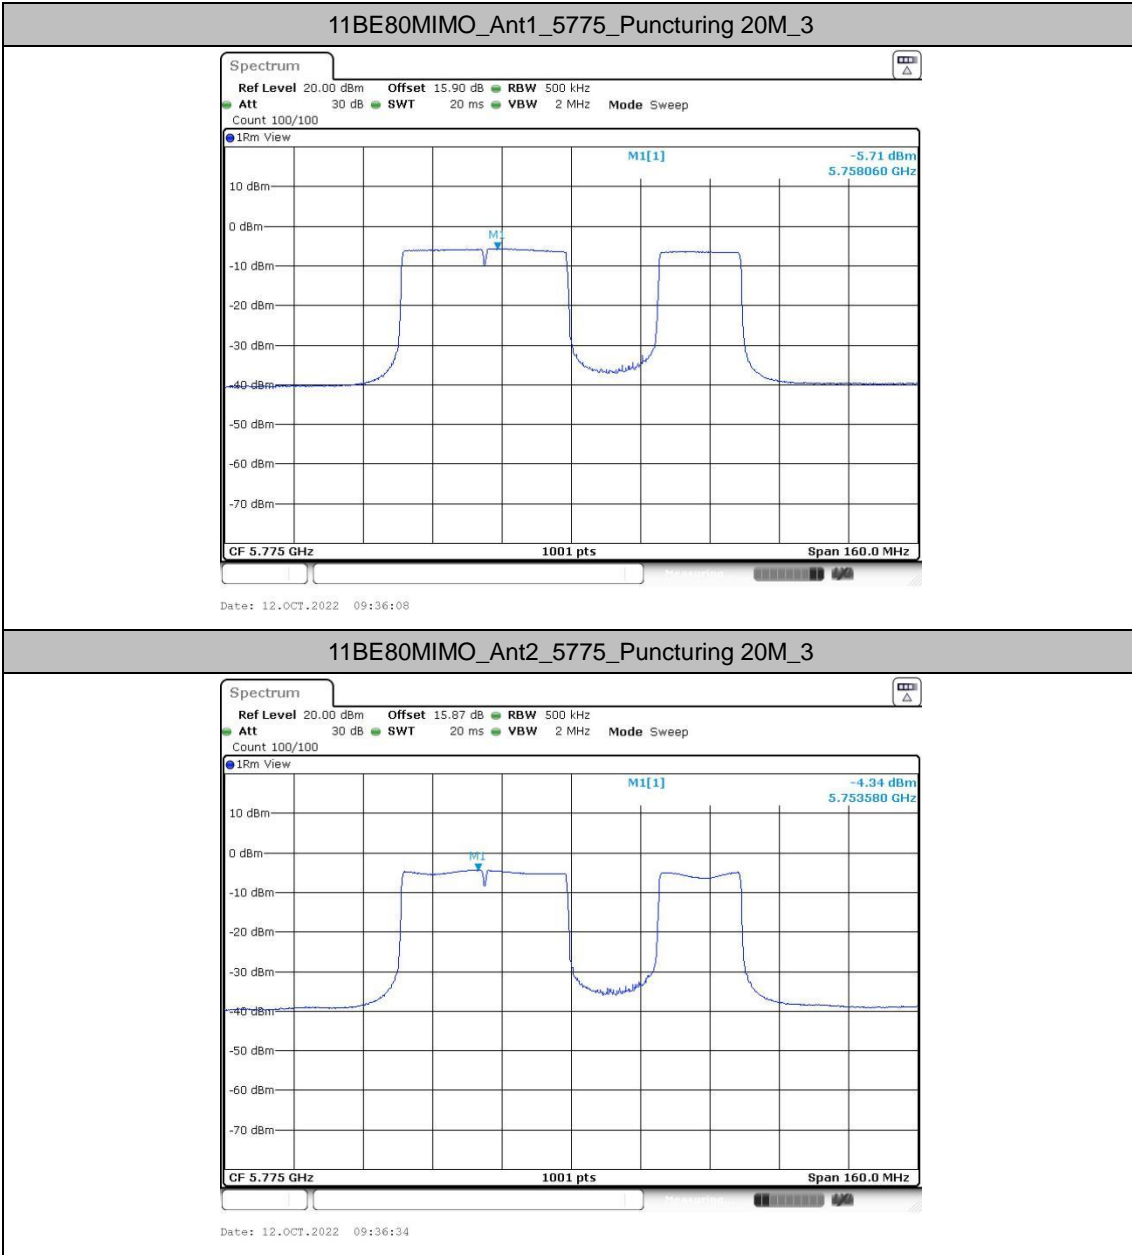


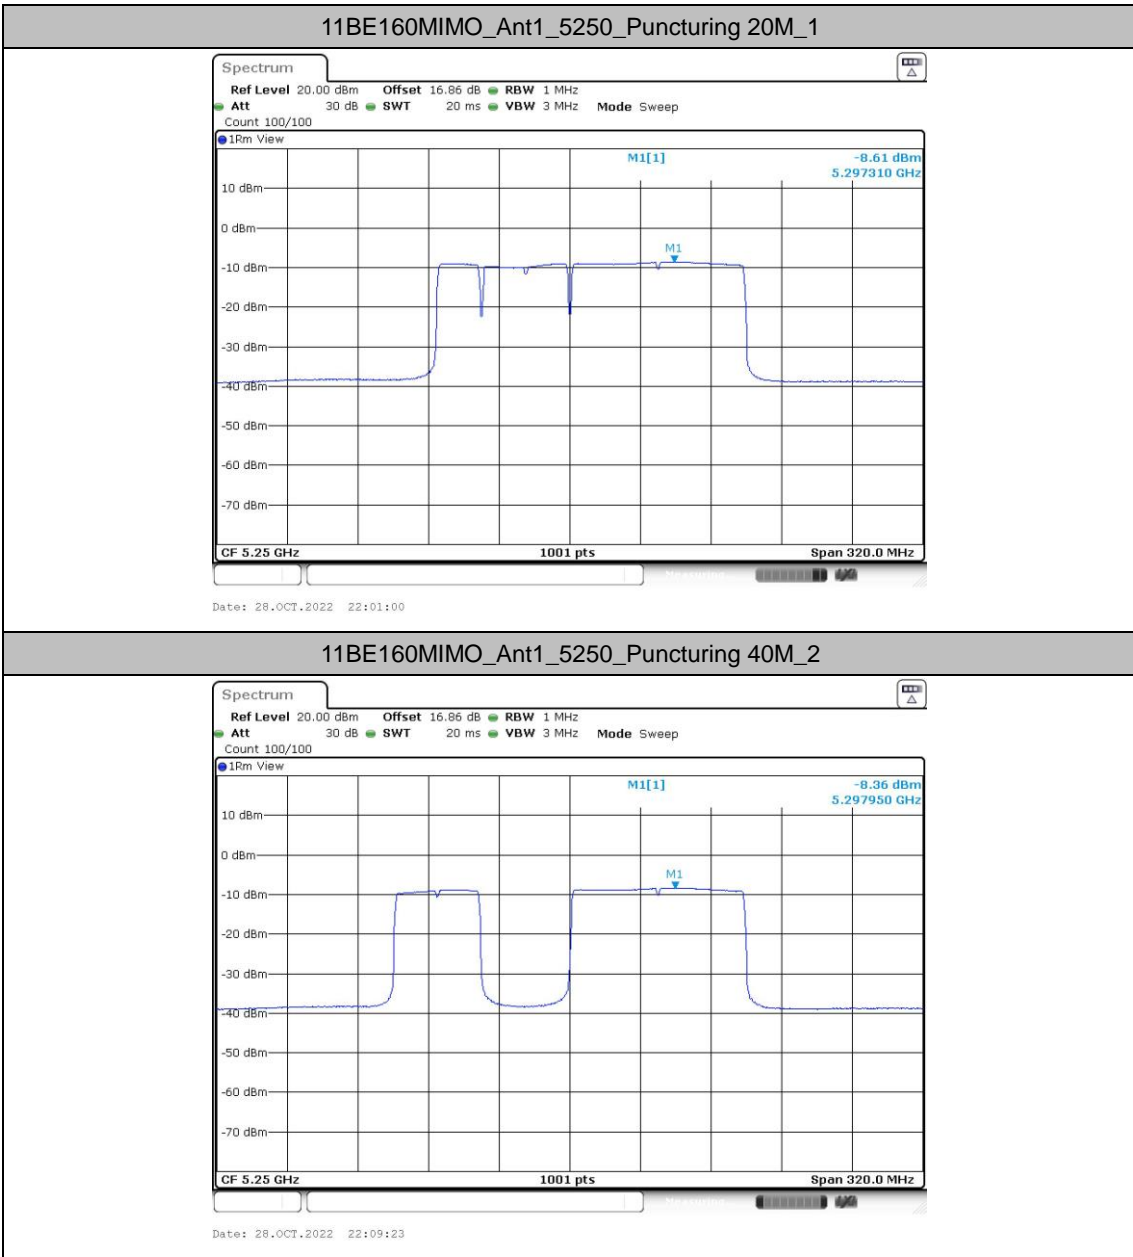


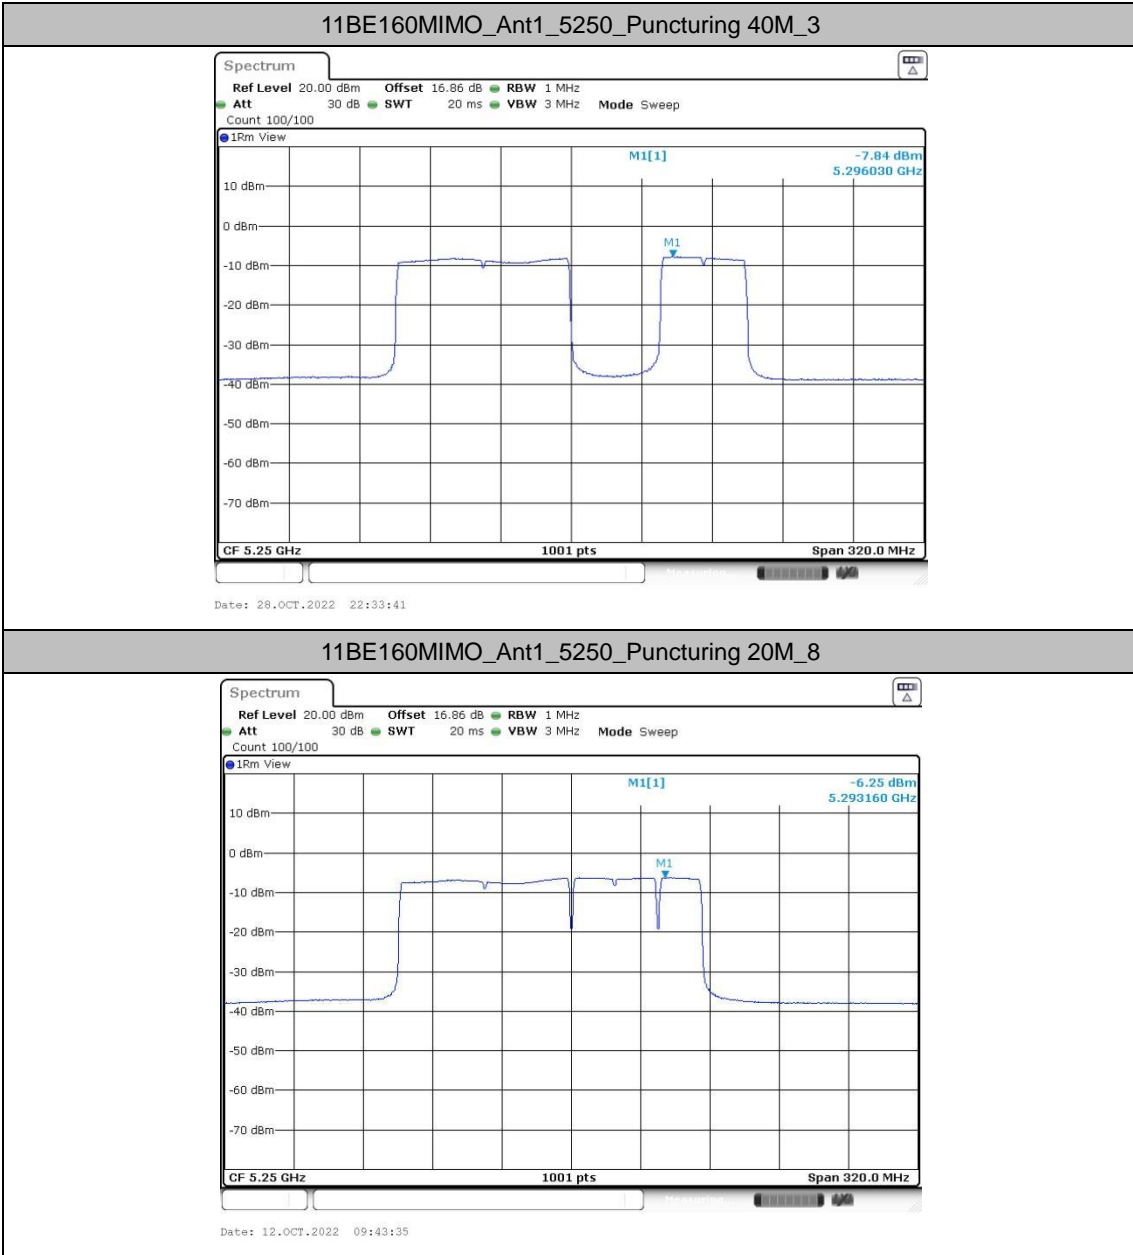

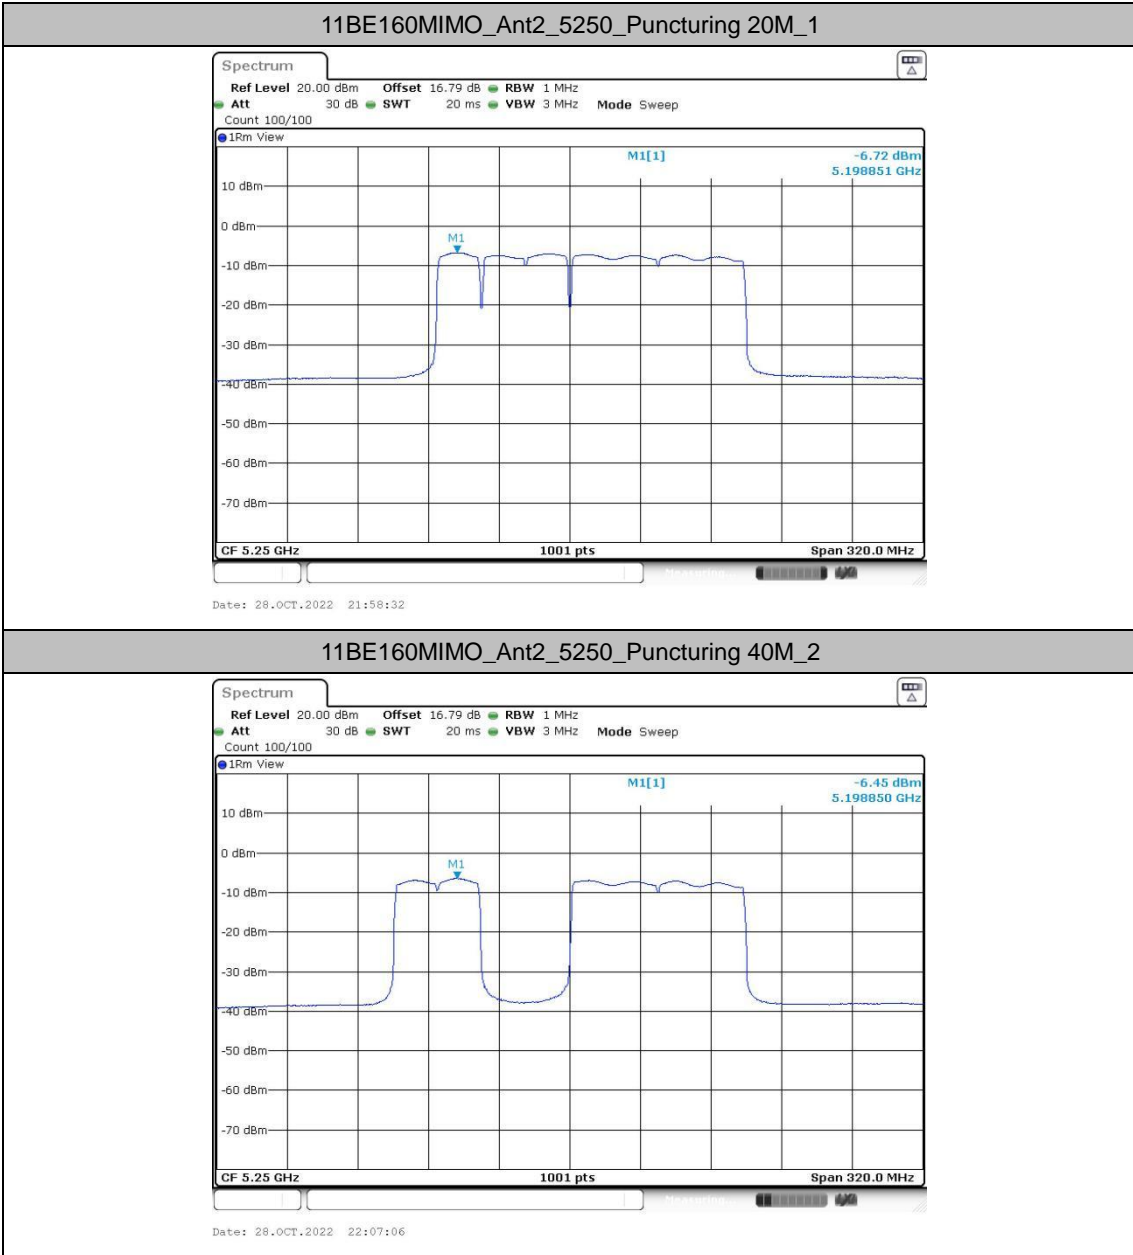

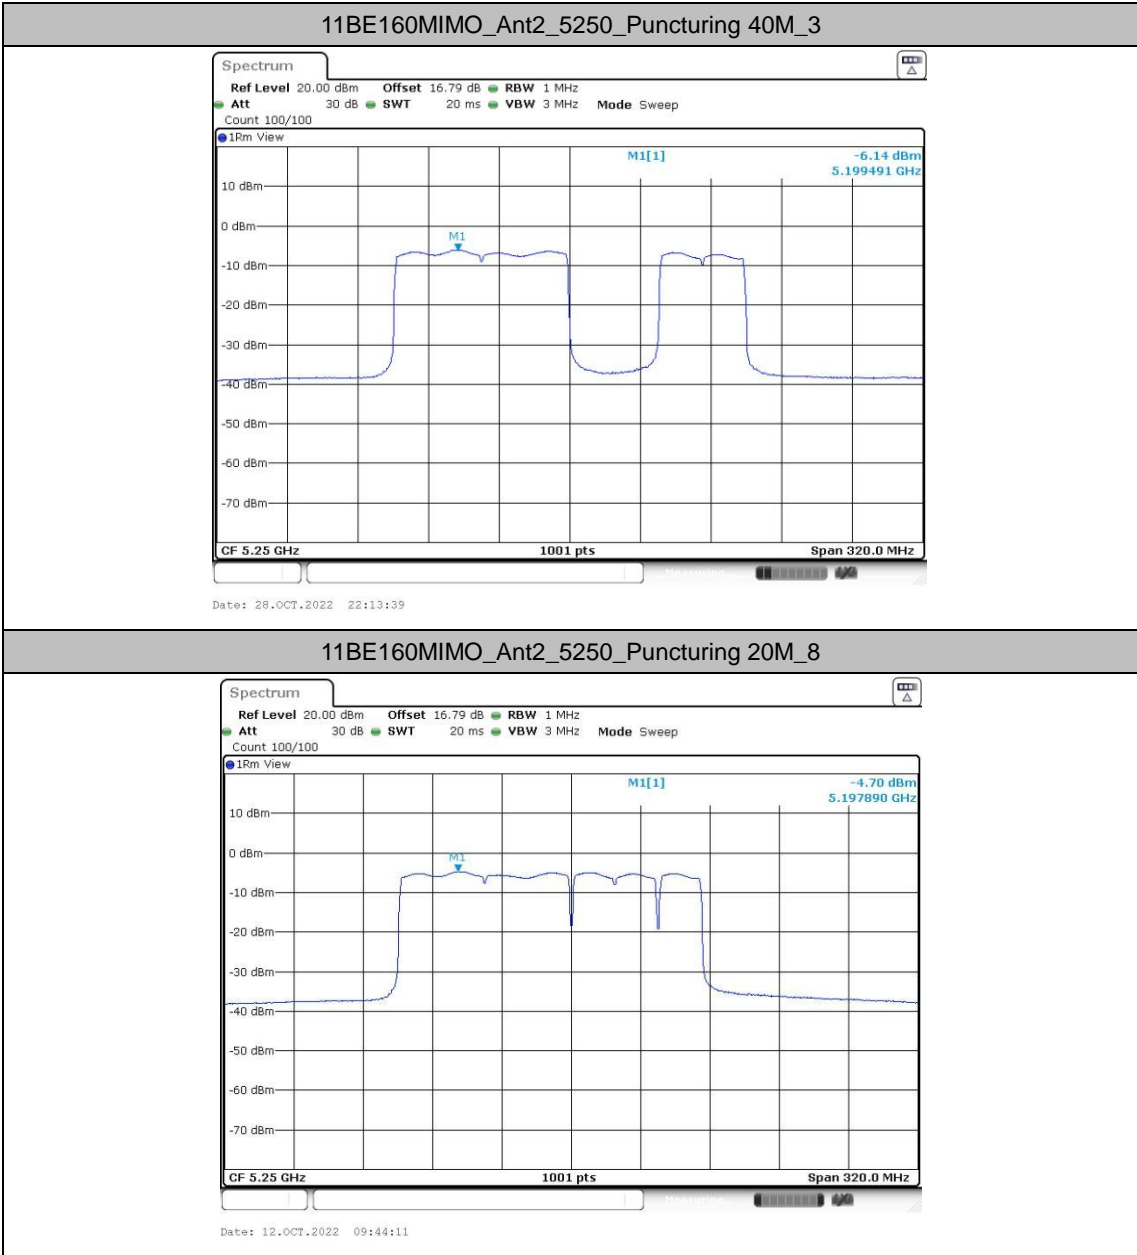

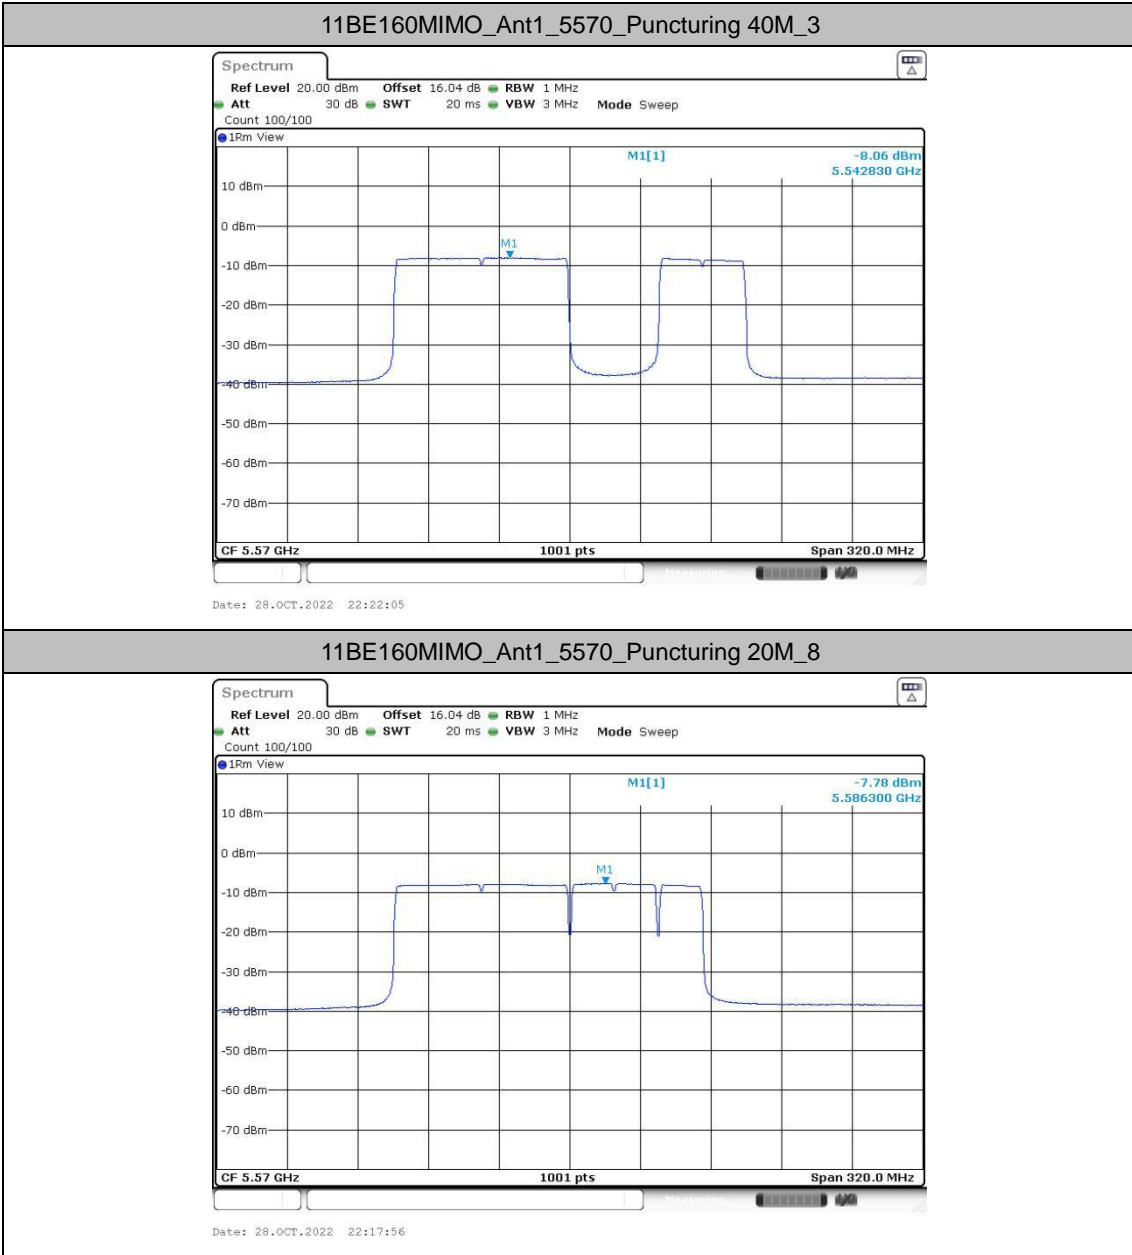


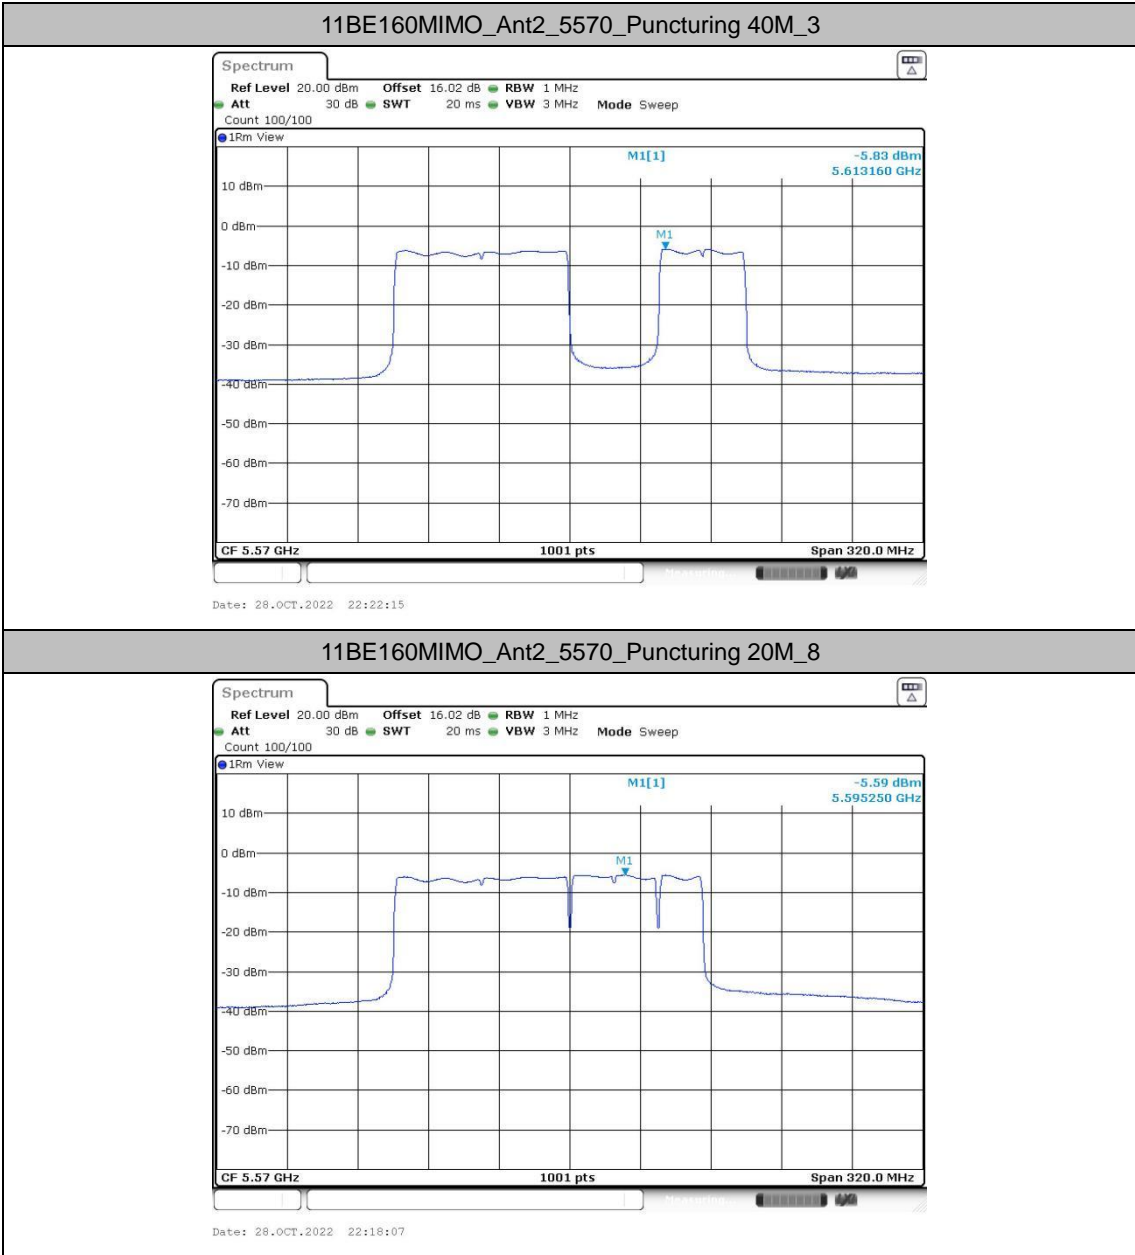



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

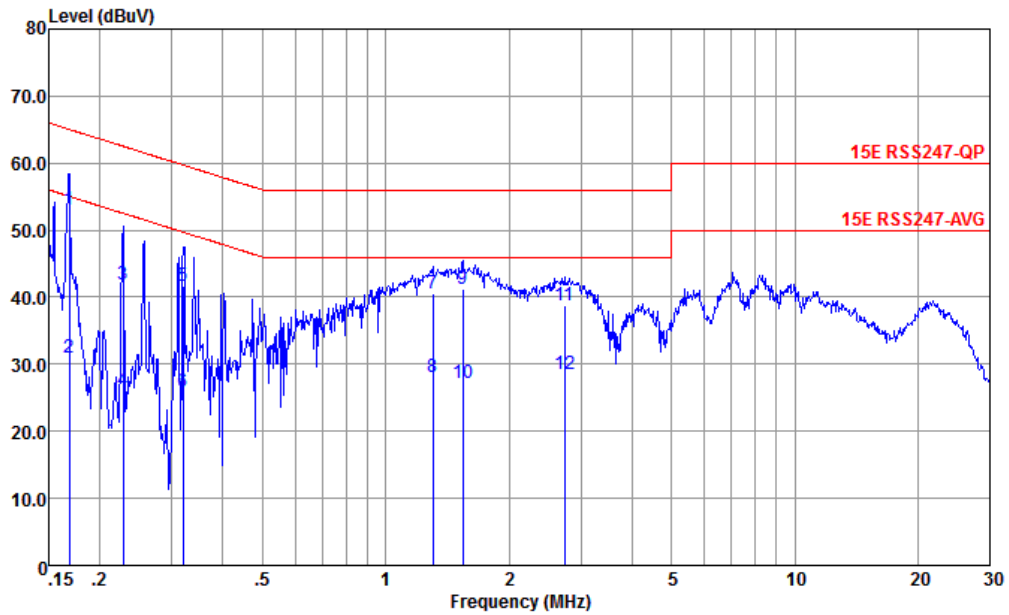


Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-LINE LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1 *	0.169	52.98	-12.05	65.03	42.50	0.05	10.43	QP
2	0.169	31.08	-33.95	65.03	20.60	0.05	10.43	Average
3	0.228	41.93	-20.59	62.52	31.50	0.03	10.40	QP
4	0.228	26.03	-36.49	62.52	15.60	0.03	10.40	Average
5	0.320	41.59	-18.12	59.71	31.20	0.05	10.34	QP
6	0.320	25.89	-33.82	59.71	15.50	0.05	10.34	Average
7	1.303	40.58	-15.42	56.00	30.60	-0.11	10.09	QP
8	1.303	28.18	-27.82	56.00	18.20	-0.11	10.09	Average
9	1.544	41.17	-14.83	56.00	31.20	-0.11	10.08	QP
10	1.544	27.17	-28.83	56.00	17.20	-0.11	10.08	Average
11	2.736	38.85	-17.15	56.00	28.89	-0.10	10.06	QP
12	2.736	28.45	-27.55	56.00	18.49	-0.10	10.06	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

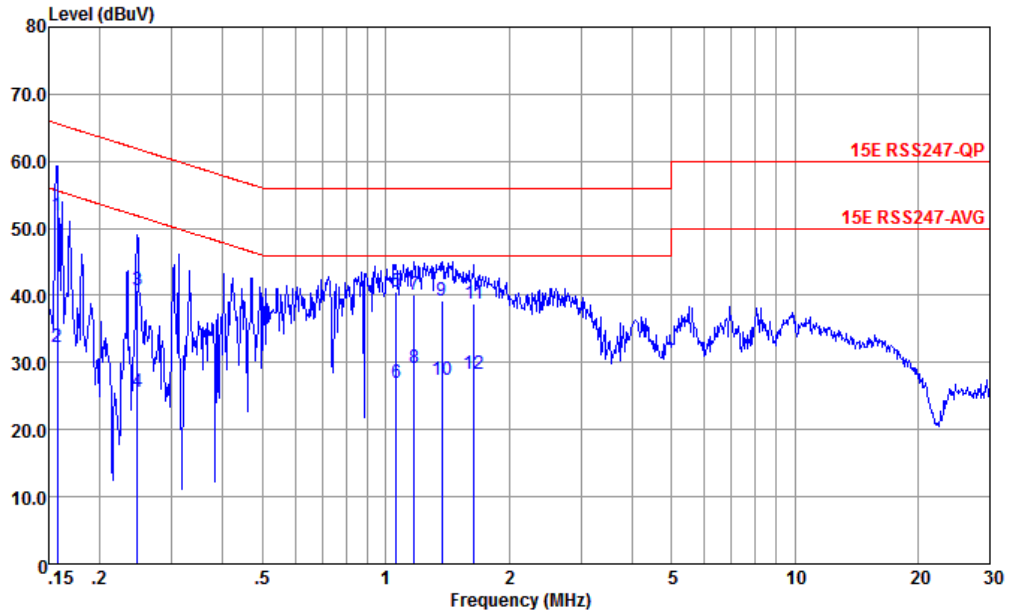

Site : CO01-KS
 Condition : 15E RSS247-QP LISN-060105-NEUTRAL NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.157	51.96	-13.64	65.60	41.50	0.03	10.43	QP
2	0.157	32.26	-33.34	65.60	21.80	0.03	10.43	Average
3	0.247	40.88	-20.98	61.86	30.50	0.00	10.38	QP
4	0.247	25.58	-36.28	61.86	15.20	0.00	10.38	Average
5	1.060	40.49	-15.51	56.00	30.50	-0.11	10.10	QP
6	1.060	26.89	-29.11	56.00	16.90	-0.11	10.10	Average
7	1.172	40.18	-15.82	56.00	30.19	-0.11	10.10	QP
8	1.172	29.28	-26.72	56.00	19.29	-0.11	10.10	Average
9	1.374	39.17	-16.83	56.00	29.19	-0.11	10.09	QP
10	1.374	27.47	-28.53	56.00	17.49	-0.11	10.09	Average
11	1.645	38.76	-17.24	56.00	28.81	-0.12	10.07	QP
12	1.645	28.26	-27.74	56.00	18.31	-0.12	10.07	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Carry Xu	Relative Humidity :	22~23°C
		Temperature :	41~42 %



<U-NII-1, 2A, 2C>

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD 1+2	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD 1+2	802.11a	40	5200	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD 1+2	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	CDD 1+2	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	CDD 1+2	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	CDD 1+2	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	CDD 1+2	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT20	36	5180	MCS0	Full RU	-
Mode 11	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT20	44	5220	MCS0	Full RU	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 12	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT20	48	5240	MCS0	Full RU	-
Mode 13	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT40	38	5190	MCS0	Full RU	-
Mode 20	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT40	46	5230	MCS0	Full RU	-
Mode 21	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT40	54	5270	MCS0	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT40	62	5310	MCS0	Full RU	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 23	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT40	102	5510	MCS0	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT40	110	5550	MCS0	Full RU	-
Mode 25	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT40	134	5670	MCS0	Full RU	-
Mode 26	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT80	42	5210	MCS0	Full RU	-
Mode 27	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT80	58	5290	MCS0	Full RU	-
Mode 28	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT80	106	5530	MCS0	Full RU	-
Mode 29	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT80	122	5610	MCS0	Full RU	-
Mode 30	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Full RU	-
Mode 31	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT160	114	5570	MCS0	Full RU	-
Mode 41	U-NII-2C-3	5.47-5.85	CDD 1+2	802.11a	144	5720	6Mbps	-	-



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 42	U-NII-2C-3	5.47-5.85	CDD 1+2	802.11be EHT20	144	5720	MCS0	Full RU	-
Mode 43	U-NII-2C-3	5.47-5.85	CDD 1+2	802.11be EHT40	142	5710	MCS0	Full RU	-
Mode 44	U-NII-2C-3	5.47-5.85	CDD 1+2	802.11be EHT80	138	5690	MCS0	Full RU	-
Mode 45	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT20	36	5180	MCS0	Single RU	26/0
Mode 46	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT20	64	5320	MCS0	Single RU	26/8
Mode 47	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	100	5500	MCS0	Single RU	106/53
Mode 48	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	140	5700	MCS0	Single RU	106/54
Mode 51	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT20	36	5180	MCS0	Small RU	Index 37+2
Mode 52	U-NII-1	5.25-5.35	CDD 1+2	802.11be EHT20	64	5320	MCS0	Small RU	Index 40+6
Mode 53	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	100	5500	MCS0	Small RU	Index 53+4
Mode 54	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT20	140	5700	MCS0	Small RU	Index 54+4



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 57	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT80	42	5210	MCS0	Puncturing 20M	③
Mode 58	U-NII-2A	5.15-5.25	CDD 1+2	802.11be EHT80	58	5290	MCS0	Puncturing 20M	②
Mode 59	U-NII-2C	5.15-5.25	CDD 1+2	802.11be EHT80	106	5530	MCS0	Puncturing 20M	③
Mode 60	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Puncturing 40M	②
Mode 61	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Puncturing 40M	③
Mode 62	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT160	114	5570	MCS0	Puncturing 40M	③
Mode 63	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Puncturing 20M	①
Mode 64	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Puncturing 20M	⑧
Mode 65	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT160	114	5570	MCS0	Puncturing 20M	⑧



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 67	U-NII-1	5.15-5.25	CDD 1+2	802.11be EHT80	42	5210	MCS0	Large RU 484+242	④
Mode 68	U-NII-2A	5.25-5.35	CDD 1+2	802.11be EHT80	58	5290	MCS0	Large RU 484+242	②
Mode 69	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT80	106	5530	MCS0	Large RU 484+242	④
Mode 70	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Large RU 996+484	③
Mode 71	U-NII-2A	5.15-5.35	CDD 1+2	802.11be EHT160	50	5250	MCS0	Large RU 996*2	⑨
Mode 72	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT160	114	5570	MCS0	Large RU 996+484	③
Mode 73	U-NII-2C	5.47-5.725	CDD 1+2	802.11be EHT160	114	5570	MCS0	Large RU 996*2	⑨



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 75	LTE B48	-	-	-	-	-	-	-	-
	U-NII-1	5.15-5.25	CDD 1+2	802.11a	36	5180	6Mbps	-	-
	-	2400-2483.5	18	Bluetooth-LE_GSFK	39	2480	2Mbps	-	-
Mode 76	LTE B48	-	-	-	-	-	-	-	-
	U-NII-1	5.15-5.25	CDD 1+2	802.11a	36	5180	6Mbps	-	-
	-	2400-2483.5	CDD 1+2	802.11g	01	2412	6Mbps	-	-
Mode 77	U-NII-1	5.15-5.25	CDD 1+2	802.11a	36	5180	6Mbps		LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5150.00	50.99	54.00	-3.01	H	AVERAGE	Pass	Band Edge
2	802.11a	40	10400.00	45.07	68.30	-23.23	V	PEAK	Pass	Harmonic
3	802.11a	48	10480.00	46.33	68.30	-21.97	V	PEAK	Pass	Harmonic
4	802.11a	52	10520.00	45.38	68.30	-22.92	H	PEAK	Pass	Harmonic
5	802.11a	60	10600	44.97	74	-29.03	V	AVERAGE	Pass	Harmonic
6	802.11a	64	5350.48	47.38	54.00	-6.62	H	AVERAGE	Pass	Band Edge
7	802.11a	100	5460.00	45.74	54.00	-8.26	H	AVERAGE	Pass	Band Edge
8	802.11a	116	11160.00	33.75	54.00	-20.25	V	AVERAGE	Pass	Harmonic
9	802.11a	140	5726.93	62.11	68.30	-6.19	H	PEAK	Pass	Band Edge
10	802.11be EHT20	36	5149.94	50.05	54.00	-3.95	V	AVERAGE	Pass	Band Edge
11	802.11be EHT20	44	10440.00	45.53	68.30	-22.77	V	PEAK	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
12	802.11be EHT20	48	10480.00	46.06	68.30	-22.24	V	PEAK	Pass	Harmonic
13	802.11be EHT20	52	10520.00	45.08	68.30	-23.22	V	PEAK	Pass	Harmonic
14	802.11be EHT20	60	10600	45.39	74	-28.61	H	PEAK	Pass	Harmonic
15	802.11be EHT20	64	5350.01	46.68	54.00	-7.32	H	AVERAGE	Pass	Band Edge
16	802.11be EHT20	100	5459.92	46.48	54.00	-7.52	H	AVERAGE	Pass	Band Edge
17	802.11be EHT20	116	11160.00	46.02	74.00	-27.98	V	PEAK	Pass	Harmonic
18	802.11be EHT20	140	5733.25	58.14	68.30	-10.16	H	PEAK	Pass	Band Edge
19	802.11be EHT40	38	5149.45	47.49	54.00	-6.51	H	AVERAGE	Pass	Band Edge
20	802.11be EHT40	46	10460.00	46.13	68.30	-22.17	H	PEAK	Pass	Harmonic
21	802.11be EHT40	54	10540.00	45.41	68.30	-22.89	H	PEAK	Pass	Harmonic
22	802.11be EHT40	62	5351.22	47.71	54.00	-6.29	H	AVERAGE	Pass	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
23	802.11be EHT40	102	5459.88	49.13	54.00	-4.87	H	AVERAGE	Pass	Band Edge
24	802.11be EHT40	110	11100.00	46.46	74.00	-27.54	H	PEAK	Pass	Harmonic
25	802.11be EHT40	134	5725.19	59.88	68.30	-8.42	H	PEAK	Pass	Band Edge
26	802.11be EHT80	42	5115.98	48.16	54.00	-5.84	H	AVERAGE	Pass	Band Edge
27	802.11be EHT80	58	5373.14	50.65	54.00	-3.35	H	AVERAGE	Pass	Band Edge
28	802.11be EHT80	106	5452.32	49.29	54.00	-4.71	H	AVERAGE	Pass	Band Edge
29	802.11be EHT80	122	5457.26	45.19	54.00	-8.81	V	AVERAGE	Pass	Band Edge
30	802.11be EHT160	50	5430.70	49.37	54.00	-4.63	H	AVERAGE	Pass	Band Edge
31	802.11be EHT160	114	5468.70	63.44	68.30	-4.86	V	PEAK	Pass	Band Edge
41	802.11a	144	11440.00	45.57	74.00	-28.43	H	PEAK	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
42	802.11be EHT20	144	11440.00	46.46	74.00	-27.54	V	PEAK	Pass	Harmonic
43	802.11be EHT40	142	11420.00	45.99	74.00	-28.01	V	PEAK	Pass	Harmonic
44	802.11be EHT80	138	11380.00	45.89	74.00	-28.11	V	PEAK	Pass	Harmonic
45	802.11be EHT20	36	5102.83	46.27	54.00	-7.73	V	AVERAGE	Pass	Band Edge
46	802.11be EHT20	64	5459.52	44.69	54.00	-9.31	H	AVERAGE	Pass	Band Edge
47	802.11be EHT20	100	5459.38	44.72	54.00	-9.28	V	AVERAGE	Pass	Band Edge
48	802.11be EHT20	140	5735.14	57.37	68.30	-10.93	H	PEAK	Pass	Band Edge
51	802.11be EHT20	36	5100	46.97	54	-7.03	H	Average	Pass	Band Edge
52	802.11be EHT20	64	5350.20	45.56	54.00	-8.44	H	Average	Pass	Band Edge
53	802.11be EHT20	100	5458.64	45.54	54.00	-8.46	H	Average	Pass	Band Edge
54	802.11be EHT20	140	5725.56	55.76	68.30	-12.54	H	Peak	Pass	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
57	802.11be EHT80	42	5132.38	50.85	54.00	-3.15	H	AVERAGE	Pass	Band Edge
58	802.11be EHT80	58	5353.49	50.79	54.00	-3.21	H	AVERAGE	Pass	Band Edge
59	802.11be EHT80	106	5451.26	50.66	54.00	-3.34	H	AVERAGE	Pass	Band Edge
60	802.11be EHT160	50	5392.45	50.47	54.00	-3.53	H	AVERAGE	Pass	Band Edge
61	802.11be EHT160	50	5091.12	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
62	802.11be EHT160	114	5742.09	64.42	68.30	-3.88	H	PEAK	Pass	Band Edge
63	802.11be EHT160	50	5352.12	50.09	54.00	-3.91	H	AVERAGE	Pass	Band Edge
64	802.11be EHT160	50	5352.16	50.06	54.00	-3.94	H	AVERAGE	Pass	Band Edge
65	802.11be EHT160	114	5450.88	49.58	54.00	-4.42	H	AVERAGE	Pass	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
67	802.11be EHT80	42	5150	50.99	54.00	-3.01	H	Average	Pass	Band Edge
68	802.11be EHT80	58	5372.40	49.59	54.00	-4.41	H	Average	Pass	Band Edge
69	802.11be EHT80	106	5453.84	46.54	54.00	-7.46	H	Average	Pass	Band Edge
70	802.11be EHT160	50	5111.84	50.61	54.00	-3.39	H	Average	Pass	Band Edge
71	802.11be EHT160	50	5133.76	50.34	54.00	-3.66	H	Average	Pass	Band Edge
72	802.11be EHT160	114	5448.72	50.66	54.00	-3.34	H	Average	Pass	Band Edge
73	802.11be EHT160	114	5728.36	64.83	68.30	-3.47	H	Peak	Pass	Band Edge



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
75	LTE B48	-	-	-	-	-	-	-	-	-
	802.11a	36	5149.97	47.68	54.00	-6.32	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE_GSKF	39	2486.44	46.37	54.00	-7.63	V	AVERAGE	Pass	Band Edge
76	LTE B48	-	-	-	-	-	-	-	-	-
	802.11a	36	5149.99	48.80	54.00	-5.20	H	AVERAGE	Pass	Band Edge
	802.11g	01	2389.95	49.26	54.00	-4.74	H	AVERAGE	Pass	Band Edge
77	802.11a	36	48.43	31.50	40.00	-8.50	V	Peak	Pass	LF





	1																																																																																		
Mode	Band Edge																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																		
ANT	CDD 1+2																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.37</td> <td>59.54</td> <td>74.00</td> <td>-14.46</td> <td>43.78</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5145.37	59.54	74.00	-14.46	43.78	34.45	10.62	29.31	0.00	100	119	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>110.33</td> <td>-----</td> <td>-----</td> <td>94.62</td> <td>34.42</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>100</td> <td>119</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5180.00	110.33	-----	-----	94.62	34.42	10.63	29.34	0.00	100	119	PEAK	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1	5145.37	59.54	74.00	-14.46	43.78	34.45	10.62	29.31	0.00	100	119	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1	5180.00	110.33	-----	-----	94.62	34.42	10.63	29.34	0.00	100	119	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>50.99</td> <td>54.00</td> <td>-3.01</td> <td>35.23</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5150.00	50.99	54.00	-3.01	35.23	34.45	10.62	29.31	0.00	100	119	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.72</td> <td>-----</td> <td>-----</td> <td>87.01</td> <td>34.42</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>100</td> <td>119</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5180.00	102.72	-----	-----	87.01	34.42	10.63	29.34	0.00	100	119	AVERAGE
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1	5150.00	50.99	54.00	-3.01	35.23	34.45	10.62	29.31	0.00	100	119	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																											
1	5180.00	102.72	-----	-----	87.01	34.42	10.63	29.34	0.00	100	119	AVERAGE																																																																							





	1																																																																													
Mode	Band Edge																																																																													
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																													
ANT	CDD 1+2																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5147.52</td> <td>58.92</td> <td>74.00</td> <td>-15.08</td> <td>43.16</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>300 68 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5147.52	58.92	74.00	-15.08	43.16	34.45	10.62	29.31	0.00	300 68 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>108.18</td> <td>-----</td> <td>-----</td> <td>92.47</td> <td>34.42</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>300 68 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	108.18	-----	-----	92.47	34.42	10.63	29.34	0.00	300 68 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5147.52	58.92	74.00	-15.08	43.16	34.45	10.62	29.31	0.00	300 68 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5180.00	108.18	-----	-----	92.47	34.42	10.63	29.34	0.00	300 68 PEAK																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5146.91</td> <td>48.03</td> <td>54.00</td> <td>-5.97</td> <td>32.27</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>300 68 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5146.91	48.03	54.00	-5.97	32.27	34.45	10.62	29.31	0.00	300 68 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>100.74</td> <td>-----</td> <td>-----</td> <td>85.05</td> <td>34.41</td> <td>10.63</td> <td>29.35</td> <td>0.00</td> <td>300 68 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5180.00	100.74	-----	-----	85.05	34.41	10.63	29.35	0.00	300 68 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5146.91	48.03	54.00	-5.97	32.27	34.45	10.62	29.31	0.00	300 68 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5180.00	100.74	-----	-----	85.05	34.41	10.63	29.35	0.00	300 68 AVERAGE																																																																					

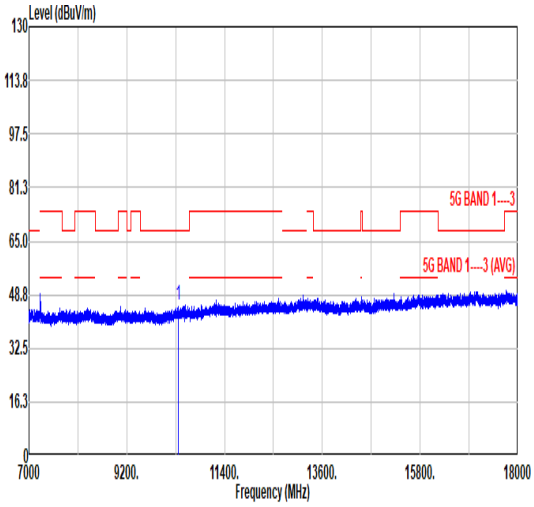
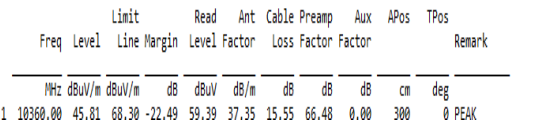


Mode	1																																																																																			
	Harmonic																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak																																																																																				
Avg																																																																																				
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.81</td> <td>68.30</td> <td>-22.49</td> <td>59.39</td> <td>37.35</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.81	68.30	-22.49	59.39	37.35	15.55	66.48	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>44.95</td> <td>68.30</td> <td>-23.35</td> <td>58.53</td> <td>37.35</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	44.95	68.30	-23.35	58.53	37.35	15.55	66.48	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	10360.00	45.81	68.30	-22.49	59.39	37.35	15.55	66.48	0.00	300	0	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	10360.00	44.95	68.30	-23.35	58.53	37.35	15.55	66.48	0.00	100	0	PEAK																																																																								

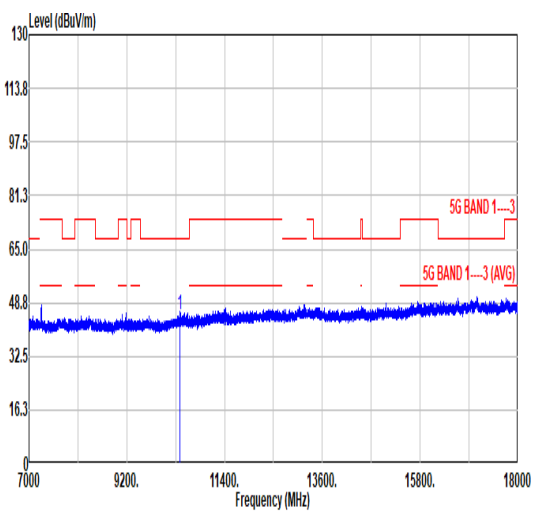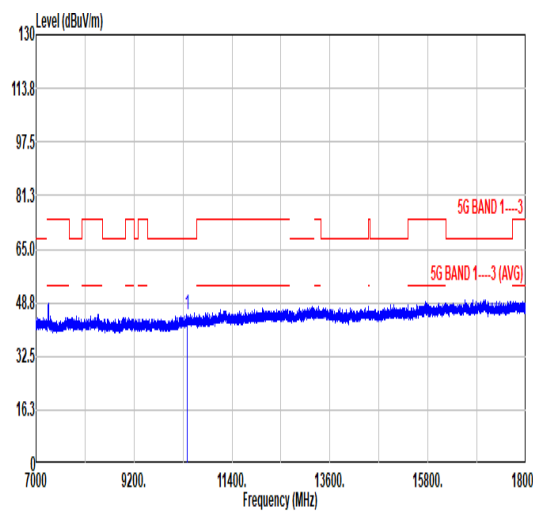

Mode	2																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11a_CH40_5200MHz																																																																															
ANT	CDD 1+2																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10400.00</td> <td>44.93</td> <td>68.30</td> <td>-23.37</td> <td>58.40</td> <td>37.38</td> <td>15.58</td> <td>66.43</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10400.00	44.93	68.30	-23.37	58.40	37.38	15.58	66.43	0.00	300	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10400.00</td> <td>45.07</td> <td>68.30</td> <td>-23.23</td> <td>58.54</td> <td>37.38</td> <td>15.58</td> <td>66.43</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10400.00	45.07	68.30	-23.23	58.54	37.38	15.58	66.43	0.00	100	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10400.00	44.93	68.30	-23.37	58.40	37.38	15.58	66.43	0.00	300	0 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10400.00	45.07	68.30	-23.23	58.54	37.38	15.58	66.43	0.00	100	0 PEAK																																																																						

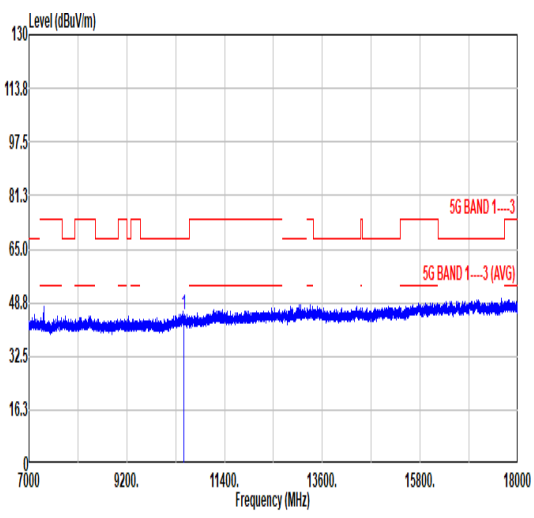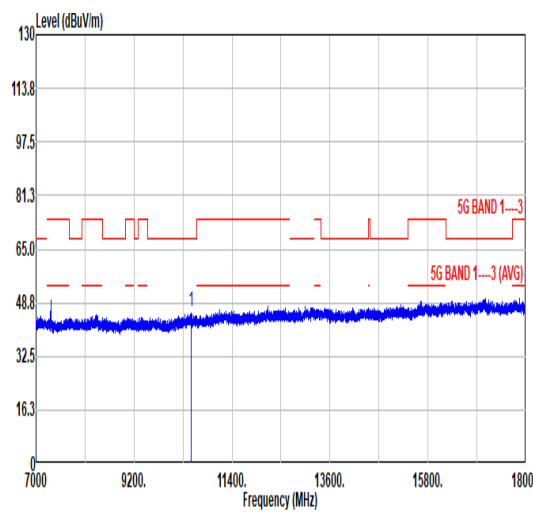

Mode	3																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																															
ANT	CDD 1+2																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak																																																																																
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>45.25</td> <td>68.30</td> <td>-23.05</td> <td>58.53</td> <td>37.44</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	45.25	68.30	-23.05	58.53	37.44	15.62	66.34	0.00	300	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>46.33</td> <td>68.30</td> <td>-21.97</td> <td>59.61</td> <td>37.44</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	46.33	68.30	-21.97	59.61	37.44	15.62	66.34	0.00	100	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	45.25	68.30	-23.05	58.53	37.44	15.62	66.34	0.00	300	0 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	46.33	68.30	-21.97	59.61	37.44	15.62	66.34	0.00	100	0 PEAK																																																																						







Mode	4																																																																			
	Harmonic																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																			
ANT	CDD 1+2																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.38</td> <td>68.30</td> <td>-22.92</td> <td>58.57</td> <td>37.46</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	10520.00	45.38	68.30	-22.92	58.57	37.46	15.64	66.29	0.00	300	0 PEAK	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.34</td> <td>68.30</td> <td>-22.96</td> <td>58.53</td> <td>37.46</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg	1	10520.00	45.34	68.30	-22.96	58.53	37.46	15.64	66.29	0.00	100	0 PEAK
Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																											
1	10520.00	45.38	68.30	-22.92	58.57	37.46	15.64	66.29	0.00	300	0 PEAK																																																									
Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Factor	cm	deg																																																											
1	10520.00	45.34	68.30	-22.96	58.53	37.46	15.64	66.29	0.00	100	0 PEAK																																																									



	5																																																																																								
Mode	Harmonic																																																																																								
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																								
ANT	CDD 1+2																																																																																								
Pol.	Horizontal	Vertical																																																																																							
Peak Avg																																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.64</td> <td>74.00</td> <td>-29.36</td> <td>57.64</td> <td>37.52</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.64	74.00	-29.36	57.64	37.52	15.68	66.20	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>44.97</td> <td>74.00</td> <td>-29.03</td> <td>57.97</td> <td>37.52</td> <td>15.68</td> <td>66.20</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	44.97	74.00	-29.03	57.97	37.52	15.68	66.20	0.00	100	0
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																	
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	10600.00	44.64	74.00	-29.36	57.64	37.52	15.68	66.20	0.00	300	0	PEAK																																																																													
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																	
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																															
1	10600.00	44.97	74.00	-29.03	57.97	37.52	15.68	66.20	0.00	100	0	PEAK																																																																													

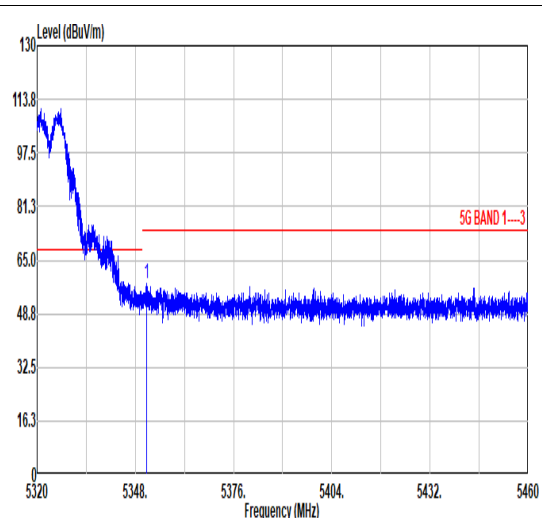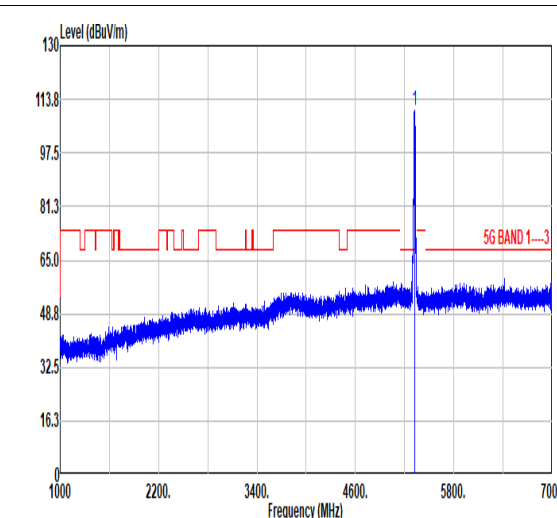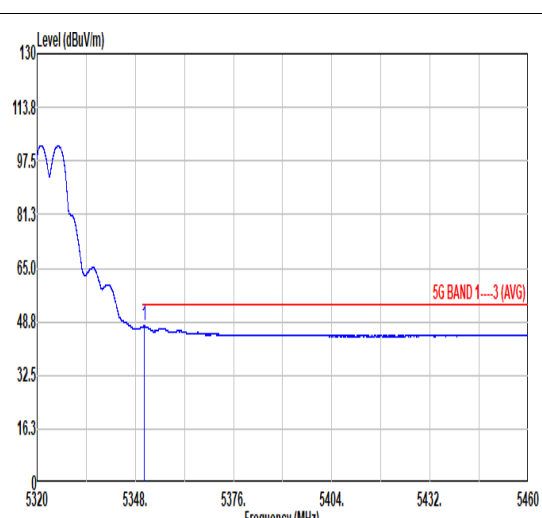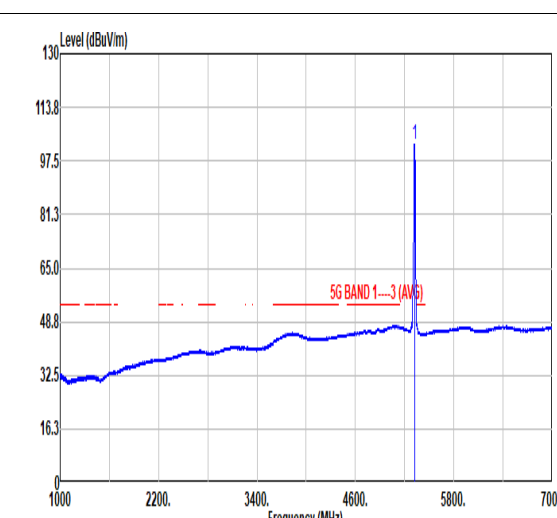

Mode		6																																																																									
		Band Edge																																																																									
		U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																									
ANT		CDD 1+2																																																																									
Pol.		Horizontal					Fundamental																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal. Peak at 5320.00 MHz.</p>					 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Peak at 5320.00 MHz.</p>																																																																					
	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5351.30</td> <td>57.69</td> <td>74.00</td> <td>-16.31</td> <td>41.98</td> <td>34.40</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>100</td> <td>115 PEAK</td> </tr> </tbody> </table>					Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5351.30	57.69	74.00	-16.31	41.98	34.40	10.83	29.52	0.00	100	115 PEAK	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>110.26</td> <td>-----</td> <td>94.56</td> <td>34.40</td> <td>10.80</td> <td>29.50</td> <td>0.00</td> <td>100</td> <td>115</td> <td>PEAK</td> </tr> </tbody> </table>					Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5320.00	110.26	-----	94.56	34.40	10.80	29.50	0.00	100	115
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1 5351.30	57.69	74.00	-16.31	41.98	34.40	10.83	29.52	0.00	100	115 PEAK																																																																	
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1 5320.00	110.26	-----	94.56	34.40	10.80	29.50	0.00	100	115	PEAK																																																																	
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal. Average level at 5350.48 MHz.</p>					 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental. Average level at 5320.00 MHz.</p>																																																																					
	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.48</td> <td>47.38</td> <td>54.00</td> <td>-6.62</td> <td>31.67</td> <td>34.40</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>100</td> <td>115 AVERAGE</td> </tr> </tbody> </table>					Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5350.48	47.38	54.00	-6.62	31.67	34.40	10.83	29.52	0.00	100	115 AVERAGE	<table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>Aux Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>102.44</td> <td>-----</td> <td>86.74</td> <td>34.40</td> <td>10.79</td> <td>29.49</td> <td>0.00</td> <td>100</td> <td>115</td> <td>AVERAGE</td> </tr> </tbody> </table>					Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 5320.00	102.44	-----	86.74	34.40	10.79	29.49	0.00	100	115
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1 5350.48	47.38	54.00	-6.62	31.67	34.40	10.83	29.52	0.00	100	115 AVERAGE																																																																	
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	Aux Factor	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																	
1 5320.00	102.44	-----	86.74	34.40	10.79	29.49	0.00	100	115	AVERAGE																																																																	



Mode		6																																																																																
		Band Edge																																																																																
		U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																
ANT		CDD 1+2																																																																																
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5446.19</td> <td>56.31</td> <td>74.00</td> <td>-17.69</td> <td>40.51</td> <td>34.45</td> <td>10.96</td> <td>29.61</td> <td>0.00</td> <td>325</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5446.19	56.31	74.00	-17.69	40.51	34.45	10.96	29.61	0.00	325	63	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.74</td> <td>-----</td> <td>-----</td> <td>94.03</td> <td>34.40</td> <td>10.80</td> <td>29.49</td> <td>0.00</td> <td>325</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	109.74	-----	-----	94.03	34.40	10.80	29.49	0.00	325	63	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5446.19	56.31	74.00	-17.69	40.51	34.45	10.96	29.61	0.00	325	63	PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5320.00	109.74	-----	-----	94.03	34.40	10.80	29.49	0.00	325	63	PEAK																																																																						
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.39</td> <td>45.78</td> <td>54.00</td> <td>-8.22</td> <td>30.07</td> <td>34.40</td> <td>10.83</td> <td>29.52</td> <td>0.00</td> <td>325</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5351.39	45.78	54.00	-8.22	30.07	34.40	10.83	29.52	0.00	325	63	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.90</td> <td>-----</td> <td>-----</td> <td>85.27</td> <td>34.40</td> <td>10.80</td> <td>29.49</td> <td>0.00</td> <td>325</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1	5320.00	100.90	-----	-----	85.27	34.40	10.80	29.49	0.00	325	63	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5351.39	45.78	54.00	-8.22	30.07	34.40	10.83	29.52	0.00	325	63	AVERAGE																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																										
1	5320.00	100.90	-----	-----	85.27	34.40	10.80	29.49	0.00	325	63	AVERAGE																																																																						







Mode	6																																																																																																																																								
	Harmonic																																																																																																																																								
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																								
ANT	CDD 1+2																																																																																																																																								
Pol.	Horizontal	Vertical																																																																																																																																							
Peak																																																																																																																																									
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>45.18</td> <td>74.00</td> <td>-28.82</td> <td>58.07</td> <td>37.55</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>360</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10640.00	45.18	74.00	-28.82	58.07	37.55	15.71	66.15	0.00									100									360									PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10640.00</td> <td>44.67</td> <td>74.00</td> <td>-29.33</td> <td>57.56</td> <td>37.55</td> <td>15.71</td> <td>66.15</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10640.00	44.67	74.00	-29.33	57.56	37.55	15.71	66.15	0.00									100									100									0									PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																	
1 10640.00	45.18	74.00	-28.82	58.07	37.55	15.71	66.15	0.00																																																																																																																																	
								100																																																																																																																																	
								360																																																																																																																																	
								PEAK																																																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																																	
1 10640.00	44.67	74.00	-29.33	57.56	37.55	15.71	66.15	0.00																																																																																																																																	
								100																																																																																																																																	
								100																																																																																																																																	
								0																																																																																																																																	
								PEAK																																																																																																																																	



7																																																						
Band Edge																																																						
U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																						
CDD 1+2																																																						
Mode																																																						
ANT																																																						
Pol.																																																						
Peak	Horizontal																																																					
	Fundamental																																																					
Avg	Horizontal																																																					
	Fundamental																																																					
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.82</td> <td>57.02</td> <td>74.00</td> <td>-16.98</td> <td>41.20</td> <td>34.46</td> <td>10.98</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>56.93</td> <td>68.30</td> <td>-11.37</td> <td>41.10</td> <td>34.47</td> <td>10.99</td> <td>29.63</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5459.82	57.02	74.00	-16.98	41.20	34.46	10.98	29.62	0.00	100	110	PEAK	2	5469.52	56.93	68.30	-11.37	41.10	34.47	10.99	29.63	0.00	100	110	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																														
1	5459.82	57.02	74.00	-16.98	41.20	34.46	10.98	29.62	0.00	100	110	PEAK																																										
2	5469.52	56.93	68.30	-11.37	41.10	34.47	10.99	29.63	0.00	100	110	PEAK																																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>110.12</td> <td>-----</td> <td>-----</td> <td>94.24</td> <td>34.49</td> <td>11.05</td> <td>29.66</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	110.12	-----	-----	94.24	34.49	11.05	29.66	0.00	100	110	PEAK													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																														
1	5500.00	110.12	-----	-----	94.24	34.49	11.05	29.66	0.00	100	110	PEAK																																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5460.00</td> <td>45.74</td> <td>54.00</td> <td>-8.26</td> <td>29.92</td> <td>34.46</td> <td>10.98</td> <td>29.62</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5460.00	45.74	54.00	-8.26	29.92	34.46	10.98	29.62	0.00	100	110	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																														
1	5460.00	45.74	54.00	-8.26	29.92	34.46	10.98	29.62	0.00	100	110	AVERAGE																																										
<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>101.37</td> <td>-----</td> <td>-----</td> <td>85.48</td> <td>34.50</td> <td>11.04</td> <td>29.65</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1	5500.00	101.37	-----	-----	85.48	34.50	11.04	29.65	0.00	100	110	AVERAGE													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor	Remark																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																														
1	5500.00	101.37	-----	-----	85.48	34.50	11.04	29.65	0.00	100	110	AVERAGE																																										

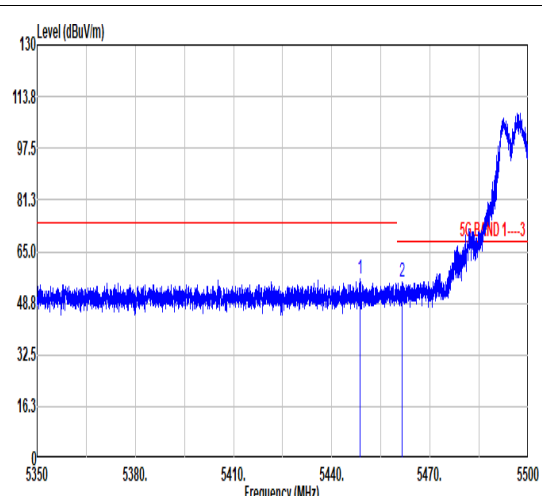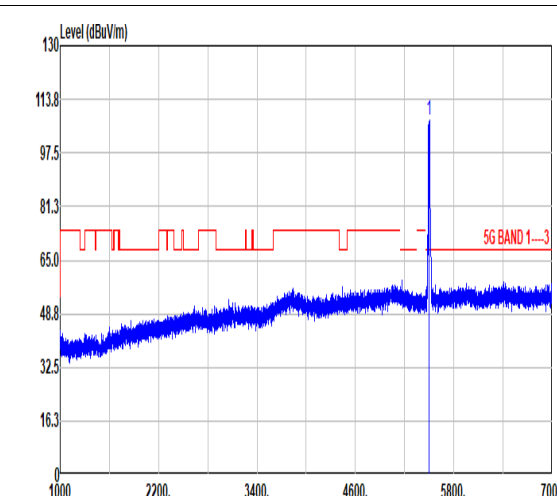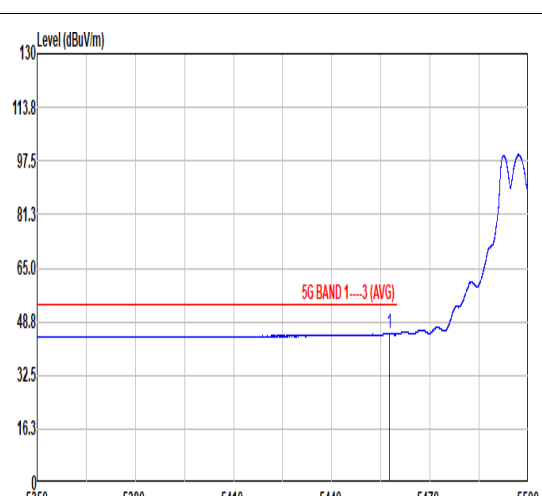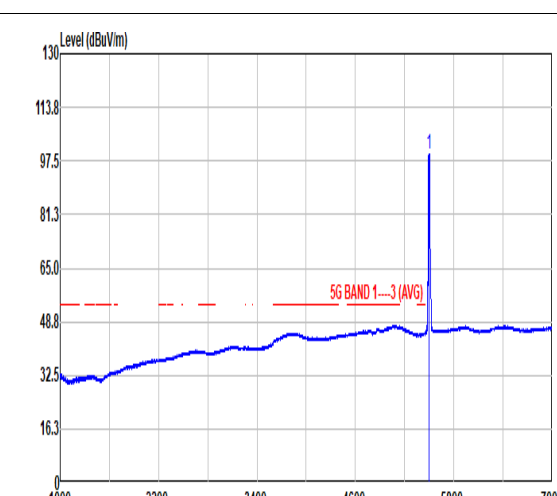

Mode	7																																																																																																
	Band Edge																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																
ANT	CDD 1+2																																																																																																
Pol.	Vertical	Fundamental																																																																																															
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5448.73</td> <td>56.27</td> <td>74.00</td> <td>-17.73</td> <td>40.47</td> <td>34.45</td> <td>10.96</td> <td>29.61</td> <td>0.00</td> <td>321</td> <td>59</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.53</td> <td>55.48</td> <td>68.30</td> <td>-12.82</td> <td>39.66</td> <td>34.46</td> <td>10.98</td> <td>29.62</td> <td>0.00</td> <td>321</td> <td>59</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.73	56.27	74.00	-17.73	40.47	34.45	10.96	29.61	0.00	321	59	PEAK	2	5461.53	55.48	68.30	-12.82	39.66	34.46	10.98	29.62	0.00	321	59	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.58</td> <td>-----</td> <td>-----</td> <td>91.70</td> <td>34.49</td> <td>11.05</td> <td>29.66</td> <td>0.00</td> <td>321</td> <td>59</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	107.58	-----	-----	91.70	34.49	11.05	29.66	0.00	321	59	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5448.73	56.27	74.00	-17.73	40.47	34.45	10.96	29.61	0.00	321	59	PEAK																																																																																					
2	5461.53	55.48	68.30	-12.82	39.66	34.46	10.98	29.62	0.00	321	59	PEAK																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	107.58	-----	-----	91.70	34.49	11.05	29.66	0.00	321	59	PEAK																																																																																					
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.51</td> <td>45.15</td> <td>54.00</td> <td>-8.85</td> <td>29.33</td> <td>34.46</td> <td>10.98</td> <td>29.62</td> <td>0.00</td> <td>321</td> <td>59</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.51	45.15	54.00	-8.85	29.33	34.46	10.98	29.62	0.00	321	59	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.46</td> <td>-----</td> <td>-----</td> <td>83.57</td> <td>34.50</td> <td>11.04</td> <td>29.65</td> <td>0.00</td> <td>321</td> <td>59</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	99.46	-----	-----	83.57	34.50	11.04	29.65	0.00	321	59	AVERAGE													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5457.51	45.15	54.00	-8.85	29.33	34.46	10.98	29.62	0.00	321	59	AVERAGE																																																																																					
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	Factor																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	5500.00	99.46	-----	-----	83.57	34.50	11.04	29.65	0.00	321	59	AVERAGE																																																																																					






Mode	7																																																																																	
	Harmonic																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																	
ANT	CDD 1+2																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.61</td> <td>74.00</td> <td>-28.39</td> <td>57.64</td> <td>37.80</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	45.61	74.00	-28.39	57.64	37.80	15.90	65.73	0.00	100	360	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11000.00</td> <td>45.47</td> <td>74.00</td> <td>-28.53</td> <td>57.50</td> <td>37.80</td> <td>15.90</td> <td>65.73</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 11000.00	45.47	74.00	-28.53	57.50	37.80	15.90	65.73	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11000.00	45.61	74.00	-28.39	57.64	37.80	15.90	65.73	0.00	100	360	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 11000.00	45.47	74.00	-28.53	57.50	37.80	15.90	65.73	0.00	100	0	PEAK																																																																							



Mode	8																																																																																																																												
	Harmonic																																																																																																																												
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																												
ANT	CDD 1+2																																																																																																																												
Pol.	Horizontal	Vertical																																																																																																																											
Peak																																																																																																																													
Avg																																																																																																																													
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>45.71</td> <td>74.00</td> <td>-28.29</td> <td>57.43</td> <td>37.94</td> <td>15.98</td> <td>65.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>360</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11160.00	45.71	74.00	-28.29	57.43	37.94	15.98	65.64							0.00	100								360								PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.56</td> <td>74.00</td> <td>-27.44</td> <td>58.28</td> <td>37.94</td> <td>15.98</td> <td>65.64</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11160.00	46.56	74.00	-27.44	58.28	37.94	15.98	65.64							0.00	100								100								0								PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																						
1 11160.00	45.71	74.00	-28.29	57.43	37.94	15.98	65.64																																																																																																																						
						0.00	100																																																																																																																						
							360																																																																																																																						
							PEAK																																																																																																																						
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																																					
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																					
1 11160.00	46.56	74.00	-27.44	58.28	37.94	15.98	65.64																																																																																																																						
						0.00	100																																																																																																																						
							100																																																																																																																						
							0																																																																																																																						
							PEAK																																																																																																																						

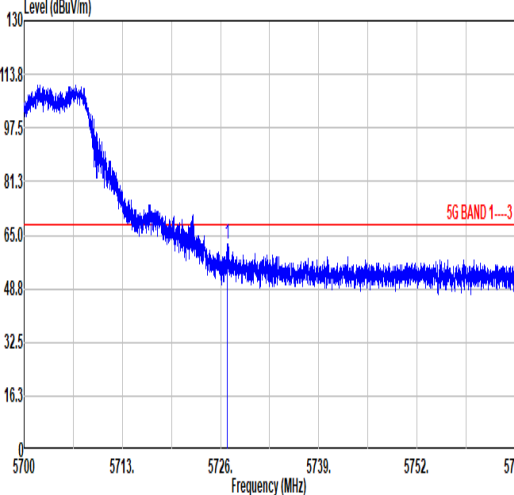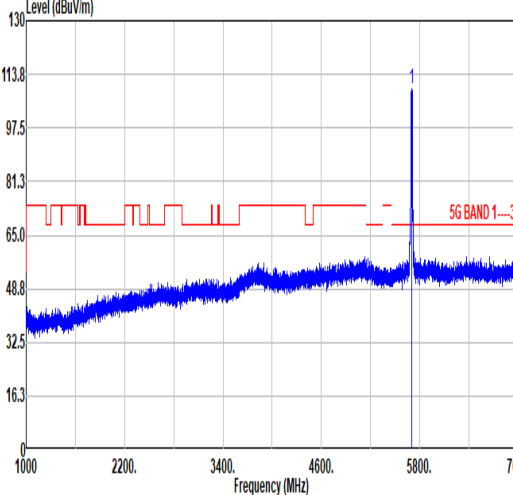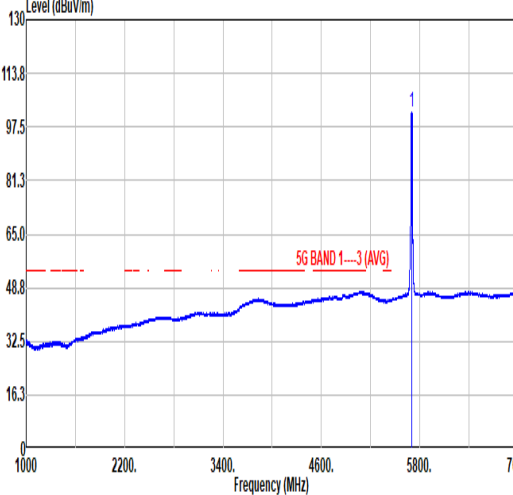

Mode	9																																																																																																	
	Band Edge																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																	
ANT	CDD 1+2																																																																																																	
Pol.	Horizontal	Fundamental																																																																																																
Peak	 <table border="1" data-bbox="268 1133 783 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.93</td> <td>62.11</td> <td>68.30</td> <td>-6.19</td> <td>46.01</td> <td>34.58</td> <td>11.31</td> <td>29.79</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5726.93	62.11	68.30	-6.19	46.01	34.58	11.31	29.79							0.00	100								116 PEAK	 <table border="1" data-bbox="911 1133 1426 1254"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>109.50</td> <td>-----</td> <td>-----</td> <td>93.51</td> <td>34.51</td> <td>11.28</td> <td>29.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	109.50	-----	-----	93.51	34.51	11.28	29.80							0.00	100								116 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5726.93	62.11	68.30	-6.19	46.01	34.58	11.31	29.79																																																																																											
						0.00	100																																																																																											
							116 PEAK																																																																																											
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5700.00	109.50	-----	-----	93.51	34.51	11.28	29.80																																																																																											
						0.00	100																																																																																											
							116 PEAK																																																																																											
Avg	Blank																																																																																																	
		 <table border="1" data-bbox="911 1814 1426 1935"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.90</td> <td>-----</td> <td>-----</td> <td>85.92</td> <td>34.50</td> <td>11.28</td> <td>29.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0.00</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	101.90	-----	-----	85.92	34.50	11.28	29.80							0.00	100								116 AVERAGE																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 5700.00	101.90	-----	-----	85.92	34.50	11.28	29.80																																																																																											
						0.00	100																																																																																											
							116 AVERAGE																																																																																											







Mode	9																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																											
ANT	CDD 1+2																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5755.46</td> <td>58.46</td> <td>68.30</td> <td>-9.84</td> <td>42.23</td> <td>34.67</td> <td>11.34</td> <td>29.78</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>351 63 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5755.46	58.46	68.30	-9.84	42.23	34.67	11.34	29.78	0.00									351 63 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>106.18</td> <td>-----</td> <td>-----</td> <td>90.22</td> <td>34.49</td> <td>11.27</td> <td>29.80</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>351 63 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	106.18	-----	-----	90.22	34.49	11.27	29.80	0.00									351 63 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5755.46	58.46	68.30	-9.84	42.23	34.67	11.34	29.78	0.00																																																																																				
								351 63 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5700.00	106.18	-----	-----	90.22	34.49	11.27	29.80	0.00																																																																																				
								351 63 PEAK																																																																																				
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.28</td> <td>-----</td> <td>-----</td> <td>82.32</td> <td>34.49</td> <td>11.27</td> <td>29.80</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>351 63 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5700.00	98.28	-----	-----	82.32	34.49	11.27	29.80	0.00									351 63 AVERAGE																																													
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5700.00	98.28	-----	-----	82.32	34.49	11.27	29.80	0.00																																																																																				
								351 63 AVERAGE																																																																																				







Mode	9																																																																										
	Harmonic																																																																										
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																										
ANT	CDD 1+2																																																																										
Pol.	Horizontal	Vertical																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>45.75</td> <td>74.00</td> <td>-28.25</td> <td>57.00</td> <td>38.16</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11400.00	45.75	74.00	-28.25	57.00	38.16	16.10	65.51	0.00	<table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11400.00</td> <td>46.19</td> <td>74.00</td> <td>-27.81</td> <td>57.44</td> <td>38.16</td> <td>16.10</td> <td>65.51</td> <td>0.00</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 11400.00	46.19	74.00	-27.81	57.44	38.16	16.10	65.51	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																			
1 11400.00	45.75	74.00	-28.25	57.00	38.16	16.10	65.51	0.00																																																																			
Limit	Over	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																			
1 11400.00	46.19	74.00	-27.81	57.44	38.16	16.10	65.51	0.00																																																																			

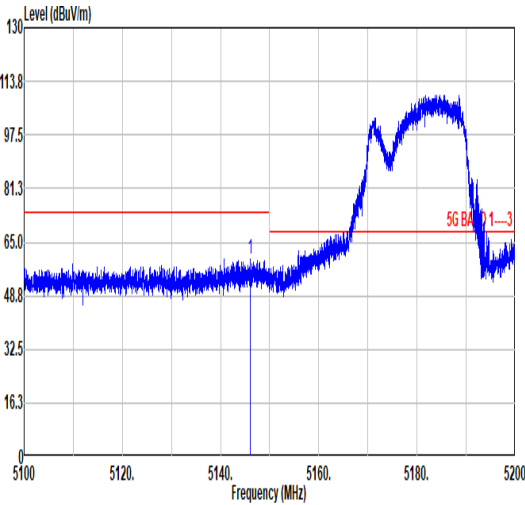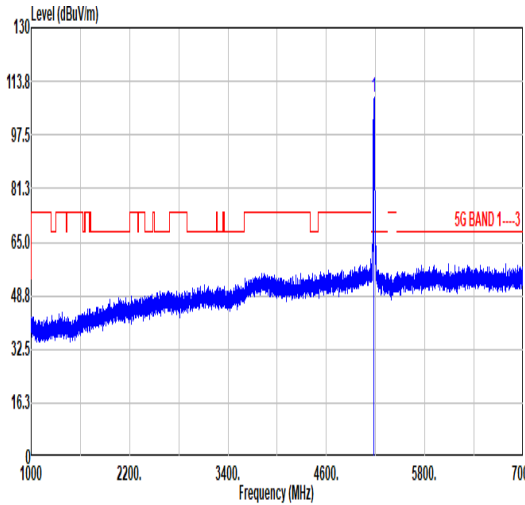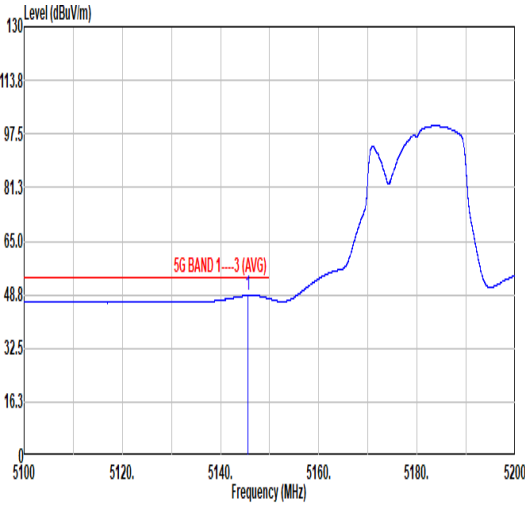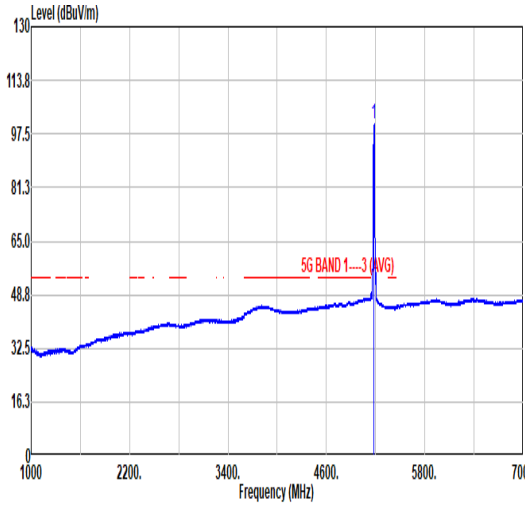

		10																																																																										
Mode	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																																											
ANT	CDD 1+2																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal between 5100 and 5200 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. A blue vertical line marks the peak at 5146.03 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.03</td> <td>59.95</td> <td>74.00</td> <td>-14.05</td> <td>44.19</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5146.03	59.95	74.00	-14.05	44.19	34.45	10.62	29.31	0.00	100	110	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal between 1000 and 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m. A blue vertical line marks the peak at 5180.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.07</td> <td>-----</td> <td>-----</td> <td>93.38</td> <td>34.41</td> <td>10.63</td> <td>29.35</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	109.07	-----	-----	93.38	34.41	10.63	29.35	0.00	100	110	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5146.03	59.95	74.00	-14.05	44.19	34.45	10.62	29.31	0.00	100	110	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	109.07	-----	-----	93.38	34.41	10.63	29.35	0.00	100	110	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows an average signal between 5100 and 5200 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m. A blue vertical line marks the average level at 5145.61 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.61</td> <td>48.54</td> <td>54.00</td> <td>-5.46</td> <td>32.78</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5145.61	48.54	54.00	-5.46	32.78	34.45	10.62	29.31	0.00	100	110	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows an average signal between 1000 and 7000 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m. A blue vertical line marks the average level at 5180.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.39</td> <td>-----</td> <td>-----</td> <td>84.68</td> <td>34.42</td> <td>10.63</td> <td>29.34</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	100.39	-----	-----	84.68	34.42	10.63	29.34	0.00	100	110	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5145.61	48.54	54.00	-5.46	32.78	34.45	10.62	29.31	0.00	100	110	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	100.39	-----	-----	84.68	34.42	10.63	29.34	0.00	100	110	AVERAGE																																																																

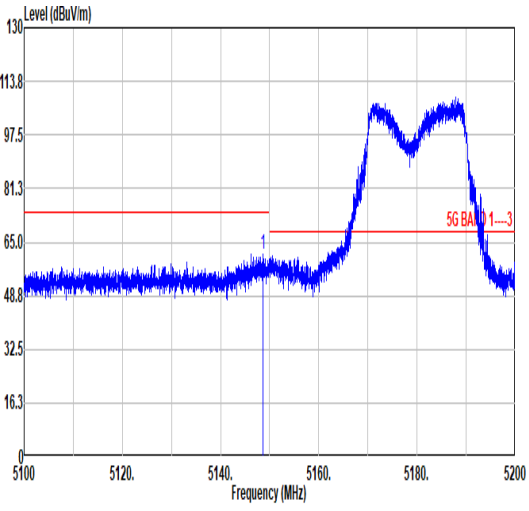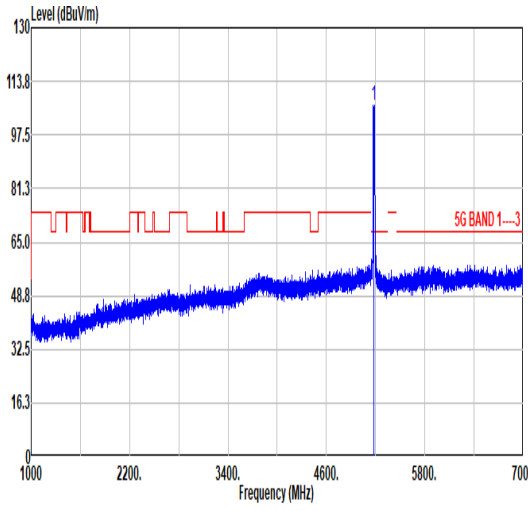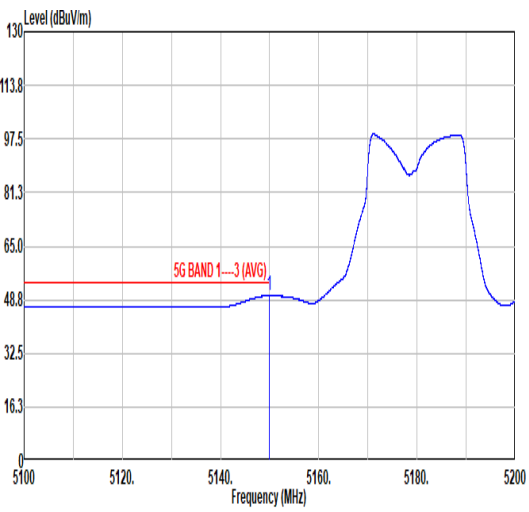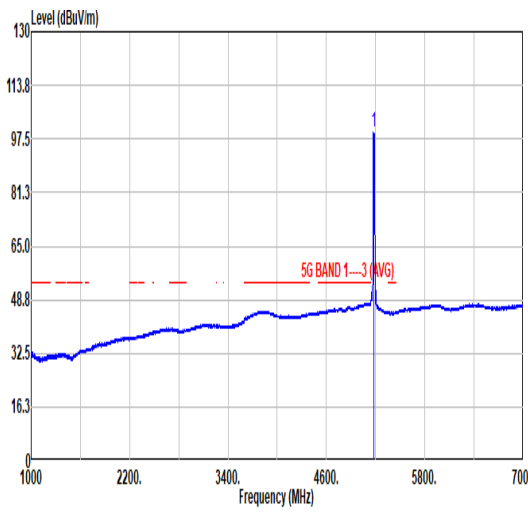

		10																																																																										
Mode		Band Edge																																																																										
		U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																																										
ANT		CDD 1+2																																																																										
Pol.		Vertical	Fundamental																																																																									
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a signal between 5140 and 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.62</td> <td>61.35</td> <td>74.00</td> <td>-12.65</td> <td>45.59</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>364</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5148.62	61.35	74.00	-12.65	45.59	34.45	10.62	29.31	0.00	364	61	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a signal between 5140 and 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 limit at approximately 65.0 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>106.55</td> <td>-----</td> <td>-----</td> <td>90.82</td> <td>34.43</td> <td>10.63</td> <td>29.33</td> <td>0.00</td> <td>364</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	106.55	-----	-----	90.82	34.43	10.63	29.33	0.00	364	61	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																				
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5148.62	61.35	74.00	-12.65	45.59	34.45	10.62	29.31	0.00	364	61	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	106.55	-----	-----	90.82	34.43	10.63	29.33	0.00	364	61	PEAK																																																																
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows the average signal between 5140 and 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>50.05</td> <td>54.00</td> <td>-3.95</td> <td>34.29</td> <td>34.45</td> <td>10.62</td> <td>29.31</td> <td>0.00</td> <td>364</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.94	50.05	54.00	-3.95	34.29	34.45	10.62	29.31	0.00	364	61	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows the average signal between 5140 and 5180 MHz. A red horizontal line indicates the 5G BAND 1-3 (AVG) limit at approximately 48.8 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>99.37</td> <td>-----</td> <td>-----</td> <td>83.64</td> <td>34.43</td> <td>10.63</td> <td>29.33</td> <td>0.00</td> <td>364</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	99.37	-----	-----	83.64	34.43	10.63	29.33	0.00	364	61	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5149.94	50.05	54.00	-3.95	34.29	34.45	10.62	29.31	0.00	364	61	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																					
Freq	Level	Line	Level	Factor	Loss	Factor	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																					
1	5180.00	99.37	-----	-----	83.64	34.43	10.63	29.33	0.00	364	61	AVERAGE																																																																



Mode	10																																																																																			
	Harmonic																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full RU_5180MHz																																																																																			
ANT	CDD 1+2																																																																																			
Pol.	Horizontal	Vertical																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>44.44</td> <td>68.30</td> <td>-23.86</td> <td>58.02</td> <td>37.35</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>300</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	44.44	68.30	-23.86	58.02	37.35	15.55	66.48	0.00	300	0	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.12</td> <td>68.30</td> <td>-23.18</td> <td>58.70</td> <td>37.35</td> <td>15.55</td> <td>66.48</td> <td>0.00</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	45.12	68.30	-23.18	58.70	37.35	15.55	66.48	0.00	100	0	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 10360.00	44.44	68.30	-23.86	58.02	37.35	15.55	66.48	0.00	300	0	PEAK																																																																									
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																										
1 10360.00	45.12	68.30	-23.18	58.70	37.35	15.55	66.48	0.00	100	0	PEAK																																																																									



Mode	11																																																																																																													
	Harmonic																																																																																																													
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full RU_5220MHz																																																																																																													
ANT	CDD 1+2																																																																																																													
Pol.	Horizontal	Vertical																																																																																																												
Peak																																																																																																														
Avg																																																																																																														
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>45.40</td> <td>68.30</td> <td>-22.90</td> <td>58.78</td> <td>37.41</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>300</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10440.00	45.40	68.30	-22.90	58.78	37.41	15.60	66.39	0.00									300									0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10440.00</td> <td>45.53</td> <td>68.30</td> <td>-22.77</td> <td>58.91</td> <td>37.41</td> <td>15.60</td> <td>66.39</td> <td>0.00</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 10440.00	45.53	68.30	-22.77	58.91	37.41	15.60	66.39	0.00									100									0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																						
1 10440.00	45.40	68.30	-22.90	58.78	37.41	15.60	66.39	0.00																																																																																																						
								300																																																																																																						
								0 PEAK																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																						
1 10440.00	45.53	68.30	-22.77	58.91	37.41	15.60	66.39	0.00																																																																																																						
								100																																																																																																						
								0 PEAK																																																																																																						



Mode	12																																																																															
	Harmonic																																																																															
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full RU_5240MHz																																																																															
ANT	CDD 1+2																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>44.94</td> <td>68.30</td> <td>-23.36</td> <td>58.22</td> <td>37.44</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	44.94	68.30	-23.36	58.22	37.44	15.62	66.34	0.00	300	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10480.00</td> <td>46.06</td> <td>68.30</td> <td>-22.24</td> <td>59.34</td> <td>37.44</td> <td>15.62</td> <td>66.34</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10480.00	46.06	68.30	-22.24	59.34	37.44	15.62	66.34	0.00	100	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	44.94	68.30	-23.36	58.22	37.44	15.62	66.34	0.00	300	0 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10480.00	46.06	68.30	-22.24	59.34	37.44	15.62	66.34	0.00	100	0 PEAK																																																																						



Mode	13																																																																															
	Harmonic																																																																															
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full RU_5260MHz																																																																															
ANT	CDD 1+2																																																																															
Pol.	Horizontal	Vertical																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>44.92</td> <td>68.30</td> <td>-23.38</td> <td>58.11</td> <td>37.46</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>300</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	44.92	68.30	-23.38	58.11	37.46	15.64	66.29	0.00	300	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.08</td> <td>68.30</td> <td>-23.22</td> <td>58.27</td> <td>37.46</td> <td>15.64</td> <td>66.29</td> <td>0.00</td> <td>100</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10520.00	45.08	68.30	-23.22	58.27	37.46	15.64	66.29	0.00	100	0 PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10520.00	44.92	68.30	-23.38	58.11	37.46	15.64	66.29	0.00	300	0 PEAK																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1 10520.00	45.08	68.30	-23.22	58.27	37.46	15.64	66.29	0.00	100	0 PEAK																																																																						