



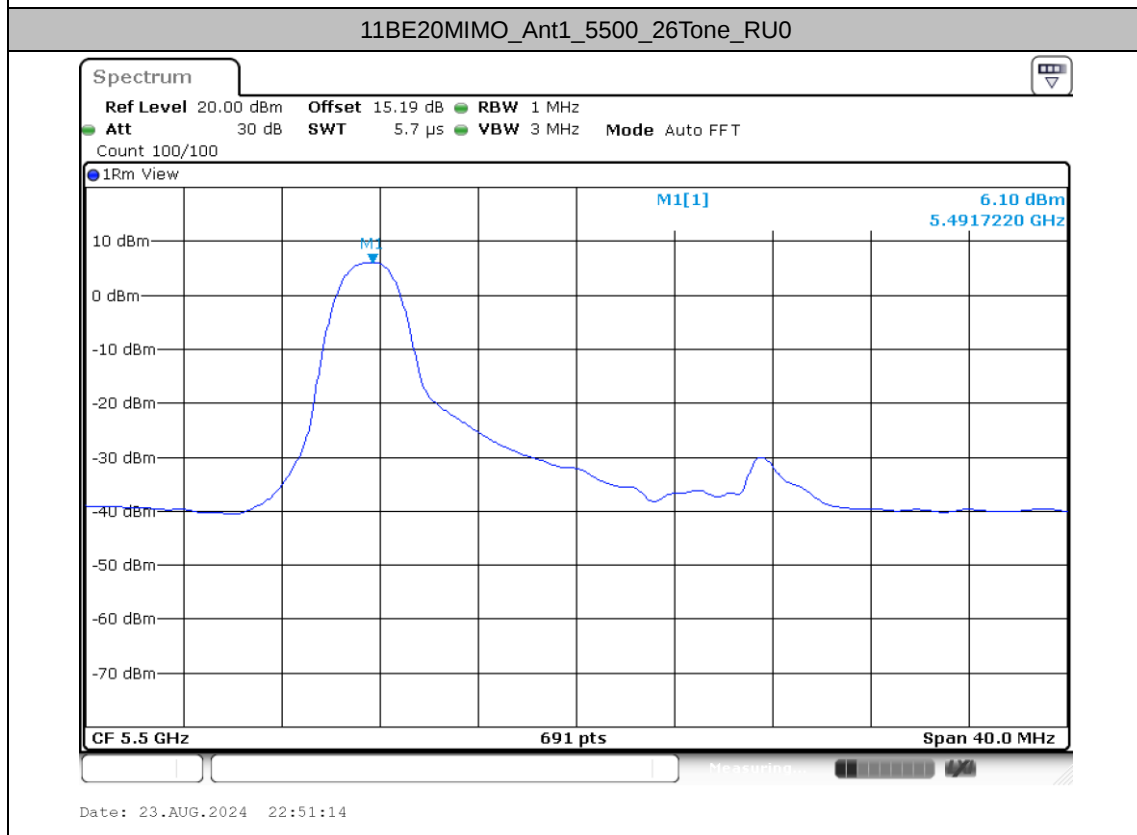


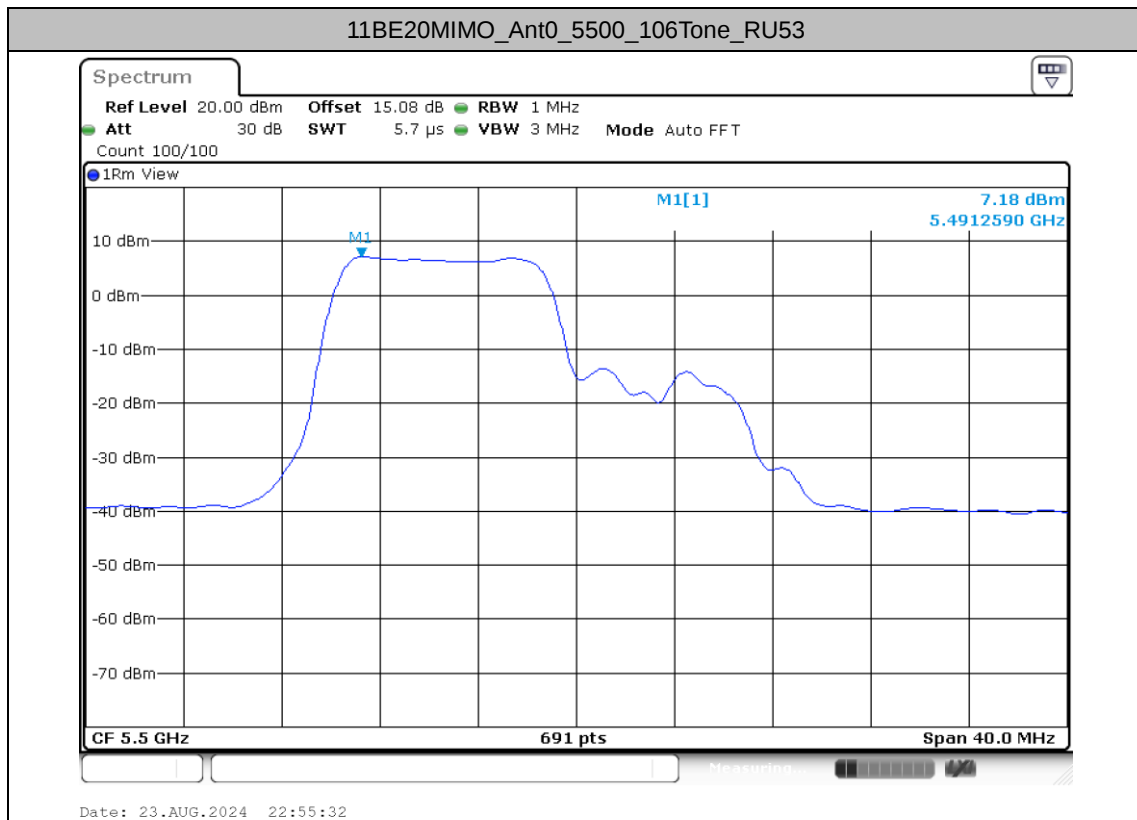

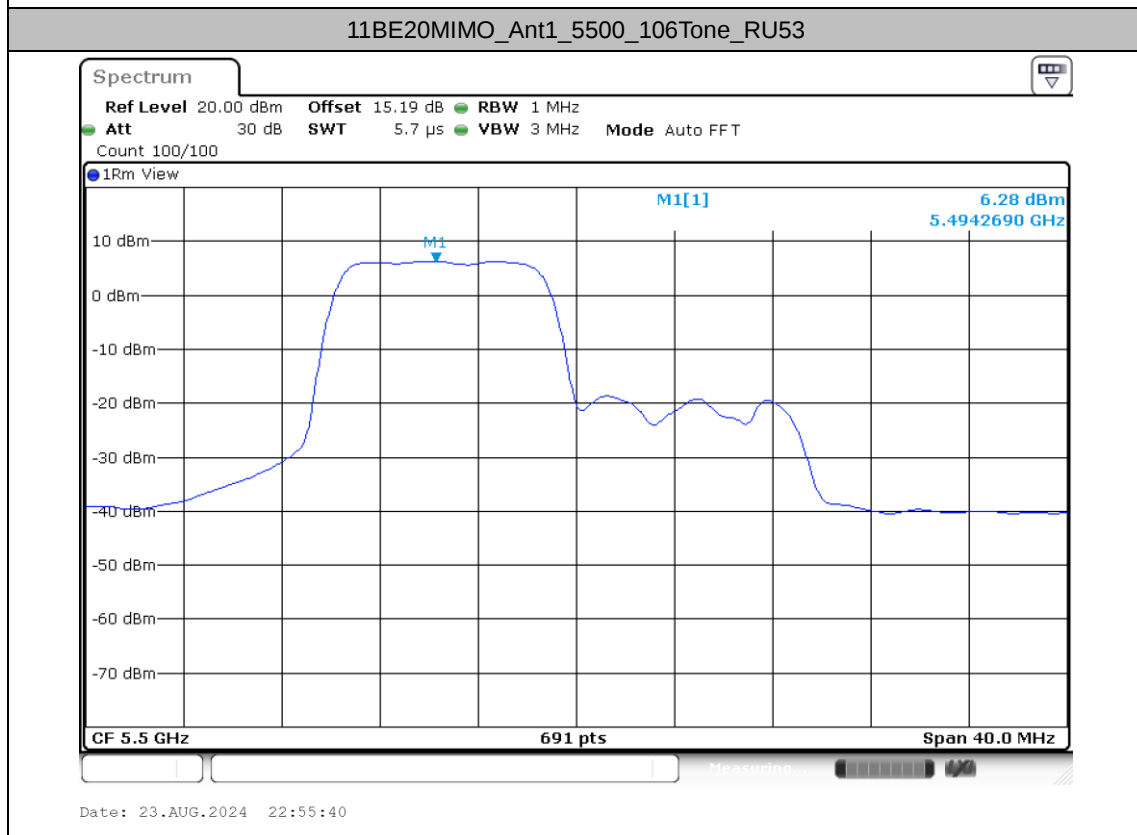


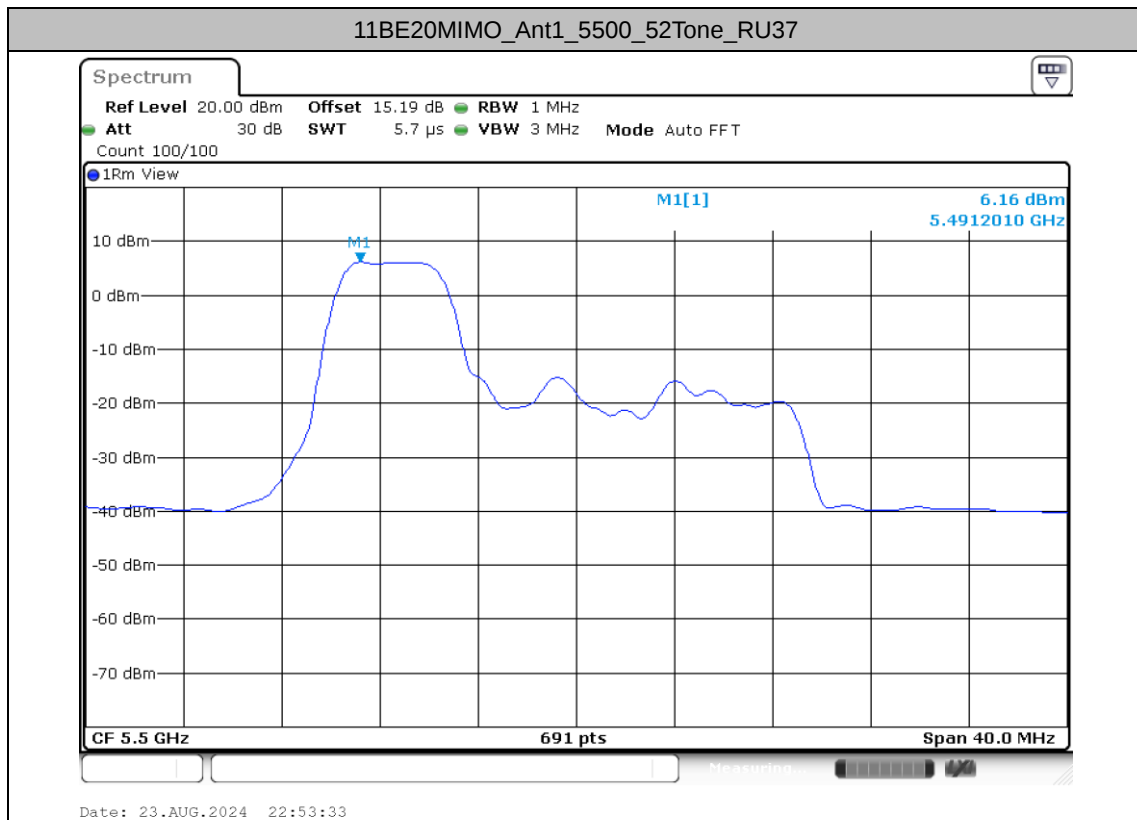

11BE20MIMO_total_5500_26Tone_RU0

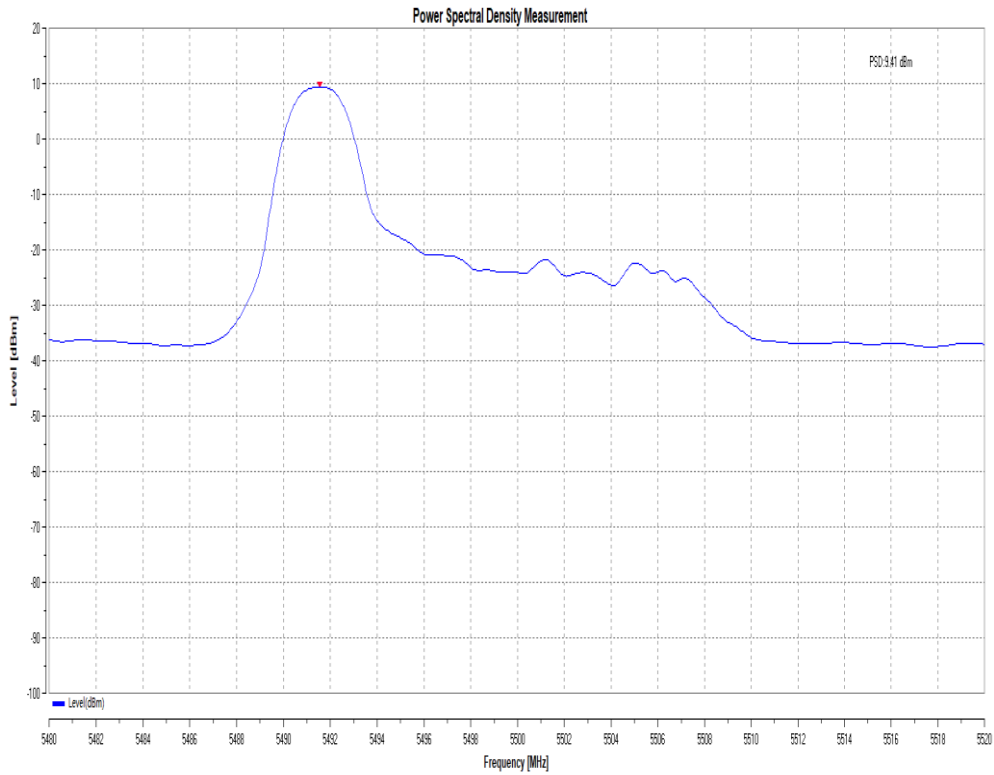


11BE20MIMO_total_5500_52Tone_RU37

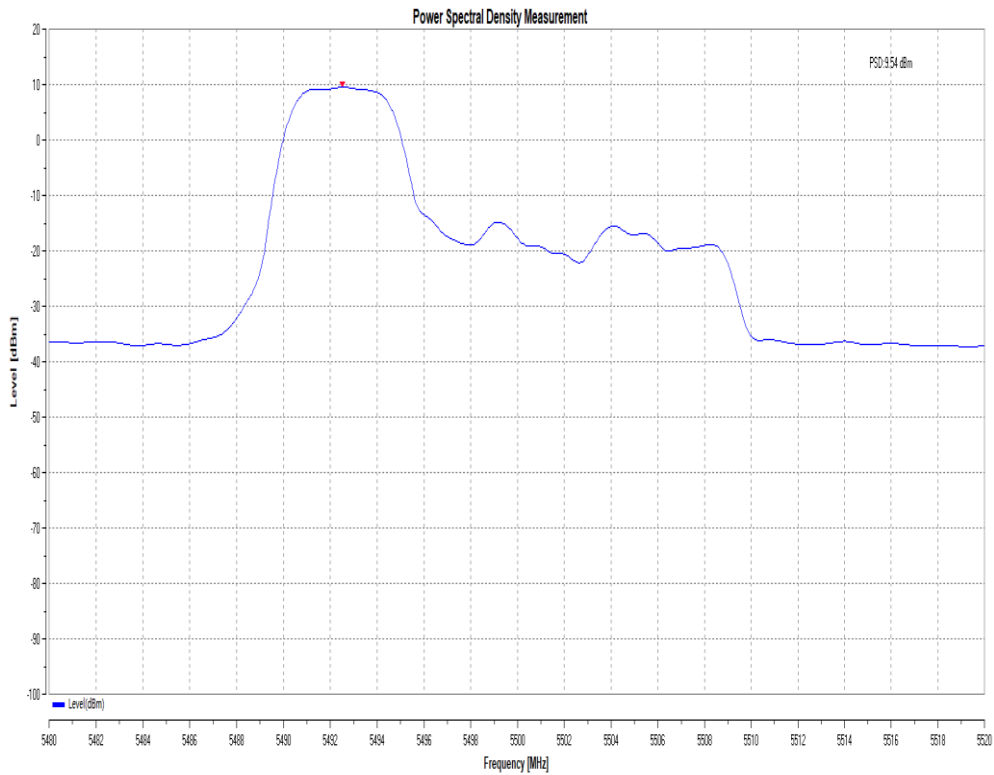






11BE20MIMO_total_5500_106Tone_RU53


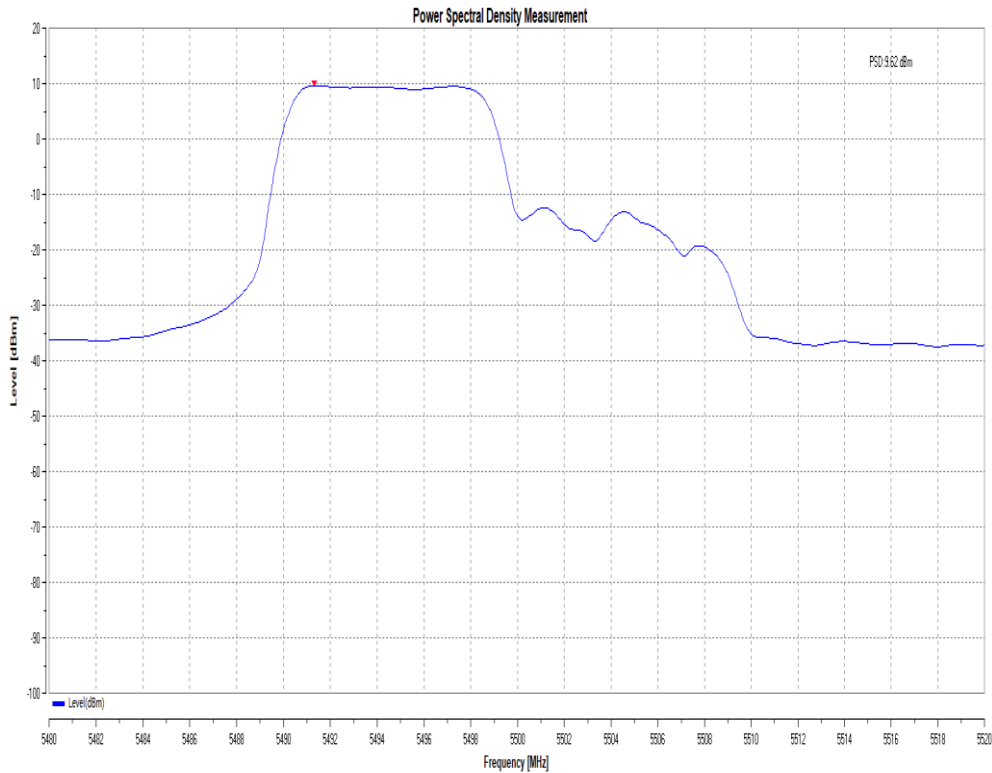



11BE20MIMO_Ant0_5700_26Tone_RU8

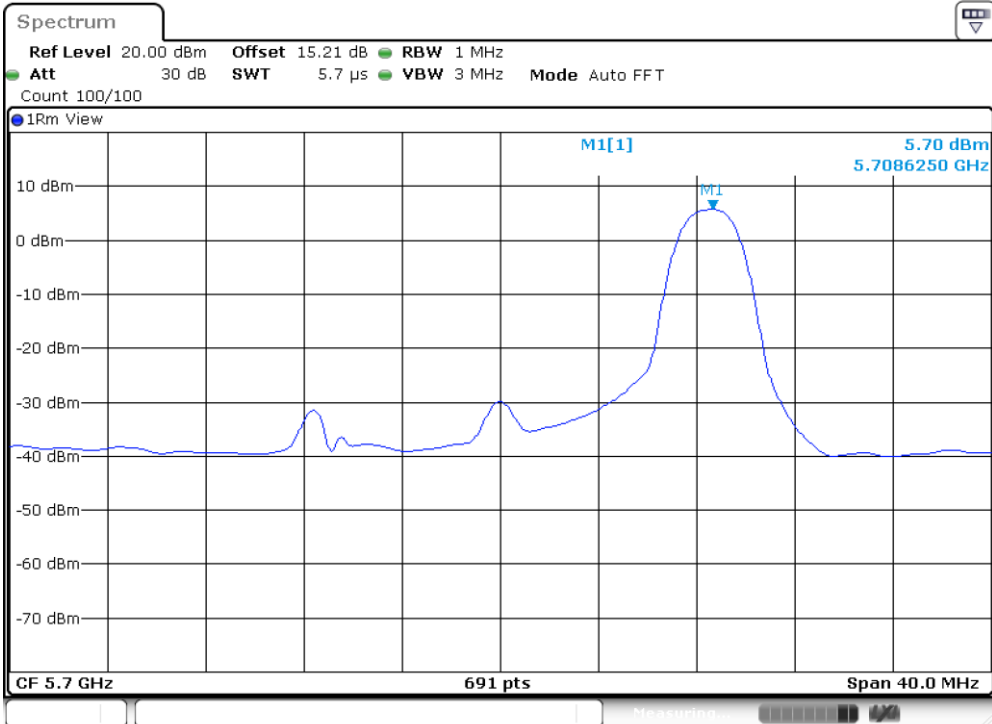

Date: 23.AUG.2024 22:58:13

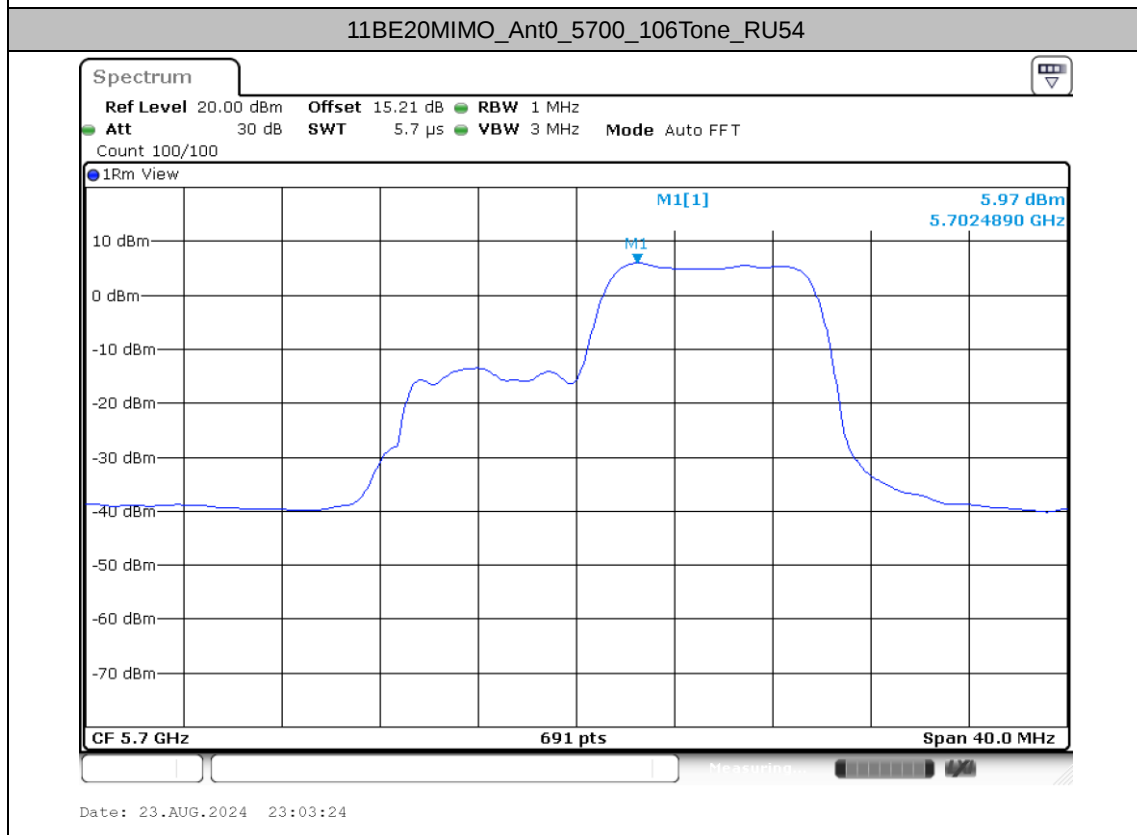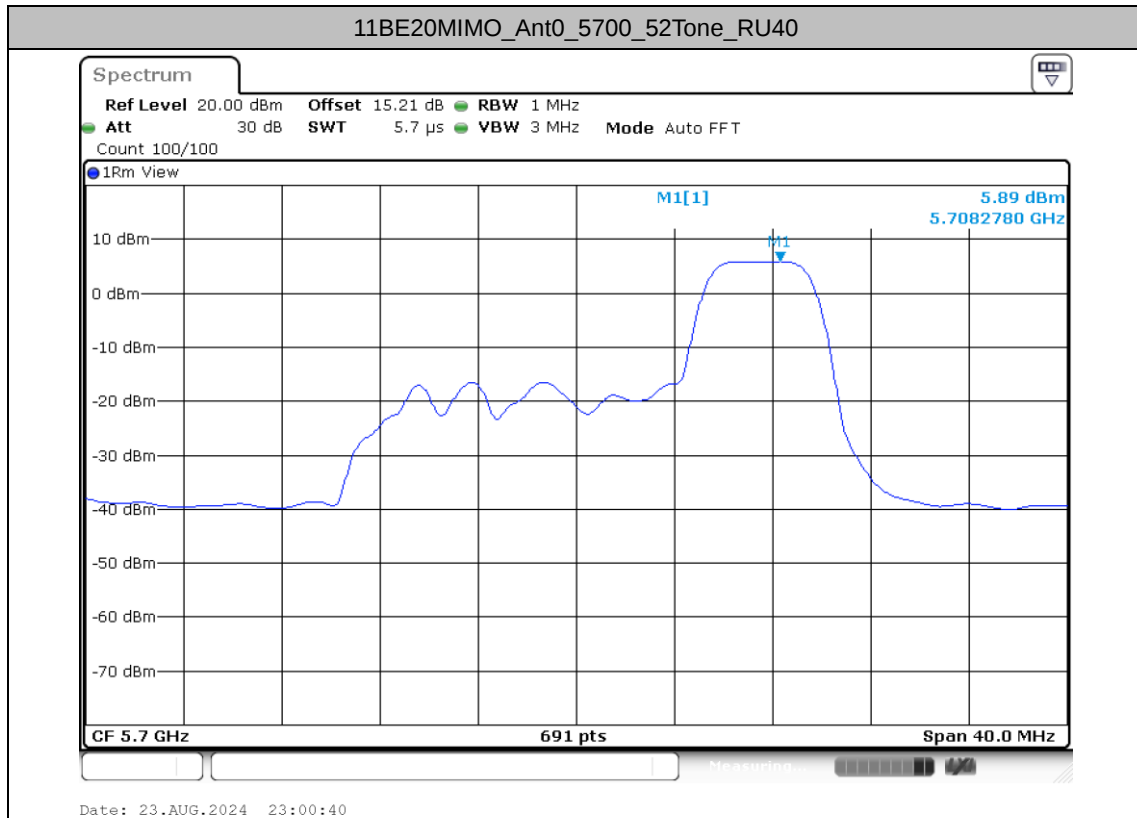


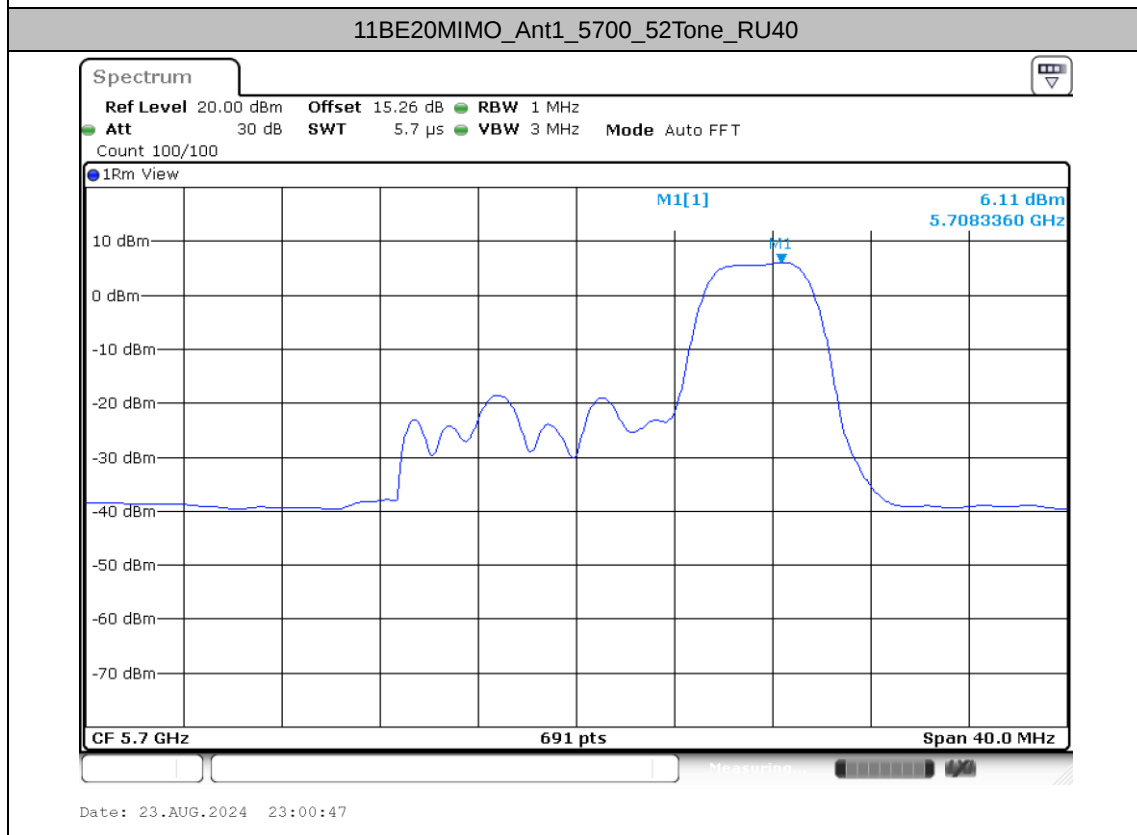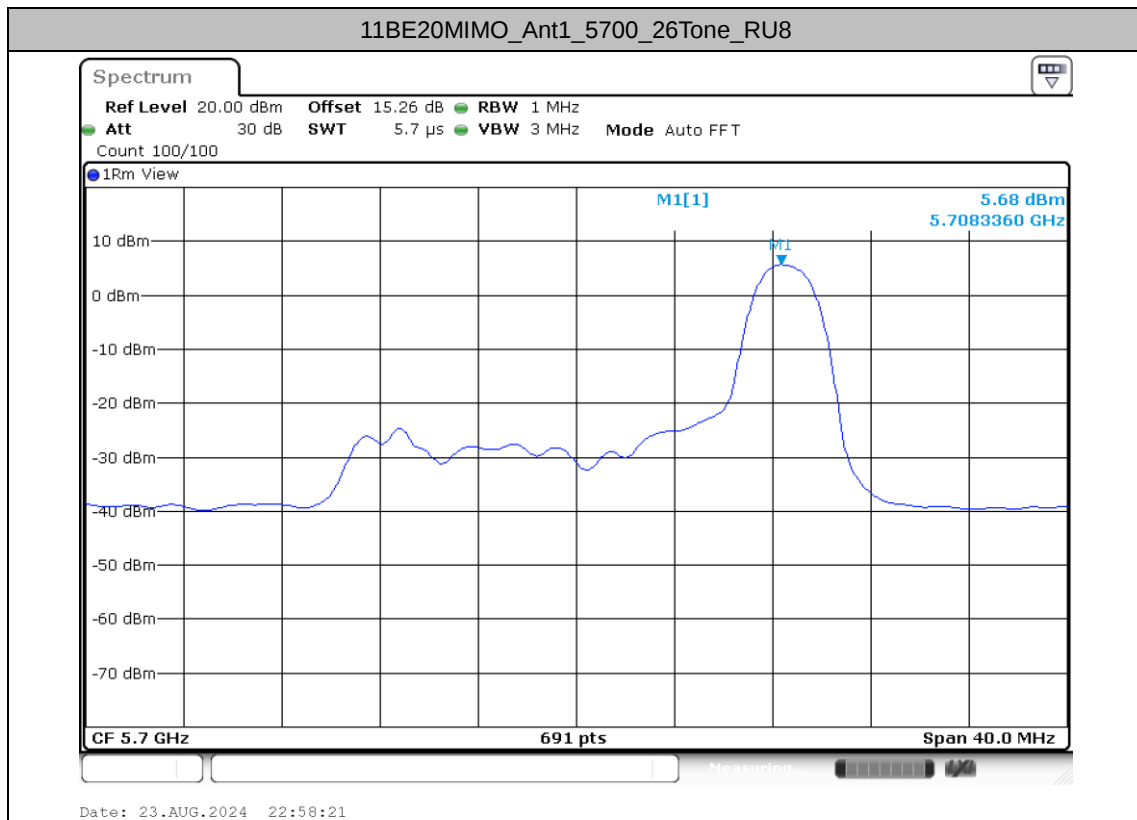

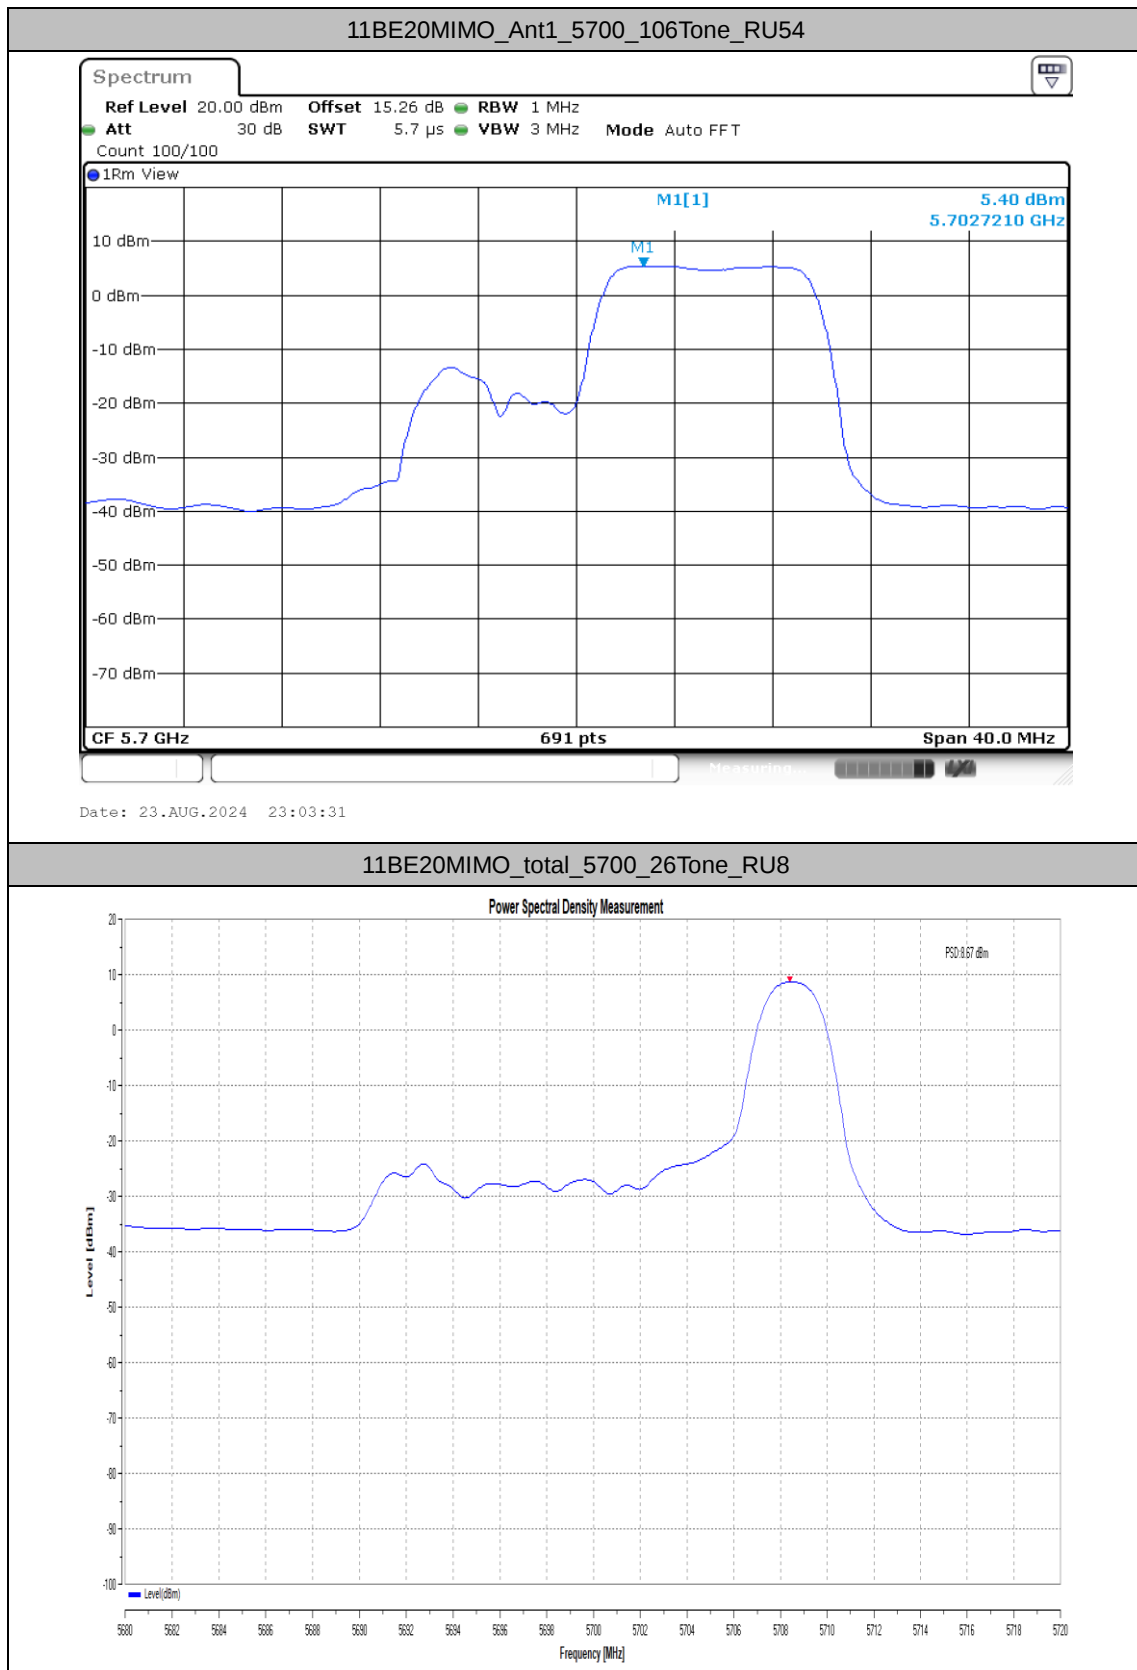








11BE20MIMO_total_5700_52Tone_RU40


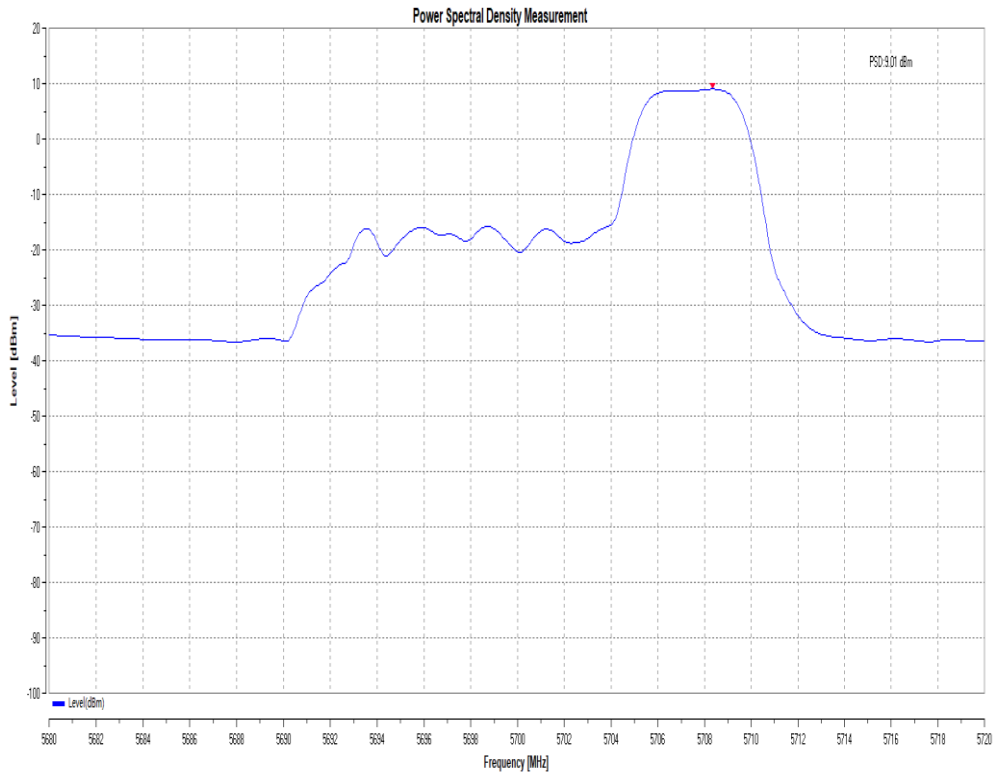




11BE20MIMO_total_5700_106Tone_RU54


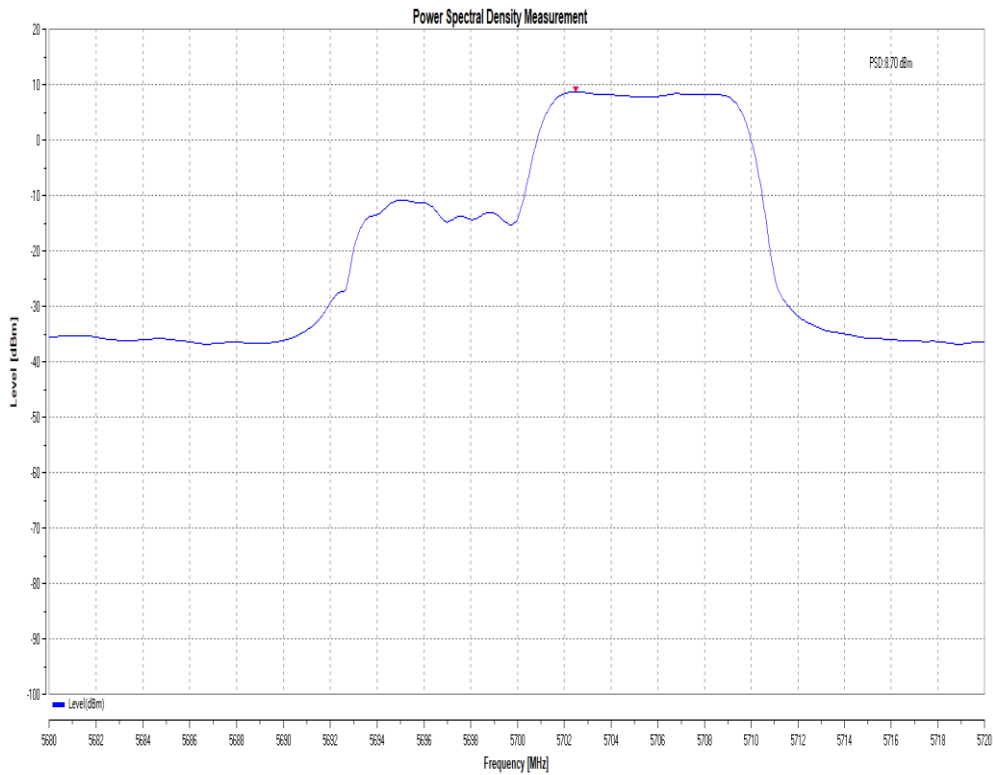


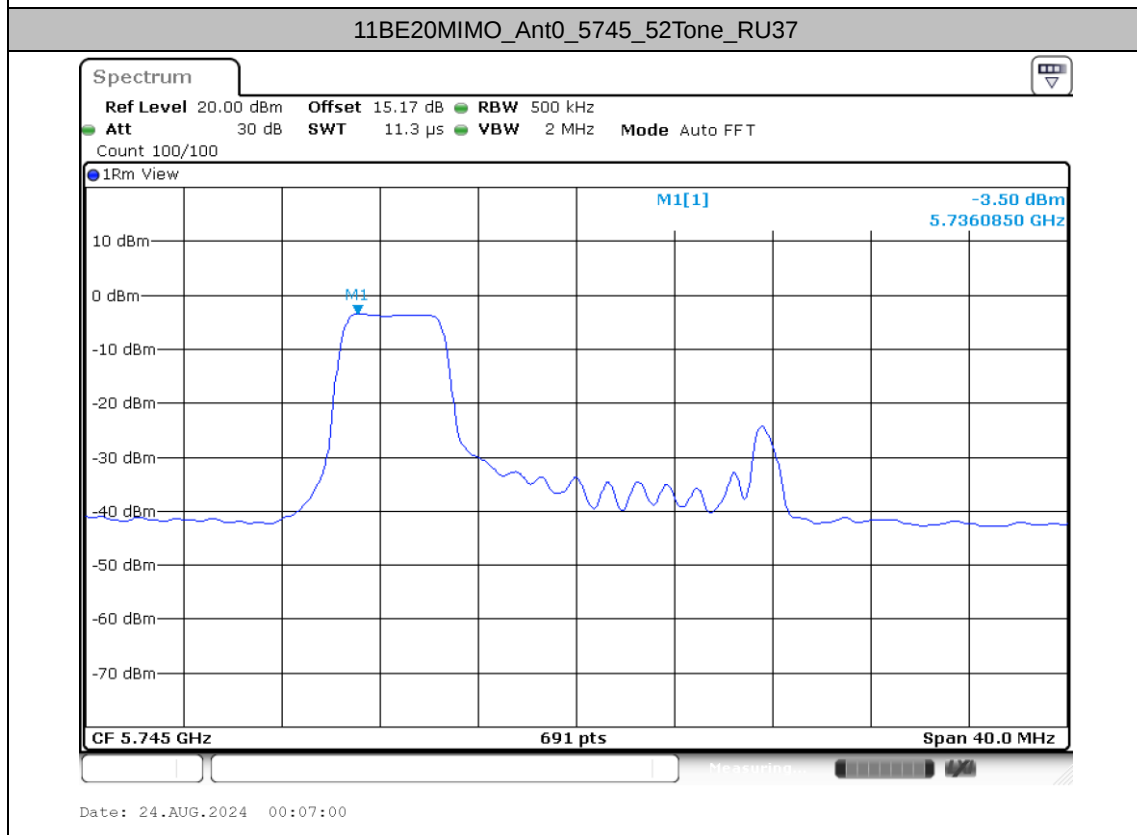
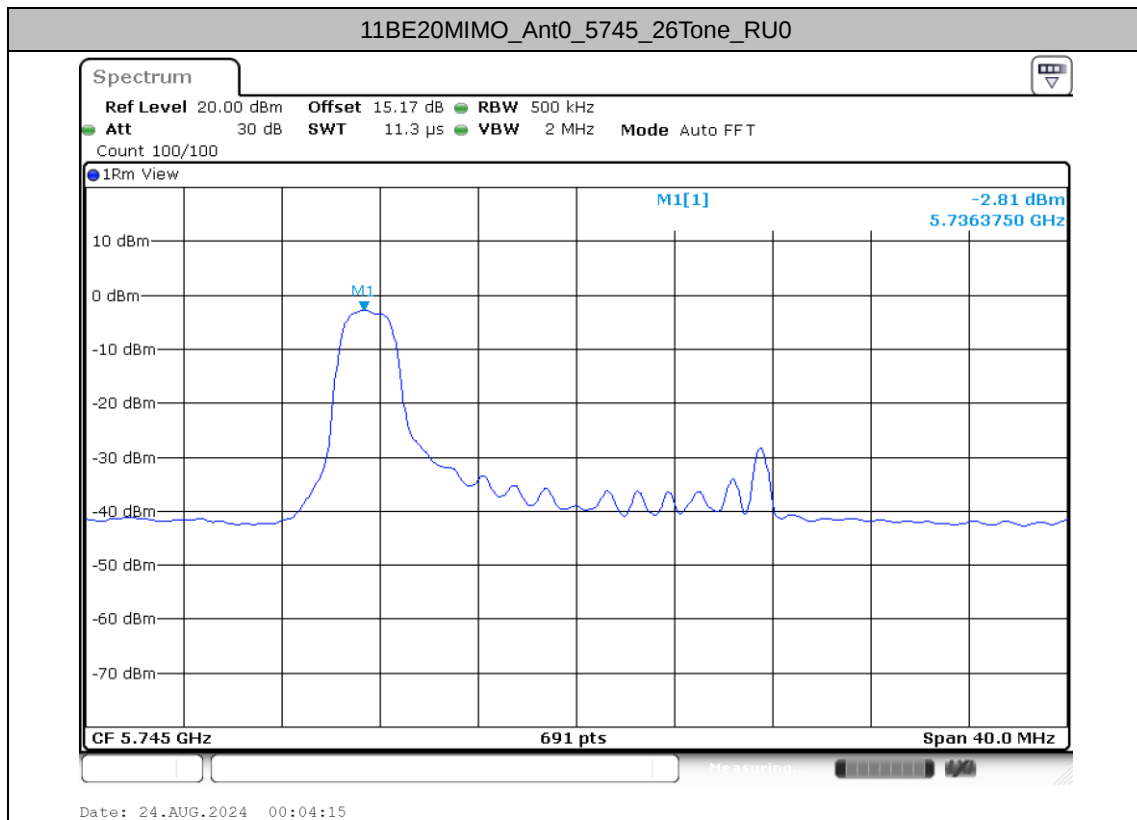


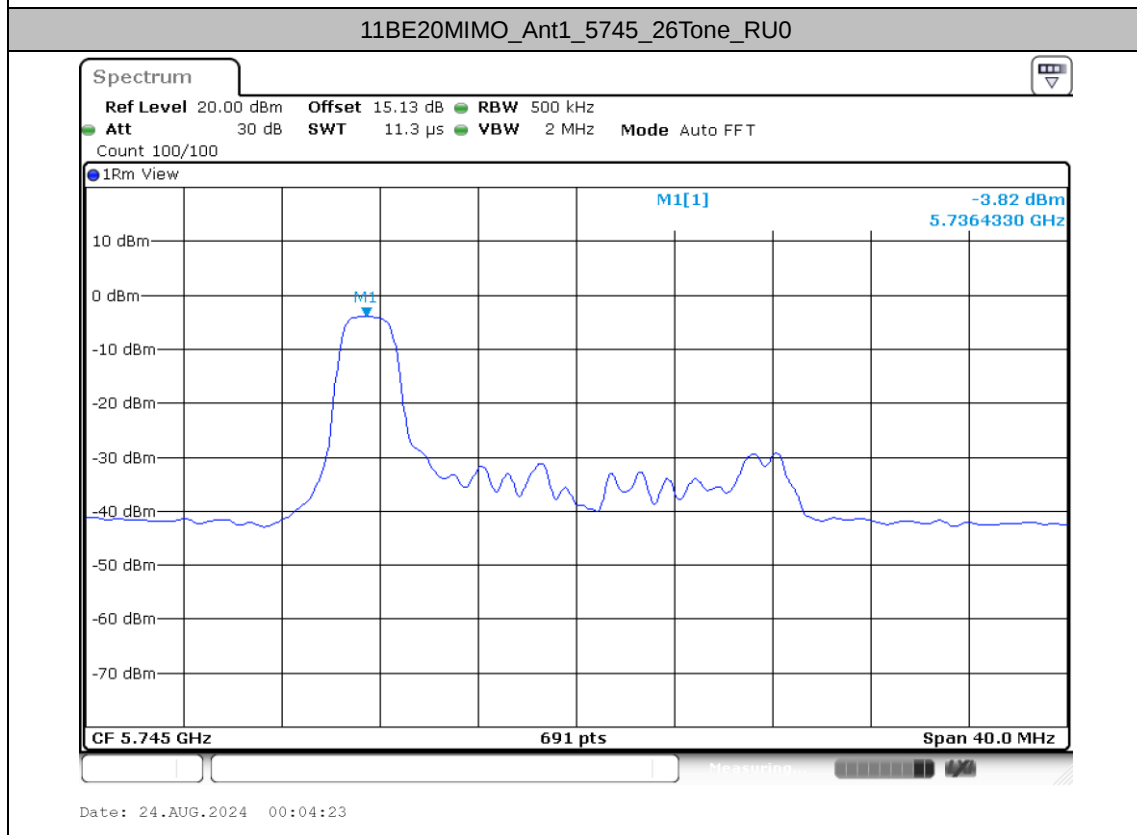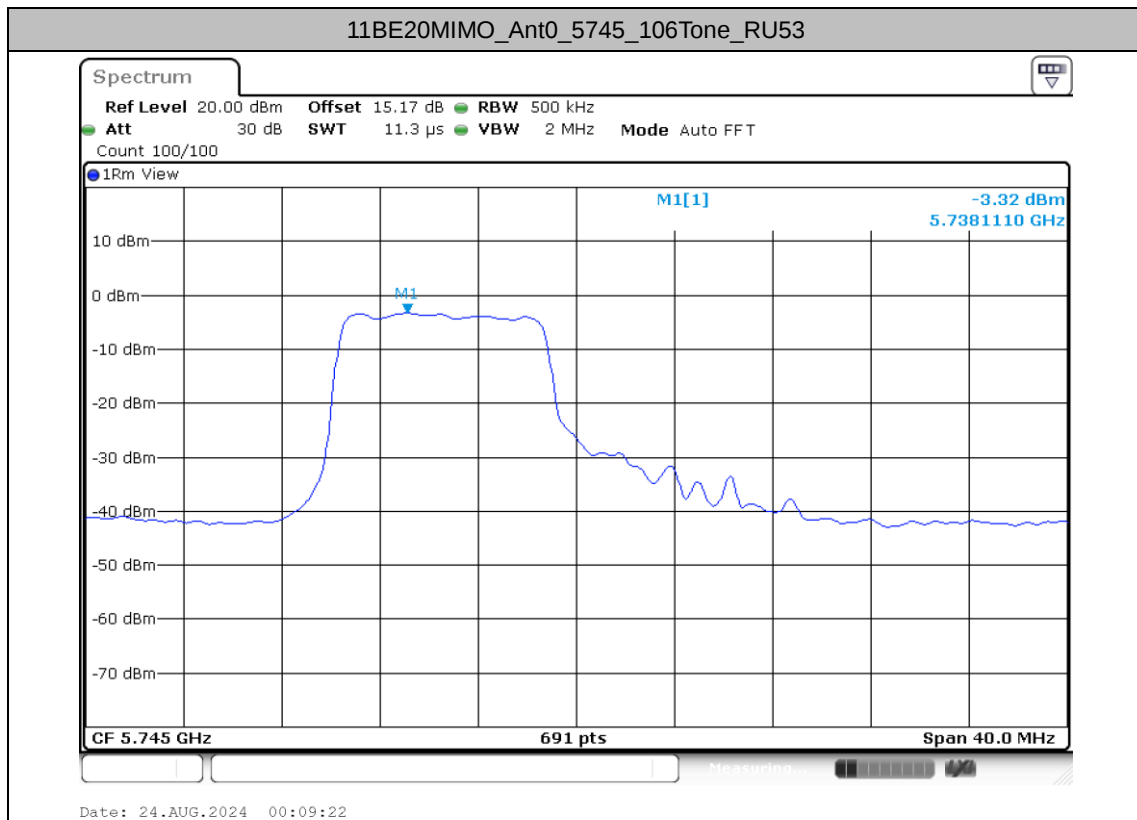

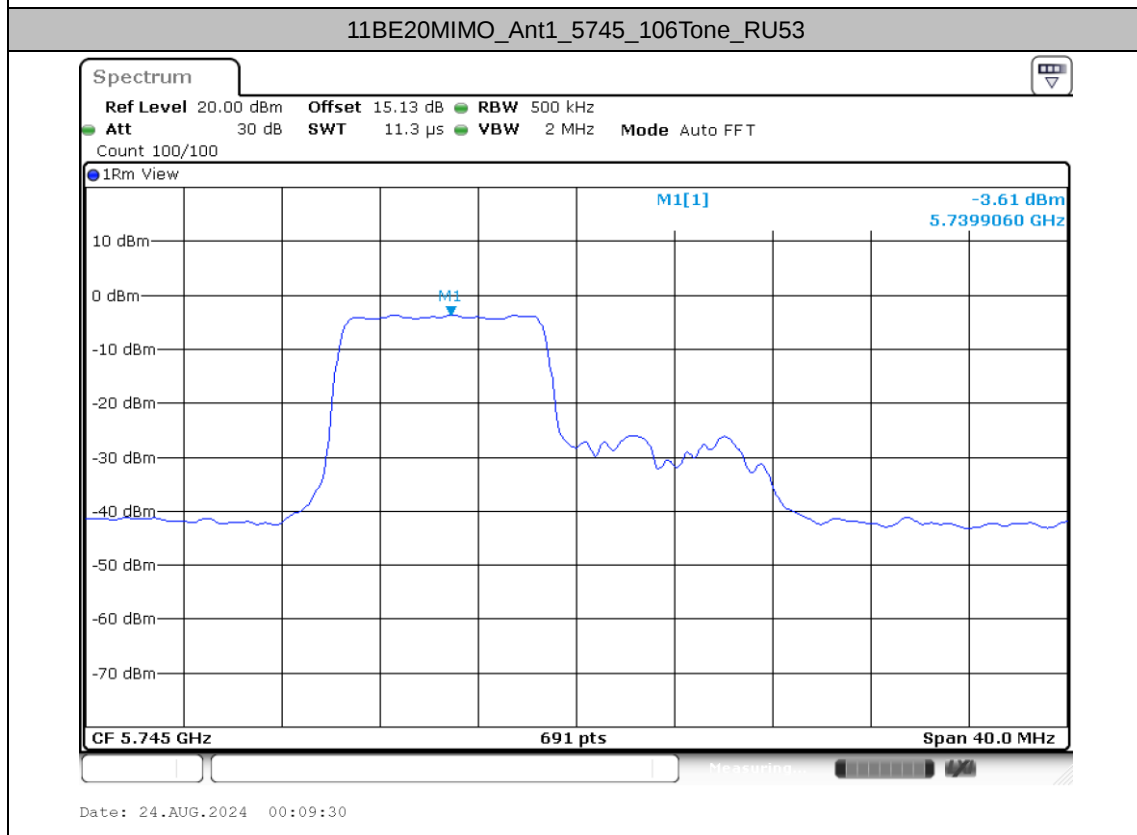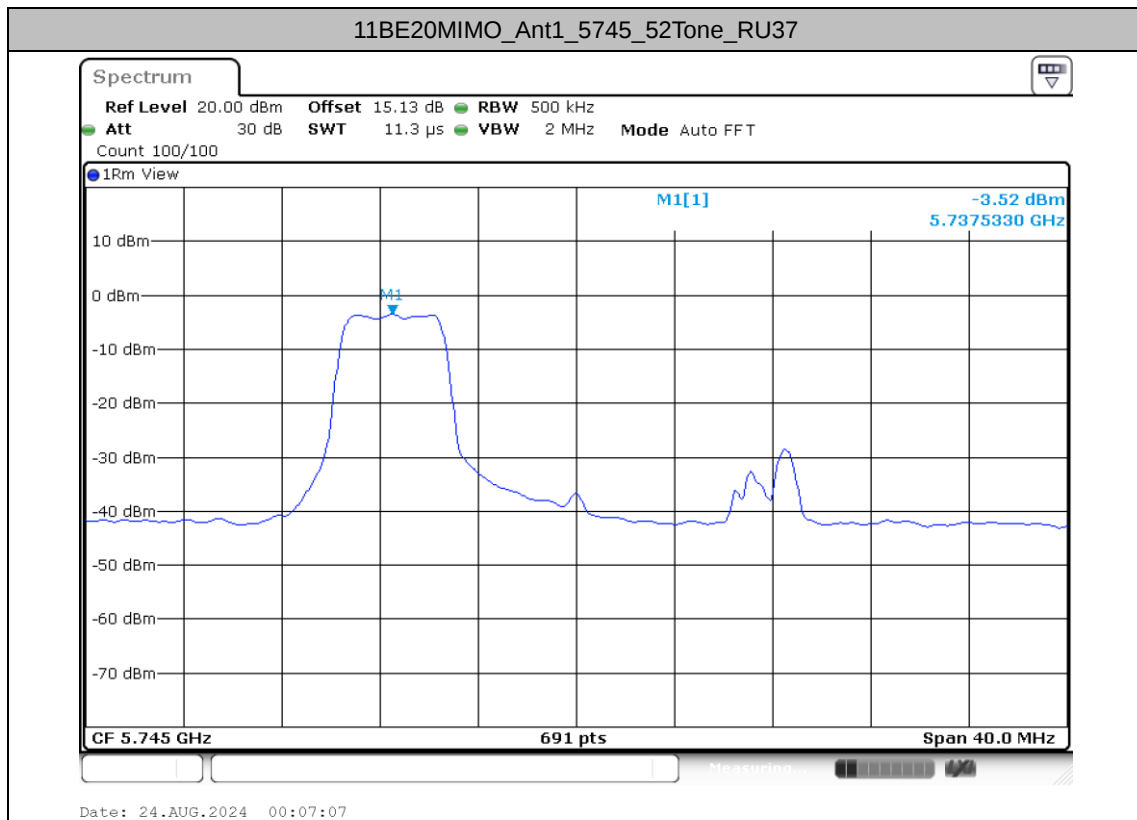

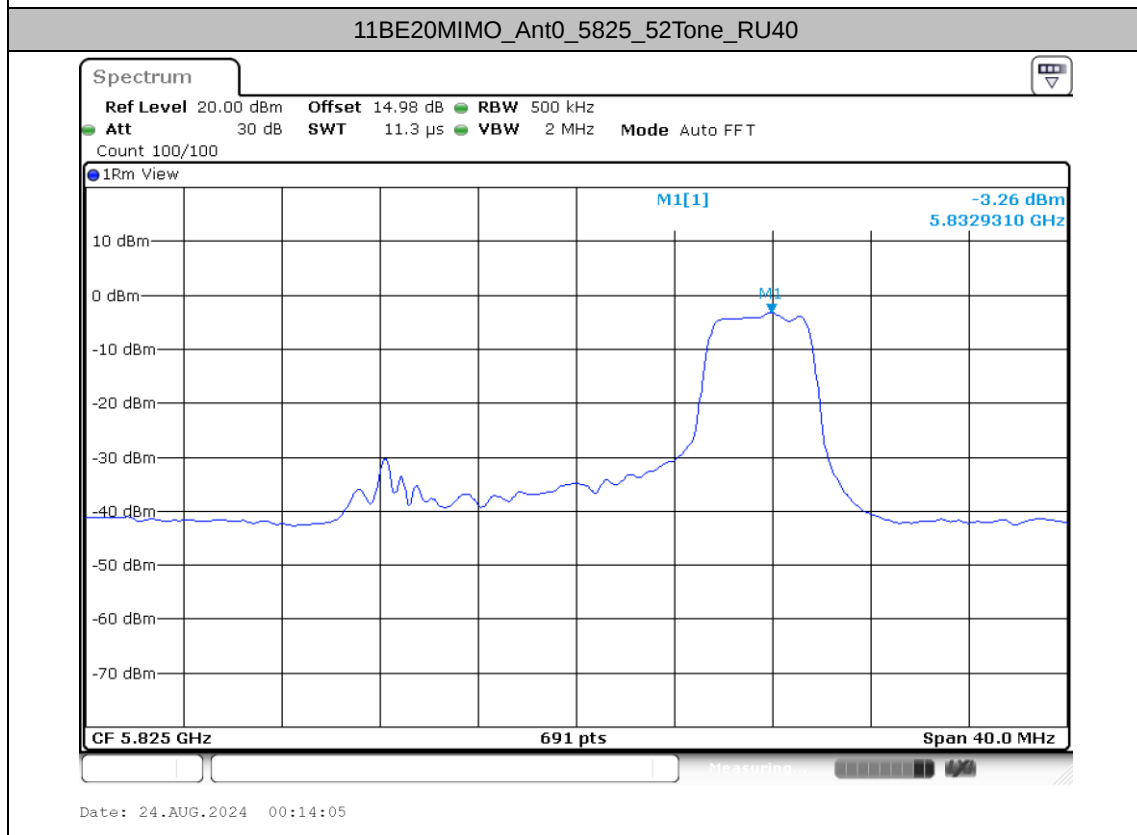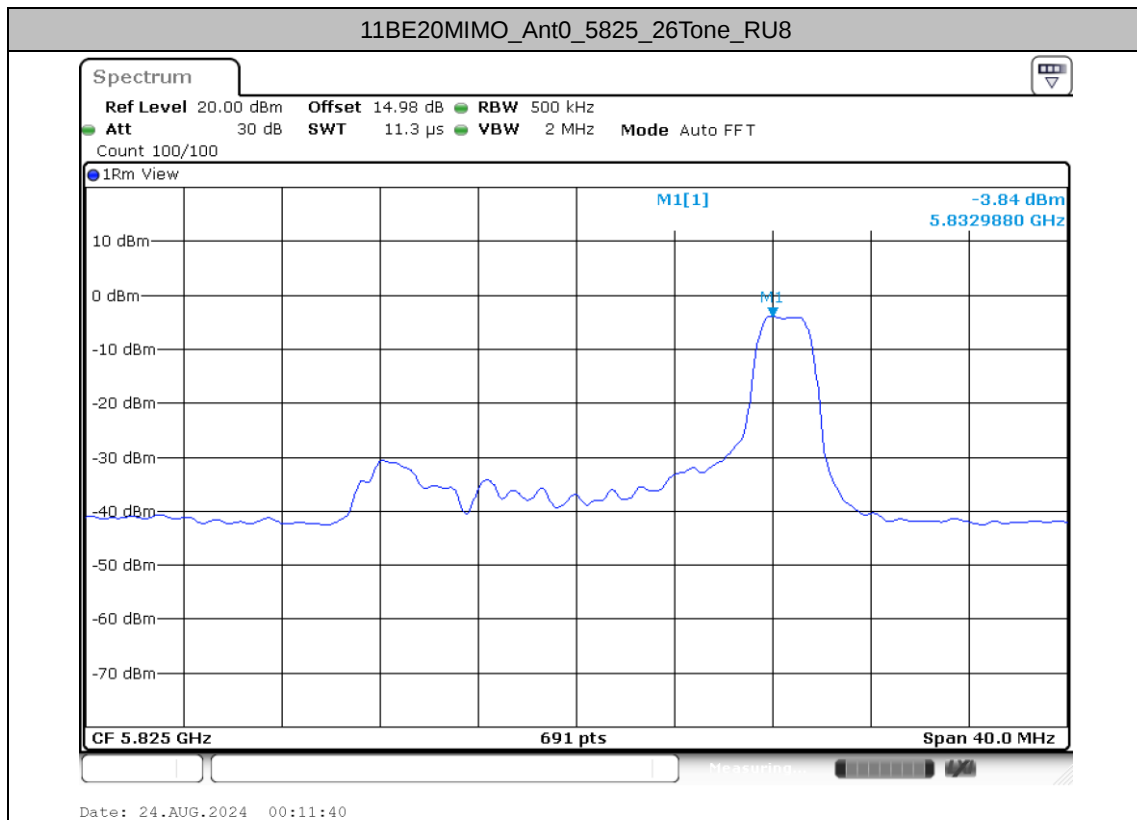


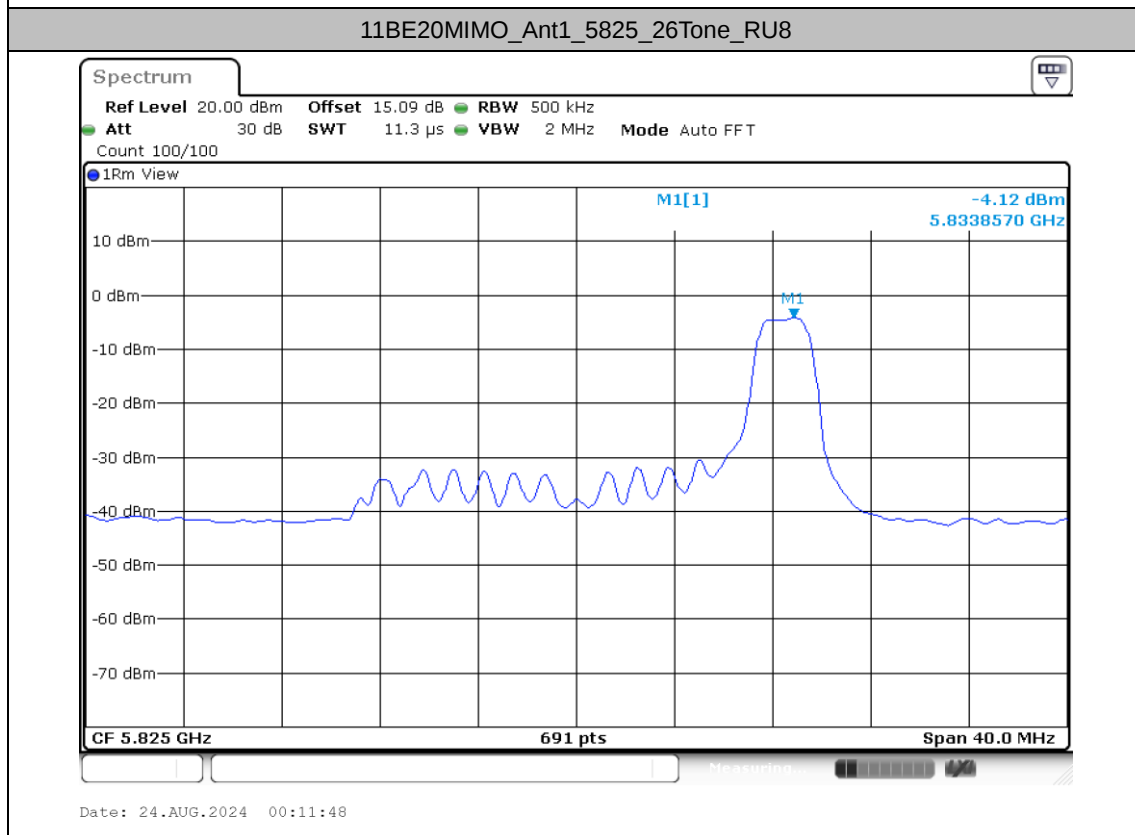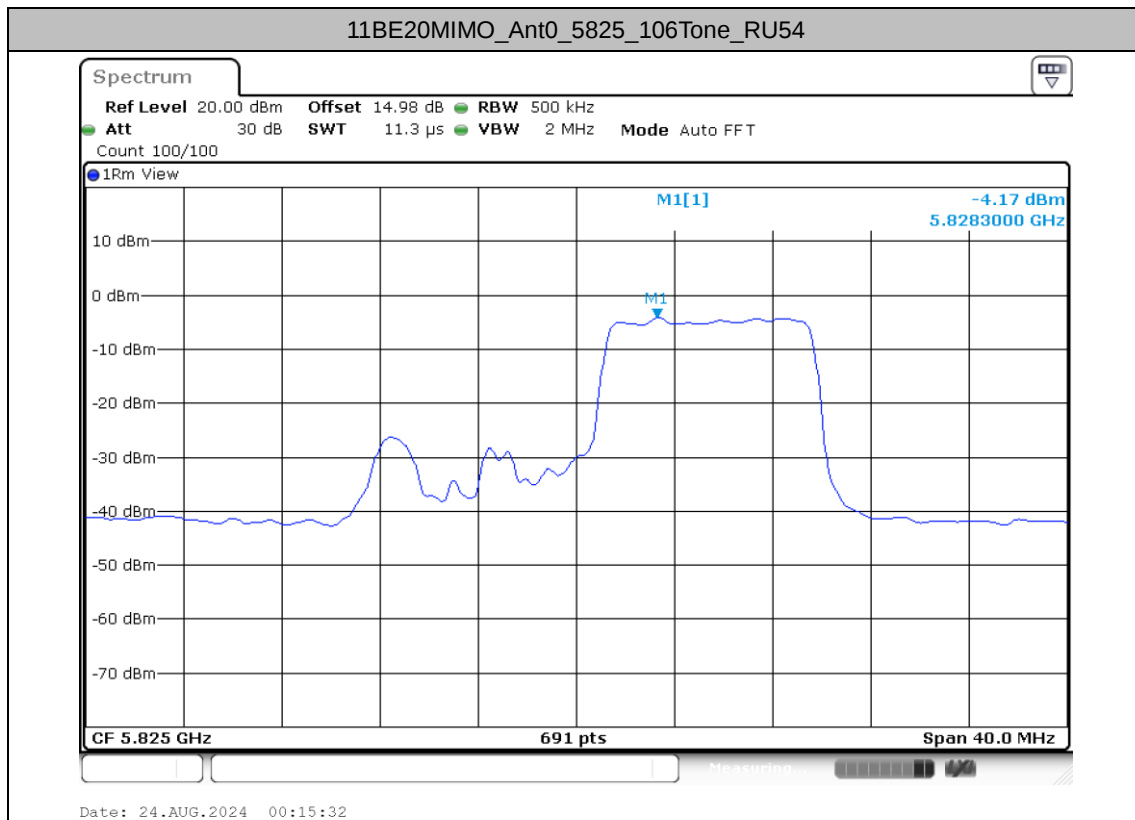

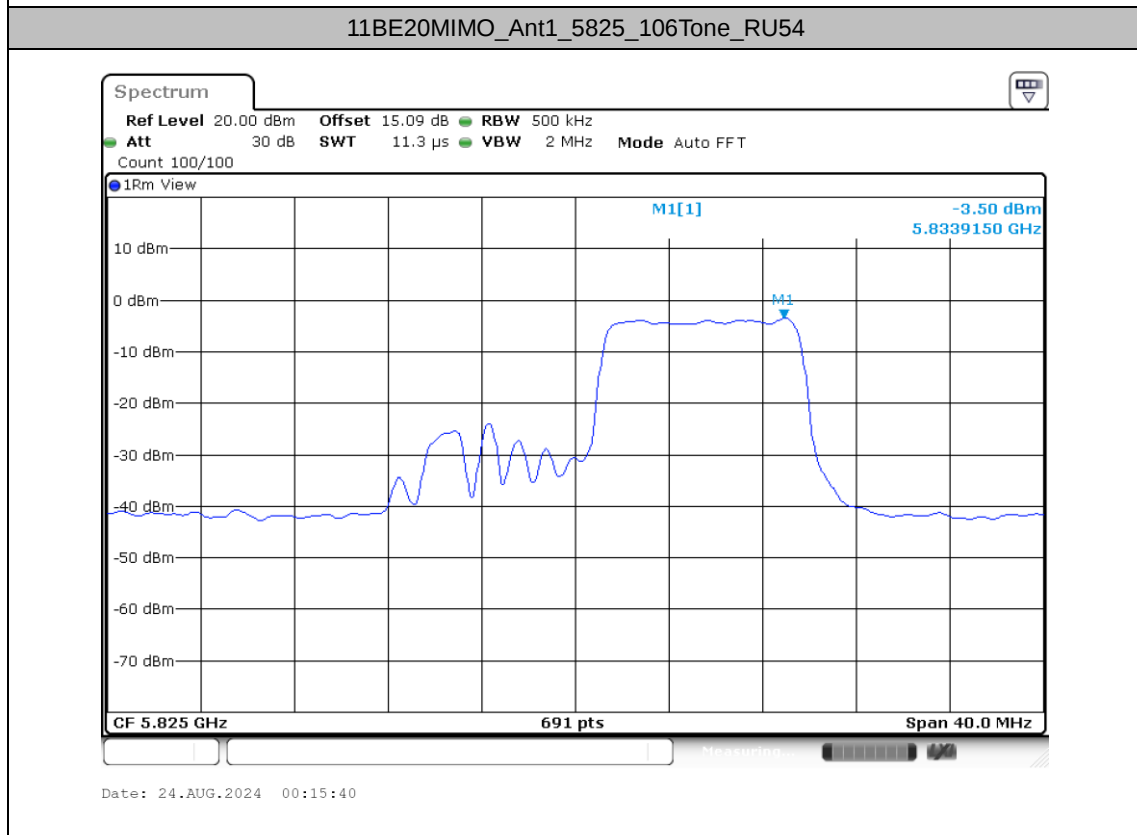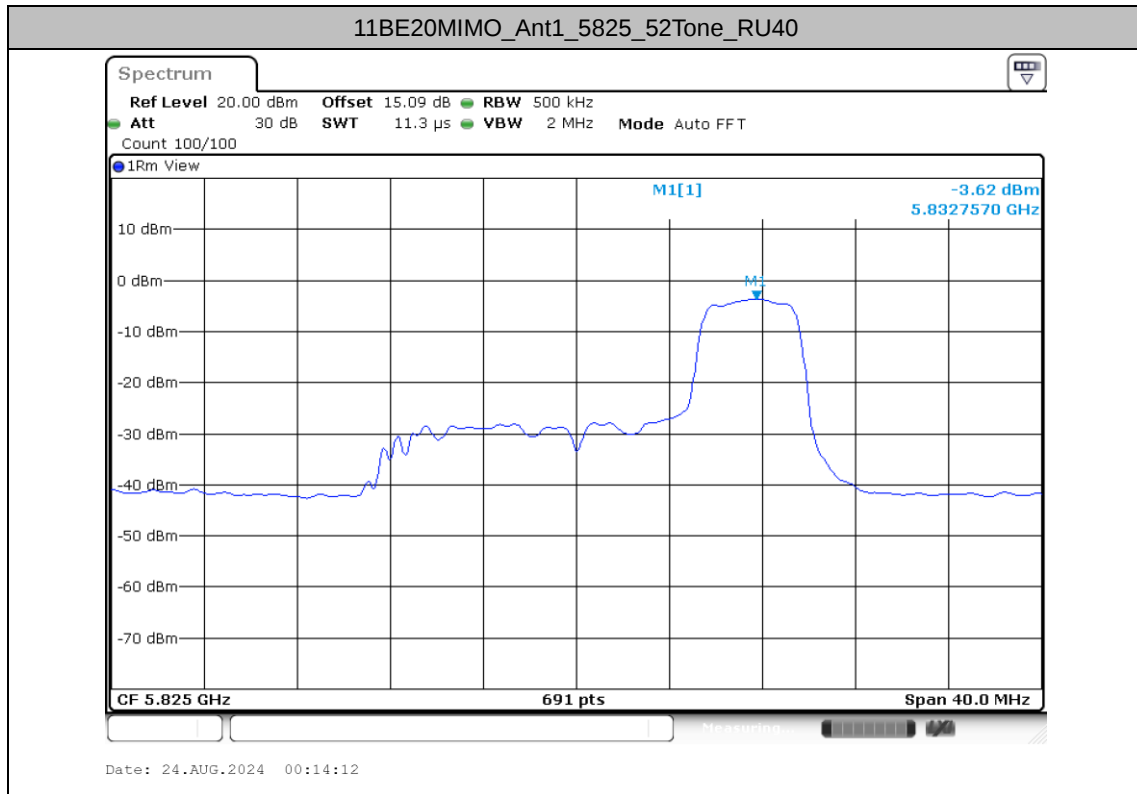




Appendix B. AC Conducted Emission Test Results

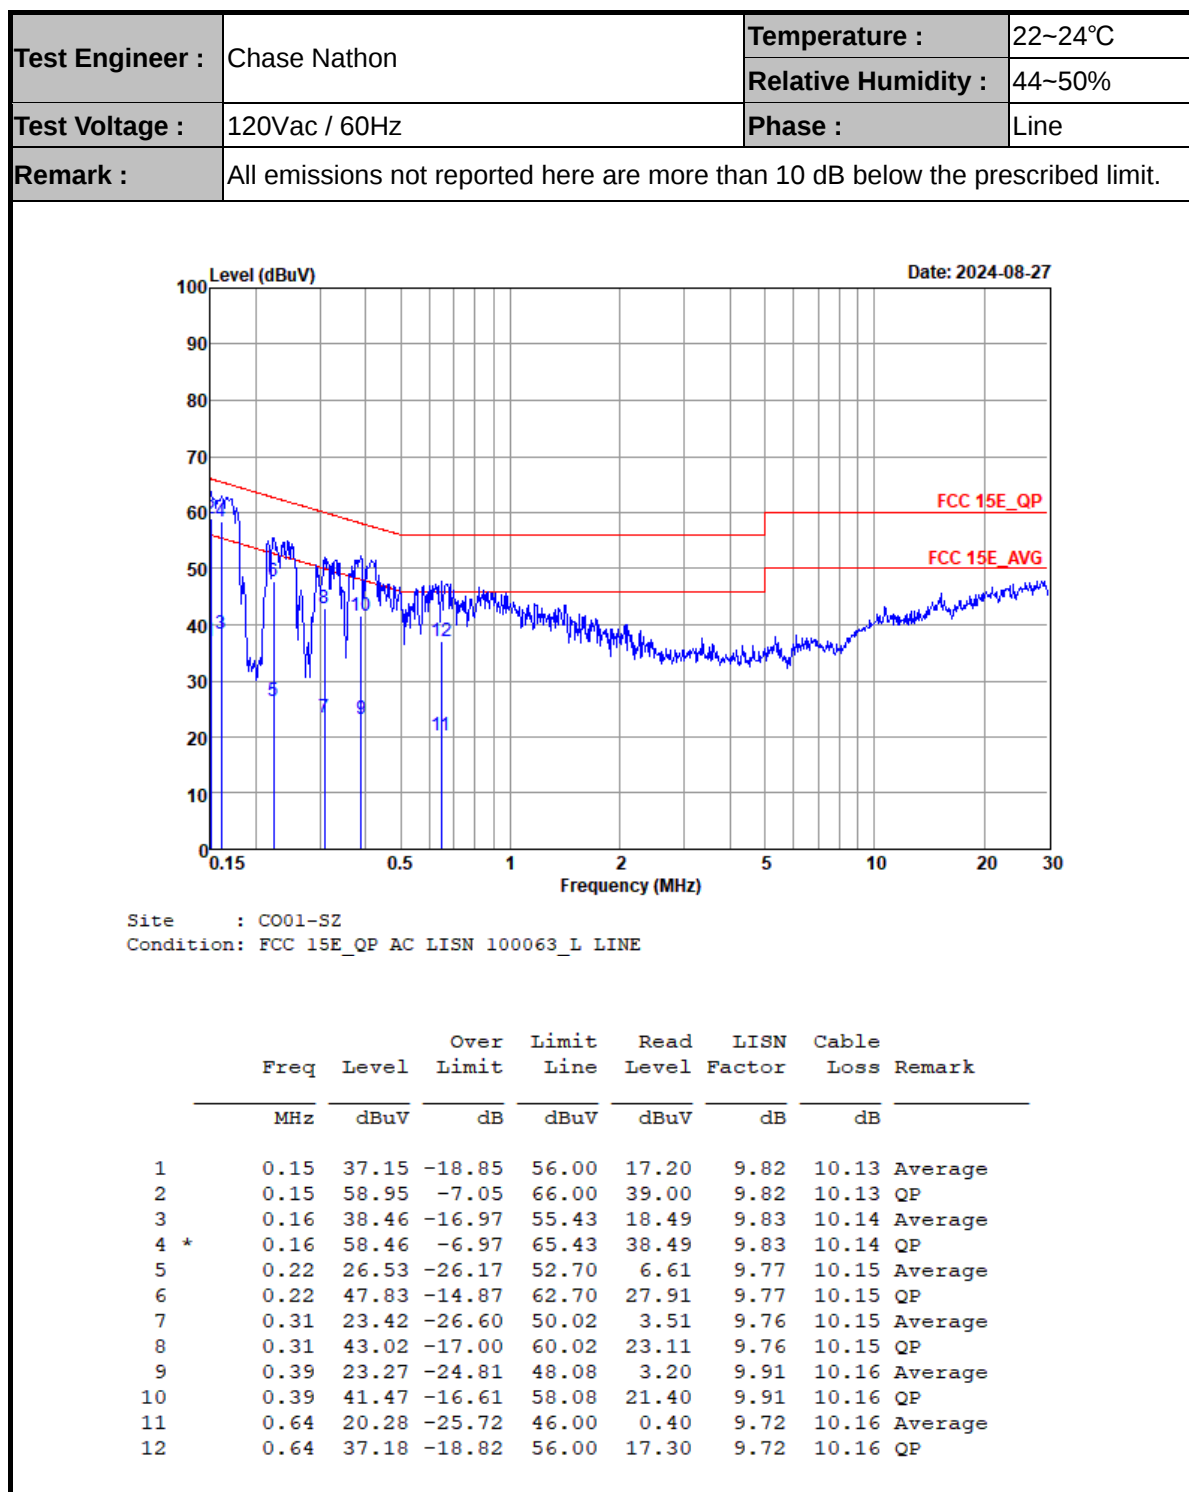



Test Engineer :	Chase Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

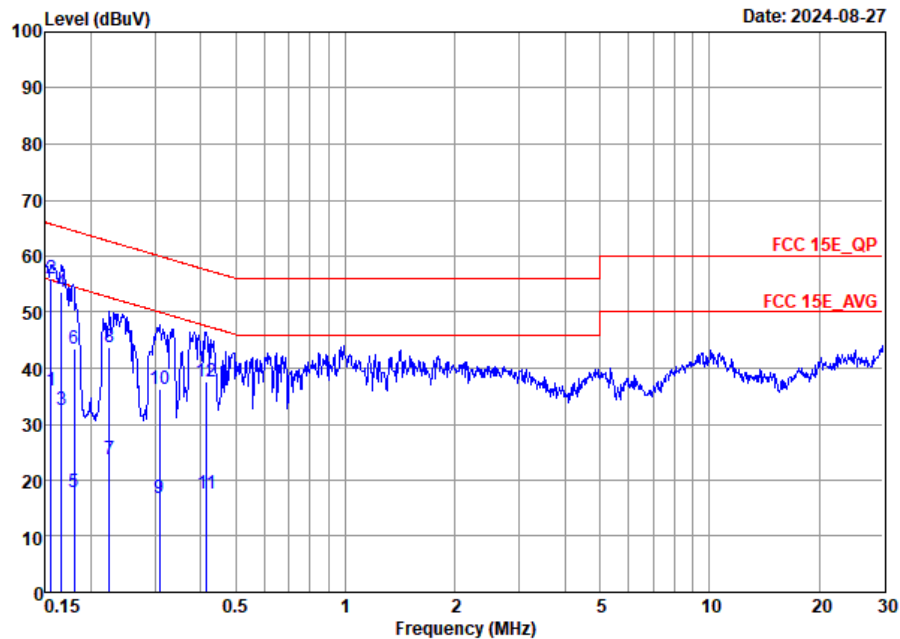

Site : CO01-SZ
Condition: FCC 15E QP AC LISN 100063 N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.16	36.00	-19.69	55.69	15.99	9.87	10.14	Average
2 *	0.16	55.90	-9.79	65.69	35.89	9.87	10.14	QP
3	0.17	32.62	-22.54	55.16	12.60	9.88	10.14	Average
4	0.17	53.52	-11.64	65.16	33.50	9.88	10.14	QP
5	0.18	17.77	-36.73	54.50	-2.20	9.83	10.14	Average
6	0.18	43.37	-21.13	64.50	23.40	9.83	10.14	QP
7	0.22	23.69	-28.97	52.66	3.80	9.74	10.15	Average
8	0.22	43.79	-18.87	62.66	23.90	9.74	10.15	QP
9	0.31	16.72	-33.30	50.02	-3.19	9.76	10.15	Average
10	0.31	36.22	-23.80	60.02	16.31	9.76	10.15	QP
11	0.41	17.58	-29.97	47.55	-2.30	9.72	10.16	Average
12	0.41	37.48	-20.07	57.55	17.60	9.72	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jia Kuang	Relative Humidity :	50%
		Temperature :	20-22°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	CDD 9+15	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	CDD 9+15	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	CDD 9+15	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	CDD 9+15	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	CDD 9+15	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	CDD 9+15	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	CDD 9+15	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	CDD 9+15	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	CDD 9+15	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	36	5180	MCS0	Full	-
Mode 11	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	44	5220	MCS0	Full	-
Mode 12	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	48	5240	MCS0	Full	-
Mode 13	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT20	52	5260	MCS0	Full	-
Mode 14	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT20	60	5300	MCS0	Full	-
Mode 15	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT20	64	5320	MCS0	Full	-
Mode 16	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	100	5500	MCS0	Full	-
Mode 17	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	116	5580	MCS0	Full	-
Mode 18	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	140	5700	MCS0	Full	-
Mode 19	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT40	38	5190	MCS0	Full	-
Mode 20	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT40	46	5230	MCS0	Full	-
Mode 21	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT40	54	5270	MCS0	Full	-
Mode 22	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT40	62	5310	MCS0	Full	-
Mode 23	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT40	102	5510	MCS0	Full	-
Mode 24	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT40	134	5670	MCS0	Full	-
Mode 25	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT80	42	5210	MCS0	Full	-
Mode 26	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT80	58	5290	MCS0	Full	-
Mode 27	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT80	106	5530	MCS0	Full	-
Mode 28	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT80	122	5610	MCS0	Full	-
Mode 29	U-NII-2A	5.15-5.35	CDD 9+15	802.11be EHT160	50	5250	MCS0	Full	-
Mode 30	U-NII-2C	5.15-5.35	CDD 9+15	802.11be EHT160	114	5570	MCS0	Full	-
Mode 31	U-NII-3	5.725-5.85	CDD 9+15	802.11a	149	5745	6Mbps	-	-
Mode 32	U-NII-3	5.725-5.85	CDD 9+15	802.11a	157	5785	6Mbps	-	-
Mode 33	U-NII-3	5.725-5.85	CDD 9+15	802.11a	165	5825	6Mbps	-	-
Mode 34	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	149	5745	MCS0	Full	-
Mode 35	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	157	5785	MCS0	Full	-
Mode 36	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	165	5825	MCS0	Full	-
Mode 37	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT40	151	5755	MCS0	Full	-
Mode 38	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT40	159	5795	MCS0	Full	-



Mode 39	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT80	155	5775	MCS0	Full	-
Mode 40	U-NII-2C	5.47-5.85	CDD 9+15	802.11a	144	5720	6Mbps	-	-
Mode 41	U-NII-2C	5.47-5.85	CDD 9+15	802.11be EHT20	144	5720	MCS0	Full	-
Mode 42	U-NII-2C	5.47-5.85	CDD 9+15	802.11be EHT40	142	5710	MCS0	Full	-
Mode 43	U-NII-2C	5.47-5.85	CDD 9+15	802.11be EHT80	138	5690	MCS0	Full	-
Mode 44	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	36	5180	MCS0	Single RU	RU 26/0
Mode 45	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	36	5180	MCS0	Single RU	RU 52/37
Mode 46	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	36	5180	MCS0	Single RU	RU 106/53
Mode 47	U-NII-2A	5.15-5.25	CDD 9+15	802.11be EHT20	64	5320	MCS0	Single RU	RU 26/8
Mode 48	U-NII-2A	5.15-5.25	CDD 9+15	802.11be EHT20	64	5320	MCS0	Single RU	RU 52/40
Mode 49	U-NII-2A	5.15-5.25	CDD 9+15	802.11be EHT20	64	5320	MCS0	Single RU	RU 106/54
Mode 50	U-NII-2C	5.25-5.35	CDD 9+15	802.11be EHT20	100	5500	MCS0	Single RU	RU 26/0
Mode 51	U-NII-2C	5.25-5.35	CDD 9+15	802.11be EHT20	100	5500	MCS0	Single RU	RU 52/37
Mode 52	U-NII-2C	5.25-5.35	CDD 9+15	802.11be EHT20	100	5500	MCS0	Single RU	RU 106/53
Mode 53	U-NII-2C	5.25-5.35	CDD 9+15	802.11be EHT20	140	5700	MCS0	Single RU	RU 26/8
Mode 54	U-NII-2C	5.25-5.35	CDD 9+15	802.11be EHT20	140	5700	MCS0	Single RU	RU 52/40
Mode 55	U-NII-2C	5.25-5.35	CDD 9+15	802.11be EHT20	140	5700	MCS0	Single RU	RU 106/54
Mode 56	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	149	5745	MCS0	Single RU	RU 26/0
Mode 57	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	149	5745	MCS0	Single RU	RU 52/37
Mode 58	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	149	5745	MCS0	Single RU	RU 106/53
Mode 59	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	165	5825	MCS0	Single RU	RU 26/8
Mode 60	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	165	5825	MCS0	Single RU	RU 52/40
Mode 61	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	165	5825	MCS0	Single RU	RU 106/54
Mode 62	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	36	5180	MCS0	Small RU 52+26	38+1
Mode 63	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT20	36	5180	MCS0	Small RU 106+26	53+4
Mode 64	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT20	64	5320	MCS0	Small RU 52+26	39+7
Mode 65	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT20	64	5320	MCS0	Small RU 106+26	54+4
Mode 66	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	100	5500	MCS0	Small RU 52+26	38+1
Mode 67	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	100	5500	MCS0	Small RU 106+26	53+4
Mode 68	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	140	5700	MCS0	Small RU 52+26	39+7
Mode 69	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT20	140	5700	MCS0	Small RU 106+26	54+4
Mode 70	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	149	5745	MCS0	Small RU 52+26	38+1
Mode 71	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	149	5745	MCS0	Small RU 106+26	53+4
Mode 72	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	165	5825	MCS0	Small RU 52+26	39+7
Mode 73	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT20	165	5825	MCS0	Small RU 106+26	54+4
Mode 74	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT80	42	5210	MCS0	Puncturing 20M	④
Mode 75	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT80	58	5290	MCS0	Puncturing 20M	①



Mode 76	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT80	106	5530	MCS0	Puncturing 20M	④
Mode 77	U-NII-2A	5.15-5.35	CDD 9+15	802.11be EHT160	50	5250	MCS0	Puncturing 20M	④
Mode 78	U-NII-2A	5.15-5.35	CDD 9+15	802.11be EHT160	50	5250	MCS0	Puncturing 40M	2
Mode 79	U-NII-2C	5.15-5.35	CDD 9+15	802.11be EHT160	114	5570	MCS0	Puncturing 20M	⑧
Mode 80	U-NII-2C	5.15-5.35	CDD 9+15	802.11be EHT160	114	5570	MCS0	Puncturing 40M	④
Mode 81	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT80	155	5775	MCS0	Puncturing 20M	④
Mode 82	U-NII-1	5.15-5.25	CDD 9+15	802.11be EHT80	42	5210	MCS0	Large RU 484+242	④
Mode 83	U-NII-2A	5.25-5.35	CDD 9+15	802.11be EHT80	58	5290	MCS0	Large RU 484+242	①
Mode 84	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT80	106	5530	MCS0	Large RU 484+242	④
Mode 85	U-NII-2C	5.47-5.725	CDD 9+15	802.11be EHT80	122	5610	MCS0	Large RU 484+242	①
Mode 86	U-NII-2A	5.15-5.35	CDD 9+15	802.11be EHT160	50	5250	MCS0	Large RU 996+484	3
Mode 87	U-NII-2C	5.15-5.35	CDD 9+15	802.11be EHT160	114	5570	MCS0	Large RU 996+484	④
Mode 88	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT80	155	5775	MCS0	Large RU 484+242	4
Mode 89	U-NII-1	5.15-5.25	CDD 9+15	802.11a_LF	36	5180	6Mbps	-	-
Mode 90	U-NII-3	5.725-5.85	CDD 9+15	802.11be EHT40_LF	151	5755	MCS0	Full	-
Mode 91	Co-TX	5G WIFI MIMO worse	CDD 9+15	802.11a	36	5180	6Mbps	-	-
		2.4G WIFI MIMO worse	CDD 0+2	802.11be EHT20	11	2462	MCS0	-	-
Mode 92	Co-TX	5G WIFI MIMO worse	CDD 9+15	802.11a	36	5180	6Mbps	-	-
		BT/BLE worse	0	Bluetooth-LE	38	2478	2Mbps		



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5148.97	50.23	54.00	-3.77	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	48.09	68.30	-20.21	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	48.82	68.30	-19.48	V	Peak	Pass	Harmonic
3	802.11a	48	5045.72	43.24	54.00	-10.76	H	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	49.24	68.30	-19.06	H	Peak	Pass	Harmonic
4	802.11a	52	5133.51	44.28	54.00	-9.72	H	AVERAGE	Pass	Band Edge
4	802.11a	52	10520.00	49.10	68.30	-19.20	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	10600.00	48.84	74.00	-25.16	V	Peak	Pass	Harmonic
6	802.11a	64	5350.88	49.31	54.00	-4.69	H	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	48.94	74.00	-25.06	V	Peak	Pass	Harmonic
7	802.11a	100	5460.00	46.25	54.00	-7.75	H	AVERAGE	Pass	Band Edge
7	802.11a	100	16500.00	48.75	68.30	-19.55	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	48.63	68.30	-19.67	V	Peak	Pass	Harmonic
9	802.11a	140	5727.07	64.20	68.30	-4.10	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	48.45	68.30	-19.85	H	Peak	Pass	Harmonic
10	802.11be EHT20	36	5141.75	48.06	54.00	-5.94	H	AVERAGE	Pass	Band Edge
10	802.11be EHT20	36	10360.00	48.97	68.30	-19.33	V	Peak	Pass	Harmonic
11	802.11be EHT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11be EHT20	44	10440.00	49.08	68.30	-19.22	H	Peak	Pass	Harmonic
12	802.11be EHT20	48	5149.88	43.29	54.00	-10.71	V	AVERAGE	Pass	Band Edge
12	802.11be EHT20	48	10480.00	47.40	68.30	-20.90	H	Peak	Pass	Harmonic
13	802.11be EHT20	52	5148.59	43.16	54.00	-10.84	H	AVERAGE	Pass	Band Edge
13	802.11be EHT20	52	10520.00	48.22	68.30	-20.08	H	Peak	Pass	Harmonic
14	802.11be EHT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11be EHT20	60	10600.00	48.95	74.00	-25.05	H	Peak	Pass	Harmonic
15	802.11be EHT20	64	5350.31	49.24	54.00	-4.76	H	AVERAGE	Pass	Band Edge
15	802.11be EHT20	64	15960.00	49.33	74.00	-24.67	H	Peak	Pass	Harmonic
16	802.11be EHT20	100	5468.43	63.78	68.30	-4.52	H	PEAK	Pass	Band Edge
16	802.11be EHT20	100	16500.00	48.92	68.30	-19.38	V	Peak	Pass	Harmonic
17	802.11be EHT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11be EHT20	116	16740.00	47.82	68.30	-20.48	H	Peak	Pass	Harmonic
18	802.11be EHT20	140	5730.00	64.17	68.30	-4.13	H	PEAK	Pass	Band Edge
18	802.11be EHT20	140	17100.00	48.59	68.30	-19.71	V	Peak	Pass	Harmonic
19	802.11be EHT40	38	5148.30	48.37	54.00	-5.63	H	AVERAGE	Pass	Band Edge
19	802.11be EHT40	38	-	-	-	-	-	-	-	Harmonic
20	802.11be EHT40	46	5116.52	45.53	54.00	-8.47	H	AVERAGE	Pass	Band Edge
20	802.11be EHT40	46	-	-	-	-	-	-	-	Harmonic
21	802.11be EHT40	54	5355.60	44.64	54.00	-9.36	H	AVERAGE	Pass	Band Edge
21	802.11be EHT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11be EHT40	62	5351.48	49.86	54.00	-4.14	H	AVERAGE	Pass	Band Edge
22	802.11be EHT40	62	-	-	-	-	-	-	-	Harmonic



23	802.11be EHT40	102	5459.84	49.60	54.00	-4.40	H	AVERAGE	Pass	Band Edge
23	802.11be EHT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11be EHT40	134	5458.64	42.68	54.00	-11.32	H	AVERAGE	Pass	Band Edge
24	802.11be EHT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11be EHT80	42	5149.44	47.66	54.00	-6.34	H	AVERAGE	Pass	Band Edge
25	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
26	802.11be EHT80	58	5377.30	50.21	54.00	-3.79	H	AVERAGE	Pass	Band Edge
26	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11be EHT80	106	5456.45	49.07	54.00	-4.93	H	AVERAGE	Pass	Band Edge
27	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
28	802.11be EHT80	122	5455.17	44.48	54.00	-9.52	H	AVERAGE	Pass	Band Edge
28	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
29	802.11be EHT160	50	5123.60	48.55	54.00	-5.45	H	AVERAGE	Pass	Band Edge
29	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
30	802.11be EHT160	114	5434.39	46.69	54.00	-7.31	H	AVERAGE	Pass	Band Edge
30	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
31	802.11a	149	5617.04	53.53	68.30	-14.77	H	PEAK	Pass	Band Edge
31	802.11a	149	17235.00	48.07	68.30	-20.23	H	Peak	Pass	Harmonic
32	802.11a	157	-	-	-	-	-	-	-	Band Edge
32	802.11a	157	17355.00	47.48	68.30	-20.82	V	Peak	Pass	Harmonic
33	802.11a	165	5924.94	52.53	68.25	-15.72	H	PEAK	Pass	Band Edge
33	802.11a	165	17475.00	48.71	68.30	-19.59	H	Peak	Pass	Harmonic
34	802.11be EHT20	149	5614.07	53.42	68.30	-14.88	V	PEAK	Pass	Band Edge
34	802.11be EHT20	149	17235.00	47.94	68.30	-20.36	V	Peak	Pass	Harmonic
35	802.11be EHT20	157	-	-	-	-	-	-	-	Band Edge
35	802.11be EHT20	157	17355.00	47.84	68.30	-20.46	H	Peak	Pass	Harmonic
36	802.11be EHT20	165	5936.13	53.17	68.30	-15.13	V	PEAK	Pass	Band Edge
36	802.11be EHT20	165	17475.00	48.61	68.30	-19.69	H	Peak	Pass	Harmonic
37	802.11be EHT40	151	5612.40	54.82	68.30	-13.48	V	PEAK	Pass	Band Edge
37	802.11be EHT40	151	17265.00	48.83	68.30	-19.47	H	Peak	Pass	Harmonic
38	802.11be EHT40	159	5634.91	53.40	68.30	-14.90	V	PEAK	Pass	Band Edge
38	802.11be EHT40	159	-	-	-	-	-	-	-	Harmonic
39	802.11be EHT80	155	5635.18	53.41	68.30	-14.89	H	PEAK	Pass	Band Edge
39	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
40	802.11a	144	5457.80	42.36	54.00	-11.64	H	Average	Pass	Band Edge
40	802.11a	144	17160.00	48.50	68.30	-19.80	V	Peak	Pass	Harmonic
41	802.11be EHT20	144	5460.00	41.19	54.00	-12.81	H	Peak	Pass	Band Edge
41	802.11be EHT20	144	17160.00	48.15	68.30	-20.15	H	Peak	Pass	Harmonic
42	802.11be EHT40	142	5459.45	41.15	54.00	-12.85	H	Peak	Pass	Band Edge
42	802.11be EHT40	142	-	-	-	-	-	-	-	Harmonic
43	802.11be EHT80	138	5460.00	42.01	54.00	-11.99	H	Average	Pass	Band Edge
43	802.11be EHT80	138	-	-	-	-	-	-	-	Harmonic
44	802.11be EHT20	36	5149.99	43.12	54.00	-10.88	H	AVERAGE	Pass	Band Edge
44	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
45	802.11be EHT20	36	5149.99	44.06	54.00	-9.94	H	AVERAGE	Pass	Band Edge
45	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
46	802.11be EHT20	36	5149.67	44.03	54.00	-9.97	H	AVERAGE	Pass	Band Edge







46	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
47	802.11be EHT20	64	5358.71	42.03	54.00	-11.97	H	AVERAGE	Pass	Band Edge
47	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
48	802.11be EHT20	64	5350.70	42.53	54.00	-11.47	H	AVERAGE	Pass	Band Edge
48	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
49	802.11be EHT20	64	5350.72	42.70	54.00	-11.30	H	AVERAGE	Pass	Band Edge
49	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
50	802.11be EHT20	100	5459.59	42.74	54.00	-11.26	H	AVERAGE	Pass	Band Edge
50	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
51	802.11be EHT20	100	5456.43	42.98	54.00	-11.02	H	AVERAGE	Pass	Band Edge
51	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
52	802.11be EHT20	100	5456.89	42.25	54.00	-11.75	H	AVERAGE	Pass	Band Edge
52	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
53	802.11be EHT20	140	5749.82	53.62	68.30	-14.68	V	PEAK	Pass	Band Edge
53	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
54	802.11be EHT20	140	5726.16	54.62	68.30	-13.68	H	PEAK	Pass	Band Edge
54	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
55	802.11be EHT20	140	5725.26	55.92	68.30	-12.38	V	PEAK	Pass	Band Edge
55	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
56	802.11be EHT20	149	5637.85	52.61	68.30	-15.69	H	PEAK	Pass	Band Edge
56	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
57	802.11be EHT20	149	5605.37	53.84	68.30	-14.46	V	PEAK	Pass	Band Edge
57	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
58	802.11be EHT20	149	5646.11	53.08	68.30	-15.22	H	PEAK	Pass	Band Edge
58	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
59	802.11be EHT20	165	5941.00	52.88	68.30	-15.42	H	PEAK	Pass	Band Edge
59	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
60	802.11be EHT20	165	5927.88	52.69	68.30	-15.61	H	PEAK	Pass	Band Edge
60	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
61	802.11be EHT20	165	5932.63	52.83	68.30	-15.47	H	PEAK	Pass	Band Edge
61	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
62	802.11be EHT20	36	5149.83	44.30	54.00	-9.70	H	AVERAGE	Pass	Band Edge
62	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
63	802.11be EHT20	36	5149.67	45.48	54.00	-8.52	H	AVERAGE	Pass	Band Edge
63	802.11be EHT20	36	-	-	-	-	-	-	-	Harmonic
64	802.11be EHT20	64	5350.17	43.23	54.00	-10.77	H	AVERAGE	Pass	Band Edge
64	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
65	802.11be EHT20	64	5350.03	48.61	54.00	-5.39	H	AVERAGE	Pass	Band Edge
65	802.11be EHT20	64	-	-	-	-	-	-	-	Harmonic
66	802.11be EHT20	100	5458.39	43.33	54.00	-10.67	H	AVERAGE	Pass	Band Edge
66	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
67	802.11be EHT20	100	5459.89	44.00	54.00	-10.00	V	AVERAGE	Pass	Band Edge
67	802.11be EHT20	100	-	-	-	-	-	-	-	Harmonic
68	802.11be EHT20	140	5726.03	54.88	68.30	-13.42	H	PEAK	Pass	Band Edge
68	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT20	140	5725.52	56.13	68.30	-12.17	H	PEAK	Pass	Band Edge
69	802.11be EHT20	140	-	-	-	-	-	-	-	Harmonic







70	802.11be EHT20	149	5637.85	53.51	68.30	-14.79	V	PEAK	Pass	Band Edge
70	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
71	802.11be EHT20	149	5647.13	53.02	68.30	-15.28	V	PEAK	Pass	Band Edge
71	802.11be EHT20	149	-	-	-	-	-	-	-	Harmonic
72	802.11be EHT20	165	5931.13	53.08	68.30	-15.22	V	PEAK	Pass	Band Edge
72	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
73	802.11be EHT20	165	5936.50	52.91	68.30	-15.39	V	PEAK	Pass	Band Edge
73	802.11be EHT20	165	-	-	-	-	-	-	-	Harmonic
74	802.11be EHT80	42	5146.90	49.28	54.00	-4.72	H	AVERAGE	Pass	Band Edge
74	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
75	802.11be EHT80	58	5355.38	47.92	54.00	-6.08	H	AVERAGE	Pass	Band Edge
75	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
76	802.11be EHT80	106	5455.93	47.06	54.00	-6.94	H	AVERAGE	Pass	Band Edge
76	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
77	802.11be EHT160	50	5127.35	50.19	54.00	-3.81	H	AVERAGE	Pass	Band Edge
77	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
78	802.11be EHT160	50	5396.90	45.66	54.00	-8.34	H	AVERAGE	Pass	Band Edge
78	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
79	802.11be EHT160	114	5467.39	63.45	68.30	-4.85	H	PEAK	Pass	Band Edge
79	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
80	802.11be EHT160	114	5463.85	64.07	68.30	-4.23	H	PEAK	Pass	Band Edge
80	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
81	802.11be EHT80	155	5633.16	53.34	68.30	-14.96	V	PEAK	Pass	Band Edge
81	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
82	802.11be EHT80	42	5136.40	49.89	54.00	-4.11	H	AVERAGE	Pass	Band Edge
82	802.11be EHT80	42	-	-	-	-	-	-	-	Harmonic
83	802.11be EHT80	58	5351.73	50.11	54.00	-3.89	H	AVERAGE	Pass	Band Edge
83	802.11be EHT80	58	-	-	-	-	-	-	-	Harmonic
84	802.11be EHT80	106	5457.01	50.21	54.00	-3.79	H	AVERAGE	Pass	Band Edge
84	802.11be EHT80	106	-	-	-	-	-	-	-	Harmonic
85	802.11be EHT80	122	5459.98	43.24	54.00	-10.76	H	AVERAGE	Pass	Band Edge
85	802.11be EHT80	122	-	-	-	-	-	-	-	Harmonic
86	802.11be EHT160	50	5350.30	48.18	54.00	-5.82	H	AVERAGE	Pass	Band Edge
86	802.11be EHT160	50	-	-	-	-	-	-	-	Harmonic
87	802.11be EHT160	114	5416.77	47.51	54.00	-6.49	H	AVERAGE	Pass	Band Edge
87	802.11be EHT160	114	-	-	-	-	-	-	-	Harmonic
88	802.11be EHT80	155	5941.16	53.61	68.30	-14.69	H	PEAK	Pass	Band Edge
88	802.11be EHT80	155	-	-	-	-	-	-	-	Harmonic
89	802.11a_LF	36	31.94	31.56	40.00	-8.44	V	Peak	Pass	LF
90	802.11be EHT40_LF	151	33.88	31.46	40.00	-8.54	V	Peak	Pass	LF
91	802.11be EHT20	11	2483.66	50.12	54.00	-3.88	V	AVERAGE	Pass	Band Edge
91	802.11a	36	10360.00	48.47	68.30	-19.83	V	Peak	Pass	Harmonic
92	802.11a	36	5149.58	45.85	54.00	-8.15	H	AVERAGE	Pass	Band Edge
92	802.11a	36	10360.00	48.50	68.30	-19.80	V	Peak	Pass	Harmonic

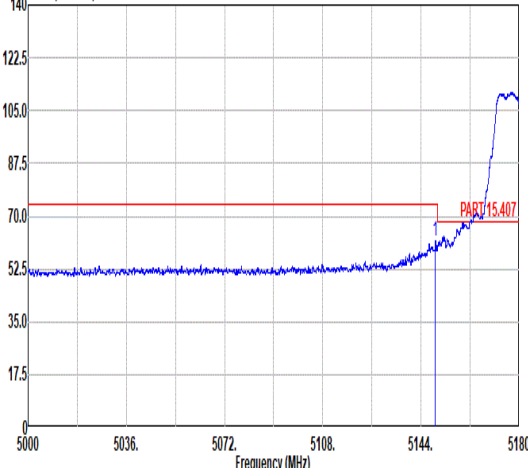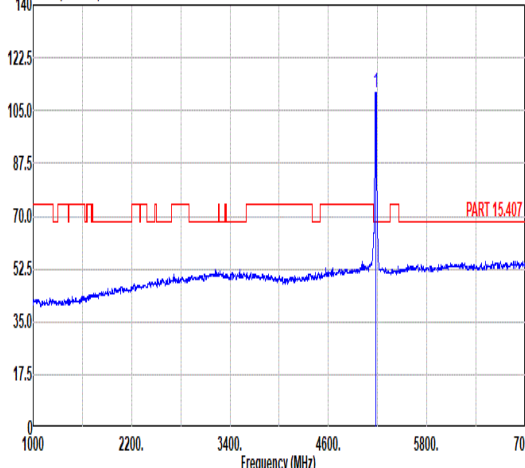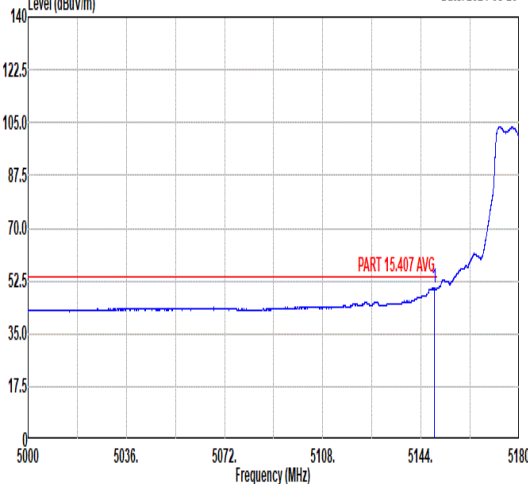
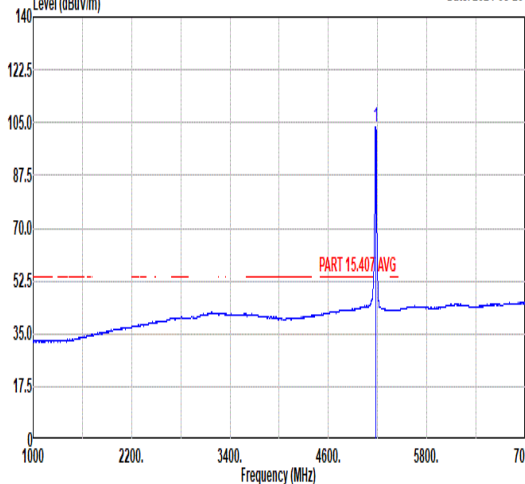


Mode	1																																																		
	Band Edge																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																		
ANT	CDD 9+15																																																		
Pol.	Horizontal																																																		
Peak	Level (dBuV/m) Date: 2024-08-20  Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.31</td><td>61.97</td><td>74.00</td><td>-12.03</td><td>47.79</td><td>34.87</td><td>11.09</td><td>31.78</td><td>339</td><td>119</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.31	61.97	74.00	-12.03	47.79	34.87	11.09	31.78	339	119	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5149.31	61.97	74.00	-12.03	47.79	34.87	11.09	31.78	339	119	PEAK																																								
Fundamental	Level (dBuV/m) Date: 2024-08-20  Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>111.19</td><td>-----</td><td>-----</td><td>97.06</td><td>34.87</td><td>11.07</td><td>31.81</td><td>339</td><td>119</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	111.19	-----	-----	97.06	34.87	11.07	31.81	339	119	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5180.00	111.19	-----	-----	97.06	34.87	11.07	31.81	339	119	PEAK																																								
Avg	Level (dBuV/m) Date: 2024-08-20  Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.97</td><td>50.23</td><td>54.00</td><td>-3.77</td><td>36.05</td><td>34.87</td><td>11.09</td><td>31.78</td><td>339</td><td>119</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.97	50.23	54.00	-3.77	36.05	34.87	11.09	31.78	339	119	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5148.97	50.23	54.00	-3.77	36.05	34.87	11.09	31.78	339	119	AVERAGE																																								
Avg	Level (dBuV/m) Date: 2024-08-20  Frequency (MHz)																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>103.38</td><td>-----</td><td>-----</td><td>89.23</td><td>34.87</td><td>11.08</td><td>31.80</td><td>339</td><td>119</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	103.38	-----	-----	89.23	34.87	11.08	31.80	339	119	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5180.00	103.38	-----	-----	89.23	34.87	11.08	31.80	339	119	AVERAGE																																								

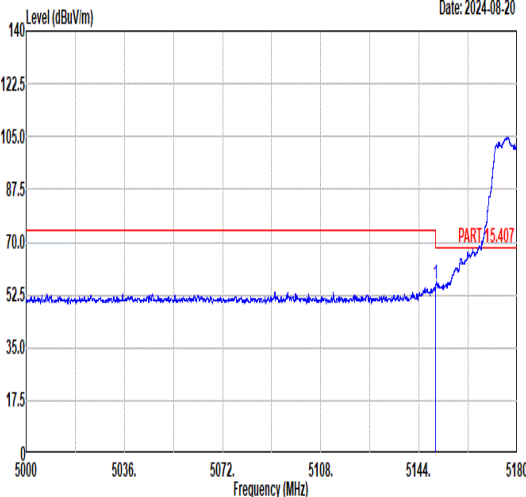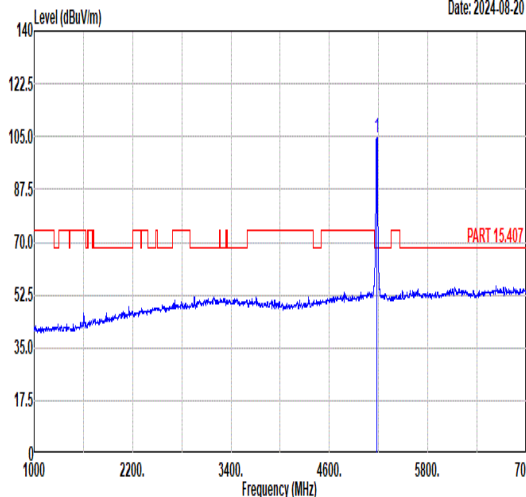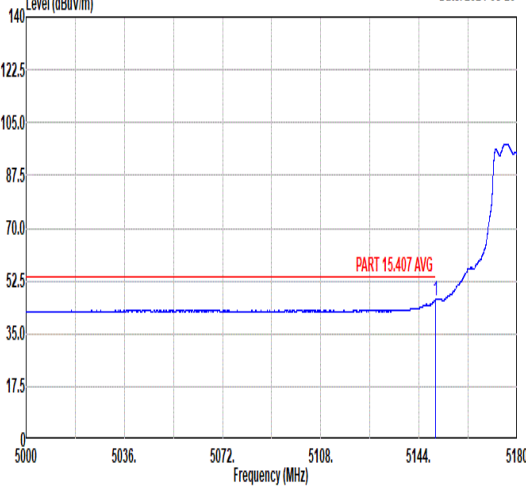
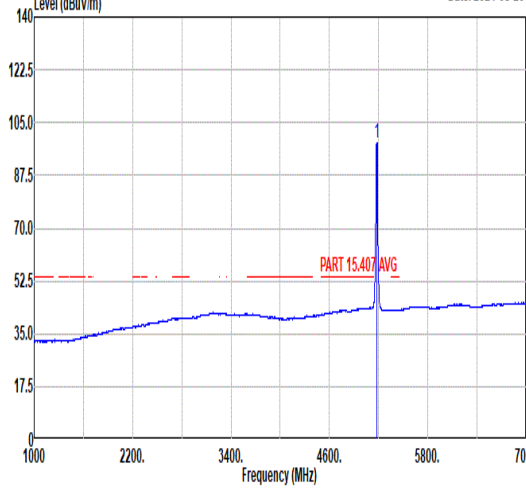


Mode	1																																																																																										
	Band Edge																																																																																										
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																										
ANT	CDD 9+15																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	 Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>55.76</td><td>74.00</td><td>-18.24</td><td>41.59</td><td>34.87</td><td>11.08</td><td>31.78</td><td>376</td><td>12</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.99	55.76	74.00	-18.24	41.59	34.87	11.08	31.78	376	12	PEAK	 Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>104.82</td><td>-----</td><td>-----</td><td>90.71</td><td>34.86</td><td>11.07</td><td>31.82</td><td>376</td><td>12</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	104.82	-----	-----	90.71	34.86	11.07	31.82	376	12	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.99	55.76	74.00	-18.24	41.59	34.87	11.08	31.78	376	12	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	104.82	-----	-----	90.71	34.86	11.07	31.82	376	12	PEAK																																																																																
Avg	 Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.99</td><td>46.02</td><td>54.00</td><td>-7.98</td><td>31.85</td><td>34.87</td><td>11.08</td><td>31.78</td><td>376</td><td>12</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.99	46.02	54.00	-7.98	31.85	34.87	11.08	31.78	376	12	AVERAGE	 Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.31</td><td>-----</td><td>-----</td><td>84.20</td><td>34.86</td><td>11.07</td><td>31.82</td><td>376</td><td>12</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	98.31	-----	-----	84.20	34.86	11.07	31.82	376	12	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5149.99	46.02	54.00	-7.98	31.85	34.87	11.08	31.78	376	12	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5180.00	98.31	-----	-----	84.20	34.86	11.07	31.82	376	12	AVERAGE																																																																																

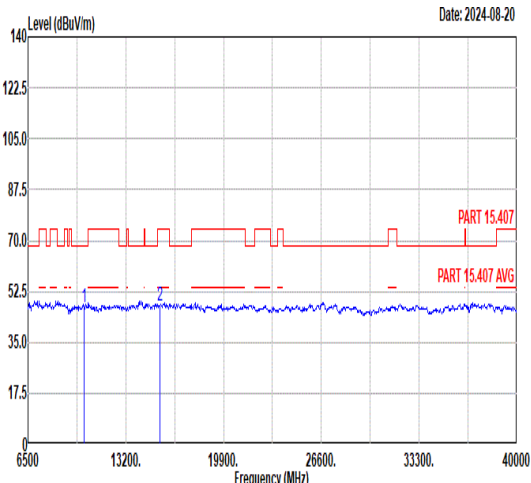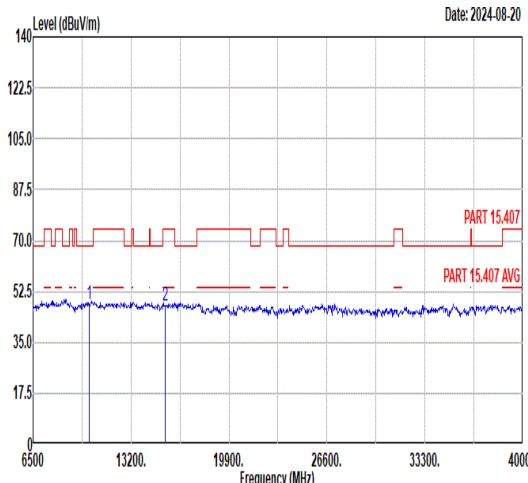

Mode	1																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																															
ANT	CDD 9+15																																																																																															
Pol.	Horizontal												Vertical																																																																																			
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10360.00</td><td>47.19</td><td>68.30</td><td>-21.11</td><td>44.37</td><td>39.44</td><td>14.15</td></tr><tr><td>2</td><td>15540.00</td><td>47.71</td><td>74.00</td><td>-26.29</td><td>40.47</td><td>41.82</td><td>16.85</td></tr></table>													Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	47.19	68.30	-21.11	44.37	39.44	14.15	2	15540.00	47.71	74.00	-26.29	40.47	41.82	16.85	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10360.00</td><td>48.09</td><td>68.30</td><td>-20.21</td><td>45.27</td><td>39.44</td><td>14.15</td></tr><tr><td>2</td><td>15540.00</td><td>47.67</td><td>74.00</td><td>-26.33</td><td>40.43</td><td>41.82</td><td>16.85</td></tr></table>					Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	48.09	68.30	-20.21	45.27	39.44	14.15	2	15540.00	47.67	74.00	-26.33	40.43	41.82	16.85
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10360.00	47.19	68.30	-21.11	44.37	39.44	14.15																																																																																									
2	15540.00	47.71	74.00	-26.29	40.47	41.82	16.85																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10360.00	48.09	68.30	-20.21	45.27	39.44	14.15																																																																																									
2	15540.00	47.67	74.00	-26.33	40.43	41.82	16.85																																																																																									

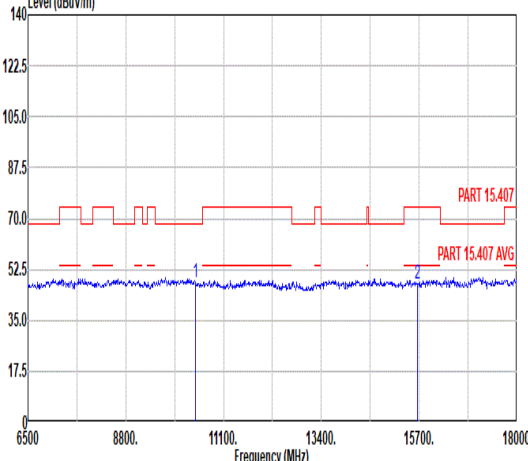
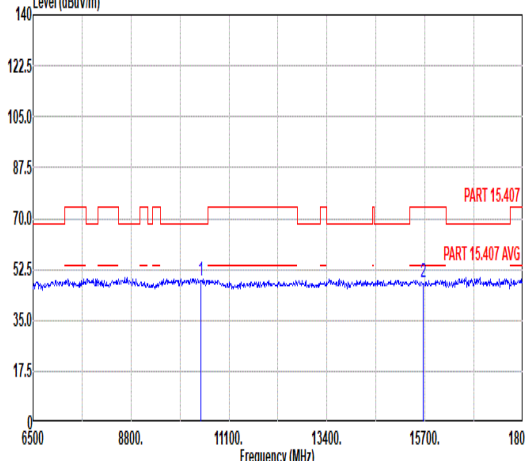


Mode	2																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																															
ANT	CDD 9+15																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2024-08-20 								Level (dBuV/m) Date: 2024-08-20 																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>48.10</td><td>68.30</td><td>-20.20</td><td>45.21</td><td>39.48</td><td>14.20</td></tr><tr><td>2</td><td>15660.00</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>40.22</td><td>41.90</td><td>16.94</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	48.10	68.30	-20.20	45.21	39.48	14.20	2	15660.00	47.53	74.00	-26.47	40.22	41.90	16.94	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>48.82</td><td>68.30</td><td>-19.48</td><td>45.93</td><td>39.48</td><td>14.20</td></tr><tr><td>2</td><td>15660.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>40.91</td><td>41.90</td><td>16.94</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	48.82	68.30	-19.48	45.93	39.48	14.20	2	15660.00	48.22	74.00	-25.78	40.91	41.90	16.94
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	48.10	68.30	-20.20	45.21	39.48	14.20																																																																																									
2	15660.00	47.53	74.00	-26.47	40.22	41.90	16.94																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	48.82	68.30	-19.48	45.93	39.48	14.20																																																																																									
2	15660.00	48.22	74.00	-25.78	40.91	41.90	16.94																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>48.10</td><td>68.30</td><td>-20.20</td><td>45.21</td><td>39.48</td><td>14.20</td></tr><tr><td>2</td><td>15660.00</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>40.22</td><td>41.90</td><td>16.94</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	48.10	68.30	-20.20	45.21	39.48	14.20	2	15660.00	47.53	74.00	-26.47	40.22	41.90	16.94	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>10440.00</td><td>48.82</td><td>68.30</td><td>-19.48</td><td>45.93</td><td>39.48</td><td>14.20</td></tr><tr><td>2</td><td>15660.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>40.91</td><td>41.90</td><td>16.94</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	10440.00	48.82	68.30	-19.48	45.93	39.48	14.20	2	15660.00	48.22	74.00	-25.78	40.91	41.90	16.94	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	48.10	68.30	-20.20	45.21	39.48	14.20																																																																																									
2	15660.00	47.53	74.00	-26.47	40.22	41.90	16.94																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	10440.00	48.82	68.30	-19.48	45.93	39.48	14.20																																																																																									
2	15660.00	48.22	74.00	-25.78	40.91	41.90	16.94																																																																																									







Mode	3																																																																												
	Band Edge - L																																																																												
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																												
ANT	CDD 9+15																																																																												
Pol.	Horizontal	Fundamental																																																																											
Peak	Level (dBuV/m) Date: 2024-08-20 15.407 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5038.76</td><td>53.20</td><td>74.00</td><td>-20.80</td><td>38.80</td><td>34.89</td><td>11.15</td><td>31.64</td><td>400</td><td>76 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5038.76	53.20	74.00	-20.80	38.80	34.89	11.15	31.64	400	76 PEAK	Level (dBuV/m) Date: 2024-08-20 15.407 <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>111.26</td><td>-----</td><td>97.27</td><td>34.85</td><td>11.03</td><td>31.89</td><td>400</td><td>76 PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5240.00	111.26	-----	97.27	34.85	11.03	31.89	400	76 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5038.76	53.20	74.00	-20.80	38.80	34.89	11.15	31.64	400	76 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5240.00	111.26	-----	97.27	34.85	11.03	31.89	400	76 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2024-08-20 15.407 AVG <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5045.72</td><td>43.24</td><td>54.00</td><td>-10.76</td><td>28.86</td><td>34.89</td><td>11.14</td><td>31.65</td><td>400</td><td>76 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5045.72	43.24	54.00	-10.76	28.86	34.89	11.14	31.65	400	76 AVERAGE	Level (dBuV/m) Date: 2024-08-20 15.407 AVG <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>104.41</td><td>-----</td><td>90.42</td><td>34.85</td><td>11.03</td><td>31.89</td><td>400</td><td>76 AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5240.00	104.41	-----	90.42	34.85	11.03	31.89	400	76 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5045.72	43.24	54.00	-10.76	28.86	34.89	11.14	31.65	400	76 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																				
1 5240.00	104.41	-----	90.42	34.85	11.03	31.89	400	76 AVERAGE																																																																					

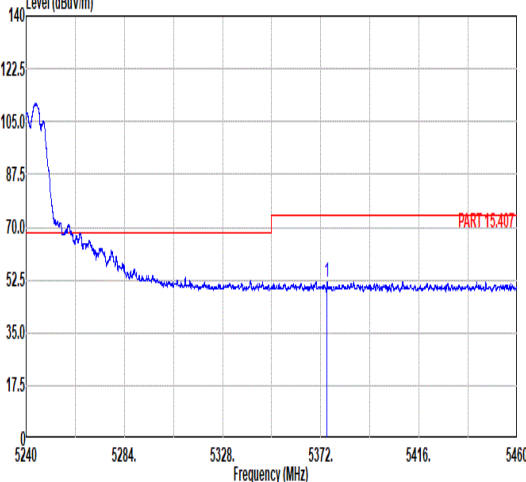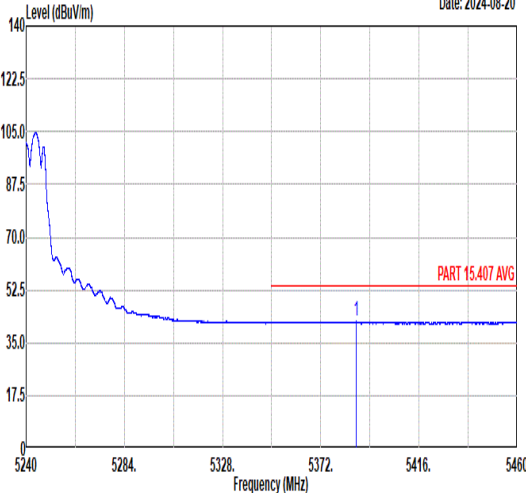

Mode	3																																																			
	Band Edge - R																																																			
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																			
ANT	CDD 9+15																																																			
Pol.	Horizontal	Fundamental																																																		
Peak	Date: 2024-08-20  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.77</td><td>52.00</td><td>74.00</td><td>-22.00</td><td>38.31</td><td>34.83</td><td>10.92</td><td>32.06</td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>76 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5374.77	52.00	74.00	-22.00	38.31	34.83	10.92	32.06	400										76 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5374.77	52.00	74.00	-22.00	38.31	34.83	10.92	32.06	400																																											
									76 PEAK																																											
Avg	Date: 2024-08-20  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5387.97</td><td>42.02</td><td>54.00</td><td>-11.98</td><td>28.37</td><td>34.82</td><td>10.91</td><td>32.08</td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>76 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5387.97	42.02	54.00	-11.98	28.37	34.82	10.91	32.08	400										76 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																											
1	5387.97	42.02	54.00	-11.98	28.37	34.82	10.91	32.08	400																																											
									76 AVERAGE																																											

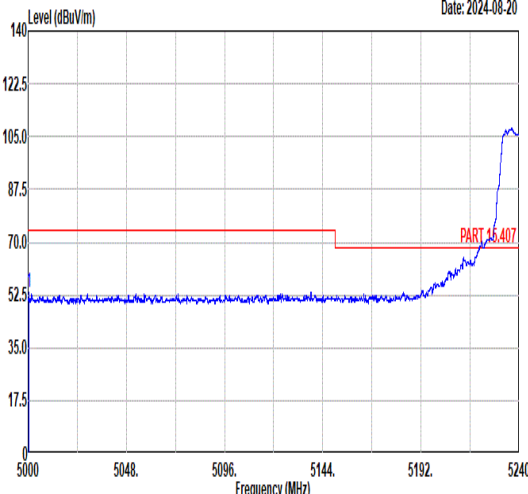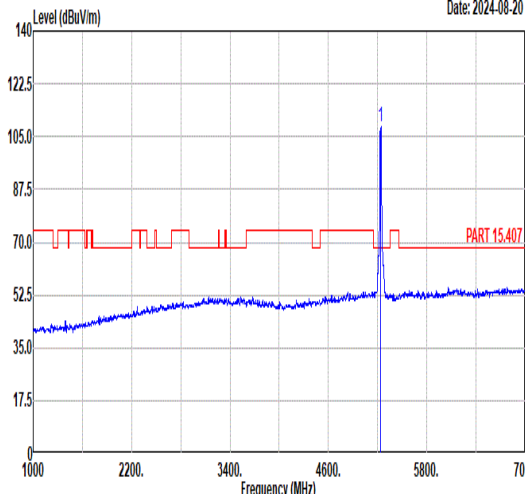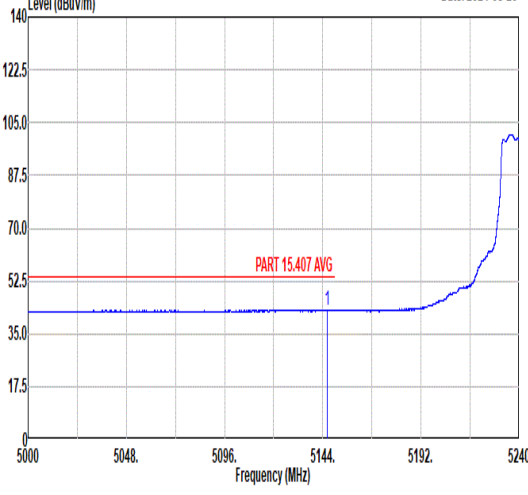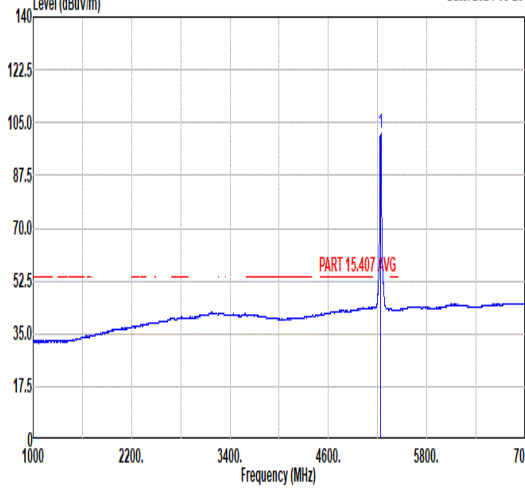

Mode	3																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																	
ANT	CDD 9+15																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-08-20  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5000.38</td><td>53.46</td><td>74.00</td><td>-20.54</td><td>39.01</td><td>34.90</td><td>11.15</td><td>31.60</td><td>400 355 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5000.38	53.46	74.00	-20.54	39.01	34.90	11.15	31.60	400 355 PEAK	Level (dBuV/m) Date: 2024-08-20  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>108.18</td><td>-----</td><td>94.21</td><td>34.85</td><td>11.02</td><td>31.90</td><td>400</td><td>355 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	108.18	-----	94.21	34.85	11.02	31.90	400	355 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5000.38	53.46	74.00	-20.54	39.01	34.90	11.15	31.60	400 355 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5240.00	108.18	-----	94.21	34.85	11.02	31.90	400	355 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-08-20  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.30</td><td>42.95</td><td>54.00</td><td>-11.05</td><td>28.77</td><td>34.87</td><td>11.09</td><td>31.78</td><td>400 355 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5146.30	42.95	54.00	-11.05	28.77	34.87	11.09	31.78	400 355 AVERAGE	Level (dBuV/m) Date: 2024-08-20  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>101.39</td><td>-----</td><td>87.42</td><td>34.85</td><td>11.02</td><td>31.90</td><td>400</td><td>355 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	101.39	-----	87.42	34.85	11.02	31.90	400	355 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5146.30	42.95	54.00	-11.05	28.77	34.87	11.09	31.78	400 355 AVERAGE																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5240.00	101.39	-----	87.42	34.85	11.02	31.90	400	355 AVERAGE																																																																									



Mode	3																																																		
	Band Edge - R																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																		
ANT	CDD 9+15																																																		
Pol.	Vertical					Fundamental																																													
Peak	Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5365.75</td><td>52.55</td><td>74.00</td><td>-21.45</td><td>38.84</td><td>34.83</td><td>10.93</td><td>32.05</td><td>400</td><td>355 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5365.75	52.55	74.00	-21.45	38.84	34.83	10.93	32.05	400	355 PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5365.75	52.55	74.00	-21.45	38.84	34.83	10.93	32.05	400	355 PEAK																																									
Avg	Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.13</td><td>42.27</td><td>54.00</td><td>-11.73</td><td>28.53</td><td>34.83</td><td>10.94</td><td>32.03</td><td>400</td><td>355 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.13	42.27	54.00	-11.73	28.53	34.83	10.94	32.03	400	355 AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																										
1	5350.13	42.27	54.00	-11.73	28.53	34.83	10.94	32.03	400	355 AVERAGE																																									







Mode	3																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-08-22 Frequency (MHz)						Level (dBuV/m) Date: 2024-08-22 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>49.24</td><td>68.30</td><td>-19.06</td><td>46.32</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.44</td><td>74.00</td><td>-25.56</td><td>41.10</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	49.24	68.30	-19.06	46.32	39.49	14.23	50.80	--	--	Peak	2	15720.00	48.44	74.00	-25.56	41.10	41.93	16.99	51.58	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.08</td><td>68.30</td><td>-21.22</td><td>44.16</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.38</td><td>74.00</td><td>-26.62</td><td>40.04</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	47.08	68.30	-21.22	44.16	39.49	14.23	50.80	--	--	Peak	2	15720.00	47.38	74.00	-26.62	40.04	41.93	16.99	51.58	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10480.00	49.24	68.30	-19.06	46.32	39.49	14.23	50.80	--	--	Peak																																																																																																									
2	15720.00	48.44	74.00	-25.56	41.10	41.93	16.99	51.58	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10480.00	47.08	68.30	-21.22	44.16	39.49	14.23	50.80	--	--	Peak																																																																																																									
2	15720.00	47.38	74.00	-26.62	40.04	41.93	16.99	51.58	--	--	Peak																																																																																																									



		4																																																																																																		
Mode		Band Edge - L																																																																																																		
		U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																		
ANT		CDD 9+15																																																																																																		
Pol.	Horizontal										Fundamental																																																																																									
Peak	Level (dBuV/m) Date: 2024-08-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5089.86</td><td>54.24</td><td>74.00</td><td>-19.76</td><td>39.95</td><td>34.88</td><td>11.12</td><td>31.71</td><td>300</td><td>111 PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5089.86	54.24	74.00	-19.76	39.95	34.88	11.12	31.71	300	111 PEAK	Level (dBuV/m) Date: 2024-08-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>111.63</td><td>-----</td><td>-----</td><td>97.69</td><td>34.85</td><td>11.01</td><td>31.92</td><td>300</td><td>111 PEAK</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5260.00	111.63	-----	-----	97.69	34.85	11.01	31.92	300	111 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5089.86	54.24	74.00	-19.76	39.95	34.88	11.12	31.71	300	111 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5260.00	111.63	-----	-----	97.69	34.85	11.01	31.92	300	111 PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2024-08-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5133.51</td><td>44.28</td><td>54.00</td><td>-9.72</td><td>30.08</td><td>34.87</td><td>11.09</td><td>31.76</td><td>300</td><td>111 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5133.51	44.28	54.00	-9.72	30.08	34.87	11.09	31.76	300	111 AVERAGE	Level (dBuV/m) Date: 2024-08-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>103.84</td><td>-----</td><td>-----</td><td>89.88</td><td>34.85</td><td>11.02</td><td>31.91</td><td>300</td><td>111 AVERAGE</td></tr></tbody></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5260.00	103.84	-----	-----	89.88	34.85	11.02	31.91	300	111 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5133.51	44.28	54.00	-9.72	30.08	34.87	11.09	31.76	300	111 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																											
1 5260.00	103.84	-----	-----	89.88	34.85	11.02	31.91	300	111 AVERAGE																																																																																											

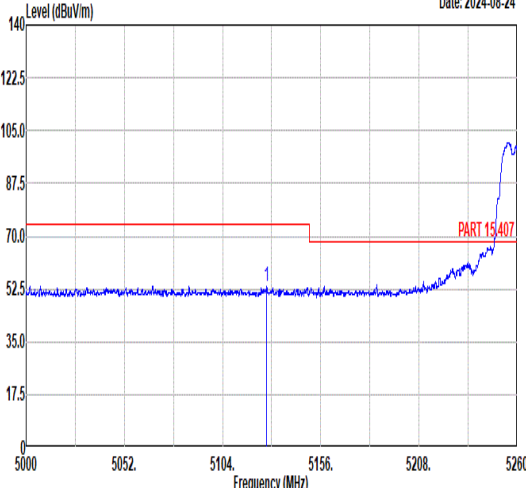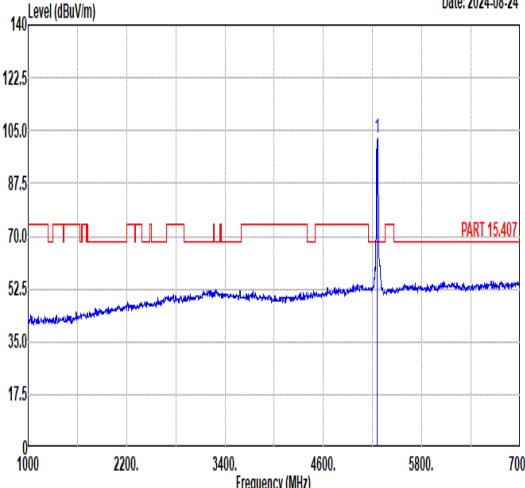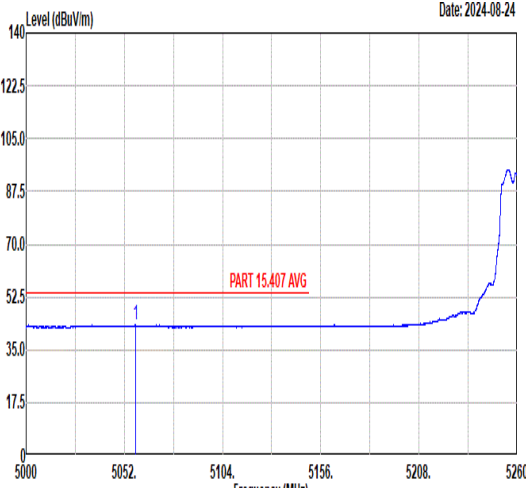
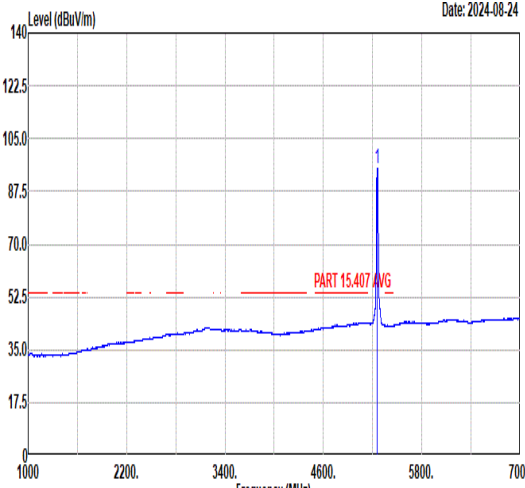


		4																																																																																																			
Mode		Band Edge - L																																																																																																			
		U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																			
ANT		CDD 9+15																																																																																																			
Pol.	Vertical										Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-08-24  Frequency (MHz)										Level (dBuV/m) Date: 2024-08-24  Frequency (MHz)																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5127.27</td><td>53.54</td><td>74.00</td><td>-20.46</td><td>39.32</td><td>34.87</td><td>11.10</td><td>31.75</td><td>300</td><td>33 PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5127.27	53.54	74.00	-20.46	39.32	34.87	11.10	31.75	300	33 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>102.31</td><td>-----</td><td>-----</td><td>88.37</td><td>34.85</td><td>11.01</td><td>31.92</td><td>300</td><td>33 PEAK</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	102.31	-----	-----	88.37	34.85	11.01	31.92	300
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5127.27	53.54	74.00	-20.46	39.32	34.87	11.10	31.75	300	33 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5260.00	102.31	-----	-----	88.37	34.85	11.01	31.92	300	33 PEAK																																																																																											
Avg	Level (dBuV/m) Date: 2024-08-24  Frequency (MHz)										Level (dBuV/m) Date: 2024-08-24  Frequency (MHz)																																																																																										
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5057.85</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>28.76</td><td>34.89</td><td>11.14</td><td>31.67</td><td>300</td><td>33 AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5057.85	43.12	54.00	-10.88	28.76	34.89	11.14	31.67	300	33 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>95.21</td><td>-----</td><td>-----</td><td>81.27</td><td>34.85</td><td>11.01</td><td>31.92</td><td>300</td><td>33 AVERAGE</td></tr></table>											Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	95.21	-----	-----	81.27	34.85	11.01	31.92	300
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5057.85	43.12	54.00	-10.88	28.76	34.89	11.14	31.67	300	33 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5260.00	95.21	-----	-----	81.27	34.85	11.01	31.92	300	33 AVERAGE																																																																																											



Mode	4																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																										
ANT	CDD 9+15																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-08-24 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5417.92</td><td>52.46</td><td>74.00</td><td>-21.54</td><td>38.80</td><td>34.82</td><td>10.95</td><td>32.11</td><td>300</td><td>33 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5417.92	52.46	74.00	-21.54	38.80	34.82	10.95	32.11	300	33 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5417.92	52.46	74.00	-21.54	38.80	34.82	10.95	32.11	300	33 PEAK																																	
Avg	Date: 2024-08-24 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.30</td><td>42.24</td><td>54.00</td><td>-11.76</td><td>28.49</td><td>34.81</td><td>11.10</td><td>32.16</td><td>300</td><td>33 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.30	42.24	54.00	-11.76	28.49	34.81	11.10	32.16	300	33 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5455.30	42.24	54.00	-11.76	28.49	34.81	11.10	32.16	300	33 AVERAGE																																	



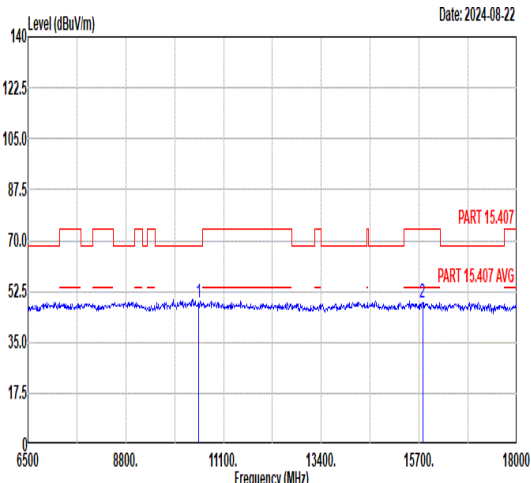
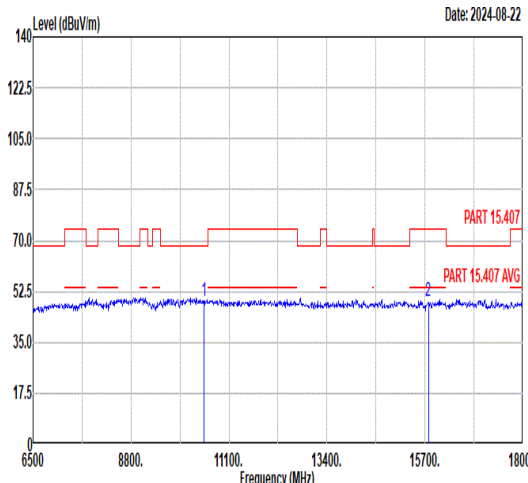


Mode	4																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>48.70</td><td>68.30</td><td>-19.60</td><td>45.75</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.76</td><td>74.00</td><td>-25.24</td><td>41.38</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	48.70	68.30	-19.60	45.75	39.50	14.25	50.80	--	--	Peak	2	15780.00	48.76	74.00	-25.24	41.38	41.97	17.04	51.63	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>49.10</td><td>68.30</td><td>-19.20</td><td>46.15</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>48.93</td><td>74.00</td><td>-25.07</td><td>41.55</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	49.10	68.30	-19.20	46.15	39.50	14.25	50.80	--	--	Peak	2	15780.00	48.93	74.00	-25.07	41.55	41.97	17.04	51.63	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10520.00	48.70	68.30	-19.60	45.75	39.50	14.25	50.80	--	--	Peak																																																																																																									
2	15780.00	48.76	74.00	-25.24	41.38	41.97	17.04	51.63	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10520.00	49.10	68.30	-19.20	46.15	39.50	14.25	50.80	--	--	Peak																																																																																																									
2	15780.00	48.93	74.00	-25.07	41.55	41.97	17.04	51.63	--	--	Peak																																																																																																									



Mode	5																																																																																																			
	Harmonic																																																																																																			
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																			
ANT	CDD 9+15																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>48.59</td><td>74.00</td><td>-25.41</td><td>45.61</td><td>39.48</td><td>14.30</td><td>50.80</td><td>-- -- Peak</td></tr><tr><td>2</td><td>15900.00</td><td>48.20</td><td>74.00</td><td>-25.80</td><td>40.74</td><td>42.04</td><td>17.14</td><td>51.72</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	48.59	74.00	-25.41	45.61	39.48	14.30	50.80	-- -- Peak	2	15900.00	48.20	74.00	-25.80	40.74	42.04	17.14	51.72	-- -- Peak	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>48.84</td><td>74.00</td><td>-25.16</td><td>45.86</td><td>39.48</td><td>14.30</td><td>50.80</td><td>-- -- Peak</td></tr><tr><td>2</td><td>15900.00</td><td>47.95</td><td>74.00</td><td>-26.05</td><td>40.49</td><td>42.04</td><td>17.14</td><td>51.72</td><td>-- -- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	48.84	74.00	-25.16	45.86	39.48	14.30	50.80	-- -- Peak	2	15900.00	47.95	74.00	-26.05	40.49	42.04	17.14	51.72	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10600.00	48.59	74.00	-25.41	45.61	39.48	14.30	50.80	-- -- Peak																																																																																											
2	15900.00	48.20	74.00	-25.80	40.74	42.04	17.14	51.72	-- -- Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10600.00	48.84	74.00	-25.16	45.86	39.48	14.30	50.80	-- -- Peak																																																																																											
2	15900.00	47.95	74.00	-26.05	40.49	42.04	17.14	51.72	-- -- Peak																																																																																											

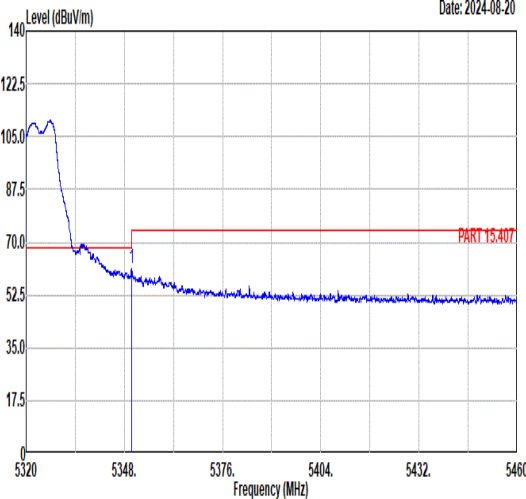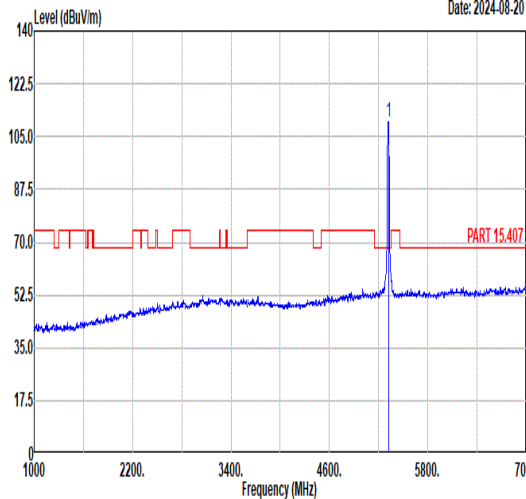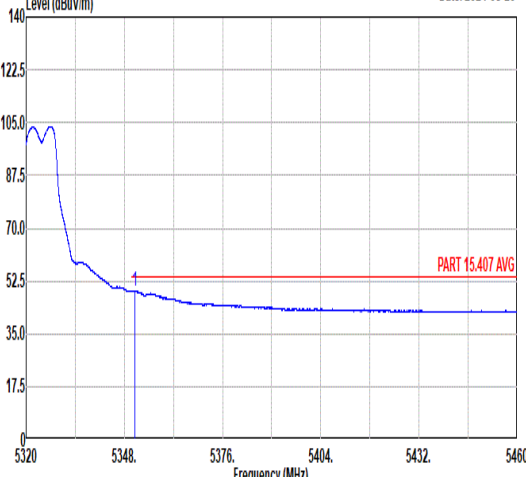
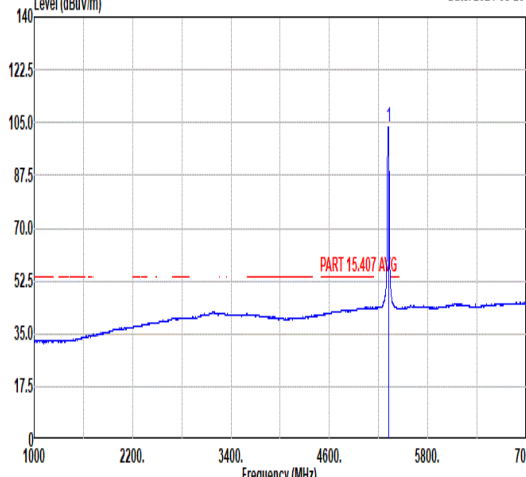


		6																																																																																								
Mode		Band Edge																																																																																								
		U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																								
ANT		CDD 9+15																																																																																								
Pol.		Horizontal					Fundamental																																																																																			
Peak	 Date: 2024-08-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5350.04</td><td>61.33</td><td>74.00</td><td>-12.67</td><td>47.59</td><td>34.83</td><td>10.94</td><td>32.03</td><td>245</td><td>338 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	1 5350.04	61.33	74.00	-12.67	47.59	34.83	10.94	32.03	245	338 PEAK	 Date: 2024-08-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5320.00</td><td>110.04</td><td>-----</td><td>-----</td><td>96.24</td><td>34.84</td><td>10.96</td><td>32.00</td><td>245</td><td>338 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	1 5320.00	110.04	-----	-----	96.24	34.84	10.96	32.00	245	338 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 5350.04	61.33	74.00	-12.67	47.59	34.83	10.94	32.03	245	338 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 5320.00	110.04	-----	-----	96.24	34.84	10.96	32.00	245	338 PEAK																																																																																	
Avg	 Date: 2024-08-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5350.88</td><td>49.31</td><td>54.00</td><td>-4.69</td><td>35.57</td><td>34.83</td><td>10.94</td><td>32.03</td><td>245</td><td>338 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	1 5350.88	49.31	54.00	-4.69	35.57	34.83	10.94	32.03	245	338 AVERAGE	 Date: 2024-08-20 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5320.00</td><td>103.58</td><td>-----</td><td>-----</td><td>89.78</td><td>34.84</td><td>10.96</td><td>32.00</td><td>245</td><td>338 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg	1 5320.00	103.58	-----	-----	89.78	34.84	10.96	32.00	245	338 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 5350.88	49.31	54.00	-4.69	35.57	34.83	10.94	32.03	245	338 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																	
1 5320.00	103.58	-----	-----	89.78	34.84	10.96	32.00	245	338 AVERAGE																																																																																	



Mode	6																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																									
ANT	CDD 9+15																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5351.01</td><td>57.47</td><td>74.00</td><td>-16.53</td><td>43.73</td><td>34.83</td><td>10.94</td><td>32.03</td><td>240 337 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5351.01	57.47	74.00	-16.53	43.73	34.83	10.94	32.03	240 337 PEAK	Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>106.75</td><td>-----</td><td>-----</td><td>92.95</td><td>34.84</td><td>10.96</td><td>32.00</td><td>240 337 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	106.75	-----	-----	92.95	34.84	10.96	32.00	240 337 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5351.01	57.47	74.00	-16.53	43.73	34.83	10.94	32.03	240 337 PEAK																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5320.00	106.75	-----	-----	92.95	34.84	10.96	32.00	240 337 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5350.00</td><td>47.60</td><td>54.00</td><td>-6.40</td><td>33.86</td><td>34.83</td><td>10.94</td><td>32.03</td><td>240 337 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5350.00	47.60	54.00	-6.40	33.86	34.83	10.94	32.03	240 337 AVERAGE	Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5320.00</td><td>100.23</td><td>-----</td><td>-----</td><td>86.41</td><td>34.84</td><td>10.97</td><td>31.99</td><td>240 337 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	100.23	-----	-----	86.41	34.84	10.97	31.99	240 337 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5350.00	47.60	54.00	-6.40	33.86	34.83	10.94	32.03	240 337 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																		
1 5320.00	100.23	-----	-----	86.41	34.84	10.97	31.99	240 337 AVERAGE																																																																		

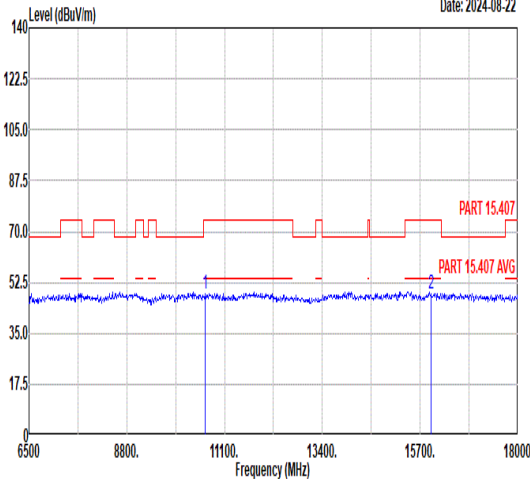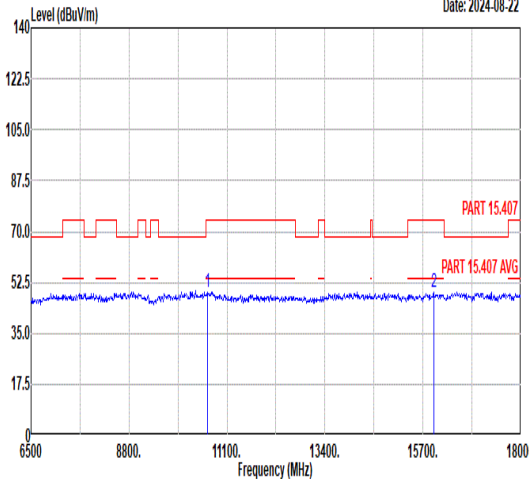

Mode	6																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																															
ANT	CDD 9+15																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg																																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10640.00</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>45.51</td><td>39.47</td><td>14.32</td></tr><tr><td>2</td><td>15960.00</td><td>48.37</td><td>74.00</td><td>-25.63</td><td>40.87</td><td>42.08</td><td>17.19</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	48.50	74.00	-25.50	45.51	39.47	14.32	2	15960.00	48.37	74.00	-25.63	40.87	42.08	17.19	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>10640.00</td><td>48.94</td><td>74.00</td><td>-25.06</td><td>45.95</td><td>39.47</td><td>14.32</td></tr><tr><td>2</td><td>15960.00</td><td>48.92</td><td>74.00</td><td>-25.08</td><td>41.42</td><td>42.08</td><td>17.19</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	48.94	74.00	-25.06	45.95	39.47	14.32	2	15960.00	48.92	74.00	-25.08	41.42	42.08	17.19
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	48.50	74.00	-25.50	45.51	39.47	14.32																																																																																									
2	15960.00	48.37	74.00	-25.63	40.87	42.08	17.19																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																									
1	10640.00	48.94	74.00	-25.06	45.95	39.47	14.32																																																																																									
2	15960.00	48.92	74.00	-25.08	41.42	42.08	17.19																																																																																									





Mode	7																																																								
	Band Edge																																																								
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																								
ANT	CDD 9+15																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	Level (dBuV/m) Date: 2024-08-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5451.18</td><td>55.91</td><td>74.00</td><td>-18.09</td><td>42.17</td><td>34.81</td><td>11.08</td><td>32.15</td><td>328</td><td>313 PEAK</td></tr><tr><td>2</td><td>5469.79</td><td>58.56</td><td>68.30</td><td>-9.74</td><td>44.77</td><td>34.81</td><td>11.16</td><td>32.18</td><td>328</td><td>313 PEAK</td></tr></tbody></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5451.18	55.91	74.00	-18.09	42.17	34.81	11.08	32.15	328	313 PEAK	2	5469.79	58.56	68.30	-9.74	44.77	34.81	11.16	32.18	328	313 PEAK	Level (dBuV/m) Date: 2024-08-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>110.07</td><td>-----</td><td>-----</td><td>96.17</td><td>34.81</td><td>11.30</td><td>32.21</td><td>328</td><td>313 PEAK</td></tr></tbody></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	110.07	-----	-----	96.17	34.81	11.30	32.21	328	313 PEAK
		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																															
1	5451.18	55.91	74.00	-18.09	42.17	34.81	11.08	32.15	328	313 PEAK																																															
2	5469.79	58.56	68.30	-9.74	44.77	34.81	11.16	32.18	328	313 PEAK																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																
1	5500.00	110.07	-----	-----	96.17	34.81	11.30	32.21	328	313 PEAK																																															
Avg	Level (dBuV/m) Date: 2024-08-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5460.00</td><td>46.25</td><td>54.00</td><td>-7.75</td><td>32.49</td><td>34.81</td><td>11.12</td><td>32.17</td><td>328</td><td>313 AVERAGE</td></tr></tbody></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5460.00	46.25	54.00	-7.75	32.49	34.81	11.12	32.17	328	313 AVERAGE	Level (dBuV/m) Date: 2024-08-20 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><thead><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>103.53</td><td>-----</td><td>-----</td><td>89.63</td><td>34.81</td><td>11.30</td><td>32.21</td><td>328</td><td>313 AVERAGE</td></tr></tbody></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	103.53	-----	-----	89.63	34.81	11.30	32.21	328	313 AVERAGE											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																
1	5460.00	46.25	54.00	-7.75	32.49	34.81	11.12	32.17	328	313 AVERAGE																																															
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																
1	5500.00	103.53	-----	-----	89.63	34.81	11.30	32.21	328	313 AVERAGE																																															





Mode	7																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	CDD 9+15																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.43</td><td>54.29</td><td>74.00</td><td>-19.71</td><td>40.52</td><td>34.81</td><td>11.12</td><td>32.16</td><td>365 8 PEAK</td></tr><tr><td>2</td><td>5470.00</td><td>57.26</td><td>68.30</td><td>-11.04</td><td>43.47</td><td>34.81</td><td>11.16</td><td>32.18</td><td>365 8 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.43	54.29	74.00	-19.71	40.52	34.81	11.12	32.16	365 8 PEAK	2	5470.00	57.26	68.30	-11.04	43.47	34.81	11.16	32.18	365 8 PEAK	Level (dBuV/m) Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>108.14</td><td>-----</td><td>-----</td><td>94.29</td><td>34.80</td><td>11.25</td><td>32.20</td><td>365 8 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	108.14	-----	-----	94.29	34.80	11.25	32.20	365 8 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.43	54.29	74.00	-19.71	40.52	34.81	11.12	32.16	365 8 PEAK																																																																																			
2	5470.00	57.26	68.30	-11.04	43.47	34.81	11.16	32.18	365 8 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	108.14	-----	-----	94.29	34.80	11.25	32.20	365 8 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.59</td><td>45.15</td><td>54.00</td><td>-8.85</td><td>31.38</td><td>34.81</td><td>11.12</td><td>32.16</td><td>365 8 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.59	45.15	54.00	-8.85	31.38	34.81	11.12	32.16	365 8 AVERAGE	Level (dBuV/m) Date: 2024-08-20 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5500.00</td><td>101.13</td><td>-----</td><td>-----</td><td>87.28</td><td>34.80</td><td>11.25</td><td>32.20</td><td>365 8 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	101.13	-----	-----	87.28	34.80	11.25	32.20	365 8 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.59	45.15	54.00	-8.85	31.38	34.81	11.12	32.16	365 8 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5500.00	101.13	-----	-----	87.28	34.80	11.25	32.20	365 8 AVERAGE																																																																																			


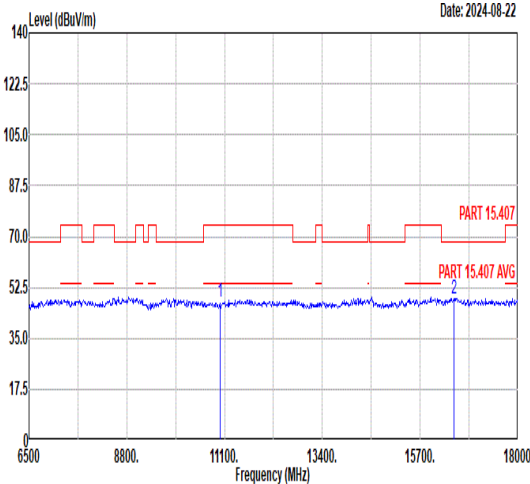
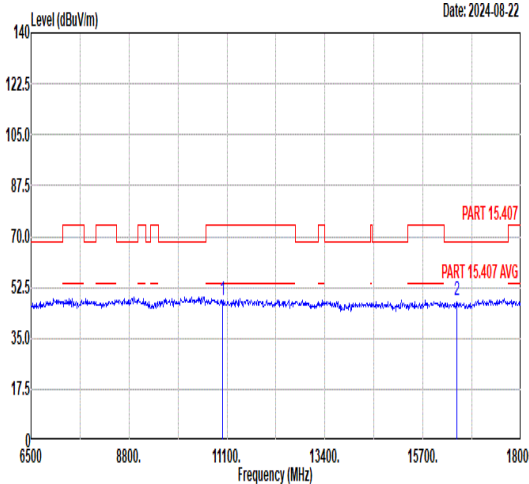


Mode	7																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>47.59</td><td>74.00</td><td>-26.41</td><td>44.45</td><td>39.40</td><td>14.54</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.75</td><td>68.30</td><td>-19.55</td><td>40.79</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	47.59	74.00	-26.41	44.45	39.40	14.54	50.80	--	--	Peak	2	16500.00	48.75	68.30	-19.55	40.79	42.40	17.36	51.80	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>48.28</td><td>74.00</td><td>-25.72</td><td>45.14</td><td>39.40</td><td>14.54</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>40.19</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	48.28	74.00	-25.72	45.14	39.40	14.54	50.80	--	--	Peak	2	16500.00	48.15	68.30	-20.15	40.19	42.40	17.36	51.80	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11000.00	47.59	74.00	-26.41	44.45	39.40	14.54	50.80	--	--	Peak																																																																																																									
2	16500.00	48.75	68.30	-19.55	40.79	42.40	17.36	51.80	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11000.00	48.28	74.00	-25.72	45.14	39.40	14.54	50.80	--	--	Peak																																																																																																									
2	16500.00	48.15	68.30	-20.15	40.19	42.40	17.36	51.80	--	--	Peak																																																																																																									

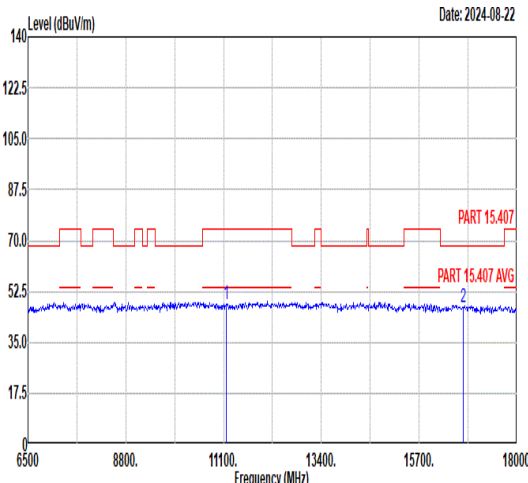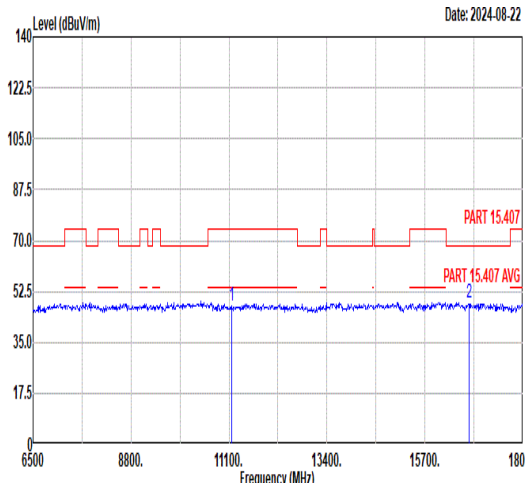

Mode	8																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11160.00</td><td>48.02</td><td>74.00</td><td>-25.98</td><td>44.62</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.27</td><td>68.30</td><td>-21.03</td><td>39.14</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	48.02	74.00	-25.98	44.62	39.53	14.64	50.77	--	--	Peak	2	16740.00	47.27	68.30	-21.03	39.14	42.45	17.43	51.75	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11160.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>44.14</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16740.00</td><td>48.63</td><td>68.30</td><td>-19.67</td><td>40.50</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.54	74.00	-26.46	44.14	39.53	14.64	50.77	--	--	Peak	2	16740.00	48.63	68.30	-19.67	40.50	42.45	17.43	51.75	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11160.00	48.02	74.00	-25.98	44.62	39.53	14.64	50.77	--	--	Peak																																																																																																									
2	16740.00	47.27	68.30	-21.03	39.14	42.45	17.43	51.75	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11160.00	47.54	74.00	-26.46	44.14	39.53	14.64	50.77	--	--	Peak																																																																																																									
2	16740.00	48.63	68.30	-19.67	40.50	42.45	17.43	51.75	--	--	Peak																																																																																																									

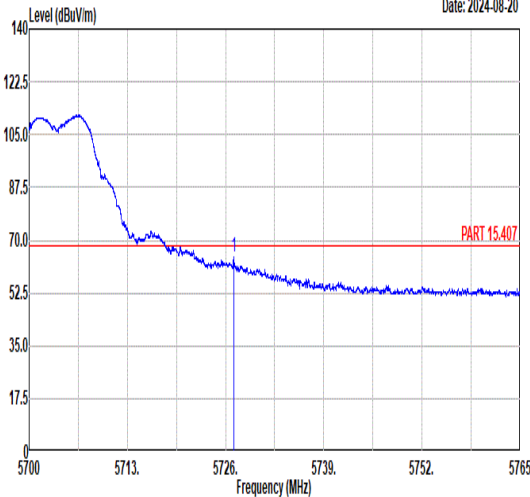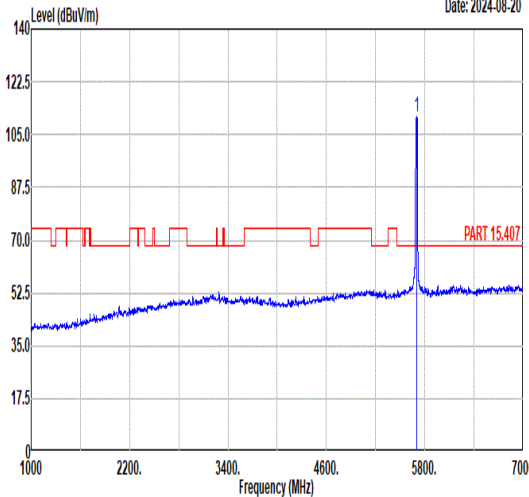
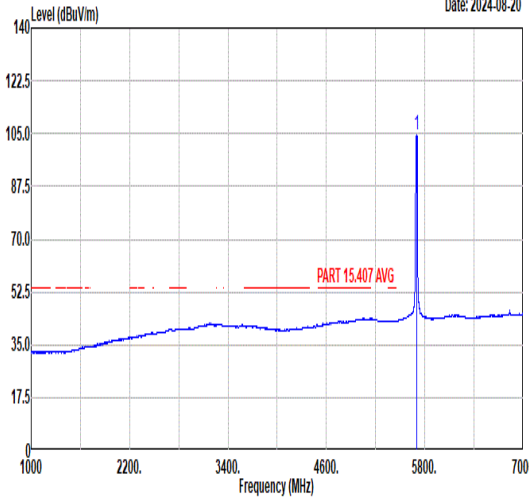


Mode	9																																																																																										
	Band Edge																																																																																										
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																										
ANT	CDD 9+15																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2024-08-20  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5727.07</td><td>64.20</td><td>68.30</td><td>-4.10</td><td>49.82</td><td>35.12</td><td>11.65</td><td>32.39</td><td>367</td><td>311</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5727.07	64.20	68.30	-4.10	49.82	35.12	11.65	32.39	367	311	PEAK	Level (dBuV/m) Date: 2024-08-20  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>111.15</td><td>-----</td><td>-----</td><td>96.78</td><td>35.08</td><td>11.66</td><td>32.37</td><td>367</td><td>311</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	111.15	-----	-----	96.78	35.08	11.66	32.37	367	311	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5727.07	64.20	68.30	-4.10	49.82	35.12	11.65	32.39	367	311	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5700.00	111.15	-----	-----	96.78	35.08	11.66	32.37	367	311	PEAK																																																																																
Avg	Blank						Level (dBuV/m) Date: 2024-08-20  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>104.49</td><td>-----</td><td>-----</td><td>90.12</td><td>35.08</td><td>11.66</td><td>32.37</td><td>367</td><td>311</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	104.49	-----	-----	90.12	35.08	11.66	32.37	367	311	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5700.00	104.49	-----	-----	90.12	35.08	11.66	32.37	367	311	AVERAGE																																																																																







Mode	9																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																											
ANT	CDD 9+15																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5736.50</td><td>56.78</td><td>68.30</td><td>-11.52</td><td>42.39</td><td>35.13</td><td>11.65</td><td>32.39</td><td>347</td><td>340</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5736.50	56.78	68.30	-11.52	42.39	35.13	11.65	32.39	347	340	PEAK	Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>107.11</td><td>-----</td><td>-----</td><td>92.74</td><td>35.08</td><td>11.66</td><td>32.37</td><td>347</td><td>340</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	107.11	-----	-----	92.74	35.08	11.66	32.37	347	340	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5736.50	56.78	68.30	-11.52	42.39	35.13	11.65	32.39	347	340	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	107.11	-----	-----	92.74	35.08	11.66	32.37	347	340	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2024-08-20 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>100.48</td><td>-----</td><td>-----</td><td>86.11</td><td>35.08</td><td>11.66</td><td>32.37</td><td>347</td><td>340</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	100.48	-----	-----	86.11	35.08	11.66	32.37	347	340	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	100.48	-----	-----	86.11	35.08	11.66	32.37	347	340	AVERAGE																																																																																	

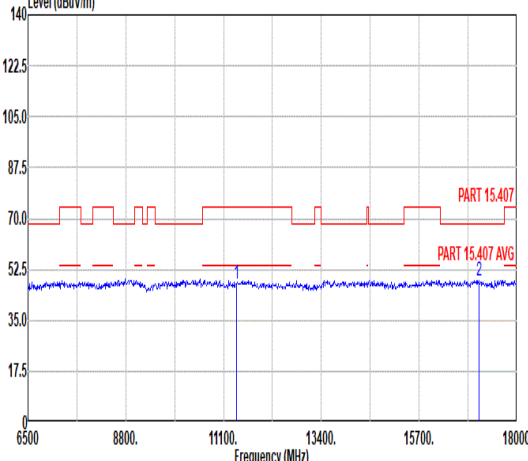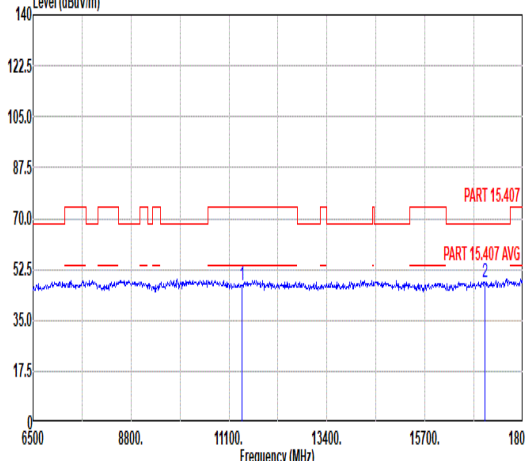

Mode	9																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>47.73</td><td>74.00</td><td>-26.27</td><td>43.95</td><td>39.72</td><td>14.78</td><td>50.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.45</td><td>68.30</td><td>-19.85</td><td>40.26</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	47.73	74.00	-26.27	43.95	39.72	14.78	50.72	--	--	Peak	2	17100.00	48.45	68.30	-19.85	40.26	42.46	17.53	51.80	--	--	Peak	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>47.12</td><td>74.00</td><td>-26.88</td><td>43.34</td><td>39.72</td><td>14.78</td><td>50.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.15</td><td>68.30</td><td>-20.15</td><td>39.96</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	47.12	74.00	-26.88	43.34	39.72	14.78	50.72	--	--	Peak	2	17100.00	48.15	68.30	-20.15	39.96	42.46	17.53	51.80	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																										
1	11400.00	47.73	74.00	-26.27	43.95	39.72	14.78	50.72	--	--	Peak																																																																																																									
2	17100.00	48.45	68.30	-19.85	40.26	42.46	17.53	51.80	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11400.00	47.12	74.00	-26.88	43.34	39.72	14.78	50.72	--	--	Peak																																																																																																									
2	17100.00	48.15	68.30	-20.15	39.96	42.46	17.53	51.80	--	--	Peak																																																																																																									

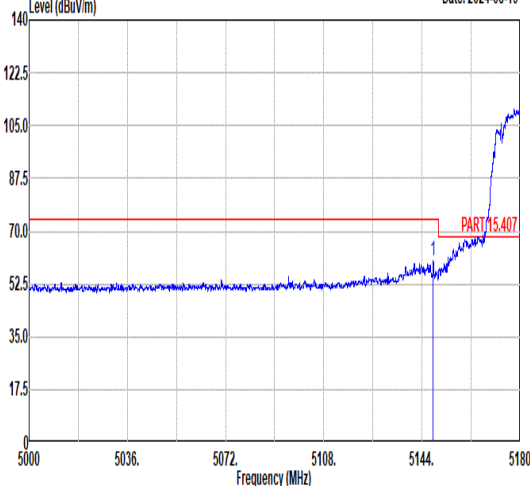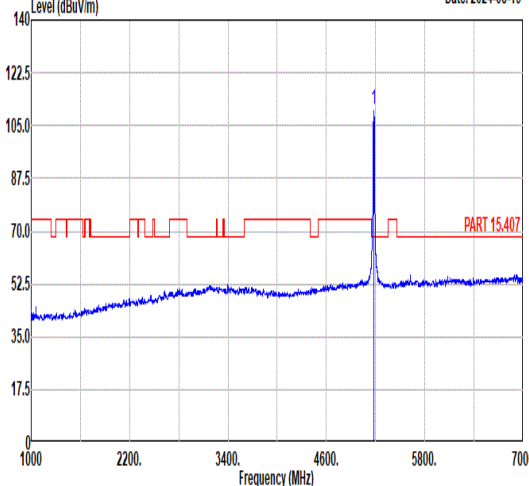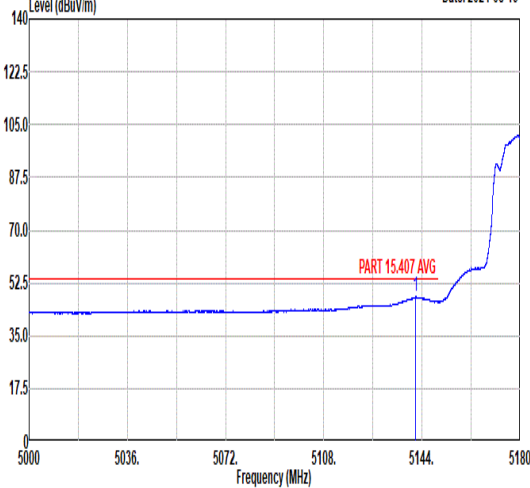
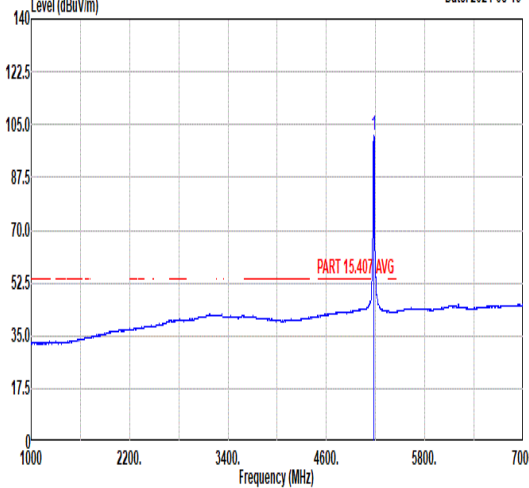


		10																																																																															
Mode		Band Edge																																																																															
		U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																															
ANT		CDD 9+15																																																																															
Pol.		Horizontal					Fundamental																																																																										
Peak	Level (dBuV/m) Date: 2024-08-19  Frequency (MHz)					Level (dBuV/m) Date: 2024-08-19  Frequency (MHz)																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5148.05</td><td>60.05</td><td>74.00</td><td>-13.95</td><td>45.87</td><td>34.87</td><td>11.09</td><td>31.78</td><td>169 311 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5148.05	60.05	74.00	-13.95	45.87	34.87	11.09	31.78	169 311 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5180.00</td><td>110.20</td><td>-----</td><td>-----</td><td>96.09</td><td>34.86</td><td>11.07</td><td>31.82</td><td>169 311 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5180.00	110.20	-----	-----	96.09	34.86	11.07	31.82
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1 5148.05	60.05	74.00	-13.95	45.87	34.87	11.09	31.78	169 311 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1 5180.00	110.20	-----	-----	96.09	34.86	11.07	31.82	169 311 PEAK																																																																									
Avg	Level (dBuV/m) Date: 2024-08-19  Frequency (MHz)					Level (dBuV/m) Date: 2024-08-19  Frequency (MHz)																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5141.75</td><td>48.06</td><td>54.00</td><td>-5.94</td><td>33.87</td><td>34.87</td><td>11.09</td><td>31.77</td><td>169 311 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5141.75	48.06	54.00	-5.94	33.87	34.87	11.09	31.77	169 311 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1 5180.00</td><td>101.23</td><td>-----</td><td>-----</td><td>87.12</td><td>34.86</td><td>11.07</td><td>31.82</td><td>169 311 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5180.00	101.23	-----	-----	87.12	34.86	11.07	31.82
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1 5141.75	48.06	54.00	-5.94	33.87	34.87	11.09	31.77	169 311 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																									
1 5180.00	101.23	-----	-----	87.12	34.86	11.07	31.82	169 311 AVERAGE																																																																									



		10																																																																																																																				
Mode		Band Edge																																																																																																																				
		U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																																																																				
ANT		CDD 9+15																																																																																																																				
Pol.		Vertical					Fundamental																																																																																																															
Peak	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5145.55</td><td>61.96</td><td>74.00</td><td>-12.04</td><td>47.78</td><td>34.87</td><td>11.09</td><td>31.78</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>294</td><td>2 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>108.40</td><td>-----</td><td>-----</td><td>94.29</td><td>34.86</td><td>11.07</td><td>31.82</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>294</td><td>2 PEAK</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5145.55	61.96	74.00	-12.04	47.78	34.87	11.09	31.78								cm	deg								294	2 PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5180.00	108.40	-----	-----	94.29	34.86	11.07	31.82								cm	deg								294	2 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5145.55	61.96	74.00	-12.04	47.78	34.87	11.09	31.78																																																																																																														
							cm	deg																																																																																																														
							294	2 PEAK																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5180.00	108.40	-----	-----	94.29	34.86	11.07	31.82																																																																																																														
							cm	deg																																																																																																														
							294	2 PEAK																																																																																																														
Avg	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5147.89</td><td>47.74</td><td>54.00</td><td>-6.26</td><td>33.56</td><td>34.87</td><td>11.09</td><td>31.78</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>294</td><td>2 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>99.54</td><td>-----</td><td>-----</td><td>85.43</td><td>34.86</td><td>11.07</td><td>31.82</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>cm</td><td>deg</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>294</td><td>2 AVERAGE</td></tr></tbody></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5147.89	47.74	54.00	-6.26	33.56	34.87	11.09	31.78								cm	deg								294	2 AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5180.00	99.54	-----	-----	85.43	34.86	11.07	31.82								cm	deg								294	2 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5147.89	47.74	54.00	-6.26	33.56	34.87	11.09	31.78																																																																																																														
							cm	deg																																																																																																														
							294	2 AVERAGE																																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																															
1	5180.00	99.54	-----	-----	85.43	34.86	11.07	31.82																																																																																																														
							cm	deg																																																																																																														
							294	2 AVERAGE																																																																																																														



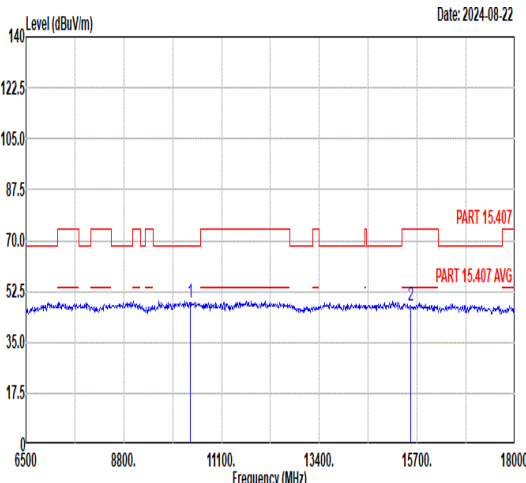
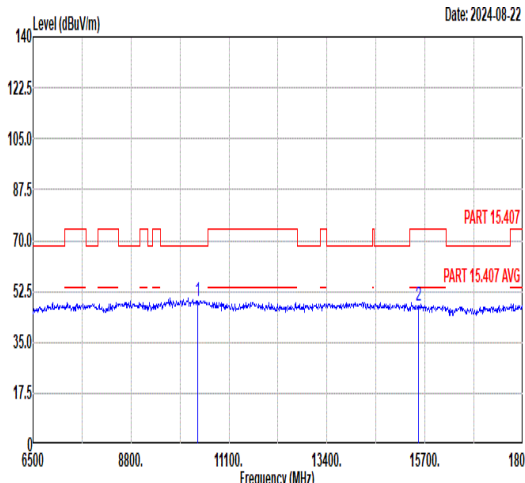


Mode	10																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH36_Full_5180MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>48.53</td><td>68.30</td><td>-19.77</td><td>45.71</td><td>39.44</td><td>14.15</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.53</td><td>74.00</td><td>-26.47</td><td>40.29</td><td>41.82</td><td>16.85</td><td>51.43</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.53	68.30	-19.77	45.71	39.44	14.15	50.77	--	--	Peak	2	15540.00	47.53	74.00	-26.47	40.29	41.82	16.85	51.43	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>48.97</td><td>68.30</td><td>-19.33</td><td>46.15</td><td>39.44</td><td>14.15</td><td>50.77</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.62</td><td>74.00</td><td>-26.38</td><td>40.38</td><td>41.82</td><td>16.85</td><td>51.43</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	48.97	68.30	-19.33	46.15	39.44	14.15	50.77	--	--	Peak	2	15540.00	47.62	74.00	-26.38	40.38	41.82	16.85	51.43	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10360.00	48.53	68.30	-19.77	45.71	39.44	14.15	50.77	--	--	Peak																																																																																																									
2	15540.00	47.53	74.00	-26.47	40.29	41.82	16.85	51.43	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10360.00	48.97	68.30	-19.33	46.15	39.44	14.15	50.77	--	--	Peak																																																																																																									
2	15540.00	47.62	74.00	-26.38	40.38	41.82	16.85	51.43	--	--	Peak																																																																																																									



Mode	11																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH44_Full_5220MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>49.08</td><td>68.30</td><td>-19.22</td><td>46.19</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>48.46</td><td>74.00</td><td>-25.54</td><td>41.15</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	49.08	68.30	-19.22	46.19	39.48	14.20	50.79	--	--	Peak	2	15660.00	48.46	74.00	-25.54	41.15	41.90	16.94	51.53	--	--	Peak	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>48.47</td><td>68.30</td><td>-19.83</td><td>45.58</td><td>39.48</td><td>14.20</td><td>50.79</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>48.16</td><td>74.00</td><td>-25.84</td><td>40.85</td><td>41.90</td><td>16.94</td><td>51.53</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	48.47	68.30	-19.83	45.58	39.48	14.20	50.79	--	--	Peak	2	15660.00	48.16	74.00	-25.84	40.85	41.90	16.94	51.53	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10440.00	49.08	68.30	-19.22	46.19	39.48	14.20	50.79	--	--	Peak																																																																																																									
2	15660.00	48.46	74.00	-25.54	41.15	41.90	16.94	51.53	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10440.00	48.47	68.30	-19.83	45.58	39.48	14.20	50.79	--	--	Peak																																																																																																									
2	15660.00	48.16	74.00	-25.84	40.85	41.90	16.94	51.53	--	--	Peak																																																																																																									

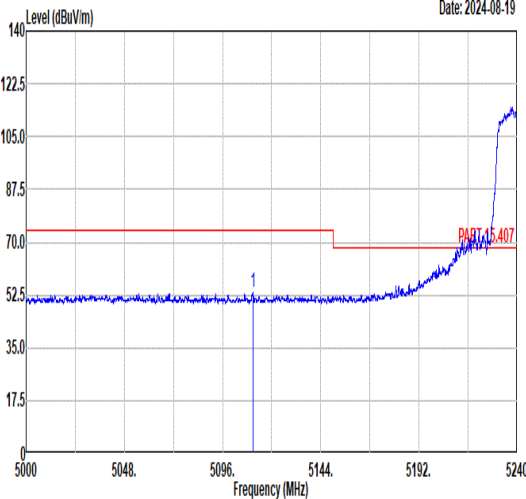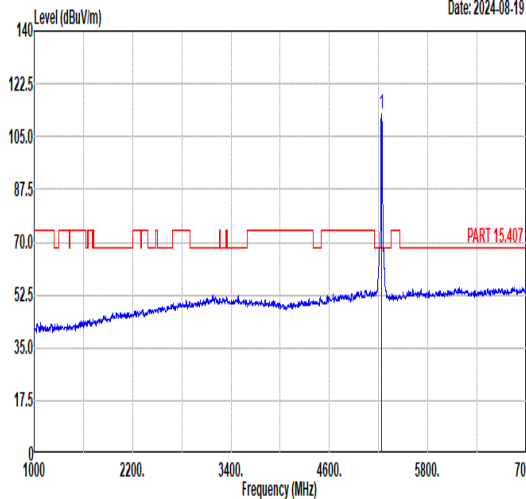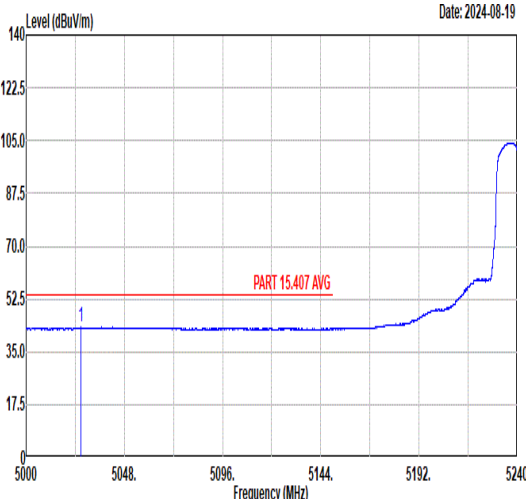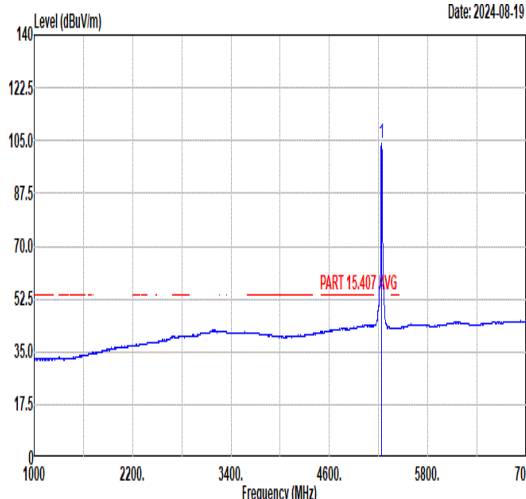

		12																																																																																																									
Mode		Band Edge - L																																																																																																									
		U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																																																																									
ANT		CDD 9+15																																																																																																									
Pol.		Horizontal					Fundamental																																																																																																				
Peak																																																																																																											
	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5110.76</td><td>53.20</td><td>74.00</td><td>-20.80</td><td>38.94</td><td>34.88</td><td>11.11</td><td>31.73</td><td>385</td><td>80 PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5110.76	53.20	74.00	-20.80	38.94	34.88	11.11	31.73	385	80 PEAK	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>112.32</td><td>-----</td><td>-----</td><td>98.32</td><td>34.85</td><td>11.03</td><td>31.88</td><td>385</td><td>80 PEAK</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5240.00	112.32	-----	-----	98.32	34.85	11.03	31.88	385
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5110.76	53.20	74.00	-20.80	38.94	34.88	11.11	31.73	385	80 PEAK																																																																																																	
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5240.00	112.32	-----	-----	98.32	34.85	11.03	31.88	385	80 PEAK																																																																																																	
Avg																																																																																																											
	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5026.76</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>28.75</td><td>34.89</td><td>11.15</td><td>31.63</td><td>385</td><td>80 AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5026.76	43.16	54.00	-10.84	28.75	34.89	11.15	31.63	385	80 AVERAGE	<table><tr><th colspan="2"></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5240.00</td><td>104.00</td><td>-----</td><td>-----</td><td>90.00</td><td>34.85</td><td>11.03</td><td>31.88</td><td>385</td><td>80 AVERAGE</td></tr></table>												Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg		1	5240.00	104.00	-----	-----	90.00	34.85	11.03	31.88	385
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5026.76	43.16	54.00	-10.84	28.75	34.89	11.15	31.63	385	80 AVERAGE																																																																																																	
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor				Remark																																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	5240.00	104.00	-----	-----	90.00	34.85	11.03	31.88	385	80 AVERAGE																																																																																																	



Mode	12																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																										
ANT	CDD 9+15																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2024-08-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5427.35</td><td>52.53</td><td>74.00</td><td>-21.47</td><td>38.86</td><td>34.81</td><td>10.98</td><td>32.12</td><td>385</td><td>80 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5427.35	52.53	74.00	-21.47	38.86	34.81	10.98	32.12	385	80 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5427.35	52.53	74.00	-21.47	38.86	34.81	10.98	32.12	385	80 PEAK																																	
Avg	Date: 2024-08-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.43</td><td>42.19</td><td>54.00</td><td>-11.81</td><td>28.45</td><td>34.83</td><td>10.94</td><td>32.03</td><td>385</td><td>80 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5353.43	42.19	54.00	-11.81	28.45	34.83	10.94	32.03	385	80 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5353.43	42.19	54.00	-11.81	28.45	34.83	10.94	32.03	385	80 AVERAGE																																	





Mode	12																																					
	Band Edge - L																																					
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																					
ANT	CDD 9+15																																					
Pol.	Vertical	Fundamental																																				
Peak	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5096.38</td><td>53.49</td><td>74.00</td><td>-20.51</td><td>39.21</td><td>34.88</td><td>11.12</td><td>31.72</td><td>225 358 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1 5096.38	53.49	74.00	-20.51	39.21	34.88	11.12	31.72	225 358 PEAK	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5240.00</td><td>109.26</td><td>-----</td><td>-----</td><td>95.27</td><td>34.85</td><td>11.03</td><td>31.89</td><td>225 358 PEAK</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1 5240.00	109.26	-----	-----	95.27	34.85	11.03	31.89	225 358 PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																													
1 5096.38	53.49	74.00	-20.51	39.21	34.88	11.12	31.72	225 358 PEAK																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																														
1 5240.00	109.26	-----	-----	95.27	34.85	11.03	31.89	225 358 PEAK																														
Avg	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5149.88</td><td>43.29</td><td>54.00</td><td>-10.71</td><td>29.11</td><td>34.87</td><td>11.09</td><td>31.78</td><td>225 358 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1 5149.88	43.29	54.00	-10.71	29.11	34.87	11.09	31.78	225 358 AVERAGE	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1 5240.00</td><td>100.37</td><td>-----</td><td>-----</td><td>86.38</td><td>34.85</td><td>11.03</td><td>31.89</td><td>225 358 AVERAGE</td></tr></table>	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1 5240.00	100.37	-----	-----	86.38	34.85	11.03	31.89	225 358 AVERAGE
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																														
1 5149.88	43.29	54.00	-10.71	29.11	34.87	11.09	31.78	225 358 AVERAGE																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																														
1 5240.00	100.37	-----	-----	86.38	34.85	11.03	31.89	225 358 AVERAGE																														







Mode	12																																																	
	Band Edge - R																																																	
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																	
ANT	CDD 9+15																																																	
Pol.	Vertical						Fundamental																																											
Peak	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>5378.71</td><td>52.38</td><td>74.00</td><td>-21.62</td><td>38.70</td><td>34.82</td><td>10.92</td><td>32.06</td><td>225</td><td>358</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	5378.71	52.38	74.00	-21.62	38.70	34.82	10.92	32.06	225	358	PEAK	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																										
1	5378.71	52.38	74.00	-21.62	38.70	34.82	10.92	32.06	225	358	PEAK																																							
Avg	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr></thead><tbody><tr><td>1</td><td>5355.85</td><td>42.36</td><td>54.00</td><td>-11.64</td><td>28.63</td><td>34.83</td><td>10.94</td><td>32.04</td><td>225</td><td>358</td><td>AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	1	5355.85	42.36	54.00	-11.64	28.63	34.83	10.94	32.04	225	358	AVERAGE	Blank				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm																																										
1	5355.85	42.36	54.00	-11.64	28.63	34.83	10.94	32.04	225	358	AVERAGE																																							

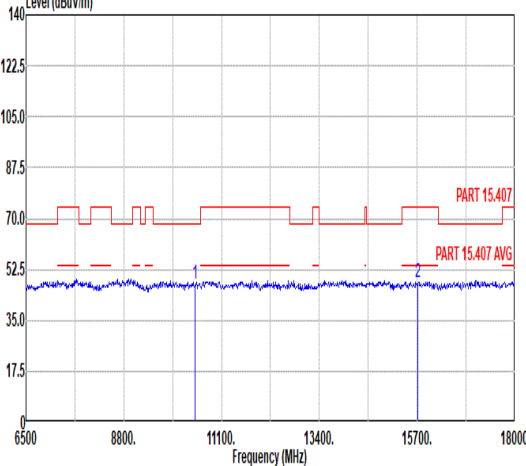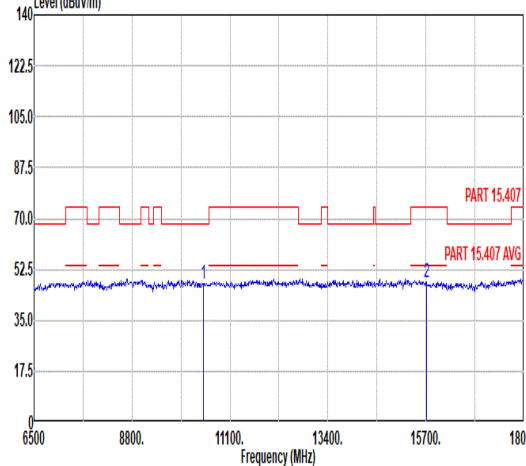

Mode	12																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11be EHT20_CH48_Full_5240MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.40</td><td>68.30</td><td>-20.90</td><td>44.48</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.09</td><td>74.00</td><td>-25.91</td><td>40.75</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	47.40	68.30	-20.90	44.48	39.49	14.23	50.80	--	--	Peak	2	15720.00	48.09	74.00	-25.91	40.75	41.93	16.99	51.58	--	--	Peak	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.30</td><td>68.30</td><td>-21.00</td><td>44.38</td><td>39.49</td><td>14.23</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.22</td><td>74.00</td><td>-25.78</td><td>40.88</td><td>41.93</td><td>16.99</td><td>51.58</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	47.30	68.30	-21.00	44.38	39.49	14.23	50.80	--	--	Peak	2	15720.00	48.22	74.00	-25.78	40.88	41.93	16.99	51.58	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10480.00	47.40	68.30	-20.90	44.48	39.49	14.23	50.80	--	--	Peak																																																																																																									
2	15720.00	48.09	74.00	-25.91	40.75	41.93	16.99	51.58	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10480.00	47.30	68.30	-21.00	44.38	39.49	14.23	50.80	--	--	Peak																																																																																																									
2	15720.00	48.22	74.00	-25.78	40.88	41.93	16.99	51.58	--	--	Peak																																																																																																									

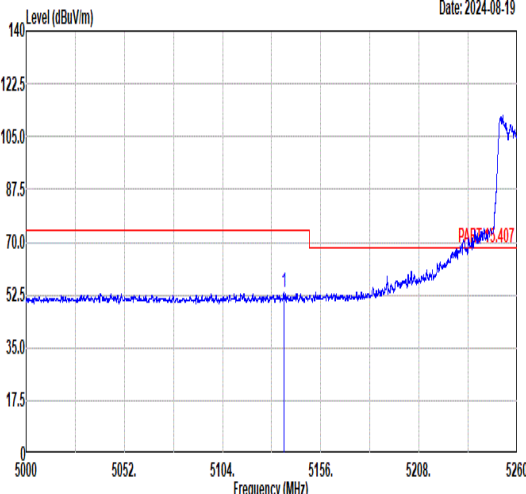
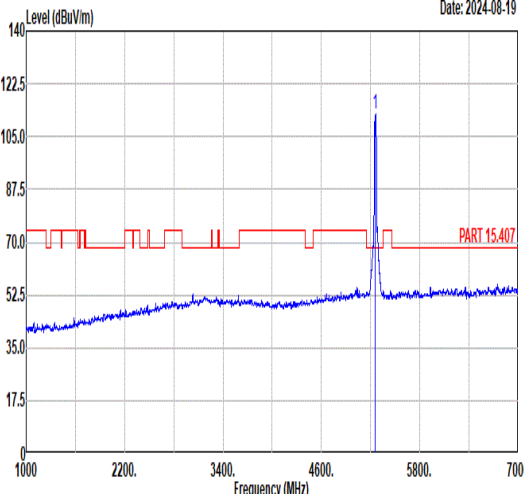
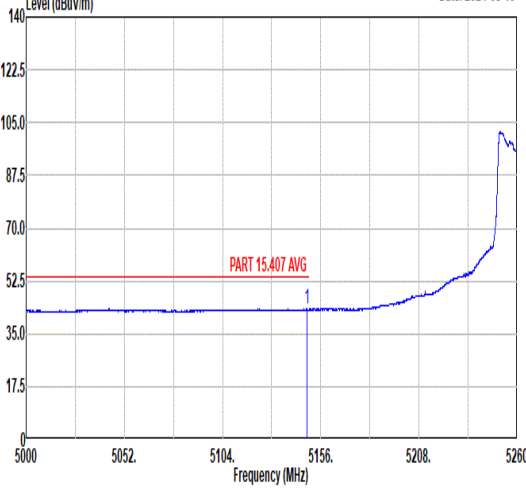
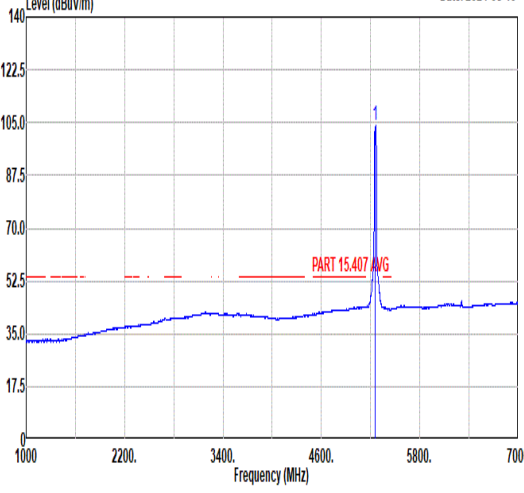


		13																																																																																							
Mode		Band Edge - L																																																																																							
		U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full_5260MHz																																																																																							
ANT		CDD 9+15																																																																																							
Pol.		Horizontal					Fundamental																																																																																		
Peak																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5136.40</td><td>53.13</td><td>74.00</td><td>-20.87</td><td>38.93</td><td>34.87</td><td>11.09</td><td>31.76</td><td>324 305 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5136.40	53.13	74.00	-20.87	38.93	34.87	11.09	31.76	324 305 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>112.74</td><td>-----</td><td>98.80</td><td>34.85</td><td>11.01</td><td>31.92</td><td>324</td><td>305 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	112.74	-----	98.80	34.85	11.01	31.92	324
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5136.40	53.13	74.00	-20.87	38.93	34.87	11.09	31.76	324 305 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5260.00	112.74	-----	98.80	34.85	11.01	31.92	324	305 PEAK																																																																																
Avg																																																																																									
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.59</td><td>43.16</td><td>54.00</td><td>-10.84</td><td>28.98</td><td>34.87</td><td>11.09</td><td>31.78</td><td>324 305 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5148.59	43.16	54.00	-10.84	28.98	34.87	11.09	31.78	324 305 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>104.09</td><td>-----</td><td>90.15</td><td>34.85</td><td>11.01</td><td>31.92</td><td>324</td><td>305 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	104.09	-----	90.15	34.85	11.01	31.92	324
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5148.59	43.16	54.00	-10.84	28.98	34.87	11.09	31.78	324 305 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5260.00	104.09	-----	90.15	34.85	11.01	31.92	324	305 AVERAGE																																																																																





Mode	13																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full_5260MHz																																									
ANT	CDD 9+15																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5383.30</td><td>53.34</td><td>74.00</td><td>-20.66</td><td>39.67</td><td>34.82</td><td>10.92</td><td>32.07</td><td>324 305 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5383.30	53.34	74.00	-20.66	39.67	34.82	10.92	32.07	324 305 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5383.30	53.34	74.00	-20.66	39.67	34.82	10.92	32.07	324 305 PEAK																																	
Avg	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.52</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>29.29</td><td>34.83</td><td>10.94</td><td>32.03</td><td>324 305 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.52	43.03	54.00	-10.97	29.29	34.83	10.94	32.03	324 305 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.52	43.03	54.00	-10.97	29.29	34.83	10.94	32.03	324 305 AVERAGE																																	

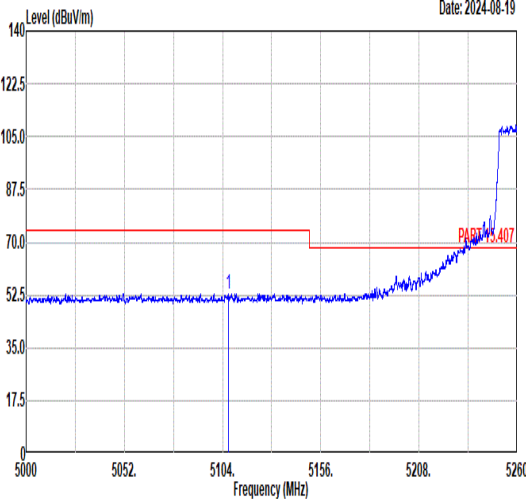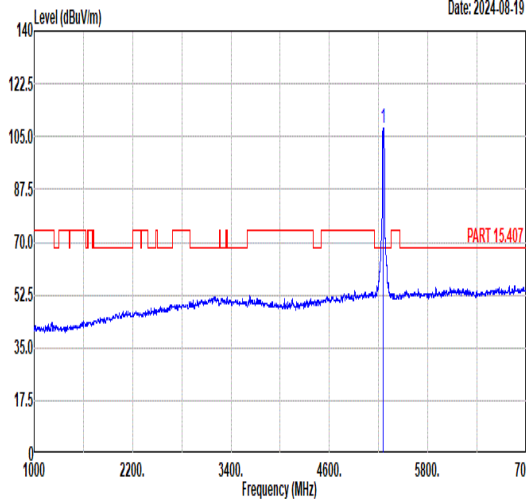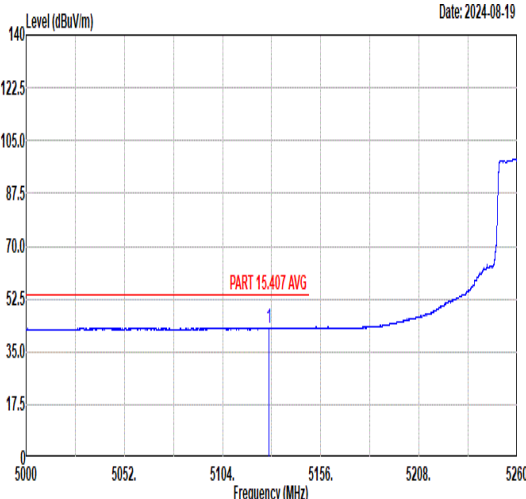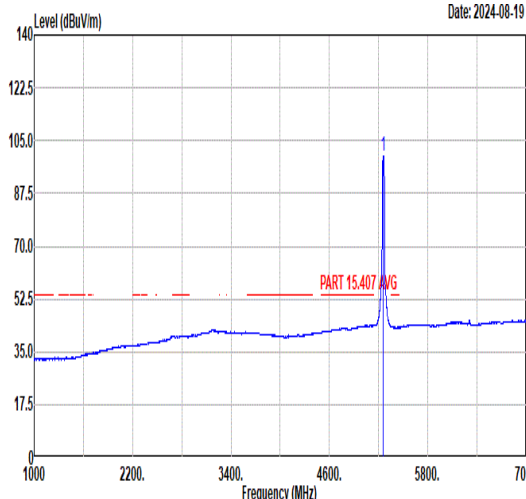

		13																																																																																		
Mode		Band Edge - L																																																																																		
		U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full_5260MHz																																																																																		
ANT		CDD 9+15																																																																																		
Pol.		Vertical					Fundamental																																																																													
Peak																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5107.02	53.09	74.00	-20.91	38.83	34.88	11.11	31.73	272	360 PEAK		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5260.00	107.77	-----	-----	93.81	34.85	11.02	31.91	272	360 PEAK				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5107.02	53.09	74.00	-20.91	38.83	34.88	11.11	31.73	272	360 PEAK																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5260.00	107.77	-----	-----	93.81	34.85	11.02	31.91	272	360 PEAK																																																																											
Avg																																																																																				
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5128.60	42.96	54.00	-11.04	28.74	34.87	11.10	31.75	272	360 AVERAGE		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5260.00	99.76	-----	-----	85.82	34.85	11.01	31.92	272	360 AVERAGE				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5128.60	42.96	54.00	-11.04	28.74	34.87	11.10	31.75	272	360 AVERAGE																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																											
1 5260.00	99.76	-----	-----	85.82	34.85	11.01	31.92	272	360 AVERAGE																																																																											



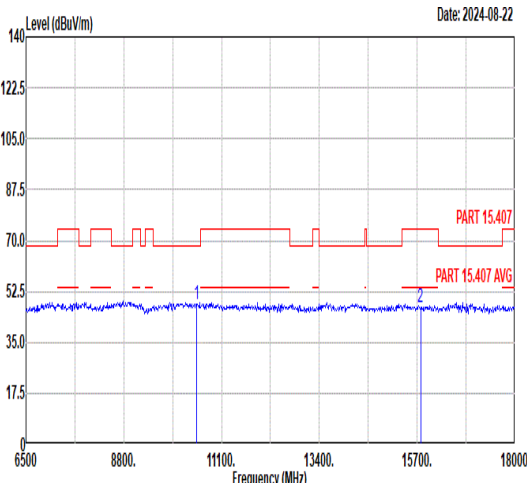
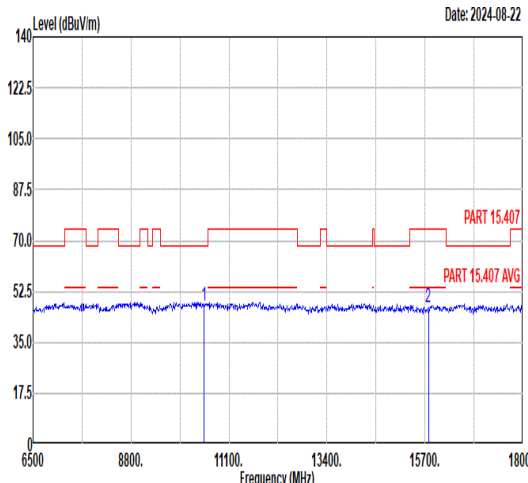


Mode	13																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11be EHT20_CH52_Full_5260MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>48.22</td><td>68.30</td><td>-20.08</td><td>45.27</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.04</td><td>74.00</td><td>-26.96</td><td>39.66</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	48.22	68.30	-20.08	45.27	39.50	14.25	50.80	--	--	Peak	2	15780.00	47.04	74.00	-26.96	39.66	41.97	17.04	51.63	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>47.56</td><td>68.30</td><td>-20.74</td><td>44.61</td><td>39.50</td><td>14.25</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>39.90</td><td>41.97</td><td>17.04</td><td>51.63</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10520.00	47.56	68.30	-20.74	44.61	39.50	14.25	50.80	--	--	Peak	2	15780.00	47.28	74.00	-26.72	39.90	41.97	17.04	51.63	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10520.00	48.22	68.30	-20.08	45.27	39.50	14.25	50.80	--	--	Peak																																																																																																									
2	15780.00	47.04	74.00	-26.96	39.66	41.97	17.04	51.63	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10520.00	47.56	68.30	-20.74	44.61	39.50	14.25	50.80	--	--	Peak																																																																																																									
2	15780.00	47.28	74.00	-26.72	39.90	41.97	17.04	51.63	--	--	Peak																																																																																																									







Mode	14																																																																																																	
	Harmonic																																																																																																	
	U-NII-2A_5.25-5.35_802.11be EHT20_CH60_Full_5300MHz																																																																																																	
ANT	CDD 9+15																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	Level (dBuV/m) Date: 2024-08-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10600.00</td><td>48.95</td><td>74.00</td><td>-25.05</td><td>45.97</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15900.00</td><td>48.58</td><td>74.00</td><td>-25.42</td><td>41.12</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10600.00	48.95	74.00	-25.05	45.97	39.48	14.30	50.80	--	-- Peak	2 15900.00	48.58	74.00	-25.42	41.12	42.04	17.14	51.72	--	-- Peak	Level (dBuV/m) Date: 2024-08-22 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10600.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>44.94</td><td>39.48</td><td>14.30</td><td>50.80</td><td>--</td><td>-- Peak</td></tr><tr><td>2 15900.00</td><td>48.71</td><td>74.00</td><td>-25.29</td><td>41.25</td><td>42.04</td><td>17.14</td><td>51.72</td><td>--</td><td>-- Peak</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10600.00	47.92	74.00	-26.08	44.94	39.48	14.30	50.80	--	-- Peak	2 15900.00	48.71	74.00	-25.29	41.25	42.04	17.14	51.72	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10600.00	48.95	74.00	-25.05	45.97	39.48	14.30	50.80	--	-- Peak																																																																																									
2 15900.00	48.58	74.00	-25.42	41.12	42.04	17.14	51.72	--	-- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1 10600.00	47.92	74.00	-26.08	44.94	39.48	14.30	50.80	--	-- Peak																																																																																									
2 15900.00	48.71	74.00	-25.29	41.25	42.04	17.14	51.72	--	-- Peak																																																																																									

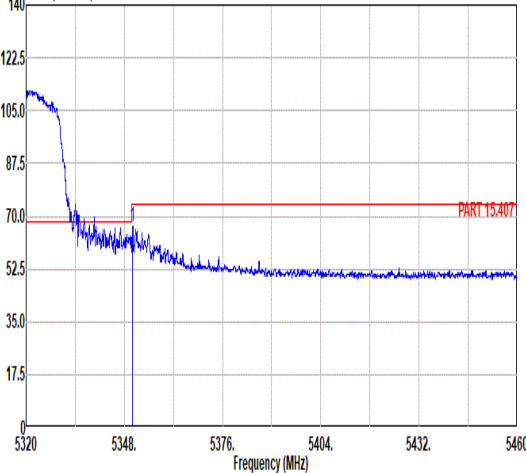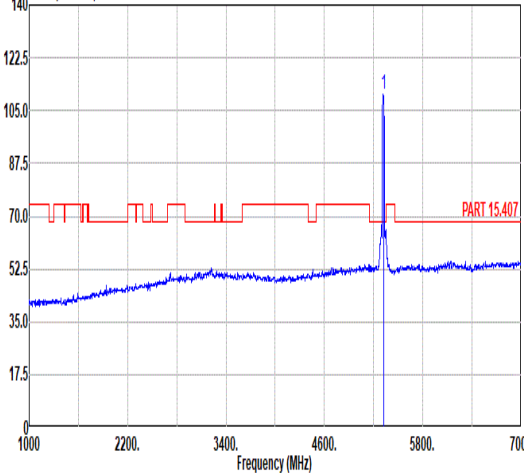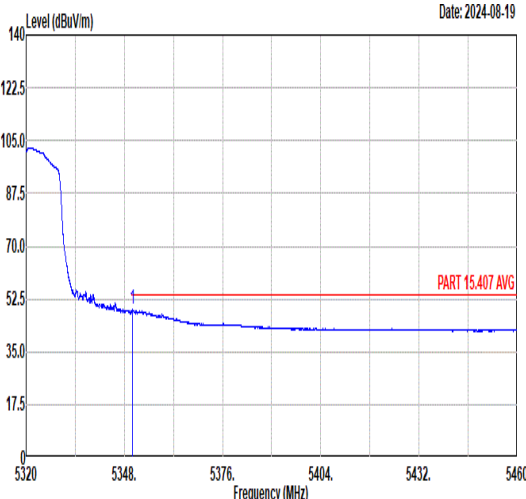
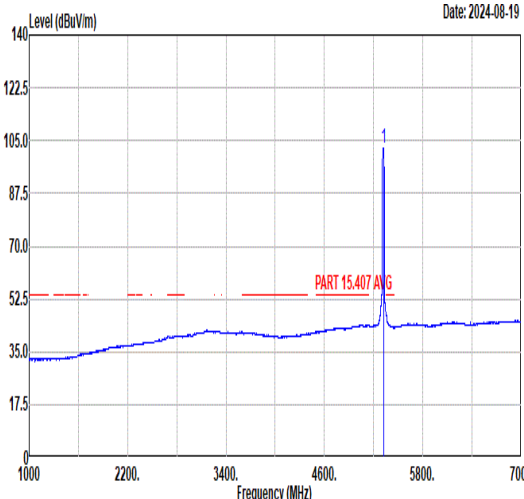


Mode	15																																																																																			
	Band Edge																																																																																			
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full_5320MHz																																																																																			
ANT	CDD 9+15																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	Level (dBuV/m) Date: 2024-08-19  532053485376540454325460 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.31</td><td>66.47</td><td>74.00</td><td>-7.53</td><td>52.73</td><td>34.83</td><td>10.94</td><td>32.03</td><td>146</td><td>310 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.31	66.47	74.00	-7.53	52.73	34.83	10.94	32.03	146	310 PEAK	Level (dBuV/m) Date: 2024-08-19  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>110.49</td><td>-----</td><td>-----</td><td>96.66</td><td>34.84</td><td>10.97</td><td>31.98</td><td>146</td><td>310 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	110.49	-----	-----	96.66	34.84	10.97	31.98	146	310 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5350.31	66.47	74.00	-7.53	52.73	34.83	10.94	32.03	146	310 PEAK																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	110.49	-----	-----	96.66	34.84	10.97	31.98	146	310 PEAK																																																																										
Avg	Level (dBuV/m) Date: 2024-08-19  532053485376540454325460 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.31</td><td>49.24</td><td>54.00</td><td>-4.76</td><td>35.50</td><td>34.83</td><td>10.94</td><td>32.03</td><td>146</td><td>310 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.31	49.24	54.00	-4.76	35.50	34.83	10.94	32.03	146	310 AVERAGE	Level (dBuV/m) Date: 2024-08-19  100022003400460058007000 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>102.52</td><td>-----</td><td>-----</td><td>88.70</td><td>34.84</td><td>10.97</td><td>31.99</td><td>146</td><td>310 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	102.52	-----	-----	88.70	34.84	10.97	31.99	146	310 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5350.31	49.24	54.00	-4.76	35.50	34.83	10.94	32.03	146	310 AVERAGE																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	5320.00	102.52	-----	-----	88.70	34.84	10.97	31.99	146	310 AVERAGE																																																																										

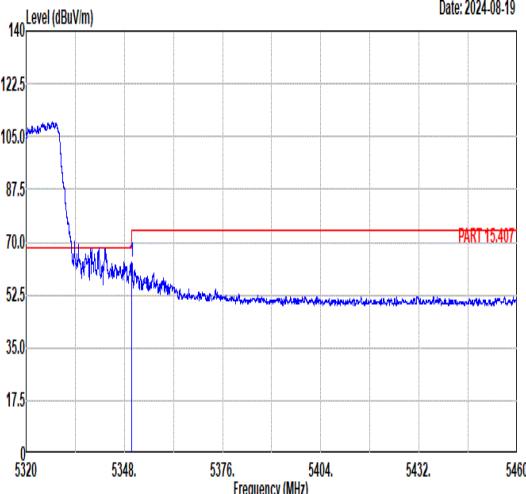
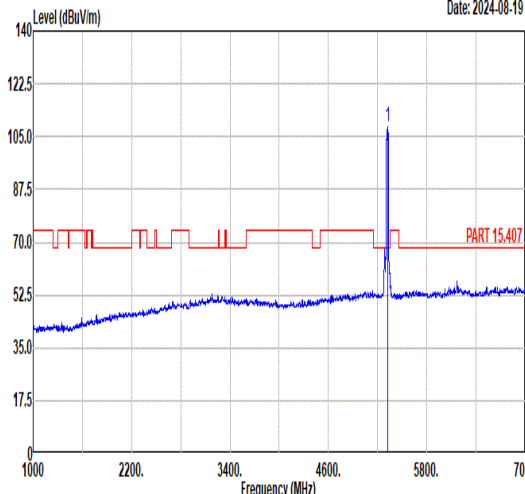
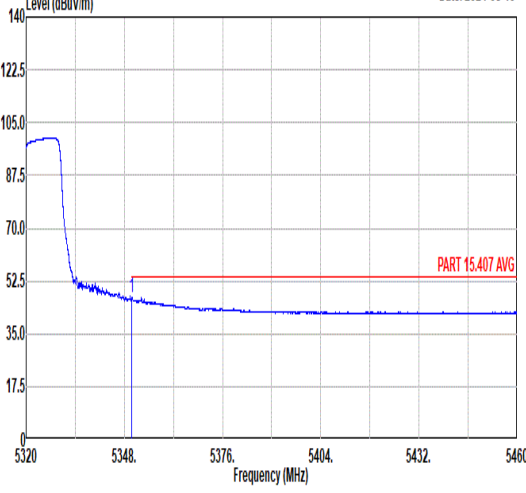
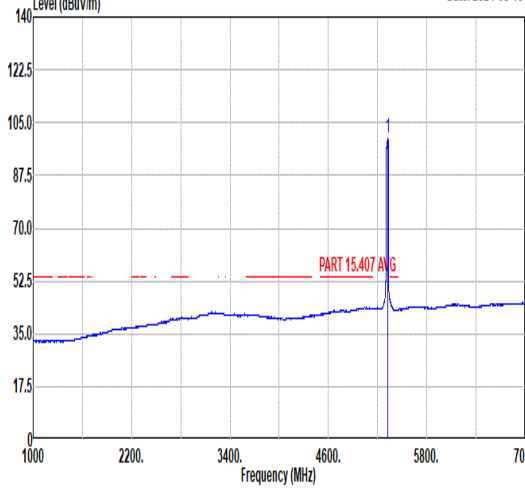


		15																																																																																								
Mode		Band Edge																																																																																								
		U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full_5320MHz																																																																																								
ANT		CDD 9+15																																																																																								
Pol.		Vertical					Fundamental																																																																																			
Peak	 Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.17</td><td>63.43</td><td>74.00</td><td>-10.57</td><td>49.69</td><td>34.83</td><td>10.94</td><td>32.03</td><td>292 355 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.17	63.43	74.00	-10.57	49.69	34.83	10.94	32.03	292 355 PEAK	 Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>108.37</td><td>-----</td><td>-----</td><td>94.57</td><td>34.84</td><td>10.96</td><td>32.00</td><td>292 355 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	108.37	-----	-----	94.57	34.84	10.96	32.00	292 355 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.17	63.43	74.00	-10.57	49.69	34.83	10.94	32.03	292 355 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	108.37	-----	-----	94.57	34.84	10.96	32.00	292 355 PEAK																																																																																	
Avg	 Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.17</td><td>47.12</td><td>54.00</td><td>-6.88</td><td>33.38</td><td>34.83</td><td>10.94</td><td>32.03</td><td>292 355 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.17	47.12	54.00	-6.88	33.38	34.83	10.94	32.03	292 355 AVERAGE	 Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>99.68</td><td>-----</td><td>-----</td><td>85.88</td><td>34.84</td><td>10.96</td><td>32.00</td><td>292 355 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	99.68	-----	-----	85.88	34.84	10.96	32.00	292 355 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.17	47.12	54.00	-6.88	33.38	34.83	10.94	32.03	292 355 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	99.68	-----	-----	85.88	34.84	10.96	32.00	292 355 AVERAGE																																																																																	

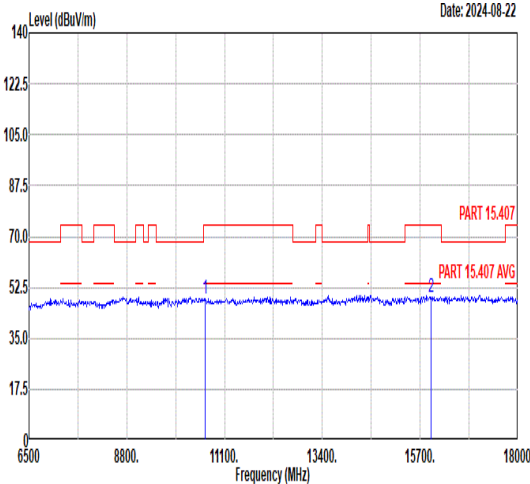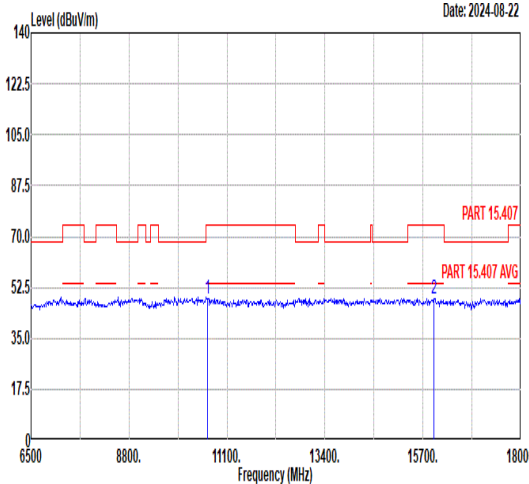

Mode	15																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2A_5.25-5.35_802.11be EHT20_CH64_Full_5320MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg																																																																																																																				
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>48.55</td><td>74.00</td><td>-25.45</td><td>45.56</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>49.33</td><td>74.00</td><td>-24.67</td><td>41.83</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	48.55	74.00	-25.45	45.56	39.47	14.32	50.80	--	--	Peak	2	15960.00	49.33	74.00	-24.67	41.83	42.08	17.19	51.77	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>48.63</td><td>74.00</td><td>-25.37</td><td>45.64</td><td>39.47</td><td>14.32</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>48.51</td><td>74.00</td><td>-25.49</td><td>41.01</td><td>42.08</td><td>17.19</td><td>51.77</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	48.63	74.00	-25.37	45.64	39.47	14.32	50.80	--	--	Peak	2	15960.00	48.51	74.00	-25.49	41.01	42.08	17.19	51.77	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10640.00	48.55	74.00	-25.45	45.56	39.47	14.32	50.80	--	--	Peak																																																																																																									
2	15960.00	49.33	74.00	-24.67	41.83	42.08	17.19	51.77	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	10640.00	48.63	74.00	-25.37	45.64	39.47	14.32	50.80	--	--	Peak																																																																																																									
2	15960.00	48.51	74.00	-25.49	41.01	42.08	17.19	51.77	--	--	Peak																																																																																																									

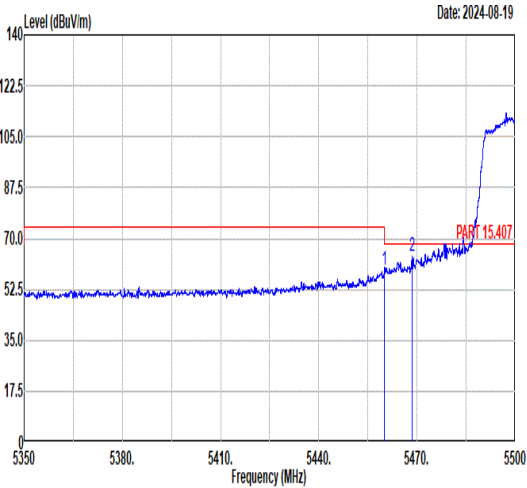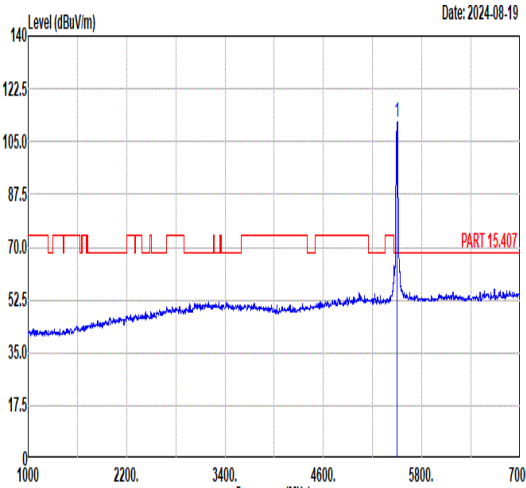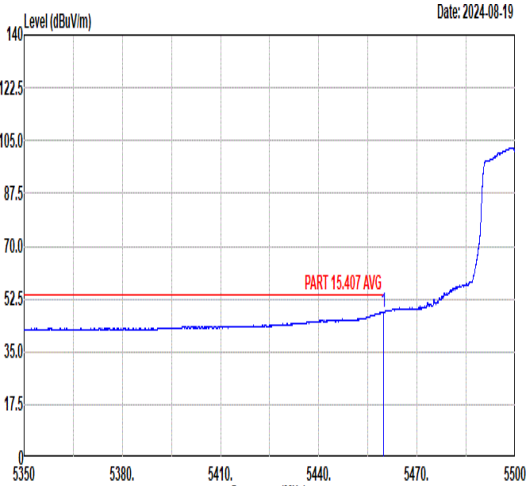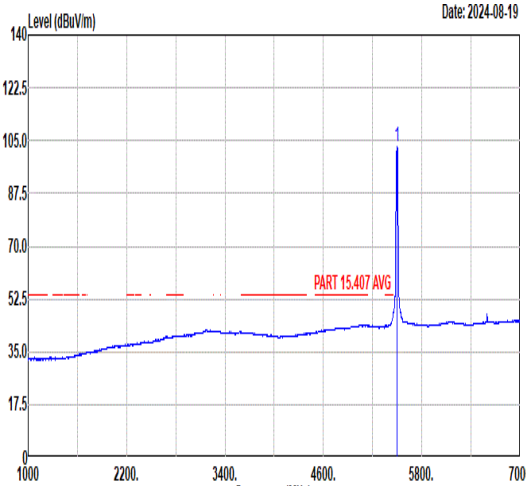

		16																																																																																												
Mode		Band Edge																																																																																												
		U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Full_5500MHz																																																																																												
ANT		CDD 9+15																																																																																												
Pol.		Horizontal					Fundamental																																																																																							
Peak																																																																																														
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5460.00	59.25	74.00	-14.75	45.49	34.81	11.12	32.17	188 323 PEAK	2	5468.43	63.78	68.30	-4.52	49.99	34.81	11.16	32.18	188 323 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>111.41</td><td>-----</td><td>-----</td><td>97.51</td><td>34.81</td><td>11.30</td><td>32.21</td><td>188 323 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	111.41	-----	-----	97.51	34.81	11.30	32.21
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5460.00	59.25	74.00	-14.75	45.49	34.81	11.12	32.17	188 323 PEAK																																																																																					
2	5468.43	63.78	68.30	-4.52	49.99	34.81	11.16	32.18	188 323 PEAK																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	111.41	-----	-----	97.51	34.81	11.30	32.21	188 323 PEAK																																																																																					
Avg																																																																																														
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.88	48.27	54.00	-5.73	34.51	34.81	11.12	32.17	188 323 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>102.92</td><td>-----</td><td>-----</td><td>89.06</td><td>34.80</td><td>11.27</td><td>32.21</td><td>188 323 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	102.92	-----	-----	89.06	34.80	11.27	32.21	188 323 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5459.88	48.27	54.00	-5.73	34.51	34.81	11.12	32.17	188 323 AVERAGE																																																																																					
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	102.92	-----	-----	89.06	34.80	11.27	32.21	188 323 AVERAGE																																																																																					





Mode	16																																																			
	Band Edge																																																			
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Full_5500MHz																																																			
ANT	CDD 9+15																																																			
Pol.	Vertical	Fundamental																																																		
Peak	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5457.63</td><td>55.27</td><td>74.00</td><td>-18.73</td><td>41.51</td><td>34.81</td><td>11.11</td><td>32.16</td><td>318 360 PEAK</td></tr><tr><td>2</td><td>5467.54</td><td>60.89</td><td>68.30</td><td>-7.41</td><td>47.10</td><td>34.81</td><td>11.15</td><td>32.17</td><td>318 360 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5457.63	55.27	74.00	-18.73	41.51	34.81	11.11	32.16	318 360 PEAK	2	5467.54	60.89	68.30	-7.41	47.10	34.81	11.15	32.17	318 360 PEAK	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5500.00</td><td>108.87</td><td>-----</td><td>-----</td><td>94.97</td><td>34.81</td><td>11.30</td><td>32.21</td><td>318 360 PEAK</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5500.00	108.87	-----	-----	94.97	34.81	11.30	32.21	318 360 PEAK
		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																										
1	5457.63	55.27	74.00	-18.73	41.51	34.81	11.11	32.16	318 360 PEAK																																											
2	5467.54	60.89	68.30	-7.41	47.10	34.81	11.15	32.17	318 360 PEAK																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																											
1	5500.00	108.87	-----	-----	94.97	34.81	11.30	32.21	318 360 PEAK																																											
Avg	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5460.00</td><td>45.73</td><td>54.00</td><td>-8.27</td><td>31.97</td><td>34.81</td><td>11.12</td><td>32.17</td><td>318 360 AVERAGE</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5460.00	45.73	54.00	-8.27	31.97	34.81	11.12	32.17	318 360 AVERAGE	Level (dBuV/m) Date: 2024-08-19 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor cm deg Remark <table><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5500.00</td><td>100.15</td><td>-----</td><td>-----</td><td>86.30</td><td>34.80</td><td>11.25</td><td>32.20</td><td>318 360 AVERAGE</td></tr></table>		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5500.00	100.15	-----	-----	86.30	34.80	11.25	32.20	318 360 AVERAGE										
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																											
1	5460.00	45.73	54.00	-8.27	31.97	34.81	11.12	32.17	318 360 AVERAGE																																											
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																											
1	5500.00	100.15	-----	-----	86.30	34.80	11.25	32.20	318 360 AVERAGE																																											






Mode	16																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11be EHT20_CH100_Full_5500MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>47.63</td><td>74.00</td><td>-26.37</td><td>44.49</td><td>39.40</td><td>14.54</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.83</td><td>68.30</td><td>-19.47</td><td>40.87</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	47.63	74.00	-26.37	44.49	39.40	14.54	50.80	--	--	Peak	2	16500.00	48.83	68.30	-19.47	40.87	42.40	17.36	51.80	--	--	Peak	Level (dBuV/m) Date: 2024-08-22 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11000.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>44.83</td><td>39.40</td><td>14.54</td><td>50.80</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>16500.00</td><td>48.92</td><td>68.30</td><td>-19.38</td><td>40.96</td><td>42.40</td><td>17.36</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	47.97	74.00	-26.03	44.83	39.40	14.54	50.80	--	--	Peak	2	16500.00	48.92	68.30	-19.38	40.96	42.40	17.36	51.80	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																										
1	11000.00	47.63	74.00	-26.37	44.49	39.40	14.54	50.80	--	--	Peak																																																																																																									
2	16500.00	48.83	68.30	-19.47	40.87	42.40	17.36	51.80	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11000.00	47.97	74.00	-26.03	44.83	39.40	14.54	50.80	--	--	Peak																																																																																																									
2	16500.00	48.92	68.30	-19.38	40.96	42.40	17.36	51.80	--	--	Peak																																																																																																									

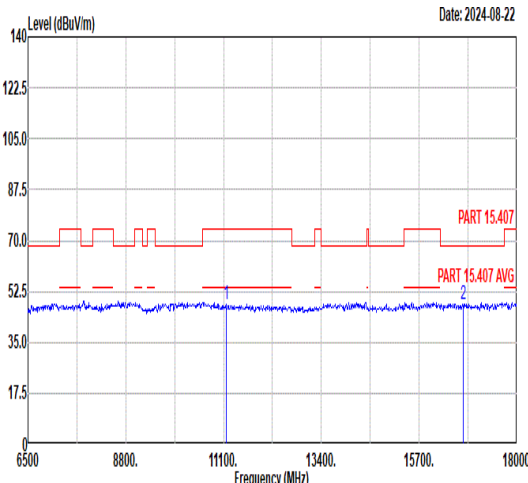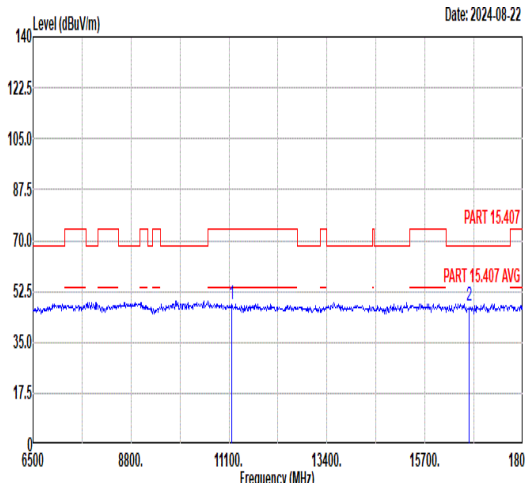

Mode	17																																																																																																																						
	Harmonic																																																																																																																						
	U-NII-2C_5.47-5.725_802.11be EHT20_CH116_Full_5580MHz																																																																																																																						
ANT	CDD 9+15																																																																																																																						
Pol.	Horizontal						Vertical																																																																																																																
Peak Avg																																																																																																																							
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>47.86</td><td>74.00</td><td>-26.14</td><td>44.46</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.82</td><td>68.30</td><td>-20.48</td><td>39.69</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>-- Peak</td></tr></table>								Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	47.86	74.00	-26.14	44.46	39.53	14.64	50.77	--	-- Peak	2	16740.00	47.82	68.30	-20.48	39.69	42.45	17.43	51.75	--	-- Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11160.00</td><td>48.11</td><td>74.00</td><td>-25.89</td><td>44.71</td><td>39.53</td><td>14.64</td><td>50.77</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>16740.00</td><td>47.30</td><td>68.30</td><td>-21.00</td><td>39.17</td><td>42.45</td><td>17.43</td><td>51.75</td><td>--</td><td>-- Peak</td></tr></table>							Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	11160.00	48.11	74.00	-25.89	44.71	39.53	14.64	50.77	--	-- Peak	2	16740.00	47.30	68.30	-21.00	39.17	42.45	17.43	51.75	--	-- Peak
			Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11160.00	47.86	74.00	-26.14	44.46	39.53	14.64	50.77	--	-- Peak																																																																																																													
2	16740.00	47.82	68.30	-20.48	39.69	42.45	17.43	51.75	--	-- Peak																																																																																																													
		Limit		Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																														
1	11160.00	48.11	74.00	-25.89	44.71	39.53	14.64	50.77	--	-- Peak																																																																																																													
2	16740.00	47.30	68.30	-21.00	39.17	42.45	17.43	51.75	--	-- Peak																																																																																																													

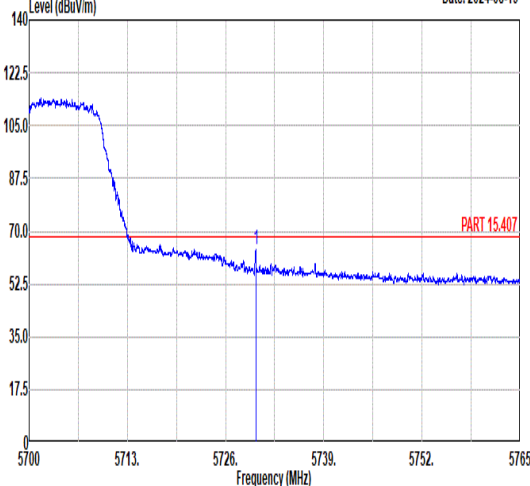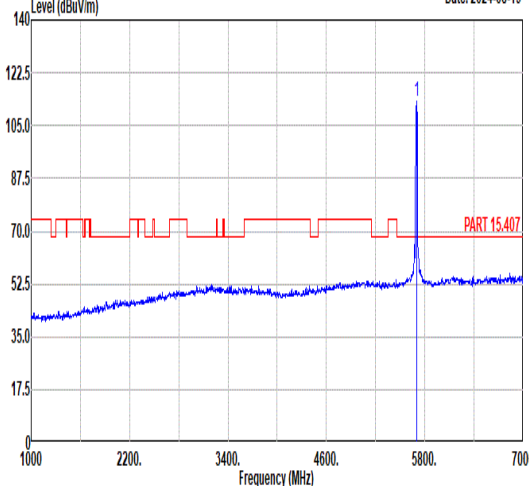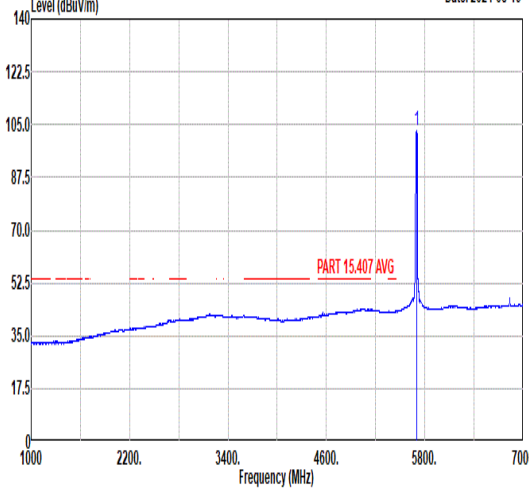

Mode	18																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Full_5700MHz																																																																																											
ANT	CDD 9+15																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2024-08-19  PART 15.407 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5730.00</td><td>64.17</td><td>68.30</td><td>-4.13</td><td>49.79</td><td>35.12</td><td>11.65</td><td>32.39</td><td>214</td><td>328</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5730.00	64.17	68.30	-4.13	49.79	35.12	11.65	32.39	214	328	PEAK	Level (dBuV/m) Date: 2024-08-19  PART 15.407 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>112.80</td><td>-----</td><td>-----</td><td>98.43</td><td>35.08</td><td>11.66</td><td>32.37</td><td>214</td><td>328</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	112.80	-----	-----	98.43	35.08	11.66	32.37	214	328	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5730.00	64.17	68.30	-4.13	49.79	35.12	11.65	32.39	214	328	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	112.80	-----	-----	98.43	35.08	11.66	32.37	214	328	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2024-08-19  PART 15.407 AVG Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5700.00</td><td>103.09</td><td>-----</td><td>-----</td><td>88.72</td><td>35.08</td><td>11.66</td><td>32.37</td><td>214</td><td>328</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	103.09	-----	-----	88.72	35.08	11.66	32.37	214	328	AVERAGE																																								
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5700.00	103.09	-----	-----	88.72	35.08	11.66	32.37	214	328	AVERAGE																																																																																	







Mode	18																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Full_5700MHz																																																																																	
ANT	CDD 9+15																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.33</td><td>61.39</td><td>68.30</td><td>-6.91</td><td>47.01</td><td>35.12</td><td>11.65</td><td>32.39</td><td>305</td><td>345</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5727.33	61.39	68.30	-6.91	47.01	35.12	11.65	32.39	305	345	PEAK	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>108.20</td><td>-----</td><td>-----</td><td>93.82</td><td>35.07</td><td>11.67</td><td>32.36</td><td>305</td><td>345</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	108.20	-----	-----	93.82	35.07	11.67	32.36	305	345	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5727.33	61.39	68.30	-6.91	47.01	35.12	11.65	32.39	305	345	PEAK																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5700.00	108.20	-----	-----	93.82	35.07	11.67	32.36	305	345	PEAK																																																																							
Avg	Blank	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>99.52</td><td>-----</td><td>-----</td><td>85.15</td><td>35.08</td><td>11.66</td><td>32.37</td><td>305</td><td>345</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	99.52	-----	-----	85.15	35.08	11.66	32.37	305	345	AVERAGE																																								
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5700.00	99.52	-----	-----	85.15	35.08	11.66	32.37	305	345	AVERAGE																																																																							



Mode	18																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-2C_5.47-5.725_802.11be EHT20_CH140_Full_5700MHz																																																																																																																			
ANT	CDD 9+15																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Date: 2024-08-22						Date: 2024-08-22																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>47.44</td><td>74.00</td><td>-26.56</td><td>43.66</td><td>39.72</td><td>14.78</td><td>50.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.88</td><td>68.30</td><td>-20.42</td><td>39.69</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	47.44	74.00	-26.56	43.66	39.72	14.78	50.72	--	--	Peak	2	17100.00	47.88	68.30	-20.42	39.69	42.46	17.53	51.80	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>11400.00</td><td>47.99</td><td>74.00</td><td>-26.01</td><td>44.21</td><td>39.72</td><td>14.78</td><td>50.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>48.59</td><td>68.30</td><td>-19.71</td><td>40.40</td><td>42.46</td><td>17.53</td><td>51.80</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	47.99	74.00	-26.01	44.21	39.72	14.78	50.72	--	--	Peak	2	17100.00	48.59	68.30	-19.71	40.40	42.46	17.53	51.80	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11400.00	47.44	74.00	-26.56	43.66	39.72	14.78	50.72	--	--	Peak																																																																																																									
2	17100.00	47.88	68.30	-20.42	39.69	42.46	17.53	51.80	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																											
1	11400.00	47.99	74.00	-26.01	44.21	39.72	14.78	50.72	--	--	Peak																																																																																																									
2	17100.00	48.59	68.30	-19.71	40.40	42.46	17.53	51.80	--	--	Peak																																																																																																									

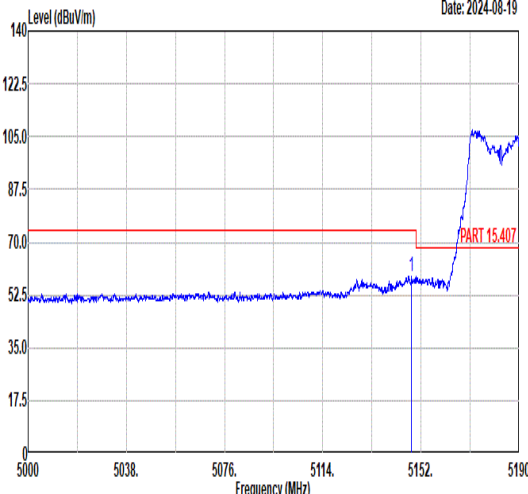
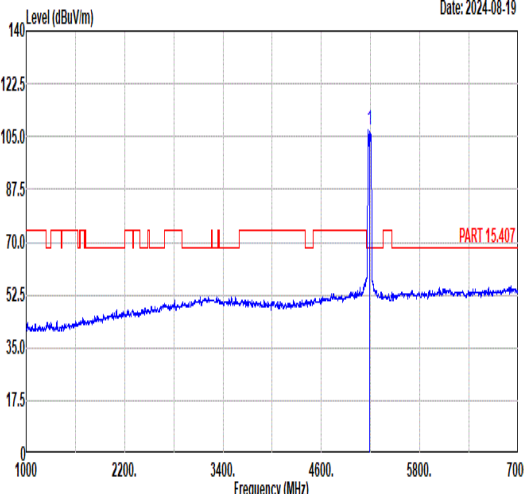
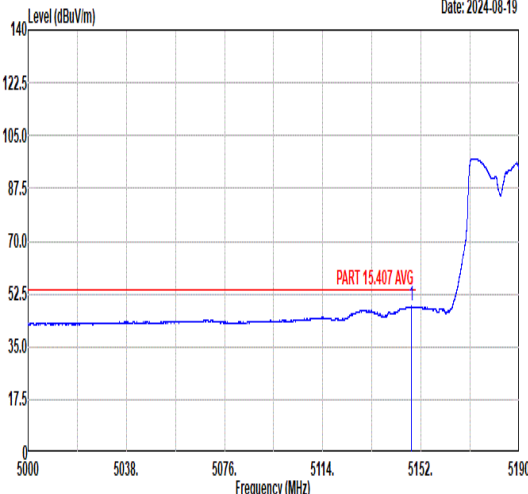
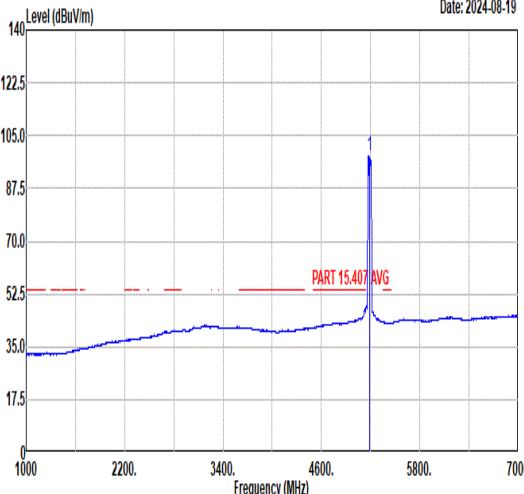


		19																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																											
ANT		CDD 9+15																																																																																											
Pol.		Horizontal					Fundamental																																																																																						
Peak																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5148.30</td><td>58.84</td><td>74.00</td><td>-15.16</td><td>44.66</td><td>34.87</td><td>11.09</td><td>31.78</td><td>169</td><td>312</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.30	58.84	74.00	-15.16	44.66	34.87	11.09	31.78	169	312	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>107.11</td><td>-----</td><td>-----</td><td>92.96</td><td>34.87</td><td>11.08</td><td>31.80</td><td>169</td><td>312</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	107.11	-----	-----	92.96	34.87	11.08	31.80	169	312
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5148.30	58.84	74.00	-15.16	44.66	34.87	11.09	31.78	169	312	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5190.00	107.11	-----	-----	92.96	34.87	11.08	31.80	169	312	PEAK																																																																																		
Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5148.30</td><td>48.37</td><td>54.00</td><td>-5.63</td><td>34.19</td><td>34.87</td><td>11.09</td><td>31.78</td><td>169</td><td>312</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5148.30	48.37	54.00	-5.63	34.19	34.87	11.09	31.78	169	312	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>98.35</td><td>-----</td><td>-----</td><td>84.20</td><td>34.87</td><td>11.08</td><td>31.80</td><td>169</td><td>312</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	98.35	-----	-----	84.20	34.87	11.08	31.80	169	312
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5148.30	48.37	54.00	-5.63	34.19	34.87	11.09	31.78	169	312	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5190.00	98.35	-----	-----	84.20	34.87	11.08	31.80	169	312	AVERAGE																																																																																		



Mode	19										
	Band Edge - R										
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz										
ANT	CDD 9+15										
Pol.	Horizontal							Fundamental			
Peak	</										

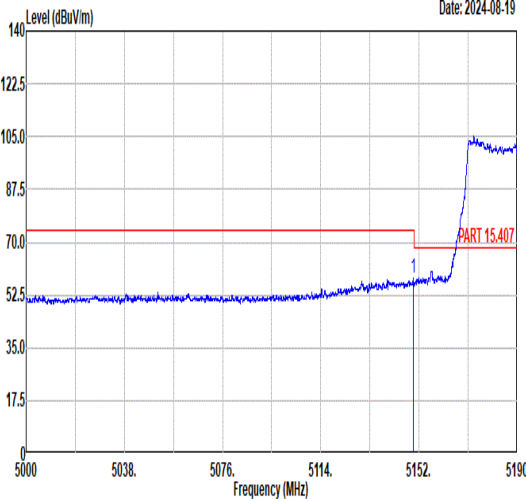
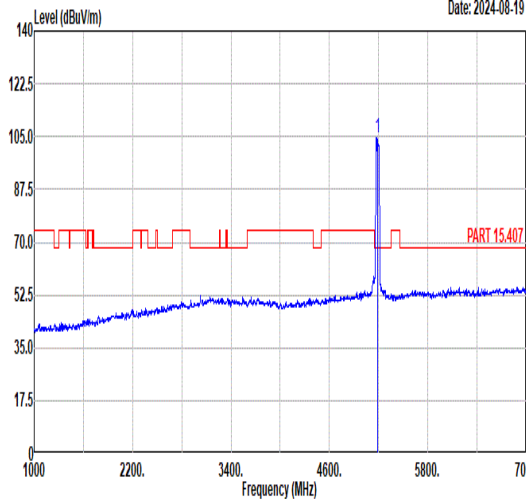
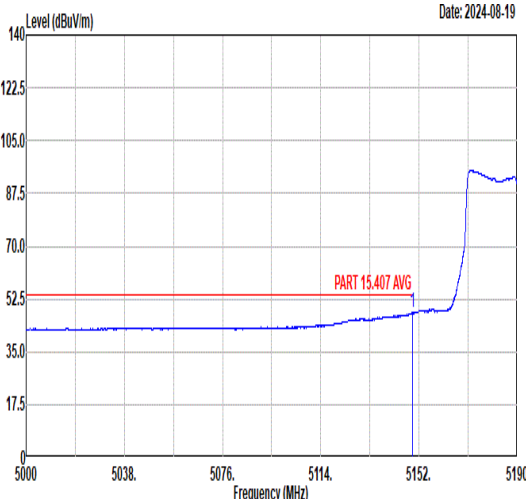
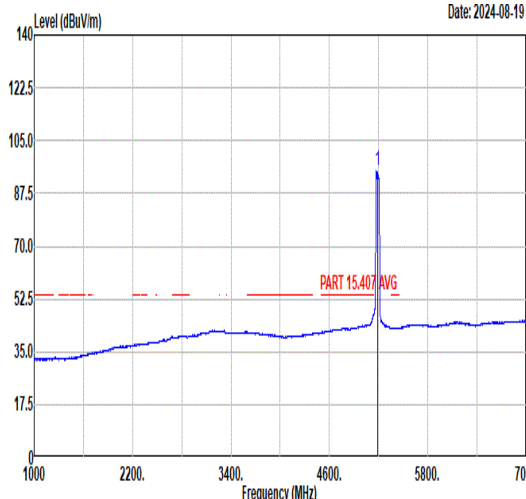


		19																																																																																											
Mode		Band Edge - L																																																																																											
		U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz																																																																																											
ANT		CDD 9+15																																																																																											
Pol.		Vertical					Fundamental																																																																																						
Peak																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.83</td><td>58.13</td><td>74.00</td><td>-15.87</td><td>43.95</td><td>34.87</td><td>11.09</td><td>31.78</td><td>294</td><td>0</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.83	58.13	74.00	-15.87	43.95	34.87	11.09	31.78	294	0	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>104.68</td><td>-----</td><td>-----</td><td>90.55</td><td>34.87</td><td>11.07</td><td>31.81</td><td>294</td><td>0</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	104.68	-----	-----	90.55	34.87	11.07	31.81	294	0
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5149.83	58.13	74.00	-15.87	43.95	34.87	11.09	31.78	294	0	PEAK																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5190.00	104.68	-----	-----	90.55	34.87	11.07	31.81	294	0	PEAK																																																																																		
Avg																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5149.44</td><td>47.92</td><td>54.00</td><td>-6.08</td><td>33.74</td><td>34.87</td><td>11.09</td><td>31.78</td><td>294</td><td>0</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5149.44	47.92	54.00	-6.08	33.74	34.87	11.09	31.78	294	0	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5190.00</td><td>94.87</td><td>-----</td><td>-----</td><td>80.72</td><td>34.87</td><td>11.08</td><td>31.80</td><td>294</td><td>0</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	94.87	-----	-----	80.72	34.87	11.08	31.80	294	0
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5149.44	47.92	54.00	-6.08	33.74	34.87	11.09	31.78	294	0	AVERAGE																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5190.00	94.87	-----	-----	80.72	34.87	11.08	31.80	294	0	AVERAGE																																																																																		



Mode	19									
	Band Edge - R									
	U-NII-1_5.15-5.25_802.11be EHT40_CH38_Full_5190MHz									
ANT	CDD 9+15									
Pol.	Vertical					Fundamental				
Peak	</									

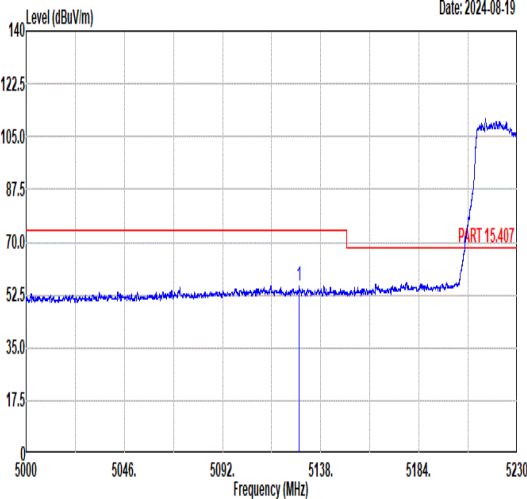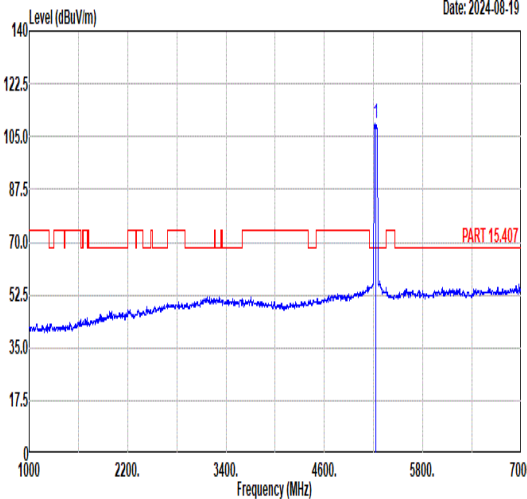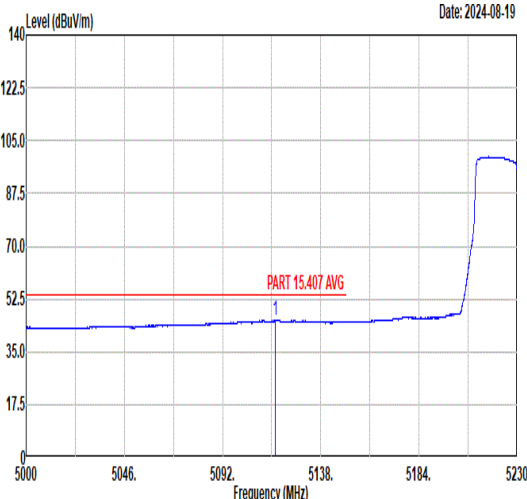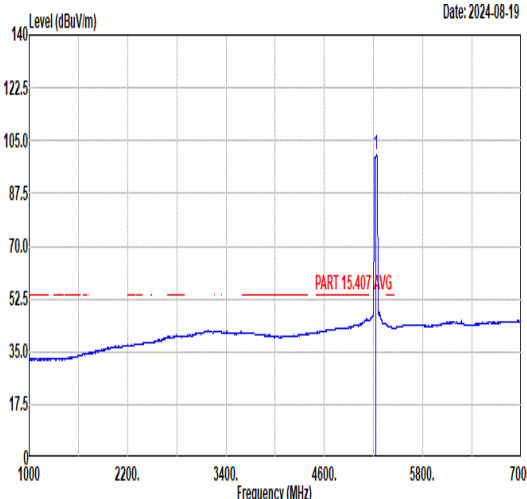

		20																																																																																									
Mode		Band Edge - L																																																																																									
		U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																																																																									
ANT		CDD 9+15																																																																																									
Pol.		Horizontal					Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5127.77</td><td>55.37</td><td>74.00</td><td>-18.63</td><td>41.15</td><td>34.87</td><td>11.10</td><td>31.75</td><td>300</td><td>121 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5127.77	55.37	74.00	-18.63	41.15	34.87	11.10	31.75	300	121 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>109.61</td><td>-----</td><td>-----</td><td>95.56</td><td>34.86</td><td>11.05</td><td>31.86</td><td>300</td><td>121 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	109.61	-----	-----	95.56	34.86	11.05	31.86	300
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5127.77	55.37	74.00	-18.63	41.15	34.87	11.10	31.75	300	121 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5230.00	109.61	-----	-----	95.56	34.86	11.05	31.86	300	121 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5116.52</td><td>45.53</td><td>54.00</td><td>-8.47</td><td>31.29</td><td>34.88</td><td>11.10</td><td>31.74</td><td>300</td><td>121 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5116.52	45.53	54.00	-8.47	31.29	34.88	11.10	31.74	300	121 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>100.40</td><td>-----</td><td>-----</td><td>86.40</td><td>34.85</td><td>11.03</td><td>31.88</td><td>300</td><td>121 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	100.40	-----	-----	86.40	34.85	11.03	31.88	300
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5116.52	45.53	54.00	-8.47	31.29	34.88	11.10	31.74	300	121 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5230.00	100.40	-----	-----	86.40	34.85	11.03	31.88	300	121 AVERAGE																																																																																	







Mode	20	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz	
ANT	CDD 9+15	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2024-08-19 </	



Mode	20																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11be EHT40_CH46_Full_5230MHz																																										
ANT	CDD 9+15																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5385.39</td><td>52.59</td><td>74.00</td><td>-21.41</td><td>38.92</td><td>34.82</td><td>10.92</td><td>32.07</td><td>289</td><td>0 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5385.39	52.59	74.00	-21.41	38.92	34.82	10.92	32.07	289	0 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5385.39	52.59	74.00	-21.41	38.92	34.82	10.92	32.07	289	0 PEAK																																	
Avg	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.56</td><td>42.98</td><td>54.00</td><td>-11.02</td><td>29.24</td><td>34.83</td><td>10.94</td><td>32.03</td><td>289</td><td>0 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.56	42.98	54.00	-11.02	29.24	34.83	10.94	32.03	289	0 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5351.56	42.98	54.00	-11.02	29.24	34.83	10.94	32.03	289	0 AVERAGE																																	

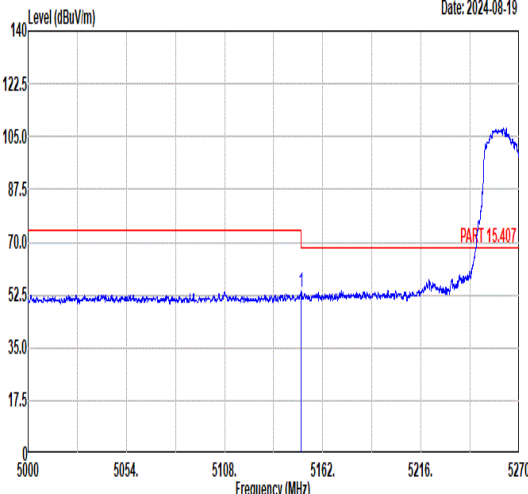
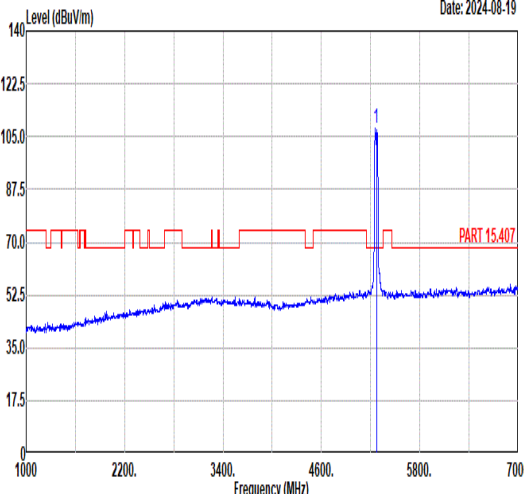
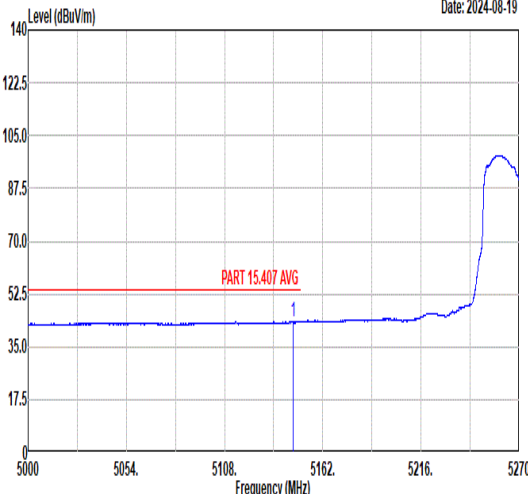
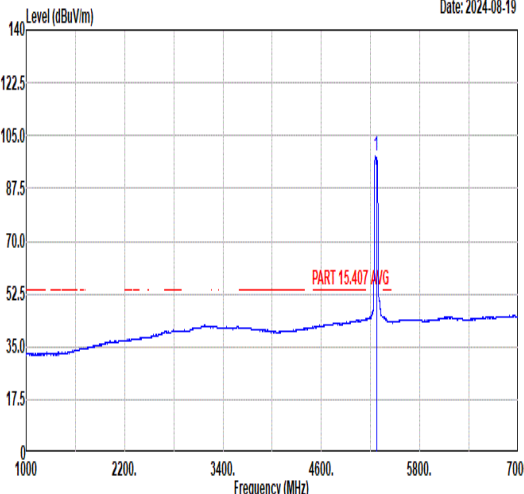


Mode	21																																																																													
	Band Edge - L																																																																													
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full_5270MHz																																																																													
ANT	CDD 9+15																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-08-19 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5149.99</td><td>53.55</td><td>74.00</td><td>-20.45</td><td>39.38</td><td>34.87</td><td>11.08</td><td>31.78</td><td>292</td><td>322 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5149.99	53.55	74.00	-20.45	39.38	34.87	11.08	31.78	292	322 PEAK	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-08-19 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5270.00</td><td>107.67</td><td>-----</td><td>-----</td><td>93.71</td><td>34.85</td><td>11.02</td><td>31.91</td><td>292</td><td>322 PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5270.00	107.67	-----	-----	93.71	34.85	11.02	31.91	292	322 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5149.99	53.55	74.00	-20.45	39.38	34.87	11.08	31.78	292	322 PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5270.00	107.67	-----	-----	93.71	34.85	11.02	31.91	292	322 PEAK																																																																					
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-08-19 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5145.69</td><td>43.37</td><td>54.00</td><td>-10.63</td><td>29.19</td><td>34.87</td><td>11.09</td><td>31.78</td><td>292</td><td>322 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5145.69	43.37	54.00	-10.63	29.19	34.87	11.09	31.78	292	322 AVERAGE	 Level (dBuV/m) vs Frequency (MHz). Date: 2024-08-19 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 5270.00</td><td>98.29</td><td>-----</td><td>-----</td><td>84.33</td><td>34.85</td><td>11.02</td><td>31.91</td><td>292</td><td>322 AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5270.00	98.29	-----	-----	84.33	34.85	11.02	31.91	292	322 AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5145.69	43.37	54.00	-10.63	29.19	34.87	11.09	31.78	292	322 AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5270.00	98.29	-----	-----	84.33	34.85	11.02	31.91	292	322 AVERAGE																																																																					



Mode	21																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full_5270MHz																																									
ANT	CDD 9+15																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5376.31</td><td>54.03</td><td>74.00</td><td>-19.97</td><td>40.35</td><td>34.82</td><td>10.92</td><td>32.06</td><td>292 322 PEAK</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5376.31	54.03	74.00	-19.97	40.35	34.82	10.92	32.06	292 322 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5376.31	54.03	74.00	-19.97	40.35	34.82	10.92	32.06	292 322 PEAK																																	
Avg	Date: 2024-08-19 <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5355.60</td><td>44.64</td><td>54.00</td><td>-9.36</td><td>30.91</td><td>34.83</td><td>10.94</td><td>32.04</td><td>292 322 AVERAGE</td></tr></tbody></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5355.60	44.64	54.00	-9.36	30.91	34.83	10.94	32.04	292 322 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																	
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5355.60	44.64	54.00	-9.36	30.91	34.83	10.94	32.04	292 322 AVERAGE																																	

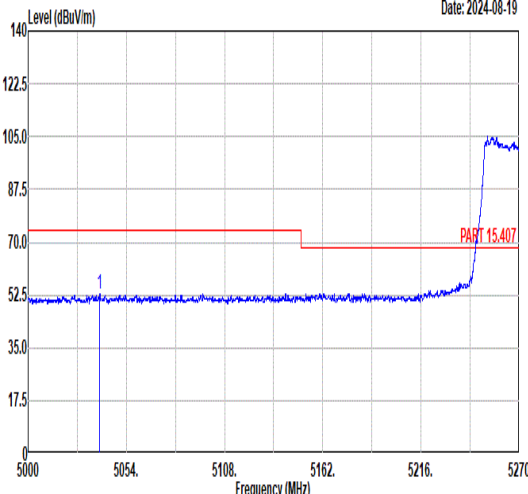
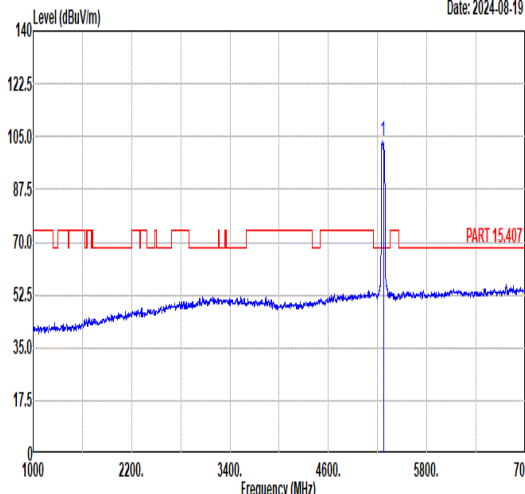
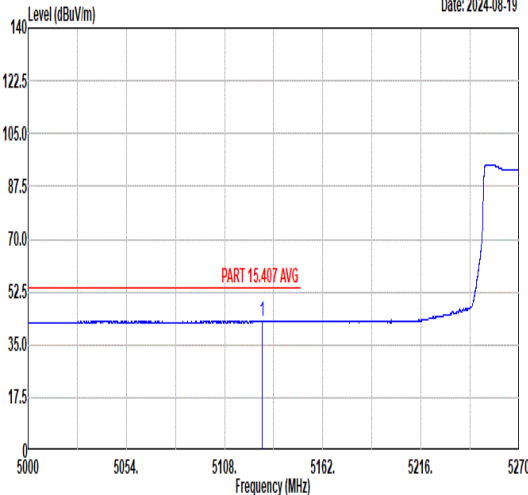
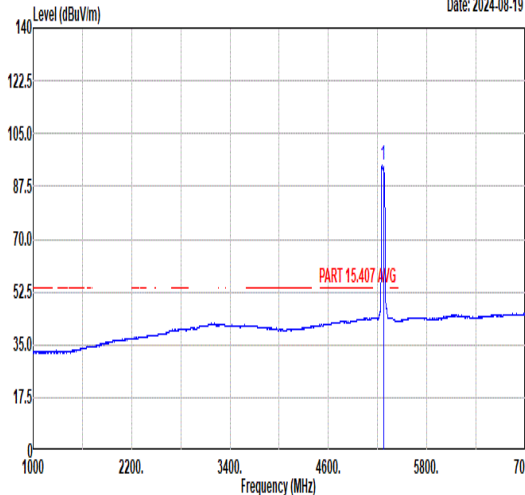


		21																																																																																									
Mode		Band Edge - L																																																																																									
		U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full_5270MHz																																																																																									
ANT		CDD 9+15																																																																																									
Pol.		Vertical					Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5039.31</td><td>52.86</td><td>74.00</td><td>-21.14</td><td>38.46</td><td>34.89</td><td>11.15</td><td>31.64</td><td>379</td><td>0 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5039.31	52.86	74.00	-21.14	38.46	34.89	11.15	31.64	379	0 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>103.68</td><td>-----</td><td>-----</td><td>89.72</td><td>34.85</td><td>11.02</td><td>31.91</td><td>379</td><td>0 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	103.68	-----	-----	89.72	34.85	11.02	31.91	379
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5039.31	52.86	74.00	-21.14	38.46	34.89	11.15	31.64	379	0 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5270.00	103.68	-----	-----	89.72	34.85	11.02	31.91	379	0 PEAK																																																																																	
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5128.68</td><td>43.02</td><td>54.00</td><td>-10.98</td><td>28.81</td><td>34.87</td><td>11.10</td><td>31.76</td><td>379</td><td>0 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5128.68	43.02	54.00	-10.98	28.81	34.87	11.10	31.76	379	0 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>94.55</td><td>-----</td><td>-----</td><td>80.59</td><td>34.85</td><td>11.02</td><td>31.91</td><td>379</td><td>0 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5270.00	94.55	-----	-----	80.59	34.85	11.02	31.91	379
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5128.68	43.02	54.00	-10.98	28.81	34.87	11.10	31.76	379	0 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5270.00	94.55	-----	-----	80.59	34.85	11.02	31.91	379	0 AVERAGE																																																																																	





Mode	21																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11be EHT40_CH54_Full_5270MHz																																					
ANT	CDD 9+15																																					
Pol.	Vertical	Fundamental																																				
Peak	Date: 2024-08-19 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5385.05</td><td>53.25</td><td>74.00</td><td>-20.75</td><td>39.58</td><td>34.82</td><td>10.92</td><td>32.07</td><td>379</td><td>0</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5385.05	53.25	74.00	-20.75	39.58	34.82	10.92	32.07	379	0	PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Level	Factor	Loss	Factor	Remark																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																															
1	5385.05	53.25	74.00	-20.75	39.58	34.82	10.92	32.07	379	0	PEAK																											
Avg	Date: 2024-08-19 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1</td><td>5374.80</td><td>43.27</td><td>54.00</td><td>-10.73</td><td>29.58</td><td>34.83</td><td>10.92</td><td>32.06</td><td>379</td><td>0</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5374.80	43.27	54.00	-10.73	29.58	34.83	10.92	32.06	379	0	AVERAGE	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																															
Freq	Level	Line	Level	Factor	Loss	Factor	Remark																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																															
1	5374.80	43.27	54.00	-10.73	29.58	34.83	10.92	32.06	379	0	AVERAGE																											

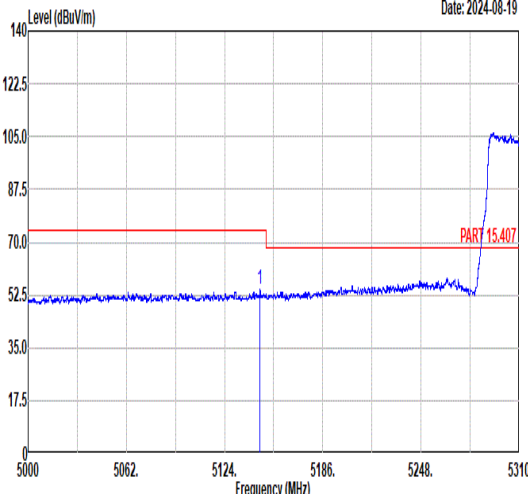
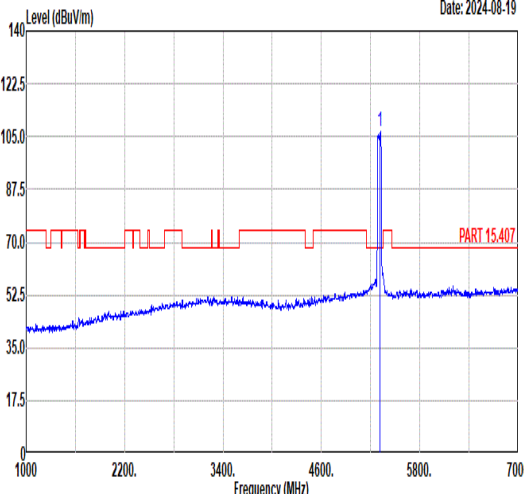
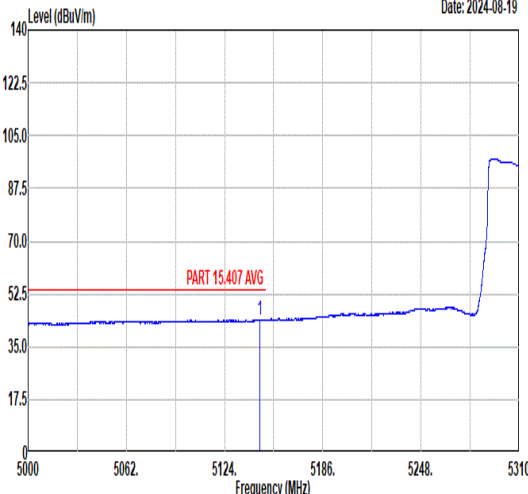
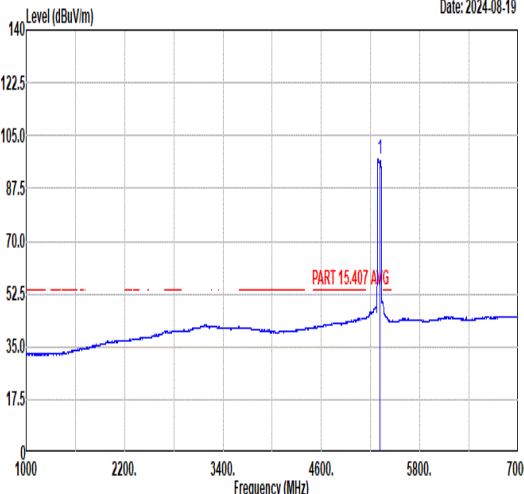


		22																																																																																								
Mode	Band Edge - L																																																																																									
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																																																																									
ANT	CDD 9+15																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5146.20</td><td>54.42</td><td>74.00</td><td>-19.58</td><td>40.24</td><td>34.87</td><td>11.09</td><td>31.78</td><td>303</td><td>114 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5146.20	54.42	74.00	-19.58	40.24	34.87	11.09	31.78	303	114 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5310.00</td><td>106.46</td><td>-----</td><td>-----</td><td>92.66</td><td>34.84</td><td>10.96</td><td>32.00</td><td>303</td><td>114 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5310.00	106.46	-----	-----	92.66	34.84	10.96	32.00	303
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5146.20	54.42	74.00	-19.58	40.24	34.87	11.09	31.78	303	114 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5310.00	106.46	-----	-----	92.66	34.84	10.96	32.00	303	114 PEAK																																																																																	
Avg																																																																																										
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5146.48</td><td>43.91</td><td>54.00</td><td>-10.09</td><td>29.73</td><td>34.87</td><td>11.09</td><td>31.78</td><td>303</td><td>114 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5146.48	43.91	54.00	-10.09	29.73	34.87	11.09	31.78	303	114 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5310.00</td><td>97.24</td><td>-----</td><td>-----</td><td>83.37</td><td>34.84</td><td>10.99</td><td>31.96</td><td>303</td><td>114 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1 5310.00	97.24	-----	-----	83.37	34.84	10.99	31.96	303
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5146.48	43.91	54.00	-10.09	29.73	34.87	11.09	31.78	303	114 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1 5310.00	97.24	-----	-----	83.37	34.84	10.99	31.96	303	114 AVERAGE																																																																																	

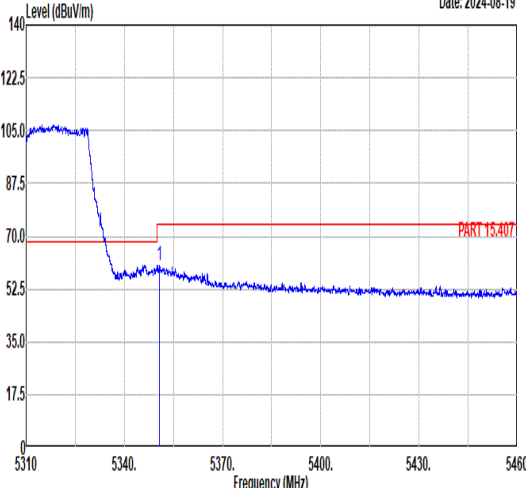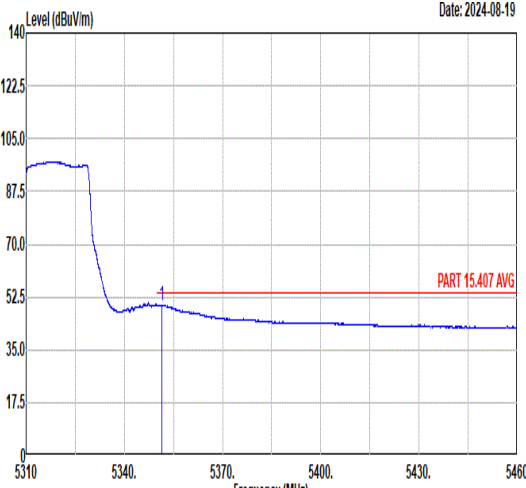

Mode	22																																										
	Band Edge - R																																										
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																										
ANT	CDD 9+15																																										
Pol.	Horizontal	Fundamental																																									
Peak	Date: 2024-08-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.73</td><td>60.20</td><td>74.00</td><td>-13.80</td><td>46.46</td><td>34.83</td><td>10.94</td><td>32.03</td><td>303</td><td>114 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5350.73	60.20	74.00	-13.80	46.46	34.83	10.94	32.03	303	114 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5350.73	60.20	74.00	-13.80	46.46	34.83	10.94	32.03	303	114 PEAK																																	
Avg	Date: 2024-08-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.48</td><td>49.86</td><td>54.00</td><td>-4.14</td><td>36.12</td><td>34.83</td><td>10.94</td><td>32.03</td><td>303</td><td>114 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5351.48	49.86	54.00	-4.14	36.12	34.83	10.94	32.03	303	114 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5351.48	49.86	54.00	-4.14	36.12	34.83	10.94	32.03	303	114 AVERAGE																																	

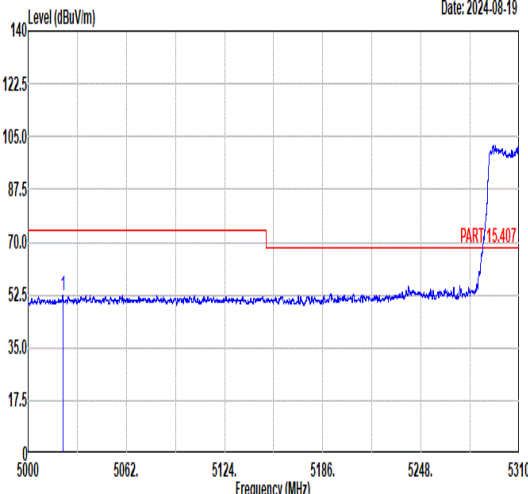
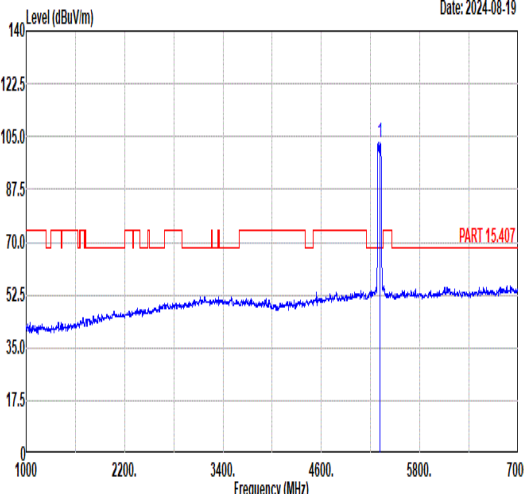
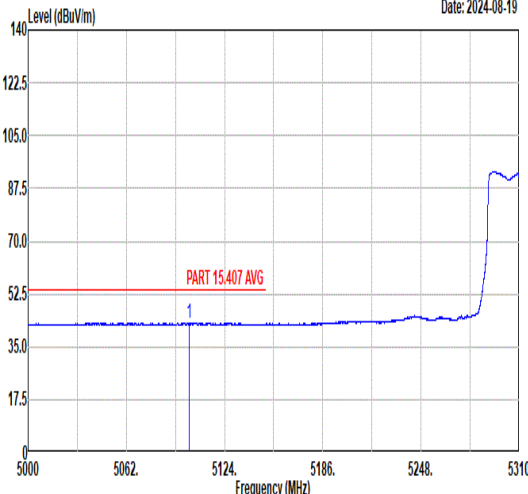
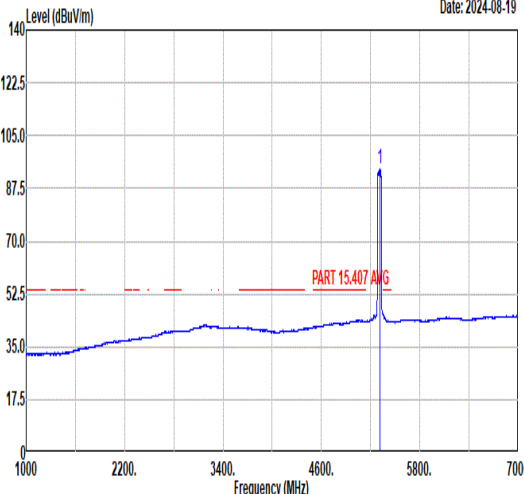


		22																																																																																
Mode		Band Edge - L																																																																																
		U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz																																																																																
ANT		CDD 9+15																																																																																
Pol.		Vertical					Fundamental																																																																											
Peak																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5021.89	52.45	74.00	-21.55	38.01	34.90	11.16	31.62	385	0 PEAK	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>103.12</td><td>-----</td><td>-----</td><td>89.29</td><td>34.84</td><td>10.97</td><td>31.98</td><td>385</td><td>0 PEAK</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	103.12	-----	-----	89.29	34.84	10.97	31.98	385
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5021.89	52.45	74.00	-21.55	38.01	34.90	11.16	31.62	385	0 PEAK																																																																								
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	103.12	-----	-----	89.29	34.84	10.97	31.98	385	0 PEAK																																																																								
Avg																																																																																		
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5101.84	42.82	54.00	-11.18	28.55	34.88	11.11	31.72	385	0 AVERAGE	<table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5310.00</td><td>94.25</td><td>-----</td><td>-----</td><td>80.42</td><td>34.84</td><td>10.97</td><td>31.98</td><td>385</td><td>0 AVERAGE</td></tr></table>					Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5310.00	94.25	-----	-----	80.42	34.84	10.97	31.98	385
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5101.84	42.82	54.00	-11.18	28.55	34.88	11.11	31.72	385	0 AVERAGE																																																																								
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	94.25	-----	-----	80.42	34.84	10.97	31.98	385	0 AVERAGE																																																																								



Mode	22									
	Band Edge - R									
	U-NII-2A_5.25-5.35_802.11be EHT40_CH62_Full_5310MHz									
ANT	CDD 9+15									
Pol.	Vertical					Fundamental				
Peak										

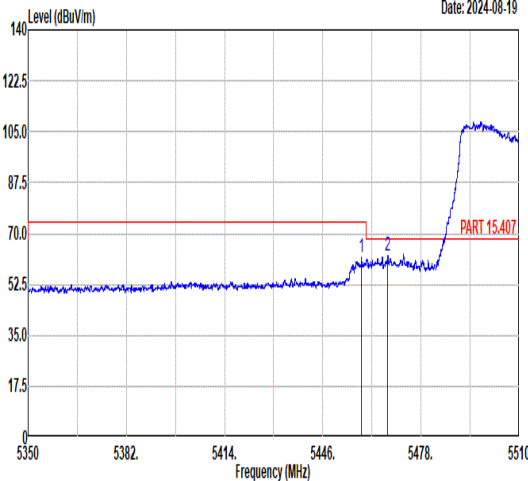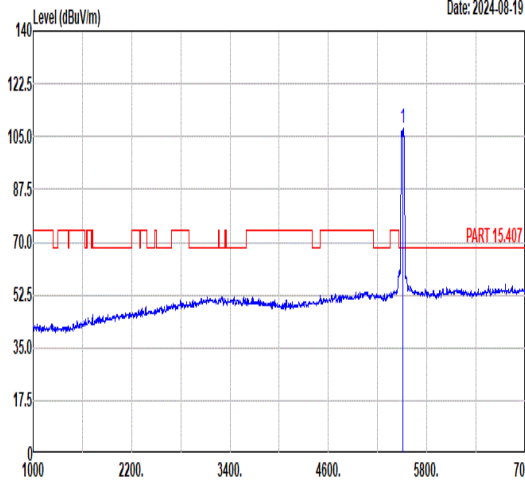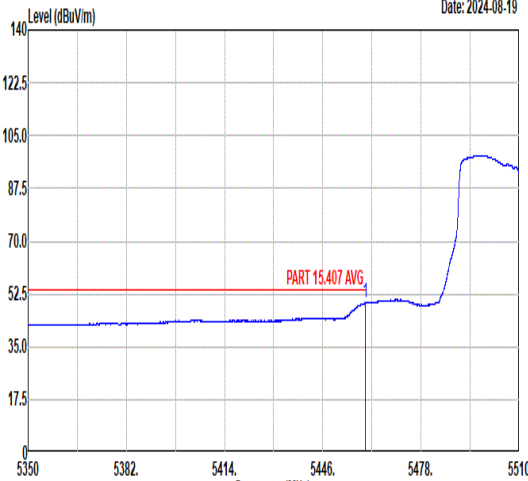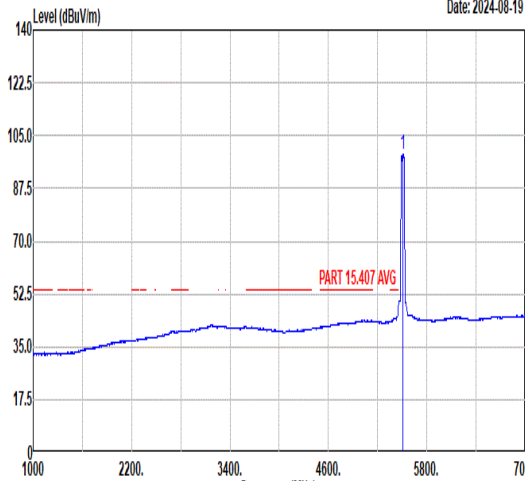


		23																																																																																																	
Mode		Band Edge - L																																																																																																	
		U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																																																																																	
ANT		CDD 9+15																																																																																																	
Pol.		Horizontal					Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.56</td><td>61.90</td><td>74.00</td><td>-12.10</td><td>48.14</td><td>34.81</td><td>11.11</td><td>32.16</td><td>216 357 PEAK</td></tr><tr><td>2</td><td>5467.22</td><td>62.35</td><td>68.30</td><td>-5.95</td><td>48.56</td><td>34.81</td><td>11.15</td><td>32.17</td><td>216 357 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5458.56	61.90	74.00	-12.10	48.14	34.81	11.11	32.16	216 357 PEAK	2	5467.22	62.35	68.30	-5.95	48.56	34.81	11.15	32.17	216 357 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>107.67</td><td>-----</td><td>-----</td><td>93.72</td><td>34.82</td><td>11.35</td><td>32.22</td><td>216 357 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5510.00	107.67	-----	-----	93.72	34.82	11.35	32.22
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5458.56	61.90	74.00	-12.10	48.14	34.81	11.11	32.16	216 357 PEAK																																																																																										
2	5467.22	62.35	68.30	-5.95	48.56	34.81	11.15	32.17	216 357 PEAK																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5510.00	107.67	-----	-----	93.72	34.82	11.35	32.22	216 357 PEAK																																																																																										
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.84</td><td>49.60</td><td>54.00</td><td>-4.40</td><td>35.84</td><td>34.81</td><td>11.12</td><td>32.17</td><td>216 357 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5459.84	49.60	54.00	-4.40	35.84	34.81	11.12	32.17	216 357 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>98.94</td><td>-----</td><td>-----</td><td>84.99</td><td>34.82</td><td>11.35</td><td>32.22</td><td>216 357 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5510.00	98.94	-----	-----	84.99	34.82	11.35	32.22	216 357 AVERAGE									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.84	49.60	54.00	-4.40	35.84	34.81	11.12	32.17	216 357 AVERAGE																																																																																										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																										
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5510.00	98.94	-----	-----	84.99	34.82	11.35	32.22	216 357 AVERAGE																																																																																										



Mode	23																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																																																																											
ANT	CDD 9+15																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-08-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.96</td><td>59.39</td><td>74.00</td><td>-14.61</td><td>45.63</td><td>34.81</td><td>11.11</td><td>32.16</td><td>369 360° PEAK</td></tr><tr><td>2</td><td>5465.76</td><td>60.42</td><td>68.30</td><td>-7.88</td><td>46.64</td><td>34.81</td><td>11.14</td><td>32.17</td><td>369 360° PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5456.96	59.39	74.00	-14.61	45.63	34.81	11.11	32.16	369 360° PEAK	2	5465.76	60.42	68.30	-7.88	46.64	34.81	11.14	32.17	369 360° PEAK	Level (dBuV/m) Date: 2024-08-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>104.10</td><td>-----</td><td>-----</td><td>90.25</td><td>34.80</td><td>11.25</td><td>32.20</td><td>369 360° PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	104.10	-----	-----	90.25	34.80	11.25	32.20	369 360° PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5456.96	59.39	74.00	-14.61	45.63	34.81	11.11	32.16	369 360° PEAK																																																																																			
2	5465.76	60.42	68.30	-7.88	46.64	34.81	11.14	32.17	369 360° PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	104.10	-----	-----	90.25	34.80	11.25	32.20	369 360° PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2024-08-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5460.00</td><td>47.67</td><td>54.00</td><td>-6.33</td><td>33.91</td><td>34.81</td><td>11.12</td><td>32.17</td><td>369 360° AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5460.00	47.67	54.00	-6.33	33.91	34.81	11.12	32.17	369 360° AVERAGE	Level (dBuV/m) Date: 2024-08-19 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>93.92</td><td>-----</td><td>-----</td><td>80.06</td><td>34.80</td><td>11.27</td><td>32.21</td><td>369 360° AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	93.92	-----	-----	80.06	34.80	11.27	32.21	369 360° AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5460.00	47.67	54.00	-6.33	33.91	34.81	11.12	32.17	369 360° AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	93.92	-----	-----	80.06	34.80	11.27	32.21	369 360° AVERAGE																																																																																			

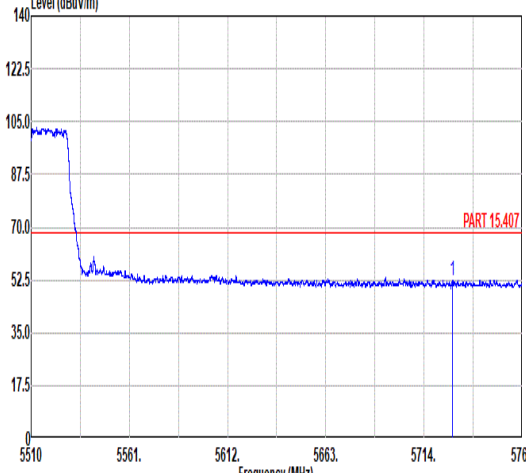

Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11be EHT40_CH102_Full_5510MHz																																									
ANT	CDD 9+15																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2024-08-19  <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5728.94</td><td>52.56</td><td>68.30</td><td>-15.74</td><td>38.18</td><td>35.12</td><td>11.65</td><td>32.39</td><td>369</td><td>360</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5728.94	52.56	68.30	-15.74	38.18	35.12	11.65	32.39	369	360	PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																	
1	5728.94	52.56	68.30	-15.74	38.18	35.12	11.65	32.39	369	360	PEAK																															



Mode	24																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11be EHT40_CH134_Full_5670MHz																																																																																											
ANT	CDD 9+15																																																																																											
Pol.	Horizontal	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5394.35</td><td>52.17</td><td>74.00</td><td>-21.83</td><td>38.52</td><td>34.82</td><td>10.91</td><td>32.08</td><td>232</td><td>117</td><td>PEAK</td></tr><tr><td>2</td><td>5463.15</td><td>51.73</td><td>68.30</td><td>-16.57</td><td>37.96</td><td>34.81</td><td>11.13</td><td>32.17</td><td>232</td><td>117</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5394.35	52.17	74.00	-21.83	38.52	34.82	10.91	32.08	232	117	PEAK	2	5463.15	51.73	68.30	-16.57	37.96	34.81	11.13	32.17	232	117	PEAK	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>107.90</td><td>-----</td><td>-----</td><td>93.53</td><td>35.01</td><td>11.69</td><td>32.33</td><td>232</td><td>117</td><td>PEAK</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	107.90	-----	-----	93.53	35.01	11.69	32.33	232	117	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5394.35	52.17	74.00	-21.83	38.52	34.82	10.91	32.08	232	117	PEAK																																																																																	
2	5463.15	51.73	68.30	-16.57	37.96	34.81	11.13	32.17	232	117	PEAK																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5670.00	107.90	-----	-----	93.53	35.01	11.69	32.33	232	117	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5458.64</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>28.92</td><td>34.81</td><td>11.11</td><td>32.16</td><td>232</td><td>117</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5458.64	42.68	54.00	-11.32	28.92	34.81	11.11	32.16	232	117	AVERAGE	Level (dBuV/m) Date: 2024-08-19 Frequency (MHz) <table><thead><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>99.31</td><td>-----</td><td>-----</td><td>84.94</td><td>35.01</td><td>11.69</td><td>32.33</td><td>232</td><td>117</td><td>AVERAGE</td></tr></tbody></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	99.31	-----	-----	84.94	35.01	11.69	32.33	232	117	AVERAGE												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5458.64	42.68	54.00	-11.32	28.92	34.81	11.11	32.16	232	117	AVERAGE																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																				
1	5670.00	99.31	-----	-----	84.94	35.01	11.69	32.33	232	117	AVERAGE																																																																																	

