

FCC SAR Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Redmi
MODEL NAME : 23021RAA2Y
FCC ID : 2AFZZAA2Y
STANDARD : FCC 47 CFR PART 2 (2.1093)

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures given in 47 CFR Part 2.1093 and FCC KDB and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.



Approved by: Si Zhang



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied	5
4. Equipment Under Test (EUT) Information	6
4.1 General Information	6
4.2 General LTE SAR Test and Reporting Considerations	8
5. Proximity Sensor Triggering Test	11
5.1 Proximity sensor triggering distances(Per KDB616217§6.2)	11
6. RF Exposure Limits	13
6.1 Uncontrolled Environment	13
6.2 Controlled Environment	13
7. Specific Absorption Rate (SAR)	14
7.1 Introduction	14
7.2 SAR Definition	14
8. System Description and Setup	15
8.1 E-Field Probe	16
8.2 Data Acquisition Electronics (DAE)	16
8.3 Phantom	17
8.4 Device Holder	18
9. Measurement Procedures	19
9.1 Spatial Peak SAR Evaluation	19
9.2 Power Reference Measurement	20
9.3 Area Scan	20
9.4 Zoom Scan	21
9.5 Volume Scan Procedures	21
9.6 Power Drift Monitoring	21
10. Test Equipment List	22
11. System Verification	23
11.1 Tissue Simulating Liquids	23
11.2 Tissue Verification	24
11.3 System Performance Check Results	25
12. RF Exposure Positions	26
12.1 Ear and handset reference point	26
12.2 Definition of the cheek position	27
12.3 Definition of the tilt position	28
12.4 Body Worn Accessory	29
12.5 Product Specific 10g SAR Exposure	30
12.6 Wireless Router	30
13. Conducted RF Output Power (Unit: dBm)	31
14. Antenna Location	44
15. SAR Test Results	45
15.1 Head SAR	47
15.2 Hotspot SAR	50
15.3 Body Worn Accessory SAR	54
15.4 Product Specific SAR	56
15.5 Repeated SAR Measurement	57
16. Simultaneous Transmission Analysis	58
16.1 Head Exposure Conditions	59
16.2 Hotspot Exposure Conditions	59
16.3 Body-Worn Accessory Exposure Conditions	59
17. Uncertainty Assessment	60
18. References	61
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASy Calibration Certificate	
Appendix D. Test Setup Photos	
Appendix E. Conducted RF Output Power Table	

Revision History

[illegible]

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Xiaomi Communications Co., Ltd., Mobile Phone, 23021RAA2Y**, are as follows.

Highest 1g SAR Summary						
Equipment Class	Frequency Band		Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.71	0.39	0.39	1.59
		GSM1900	1.09	0.90	0.70	
	WCDMA	Band V	0.97	0.42	0.42	
	LTE	Band 5	1.03	0.44	0.44	
		Band 7	1.01	1.05	0.89	
		Band 41/38	0.86	0.81	0.81	
DTS	WLAN	2.4GHz WLAN	0.49	0.28	0.28	1.52
NII		5GHz WLAN	0.64	0.36	0.43	1.59
DSS	Bluetooth	2.4GHz Bluetooth	0.17	<0.10	<0.10	1.20

Highest 10g SAR Summary				
Equipment Class	Frequency Band		Product Specific 10g SAR (W/kg) (Separation 0mm)	Highest Simultaneous Transmission 10g SAR (W/kg)
NII	WLAN	5GHz WLAN	0.50	-
Date of Testing:			2022/11/27 ~ 2022/12/8	

Remark:

- This device supports LTE B38 and B41. Since the supported frequency span for LTE B38 falls completely within the supports frequency span for LTE B41, both LTE bands have the same target power, and both LTE bands share the same transmission path; therefore, SAR was only assessed for LTE B41.

Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg for Partial-Body 1g SAR, 4.0 W/kg for Product Specific 10g SAR) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Testing Laboratory			
Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	SAR01-KS	CN1257	314309

Applicant	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

Manufacturer	
Company Name	Xiaomi Communications Co., Ltd.
Address	#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D05A Rel.10 LTE SAR Test Guidance v01r02
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Phone
Brand Name	Redmi
Model Name	23021RAA2Y
FCC ID	2AFZZAA2Y
IMEI Code	SIM1: 869146060029247 SIM2: 869146060029254
Wireless Technology and Frequency Range	GSM850: 824 MHz ~ 849 MHz GSM1900: 1850 MHz ~ 1910 MHz WCDMA Band V: 824 MHz ~ 849 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz WLAN 5.2GHz Band: 5180 MHz ~ 5240 MHz WLAN 5.3GHz Band: 5260 MHz ~ 5320 MHz WLAN 5.5GHz Band: 5500 MHz ~ 5700 MHz WLAN 5.8GHz Band: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz NFC: 13.56 MHz
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA DC-HSDPA HSPA+(16QAM uplink is not supported) LTE: QPSK, 16QAM, 64QAM, 256QAM(Downlink only) WLAN 2.4GHz 802.11b/g/n HT20 WLAN 5GHz 802.11a/n HT20/HT40 WLAN 5GHz 802.11ac VHT20/VHT40/VHT80 Bluetooth BR/EDR/LE NFC: ASK
HW Version	P1.1
SW Version	MIUI14
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: <ol style="list-style-type: none"> This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications. This device 2.4GHz WLAN/5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WiFi Direct (GC/GO), and 5.3GHz / 5.5GHz supports WiFi Direct (GC only). This device does not support DTM operation and supports GPRS/EGPRS mode up to multi-slot class 33. For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests. This device has NFC operations, the NFC antenna is integrated into the device for this model, therefore, all SAR test were performed with the device which already incorporates the NFC antenna. A diagram showing the location of the antenna can be found in the operational description. According to FCC KDB publication 447498 D01v06, transmitters are consider to be operating simultaneously when there is overlapping transmission, with the exception of transmission during network hand-offs with maximum hand-off duration less than 30 seconds. The device implements Proximity sensors/receiver detect mechanism reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). It uses the receiver to 	

indicate whether the user is making a call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. It can determine proximity to head or body and set the relevant power level for 2G&3G&4G and Wi-Fi antennas accordingly. The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. Full power table and reduced power table (DSI 1: receiver on reduced power for head; DSI 4: P-sensor on for hotspot/ body; DSI 2: receiver off /P-sensor off).

8. There are four samples. The difference between them could be referred to the 23021RAA2Y_Operational Description of Product Equality Declaration which is exhibited separately. According to the difference, we choose sample 1 for full testing.
9. The device has two batteries. For battery 1/2 only suppliers are different, so we only choose battery 1 to perform full SAR testing.

4.2 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05								
FCC ID	2AFZZAA2Y							
Equipment Name	Mobile Phone							
Operating Frequency Range of each LTE transmission band	LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 38: 2570 MHz ~ 2620 MHz LTE Band 41: 2496 MHz ~ 2690 MHz							
Channel Bandwidth	LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 41: 5MHz, 10MHz, 15MHz, 20MHz							
uplink modulations used	QPSK / 16QAM / 64QAM /256QAM(Downlink only)							
LTE Voice / Data requirements	Voice and Data							
LTE Release Version	R10, Cat13							
CA Support	Supported, Uplink and Downlink							
LTE MPR permanently built-in by design	Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 1, 2 and 3							
	Modulation	Channel bandwidth / Transmission bandwidth (N _{RB})						MPR (dB)
		1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	
	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1
	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1
	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
	64 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 2
	64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 3
	256 QAM	≥ 1						≤ 5
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)							
Spectrum plots for RB configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.							
Power reduction applied to satisfy SAR compliance	Yes, when operating in Proximity sensors/receiver detect mechanism; head/body -worn/hotspot/extremity will trigger reduced power for some bands applied to satisfy SAR compliance, the detail please referred to section 13.							
LTE Carrier Aggregation Combinations	Inter-Band and Intra-Band possible combinations and the detail power verification please referred to section 13.							
LTE Carrier Aggregation Additional Information	1. This device supports LTE Carrier Aggregation (CA) in the uplink for intra-band with two component carriers in the uplink. SAR Measurements and conducted powers were evaluated per FCC Guidance. 2. This device supports maximum of 2 carriers in the downlink and 2 carriers in the uplink.							



Transmission (H, M, L) channel numbers and frequencies in each LTE band								
LTE Band 5								
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20407	824.7	20415	825.5	20425	826.5	20450	829
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5
H	20643	848.3	20635	847.5	20625	846.5	20600	844
LTE Band 7								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510
M	21100	2535	21100	2535	21100	2535	21100	2535
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560
LTE Band 38								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580
M	38000	2595	38000	2595	38000	2595	38000	2595
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610
LTE Band 41								
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz	
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)
L	39675	2498.5	39700	2501	39725	2503.5	39750	2506
LM	40148	2545.8	40160	2547	40173	2548.3	40185	2549.5
M	40620	2593	40620	2593	40620	2593	40620	2593
HM	41093	2640.3	41080	2639	41068	2637.8	41055	2636.5
H	41565	2687.5	41540	2685	41515	2682.5	41490	2680

<For LTE Overlap Bands Description>
1) LTE Bands BW

Band	1.4 MHz	3 MHz	5 MHz	10 MHz	15 MHz	20 MHz
LTE Band 38			Yes	Yes	Yes	Yes
LTE Band 41			Yes	Yes	Yes	Yes


2) LTE Bands tune up:

Band	Antenna	Default	DSI-1	DSI-2	DSI-4
		Tune up Limit	Tune up Limit	Tune up Limit	Tune up Limit
LTE Band 38	Ant 0	25.50	25.50	25.50	21.00
LTE Band 41		25.50	25.50	25.50	21.00
LTE Band 38	Ant 1	25.50	18.00	25.50	20.00
LTE Band 41		25.50	18.00	25.50	20.00

5. Proximity Sensor Triggering Test

5.1 Proximity sensor triggering distances(Per KDB616217§6.2)

1. Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.
2. Proximity sensor triggering distance testing was performed according and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2600MHz) and lowest (1900MHz) frequency was used for proximity sensor triggering testing.
3. Capacitive proximity sensor placed coincident with antenna elements at the top/bottom end of the phone are utilized to determine when the device comes in proximity of the user's body or finger or hand at the front or back or bottom or left or top side of the device. There is no need to do sensor coverage testing for the proximity sensor is designed to support sufficient detection range and sensitivity to cover regions of the sensors in all applicable directions since the proximity sensor entirely covers the antenna.
4. The sensors can use to detect the proximity of the user's body or handheld states at the front or back or bottom or top side of the device use a detection threshold distance. When front/back /top/bottom sides of body or handheld condition is detected reduced power will be active. The trigger distance shown in the sections below.
5. For verification of compliance of power reduction scheme, additional SAR testing with EUT transmitting at full RF power at a conservative trigger distance -1mm was performed.

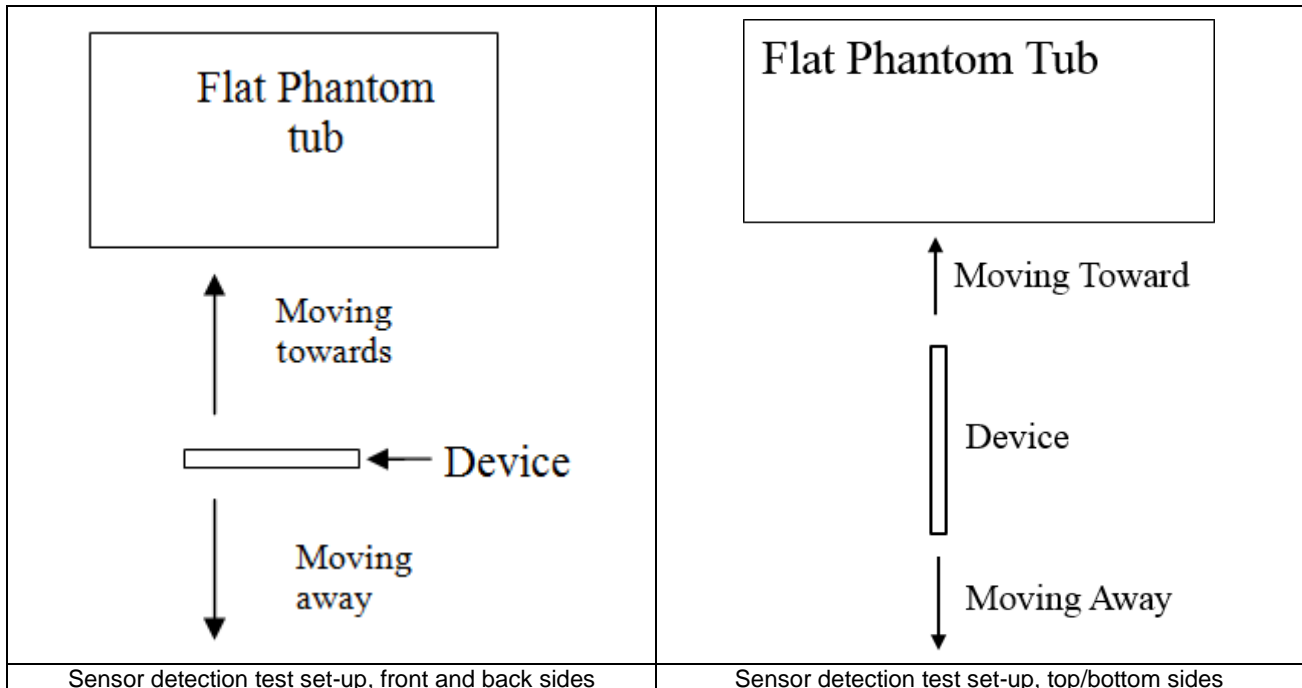

<P-Sensor>

<Sensor on for Ant0 >

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Bottom Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	15	15	20	20	20	20

<Sensor on for Ant1 >

Proximity Sensor Triggering Distance (mm)						
Position	Front		Back		Top Side	
	Moving towards	Moving away	Moving towards	Moving away	Moving towards	Moving away
Minimum	13	13	20	20	20	20

6. RF Exposure Limits

6.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

6.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

7. Specific Absorption Rate (SAR)

7.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

7.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

8. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

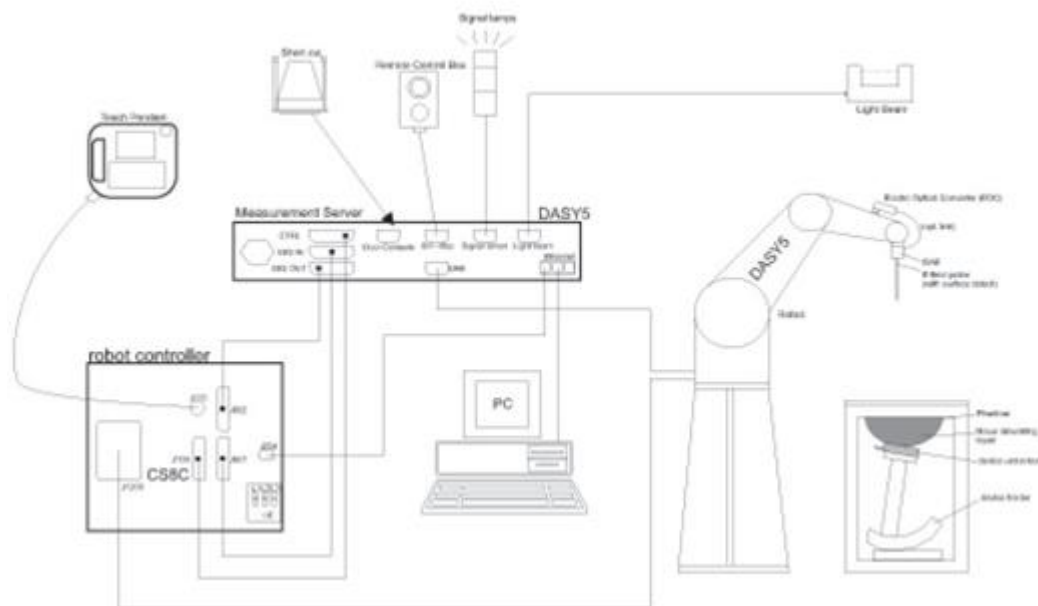


- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

8.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

8.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.


The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Photo of DAE


8.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

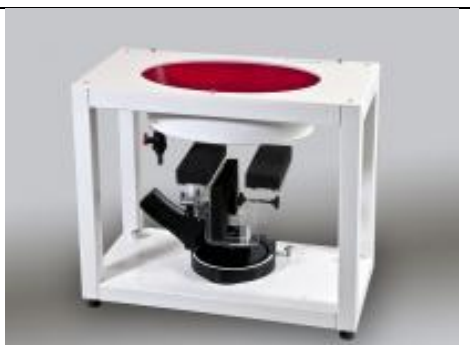Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices or for evaluating transmitters operating at low frequencies. ELI is fully compatible with standard and all known tissue simulating liquids.

8.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{\text{Area}}, \Delta y_{\text{Area}}$	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

9.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm [*]	3 – 4 GHz: ≤ 5 mm [*] 4 – 6 GHz: ≤ 4 mm [*]
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
[*] When zoom scan is required and the <u>reported</u> SAR from the <u>area scan based 1-g SAR estimation</u> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d162	2021/12/17	2022/12/16
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	2021/12/20	2022/12/19
SPEAG	2450MHz System Validation Kit	D2450V2	1040	2020/5/6	2023/5/4
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2020/11/26	2023/11/24
SPEAG	5000MHz System Validation Kit	D5GHzV2	1341	2021/12/13	2022/12/12
SPEAG	Data Acquisition Electronics	DAE4	1650	2022/8/5	2023/8/4
SPEAG	Dosimetric E-Field Probe	EX3DV4	7729	2022/5/30	2023/5/29
SPEAG	SAM Twin Phantom	SAM Twin	TP-1754	NCR	NCR
Testo	Thermo-Hygrometer	608-H1	1241332126	2022/1/6	2023/1/5
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Rohde & Schwarz	Vector Signal Generator	SMBV100A	258305	2022/1/5	2023/1/4
Anritsu	Radio Communication Analyzer	MT8821C	6262306175	2022/7/14	2023/7/13
Agilent	ENA Series Network Analyzer	E5071C	MY46104587	2022/5/24	2023/5/23
SPEAG	Dielectric Probe Kit	DAK-3.5	1071	2022/1/24	2023/1/23
Anritsu	Vector Signal Generator	MG3710A	6201682672	2022/1/6	2023/1/5
Rohde & Schwarz	Power Meter	NRVD	102081	2022/7/14	2023/7/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100538	2022/7/14	2023/7/13
Rohde & Schwarz	Power Sensor	NRV-Z5	100539	2022/7/14	2023/7/13
R&S	CBT BLUETOOTH TESTER	CBT	100641	2022/1/5	2023/1/4
Rohde & Schwarz	Spectrum Analyzer	FSV7	101631	2022/10/12	2023/10/11
TES	DIGITAC THERMOMETER	1310	200505600	2022/7/12	2023/7/11
BONN	POWER AMPLIFIER	BLMA 0830-3	087193A	Note 1	
BONN	POWER AMPLIFIER	BLMA 2060-2	087193B	Note 1	
Agilent	Dual Directional Coupler	778D	20500	Note 1	
Agilent	Dual Directional Coupler	11691D	MY48151020	Note 1	
ARRA	Power Divider	A3200-2	N/A	Note 1	
MCL	Attenuation1	BW-S10W5+	N/A	Note 1	
MCL	Attenuation2	BW-S10W5+	N/A	Note 1	
MCL	Attenuation3	BW-S10W5+	N/A	Note 1	

Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check.
2. Referring to KDB 865664 D01v01r04, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

11. System Verification

11.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 12.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 12.2.

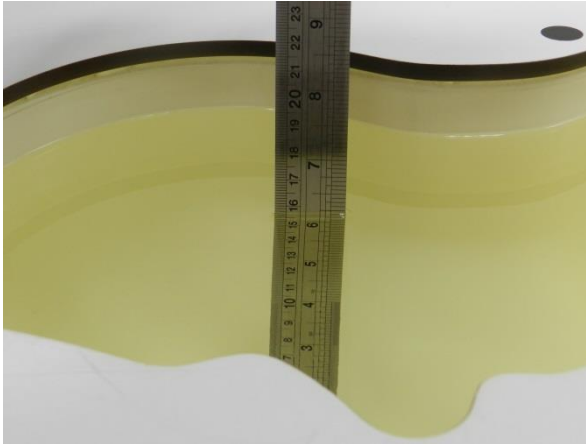


Fig 12.1 Photo of Liquid Height for Head SAR

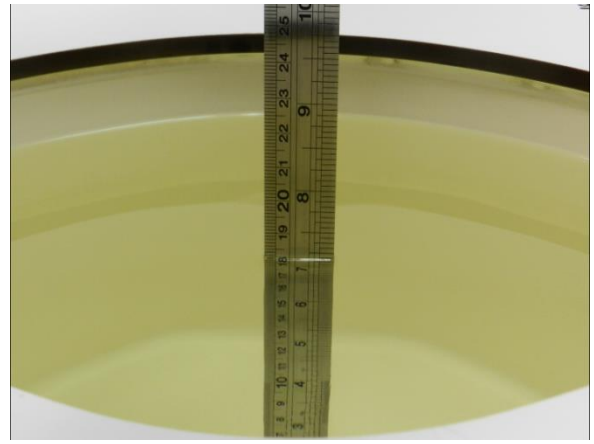


Fig 12.2 Photo of Liquid Height for Body SAR

11.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0

Simulating Liquid for 5GHz, Manufactured by SPEAG

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Head	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.8	0.930	40.922	0.90	41.50	3.33	-1.39	±5	2022/11/27
1900	Head	22.8	1.408	40.220	1.40	40.00	0.57	0.55	±5	2022/11/28
2600	Head	22.8	2.029	40.318	1.96	39.00	3.52	3.38	±5	2022/11/29
835	Head	22.7	0.929	40.921	0.90	41.50	3.22	-1.40	±5	2022/12/1
1900	Head	22.8	1.406	40.201	1.40	40.00	0.43	0.50	±5	2022/12/2
2600	Head	22.7	2.030	40.344	1.96	39.00	3.57	3.45	±5	2022/12/3
2450	Head	22.7	1.824	39.156	1.80	39.20	1.33	-0.11	±5	2022/12/5
5250	Head	22.8	4.570	35.987	4.71	35.90	-2.97	0.24	±5	2022/12/6
5600	Head	22.8	4.969	35.435	5.07	35.50	-1.99	-0.18	±5	2022/12/7
5750	Head	22.9	5.140	35.238	5.22	35.40	-1.53	-0.46	±5	2022/12/8

11.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

<1g SAR>

Date	Frequency (MHz)	Head	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2022/11/27	835	Head	50	4d162	7729	1650	0.508	9.64	10.16	5.39
2022/11/28	1900	Head	50	5d182	7729	1650	2.100	39.60	42	6.06
2022/11/29	2600	Head	50	1061	7729	1650	2.960	56.60	59.2	4.59
2022/12/1	835	Head	50	4d162	7729	1650	0.508	9.64	10.16	5.39
2022/12/2	1900	Head	50	5d182	7729	1650	2.080	39.60	41.6	5.05
2022/12/3	2600	Head	50	1061	7729	1650	2.930	56.60	58.6	3.53
2022/12/5	2450	Head	50	1040	7729	1650	2.450	51.80	49	-5.41
2022/12/6	5250	Head	50	1341	7729	1650	4.010	80.70	80.2	-0.62
2022/12/7	5600	Head	50	1341	7729	1650	4.190	84.50	83.8	-0.83
2022/12/8	5750	Head	50	1341	7729	1650	4.130	80.60	82.6	2.48

<10g SAR>

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2022/11/27	835	Head	50	4d162	7729	1650	0.337	6.26	6.74	7.67
2022/11/28	1900	Head	50	5d182	7729	1650	1.090	20.20	21.8	7.92
2022/11/29	2600	Head	50	1061	7729	1650	1.310	25.10	26.2	4.38
2022/12/1	835	Head	50	4d162	7729	1650	0.336	6.26	6.72	7.35
2022/12/2	1900	Head	50	5d182	7729	1650	1.050	20.20	21	3.96
2022/12/3	2600	Head	50	1061	7729	1650	1.340	25.10	26.8	6.77
2022/12/5	2450	Head	50	1040	7729	1650	1.110	24.00	22.2	-7.50
2022/12/6	5250	Head	50	1341	7729	1650	1.080	23.10	21.6	-6.49
2022/12/7	5600	Head	50	1341	7729	1650	1.210	24.00	24.2	0.83
2022/12/8	5750	Head	50	1341	7729	1650	1.190	22.70	23.8	4.85

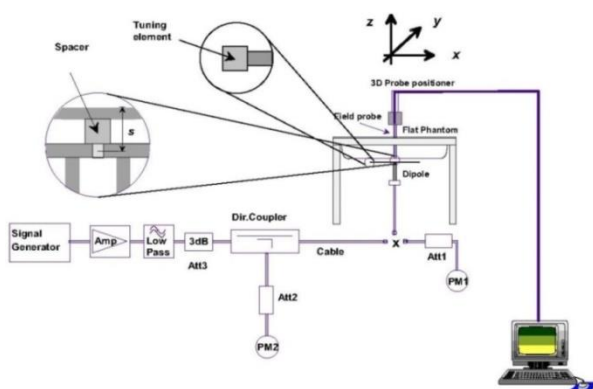


Fig 12.3.1 System Performance Check Setup



Fig 12.3.2 Setup Photo

12. RF Exposure Positions

12.1 Ear and handset reference point

Figure 12.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled “M,” the left ear reference point (ERP) is marked “LE,” and the right ERP is marked “RE.” Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 12.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 12.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 12.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

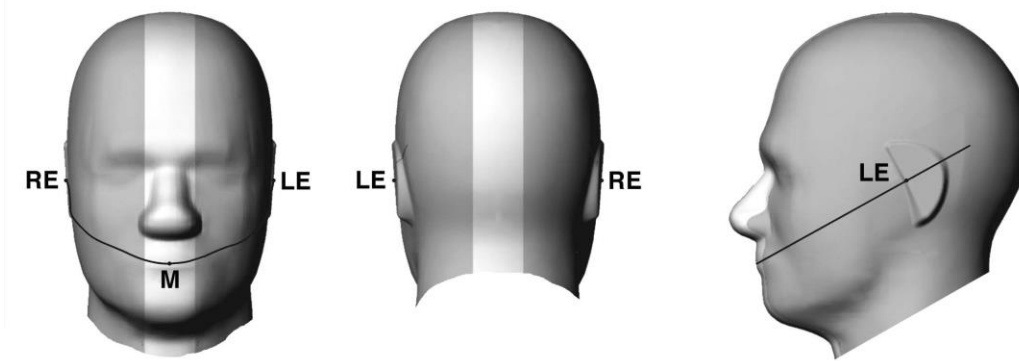


Fig 12.1.1 Front, back, and side views of SAM twin phantom

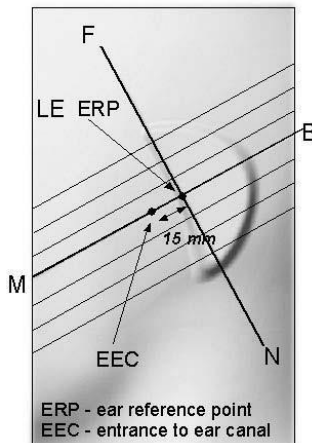


Fig 12.1.2 Close-up side view of phantom showing the ear region.

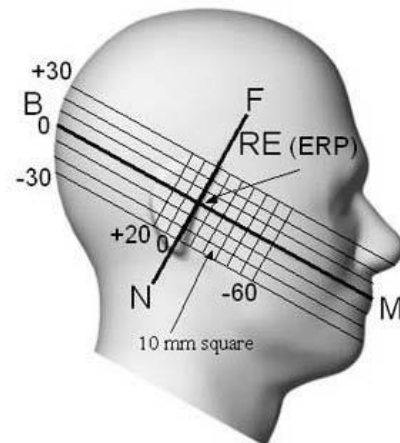


Fig 12.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

12.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 12.2.1 and Figure 12.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 12.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the handset. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 12.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 12.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 12.2.3. The actual rotation angles should be documented in the test report.

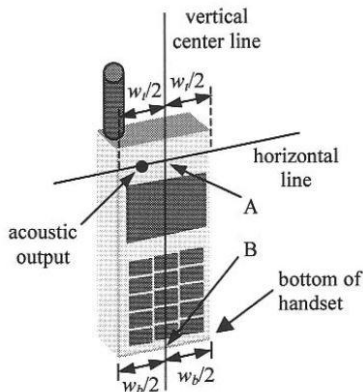


Fig 12.2.1 Handset vertical and horizontal reference lines—"fixed case"

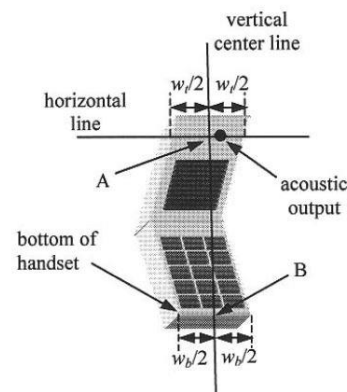


Fig 12.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

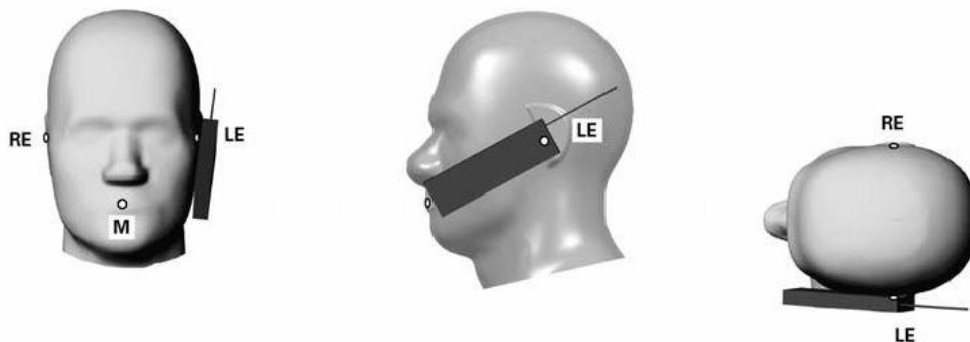


Fig 12.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

12.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
3. Rotate the handset around the horizontal line by 15°.
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 12.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

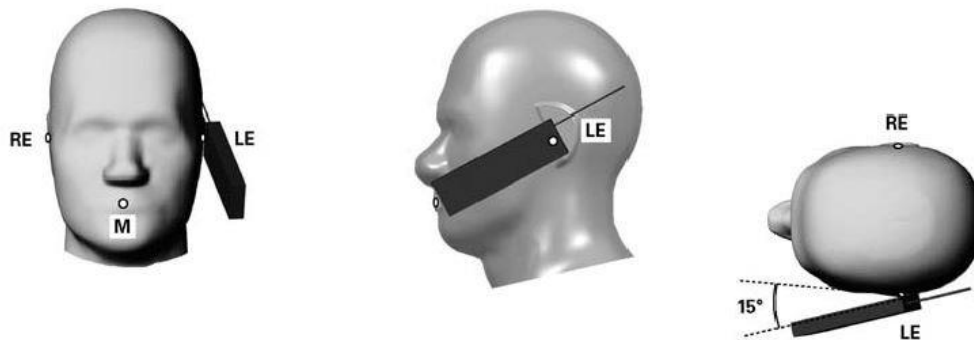


Fig 12.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

12.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 12.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

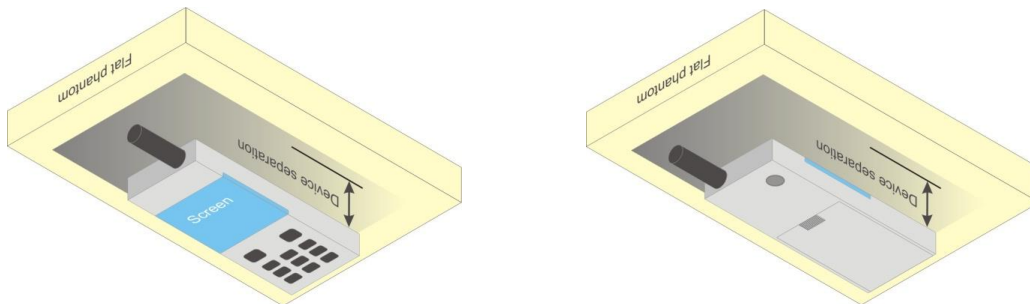


Fig 12.4 Body Worn Position

12.5 Product Specific 10g SAR Exposure

For smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, that can provide similar mobile web access and multimedia support found in mini-tablets or UMPC mini-tablets and support voice calls next to the ear, According to KDB648474 D04v01r03, the following phablet procedures should be applied to evaluate SAR compliance for each applicable wireless modes and frequency band. Devices marketed as phablets, regardless of form factors and operating characteristics must be tested as a phablet to determine SAR compliance

1. The normally required head and body-worn accessory SAR test procedures for handsets, including hotspot mode, must be applied.
2. The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB 865664 to address interactive hand use exposure conditions.⁶ The UMPC mini-tablet 1-g SAR at 5 mm is not required. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg.

12.6 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9$ cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

13. Conducted RF Output Power (Unit: dBm)

The detailed conducted power table can refer to Appendix E.

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_o/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
<p>Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.</p> <p>Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.</p> <p>Note 3: CM = 1 for $\beta_o/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.</p> <p>Note 4: For subtest 2 the β_o/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.</p>							

Setup Configuration

HSUPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting * :
 - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - Set Cell Power = -86 dBm
 - Set Channel Type = 12.2k + HSPA
 - Set UE Target Power
 - Power Ctrl Mode= Alternating bits
 - Set and observe the E-TFCI
 - Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 4) (Note 5)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2) (Note 6)	AG Index (Note 5)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15	0	-	-	5/15	5/15	47/15	4	1	1.0	0.0	12	67

Note 1: For sub-test 1 to 4, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. For sub-test 5, Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 5/15$ with $\beta_{hs} = 5/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 5: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 6: For subtests 2, 3 and 4, UE may perform E-DPDCH power scaling at max power which could results in slightly smaller MPR values.

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

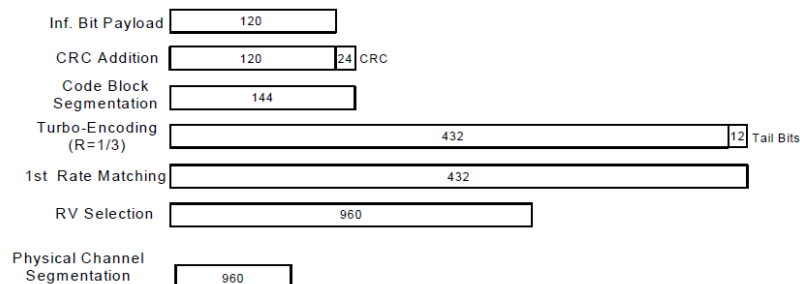


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration


<WCDMA Conducted Power>**General Note:**

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

<LTE Conducted Power>

General Note:

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
9. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band
10. According to May 2017 TCB workshop, for 16QAM and 64QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the MT8821C base station, therefore, the device 64QAM and 16QAM signal modulation are correct.

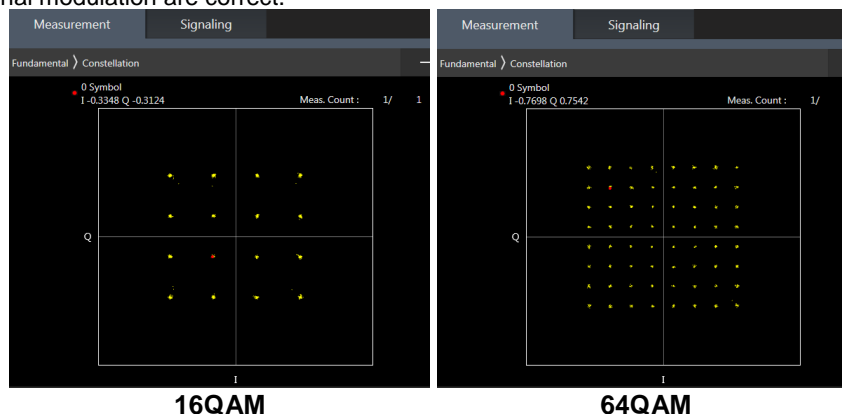

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- “special subframe S” contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

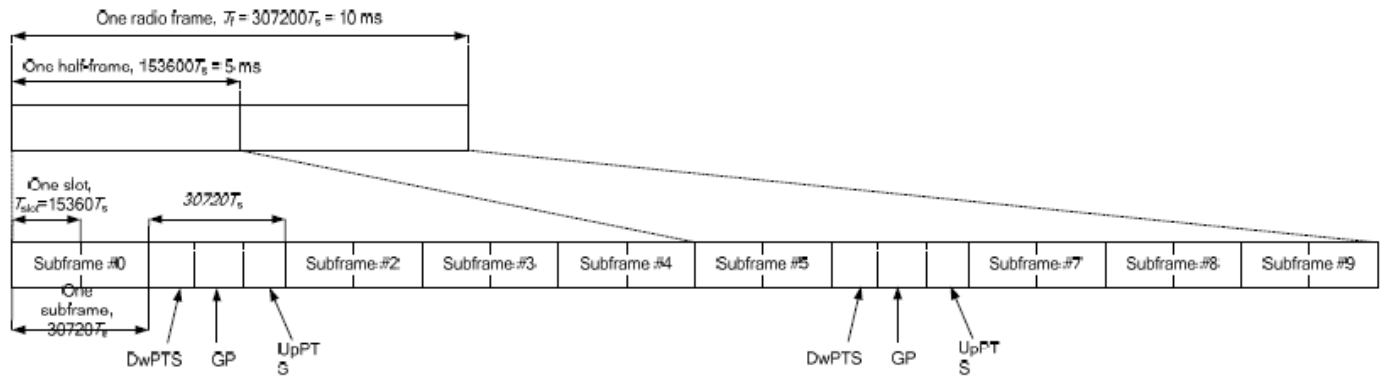


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$	-	-
8	$24144 \cdot T_s$			-		
9	$13168 \cdot T_s$			-		

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Carrier Aggregation>
General Note:

1. This device supports Carrier Aggregation on downlink for inter and intra band. For the device supports bands and bandwidths and configurations are provided as follow table was according to 3GPP.
2. In applying the existing power measurement procedures of KDB 941225 D05A for DL CA SAR test exclusion, only the subset with the largest number of combinations of frequency bands and CCs in each row need combination, and for this device that all the configurations were choose to power measurement.
3. The gray color table is covered by other combinations and no need to verify power.
4. All permutations exist. No restrictions on Pcell & Scell combinations.

2CC Downlink Carrier Aggregation	
Number	Combination
1	CA_38C
2	CA_41A-41A
3	CA_41C
4	CA_7A-7A
5	CA_7C
6	CA_5A-41A
7	CA_5A-7A,

LTE Carrier Aggregation Conducted Power (Downlink)

- i. According to KDB941225 D05A v01r02, Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.
- ii. Uplink maximum output power with downlink carrier aggregation active does not show more than ¼ dB higher than the maximum output power without downlink carrier aggregation active, therefore SAR evaluation with downlink carrier aggregation active can be excluded.
- iii. The device supports downlink two carrier aggregation. For power measurement were control and acknowledge data is sent on uplink channels that operate identical to specifications when downlink carrier aggregation is inactive.
- iv. Selected highest measured power when downlink carrier aggregation is inactive for conducted power comparison with downlink carrier aggregation is active, to confirm that when downlink carrier aggregation is active uplink maximum output power remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output power measured when downlink carrier aggregation inactive.
- v. For inter-band CA, the SCC selected highest bandwidth and near the middle of its transmission band. For SCC DL RB size and offset will base on the PCC corresponding RB allocation.
- vi. For non-contiguous intra-band CA, the SCC selected to provide maximum separation from the PCC and must remain fully within the downlink transmission band.
- vii. For Intra-band, contiguous CA, the downlink channels selected to perform the uplink power measurement must satisfy 3GPP channel spacing (5.4.1A of 3GPP TS 36.521 or equivalent) and channel bandwidth (5.4.2A) requirements.

$$\text{Nominal channel spacing} = \left\lceil \frac{BW_{\text{Channel}(1)} + BW_{\text{Channel}(2)} - 0.1|BW_{\text{Channel}(1)} - BW_{\text{Channel}(2)}|}{0.6} \right\rceil 0.3 \text{ [MHz]}$$

LTE Carrier Aggregation Conducted Power (Uplink)
<Intra-band>

2CC Uplink Carrier Aggregation		
Number	Combination	Ant No.
1	7C	ANT0/1
2	38C	ANT0/1

General Note:

- i. The device supports intra-band uplink carrier aggregation for LTE B7/B38 with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre 3GPP requirement.
- ii. The device supports uplink carrier aggregation with a maximum of two 20MHz component carriers. For intra band contiguous carrier aggregation scenarios, 3GPP 36.101 table 6.2.2A-1 specifies that the aggregate maximum allowed output power is equivalent to the single carrier scenario. 3GPP 36.101 6.2.3A allows for several dB of MPR to be applied when not-contiguous RB allocation is implemented. The conducted power and MPR setting in this device are permanently implemented pre the 3GPP requirement.
- iii. According Nov. 2017 TCB workshop, the output power with uplink CA active was measured for the configuration with the highest reported SAR with single carrier for each exposure condition. The power was measured with wideband signal integration over both component carriers.
- iv. Additional SAR measurement for LTE UL CA with other DL CA combinations active were not required since the maximum output power for this configuration was not > 0.25dB higher than the maximum output power for UL CA active.

<WLAN Conducted Power>


General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz Bluetooth>

General Note:

1. For 2.4GHz Bluetooth SAR testing was selected 1Mbps, due to its highest average power.
2. The Bluetooth duty cycle are 77.03 % as following figure, according to 2016 Oct. TCB workshop for Bluetooth SAR scaling need further consideration and the maximum duty cycle is 100%, therefore the actual duty cycle will be scaled up to 100% for Bluetooth reported SAR calculation

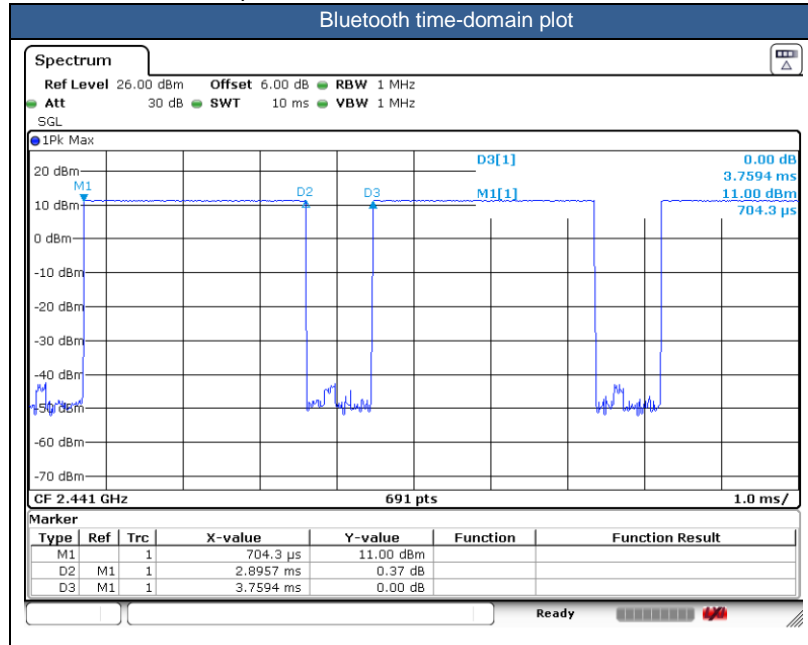



14. Antenna Location

The detailed antenna location information can refer to SAR Test Setup Photos.

15. SAR Test Results

General Note:

- Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - For SAR testing of BT/WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - For BT/WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
 - For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
- Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg. Per KDB 865664 D01v01r04, if the extremity repeated SAR is necessary, the same procedures should be adapted for measurements according to extremity and occupational exposure limits by applying a factor of 2.5 for extremity exposure and a factor of 5 for occupational exposure to the corresponding SAR thresholds.
- For dual SIM card mobile has two SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose SIM1 slot to perform all tests.
- The device implements Proximity sensors/receiver detect mechanism reduced power for the power management for SAR compliance at different exposure conditions (head, body-worn, hotspot, extremity). It uses the receiver to indicate whether the user is making a call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. It can determine proximity to head or body and set the relevant power level for 2G&3G&4G and Wi-Fi antennas accordingly. The device will invoke corresponding work scenarios power level base on frequency bands/antennas, which can refer to appendix E. power table. Full power table and reduced power table (DSI 1: receiver on reduced power for head; DSI 4: P-sensor on for hotspot/ body; DSI 2: receiver off /P-sensor off).
- Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold,
 - WLAN 5.3/5.5GHz tested the product specific 10g SAR since it has no hotspot mode.
 - When 10-g product specific 10g SAR is considered, SAR thresholds is specified in the procedures for SAR test reduction and exclusion should be multiplied by 2.5.

GSM Note:

- Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

WCDMA Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM/64QAM/256QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
7. LTE B38 SAR test was covered by B41; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. the maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion
 - b. the channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is ≤ 1.2 W/kg, SAR is not required for U-NII-1 band.
3. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
4. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
5. During SAR testing the WLAN transmission was verified using a spectrum analyzer.



15.1 Head SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
835MHz																				
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 0	DSI1	189	836.4	25.91	27.50	1.442	-	-	0.05	0.121	0.174
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 0	DSI1	189	836.4	25.91	27.50	1.442	-	-	0.13	0.060	0.087
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 0	DSI1	189	836.4	25.91	27.50	1.442	-	-	0.06	0.106	0.153
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 0	DSI1	189	836.4	25.91	27.50	1.442	-	-	-0.04	0.051	0.074
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI1	189	836.4	25.96	27.50	1.426	-	-	0.09	0.443	0.632
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI1	189	836.4	25.96	27.50	1.426	-	-	0.08	0.378	0.539
01	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	DSI1	189	836.4	25.96	27.50	1.426	-	-	-0.01	0.495	0.706
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 1	DSI1	189	836.4	25.96	27.50	1.426	-	-	-0.03	0.465	0.663
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 0	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.03	0.195	0.261
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 0	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.12	0.101	0.135
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 0	DSI1	4182	836.4	24.23	25.50	1.340	-	-	-0.1	0.182	0.244
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 0	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.12	0.093	0.125
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.07	0.608	0.815
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI1	4132	826.4	24.12	25.50	1.374	-	-	0.08	0.639	0.878
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Cheek	0mm	Ant 1	DSI1	4233	846.6	24.18	25.50	1.355	-	-	0.08	0.606	0.821
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Tilted	0mm	Ant 1	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.07	0.514	0.689
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.05	0.678	0.908
02	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI1	4132	826.4	24.12	25.50	1.374	-	-	-0.04	0.707	0.971
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Cheek	0mm	Ant 1	DSI1	4233	846.6	24.18	25.50	1.355	-	-	-0.01	0.686	0.930
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI1	4182	836.4	24.23	25.50	1.340	-	-	0.06	0.624	0.836
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI1	4132	826.4	24.12	25.50	1.374	-	-	0.16	0.637	0.875
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Tilted	0mm	Ant 1	DSI1	4233	846.6	24.18	25.50	1.355	-	-	0.08	0.600	0.813
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI1	20525	836.5	24.32	25.50	1.312	-	-	0.02	0.205	0.269
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 0	DSI1	20525	836.5	23.36	24.50	1.300	-	-	-0.06	0.166	0.216
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI1	20525	836.5	24.32	25.50	1.312	-	-	0.04	0.113	0.148
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 0	DSI1	20525	836.5	23.36	24.50	1.300	-	-	-0.18	0.090	0.117
	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI1	20525	836.5	24.32	25.50	1.312	-	-	0.18	0.191	0.251
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 0	DSI1	20525	836.5	23.36	24.50	1.300	-	-	0.1	0.153	0.199
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI1	20525	836.5	24.32	25.50	1.312	-	-	0.02	0.102	0.134
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 0	DSI1	20525	836.5	23.36	24.50	1.300	-	-	0.02	0.085	0.111
	LTE Band 5	10M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI1	20525	836.5	24.31	25.50	1.315	-	-	-0.13	0.704	0.926
	LTE Band 5	10M	QPSK	25	0	-	Right Cheek	0mm	Ant 1	DSI1	20525	836.5	23.15	24.50	1.365	-	-	-0.1	0.571	0.779
	LTE Band 5	10M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI1	20525	836.5	23.07	24.50	1.390	-	-	0.06	0.546	0.759
	LTE Band 5	10M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	20525	836.5	24.31	25.50	1.315	-	-	0.17	0.606	0.797
	LTE Band 5	10M	QPSK	25	0	-	Right Tilted	0mm	Ant 1	DSI1	20525	836.5	23.15	24.50	1.365	-	-	-0.15	0.500	0.682
03	LTE Band 5	10M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI1	20525	836.5	24.31	25.50	1.315	-	-	-0.19	0.785	1.032
	LTE Band 5	10M	QPSK	25	0	-	Left Cheek	0mm	Ant 1	DSI1	20525	836.5	23.15	24.50	1.365	-	-	0.14	0.632	0.862
	LTE Band 5	10M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI1	20525	836.5	23.07	24.50	1.390	-	-	-0.04	0.607	0.844
	LTE Band 5	10M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI1	20525	836.5	24.31	25.50	1.315	-	-	0.09	0.724	0.952
	LTE Band 5	10M	QPSK	25	0	-	Left Tilted	0mm	Ant 1	DSI1	20525	836.5	23.15	24.50	1.365	-	-	0.08	0.591	0.806
	LTE Band 5	10M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI1	20525	836.5	23.07	24.50	1.390	-	-	0.04	0.568	0.789
1900MHz																				
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Right Cheek	0mm	Ant 0	DSI1	661	1880	29.61	30.50	1.227	-	-	-0.18	0.081	0.099
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Right Tilted	0mm	Ant 0	DSI1	661	1880	29.61	30.50	1.227	-	-	0.05	0.079	0.097
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Left Cheek	0mm	Ant 0	DSI1	661	1880	29.61	30.50	1.227	-	-	0.06	0.100	0.123
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Left Tilted	0mm	Ant 0	DSI1	661	1880	29.61	30.50	1.227	-	-	0.19	0.089	0.109
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Cheek	0mm	Ant 1	DSI1	661	1880	19.32	20.50	1.312	-	-	0.02	0.605	0.794
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI1	661	1880	19.32	20.50	1.312	-	-	-0.06	0.774	1.016
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI1	512	1850.2	19.09	20.50	1.384	-	-	0.17	0.488	0.675
04	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DSI1	810	1909.8	19.16	20.50	1.361	-	-	0.01	0.803	1.093



FCC SAR Test Report

Report No. : FA202911-01

	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Left Cheek	0mm	Ant 1	DSI1	661	1880	19.32	20.50	1.312	-	-	0.07	0.429	0.563
	GSM1900	-	-	-	-	GPRS (4 Tx slots)	Left Tilted	0mm	Ant 1	DSI1	661	1880	19.32	20.50	1.312	-	-	0.03	0.537	0.705
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI1	21100	2535	23.87	25.00	1.297	-	-	-0.06	0.138	0.179
	LTE Band 7C	20M	QPSK	1	99	-	Right Cheek	0mm	Ant 0	DSI1	21100+ 21298	2535+ 2554.8	23.33	25.00	1.469	-	-	0.02	0.105	0.154
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI1	21100	2535	22.83	24.00	1.309	-	-	-0.08	0.112	0.147
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI1	21100	2535	23.87	25.00	1.297	-	-	-0.1	0.064	0.083
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI1	21100	2535	22.83	24.00	1.309	-	-	0.05	0.058	0.076
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI1	21100	2535	23.87	25.00	1.297	-	-	0.04	0.123	0.160
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI1	21100	2535	22.83	24.00	1.309	-	-	0.15	0.095	0.124
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI1	21100	2535	23.87	25.00	1.297	-	-	-0.1	0.132	0.171
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI1	21100	2535	22.83	24.00	1.309	-	-	-0.11	0.104	0.136
	LTE Band 7	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI1	21100	2535	16.20	17.00	1.202	-	-	0.06	0.500	0.601
	LTE Band 7	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI1	21100	2535	16.18	17.00	1.208	-	-	-0.03	0.531	0.641
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	21100	2535	16.20	17.00	1.202	-	-	0.04	0.666	0.801
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	20850	2510	16.07	17.00	1.239	-	-	0.04	0.625	0.774
	LTE Band 7	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	21350	2560	16.04	17.00	1.247	-	-	0.04	0.676	0.843
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI1	21100	2535	16.18	17.00	1.208	-	-	0.05	0.664	0.802
	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI1	20850	2510	16.07	17.00	1.239	-	-	0.06	0.539	0.668
05	LTE Band 7	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI1	21350	2560	15.94	17.00	1.276	-	-	-0.07	0.794	1.013
	LTE Band 7C	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI1	21350+ 21152	2560+ 2540.2	15.91	17.00	1.285	-	-	0.06	0.773	0.994
	LTE Band 7	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 1	DSI1	21100	2535	16.09	17.00	1.233	-	-	0.06	0.667	0.822
	LTE Band 7	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI1	21100	2535	16.20	17.00	1.202	-	-	0.07	0.441	0.530
	LTE Band 7	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI1	21100	2535	16.18	17.00	1.208	-	-	0.14	0.466	0.563
	LTE Band 7	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI1	21100	2535	16.20	17.00	1.202	-	-	0.06	0.436	0.524
	LTE Band 7	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI1	21100	2535	16.18	17.00	1.208	-	-	0.04	0.468	0.565
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 0	DSI1	40620	2593	24.29	25.50	1.321	62.9	1.006	0.04	0.079	0.105
	LTE Band 38C	20M	QPSK	1	99	-	Right Cheek	0mm	Ant 0	DSI1	37901+ 38099	2585.1+ 2604.9	24.21	25.50	1.346	62.9	1.006	-0.02	0.056	0.076
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 0	DSI1	40620	2593	23.34	24.50	1.306	62.9	1.006	0.08	0.059	0.078
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 0	DSI1	40620	2593	24.29	25.50	1.321	62.9	1.006	-0.09	0.001	0.001
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 0	DSI1	40620	2593	23.34	24.50	1.306	62.9	1.006	0.06	0.001	0.001
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 0	DSI1	40620	2593	24.29	25.50	1.321	62.9	1.006	-0.15	0.073	0.097
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 0	DSI1	40620	2593	23.34	24.50	1.306	62.9	1.006	-0.08	0.066	0.087
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 0	DSI1	40620	2593	24.29	25.50	1.321	62.9	1.006	-0.16	0.068	0.090
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 0	DSI1	40620	2593	23.34	24.50	1.306	62.9	1.006	-0.07	0.059	0.078
	LTE Band 41	20M	QPSK	1	0	-	Right Cheek	0mm	Ant 1	DSI1	40620	2593	17.17	18.00	1.211	62.9	1.006	-0.07	0.458	0.558
	LTE Band 41	20M	QPSK	50	0	-	Right Cheek	0mm	Ant 1	DSI1	40620	2593	17.12	18.00	1.225	62.9	1.006	0.07	0.453	0.558
06	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	40620	2593	17.17	18.00	1.211	62.9	1.006	0.08	0.708	0.862
	LTE Band 38C	20M	QPSK	1	99	-	Right Tilted	0mm	Ant 1	DSI1	37901+ 38099	2585.1+ 2604.9	16.95	18.00	1.274	62.9	1.006	0.01	0.635	0.814
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	39750	2506	16.96	18.00	1.271	62.9	1.006	-0.05	0.367	0.469
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	40185	2549.5	17.11	18.00	1.227	62.9	1.006	-0.19	0.547	0.675
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	41055	2636.5	17.06	18.00	1.242	62.9	1.006	0.04	0.480	0.600
	LTE Band 41	20M	QPSK	1	0	-	Right Tilted	0mm	Ant 1	DSI1	41490	2680	17.12	18.00	1.225	62.9	1.006	0.14	0.356	0.439
	LTE Band 41	20M	QPSK	50	0	-	Right Tilted	0mm	Ant 1	DSI1	40620	2593	17.12	18.00	1.225	62.9	1.006	-0.11	0.473	0.583
	LTE Band 41	20M	QPSK	100	0	-	Right Tilted	0mm	Ant 1	DSI1	40620	2593	17.05	18.00	1.245	62.9	1.006	0.14	0.568	0.711
	LTE Band 41	20M	QPSK	1	0	-	Left Cheek	0mm	Ant 1	DSI1	40620	2593	17.17	18.00	1.211	62.9	1.006	-0.08	0.419	0.510
	LTE Band 41	20M	QPSK	50	0	-	Left Cheek	0mm	Ant 1	DSI1	40620	2593	17.12	18.00	1.225	62.9	1.006	-0.01	0.410	0.505
	LTE Band 41	20M	QPSK	1	0	-	Left Tilted	0mm	Ant 1	DSI1	40620	2593	17.17	18.00	1.211	62.9	1.006	-0.02	0.469	0.571
	LTE Band 41	20M	QPSK	50	0	-	Left Tilted	0mm	Ant 1	DSI1	40620	2593	17.12	18.00	1.225	62.9	1.006	-0.12	0.479	0.590



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	0mm	Ant 3	Receiver on	1	2412	17.34	18.50	1.306	97.8	1.022	-0.11	0.143	0.191
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	0mm	Ant 3	Receiver on	1	2412	17.34	18.50	1.306	97.8	1.022	0.14	0.142	0.190
07	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	0mm	Ant 3	Receiver on	1	2412	17.34	18.50	1.306	97.8	1.022	-0.01	0.366	0.489
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	0mm	Ant 3	Receiver on	1	2412	17.34	18.50	1.306	97.8	1.022	0.01	0.265	0.354
	Bluetooth	1Mbps	Right Cheek	0mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	-0.08	0.050	0.089
	Bluetooth	1Mbps	Right Tilted	0mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	-0.01	0.061	0.109
	Bluetooth	1Mbps	Left Cheek	0mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	-0.02	0.079	0.141
08	Bluetooth	1Mbps	Left Tilted	0mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	0.09	0.093	0.166
5000MHz																
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	Receiver on	58	5290	13.48	14.50	1.265	89.24	1.121	-0.08	0.264	0.374
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	Receiver on	58	5290	13.48	14.50	1.265	89.24	1.121	-0.16	0.305	0.432
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Receiver on	58	5290	13.48	14.50	1.265	89.24	1.121	-0.07	0.367	0.520
09	WLAN5.3GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	Receiver on	58	5290	13.48	14.50	1.265	89.24	1.121	-0.01	0.452	0.641
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	Receiver on	122	5610	11.59	12.50	1.233	89.24	1.121	0.07	0.224	0.310
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	Receiver on	122	5610	11.59	12.50	1.233	89.24	1.121	0.14	0.274	0.379
	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Receiver on	122	5610	11.59	12.50	1.233	89.24	1.121	0.06	0.317	0.438
10	WLAN5.5GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	Receiver on	122	5610	11.59	12.50	1.233	89.24	1.121	-0.06	0.359	0.496
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Cheek	0mm	Ant 3	Receiver on	155	5775	12.32	13.00	1.169	89.24	1.121	0.08	0.157	0.206
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Right Tilted	0mm	Ant 3	Receiver on	155	5775	12.32	13.00	1.169	89.24	1.121	-0.05	0.193	0.253
	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Cheek	0mm	Ant 3	Receiver on	155	5775	12.32	13.00	1.169	89.24	1.121	-0.19	0.222	0.291
11	WLAN5.8GHz	802.11ac-VHT80 MCS0	Left Tilted	0mm	Ant 3	Receiver on	155	5775	12.32	13.00	1.169	89.24	1.121	-0.03	0.269	0.353



15.2 Hotspot SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
835MHz																				
12	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	10mm	Ant 0	DSI 4	189	836.4	25.91	27.50	1.442	-	-	0.17	0.141	0.203
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 0	DSI 4	189	836.4	25.91	27.50	1.442	-	-	-0.06	0.269	0.388
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Side	10mm	Ant 0	DSI 2	189	836.4	25.91	27.50	1.442	-	-	0.01	0.074	0.107
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Right Side	10mm	Ant 0	DSI 2	189	836.4	25.91	27.50	1.442	-	-	0.16	0.135	0.195
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Bottom Side	10mm	Ant 0	DSI 4	189	836.4	25.91	27.50	1.442	-	-	0.19	0.218	0.314
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	10mm	Ant 1	DSI 4	189	836.4	25.96	27.50	1.426	-	-	-0.09	0.153	0.218
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 1	DSI 4	189	836.4	25.96	27.50	1.426	-	-	0.01	0.235	0.335
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Left Side	10mm	Ant 1	DSI 2	189	836.4	25.96	27.50	1.426	-	-	0.02	0.115	0.164
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Top Side	10mm	Ant 1	DSI 4	189	836.4	25.96	27.50	1.426	-	-	0.02	0.206	0.294
13	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 0	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.18	0.184	0.247
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 0	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.06	0.310	0.415
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 0	DSI 2	4182	836.4	24.23	25.50	1.340	-	-	0.04	0.100	0.134
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Right Side	10mm	Ant 0	DSI 2	4182	836.4	24.23	25.50	1.340	-	-	-0.18	0.171	0.229
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Bottom Side	10mm	Ant 0	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.03	0.193	0.259
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.05	0.181	0.242
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	-0.09	0.272	0.364
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Left Side	10mm	Ant 1	DSI 2	4182	836.4	24.23	25.50	1.340	-	-	-0.12	0.129	0.173
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Top Side	10mm	Ant 1	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.08	0.209	0.280
14	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 4	20525	836.5	24.32	25.50	1.312	-	-	0.18	0.192	0.252
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 0	DSI 4	20525	836.5	23.36	24.50	1.300	-	-	0.02	0.158	0.205
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 4	20525	836.5	24.32	25.50	1.312	-	-	0.02	0.338	0.444
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 0	DSI 4	20525	836.5	23.36	24.50	1.300	-	-	-0.11	0.278	0.361
	LTE Band 5	10M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	20525	836.5	24.32	25.50	1.312	-	-	0.09	0.130	0.171
	LTE Band 5	10M	QPSK	25	0	-	Left Side	10mm	Ant 0	DSI 2	20525	836.5	23.36	24.50	1.300	-	-	0.05	0.102	0.133
	LTE Band 5	10M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	20525	836.5	24.32	25.50	1.312	-	-	0.19	0.186	0.244
	LTE Band 5	10M	QPSK	25	0	-	Right Side	10mm	Ant 0	DSI 2	20525	836.5	23.36	24.50	1.300	-	-	0.05	0.149	0.194
	LTE Band 5	10M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 4	20525	836.5	24.32	25.50	1.312	-	-	-0.1	0.251	0.329
	LTE Band 5	10M	QPSK	25	0	-	Bottom Side	10mm	Ant 0	DSI 4	20525	836.5	23.36	24.50	1.300	-	-	0.04	0.214	0.278
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 4	20525	836.5	24.31	25.50	1.315	-	-	-0.03	0.206	0.271
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 1	DSI 4	20525	836.5	23.15	24.50	1.365	-	-	0.03	0.162	0.221
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	24.31	25.50	1.315	-	-	0.09	0.334	0.439
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	23.15	24.50	1.365	-	-	0.14	0.265	0.362
	LTE Band 5	10M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	20525	836.5	24.31	25.50	1.315	-	-	0.03	0.131	0.172
	LTE Band 5	10M	QPSK	25	0	-	Left Side	10mm	Ant 1	DSI 2	20525	836.5	23.15	24.50	1.365	-	-	0.02	0.097	0.132
	LTE Band 5	10M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	20525	836.5	24.31	25.50	1.315	-	-	-0.02	0.178	0.234
	LTE Band 5	10M	QPSK	25	0	-	Top Side	10mm	Ant 1	DSI 4	20525	836.5	23.15	24.50	1.365	-	-	0.07	0.149	0.203
1900MHz																				
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	10mm	Ant 0	DSI 4	661	1880	27.70	28.50	1.202	-	-	-0.13	0.268	0.322
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	10mm	Ant 0	DSI 4	661	1880	27.70	28.50	1.202	-	-	0.05	0.373	0.448
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Left Side	10mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	-0.02	0.177	0.217
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Right Side	10mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	0.11	0.059	0.072
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Bottom Side	10mm	Ant 0	DSI 4	661	1880	27.70	28.50	1.202	-	-	0.01	0.371	0.446
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	14mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	-0.02	0.318	0.390
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	19mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	0.07	0.262	0.322
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Bottom Side	19mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	0.08	0.152	0.187
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	10mm	Ant 1	DSI 4	661	1880	28.12	28.50	1.091	-	-	-0.16	0.299	0.326
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	10mm	Ant 1	DSI 4	661	1880	28.12	28.50	1.091	-	-	0.08	0.583	0.636
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Left Side	10mm	Ant 1	DSI 2	661	1880	29.98	30.50	1.127	-	-	0.04	0.088	0.099
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Top Side	10mm	Ant 1	DSI 4	661	1880	28.12	28.50	1.091	-	-	-0.02	0.750	0.819
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Top Side	10mm	Ant 1	DSI 4	512	1850.2	27.98	28.50	1.127	-	-	0.04	0.764	0.861



FCC SAR Test Report

Report No. : FA202911-01

15	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Top Side	10mm	Ant 1	DSI 4	810	1909.8	28.00	28.50	1.122	-	-	0.12	0.801	0.899
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	12mm	Ant 1	DSI 2	661	1880	29.98	30.50	1.127	-	-	-0.01	0.559	0.630
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	19mm	Ant 1	DSI 2	661	1880	29.98	30.50	1.127	-	-	-0.01	0.617	0.695
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Top Side	19mm	Ant 1	DSI 2	661	1880	29.98	30.50	1.127	-	-	0.03	0.412	0.465
2600MHz																				
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 4	21100	2535	17.81	19.00	1.315	-	-	0.03	0.193	0.254
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 0	DSI 4	21100	2535	17.77	19.00	1.327	-	-	0.02	0.190	0.252
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 4	21100	2535	17.81	19.00	1.315	-	-	-0.02	0.291	0.383
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 0	DSI 4	21100	2535	17.77	19.00	1.327	-	-	0.07	0.316	0.419
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	0.1	0.079	0.102
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.03	0.054	0.070
	LTE Band 7	20M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	-0.13	0.130	0.168
	LTE Band 7	20M	QPSK	50	0	-	Right Side	10mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.04	0.102	0.133
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 4	21100	2535	17.81	19.00	1.315	-	-	0.08	0.664	0.873
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 4	20850	2510	17.58	19.00	1.387	-	-	-0.04	0.639	0.886
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 4	21350	2560	17.69	19.00	1.352	-	-	-0.18	0.423	0.572
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 4	21100	2535	17.77	19.00	1.327	-	-	0.04	0.638	0.847
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 4	20850	2510	17.47	19.00	1.422	-	-	0.15	0.637	0.906
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 4	21350	2560	17.71	19.00	1.346	-	-	-0.02	0.424	0.571
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	10mm	Ant 0	DSI 4	21100	2535	17.68	19.00	1.355	-	-	-0.09	0.494	0.669
	LTE Band 7	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	-0.12	0.623	0.804
	LTE Band 7	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	20850	2510	22.83	24.00	1.309	-	-	-0.09	0.680	0.890
	LTE Band 7	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	21350	2560	22.77	24.00	1.327	-	-	0.17	0.477	0.633
	LTE Band 7	20M	QPSK	50	0	-	Front	14mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.05	0.509	0.663
	LTE Band 7	20M	QPSK	100	0	-	Front	14mm	Ant 0	DSI 2	21100	2535	22.74	24.00	1.337	-	-	0.07	0.475	0.635
	LTE Band 7	20M	QPSK	1	0	-	Back	19mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	0.03	0.438	0.566
	LTE Band 7	20M	QPSK	50	0	-	Back	19mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.03	0.498	0.649
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	19mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	0.07	0.665	0.859
16	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	19mm	Ant 0	DSI 2	20850	2510	22.83	24.00	1.309	-	-	-0.04	0.799	1.046
	LTE Band 7C	20M	QPSK	1	99	-	Bottom Side	19mm	Ant 0	DSI 2	20850+21048	2510+2529.8	22.63	24.00	1.371	-	-	0.04	0.752	1.031
	LTE Band 7	20M	QPSK	1	0	-	Bottom Side	19mm	Ant 0	DSI 2	21350	2560	22.77	24.00	1.327	-	-	-0.08	0.536	0.711
	LTE Band 7	20M	QPSK	50	0	-	Bottom Side	19mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.1	0.531	0.692
	LTE Band 7	20M	QPSK	100	0	-	Bottom Side	19mm	Ant 0	DSI 2	21100	2535	22.74	24.00	1.337	-	-	-0.17	0.507	0.678
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 4	21100	2535	18.10	19.00	1.230	-	-	0.07	0.208	0.256
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 4	21100	2535	17.99	19.00	1.262	-	-	0.05	0.213	0.269
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	18.10	19.00	1.230	-	-	0.12	0.377	0.464
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	17.99	19.00	1.262	-	-	0.03	0.390	0.492
	LTE Band 7	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	21100	2535	23.99	25.00	1.262	-	-	0.08	0.290	0.366
	LTE Band 7	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	21100	2535	23.09	24.00	1.233	-	-	0.02	0.297	0.366
	LTE Band 7	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	21100	2535	18.10	19.00	1.230	-	-	0.07	0.507	0.624
	LTE Band 7	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	DSI 4	21100	2535	17.99	19.00	1.262	-	-	-0.04	0.523	0.660
	LTE Band 7	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	21100	2535	23.99	25.00	1.262	-	-	-0.02	0.380	0.479
	LTE Band 7	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	21100	2535	23.09	24.00	1.233	-	-	-0.02	0.358	0.441
	LTE Band 7	20M	QPSK	1	0	-	Back	19mm	Ant 1	DSI 2	21100	2535	23.99	25.00	1.262	-	-	-0.1	0.326	0.411
	LTE Band 7	20M	QPSK	50	0	-	Back	19mm	Ant 1	DSI 2	21100	2535	23.09	24.00	1.233	-	-	0.02	0.325	0.401
	LTE Band 7	20M	QPSK	1	0	-	Top Side	19mm	Ant 1	DSI 2	21100	2535	23.99	25.00	1.262	-	-	0.02	0.594	0.750
	LTE Band 7C	20M	QPSK	1	99	-	Top Side	19mm	Ant 1	DSI 2	21100+21298	2535+2554.8	23.53	25.00	1.403	-	-	0.01	0.558	0.783
	LTE Band 7	20M	QPSK	50	0	-	Top Side	19mm	Ant 1	DSI 2	21100	2535	23.09	24.00	1.233	-	-	0.03	0.353	0.435
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 4	40620	2593	19.92	21.00	1.282	62.9	1.006	-0.01	0.239	0.308
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 0	DSI 4	40620	2593	19.86	21.00	1.300	62.9	1.006	0.05	0.235	0.307
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 4	40620	2593	19.92	21.00	1.282	62.9	1.006	0.12	0.356	0.459
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 0	DSI 4	40620	2593	19.86	21.00	1.300	62.9	1.006	-0.07	0.345	0.451
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	0.11	0.064	0.085
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	0.08	0.055	0.072
	LTE Band 41	20M	QPSK	1	0	-	Right Side	10mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	-0.09	0.089	0.118
	LTE Band 41	20M	QPSK	50	0	-	Right Side	10mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	-0.09	0.070	0.092

Sporton International Inc. (Kunshan)

TEL : 86-512-57900158 / FAX : 86-512-57900958

FCC ID : 2AFZZAA2Y

Page 51 of 61

Issued Date : Dec. 27, 2022

Form version. : 200414



FCC SAR Test Report

Report No. : FA202911-01

	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	10mm	Ant 0	DSI 4	40620	2593	19.92	21.00	1.282	62.9	1.006	0.07	0.389	0.502
	LTE Band 38C	20M	QPSK	1	99	-	Bottom Side	10mm	Ant 0	DSI 4	37901+38099	2585.1+2604.9	19.87	21.00	1.297	62.9	1.006	0.06	0.354	0.462
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	10mm	Ant 0	DSI 4	40620	2593	19.86	21.00	1.300	62.9	1.006	0.05	0.350	0.458
	LTE Band 41	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	0.02	0.377	0.501
	LTE Band 41	20M	QPSK	50	0	-	Front	14mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	0.04	0.292	0.384
	LTE Band 41	20M	QPSK	1	0	-	Back	19mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	0.09	0.266	0.354
	LTE Band 41	20M	QPSK	50	0	-	Back	19mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	0.05	0.205	0.269
	LTE Band 41	20M	QPSK	1	0	-	Bottom Side	19mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	0.02	0.296	0.393
	LTE Band 41	20M	QPSK	50	0	-	Bottom Side	19mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	-0.18	0.220	0.289
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 4	40620	2593	19.06	20.00	1.242	62.9	1.006	0.04	0.208	0.260
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 4	40620	2593	18.89	20.00	1.291	62.9	1.006	0.05	0.208	0.270
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	19.06	20.00	1.242	62.9	1.006	0.05	0.383	0.478
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	18.89	20.00	1.291	62.9	1.006	0.11	0.378	0.491
	LTE Band 41	20M	QPSK	1	0	-	Left Side	10mm	Ant 1	DSI 2	40620	2593	24.46	25.50	1.271	62.9	1.006	0.07	0.445	0.569
	LTE Band 41	20M	QPSK	50	0	-	Left Side	10mm	Ant 1	DSI 2	40620	2593	23.43	24.50	1.279	62.9	1.006	0.04	0.367	0.472
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	40620	2593	19.06	20.00	1.242	62.9	1.006	0.07	0.565	0.706
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	39750	2506	18.79	20.00	1.321	62.9	1.006	0.02	0.577	0.767
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	40185	2549.5	18.82	20.00	1.312	62.9	1.006	0.04	0.531	0.701
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	41055	2636.5	18.95	20.00	1.274	62.9	1.006	0.09	0.529	0.678
	LTE Band 41	20M	QPSK	1	0	-	Top Side	10mm	Ant 1	DSI 4	41490	2680	19.01	20.00	1.256	62.9	1.006	0.05	0.506	0.639
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	DSI 4	40620	2593	18.89	20.00	1.291	62.9	1.006	0.03	0.596	0.774
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	DSI 4	39750	2506	18.67	20.00	1.358	62.9	1.006	0.03	0.562	0.768
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	DSI 4	40185	2549.5	18.72	20.00	1.343	62.9	1.006	0.08	0.559	0.755
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	DSI 4	41055	2636.5	18.84	20.00	1.306	62.9	1.006	0.04	0.548	0.720
	LTE Band 41	20M	QPSK	50	0	-	Top Side	10mm	Ant 1	DSI 4	41490	2680	18.83	20.00	1.309	62.9	1.006	0.07	0.523	0.689
	LTE Band 41	20M	QPSK	100	0	-	Top Side	10mm	Ant 1	DSI 4	40620	2593	18.76	20.00	1.330	62.9	1.006	0.07	0.493	0.660
17	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	40620	2593	24.46	25.50	1.271	62.9	1.006	0.09	0.632	0.808
	LTE Band 38C	20M	QPSK	1	99	-	Front	12mm	Ant 1	DSI 2	37901+38099	2585.1+2604.9	24.25	25.50	1.334	62.9	1.006	0.01	0.589	0.790
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	39750	2506	24.35	25.50	1.303	62.9	1.006	0.02	0.593	0.777
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	40185	2549.5	24.38	25.50	1.294	62.9	1.006	0.04	0.588	0.766
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	41055	2636.5	24.43	25.50	1.279	62.9	1.006	0.09	0.543	0.699
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	41490	2680	24.32	25.50	1.312	62.9	1.006	0.05	0.561	0.741
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	40620	2593	23.43	24.50	1.279	62.9	1.006	-0.1	0.528	0.680
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	39750	2506	23.32	24.50	1.312	62.9	1.006	0.09	0.501	0.661
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	40185	2549.5	23.36	24.50	1.300	62.9	1.006	0.05	0.499	0.653
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	41055	2636.5	23.31	24.50	1.315	62.9	1.006	0.03	0.483	0.639
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	41490	2680	23.33	24.50	1.309	62.9	1.006	0.03	0.476	0.627
	LTE Band 41	20M	QPSK	100	0	-	Front	12mm	Ant 1	DSI 2	40620	2593	23.35	24.50	1.303	62.9	1.006	-0.1	0.509	0.667
	LTE Band 41	20M	QPSK	1	0	-	Back	19mm	Ant 1	DSI 2	40620	2593	24.46	25.50	1.271	62.9	1.006	-0.08	0.453	0.579
	LTE Band 41	20M	QPSK	50	0	-	Back	19mm	Ant 1	DSI 2	40620	2593	23.43	24.50	1.279	62.9	1.006	0.13	0.429	0.552
	LTE Band 41	20M	QPSK	1	0	-	Top Side	19mm	Ant 1	DSI 2	40620	2593	24.46	25.50	1.271	62.9	1.006	-0.03	0.603	0.771
	LTE Band 41	20M	QPSK	1	0	-	Top Side	19mm	Ant 1	DSI 2	39750	2506	24.35	25.50	1.303	62.9	1.006	0.05	0.585	0.767
	LTE Band 41	20M	QPSK	1	0	-	Top Side	19mm	Ant 1	DSI 2	40185	2549.5	24.38	25.50	1.294	62.9	1.006	-0.11	0.526	0.685
	LTE Band 41	20M	QPSK	1	0	-	Top Side	19mm	Ant 1	DSI 2	41055	2636.5	24.43	25.50	1.279	62.9	1.006	0.09	0.544	0.700
	LTE Band 41	20M	QPSK	1	0	-	Top Side	19mm	Ant 1	DSI 2	41490	2680	24.32	25.50	1.312	62.9	1.006	0.05	0.563	0.743
	LTE Band 41	20M	QPSK	50	0	-	Top Side	19mm	Ant 1	DSI 2	40620	2593	23.43	24.50	1.279	62.9	1.006	-0.19	0.451	0.580
	LTE Band 41	20M	QPSK	100	0	-	Top Side	19mm	Ant 1	DSI 2	40620	2593	23.35	24.50	1.303	62.9	1.006	-0.06	0.570	0.747



Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 3	Receiver off	1	2412	18.83	20.00	1.309	97.8	1.022	0.03	0.036	0.048
18	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 3	Receiver off	1	2412	18.83	20.00	1.309	97.8	1.022	0.08	0.206	0.276
	WLAN2.4GHz	802.11b 1Mbps	Right Side	10mm	Ant 3	Receiver off	1	2412	18.83	20.00	1.309	97.8	1.022	0.04	0.123	0.165
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10mm	Ant 3	Receiver off	1	2412	18.83	20.00	1.309	97.8	1.022	0.07	0.159	0.213
	Bluetooth	1Mbps	Front	10mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	0.01	0.011	0.020
19	Bluetooth	1Mbps	Back	10mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	-0.07	0.037	0.066
	Bluetooth	1Mbps	Right Side	10mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	0.05	0.016	0.029
	Bluetooth	1Mbps	Top Side	10mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	0.04	0.031	0.055
5000MHz																
	WLAN5.2GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	Receiver off	38	5190	13.96	15.00	1.271	94.68	1.056	-0.06	0.069	0.093
20	WLAN5.2GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	Receiver off	38	5190	13.96	15.00	1.271	94.68	1.056	0.01	0.229	0.307
	WLAN5.2GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 3	Receiver off	38	5190	13.96	15.00	1.271	94.68	1.056	-0.1	0.089	0.119
	WLAN5.2GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 3	Receiver off	38	5190	13.96	15.00	1.271	94.68	1.056	0.1	0.227	0.305
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	Receiver off	151	5755	14.08	15.00	1.236	94.68	1.056	0.07	0.106	0.138
21	WLAN5.8GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	Receiver off	151	5755	14.08	15.00	1.236	94.68	1.056	0.01	0.272	0.355
	WLAN5.8GHz	802.11n-HT40 MCS0	Right Side	10mm	Ant 3	Receiver off	151	5755	14.08	15.00	1.236	94.68	1.056	0.07	0.084	0.110
	WLAN5.8GHz	802.11n-HT40 MCS0	Top Side	10mm	Ant 3	Receiver off	151	5755	14.08	15.00	1.236	94.68	1.056	-0.02	0.214	0.279



15.3 Body Worn Accessory SAR

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
835MHz																				
22	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	10mm	Ant 0	DSI 4	189	836.4	25.91	27.50	1.442	-	-	0.17	0.141	0.203
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 0	DSI 4	189	836.4	25.91	27.50	1.442	-	-	-0.06	0.269	0.388
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Front	10mm	Ant 1	DSI 4	189	836.4	25.96	27.50	1.426	-	-	-0.09	0.153	0.218
	GSM850	-	-	-	-	GPRS (4 Tx slots)	Back	10mm	Ant 1	DSI 4	189	836.4	25.96	27.50	1.426	-	-	0.01	0.235	0.335
23	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 0	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.18	0.184	0.247
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 0	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.06	0.310	0.415
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Front	10mm	Ant 1	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	0.05	0.181	0.242
	WCDMA V	-	-	-	-	RMC 12.2Kbps	Back	10mm	Ant 1	DSI 4	4182	836.4	24.23	25.50	1.340	-	-	-0.09	0.272	0.364
24	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 4	20525	836.5	24.32	25.50	1.312	-	-	0.18	0.192	0.252
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 0	DSI 4	20525	836.5	23.36	24.50	1.300	-	-	0.02	0.158	0.205
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 4	20525	836.5	24.32	25.50	1.312	-	-	0.02	0.338	0.444
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 0	DSI 4	20525	836.5	23.36	24.50	1.300	-	-	-0.11	0.278	0.361
	LTE Band 5	10M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 4	20525	836.5	24.31	25.50	1.315	-	-	-0.03	0.206	0.271
	LTE Band 5	10M	QPSK	25	0	-	Front	10mm	Ant 1	DSI 4	20525	836.5	23.15	24.50	1.365	-	-	0.03	0.162	0.221
	LTE Band 5	10M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	24.31	25.50	1.315	-	-	0.09	0.334	0.439
	LTE Band 5	10M	QPSK	25	0	-	Back	10mm	Ant 1	DSI 4	20525	836.5	23.15	24.50	1.365	-	-	0.14	0.265	0.362
1900MHz																				
25	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	10mm	Ant 0	DSI 4	661	1880	27.70	28.50	1.202	-	-	-0.13	0.268	0.322
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	10mm	Ant 0	DSI 4	661	1880	27.70	28.50	1.202	-	-	0.05	0.373	0.448
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	14mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	-0.02	0.318	0.390
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	19mm	Ant 0	DSI 2	661	1880	29.61	30.50	1.227	-	-	0.07	0.262	0.322
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	10mm	Ant 1	DSI 4	661	1880	28.12	28.50	1.091	-	-	-0.16	0.299	0.326
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	10mm	Ant 1	DSI 4	661	1880	28.12	28.50	1.091	-	-	0.08	0.583	0.636
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Front	12mm	Ant 1	DSI 2	661	1880	29.98	30.50	1.127	-	-	-0.01	0.559	0.630
	GSM1900	-	-	-	-	GPRS (1 Tx slots)	Back	19mm	Ant 1	DSI 2	661	1880	29.98	30.50	1.127	-	-	-0.01	0.617	0.695
2600MHz																				
26	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 4	21100	2535	17.81	19.00	1.315	-	-	0.03	0.193	0.254
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 0	DSI 4	21100	2535	17.77	19.00	1.327	-	-	0.02	0.190	0.252
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 4	21100	2535	17.81	19.00	1.315	-	-	-0.02	0.291	0.383
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 0	DSI 4	21100	2535	17.77	19.00	1.327	-	-	0.07	0.316	0.419
	LTE Band 7	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	-0.12	0.623	0.804
	LTE Band 7	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	20850	2510	22.83	24.00	1.309	-	-	-0.09	0.680	0.890
	LTE Band 7C	20M	QPSK	1	99	-	Front	14mm	Ant 0	DSI 2	20850+21048	2510+2529.8	22.63	24.00	1.371	-	-	-0.01	0.618	0.847
	LTE Band 7	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	21350	2560	22.77	24.00	1.327	-	-	0.17	0.477	0.633
	LTE Band 7	20M	QPSK	50	0	-	Front	14mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.05	0.509	0.663
	LTE Band 7	20M	QPSK	100	0	-	Front	14mm	Ant 0	DSI 2	21100	2535	22.74	24.00	1.337	-	-	0.07	0.475	0.635
	LTE Band 7	20M	QPSK	1	0	-	Back	19mm	Ant 0	DSI 2	21100	2535	22.89	24.00	1.291	-	-	0.03	0.438	0.566
	LTE Band 7	20M	QPSK	50	0	-	Back	19mm	Ant 0	DSI 2	21100	2535	22.85	24.00	1.303	-	-	0.03	0.498	0.649
	LTE Band 7	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 4	21100	2535	18.10	19.00	1.230	-	-	0.07	0.208	0.256
	LTE Band 7	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 4	21100	2535	17.99	19.00	1.262	-	-	0.05	0.213	0.269
	LTE Band 7	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	18.10	19.00	1.230	-	-	0.12	0.377	0.464
	LTE Band 7	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	21100	2535	17.99	19.00	1.262	-	-	0.03	0.390	0.492
	LTE Band 7C	20M	QPSK	50	50	-	Back	10mm	Ant 1	DSI 4	21100+21298	2535+2554.8	18.00	19.00	1.259	-	-	0.02	0.334	0.420
	LTE Band 7	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	21100	2535	23.99	25.00	1.262	-	-	-0.02	0.380	0.479
	LTE Band 7	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	21100	2535	23.09	24.00	1.233	-	-	-0.02	0.358	0.441
	LTE Band 7	20M	QPSK	1	0	-	Back	19mm	Ant 1	DSI 2	21100	2535	23.99	25.00	1.262	-	-	-0.1	0.326	0.411
	LTE Band 7	20M	QPSK	50	0	-	Back	19mm	Ant 1	DSI 2	21100	2535	23.09	24.00	1.233	-	-	0.02	0.325	0.401
27	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 0	DSI 4	40620	2593	19.92	21.00	1.282	62.9	1.006	-0.01	0.239	0.308
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 0	DSI 4	40620	2593	19.86	21.00	1.300	62.9	1.006	0.05	0.235	0.307
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 0	DSI 4	40620	2593	19.92	21.00	1.282	62.9	1.006	0.12	0.356	0.459



FCC SAR Test Report

Report No. : FA202911-01

	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 0	DSI 4	40620	2593	19.86	21.00	1.300	62.9	1.006	-0.07	0.345	0.451
	LTE Band 41	20M	QPSK	1	0	-	Front	14mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	0.02	0.377	0.501
	LTE Band 38C	20M	QPSK	1	99	-	Front	14mm	Ant 0	DSI 2	37901+38099	2585.1+2604.9	24.21	25.50	1.346	62.9	1.006	0.01	0.345	0.467
	LTE Band 41	20M	QPSK	50	0	-	Front	14mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	0.04	0.292	0.384
	LTE Band 41	20M	QPSK	1	0	-	Back	19mm	Ant 0	DSI 2	40620	2593	24.29	25.50	1.321	62.9	1.006	0.09	0.266	0.354
	LTE Band 41	20M	QPSK	50	0	-	Back	19mm	Ant 0	DSI 2	40620	2593	23.34	24.50	1.306	62.9	1.006	0.05	0.205	0.269
	LTE Band 41	20M	QPSK	1	0	-	Front	10mm	Ant 1	DSI 4	40620	2593	19.06	20.00	1.242	62.9	1.006	0.04	0.208	0.260
	LTE Band 41	20M	QPSK	50	0	-	Front	10mm	Ant 1	DSI 4	40620	2593	18.89	20.00	1.291	62.9	1.006	0.05	0.208	0.270
	LTE Band 41	20M	QPSK	1	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	19.06	20.00	1.242	62.9	1.006	0.05	0.383	0.478
	LTE Band 41	20M	QPSK	50	0	-	Back	10mm	Ant 1	DSI 4	40620	2593	18.89	20.00	1.291	62.9	1.006	0.11	0.378	0.491
27	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	40620	2593	24.46	25.50	1.271	62.9	1.006	0.09	0.632	0.808
	LTE Band 38C	20M	QPSK	1	99	-	Front	12mm	Ant 1	DSI 2	37901+38099	2585.1+2604.9	24.25	25.50	1.334	62.9	1.006	0.01	0.586	0.786
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	39750	2506	24.35	25.50	1.303	62.9	1.006	0.02	0.593	0.777
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	40185	2549.5	24.38	25.50	1.294	62.9	1.006	0.04	0.588	0.766
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	41055	2636.5	24.43	25.50	1.279	62.9	1.006	0.09	0.543	0.699
	LTE Band 41	20M	QPSK	1	0	-	Front	12mm	Ant 1	DSI 2	41490	2680	24.32	25.50	1.312	62.9	1.006	0.05	0.561	0.741
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	40620	2593	23.43	24.50	1.279	62.9	1.006	-0.1	0.528	0.680
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	39750	2506	23.32	24.50	1.312	62.9	1.006	0.09	0.501	0.661
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	40185	2549.5	23.36	24.50	1.300	62.9	1.006	0.05	0.499	0.653
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	41055	2636.5	23.31	24.50	1.315	62.9	1.006	0.03	0.483	0.639
	LTE Band 41	20M	QPSK	50	0	-	Front	12mm	Ant 1	DSI 2	41490	2680	23.33	24.50	1.309	62.9	1.006	0.03	0.476	0.627
	LTE Band 41	20M	QPSK	100	0	-	Front	12mm	Ant 1	DSI 2	40620	2593	23.35	24.50	1.303	62.9	1.006	-0.1	0.509	0.667
	LTE Band 41	20M	QPSK	1	0	-	Back	19mm	Ant 1	DSI 2	40620	2593	24.46	25.50	1.271	62.9	1.006	-0.08	0.453	0.579
	LTE Band 41	20M	QPSK	50	0	-	Back	19mm	Ant 1	DSI 2	40620	2593	23.43	24.50	1.279	62.9	1.006	0.13	0.429	0.552

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
2450MHz																
	WLAN2.4GHz	802.11b 1Mbps	Front	10mm	Ant 3	Receiver off	1	2412	18.83	20.00	1.309	97.8	1.022	0.03	0.036	0.048
28	WLAN2.4GHz	802.11b 1Mbps	Back	10mm	Ant 3	Receiver off	1	2412	18.83	20.00	1.309	97.8	1.022	0.08	0.206	0.276
	Bluetooth	1Mbps	Front	10mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	0.01	0.011	0.020
29	Bluetooth	1Mbps	Back	10mm	Ant 3	Full power	39	2441	11.11	12.50	1.376	77.03	1.298	-0.07	0.037	0.066
5000MHz																
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	10mm	Ant 3	Receiver off	58	5290	13.63	15.00	1.371	89.24	1.121	0.04	0.116	0.178
30	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	10mm	Ant 3	Receiver off	58	5290	13.63	15.00	1.371	89.24	1.121	0.01	0.215	0.330
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	Receiver off	102	5510	12.97	14.00	1.268	94.68	1.056	0.02	0.240	0.321
31	WLAN5.5GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	Receiver off	102	5510	12.97	14.00	1.268	94.68	1.056	0.01	0.319	0.427
	WLAN5.8GHz	802.11n-HT40 MCS0	Front	10mm	Ant 3	Receiver off	151	5755	14.08	15.00	1.236	94.68	1.056	0.07	0.106	0.138
32	WLAN5.8GHz	802.11n-HT40 MCS0	Back	10mm	Ant 3	Receiver off	151	5755	14.08	15.00	1.236	94.68	1.056	0.01	0.272	0.355



15.4 Product Specific SAR

Plot No.	Band	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 10g SAR (W/kg)	Reported 10g SAR (W/kg)
5000MHz																
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Front	0mm	Ant 3	Receiver off	58	5290	13.63	15.00	1.371	89.24	1.121	0.01	0.125	0.192
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Back	0mm	Ant 3	Receiver off	58	5290	13.63	15.00	1.371	89.24	1.121	-0.05	0.169	0.260
	WLAN5.3GHz	802.11ac-VHT80 MCS0	Right Side	0mm	Ant 3	Receiver off	58	5290	13.63	15.00	1.371	89.24	1.121	0.07	0.110	0.169
33	WLAN5.3GHz	802.11ac-VHT80 MCS0	Top Side	0mm	Ant 3	Receiver off	58	5290	13.63	15.00	1.371	89.24	1.121	0.02	0.325	0.499
	WLAN5.5GHz	802.11n-HT40 MCS0	Front	0mm	Ant 3	Receiver off	102	5510	12.97	14.00	1.268	94.68	1.056	-0.1	0.154	0.206
	WLAN5.5GHz	802.11n-HT40 MCS0	Back	0mm	Ant 3	Receiver off	102	5510	12.97	14.00	1.268	94.68	1.056	-0.1	0.179	0.240
	WLAN5.5GHz	802.11n-HT40 MCS0	Right Side	0mm	Ant 3	Receiver off	102	5510	12.97	14.00	1.268	94.68	1.056	0.02	0.092	0.123
34	WLAN5.5GHz	802.11n-HT40 MCS0	Top Side	0mm	Ant 3	Receiver off	102	5510	12.97	14.00	1.268	94.68	1.056	-0.1	0.358	0.479

15.5 Repeated SAR Measurement

<1g>

Plot No.	Band	BW (MHz)	Modulation	RB Size	RB offset	Mode	Test Position	Gap (mm)	Antenna	Power State	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM1900					GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DS11	810	1909.8	19.16	20.50	1.361		1.000	0.01	0.803	1	1.093
2nd	GSM1900					GPRS (4 Tx slots)	Right Tilted	0mm	Ant 1	DS11	810	1909.8	19.16	20.50	1.361		1.000	0.01	0.798	1.006	1.086

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			
		Head	Body-worn	Hotspot	Product Specific
1.	WWAN + WLAN2.4GHz	Yes	Yes	Yes	Yes
2.	WWAN + WLAN5GHz	Yes	Yes	Yes	Yes
3.	WWAN + Bluetooth	Yes	Yes	Yes	Yes

General Note:

1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
2. EUT will choose each GSM, WCDMA, and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
3. This device 2.4GHz WLAN support hotspot operation and Bluetooth support tethering applications.
4. This device 2.4GHz WLAN/ 5.2GHz WLAN/5.8GHz WLAN support hotspot operation, and 5.2GHz WLAN/5.8GHz WLAN supports WLAN Direct (GC/GO), and 5.3GHz / 5.5GHz supports WLAN Direct (GC only).
5. According to the EUT characteristic, WLAN 5GHz and Bluetooth can't transmit simultaneously.
6. According to the EUT characteristic, WLAN 2.4GHz and Bluetooth at the same antenna cannot transmit simultaneously.
7. According to the EUT characteristic, WLAN 5GHz and WLAN 2.4GHz at the same antenna cannot transmit simultaneously.
8. The worst case 5 GHz WLAN SAR for each configuration was used for SAR summation.
9. Chose the worst zoom scan SAR of WLAN correspondingly for co-located with WWAN analysis.
10. The reported SAR summation is calculated based on the same configuration and test position.
11. For distance SAR and non-distance SAR always chose higher SAR to do co-located analysis.
12. For standalone WWAN, always choose the highest SAR among all WWAN bands within the selected antenna for each exposure position to perform simultaneous transmission analysis with WLAN/BT. This is the worst co-located analysis and can represent each bands.
13. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) 1g Scalar SAR summation < 1.6W/kg and 10g Scalar SAR summation < 4.0W/kg.
 - ii) $SPLSR = (SAR1 + SAR2)^{1.5} / (\min. \text{separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If $SPLSR \leq 0.04$ for 1g SAR and $SPLSR \leq 0.10$ for 10g SAR, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band 1g SAR < 1.6W/kg and 10g SAR < 4.0W/kg.

**16.1 Head Exposure Conditions**

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4
		WWAN	WLAN2.4GHz Ant 3	WLAN5GHz Ant 3	Bluetooth Ant 3	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
WWAN all Bands Ant 0	Right Cheek	0.269	0.191	0.374	0.089	0.46	0.64	0.36
	Right Tilted	0.148	0.190	0.432	0.109	0.34	0.58	0.26
	Left Cheek	0.251	0.489	0.520	0.141	0.74	0.77	0.39
	Left Tilted	0.171	0.354	0.641	0.166	0.53	0.81	0.34
WWAN all Bands Ant1	Right Cheek	0.926	0.191	0.374	0.089	1.12	1.30	1.02
	Right Tilted	1.093	0.190	0.432	0.109	1.28	1.53	1.20
	Left Cheek	1.032	0.489	0.520	0.141	1.52	1.55	1.17
	Left Tilted	0.952	0.354	0.641	0.166	1.31	1.59	1.12

16.2 Hotspot Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4
		WWAN	WLAN2.4GHz Ant 3	WLAN5GHz Ant 3	Bluetooth Ant 3	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
WWAN All Bands Ant 0	Front	0.890	0.048	0.138	0.020	0.94	1.03	0.91
	Back	0.649	0.276	0.355	0.066	0.93	1.00	0.72
	Left side	0.217				0.22	0.22	0.22
	Right side	0.244	0.165	0.119	0.029	0.41	0.36	0.27
	Top side		0.213	0.305	0.055	0.21	0.31	0.06
	Bottom side	1.046				1.05	1.05	1.05
WWAN All Bands Ant 1	Front	0.808	0.048	0.138	0.020	0.86	0.95	0.83
	Back	0.695	0.276	0.355	0.066	0.97	1.05	0.76
	Left side	0.569				0.57	0.57	0.57
	Right side		0.165	0.119	0.029	0.17	0.12	0.03
	Top side	0.899	0.213	0.305	0.055	1.11	1.20	0.95

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band	Exposure Position	1	2	3	4	1+2	1+3	1+4
		WWAN	WLAN2.4GHz Ant 3	WLAN5GHz Ant 3	Bluetooth Ant 3	Summed	Summed	Summed
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)
WWAN All Bands Ant 0	Front	0.890	0.048	0.321	0.020	0.94	1.21	0.91
	Back	0.649	0.276	0.427	0.066	0.93	1.08	0.72
WWAN All Bands Ant 1	Front	0.808	0.048	0.321	0.020	0.86	1.13	0.83
	Back	0.695	0.276	0.427	0.066	0.97	1.12	0.76

Test Engineer : Martin Li, Varus Wang, Light Wang, Ricky Gu

17. Uncertainty Assessment

Per KDB 865664 D01 SAR measurement 100MHz to 6GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg and the measured 10-g SAR within a frequency band is < 3.75 W/kg. The expanded SAR measurement uncertainty must be $\leq 30\%$, for a confidence interval of $k = 2$. If these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval. For this device, the highest measured 1-g SAR is less 1.5W/kg and highest measured 10-g SAR is less 3.75W/kg. Therefore, the measurement uncertainty table is not required in this report.

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 616217 D04 v01r02, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", Oct 2015
- [11] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [12] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [13] FCC KDB 941225 D05A v01r02, "Rel. 10 LTE SAR Test Guidance and KDB Inquiries", Oct 2015
- [14] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.

-----THE END-----