

FCC RF Test Report

APPLICANT : Xiaomi Communications Co., Ltd.
EQUIPMENT : Mobile Phone
BRAND NAME : Xiaomi
MODEL NAME : 2306EPN60G
FCC ID : 2AFZZN60G
STANDARD : 47 CFR Part 2, Part 27 Subpart Q
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)
TEST DATE(S) : May 11, 2023 ~ Jun. 05, 2023

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY..... 3
SUMMARY OF TEST RESULT 4
1 GENERAL DESCRIPTION 5
1.1 Applicant 5
1.2 Manufacturer 5
1.3 Product Feature of Equipment Under Test 5
1.4 Product Specification of Equipment Under Test 5
1.5 Modification of EUT 6
1.6 Maximum EIRP Power and Emission Designator 6
1.7 Testing Site 7
1.8 Test Software 8
1.9 Applied Standards 8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 9
2.1 Test Mode 9
2.2 Connection Diagram of Test System 10
2.3 Support Unit used in test configuration and system 10
2.4 Measurement Results Explanation Example 10
2.5 Frequency List of Low/Middle/High Channels 11
3 CONDUCTED TEST ITEMS 12
3.1 Measuring Instruments 12
3.2 Test Setup 12
3.3 Test Result of Conducted Test 12
3.4 Conducted Output Power Measurement 13
3.5 Peak-to-Average Ratio 14
3.6 EIRP 15
3.7 Occupied Bandwidth 16
3.8 Conducted Band Edge Measurement 17
3.9 Conducted Spurious Emission Measurement 18
3.10 Frequency Stability Measurement 19
4 RADIATED TEST ITEMS 20
4.1 Measuring Instruments 20
4.2 Test Setup 20
4.3 Test Result of Radiated Test 21
4.4 Radiated Spurious Emission Measurement 22
5 LIST OF MEASURING EQUIPMENT 23
6 MEASUREMENT UNCERTAINTY 24
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FG350505H	Rev. 01	Initial issue of report	Jun. 12, 2023



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	—	Report Only	-
3.5	§27.50 (k)(4)	Peak-to-Average Ratio	<13dB	PASS	
3.6	§27.50 (k)(3)	EIRP	EIRP < 1W (30dBm)	PASS	-
3.7	§2.1049	Occupied Bandwidth	—	Report Only	-
3.8	§2.1051 §27.53 (n)(2)	Conducted Band Edge Measurement	-13dBm/MHz	PASS	-
3.9	§2.1051 §27.53 (n)(2)	Conducted Spurious Emission	-13dBm/MHz	PASS	-
3.10	§2.1055 §27.54	Frequency Stability Temperature & Voltage	Within the band	PASS	-
4.4	§2.1053 §27.53 (n)(2)	Radiated Spurious Emission	-13dBm/MHz	PASS	Under limit 41.61 dB at 13806.00 MHz

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

1 General Description

1.1 Applicant

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.2 Manufacturer

Xiaomi Communications Co., Ltd.

#019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Phone
Brand Name	Xiaomi
Model Name	2306EPN60G
FCC ID	2AFZZN60G
IMEI Code	Conducted: 864825060079089 Radiation: 864825060065484/864825060065492
HW Version	P2.0
SW Version	MIUI 14
EUT Stage	Identical Prototype

1.4 Product Specification of Equipment Under Test

Product Feature	
Tx/Rx Frequency	5G NR n77/n78: 3450 MHz ~ 3550 MHz
SCS	30kHz
Bandwidth	n77/n78: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz / 50MHz / 60MHz / 70MHz / 80MHz / 90MHz / 100MHz
Antenna Gain	<Ant. 1> 5G NR n77: -7.00 dBi 5G NR n78: -7.00 dBi <Ant. 5> 5G NR n77: -0.26 dBi 5G NR n78: -0.67 dBi <Ant. 6> 5G NR n77: -1.00 dBi 5G NR n78: -1.00 dBi <Ant. 7> 5G NR n77: -6.00 dBi 5G NR n78: -6.00 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Ant.5 for 5G NR n77/n78 are shown in the report.
2. 5G NR n77 support SA mode, n78 supports SA and NSA mode. According to the maximum power between SA and NSA mode, SA covers NSA mode and 5G NR n78 covers n77.
3. The device supports HPUE mode for 5G NR n77/n78.
4. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum EIRP Power and Emission Designator

5G NR n77		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.2489	8M60G7D	0.1954	8M59W7D
15	3457.50 ~ 3542.49	0.2547	13M6G7D	0.1977	13M6W7D
20	3460.02 ~ 3540.00	0.2553	18M2G7D	0.2000	18M2W7D
25	3462.51 ~ 3537.48	0.2188	23M1G7D	0.1702	23M2W7D
30	3465.00 ~ 3534.99	0.2535	27M8G7D	0.1991	27M8W7D
40	3470.01 ~ 3529.98	0.2535	37M9G7D	0.2018	37M9W7D
50	3475.02 ~ 3525.00	0.2506	47M4G7D	0.1995	47M5W7D
60	3480.00 ~ 3519.99	0.2535	58M0G7D	0.2004	58M0W7D
70	3485.01 ~ 3514.98	0.2518	67M4G7D	0.1986	67M5W7D
80	3490.02 ~ 3510.00	0.2523	77M4G7D	0.2000	77M7W7D
90	3495.00 ~ 3504.99	0.2523	87M4G7D	0.1977	87M5W7D
100	3500.01	0.2570	97M8G7D	0.2014	97M7W7D

5G NR n78		PI/2 BPSK / QPSK		16QAM/64QAM/256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3455.01 ~ 3544.98	0.2877	8M60G7D	0.2218	8M59W7D
15	3457.50 ~ 3542.49	0.2972	13M6G7D	0.2265	13M6W7D
20	3460.02 ~ 3540.00	0.2965	18M2G7D	0.2270	18M2W7D
25	3462.51 ~ 3537.48	0.2518	23M1G7D	0.1945	23M2W7D
30	3465.00 ~ 3534.99	0.2972	27M8G7D	0.2275	27M8W7D
40	3470.01 ~ 3529.98	0.2972	37M9G7D	0.2265	37M9W7D
50	3475.02 ~ 3525.00	0.2972	47M4G7D	0.2275	47M5W7D
60	3480.00 ~ 3519.99	0.2985	58M0G7D	0.2270	58M0W7D
70	3485.01 ~ 3514.98	0.2911	67M4G7D	0.2254	67M5W7D
80	3490.02 ~ 3510.00	0.2951	77M4G7D	0.2265	77M7W7D
90	3495.00 ~ 3504.99	0.2931	87M4G7D	0.2254	87M5W7D
100	3500.01	0.2999	97M8G7D	0.2270	97M7W7D

Note:

- 5G NR Band n77 overlaps the entire frequency range of Band n78, and n78 power > n77 power, therefore the conducted test results of n78 provided in this report cover n77.
- All modulations have been tested, and only the worst test results of PSK & QAM are shown in the report.

1.7 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test cases in section 3 of this report

1.8 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al

1.9 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, Part 27 Subpart Q
- ANSI C63.26-2015
- FCC KDB 971168 Power Meas License Digital Systems D01 v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

2 Test Configuration of Equipment Under Test

2.1 Test Mode

Antenna port conducted and radiated test items listed below are performed according to KDB 971168 D01 Power Meas. License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned flip open and close state in three orthogonal panels X, Y, Z.


The worst cases (Z plane) were recorded in this report.

Test Cases	Band	Bandwidth (MHz)	Modulation	RB #	Test Channel
		eg. 5M, 10M, 15M, 20M	eg. PI/2 BPSK, QPSK, 16QAM, 64QAM, 256QAM	1RB, Partial RB, Full RB	L/M/H
Max. Output Power	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
Peak-to-Average Ratio	5G n78	20M	PI/2 BPSK, QPSK	1RB, Full RB	L, M, H
E.I.R.P	5G n77	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	1RB, Full RB	L, M, H
26dB and 99% Bandwidth	5G n78	10M, 15M, 20M, 25M, 30M, 40M, 50M, 60M, 70M, 80M, 90M, 100M	All Modulations	Full RB	M
Conducted Band Edge	5G n78	10M, 50M, 100M	PI/2 BPSK, QPSK	1RB, Full RB	L, H
Conducted Spurious Emission	5G n78	10M, 50M, 100M	PI/2 BPSK, QPSK	1RB	L, M, H
Frequency Stability	5G n78	20M	QPSK	Full RB	M
Radiated Spurious Emission	5G n78	Worst case from maximum power			M

Note:

1. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.
2. Frequency Stability: Normal Voltage = 3.89V; Low Voltage =3.60V; High Voltage =4.48V.
3. All test items are based on engineering evaluation.

2.2 Connection Diagram of Test System

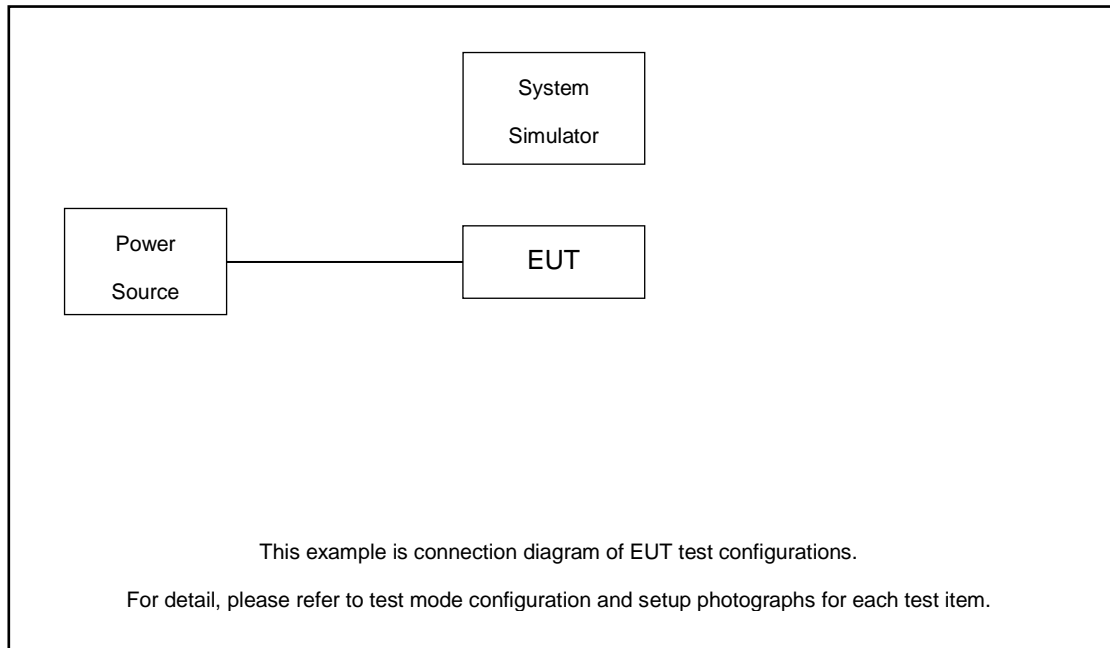

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	Power Supply	GWINSTEK	PSS-2002	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8820/8821	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 8.70 dB.

Example :

Offset(dB) = RF cable loss(dB).

=8.70 (dB)

2.5 Frequency List of Low/Middle/High Channels

5G n77/n78 Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	-	633334	-
	Frequency	-	3500.01	-
90	Channel	633000	633334	633666
	Frequency	3495	3500.01	3504.99
80	Channel	632668	633334	634000
	Frequency	3490.02	3500.01	3510
70	Channel	632334	633334	634332
	Frequency	3485.01	3500.01	3514.98
60	Channel	632000	633334	634666
	Frequency	3480	3500.01	3519.99
50	Channel	631668	633334	635000
	Frequency	3475.02	3500.01	3525
40	Channel	631334	633334	635332
	Frequency	3470.01	3500.01	3529.98
30	Channel	631000	633334	635666
	Frequency	3465	3500.01	3534.99
25	Channel	630834	633334	635832
	Frequency	3462.51	3500.01	3537.48
20	Channel	630668	633334	636000
	Frequency	3460.02	3500.01	3540
15	Channel	630500	633334	636166
	Frequency	3457.5	3500.01	3542.49
10	Channel	630334	633334	636332
	Frequency	3455.01	3500.01	3544.98


3 Conducted Test Items

3.1 Measuring Instruments


See list of measuring instruments of this test report.

3.2 Test Setup


3.2.1 Conducted Output Power

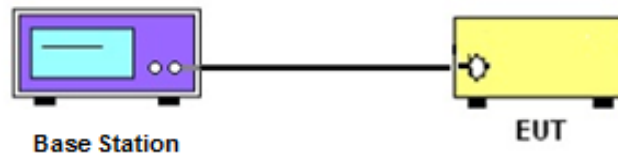

3.2.2 Peak-to-Average Ratio, Occupied / 26dB Bandwidth, Band-Edge and Conducted Spurious Emission

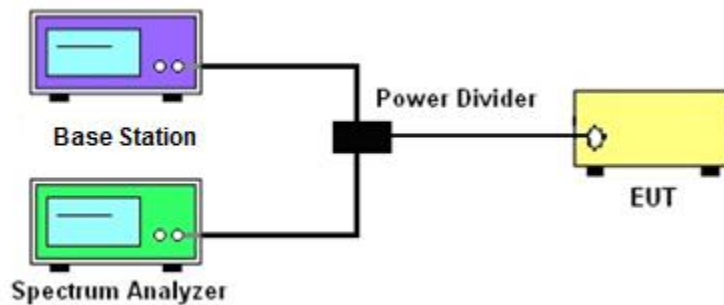

3.2.3 Frequency Stability

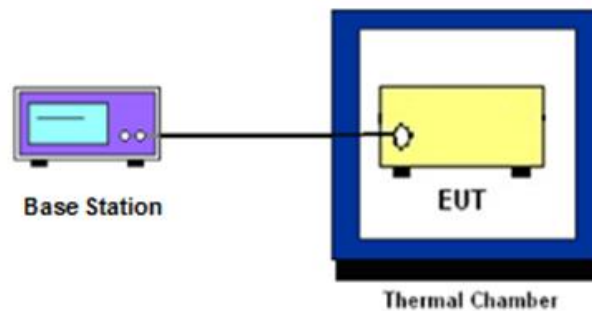

3.3 Test Result of Conducted Test

Please refer to Appendix A.



3.4 Conducted Output Power Measurement

3.4.1 Description of the Conducted Output Power Measurement

A base station simulator was used to establish communication with the EUT. Its parameters were set to transmit the maximum power on the EUT. The measured power in the radio frequency on the transmitter output terminals shall be reported.

3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.

3.5 Peak-to-Average Ratio

3.5.1 Description of the PAR Measurement

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

3.5.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.

3.6 EIRP

3.6.1 Description of EIRP Limit

§ 27.50 (k)(3)

Mobile devices are limited to 1Watt (30 dBm) EIRP. Mobile devices operating in these bands must employ a means for limiting power to the minimum necessary for successful communications

3.6.2 Test Procedures

1. According to KDB 412172 D01 Power Approach,
2. $EIRP = P_T + G_T - L_C$, $ERP = EIRP - 2.15$, where
 P_T = transmitter output power in dBm
 G_T = gain of the transmitting antenna in dBi
 L_C = signal attenuation in the connecting cable between the transmitter and antenna in dB

3.7 Occupied Bandwidth

3.7.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

3.7.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace.
(this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.

3.8 Conducted Band Edge Measurement

3.8.1 Description of Conducted Band Edge Measurement

§ 27.53 (n)(2)

For mobile operations in the 3450-3550 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz.

Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed, but limited to a maximum of 200 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW $\geq 1\%$ EBW but limited to a maximum of 200 kHz in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz and 5 MHz removed from the band edge, set RBW ≥ 500 KHz.
6. Beyond the 5 MHz removed from the band edge, set RBW = 1MHz.
7. Set spectrum analyzer with RMS detector.
8. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
9. Checked that all the results comply with the emission limit line.

3.9 Conducted Spurious Emission Measurement

3.9.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

It is measured by means of a calibrated spectrum analyzer and scanned from 9 kHz up to a frequency including its 10th harmonic.

3.9.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. Checked that all the results comply with the emission limit line.

3.10 Frequency Stability Measurement

3.10.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block.

3.10.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to -30°C and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in 10°C step up to 50°C. The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

3.10.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5.
2. The EUT was placed in a temperature chamber at 20±5°C and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


4 Radiated Test Items

4.1 Measuring Instruments


See list of measuring instruments of this test report.

4.2 Test Setup

4.2.1 For radiated test below 30MHz

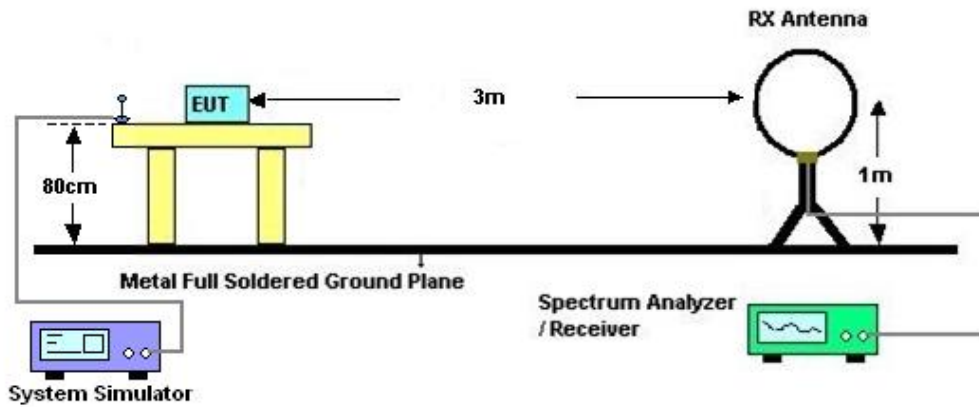

4.2.2 For radiated test from 30MHz to 1GHz

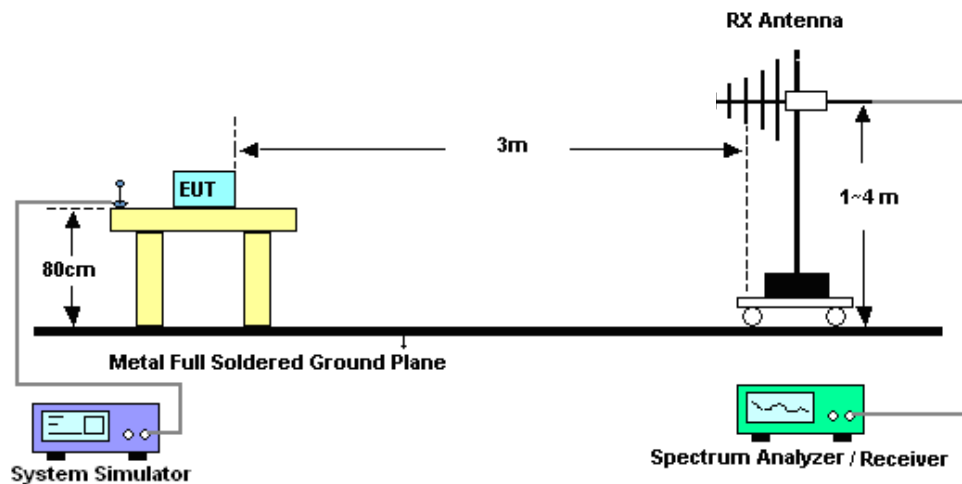

4.2.3 For radiated test above 1GHz



4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



4.4 Radiated Spurious Emission Measurement

4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI/TIA-603-E. The power of any emission outside of the authorized operating frequency ranges shall not exceed -13 dBm/MHz.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
$$\text{EIRP (dBm)} = \text{S.G. Power} - \text{Tx Cable Loss} + \text{Tx Antenna Gain}$$
$$\text{ERP (dBm)} = \text{EIRP} - 2.15$$
10. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.



5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 06, 2023	May 11, 2023~Jun. 05, 2023	Apr. 05, 2024	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04265	60.06.020.0077	0.4GHz~26.5GHz	Dec. 25, 2022	May 11, 2023~Jun. 05, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	May 11, 2023~Jun. 05, 2023	Jul. 06, 2023	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	May 21, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	May 21, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	May 21, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	May 21, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	May 21, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	May 24, 2022	May 21, 2023	May 23, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	May 21, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	May 21, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	May 21, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	May 21, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	May 21, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	May 21, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required

6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.82 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.56 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.54 dB
---	---------

----- THE END -----



Appendix A. Test Results of Conducted Test

Test Engineer :	Khan Zheng	Temperature :	22~23°C
		Relative Humidity :	40~42%

FR1 N77-Ant 5

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-0.26dBi

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
77	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	24.22	23.96	0.2489
77	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	23.17	22.91	0.1954
77	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.08	23.82	0.2410
77	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.01	22.75	0.1884
77	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	23.96	23.7	0.2344
77	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	22.9	22.64	0.1837
77	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	24.32	24.06	0.2547
77	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	23.22	22.96	0.1977
77	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.1	23.84	0.2421
77	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.06	22.8	0.1905
77	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	23.98	23.72	0.2355
77	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	22.91	22.65	0.1841
77	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	24.33	24.07	0.2553
77	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	23.27	23.01	0.2000
77	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.15	23.89	0.2449
77	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.08	22.82	0.1914
77	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@1	24.03	23.77	0.2382
77	30	20	636000	3540.0	DFT-s-OFDM 16 QAM	1@1	22.95	22.69	0.1858
77	30	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	23.66	23.4	0.2188

77	30	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	22.57	22.31	0.1702
77	30	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	23.49	23.23	0.2104
77	30	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	22.43	22.17	0.1648
77	30	25	635832	3537.48	DFT-s-OFDM QPSK	1@1	23.38	23.12	0.2051
77	30	25	635832	3537.48	DFT-s-OFDM 16 QAM	1@1	22.23	21.97	0.1574
77	30	30	631000	3465.0	DFT-s-OFDM QPSK	1@1	24.3	24.04	0.2535
77	30	30	631000	3465.0	DFT-s-OFDM 16 QAM	1@1	23.25	22.99	0.1991
77	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.15	23.89	0.2449
77	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.11	22.85	0.1928
77	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	24.06	23.8	0.2399
77	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	22.99	22.73	0.1875
77	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	24.3	24.04	0.2535
77	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	23.31	23.05	0.2018
77	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.14	23.88	0.2443
77	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.12	22.86	0.1932
77	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	24.15	23.89	0.2449
77	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	23.13	22.87	0.1936
77	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	24.25	23.99	0.2506
77	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	23.26	23	0.1995
77	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.16	23.9	0.2455
77	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.18	22.92	0.1959
77	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@1	24.22	23.96	0.2489
77	30	50	635000	3525.0	DFT-s-OFDM 16 QAM	1@1	23.18	22.92	0.1959
77	30	60	632000	3480.0	DFT-s-OFDM QPSK	1@1	24.3	24.04	0.2535

77	30	60	632000	3480.0	DFT-s-OFDM 16 QAM	1@1	23.28	23.02	0.2004
77	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.19	23.93	0.2472
77	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.19	22.93	0.1963
77	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	24.14	23.88	0.2443
77	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	23.19	22.93	0.1963
77	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	24.27	24.01	0.2518
77	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	23.24	22.98	0.1986
77	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.19	23.93	0.2472
77	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.14	22.88	0.1941
77	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	24.19	23.93	0.2472
77	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	23.17	22.91	0.1954
77	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	24.22	23.96	0.2489
77	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	23.27	23.01	0.2000
77	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.28	24.02	0.2523
77	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.22	22.96	0.1977
77	30	80	634000	3510.0	DFT-s-OFDM QPSK	1@1	24.19	23.93	0.2472
77	30	80	634000	3510.0	DFT-s-OFDM 16 QAM	1@1	23.15	22.89	0.1945
77	30	90	633000	3495.0	DFT-s-OFDM QPSK	1@1	24.28	24.02	0.2523
77	30	90	633000	3495.0	DFT-s-OFDM 16 QAM	1@1	23.21	22.95	0.1972
77	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.23	23.97	0.2495
77	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.22	22.96	0.1977
77	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	24.2	23.94	0.2477
77	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	23.17	22.91	0.1954
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	24.1	23.84	0.2421

77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	24.28	24.02	0.2523
77	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	23.68	23.42	0.2198
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	24.11	23.85	0.2427
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.36	24.1	0.2570
77	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	23.73	23.47	0.2223
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	23.09	22.83	0.1919
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.3	23.04	0.2014
77	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	22.73	22.47	0.1766
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	21.6	21.34	0.1361
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	21.62	21.36	0.1368
77	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	21.06	20.8	0.1202
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	19.55	19.29	0.0849
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	19.73	19.47	0.0885
77	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	19.27	19.01	0.0796
77	30	100	633334	3500.01	CP-OFDM QPSK	137@68	22.55	22.29	0.1694
77	30	100	633334	3500.01	CP-OFDM QPSK	1@1	22.79	22.53	0.1791
77	30	100	633334	3500.01	CP-OFDM QPSK	1@271	22.24	21.98	0.1578

FR1 N78-Ant 5

Transmitter Conducted Output Power And EIRP, (G_T - L_C)=-0.67dBi

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP (dBm)	EIRP (W)
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@1	25.26	24.59	0.2877
78	30	10	630334	3455.01	DFT-s-OFDM 16 QAM	1@1	24.13	23.46	0.2218
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.07	24.4	0.2754
78	30	10	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.92	23.25	0.2113
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@1	25.08	24.41	0.2761
78	30	10	636332	3544.98	DFT-s-OFDM 16 QAM	1@1	23.92	23.25	0.2113
78	30	15	630500	3457.5	DFT-s-OFDM QPSK	1@1	25.4	24.73	0.2972
78	30	15	630500	3457.5	DFT-s-OFDM 16 QAM	1@1	24.22	23.55	0.2265
78	30	15	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.16	24.49	0.2812
78	30	15	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.03	23.36	0.2168
78	30	15	636166	3542.49	DFT-s-OFDM QPSK	1@1	25.14	24.47	0.2799
78	30	15	636166	3542.49	DFT-s-OFDM 16 QAM	1@1	23.98	23.31	0.2143
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@1	25.39	24.72	0.2965
78	30	20	630668	3460.02	DFT-s-OFDM 16 QAM	1@1	24.23	23.56	0.2270
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.22	24.55	0.2851
78	30	20	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.05	23.38	0.2178
78	30	20	636000	3540	DFT-s-OFDM QPSK	1@1	25.12	24.45	0.2786
78	30	20	636000	3540	DFT-s-OFDM 16 QAM	1@1	23.92	23.25	0.2113
78	30	25	630834	3462.51	DFT-s-OFDM QPSK	1@1	24.68	24.01	0.2518
78	30	25	630834	3462.51	DFT-s-OFDM 16 QAM	1@1	23.56	22.89	0.1945

QAM									
78	30	25	633334	3500.01	DFT-s-OFDM QPSK	1@1	24.46	23.79	0.2393
78	30	25	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	23.38	22.71	0.1866
78	30	25	635832	3537.48	DFT-s-OFDM QPSK	1@1	24.37	23.7	0.2344
78	30	25	635832	3537.48	DFT-s-OFDM 16 QAM	1@1	23.33	22.66	0.1845
78	30	30	631000	3465	DFT-s-OFDM QPSK	1@1	25.4	24.73	0.2972
78	30	30	631000	3465	DFT-s-OFDM 16 QAM	1@1	24.24	23.57	0.2275
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.17	24.5	0.2818
78	30	30	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.02	23.35	0.2163
78	30	30	635666	3534.99	DFT-s-OFDM QPSK	1@1	25.14	24.47	0.2799
78	30	30	635666	3534.99	DFT-s-OFDM 16 QAM	1@1	24	23.33	0.2153
78	30	40	631334	3470.01	DFT-s-OFDM QPSK	1@1	25.4	24.73	0.2972
78	30	40	631334	3470.01	DFT-s-OFDM 16 QAM	1@1	24.22	23.55	0.2265
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.12	24.45	0.2786
78	30	40	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.05	23.38	0.2178
78	30	40	635332	3529.98	DFT-s-OFDM QPSK	1@1	25.26	24.59	0.2877
78	30	40	635332	3529.98	DFT-s-OFDM 16 QAM	1@1	24.12	23.45	0.2213
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@1	25.4	24.73	0.2972
78	30	50	631668	3475.02	DFT-s-OFDM 16 QAM	1@1	24.24	23.57	0.2275
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.25	24.58	0.2871
78	30	50	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.11	23.44	0.2208
78	30	50	635000	3525	DFT-s-OFDM QPSK	1@1	25.28	24.61	0.2891
78	30	50	635000	3525	DFT-s-OFDM 16 QAM	1@1	24.15	23.48	0.2228
78	30	60	632000	3480	DFT-s-OFDM QPSK	1@1	25.42	24.75	0.2985

78	30	60	632000	3480	DFT-s-OFDM 16 QAM	1@1	24.23	23.56	0.2270
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.24	24.57	0.2864
78	30	60	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.14	23.47	0.2223
78	30	60	634666	3519.99	DFT-s-OFDM QPSK	1@1	25.28	24.61	0.2891
78	30	60	634666	3519.99	DFT-s-OFDM 16 QAM	1@1	24.12	23.45	0.2213
78	30	70	632334	3485.01	DFT-s-OFDM QPSK	1@1	25.31	24.64	0.2911
78	30	70	632334	3485.01	DFT-s-OFDM 16 QAM	1@1	24.2	23.53	0.2254
78	30	70	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.21	24.54	0.2844
78	30	70	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.1	23.43	0.2203
78	30	70	634332	3514.98	DFT-s-OFDM QPSK	1@1	25.12	24.45	0.2786
78	30	70	634332	3514.98	DFT-s-OFDM 16 QAM	1@1	24.02	23.35	0.2163
78	30	80	632668	3490.02	DFT-s-OFDM QPSK	1@1	25.37	24.7	0.2951
78	30	80	632668	3490.02	DFT-s-OFDM 16 QAM	1@1	24.22	23.55	0.2265
78	30	80	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.26	24.59	0.2877
78	30	80	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.19	23.52	0.2249
78	30	80	634000	3510	DFT-s-OFDM QPSK	1@1	25.26	24.59	0.2877
78	30	80	634000	3510	DFT-s-OFDM 16 QAM	1@1	24.12	23.45	0.2213
78	30	90	633000	3495	DFT-s-OFDM QPSK	1@1	25.34	24.67	0.2931
78	30	90	633000	3495	DFT-s-OFDM 16 QAM	1@1	24.17	23.5	0.2239
78	30	90	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.28	24.61	0.2891
78	30	90	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.16	23.49	0.2234
78	30	90	633666	3504.99	DFT-s-OFDM QPSK	1@1	25.32	24.65	0.2917
78	30	90	633666	3504.99	DFT-s-OFDM 16 QAM	1@1	24.2	23.53	0.2254
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	135@67	25.05	24.38	0.2742

78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@1	25.2	24.53	0.2838
78	30	100	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@271	24.71	24.04	0.2535
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	135@67	25.08	24.41	0.2761
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@1	25.44	24.77	0.2999
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@271	24.87	24.2	0.2630
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	135@67	24.07	23.4	0.2188
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@1	24.23	23.56	0.2270
78	30	100	633334	3500.01	DFT-s-OFDM 16 QAM	1@271	23.75	23.08	0.2032
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	135@67	22.6	21.93	0.1560
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@1	22.58	21.91	0.1552
78	30	100	633334	3500.01	DFT-s-OFDM 64 QAM	1@271	22.16	21.49	0.1409
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	135@67	20.67	20	0.1000
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@1	21.04	20.37	0.1089
78	30	100	633334	3500.01	DFT-s-OFDM 256 QAM	1@271	20.41	19.74	0.0942
78	30	100	633334	3500.01	CP-OFDM QPSK	137@68	23.54	22.87	0.1936
78	30	100	633334	3500.01	CP-OFDM QPSK	1@1	23.76	23.09	0.2037
78	30	100	633334	3500.01	CP-OFDM QPSK	1@271	23.2	22.53	0.1791


Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0064	PASS	NV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0043	PASS	LV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0050	PASS	HV
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0062	PASS	-30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0064	PASS	-20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0066	PASS	-10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0063	PASS	0°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0025	PASS	10°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0064	PASS	20°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0038	PASS	30°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0025	PASS	40°C
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	0.0063	PASS	50°C

Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
78	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	50@0	7.21	13	PASS
78	30	20	630668	3460.02	DFT-s-OFDM PI/2 BPSK	1@0	7.97	13	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	50@0	8.29	13	PASS
78	30	20	630668	3460.02	DFT-s-OFDM QPSK	1@0	8.99	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	7.15	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	1@0	7.6	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	8.26	13	PASS
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	1@0	8.31	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	50@0	7.17	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM PI/2 BPSK	1@0	7.25	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	50@0	8.31	13	PASS
78	30	20	636000	3540.0	DFT-s-OFDM QPSK	1@0	8.79	13	PASS


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Low_CH

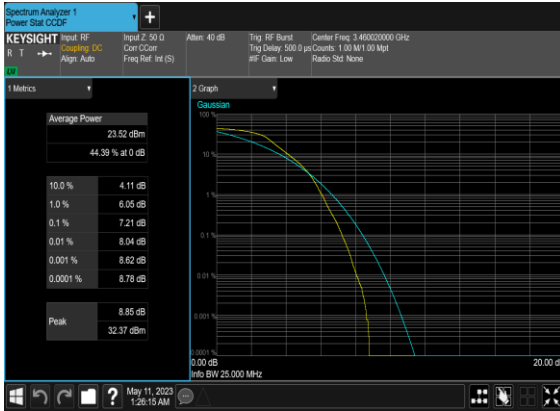


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Low_CH



N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Low_CH

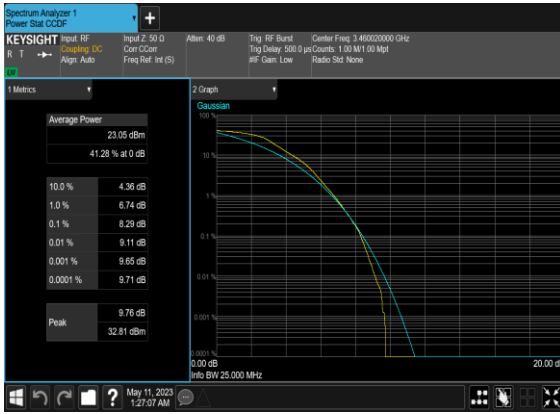


N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

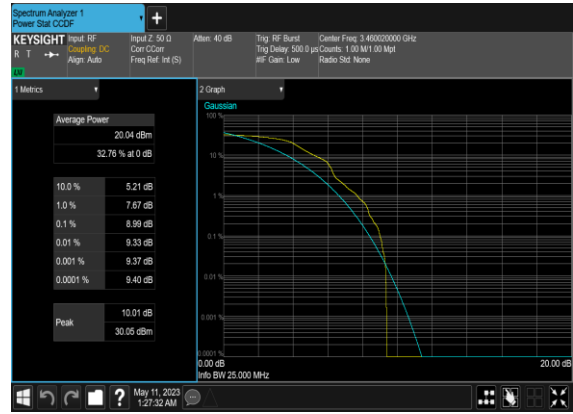

N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH




N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_Mid_CH

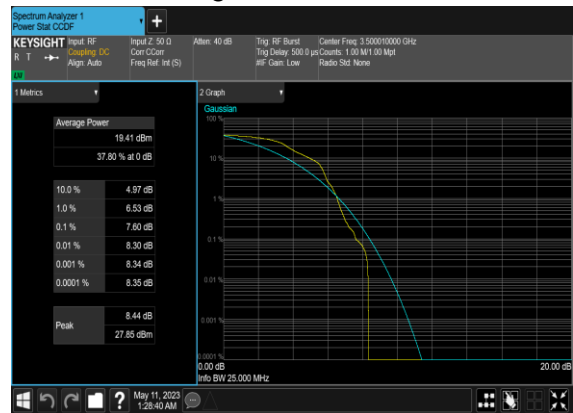

N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH




N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Mid_CH

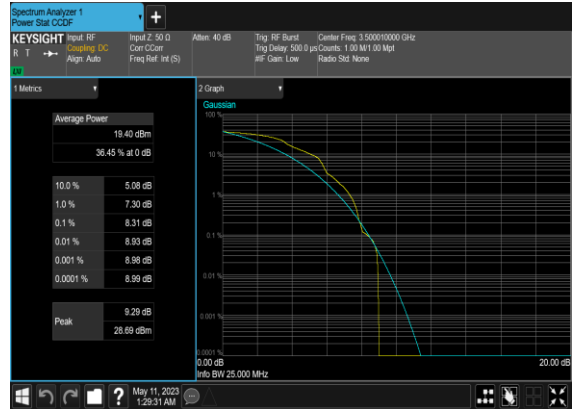

N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_High_CH




N78(20M)_DFT-s-OFDM_PI_2-BPSK_Edge_1RB_Left_High_CH

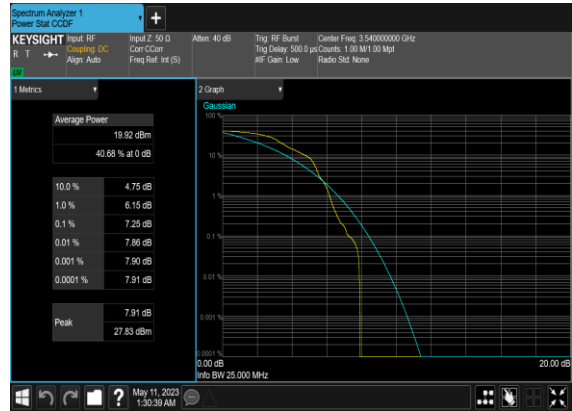

N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_High_CH



N78(20M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_High_CH

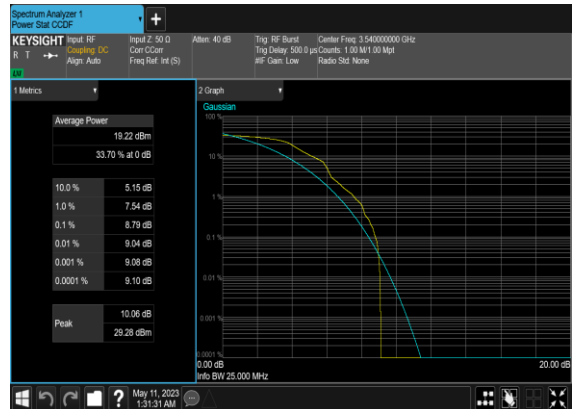


Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
78	30	10	633334	3500.01	DFT-s-OFDM PI/2 BPSK	24@0	8.5955	9.038
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	24@0	8.5859	9.113
78	30	10	633334	3500.01	CP-OFDM QPSK	24@0	8.5762	9.267
78	30	10	633334	3500.01	CP-OFDM 16 QAM	24@0	8.5536	9.142
78	30	10	633334	3500.01	CP-OFDM 64 QAM	24@0	8.5925	9.104
78	30	10	633334	3500.01	CP-OFDM 256 QAM	24@0	8.5876	9.025
78	30	15	633334	3500.01	DFT-s-OFDM PI/2 BPSK	36@0	12.797	13.49
78	30	15	633334	3500.01	DFT-s-OFDM QPSK	36@0	12.777	13.41
78	30	15	633334	3500.01	CP-OFDM QPSK	38@0	13.56	14.24
78	30	15	633334	3500.01	CP-OFDM 16 QAM	38@0	13.54	14.22
78	30	15	633334	3500.01	CP-OFDM 64 QAM	38@0	13.554	14.24
78	30	15	633334	3500.01	CP-OFDM 256 QAM	38@0	13.561	14.33
78	30	20	633334	3500.01	DFT-s-OFDM PI/2 BPSK	50@0	17.749	18.58
78	30	20	633334	3500.01	DFT-s-OFDM QPSK	50@0	17.778	18.6
78	30	20	633334	3500.01	CP-OFDM QPSK	51@0	18.184	18.99
78	30	20	633334	3500.01	CP-OFDM 16 QAM	51@0	18.206	18.99
78	30	20	633334	3500.01	CP-OFDM 64 QAM	51@0	18.197	19.04
78	30	20	633334	3500.01	CP-OFDM 256 QAM	51@0	18.189	19.05
78	30	25	633334	3500.01	DFT-s-OFDM PI/2 BPSK	64@0	22.815	23.81
78	30	25	633334	3500.01	DFT-s-OFDM QPSK	64@0	22.757	23.69
78	30	25	633334	3500.01	CP-OFDM QPSK	65@0	23.142	24.13
78	30	25	633334	3500.01	CP-OFDM 16 QAM	65@0	23.186	24.14
78	30	25	633334	3500.01	CP-OFDM 64 QAM	65@0	23.138	24.1
78	30	25	633334	3500.01	CP-OFDM 256 QAM	65@0	23.123	24.04


78	30	30	633334	3500.01	DFT-s-OFDM PI/2 BPSK	75@0	26.758	27.78
78	30	30	633334	3500.01	DFT-s-OFDM QPSK	75@0	26.684	27.71
78	30	30	633334	3500.01	CP-OFDM QPSK	78@0	27.796	28.89
78	30	30	633334	3500.01	CP-OFDM 16 QAM	78@0	27.789	28.97
78	30	30	633334	3500.01	CP-OFDM 64 QAM	78@0	27.795	28.89
78	30	30	633334	3500.01	CP-OFDM 256 QAM	78@0	27.775	29.21
78	30	40	633334	3500.01	DFT-s-OFDM PI/2 BPSK	100@0	35.753	37.04
78	30	40	633334	3500.01	DFT-s-OFDM QPSK	100@0	35.652	36.99
78	30	40	633334	3500.01	CP-OFDM QPSK	106@0	37.858	39.52
78	30	40	633334	3500.01	CP-OFDM 16 QAM	106@0	37.671	39.06
78	30	40	633334	3500.01	CP-OFDM 64 QAM	106@0	37.83	39.13
78	30	40	633334	3500.01	CP-OFDM 256 QAM	106@0	37.853	39.32
78	30	50	633334	3500.01	DFT-s-OFDM PI/2 BPSK	128@0	45.794	47.21
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	128@0	45.768	47.49
78	30	50	633334	3500.01	CP-OFDM QPSK	133@0	47.414	49.12
78	30	50	633334	3500.01	CP-OFDM 16 QAM	133@0	47.367	48.97
78	30	50	633334	3500.01	CP-OFDM 64 QAM	133@0	47.451	49.01
78	30	50	633334	3500.01	CP-OFDM 256 QAM	133@0	47.403	49.08
78	30	60	633334	3500.01	DFT-s-OFDM PI/2 BPSK	162@0	57.902	59.75
78	30	60	633334	3500.01	DFT-s-OFDM QPSK	162@0	57.962	59.69
78	30	60	633334	3500.01	CP-OFDM QPSK	162@0	57.694	59.72
78	30	60	633334	3500.01	CP-OFDM 16 QAM	162@0	57.961	59.74
78	30	60	633334	3500.01	CP-OFDM 64 QAM	162@0	57.876	59.64
78	30	60	633334	3500.01	CP-OFDM 256 QAM	162@0	57.909	59.65
78	30	70	633334	3500.01	DFT-s-OFDM PI/2 BPSK	180@0	64.366	66.43
78	30	70	633334	3500.01	DFT-s-OFDM	180@0	64.387	66.38

QPSK								
78	30	70	633334	3500.01	CP-OFDM QPSK	189@0	67.432	69.61
78	30	70	633334	3500.01	CP-OFDM 16 QAM	189@0	67.539	69.5
78	30	70	633334	3500.01	CP-OFDM 64 QAM	189@0	67.378	69.51
78	30	70	633334	3500.01	CP-OFDM 256 QAM	189@0	67.375	69.67
78	30	80	633334	3500.01	DFT-s- OFDM PI/2 BPSK	216@0	77.105	79.64
78	30	80	633334	3500.01	DFT-s- OFDM QPSK	216@0	77.255	79.73
78	30	80	633334	3500.01	CP-OFDM QPSK	217@0	77.418	79.94
78	30	80	633334	3500.01	CP-OFDM 16 QAM	217@0	77.471	80.01
78	30	80	633334	3500.01	CP-OFDM 64 QAM	217@0	77.677	80.07
78	30	80	633334	3500.01	CP-OFDM 256 QAM	217@0	77.496	79.96
78	30	90	633334	3500.01	DFT-s- OFDM PI/2 BPSK	240@0	85.809	88.47
78	30	90	633334	3500.01	DFT-s- OFDM QPSK	240@0	85.834	88.53
78	30	90	633334	3500.01	CP-OFDM QPSK	245@0	87.421	90.21
78	30	90	633334	3500.01	CP-OFDM 16 QAM	245@0	87.425	90.12
78	30	90	633334	3500.01	CP-OFDM 64 QAM	245@0	87.514	90.24
78	30	90	633334	3500.01	CP-OFDM 256 QAM	245@0	87.448	90.29
78	30	100	633334	3500.01	DFT-s- OFDM PI/2 BPSK	270@0	96.554	99.59
78	30	100	633334	3500.01	DFT-s- OFDM QPSK	270@0	96.507	99.61
78	30	100	633334	3500.01	CP-OFDM QPSK	273@0	97.819	100.5
78	30	100	633334	3500.01	CP-OFDM 16 QAM	273@0	97.665	100.6
78	30	100	633334	3500.01	CP-OFDM 64 QAM	273@0	97.532	100.6
78	30	100	633334	3500.01	CP-OFDM 256 QAM	273@0	97.623	100.6


N78(10M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

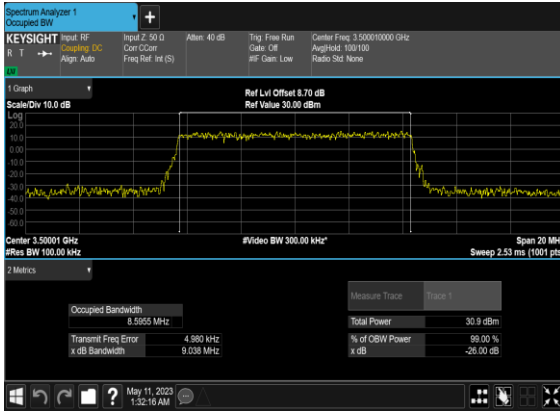

N78(10M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

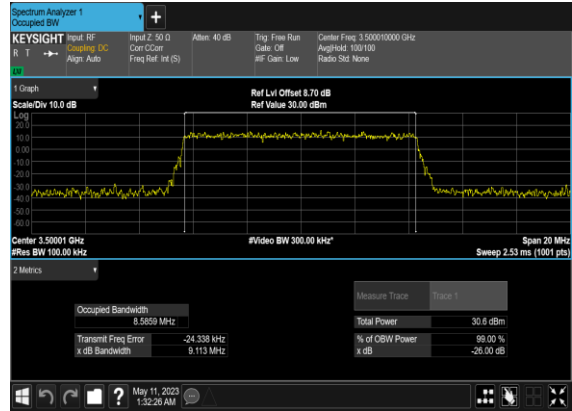


N78(10M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

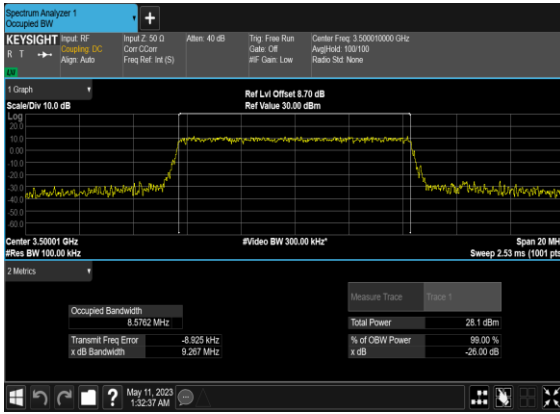


N78(10M)_CP-OFDM_16QAM_Outer_Full_Mid_CH




N78(10M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

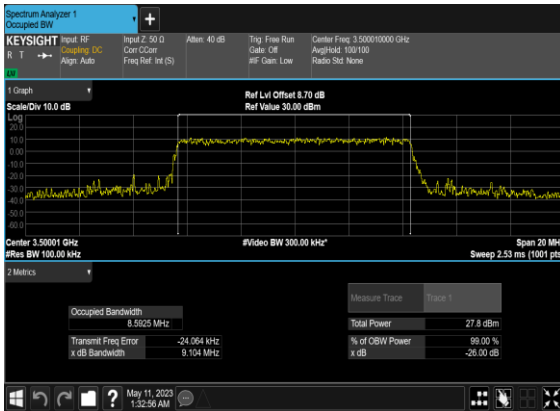


N78(10M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

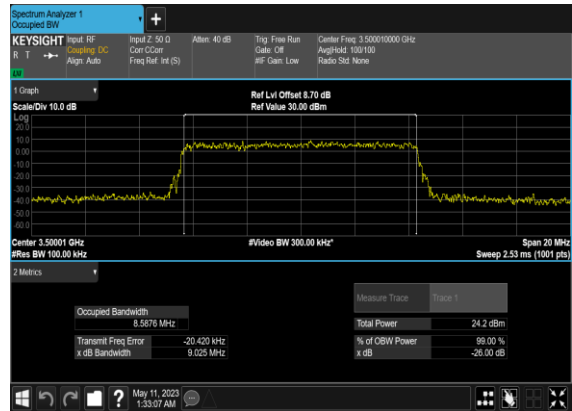


N78(15M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

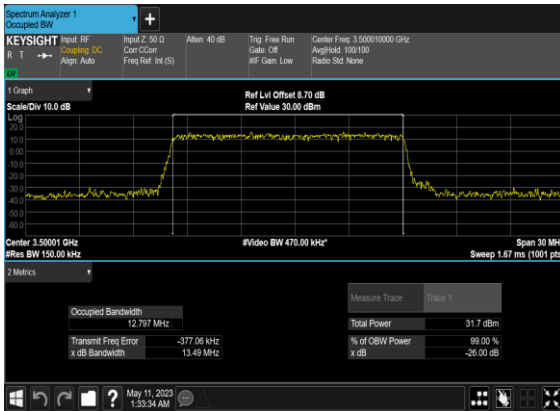


N78(15M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

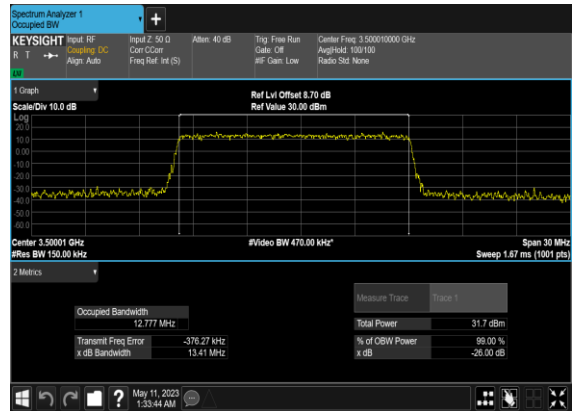


N78(15M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

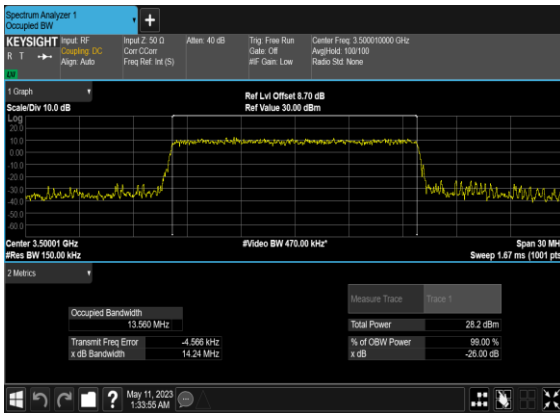


N78(15M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

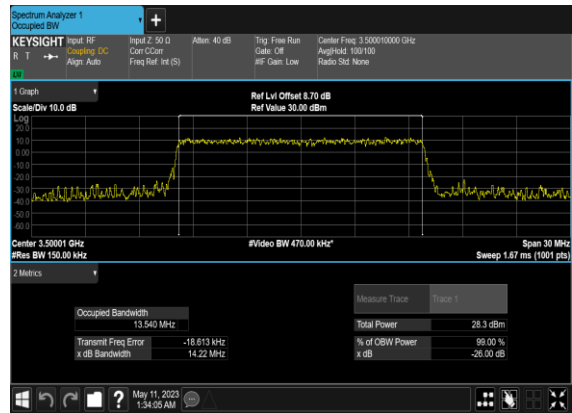


N78(15M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

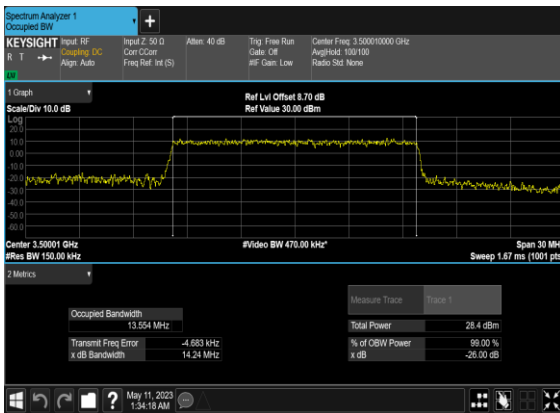


N78(15M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

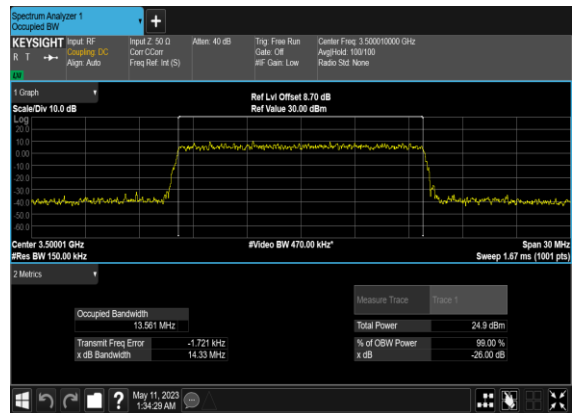


N78(20M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

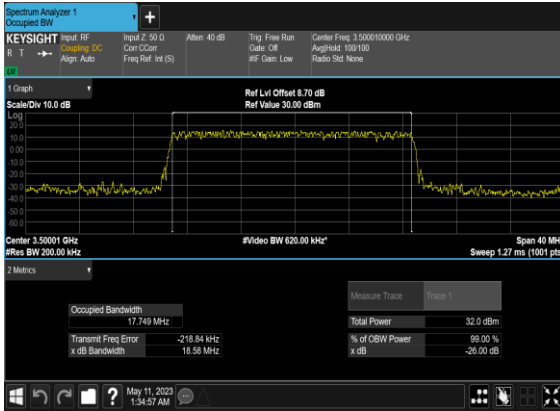


N78(20M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

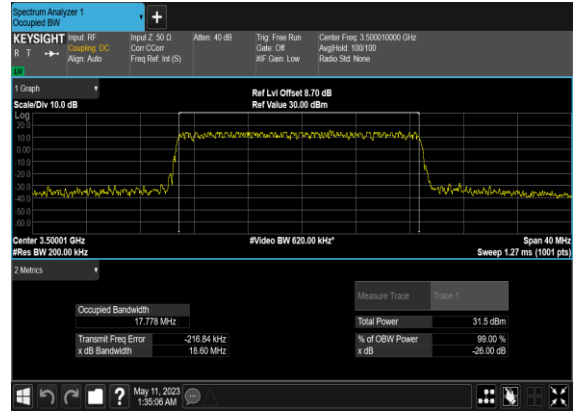


N78(20M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

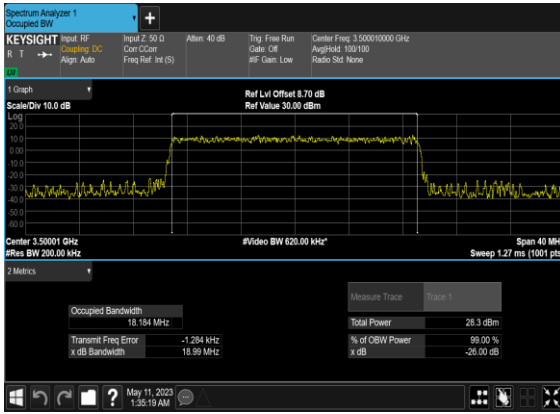


N78(20M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

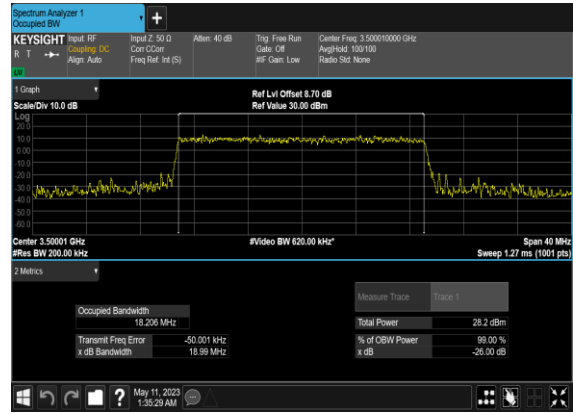


N78(20M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

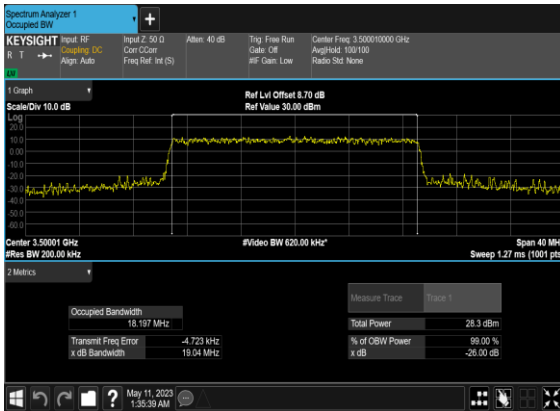


N78(20M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

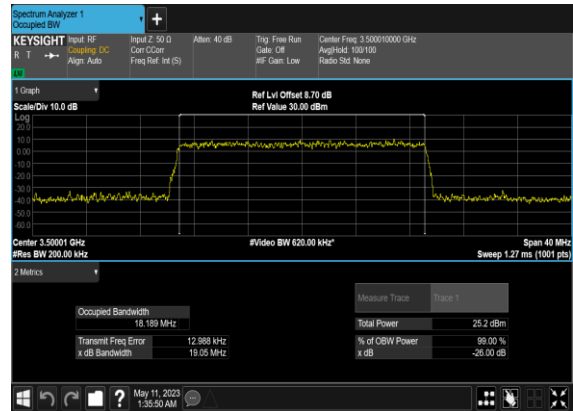


N78(25M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

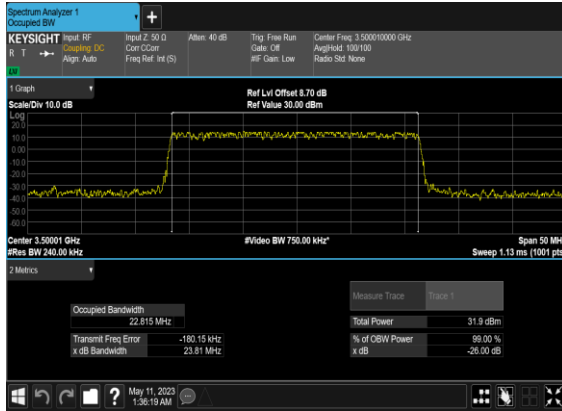


N78(25M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

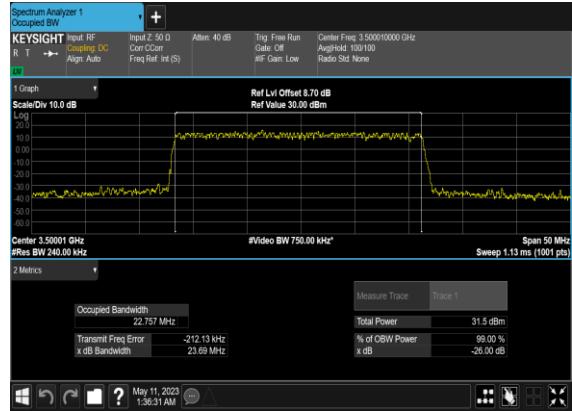


N78(25M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

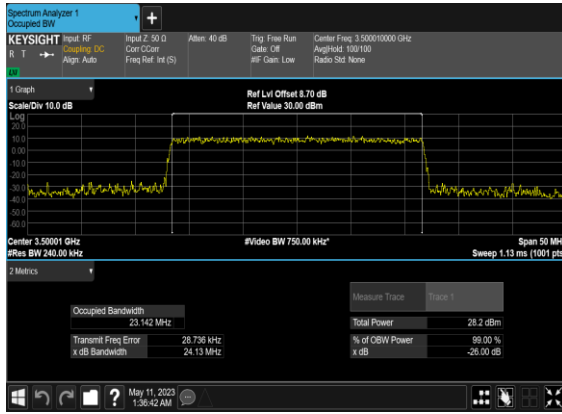


N78(25M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

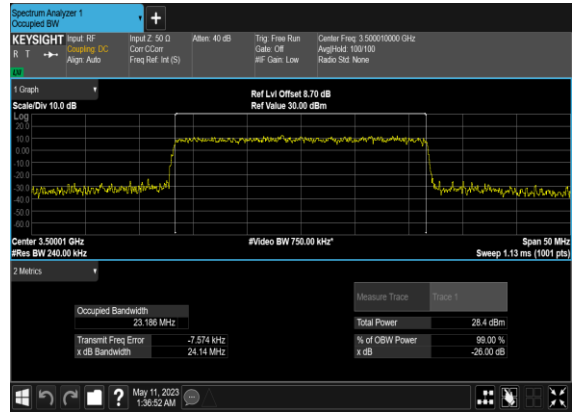


N78(25M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

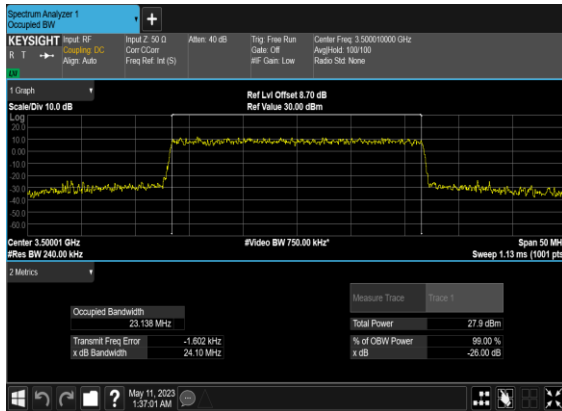


N78(25M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

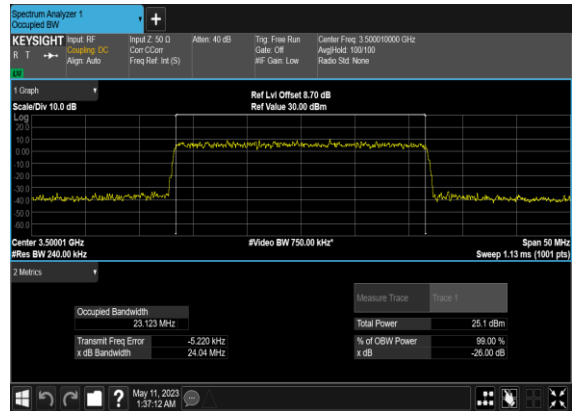


N78(30M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

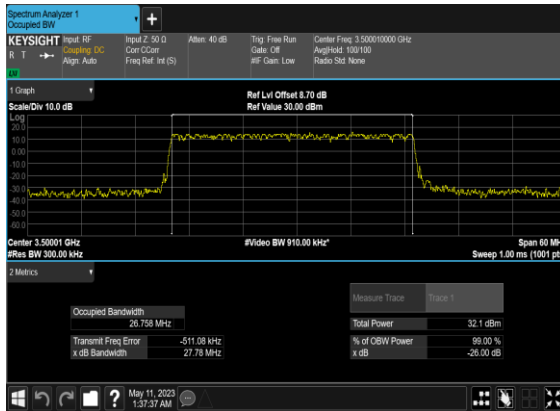


N78(30M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

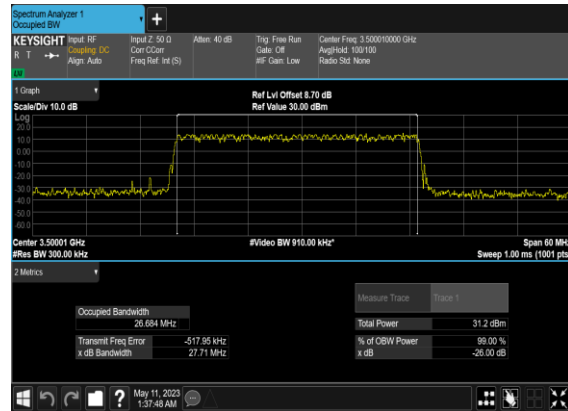


N78(30M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

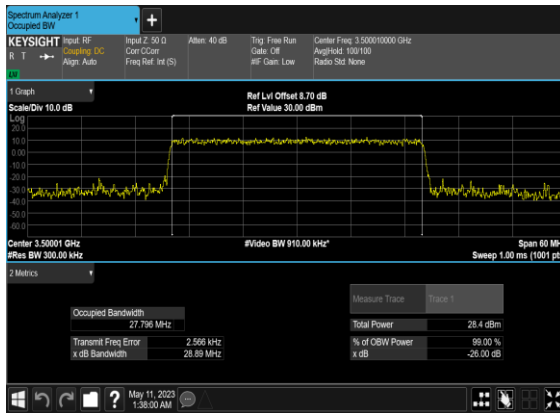


N78(30M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

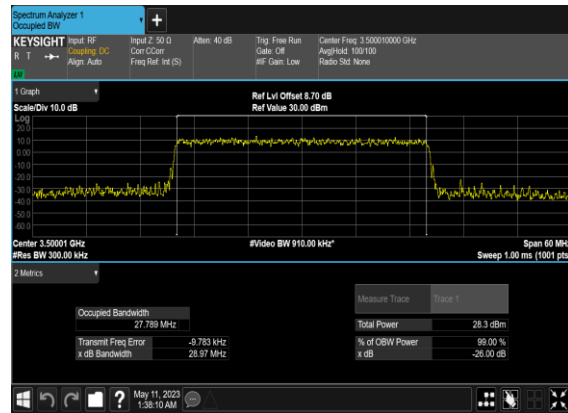


N78(30M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

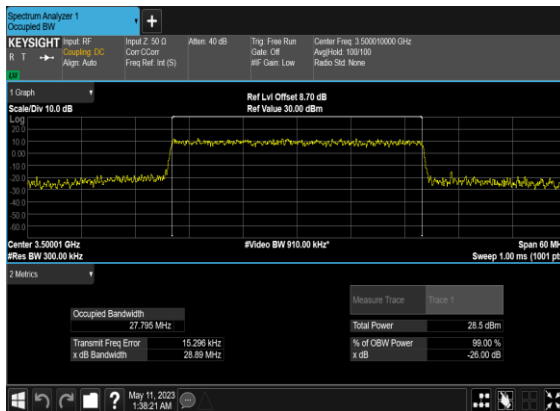


N78(30M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

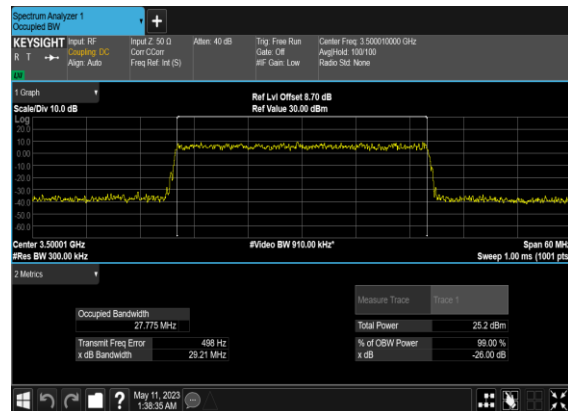


N78(40M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

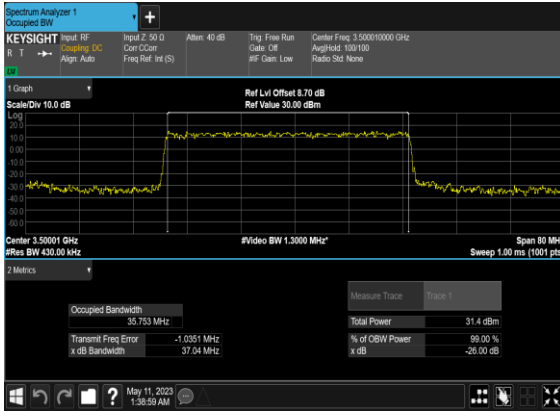

N78(40M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

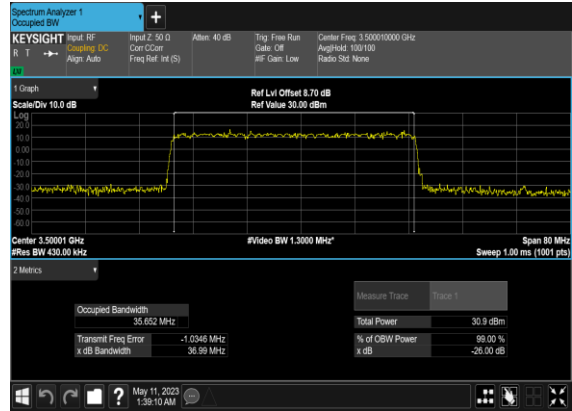


N78(40M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

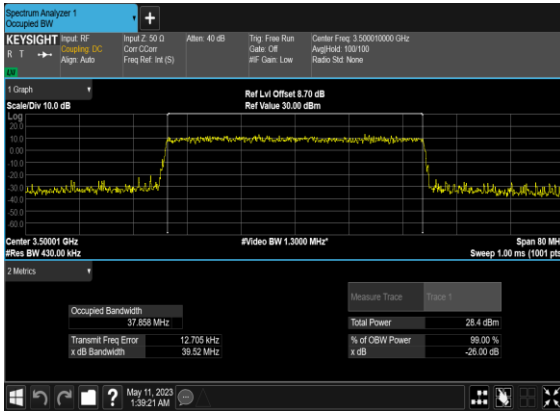


N78(40M)_CP-OFDM_16QAM_Outer_Full_Mid_CH




N78(40M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

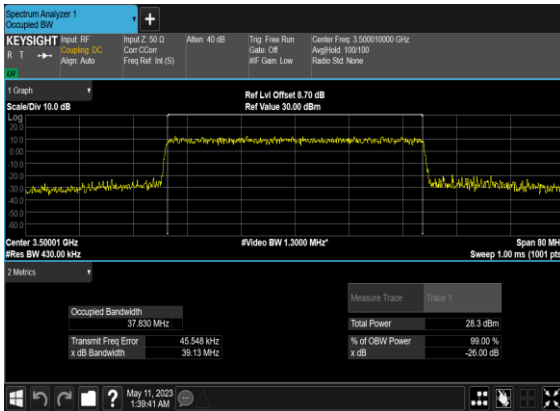


N78(40M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

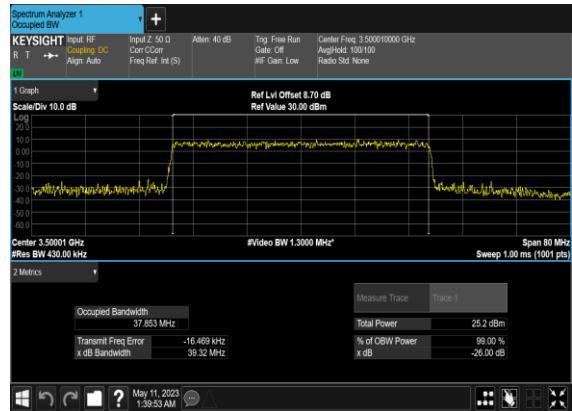


N78(50M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

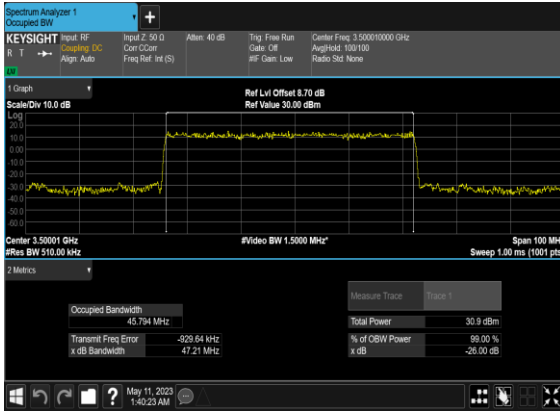


N78(50M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

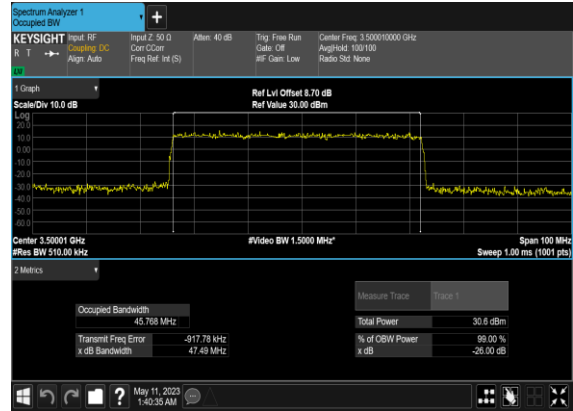


N78(50M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

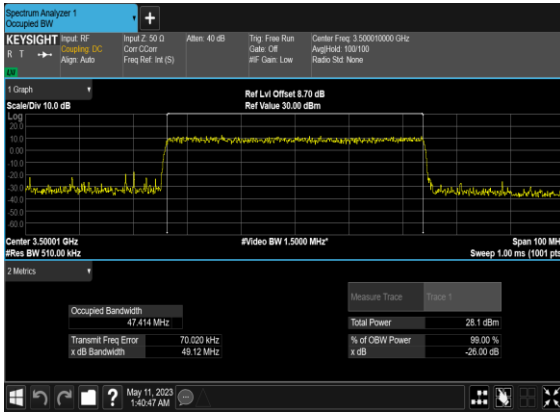


N78(50M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

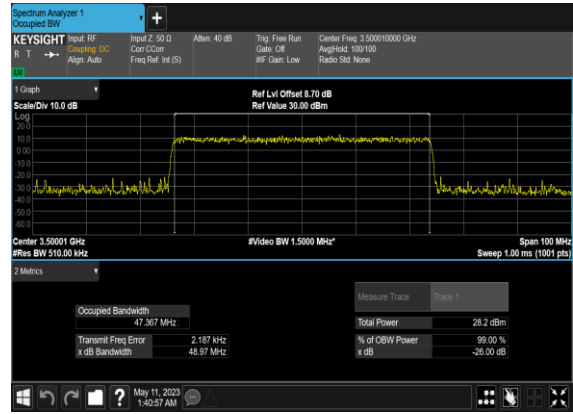


N78(50M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

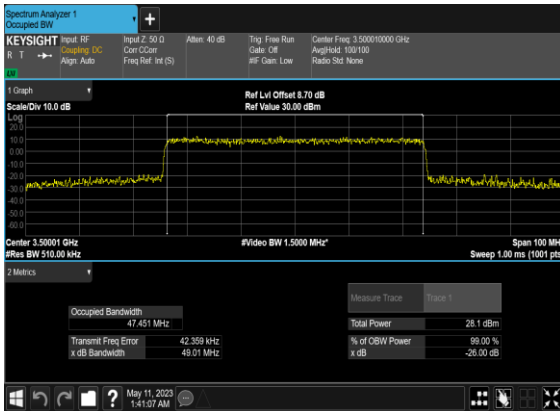


N78(50M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

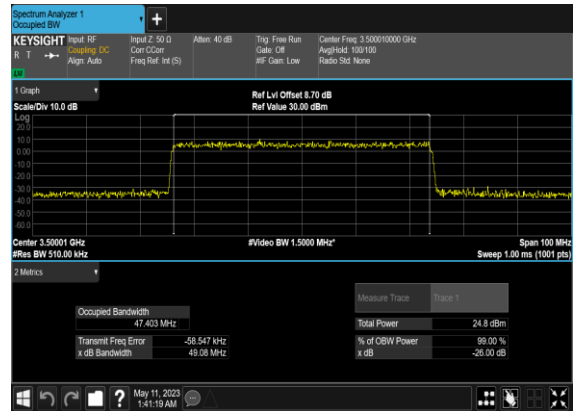

N78(60M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

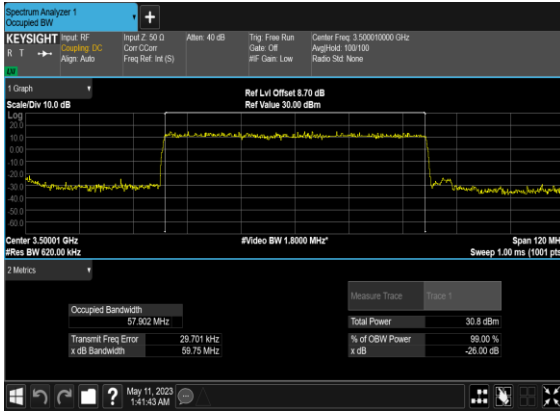


N78(60M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

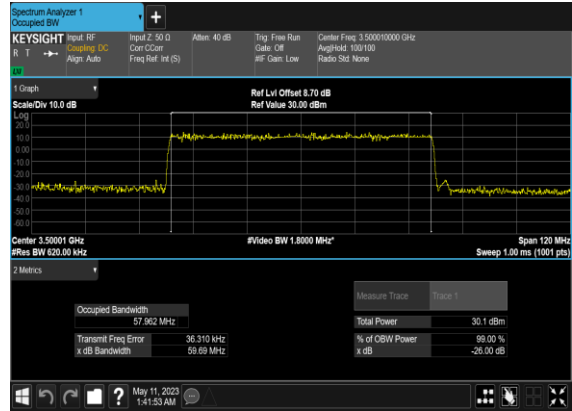


N78(60M)_CP-OFDM_QPSK_Outer_Full_Mid_CH




N78(60M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

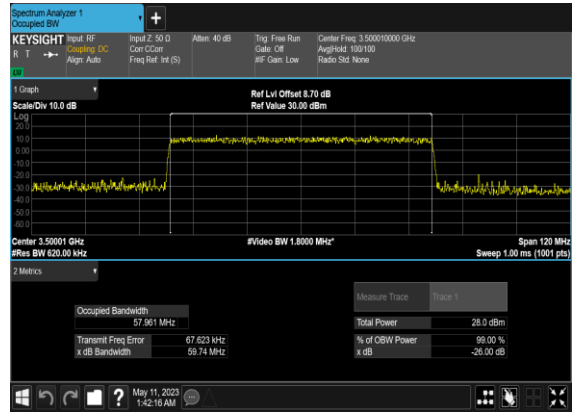


N78(60M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

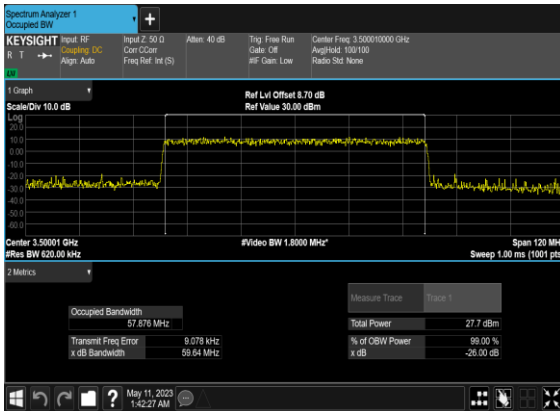


N78(60M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

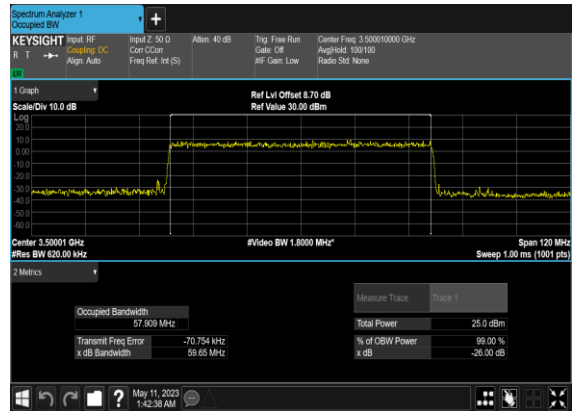


N78(70M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

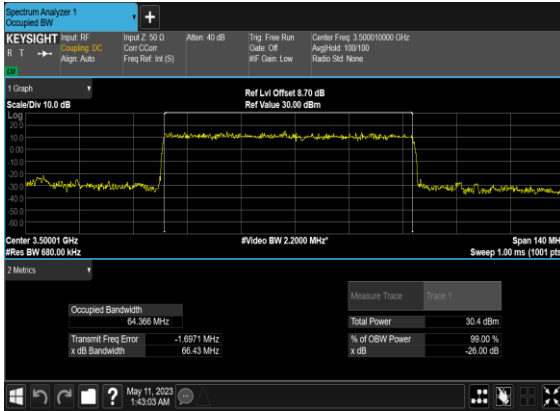

N78(70M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

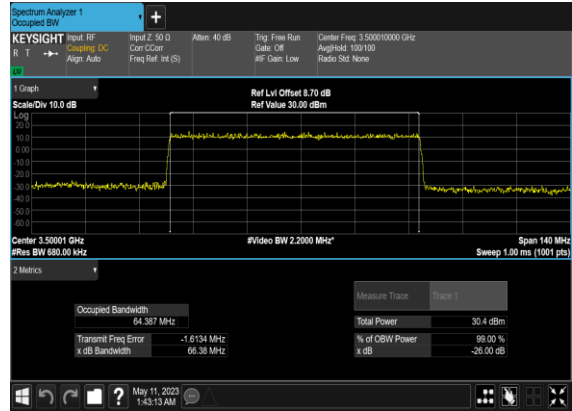


N78(70M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

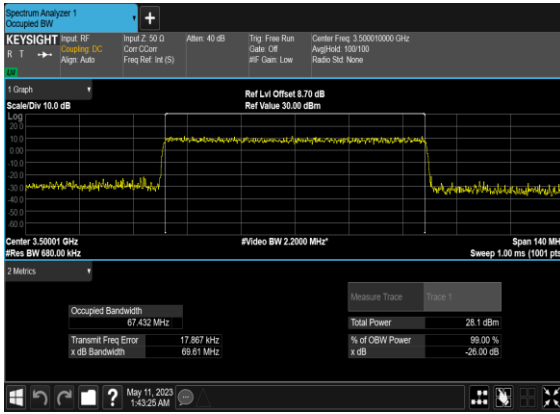


N78(70M)_CP-OFDM_16QAM_Outer_Full_Mid_CH




N78(70M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

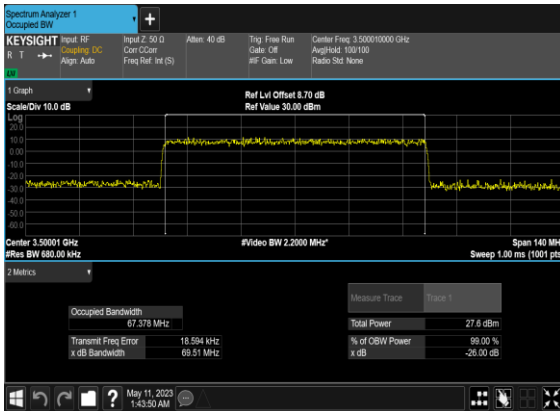


N78(70M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

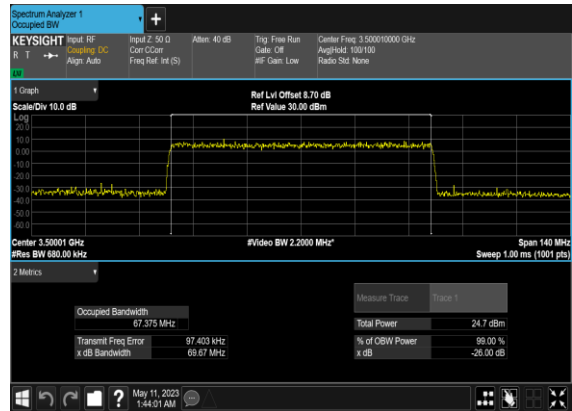


N78(80M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

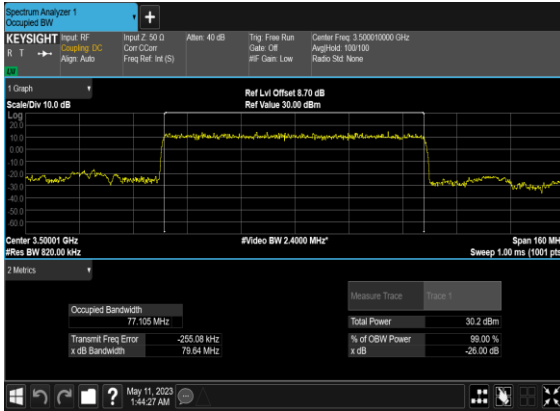

N78(80M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

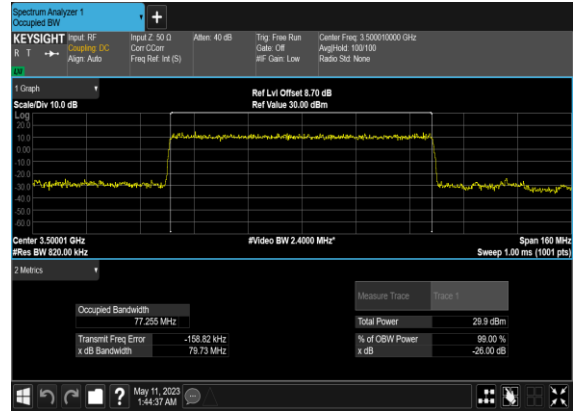


N78(80M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

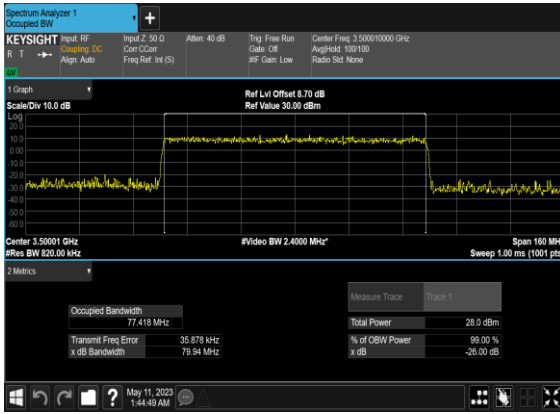


N78(80M)_CP-OFDM_16QAM_Outer_Full_Mid_CH




N78(80M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

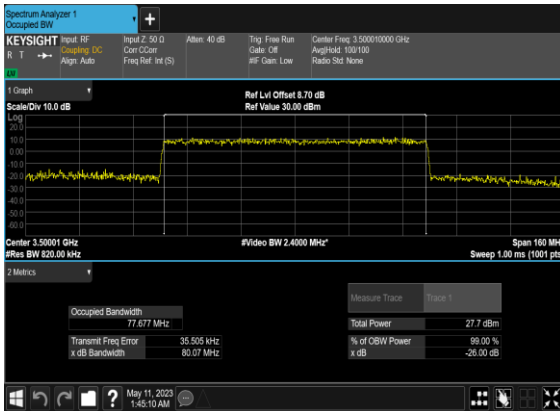


N78(80M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

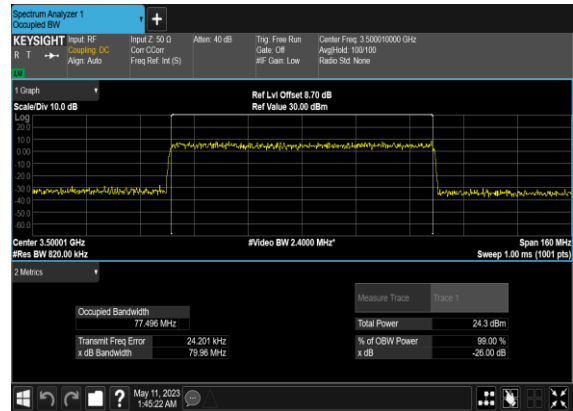


N78(90M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

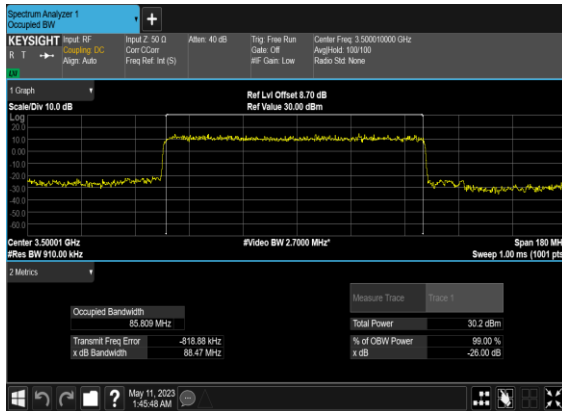


N78(90M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

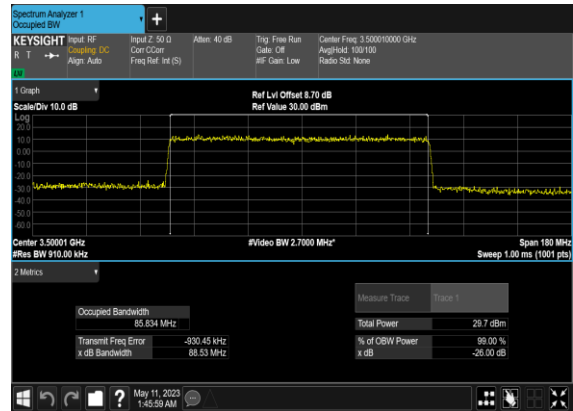


N78(90M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

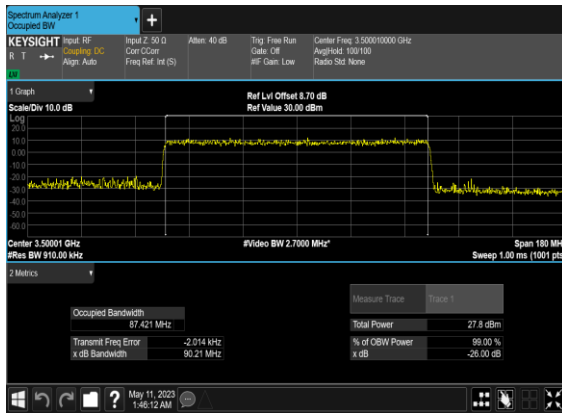


N78(90M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

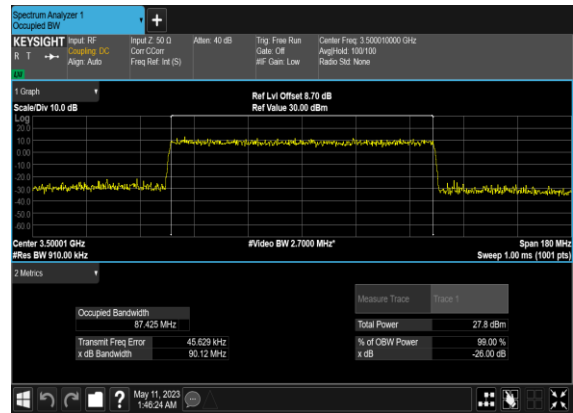


N78(90M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

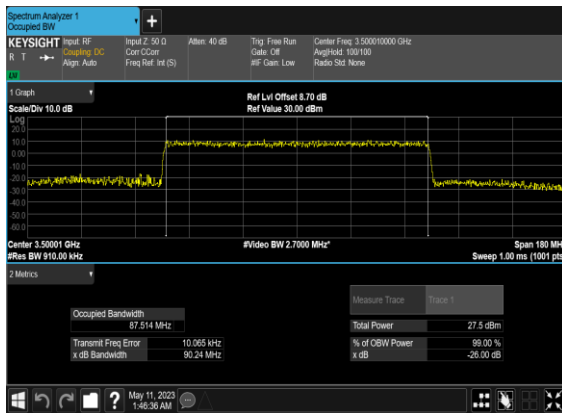


N78(90M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

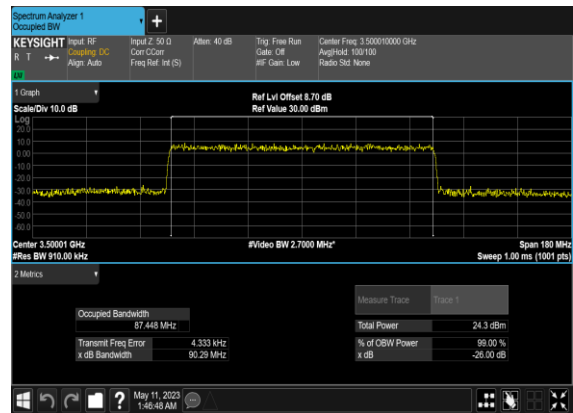


N78(100M)_DFT-s-OFDM_PI_2-BPSK_Outer_Full_Mid_CH

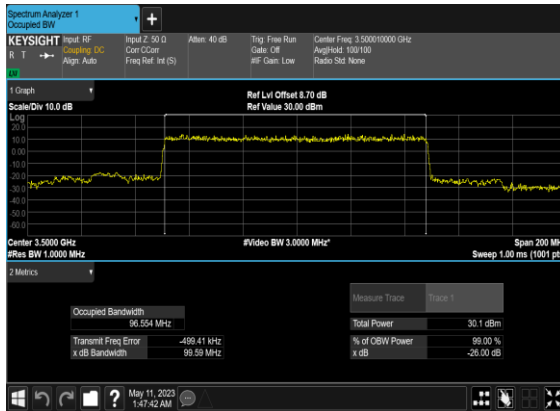


N78(100M)_DFT-s-OFDM_QPSK_Outer_Full_Mid_CH

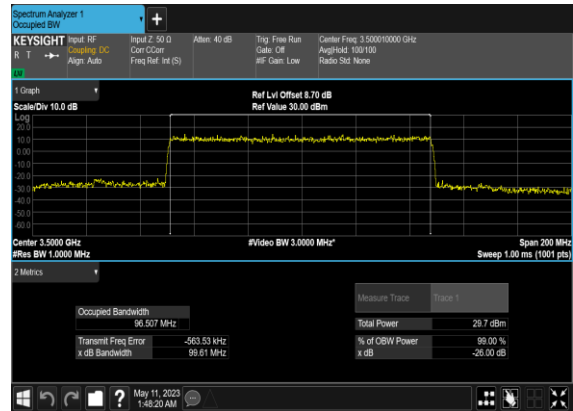


N78(100M)_CP-OFDM_QPSK_Outer_Full_Mid_CH

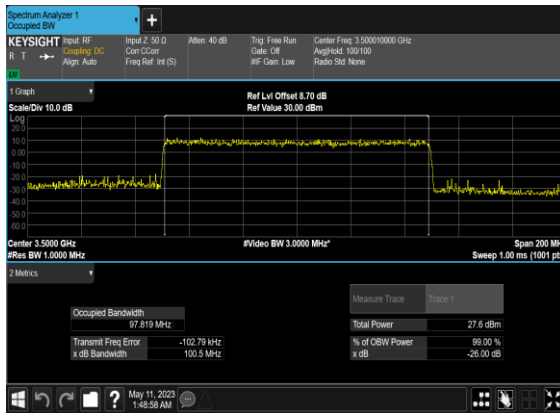


N78(100M)_CP-OFDM_16QAM_Outer_Full_Mid_CH

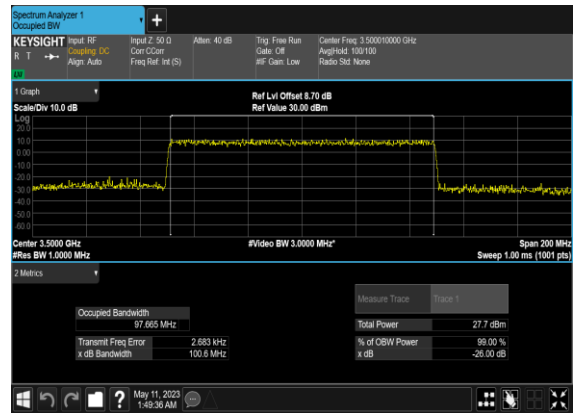

N78(100M)_CP-OFDM_64QAM_Outer_Full_Mid_CH

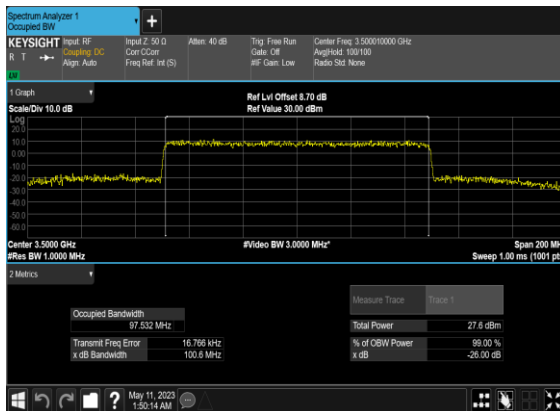

N78(100M)_CP-OFDM_256QAM_Outer_Full_Mid_CH

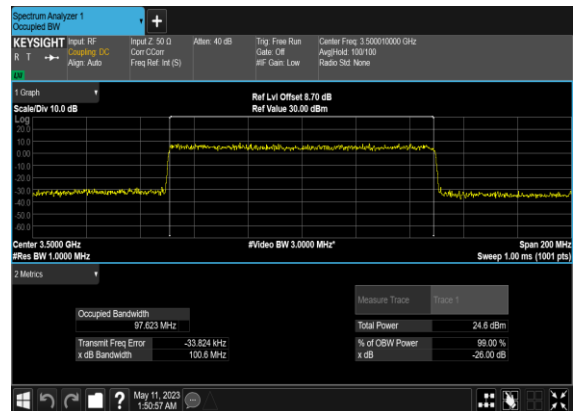


Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	630334	3455.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	10	636332	3544.98	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	---

78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	631668	3475.02	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	50	635000	3525.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	---
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
78	30	100	633334	3500.01	DFT-s-OFDM QPSK	1@0	see graph	PASS


N78(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

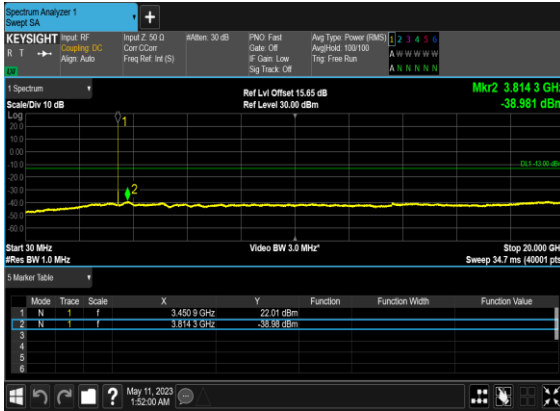

N78(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Low_CH

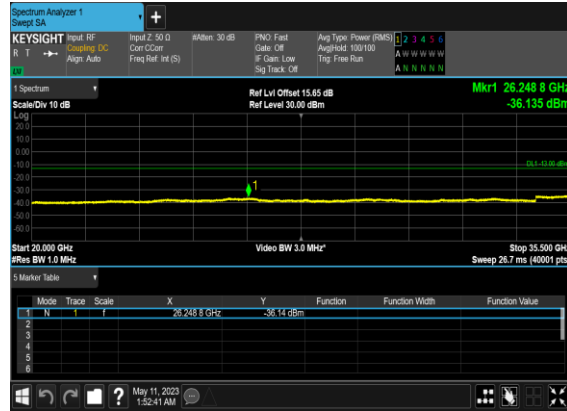


N78(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH

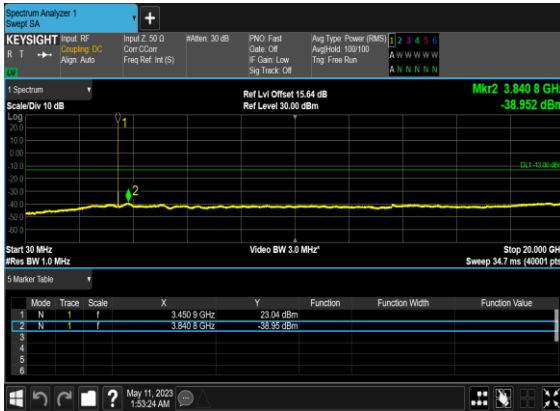

N78(10M)_DFT-s-OFDM_QPSK_Edge_1RB_Left_Low_CH



N78(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

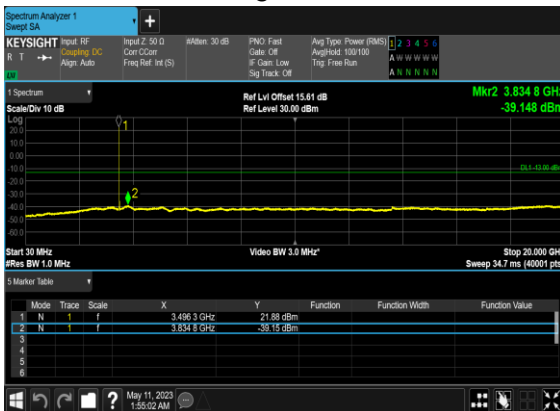

N78(10M)_DFT-s-OFDM_BPSK_Edge_1RB_Left_Mid_CH

