



Test Report No.: W7L-P23080006RF01



FCC TEST REPORT (Part 15, Subpart C)



| | |
|------------|---|
| Applicant: | Xiaomi Communications Co., Ltd. |
| Address: | #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085 |

| | |
|---------------------------|---|
| Manufacturer or Supplier: | Xiaomi Communications Co., Ltd. |
| Address: | #019, 9th Floor, Building 6, 33 Xi'erqi Middle Road, Haidian District, Beijing, China, 100085 |
| Product: | Mobile Phone |
| Brand Name: | Redmi |
| Model Name: | 23100RN82L |
| FCC ID: | 2AFZZN82L |
| Date of tests: | Aug. 07, 2023 ~ Sep. 12, 2023 |

The tests have been carried out according to the requirements of the following standard:

- FCC Part 15, Subpart C, Section 15.247
- ANSI C63.10-2013

CONCLUSION: The submitted sample was found to COMPLY with the test requirement

| | |
|--|--|
| Prepared by Simon Wang Engineer / Mobile Department | Approved by Luke Lu Manager / Mobile Department |
|  Date: Sep. 12, 2023 |  Date: Sep. 12, 2023 |

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.



TABLE OF CONTENTS

RELEASE CONTROL RECORD5

1 SUMMARY OF TEST RESULTS.....6

1.1 MEASUREMENT UNCERTAINTY8

2 GENERAL INFORMATION9

2.1 GENERAL DESCRIPTION OF EUT9

2.2 DESCRIPTION OF TEST MODES10

 2.2.1 CONFIGURATION OF SYSTEM UNDER TEST 11

 2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL..... 11

2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS13

2.4 DESCRIPTION OF SUPPORT UNITS.....13

3 TEST TYPES AND RESULTS.....14

3.1 CONDUCTED EMISSION MEASUREMENT.....14

 3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT 14

 3.1.2 TEST INSTRUMENTS..... 14

 3.1.3 TEST PROCEDURES 14

 3.1.4 DEVIATION FROM TEST STANDARD 15

 3.1.5 TEST SETUP 15

 3.1.6 EUT OPERATING CONDITIONS 15

 3.1.7 TEST RESULTS 16

3.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT18

 3.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT..... 18

 3.2.2 TEST INSTRUMENTS..... 19

 3.2.3 TEST PROCEDURES 20

 3.2.4 DEVIATION FROM TEST STANDARD 20

 3.2.5 TEST SETUP 21

 3.2.6 EUT OPERATING CONDITIONS 22

 3.2.7 TEST RESULTS 23

3.3 NUMBER OF HOPPING FREQUENCY USED30

 3.3.1 LIMIT OF HOPPING FREQUENCY USED 30

 3.3.2 TEST SETUP 30

 3.3.3 TEST INSTRUMENTS..... 30

 3.3.4 TEST PROCEDURES 31

 3.3.5 DEVIATION FROM TEST STANDARD 31

 3.3.6 TEST RESULTS 31

3.4 DWELL TIME ON EACH CHANNEL32



**BUREAU
VERITAS**

Test Report No.: W7L-P23080006RF01

| | | |
|------------|--|-----------|
| 3.4.1 | LIMIT OF DWELL TIME USED | 32 |
| 3.4.2 | TEST SETUP | 32 |
| 3.4.3 | TEST INSTRUMENTS | 32 |
| 3.4.4 | TEST PROCEDURES | 32 |
| 3.4.5 | DEVIATION FROM TEST STANDARD | 33 |
| 3.4.6 | TEST RESULTS | 33 |
| 3.5 | CHANNEL BANDWIDTH | 34 |
| 3.5.1 | LIMITS OF CHANNEL BANDWIDTH | 34 |
| 3.5.2 | TEST SETUP | 34 |
| 3.5.3 | TEST INSTRUMENTS | 34 |
| 3.5.4 | TEST PROCEDURE | 34 |
| 3.5.5 | DEVIATION FROM TEST STANDARD | 34 |
| 3.5.6 | EUT OPERATING CONDITION | 35 |
| 3.5.7 | TEST RESULTS | 35 |
| 3.6 | HOPPING CHANNEL SEPARATION | 36 |
| 3.6.1 | LIMIT OF HOPPING CHANNEL SEPARATION | 36 |
| 3.6.2 | TEST SETUP | 36 |
| 3.6.3 | TEST INSTRUMENTS | 36 |
| 3.6.4 | TEST PROCEDURES | 36 |
| 3.6.5 | DEVIATION FROM TEST STANDARD | 36 |
| 3.6.6 | TEST RESULTS | 37 |
| 3.7 | MAXIMUM OUTPUT POWER | 37 |
| 3.7.1 | LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT | 37 |
| 3.7.2 | TEST SETUP | 37 |
| 3.7.3 | TEST INSTRUMENTS | 37 |
| 3.7.4 | TEST PROCEDURES | 37 |
| 3.7.5 | DEVIATION FROM TEST STANDARD | 38 |
| 3.7.6 | EUT OPERATING CONDITION | 38 |
| 3.7.7 | TEST RESULTS | 39 |
| 3.7.7.1 | MAXIMUM PEAK OUTPUT POWER | 39 |
| 3.7.7.2 | AVERAGE OUTPUT POWER (FOR REFERENCE)..... | 40 |
| 3.8 | OUT OF BAND MEASUREMENT | 41 |
| 3.8.1 | LIMITS OF OUT OF BAND MEASUREMENT | 41 |
| 3.8.2 | TEST INSTRUMENTS | 41 |
| 3.8.3 | TEST PROCEDURE | 41 |
| 3.8.4 | DEVIATION FROM TEST STANDARD | 41 |



**BUREAU
VERITAS**

Test Report No.: W7L-P23080006RF01

| | | |
|----------|--|-----------|
| 3.8.5 | EUT OPERATING CONDITION | 41 |
| 3.8.6 | TEST RESULTS | 41 |
| 4 | PHOTOGRAPHS OF THE TEST CONFIGURATION..... | 42 |
| 5 | MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB | |
| | 43 | |
| 6 | APPENDIX | 44 |



Test Report No.: W7L-P23080006RF01

RELEASE CONTROL RECORD

| ISSUE NO. | REASON FOR CHANGE | DATE ISSUED |
|-------------------|-------------------|---------------|
| W7L-P23080006RF01 | Original release | Sep. 12, 2023 |



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01

1 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

| APPLIED STANDARD: FCC Part 15, Subpart C | | |
|--|--|------------|
| STANDARD | TEST TYPE AND LIMIT | RESULT |
| 15.207 | AC Power Conducted Emission | Compliance |
| 15.247(a)(1) (iii) | Number of Hopping Frequency Used | Compliance |
| 15.247(a)(1) (iii) | Dwell Time on Each Channel | Compliance |
| 15.247(a)(1) | 1. Hopping Channel Separation 2. Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System | Compliance |
| 15.247(b) | Maximum Peak Output Power | Compliance |
| 15.247(d)& 15.209 | Transmitter Radiated Emissions | Compliance |
| 15.247(d) | Out of band Measurement | Compliance |
| 15.203 | Antenna Requirement | Compliance |

NOTE:

1. If the Frequency Hopping System operates in 2400-2483.5MHz band and the output power is less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.
2. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies. Each frequency must be used equally on average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.



Test Report No.: W7L-P23080006RF01

Test Lab Information Reference:

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

Lab Address:

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park,
Nanshan District, Shenzhen, Guangdong, China

Accredited Test Lab Cert 3939.01



1.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

| MEASUREMENT | UNCERTAINTY |
|-----------------------------------|-------------|
| AC Power Conducted emissions | ±2.70dB |
| Radiated emissions (9KHz~30MHz) | ±2.68dB |
| Radiated emissions (30MHz~1GHz) | ±4.98dB |
| Radiated emissions (1GHz ~6GHz) | ±4.70dB |
| Radiated emissions (6GHz ~18GHz) | ±4.60dB |
| Radiated emissions (18GHz ~40GHz) | ±4.12dB |
| Conducted emissions | ±4.01dB |
| Occupied Channel Bandwidth | ±43.58KHz |
| Conducted Output power | ±2.06dB |
| Power Spectral Density | ±0.85 dB |

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2 GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

| | |
|------------------------------|--|
| PRODUCT | Mobile Phone |
| BRAND NAME | Redmi |
| MODEL NAME | 23100RN82L |
| NOMINAL VOLTAGE | 5Vdc(adapter or host equipment) 3.84Vdc (Li-ion, battery) |
| MODULATION TECHNOLOGY | FHSS |
| MODULATION TYPE | GFSK, 8DPSK, $\pi/4$ DQPSK |
| OPERATING FREQUENCY | 2402MHz~2480MHz |
| NUMBER OF CHANNEL | 79 |
| MAX. OUTPUT POWER | 13.52mW (Max. Measured) |
| ANTENNA TYPE | PIFA Antenna with -1dBi gain |
| HW VERSION | LLDM572 |
| SW VERSION | MIUI 14 |
| IMEI | 861440060049166 861440060064348 861440060081649 |
| I/O PORTS | Refer to user's manual |
| CABLE SUPPLIED | USB cable1: non-shielded cable, with w/o ferrite core, 1.0 meter USB cable2: non-shielded cable, with w/o ferrite core, 1.0 meter |

NOTE:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
2. For the test results, the EUT had been tested with all conditions. But only the worst case was shown in the test report.



Test Report No.: W7L-P23080006RF01

2.2 DESCRIPTION OF TEST MODES

79 channels are provided to this EUT:

| CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) | CHANNEL | FREQ. (MHz) |
|---------|-------------|---------|-------------|---------|-------------|---------|-------------|
| 0 | 2402 | 20 | 2422 | 40 | 2442 | 60 | 2462 |
| 1 | 2403 | 21 | 2423 | 41 | 2443 | 61 | 2463 |
| 2 | 2404 | 22 | 2424 | 42 | 2444 | 62 | 2464 |
| 3 | 2405 | 23 | 2425 | 43 | 2445 | 63 | 2465 |
| 4 | 2406 | 24 | 2426 | 44 | 2446 | 64 | 2466 |
| 5 | 2407 | 25 | 2427 | 45 | 2447 | 65 | 2467 |
| 6 | 2408 | 26 | 2428 | 46 | 2448 | 66 | 2468 |
| 7 | 2409 | 27 | 2429 | 47 | 2449 | 67 | 2469 |
| 8 | 2410 | 28 | 2430 | 48 | 2450 | 68 | 2470 |
| 9 | 2411 | 29 | 2431 | 49 | 2451 | 69 | 2471 |
| 10 | 2412 | 30 | 2432 | 50 | 2452 | 70 | 2472 |
| 11 | 2413 | 31 | 2433 | 51 | 2453 | 71 | 2473 |
| 12 | 2414 | 32 | 2434 | 52 | 2454 | 72 | 2474 |
| 13 | 2415 | 33 | 2435 | 53 | 2455 | 73 | 2475 |
| 14 | 2416 | 34 | 2436 | 54 | 2456 | 74 | 2476 |
| 15 | 2417 | 35 | 2437 | 55 | 2457 | 75 | 2477 |
| 16 | 2418 | 36 | 2438 | 56 | 2458 | 76 | 2478 |
| 17 | 2419 | 37 | 2439 | 57 | 2459 | 77 | 2479 |
| 18 | 2420 | 38 | 2440 | 58 | 2460 | 78 | 2480 |
| 19 | 2421 | 39 | 2441 | 59 | 2461 | | |



2.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Please see section 5 photograph of the test configuration for reference.

2.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports.

The worst case was found when positioned on X axis for radiated emission.

Following channel(s) was (were) selected for the final test as listed below:

| EUT CONFIGURE MODE | APPLICABLE TO | | | | DESCRIPTION |
|--------------------|---------------|-------|-----|------|-------------|
| | RE<1G | RE≥1G | PLC | APCM | |
| - | √ | √ | √ | √ | - |

Where **RE<1G**: Radiated Emission below 1GHz
PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz
APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| - | 0 to 78 | 78 | FHSS | $\pi/4$ DQPSK | 2DH5 |

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, XYZ axis, antenna ports (if EUT with antenna diversity architecture) and packet type.
- The following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| - | 0 to 78 | 0, 39, 78 | FHSS | $\pi/4$ DQPSK | 2DH5 |



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

| EUT CONFIGURE MODE | AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|--------------------|-------------------|----------------|-----------------------|-----------------|-------------|
| - | 0 to 78 | 78 | FHSS | $\pi/4$ DQPSK | 2DH5 |

ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

| AVAILABLE CHANNEL | TESTED CHANNEL | MODULATION TECHNOLOGY | MODULATION TYPE | PACKET TYPE |
|-------------------|----------------|-----------------------|-----------------|----------------|
| 0 to 78 | 0, 39, 78 | FHSS | GFSK | DH1/DH3/DH5 |
| 0 to 78 | 0, 39, 78 | FHSS | $\pi/4$ DQPSK | 2DH1/2DH3/2DH5 |
| 0 to 78 | 0, 39, 78 | FHSS | 8DPSK | 3DH1/3DH3/3DH5 |

TEST CONDITION:

| APPLICABLE TO | ENVIRONMENTAL CONDITIONS | TEST VOLTAGE (SYSTEM) | TESTED BY |
|---------------|--------------------------|-----------------------|-----------|
| RE<1G | 23deg. C, 70%RH | DC 5V By Adapter | Jace Hu |
| RE≥1G | 23deg. C, 70%RH | DC 5V By Adapter | Jace Hu |
| PLC | 25deg. C, 52%RH | DC 5V By Adapter | Carl Xie |
| APCM | 25deg. C, 60%RH | DC 3.84V By Battery | James Fu |



2.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. Section 15.247 ANSI C63.10-2013

- NOTE:**
1. All test items have been performed and recorded as per the above standards.
 2. The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (Certification). The test report has been issued separately.

2.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| NO. | PRODUCT | BRAND | MODEL NO. | SERIAL NO. | FCC ID |
|-----|---------|--------|---------------|------------|--------|
| 1 | Desktop | Lenovo | M73 SFF | PC04GRQV | N/A |
| 2 | Desktop | Lenovo | M73 SFF | PC06CS27 | N/A |
| 3 | Laptop | Lenovo | Thinkpad L440 | R90FTFKN | N/A |

| NO. | SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS |
|-----|---|
| 1 | AC Line: Unshielded, Detachable 1.5m |
| 2 | AC Line: Unshielded, Detachable 1.5m |
| 3 | AC Line: Unshielded, Detachable 1.5m |



3 TEST TYPES AND RESULTS

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

| FREQUENCY OF EMISSION (MHz) | CONDUCTED LIMIT (dBµV) | |
|-----------------------------|------------------------|----------|
| | Quasi-peak | Average |
| 0.15 ~ 0.5 | 66 to 56 | 56 to 46 |
| 0.5 ~ 5 | 56 | 46 |
| 5 ~ 30 | 60 | 50 |

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

3.1.2 TEST INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|---------------------|---------------|-----------|------------|------------|------------|
| EMI Test Receiver | Rohde&Schwarz | ESR3 | 101900 | Feb. 14,23 | Feb. 13,24 |
| EMC32 test software | Rohde&Schwarz | EMC32 | NA | NA | NA |
| LISN network | Rohde&Schwarz | ENV216 | 101922 | Mar. 03,23 | Mar. 02,24 |

- NOTE:**
1. The test was performed in CE shielded room.
 2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.

3.1.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

NOTE: All modes of operation were investigated, and the worst-case emissions are reported.

3.1.4 DEVIATION FROM TEST STANDARD

No deviation.

3.1.5 TEST SETUP

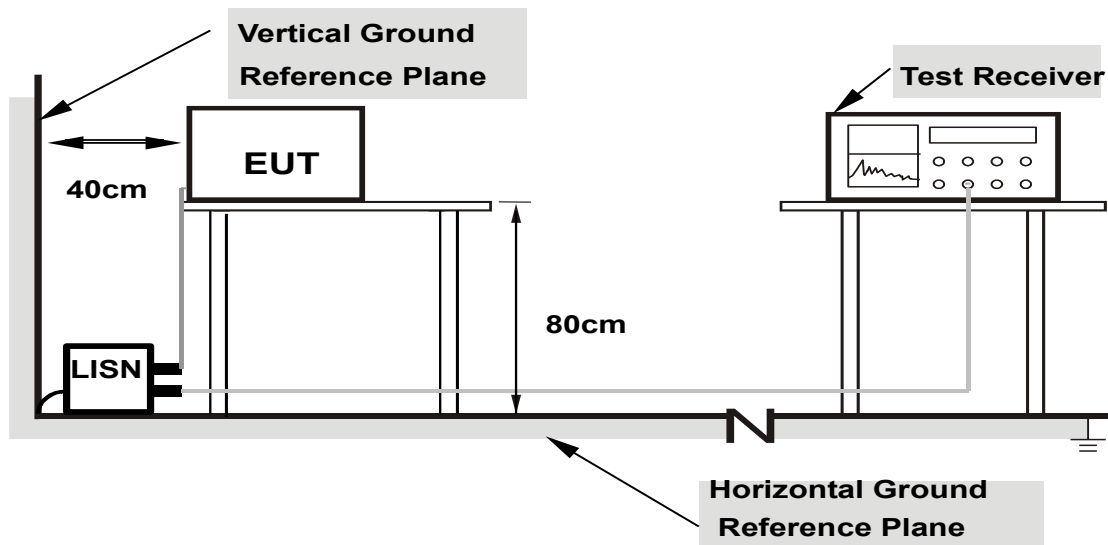

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.1.6 EUT OPERATING CONDITIONS

- a. Turned on the power and connected of all equipment.
- b. EUT was operated according to the type used was description in manufacturer's specifications or the User's Manual.



Test Report No.: W7L-P23080006RF01

3.1.7 TEST RESULTS


CONDUCTED WORST-CASE DATA:

| | | | |
|-----------------|----------------|--|---------------------------------------|
| Frequency Range | 150KHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power | 120Vac, 60Hz | Environmental Conditions | 26deg. C, 51%RH |
| Tested By | Carl xie | | |

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.150000 | --- | 17.52 | 56.00 | 38.48 | L1 | ON | 9.7 |
| 0.150000 | 32.18 | --- | 66.00 | 33.82 | L1 | ON | 9.7 |
| 0.452000 | --- | 17.32 | 46.84 | 29.52 | L1 | ON | 9.7 |
| 0.452000 | 26.54 | --- | 56.84 | 30.30 | L1 | ON | 9.7 |
| 0.536000 | --- | 19.12 | 46.00 | 26.88 | L1 | ON | 9.7 |
| 0.536000 | 28.17 | --- | 56.00 | 27.83 | L1 | ON | 9.7 |
| 0.900000 | --- | 13.25 | 46.00 | 32.75 | L1 | ON | 9.7 |
| 0.900000 | 22.80 | --- | 56.00 | 33.20 | L1 | ON | 9.7 |
| 1.316000 | --- | 13.49 | 46.00 | 32.51 | L1 | ON | 9.7 |
| 1.316000 | 24.04 | --- | 56.00 | 31.96 | L1 | ON | 9.7 |
| 2.112000 | --- | 11.25 | 46.00 | 34.75 | L1 | ON | 9.7 |
| 2.112000 | 20.73 | --- | 56.00 | 35.27 | L1 | ON | 9.7 |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

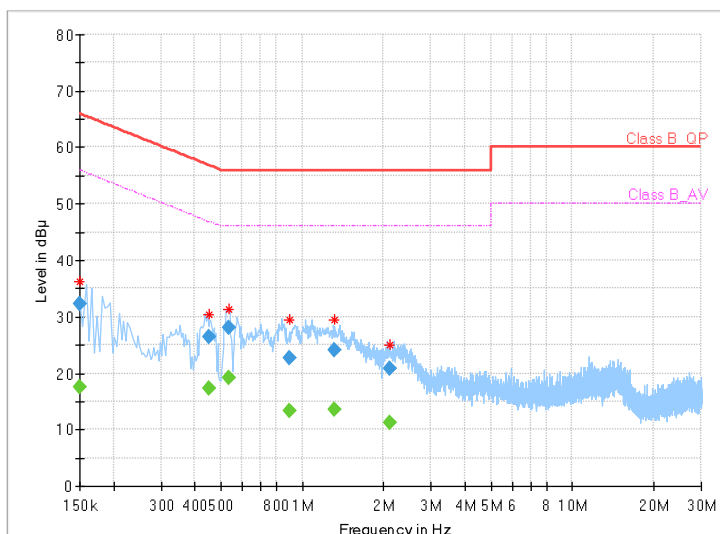




Test Report No.: W7L-P23080006RF01

| | | | |
|-----------------|----------------|--|---------------------------------------|
| Frequency Range | 150KHz ~ 30MHz | Detector Function & Resolution Bandwidth | Quasi-Peak (QP) / Average (AV), 9 kHz |
| Input Power | 120Vac, 60Hz | Environmental Conditions | 26deg. C, 51%RH |
| Tested By | Carl xie | | |

| Frequency (MHz) | QuasiPeak (dBuV) | CAverage (dBuV) | Limit (dBuV) | Margin (dB) | Line | Filter | Corr. (dB) |
|-----------------|------------------|-----------------|--------------|-------------|------|--------|------------|
| 0.428000 | --- | 19.79 | 47.29 | 27.50 | N | ON | 9.7 |
| 0.428000 | 25.51 | --- | 57.29 | 31.78 | N | ON | 9.7 |
| 0.516000 | --- | 23.08 | 46.00 | 22.92 | N | ON | 9.7 |
| 0.516000 | 28.16 | --- | 56.00 | 27.84 | N | ON | 9.7 |
| 1.276000 | --- | 18.28 | 46.00 | 27.72 | N | ON | 9.8 |
| 1.276000 | 26.68 | --- | 56.00 | 29.32 | N | ON | 9.8 |
| 1.524000 | --- | 18.28 | 46.00 | 27.72 | N | ON | 9.8 |
| 1.524000 | 26.82 | --- | 56.00 | 29.18 | N | ON | 9.8 |
| 2.496000 | --- | 15.33 | 46.00 | 30.67 | N | ON | 9.8 |
| 2.496000 | 24.96 | --- | 56.00 | 31.04 | N | ON | 9.8 |
| 3.836000 | --- | 13.34 | 46.00 | 32.66 | N | ON | 9.8 |
| 3.836000 | 22.37 | --- | 56.00 | 33.63 | N | ON | 9.8 |

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Limit value - Emission level
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

Full Spectrum

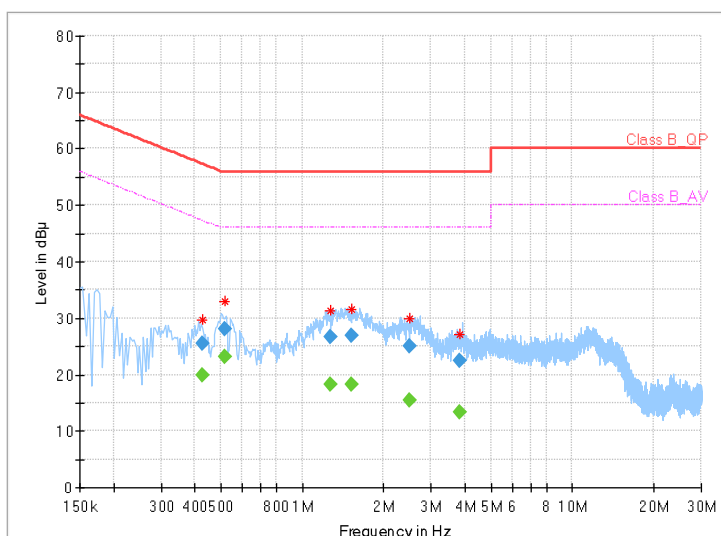



**BUREAU
VERITAS**

Test Report No.: W7L-P23080006RF01

3.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

3.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a). Other emissions shall be at least 20dB below the highest level of the desired power.

| FREQUENCIES (MHz) | FIELD STRENGTH (microvolts/meter) | MEASUREMENT DISTANCE (meters) |
|-------------------|-----------------------------------|-------------------------------|
| 0.009 ~ 0.490 | 2400/F(kHz) | 300 |
| 0.490 ~ 1.705 | 24000/F(kHz) | 30 |
| 1.705 ~ 30.0 | 30 | 30 |
| 30 ~ 88 | 100 | 3 |
| 88 ~ 216 | 150 | 3 |
| 216 ~ 960 | 200 | 3 |
| Above 960 | 500 | 3 |

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



Test Report No.: W7L-P23080006RF01

3.2.2 TEST INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|----------------------------|--------------|-----------------------------|-----------------------------|-------------|------------|
| 3m Semi-anechoic Chamber | ETS-LINDGREN | 9m*6m*6m | Euroshieldpn-CT0001143-1216 | May. 22, 23 | May. 21,26 |
| Bilog Antenna | ETS-LINDGREN | 3143B | 00161965 | Feb. 18,23 | Feb. 17,24 |
| Horn Antenna | ETS-LINDGREN | 3117 | 00168692 | Feb. 18,23 | Feb. 17,24 |
| Horn Antenna (18GHz-40GHz) | N/A | QWH-SL-18-40-K-SG/QMS-00361 | 15433 | Sep.04, 22 | Sep.03, 23 |
| Horn Antenna (18GHz-40GHz) | N/A | QWH-SL-18-40-K-SG/QMS-00361 | 15433 | Sep.03, 23 | Sep.02, 24 |
| Test Software | E3 | V 9.160323 | N/A | N/A | N/A |
| Test Software | JS1120-3 | 3.2.06 | N/A | N/A | N/A |
| 10dB Attenuator | JFW/USA | 50HF-010-SMA | N/A | May. 06,23 | May. 05,24 |
| MXE EMI Receiver | KEYSIGHT | N9038A-544 | MY54450026 | Mar. 28,23 | Mar. 27,24 |
| Signal Pre-Amplifier | EMSI | EMC 9135 | 980249 | May. 06,23 | May. 05,24 |
| Signal Pre-Amplifier | EMSI | EMC 012645B | 980257 | May.10,23 | May.09,24 |
| Signal Pre-Amplifier | EMSI | EMC 184045B | 980259 | Feb. 17,23 | Feb. 16,24 |
| DC Source | Kikusui/JP | PMX18-5A | 0000001 | Aug. 12,22 | Aug. 11,23 |
| DC Source | Kikusui/JP | PMX18-5A | 0000001 | Aug. 11,23 | Aug. 10,24 |
| Power Meter | Anritsu | ML2495A | 1506002 | Feb. 14,23 | Feb. 13,24 |
| Power Sensor | Anritsu | MA2411B | 1339352 | Feb. 14,23 | Feb. 13,24 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 00173 | Sep.03,22 | Sep.02,23 |
| Loop Antenna | Schwarzbeck | FMZB 1519B | 00173 | Sep.02,23 | Sep.01,24 |

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 36 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in the 3m Chamber.
 3. The FCC Site Registration No. is 525120; The Designation No. is CN1171.



Test Report No.: W7L-P23080006RF01

3.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters (for below 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3-meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height varies from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. During the test, each emission was maximized by having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, For battery operated equipment, the equipment tests shall be perform using fresh batteries. The turntable was rotated to maximize the emission level.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. If the dwell time per channel of the hopping signal is less than 100 ms, then the reading obtained with the 10 Hz VBW may be further adjusted by a “duty cycle correction factor”, derived from $20\log(\text{dwell time}/100 \text{ ms})$, in an effort to demonstrate compliance with the 15.209 limit.
5. All modes of operation were investigated, and the worst-case emissions are reported.

3.2.4 DEVIATION FROM TEST STANDARD


No deviation.

3.2.5 TEST SETUP


<Frequency Range 9KHz~30MHz >

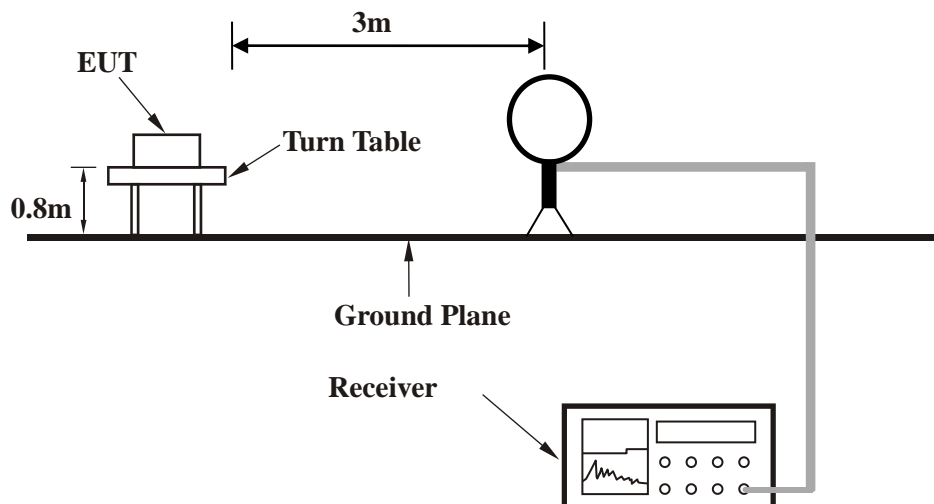

< Frequency Range 30MHz~1GHz >

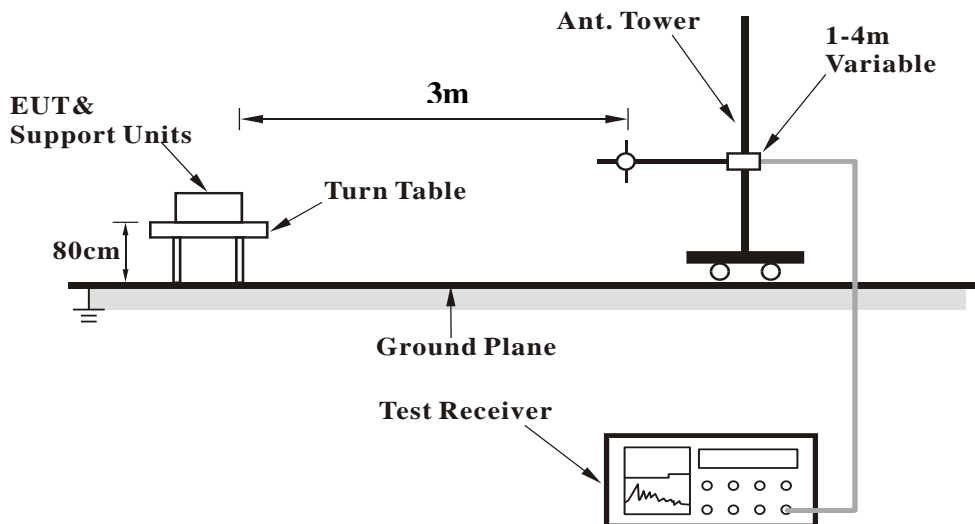

<Frequency Range above 1GHz>

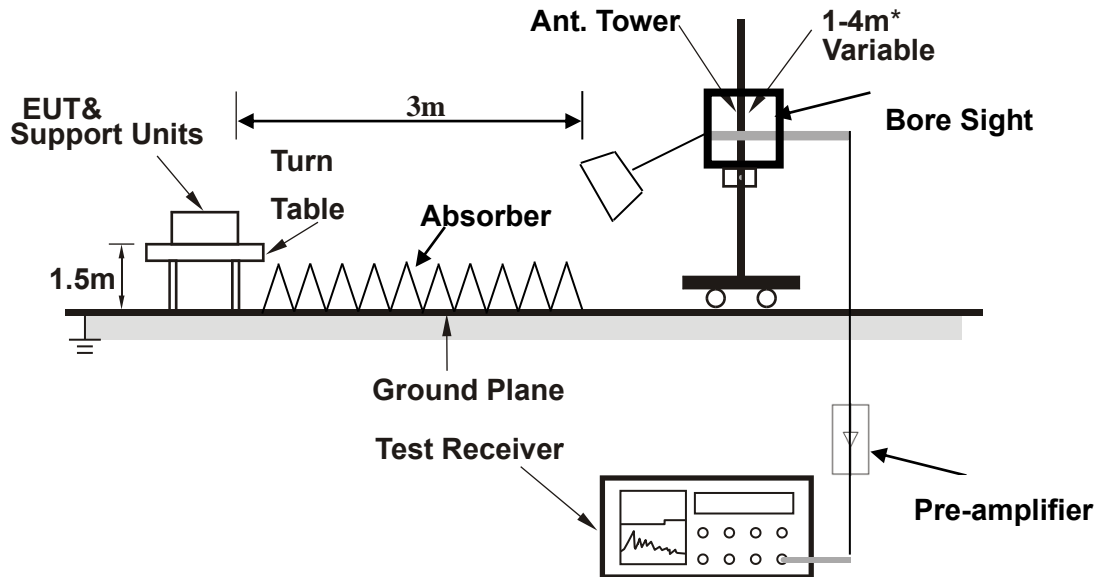

Note: Above 1G is a directional antenna

Depending on the EUT height and the antenna 3dB beamwidth both, refer to section 7.3 of CISPR 16-2-3.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

3.2.6 EUT OPERATING CONDITIONS

- a. Set the EUT under full load condition and placed it on a testing table.
- b. Set the transmitter part of EUT under transmission condition continuously at specific channel frequency.
- c. The necessary accessories enable the EUT in full functions.



**BUREAU
VERITAS**

Test Report No.: W7L-P23080006RF01

3.2.7 TEST RESULTS

NOTE : The 9K~30MHz amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required in the report.

BELOW 1GHz WORST-CASE DATA:

30 MHz – 1GHz data:


BT_ π/4 DQPSK

| | | | |
|------------------------|--------------|--------------------------|-----------------|
| CHANNEL | Channel 78 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | |
|---|-------------------------------|-------------------------|-------------------|----------------|------------------------------|-----------------------|--------------------------|---------------------------|----------------------------|--------|
| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 52.31 | 23.67 | 50.28 | 40 | -16.33 | 9.97 | 0.41 | 36.99 | 116 | 60 | QP |
| 88.2 | 15.5 | 43.24 | 43.5 | -28 | 8.68 | 0.51 | 36.93 | 123 | 344 | QP |
| 193.93 | 23.45 | 47.71 | 43.5 | -20.05 | 11.33 | 0.73 | 36.32 | 120 | 352 | QP |
| 271.53 | 30.65 | 52.33 | 46 | -15.35 | 13.72 | 0.87 | 36.27 | 154 | 86 | QP |
| 343.31 | 22.54 | 42.94 | 46 | -23.46 | 14.95 | 0.98 | 36.33 | 154 | 70 | QP |
| 422.85 | 25.64 | 44.37 | 46 | -20.36 | 16.63 | 1.11 | 36.47 | 100 | 171 | QP |

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

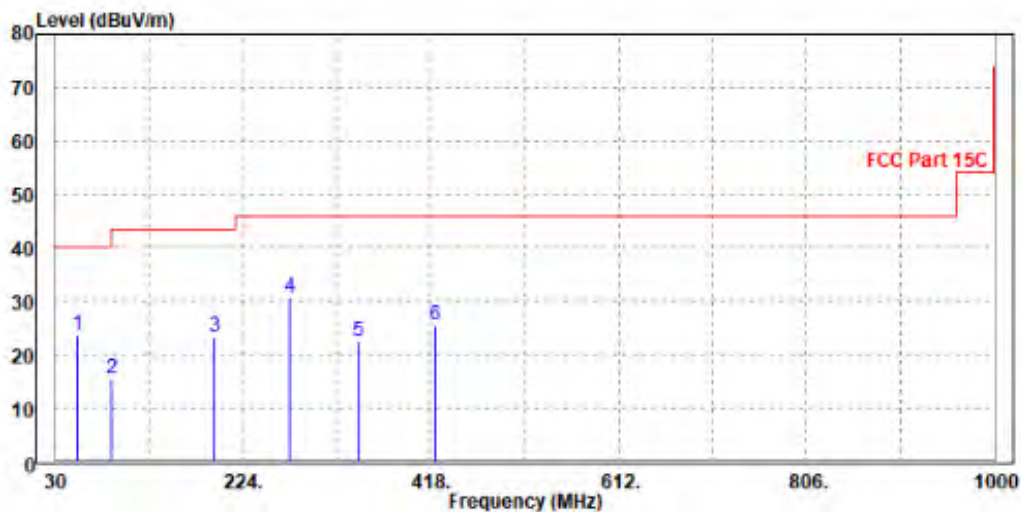




Test Report No.: W7L-P23080006RF01

| | | | |
|------------------------|--------------|--------------------------|-----------------|
| CHANNEL | Channel 78 | DETECTOR FUNCTION | Quasi-Peak (QP) |
| FREQUENCY RANGE | 30MHz ~ 1GHz | | |

| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|--------|
| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 34.85 | 27.73 | 46.87 | 40 | -12.27 | 17.88 | 0.33 | 37.35 | 162 | 236 | QP |
| 88.2 | 19.85 | 47.85 | 43.5 | -23.65 | 8.42 | 0.51 | 36.93 | 170 | 236 | QP |
| 192.96 | 18.71 | 42.93 | 43.5 | -24.79 | 11.39 | 0.72 | 36.33 | 197 | 122 | QP |
| 256.98 | 21.95 | 44.58 | 46 | -24.05 | 12.8 | 0.84 | 36.27 | 167 | 177 | QP |
| 390.84 | 19.63 | 38.89 | 46 | -26.37 | 16.09 | 1.06 | 36.41 | 182 | 94 | QP |
| 486.87 | 20 | 37.96 | 46 | -26 | 17.43 | 1.2 | 36.59 | 183 | 311 | QP |

REMARKS:

1. Emission Level(dBuV/m) = Read Level(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value

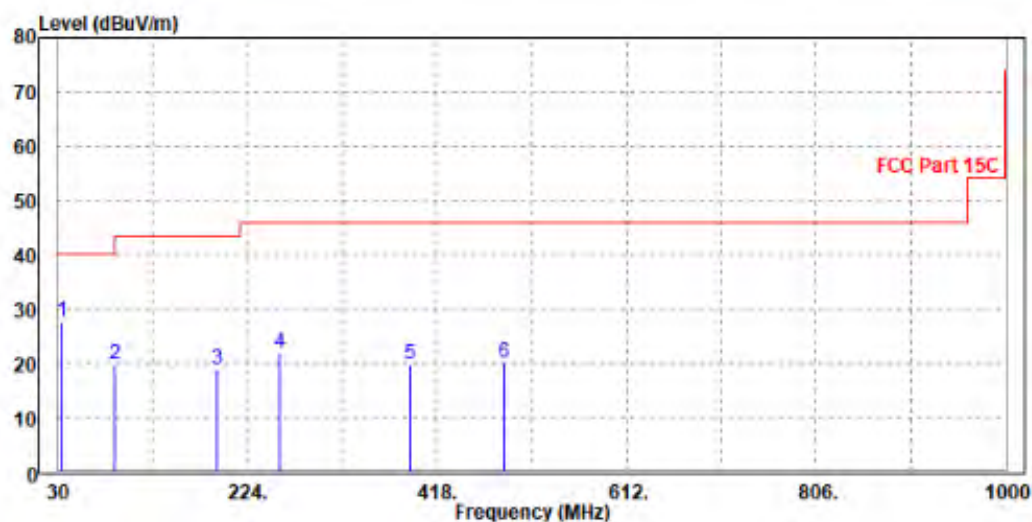



Test Report No.: W7L-P23080006RF01

ABOVE 1GHz WORST-CASE DATA:

Note: 1. For radiated emissions testing the full testing range of different modes have been scanned , only the worst-case harmonic data is reported in the sheet.

2. All other emissions were greater than 20dB below the limit is not recorded

1GHz – 25GHz: (Scan with GFSK, $\pi/4$ -DQPSK, 8DPSK mode, the worst case is $\pi/4$ -DQPSK Mode)

BT_ $\pi/4$ DQPSK

| | | | |
|------------------------|--------------|--------------------------|--------------|
| CHANNEL | TX Channel 0 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 2390 | 49.69 | 57.73 | 74 | -24.31 | 31.75 | 6.18 | 45.97 | 163 | 188 | Peak |
| 2390 | 42.03 | 50.07 | 54 | -11.97 | 31.75 | 6.18 | 45.97 | 163 | 188 | Average |
| 2402 | 101.69 | 109.68 | / | / | 31.79 | 6.19 | 45.97 | 163 | 188 | Peak |
| 2402 | 101.3 | 109.29 | / | / | 31.79 | 6.19 | 45.97 | 163 | 188 | Average |
| 2483.5 | 50.56 | 58.13 | 74 | -23.44 | 32.05 | 6.31 | 45.93 | 163 | 188 | Peak |
| 2483.5 | 43.23 | 50.8 | 54 | -10.77 | 32.05 | 6.31 | 45.93 | 163 | 188 | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | |
| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 2390 | 49.28 | 56.93 | 74 | -24.72 | 32.14 | 6.18 | 45.97 | 143 | 102 | Peak |
| 2390 | 42.28 | 49.93 | 54 | -11.72 | 32.14 | 6.18 | 45.97 | 143 | 102 | Average |
| 2402 | 97.83 | 105.45 | / | / | 32.16 | 6.19 | 45.97 | 143 | 102 | Peak |
| 2402 | 97.47 | 105.09 | / | / | 32.16 | 6.19 | 45.97 | 143 | 102 | Average |
| 2483.5 | 50.59 | 57.85 | 74 | -23.41 | 32.36 | 6.31 | 45.93 | 143 | 102 | Peak |
| 2483.5 | 42.81 | 50.07 | 54 | -11.19 | 32.36 | 6.31 | 45.93 | 143 | 102 | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2402MHz: Fundamental frequency.



Test Report No.: W7L-P23080006RF01

| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 39 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 2390 | 50.22 | 58.26 | 74 | -23.78 | 31.75 | 6.18 | 45.97 | 128 | 188 | Peak |
| 2390 | 41.95 | 49.99 | 54 | -12.05 | 31.75 | 6.18 | 45.97 | 128 | 188 | Average |
| 2441 | 104.22 | 112.01 | / | / | 31.91 | 6.25 | 45.95 | 128 | 188 | Peak |
| 2441 | 103.94 | 111.73 | / | / | 31.91 | 6.25 | 45.95 | 128 | 188 | Average |
| 2483.5 | 50.76 | 58.33 | 74 | -23.24 | 32.05 | 6.31 | 45.93 | 128 | 188 | Peak |
| 2483.5 | 42.65 | 50.22 | 54 | -11.35 | 32.05 | 6.31 | 45.93 | 128 | 188 | Average |

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
|-------------|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| 2390 | 49.45 | 57.1 | 74 | -24.55 | 32.14 | 6.18 | 45.97 | 100 | 115 | Peak |
| 2390 | 42.38 | 50.03 | 54 | -11.62 | 32.14 | 6.18 | 45.97 | 100 | 115 | Average |
| 2441 | 97.91 | 105.35 | / | / | 32.26 | 6.25 | 45.95 | 100 | 115 | Peak |
| 2441 | 97.68 | 105.12 | / | / | 32.26 | 6.25 | 45.95 | 100 | 115 | Average |
| 2483.5 | 50.83 | 58.09 | 74 | -23.17 | 32.36 | 6.31 | 45.93 | 100 | 115 | Peak |
| 2483.5 | 42.95 | 50.21 | 54 | -11.05 | 32.36 | 6.31 | 45.93 | 100 | 115 | Average |

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2441MHz: Fundamental frequency.



Test Report No.: W7L-P23080006RF01

| | | | |
|------------------------|---------------|--------------------------|--------------|
| CHANNEL | TX Channel 78 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

| ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M | | | | | | | | | | |
|---|-------------------------|-------------------|----------------|-------------|------------------------|-----------------|--------------------|---------------------|----------------------|---------|
| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 2390 | 50.78 | 58.82 | 74 | -23.22 | 31.75 | 6.18 | 45.97 | 133 | 193 | Peak |
| 2390 | 41.84 | 49.88 | 54 | -12.16 | 31.75 | 6.18 | 45.97 | 133 | 193 | Average |
| 2480 | 103.69 | 111.28 | / | / | 32.04 | 6.3 | 45.93 | 133 | 193 | Peak |
| 2480 | 103.28 | 110.87 | / | / | 32.04 | 6.3 | 45.93 | 133 | 193 | Average |
| 2483.5 | 50.31 | 57.88 | 74 | -23.69 | 32.05 | 6.31 | 45.93 | 133 | 193 | Peak |
| 2483.5 | 43.56 | 51.13 | 54 | -10.44 | 32.05 | 6.31 | 45.93 | 133 | 193 | Average |
| ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M | | | | | | | | | | |
| FREQ. (MHz) | EMISSION LEVEL (dBuV/m) | READ LEVEL (dBuV) | LIMIT (dBuV/m) | MARGIN (dB) | ANTENNA FACTOR (dB /m) | CABLE LOSS (dB) | PREAMP FACTOR (dB) | ANTENNA HEIGHT (cm) | TABLE ANGLE (Degree) | REMARK |
| 2390 | 50.22 | 57.87 | 74 | -23.78 | 32.14 | 6.18 | 45.97 | 108 | 135 | Peak |
| 2390 | 42.39 | 50.04 | 54 | -11.61 | 32.14 | 6.18 | 45.97 | 108 | 135 | Average |
| 2480 | 98.39 | 105.67 | / | / | 32.35 | 6.3 | 45.93 | 108 | 135 | Peak |
| 2480 | 97.93 | 105.21 | / | / | 32.35 | 6.3 | 45.93 | 108 | 135 | Average |
| 2483.5 | 51.42 | 58.68 | 74 | -22.58 | 32.36 | 6.31 | 45.93 | 108 | 135 | Peak |
| 2483.5 | 43.3 | 50.56 | 54 | -10.7 | 32.36 | 6.31 | 45.93 | 108 | 135 | Average |

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01


Worst case harmonic:

BT_ $\pi/4$ DQPSK

| | | | |
|-----------------|---------------|----------------------|--------------|
| CHANNEL | TX Channel 78 | DETECTOR FUNCTION | Peak (PK) |
| FREQUENCY RANGE | 1GHz ~ 25GHz | | Average (AV) |

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|------|----------|--------|------------|------------|------------|--------|--------|------------|
| | MHz | dBuV/m | dBuV | dBuV/m | dB | dB/m | | |
| 1 | 4960.000 | 46.47 | 47.66 | 74.00 | -27.53 | -1.19 | Peak | Horizontal |
| 2 PP | 7440.000 | 47.08 | 45.10 | 74.00 | -26.92 | 1.98 | Peak | Horizontal |

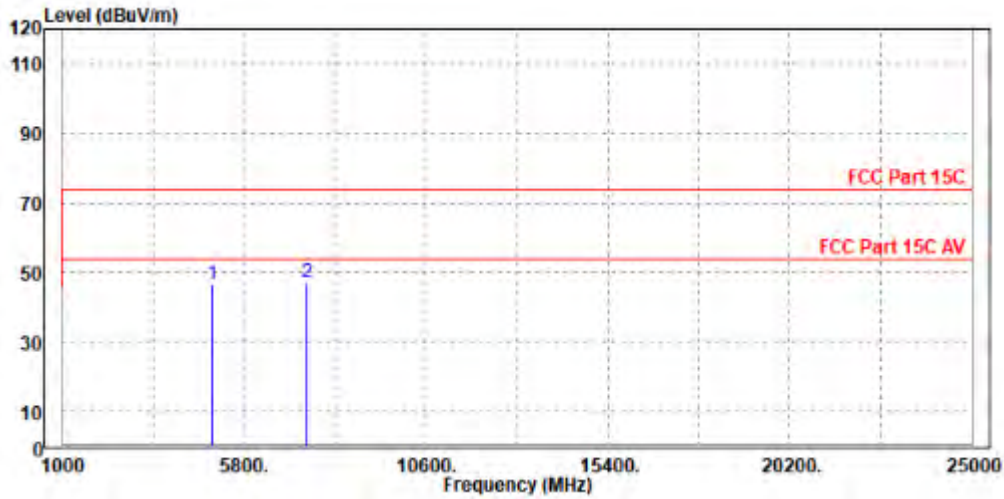




Test Report No.: W7L-P23080006RF01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

| | Freq | Level | Read Level | Limit Line | Over Limit | Factor | Remark | Pol/Phase |
|---|-------------|--------|------------|------------|------------|--------|--------|-----------|
| | MHz | dBuV/m | dBuV | dBuV/m | dB | dB/m | | |
| 1 | PP 4960.000 | 46.53 | 47.52 | 74.00 | -27.47 | -0.99 | Peak | Vertical |
| 2 | 7432.000 | 46.33 | 44.33 | 74.00 | -27.67 | 2.00 | Peak | Vertical |

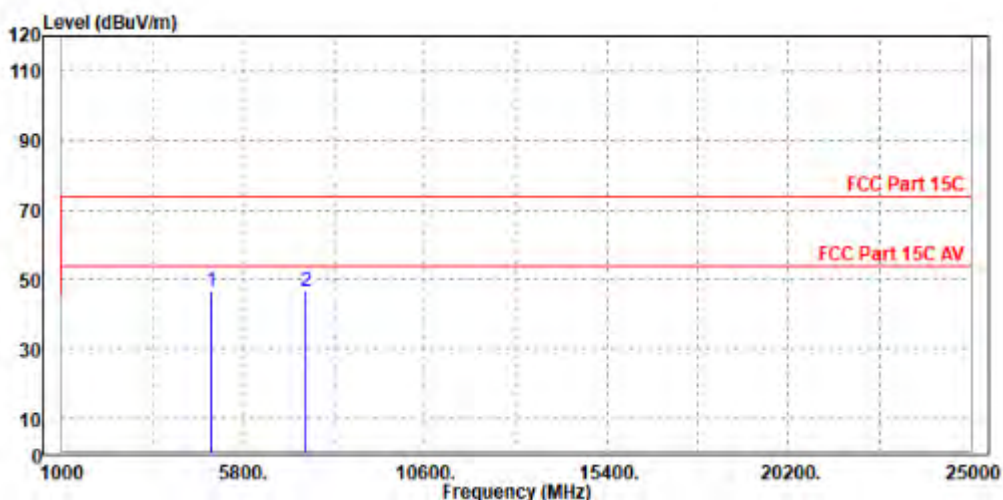

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet.




3.3 NUMBER OF HOPPING FREQUENCY USED

3.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies and should be equally spaced.

3.3.2 TEST SETUP

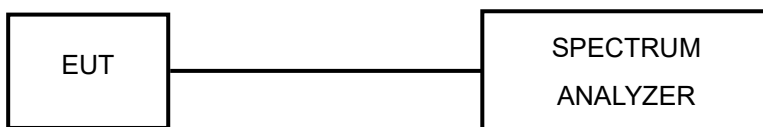

3.3.3 TEST INSTRUMENTS

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Next Cal. |
|---------------------|--------------|------------|------------|------------|------------|
| Power Meter | ANRITSU | ML2495A | 1506002 | Feb. 14,23 | Feb. 13,24 |
| EXA Signal Analyzer | KEYSIGHT | N9010A-526 | MY54510523 | Feb. 14,23 | Feb. 13,24 |
| EXA Signal Analyzer | KEYSIGHT | N9010A-544 | MY54510355 | May.10,23 | May.09,24 |
| Power Sensor | ANRITSU | MA2411B | 1339352 | Feb. 14,23 | Feb. 13,24 |

NOTE:

1. The calibration interval of the above test instruments is 12 months, and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA, and NIM/CHINA.
2. The test was performed in the RF Oven room.



Test Report No.: W7L-P23080006RF01

3.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat the above procedures until all frequencies measured are completed.

3.3.5 DEVIATION FROM TEST STANDARD

No deviation.

3.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to the Appendix for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

Please Refer to Appendix Of this test report.




3.4 DWELL TIME ON EACH CHANNEL

3.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.4.2 TEST SETUP

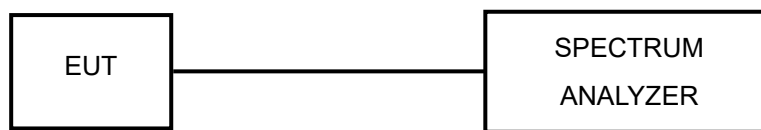

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.

3.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat the above procedures until all different time-slot modes have been completed.



Test Report No.: W7L-P23080006RF01

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 TEST RESULTS


Please Refer to Appendix Of this test report

3.5 CHANNEL BANDWIDTH

3.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dB bandwidth of hopping channel shall be a minimum limit for the hopping channel separation.

3.5.2 TEST SETUP

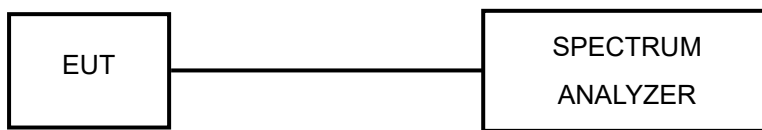

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.

3.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat the above procedures until all frequencies measured were complete.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.



Test Report No.: W7L-P23080006RF01

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle, and highest channel frequencies individually.

3.5.7 TEST RESULTS


Please Refer to Appendix Of this test report.

3.6 HOPPING CHANNEL SEPARATION

3.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-thirds of 20dB hopping channel bandwidth (whichever is greater).

3.6.2 TEST SETUP

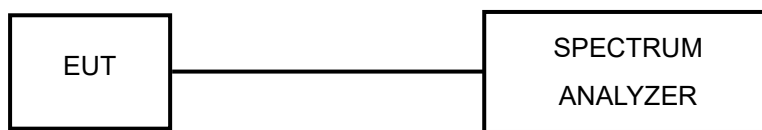

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.

3.6.4 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to the measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function, record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 TEST RESULTS


Please Refer to Appendix Of this test report.

3.7 MAXIMUM OUTPUT POWER

3.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

3.7.2 TEST SETUP

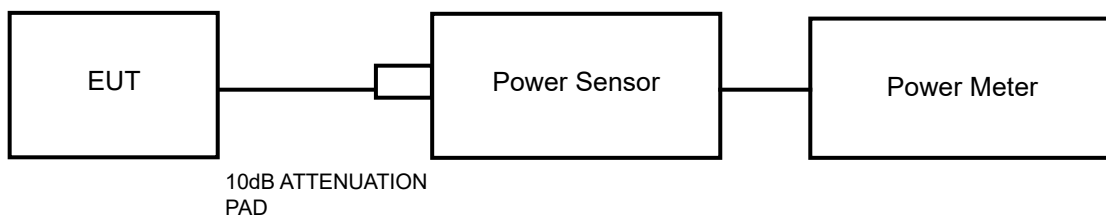

3.7.3 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.

3.7.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.



Test Report No.: W7L-P23080006RF01

3.7.5 DEVIATION FROM TEST STANDARD

No deviation.

3.7.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle, and highest channel frequencies individually.



Test Report No.: W7L-P23080006RF01

3.7.7 TEST RESULTS

3.7.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix Of this test report.



Test Report No.: W7L-P23080006RF01

3.7.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix Of this test report.



3.8 OUT OF BAND MEASUREMENT

3.8.1 LIMITS OF OUT OF BAND MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RBW).

3.8.2 TEST INSTRUMENTS

Refer to section 3.3.3 to get information about the above instrument.

3.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Spectrum Analyzer was set RBW to 100 kHz and VBW to 300 kHz with suitable frequency span including 100 MHz bandwidth from band edge. Detector = PEAK and Trace mode = Max Hold. The band edges were measured and recorded.

3.8.4 DEVIATION FROM TEST STANDARD

No deviation.

3.8.5 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle, and highest channel frequencies individually.

3.8.6 TEST RESULTS

For Band Edge :The spectrum plots are attached in the Appendix. Mark1 value indicates the reference Level. DL line indicates the 20dB offset below reference Level. It shows compliance with the requirement.

For CSE :The spectrum plots are attached in the Appendix. 100KHZ PSD value indicates the reference Level. DL line indicates the 20dB offset below Mark1 value. It shows compliance with the requirement.



Test Report No.: W7L-P23080006RF01

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



Test Report No.: W7L-P23080006RF01

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01

6 APPENDIX

20DB EMISSION BANDWIDTH

TEST RESULT

| Test Mode | Antenna | Frequency[MHz] | 20db EBW[MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|------------------|----------|----------|------------|---------|
| DH5 | Ant1 | 2402 | 0.861 | 2401.559 | 2402.420 | --- | --- |
| | | 2441 | 0.858 | 2440.559 | 2441.417 | --- | --- |
| | | 2480 | 0.846 | 2479.568 | 2480.414 | --- | --- |
| 2DH5 | Ant1 | 2402 | 1.320 | 2401.346 | 2402.666 | --- | --- |
| | | 2441 | 1.323 | 2440.343 | 2441.666 | --- | --- |
| | | 2480 | 1.281 | 2479.370 | 2480.651 | --- | --- |
| 3DH5 | Ant1 | 2402 | 1.281 | 2401.367 | 2402.648 | --- | --- |
| | | 2441 | 1.299 | 2440.364 | 2441.663 | --- | --- |
| | | 2480 | 1.299 | 2479.346 | 2480.645 | --- | --- |

TEST GRAPHS

DH5_Ant1_2402



DH5_Ant1_2441



DH5_Ant1_2480



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



2DH5_Ant1_2402



2DH5_Ant1_2441



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



2DH5_Ant1_2480



3DH5_Ant1_2402



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



3DH5_Ant1_2441



3DH5_Ant1_2480



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




Test Report No.: W7L-P23080006RF01

OCCUPIED CHANNEL BANDWIDTH TEST RESULT


| Test Mode | Antenna | Frequency[MHz] | OCB [MHz] | FL[MHz] | FH[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|-----------|-----------|-----------|------------|---------|
| DH5 | Ant1 | 2402 | 0.7733 | 2401.6232 | 2402.3965 | --- | --- |
| | | 2441 | 0.7690 | 2440.6233 | 2441.3923 | --- | --- |
| | | 2480 | 0.7804 | 2479.6161 | 2480.3965 | --- | --- |
| 2DH5 | Ant1 | 2402 | 1.1794 | 2401.4179 | 2402.5973 | --- | --- |
| | | 2441 | 1.1753 | 2440.4162 | 2441.5915 | --- | --- |
| | | 2480 | 1.1958 | 2479.4060 | 2480.6018 | --- | --- |
| 3DH5 | Ant1 | 2402 | 1.1760 | 2401.4192 | 2402.5952 | --- | --- |
| | | 2441 | 1.1869 | 2440.4124 | 2441.5993 | --- | --- |
| | | 2480 | 1.2150 | 2479.3944 | 2480.6094 | --- | --- |

TEST GRAPHS

DH5_Ant1_2402

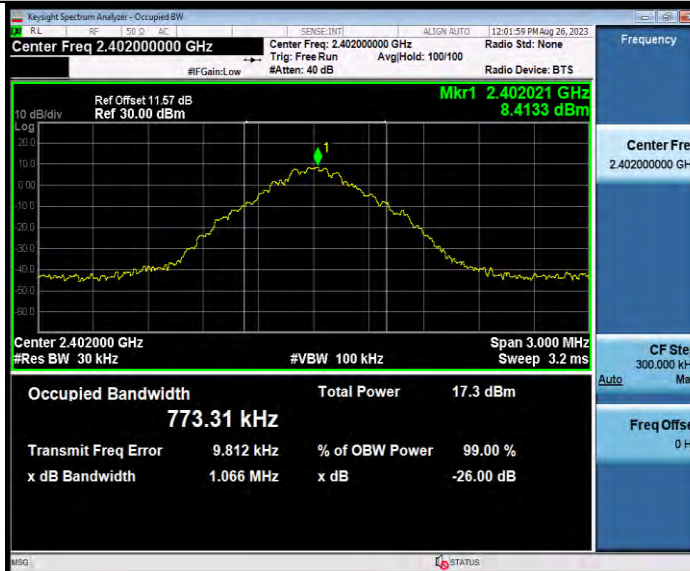

DH5_Ant1_2441

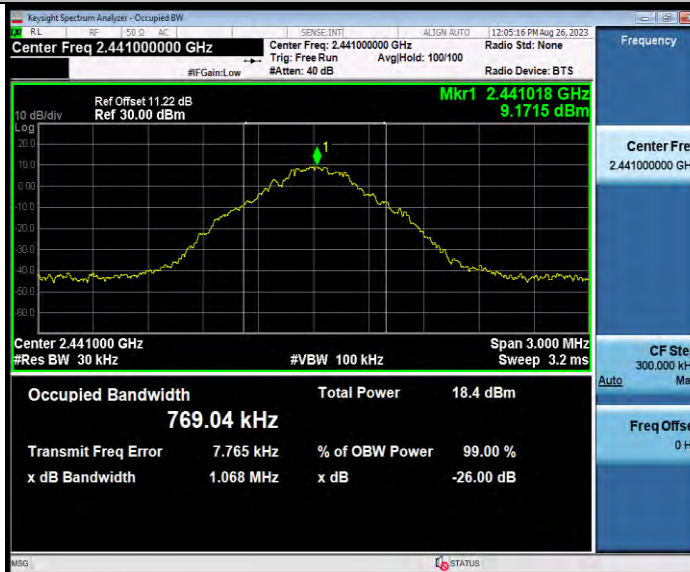


DH5_Ant1_2480




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

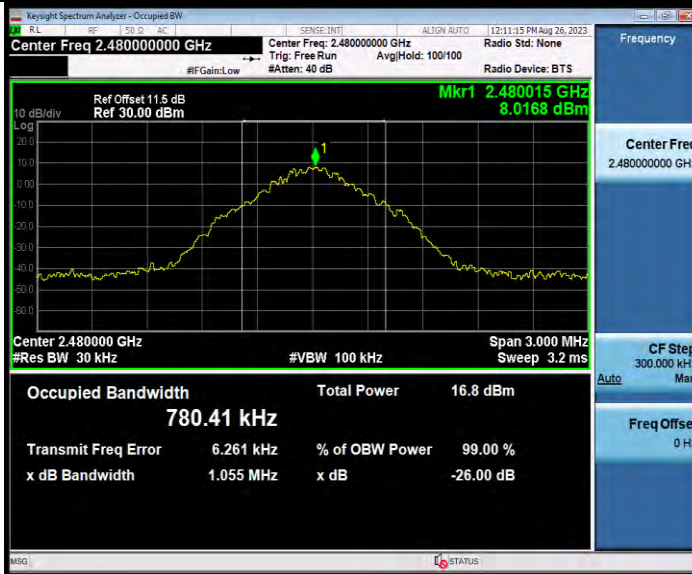

2DH5_Ant1_2402

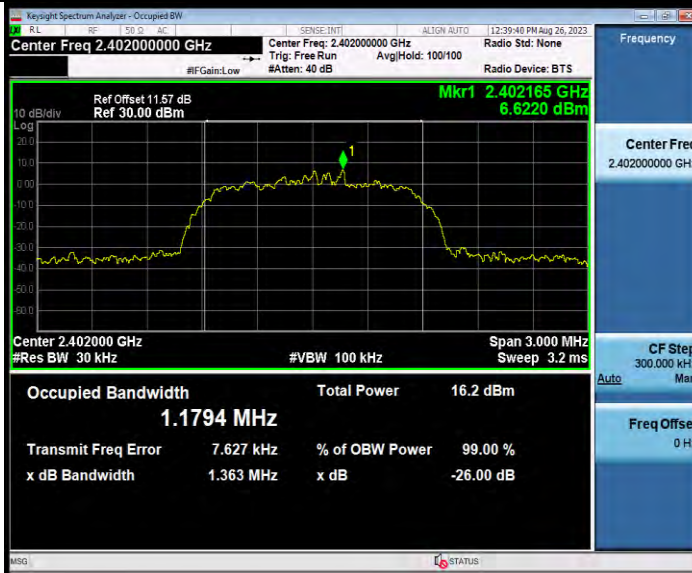


2DH5_Ant1_2441




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

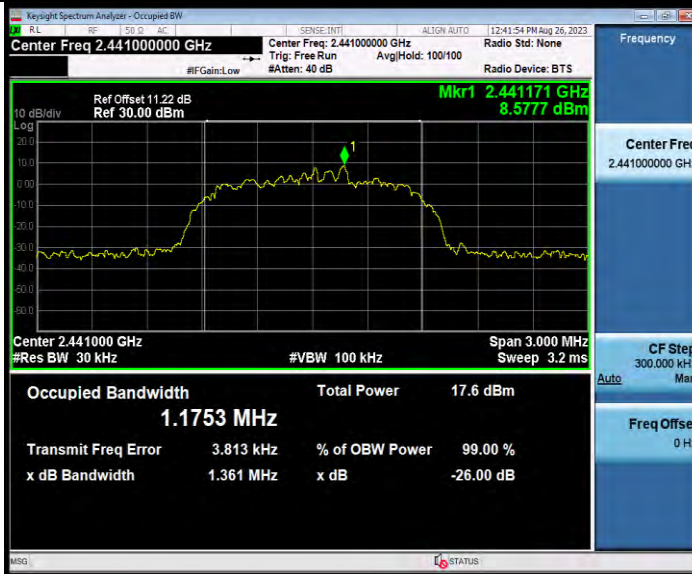

2DH5_Ant1_2480

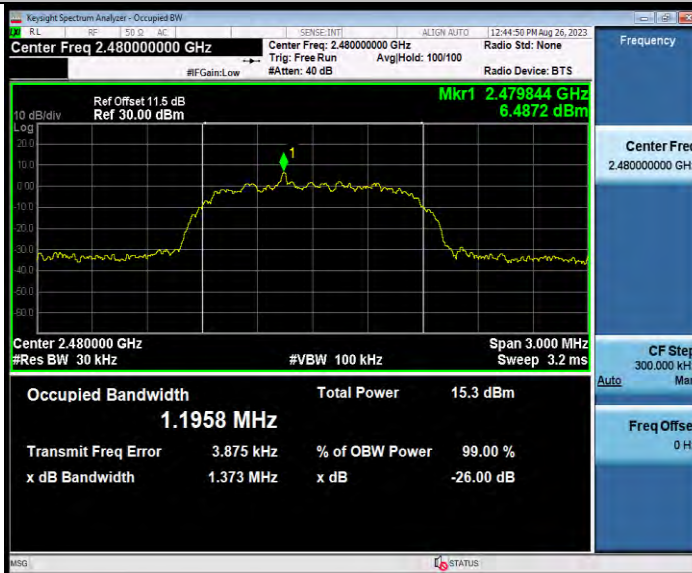

3DH5_Ant1_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



3DH5_Ant1_2441

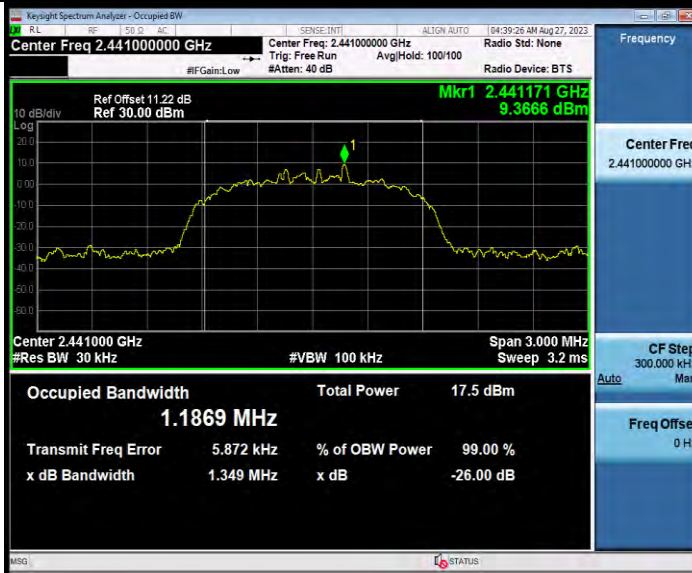


3DH5_Ant1_2480



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01

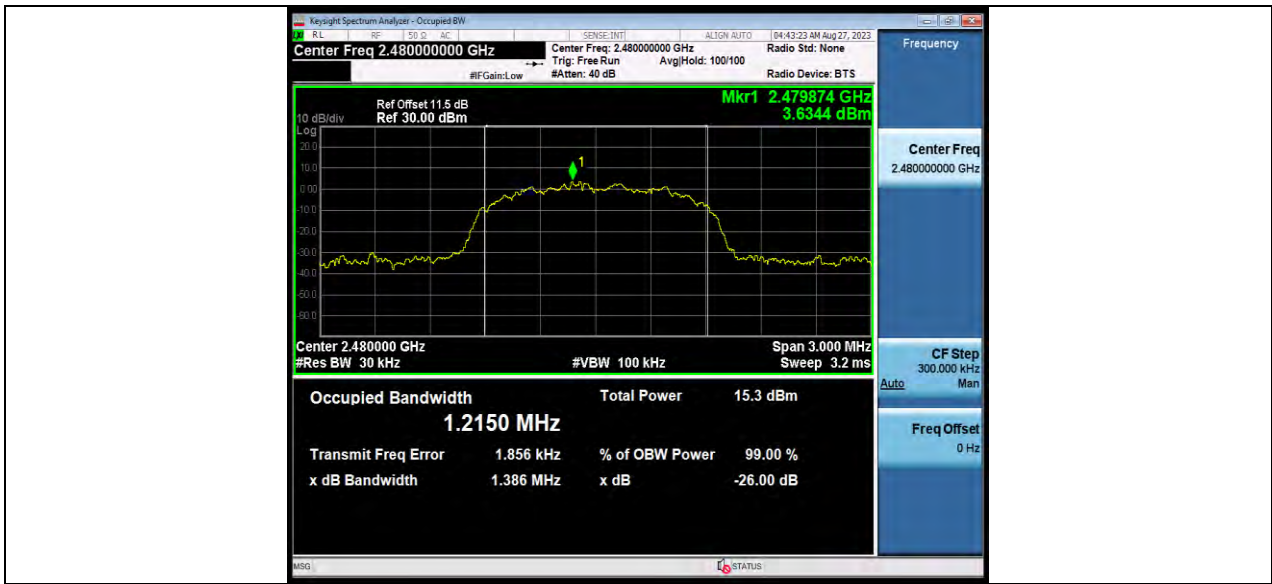

MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT

| Test Mode | Antenna | Frequency [MHz] | Average power [dBm] | Peak Power [dBm] | Peak power [mw] | Conducted Limit [dBm] | EIRP [dBm] | EIRP [mw] | EIRP Limit [dBm] | Verdict | Power Setting |
|-----------|---------|-----------------|---------------------|------------------|-----------------|-----------------------|------------|-----------|------------------|---------|---------------|
| DH5 | Ant1 | 2402 | 9.82 | 10.26 | 10.62 | ≤30 | 9.26 | 8.43 | ≤36.00 | PASS | Default |
| | | 2441 | 10.88 | 11.27 | 13.40 | ≤30 | 10.27 | 10.64 | ≤36.00 | PASS | Default |
| | | 2480 | 9.07 | 9.48 | 8.87 | ≤30 | 8.48 | 7.05 | ≤36.00 | PASS | Default |
| 2DH5 | Ant1 | 2402 | 7.89 | 10.33 | 10.79 | ≤20.97 | 9.33 | 8.57 | ≤36.00 | PASS | Default |
| | | 2441 | 8.95 | 11.31 | 13.52 | ≤20.97 | 10.31 | 10.74 | ≤36.00 | PASS | Default |
| | | 2480 | 7.19 | 9.56 | 9.04 | ≤20.97 | 8.56 | 7.18 | ≤36.00 | PASS | Default |
| 3DH5 | Ant1 | 2402 | 6.75 | 10.37 | 10.89 | ≤20.97 | 9.37 | 8.65 | ≤36.00 | PASS | Default |
| | | 2441 | 7.80 | 11.31 | 13.52 | ≤20.97 | 10.31 | 10.74 | ≤36.00 | PASS | Default |
| | | 2480 | 6.07 | 9.63 | 9.18 | ≤20.97 | 8.63 | 7.29 | ≤36.00 | PASS | Default |

Note: EIRP = Peak Power + Gain



**BUREAU
VERITAS**

Test Report No.: W7L-P23080006RF01


CARRIER FREQUENCY SEPARATION

TEST RESULT


| Test Mode | Antenna | Frequency[MHz] | Result[MHz] | Limit[MHz] | Verdict |
|-----------|---------|----------------|-------------|--------------|---------|
| DH5 | Ant1 | Hop | 1 | ≥ 0.861 | PASS |
| 2DH5 | Ant1 | Hop | 0.958 | ≥ 0.882 | PASS |
| 3DH5 | Ant1 | Hop | 1.034 | ≥ 0.866 | PASS |

TEST GRAPHS

DH5_Ant1_Hop

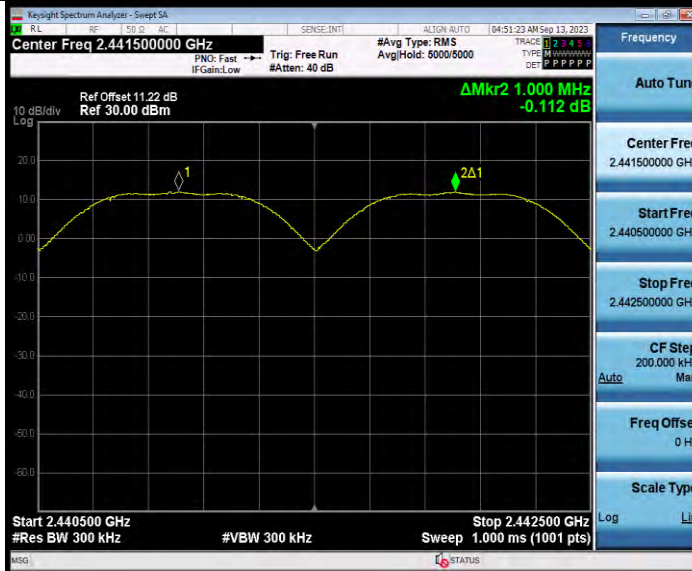

2DH5_Ant1_Hop

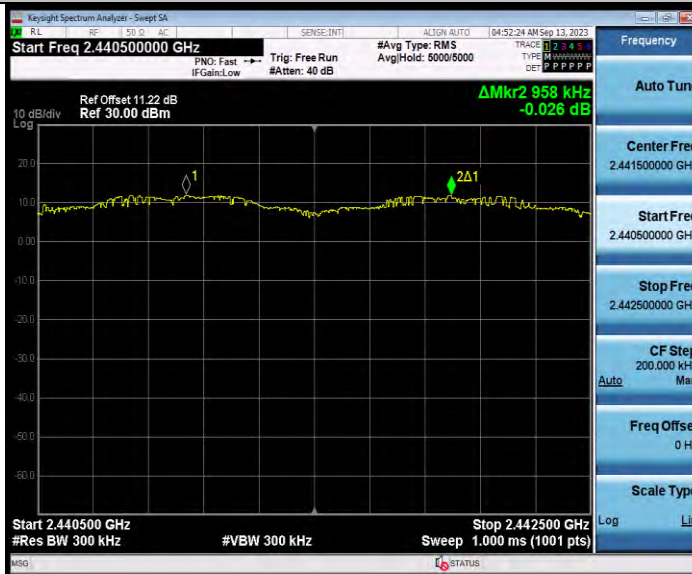

3DH5_Ant1_Hop



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



Test Report No.: W7L-P23080006RF01

TIME OF OCCUPANCY TEST RESULT

| Test Mode | Antenna | Frequency[MHz] | Burst Width [ms] | Total Hops [Num] | Result[s] | Limit[s] | Verdict |
|-----------|---------|----------------|---------------------|---------------------|-----------|----------|---------|
| DH1 | Ant1 | Hop | 0.376 | 320 | 0.12 | ≤0.4 | PASS |
| DH3 | Ant1 | Hop | 1.633 | 160 | 0.261 | ≤0.4 | PASS |
| DH5 | Ant1 | Hop | 2.885 | 106.67 | 0.308 | ≤0.4 | PASS |
| 2DH1 | Ant1 | Hop | 0.384 | 320 | 0.123 | ≤0.4 | PASS |
| 2DH3 | Ant1 | Hop | 1.637 | 160 | 0.262 | ≤0.4 | PASS |
| 2DH5 | Ant1 | Hop | 2.883 | 106.67 | 0.308 | ≤0.4 | PASS |
| 3DH1 | Ant1 | Hop | 0.384 | 320 | 0.123 | ≤0.4 | PASS |
| 3DH3 | Ant1 | Hop | 1.635 | 160 | 0.262 | ≤0.4 | PASS |
| 3DH5 | Ant1 | Hop | 2.885 | 106.67 | 0.308 | ≤0.4 | PASS |

NOTE: Total Hops = $\lceil 1600 / (\text{Send and receive Number} * 79) \rceil * 0.4 * 79$.


Send and receive Number : DH1/2DH1/3DH1=2; DH3/2DH3/3DH3=4; DH5/2DH5/3DH5=6

TEST GRAPHS

DH1_Ant1_Hop



DH3_Ant1_Hop

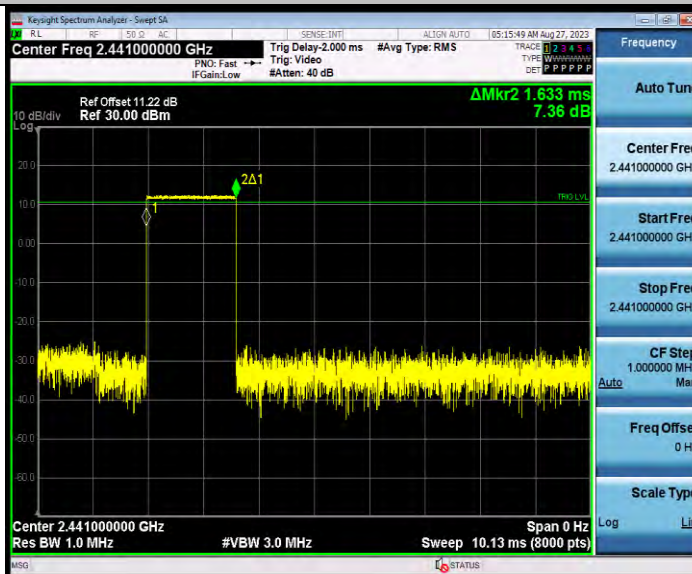


DH5_Ant1_Hop




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

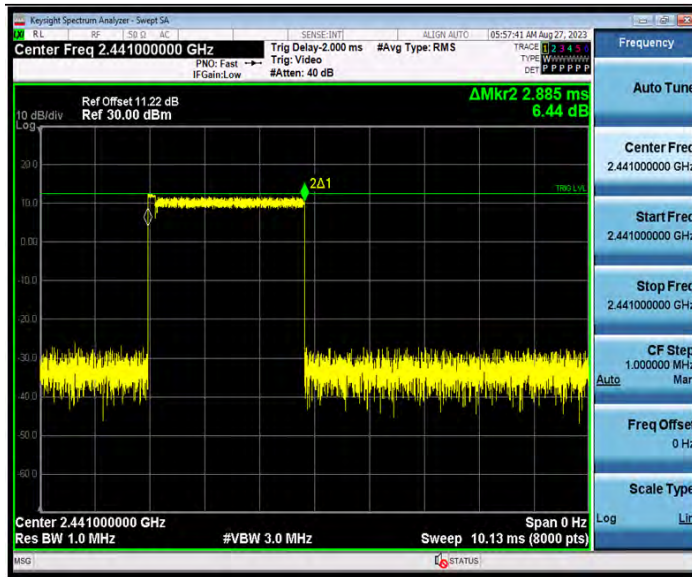

2DH1_Ant1_Hop

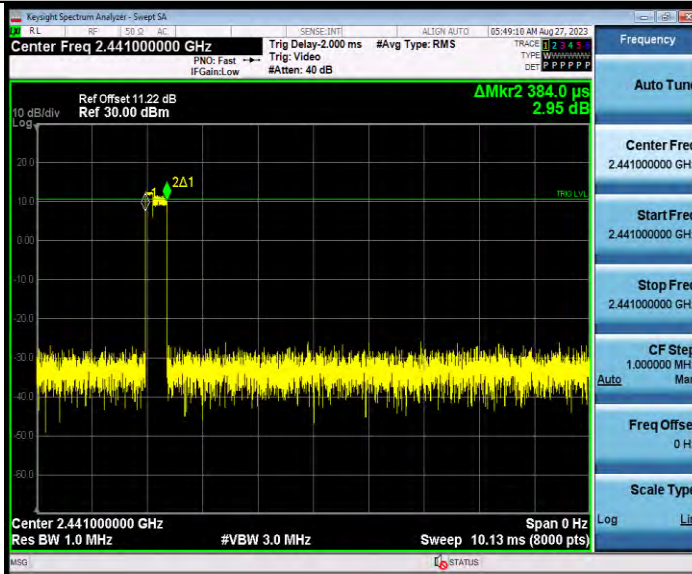


2DH3_Ant1_Hop



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

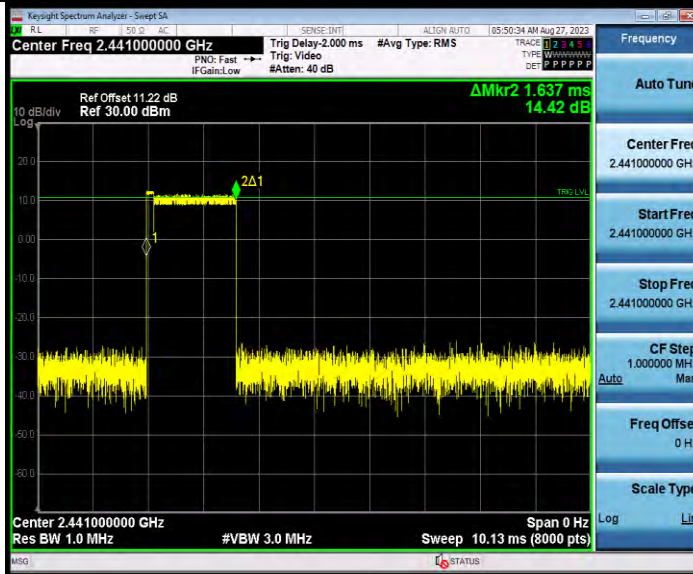

2DH5_Ant1_Hop




3DH1_Ant1_Hop




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

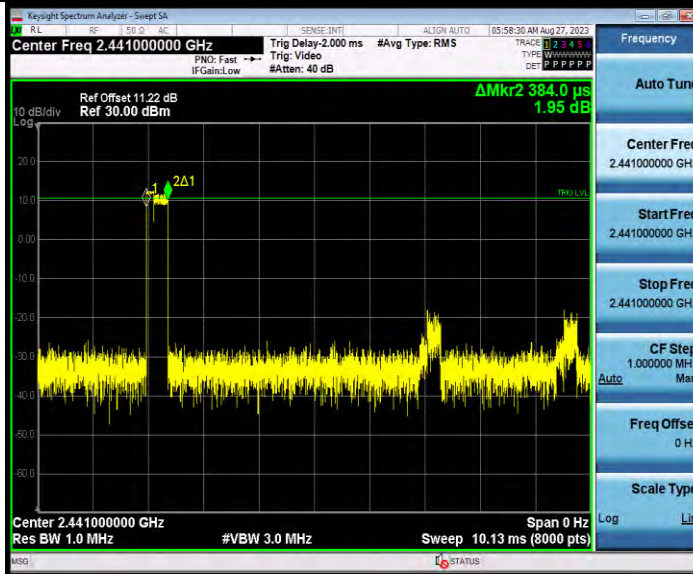

3DH3_Ant1_Hop

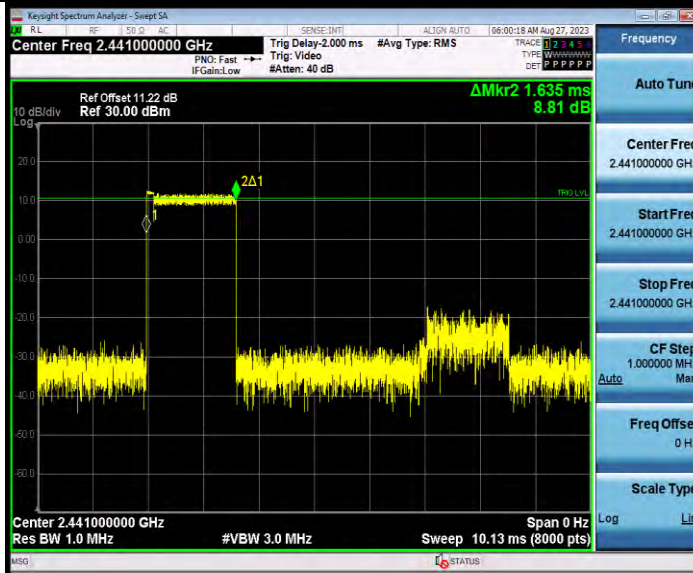


3DH5_Ant1_Hop



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

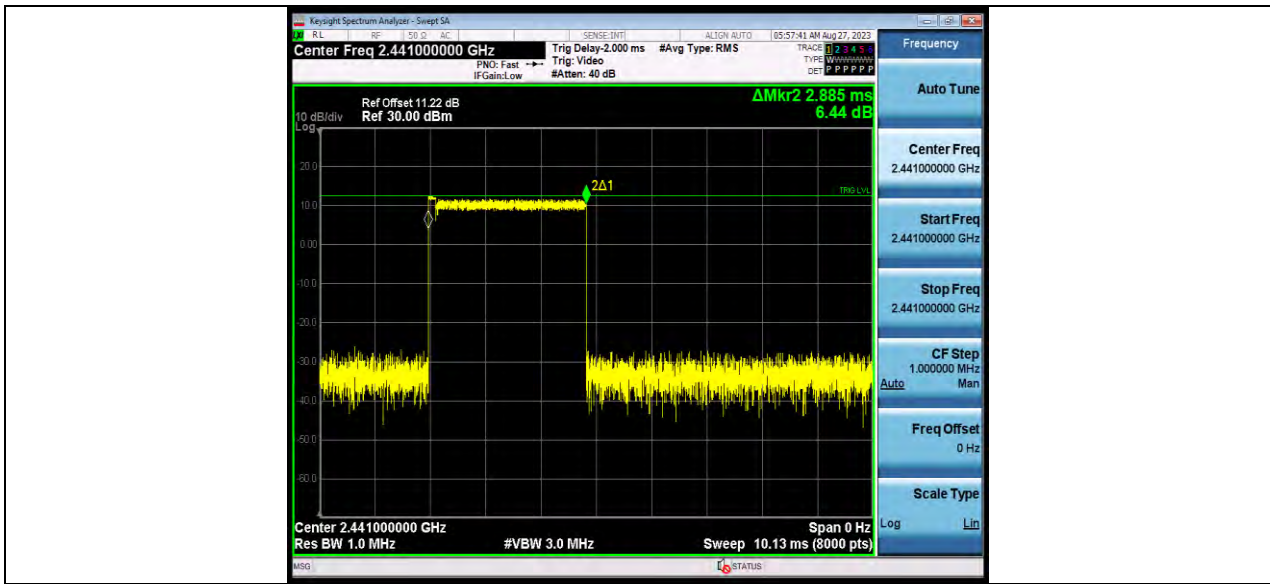

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01

NUMBER OF HOPPING CHANNELS TEST RESULT

| Test Mode | Antenna | Frequency[MHz] | Result[Num] | Limit[Num] | Verdict |
|-----------|---------|----------------|-------------|------------|---------|
| DH5 | Ant1 | Hop | 79 | ≥ 15 | PASS |
| 2DH5 | Ant1 | Hop | 79 | ≥ 15 | PASS |
| 3DH5 | Ant1 | Hop | 79 | ≥ 15 | PASS |

TEST GRAPHS

DH5_Ant1_Hop



2DH5_Ant1_Hop




3DH5_Ant1_Hop



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01

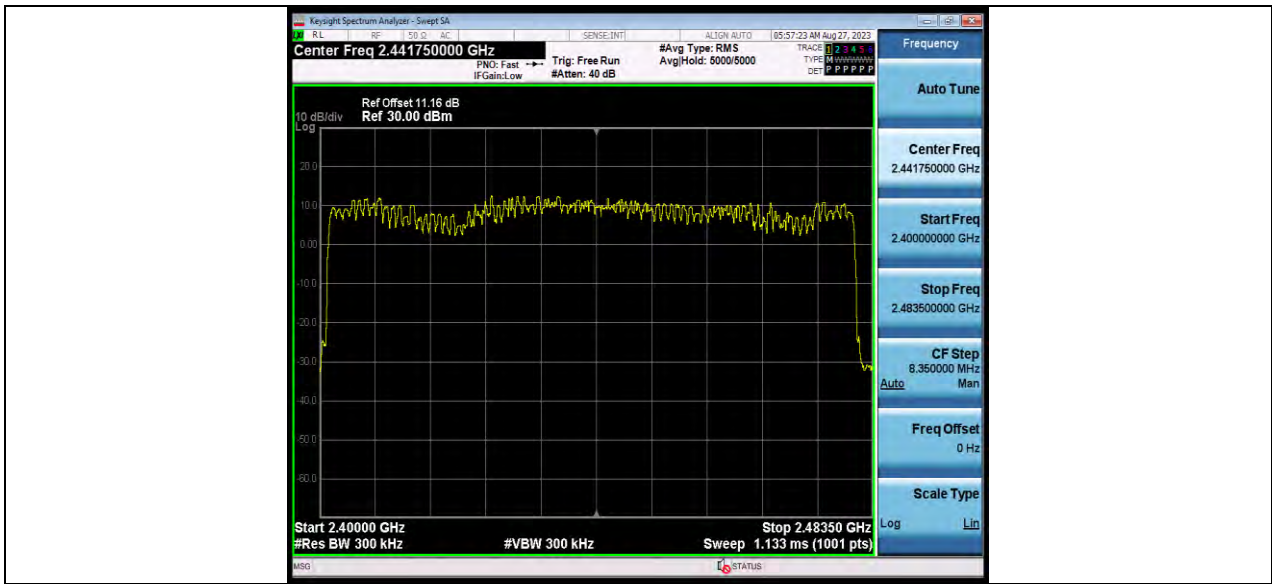

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com


BAND EDGE MEASUREMENTS

TEST RESULT


| Test Mode | Antenna | ChName | Frequency[MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|--------|----------------|----------------|--------------|-------------|---------|
| DH5 | Ant1 | Low | 2402 | 10.73 | -44.13 | ≤-9.27 | PASS |
| | | High | 2480 | 10.28 | -43.97 | ≤-9.72 | PASS |
| | | Low | Hop_2402 | 10.08 | -45.06 | ≤-9.92 | PASS |
| | | High | Hop_2480 | 10.53 | -44.56 | ≤-9.47 | PASS |
| 2DH5 | Ant1 | Low | 2402 | 6.86 | -39.04 | ≤-13.14 | PASS |
| | | High | 2480 | 8.23 | -44.06 | ≤-11.77 | PASS |
| | | Low | Hop_2402 | 10.61 | -44.42 | ≤-9.39 | PASS |
| | | High | Hop_2480 | 4.85 | -43.87 | ≤-15.15 | PASS |
| 3DH5 | Ant1 | Low | 2402 | 10.41 | -40.06 | ≤-9.59 | PASS |
| | | High | 2480 | 9.84 | -44.02 | ≤-10.17 | PASS |
| | | Low | Hop_2402 | 4.82 | -44.54 | ≤-15.18 | PASS |
| | | High | Hop_2480 | 8.28 | -44.7 | ≤-11.72 | PASS |

TEST GRAPHS

DH5_Ant1_Low_2402

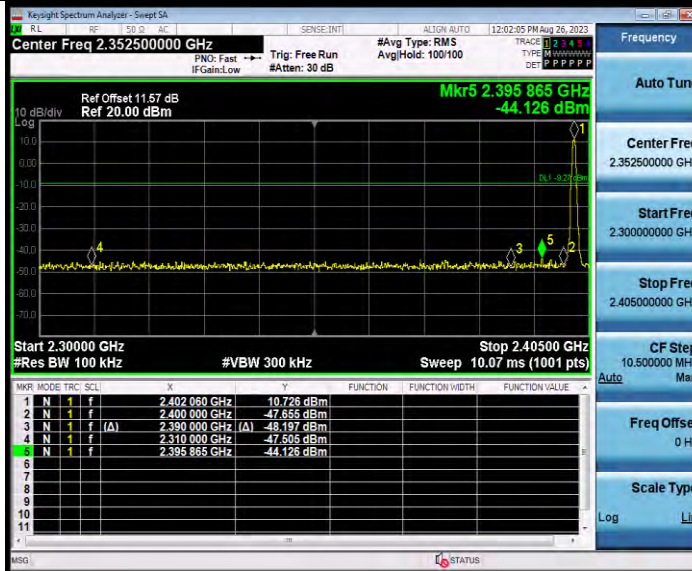

DH5_Ant1_High_2480

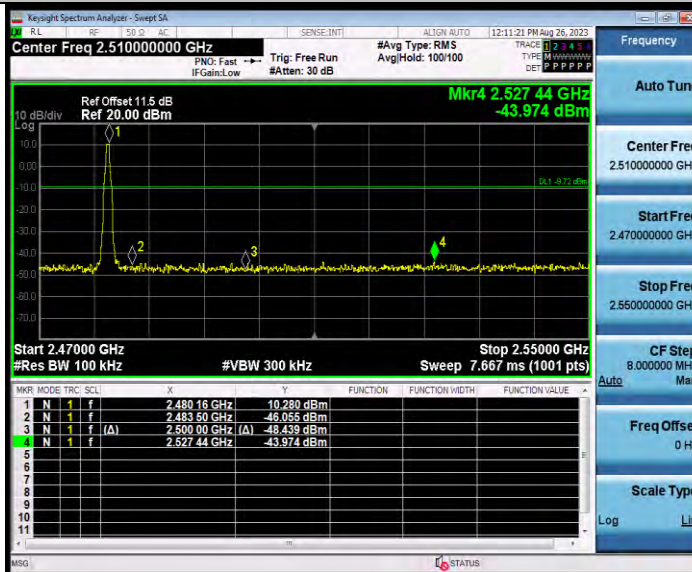


DH5_Ant1_Low_Hop_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

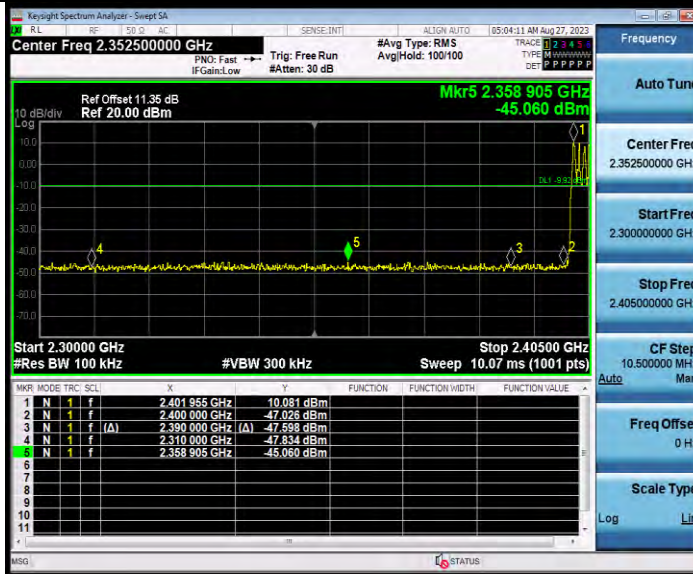

DH5_Ant1_High_Hop_2480

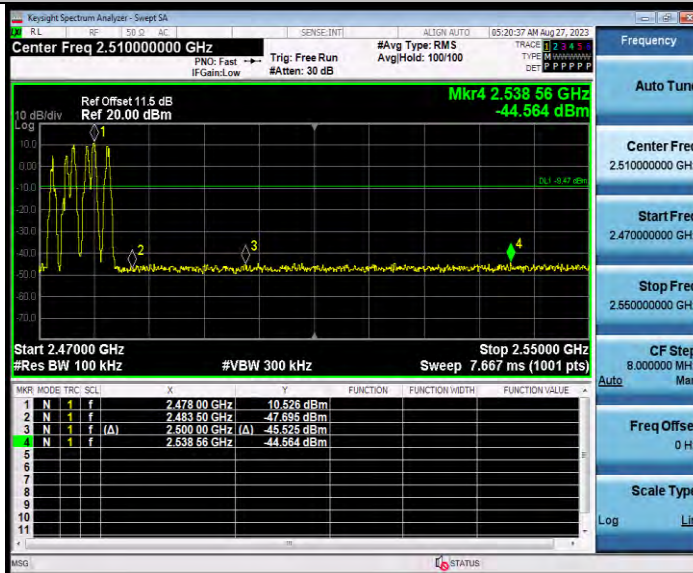


2DH5_Ant1_Low_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

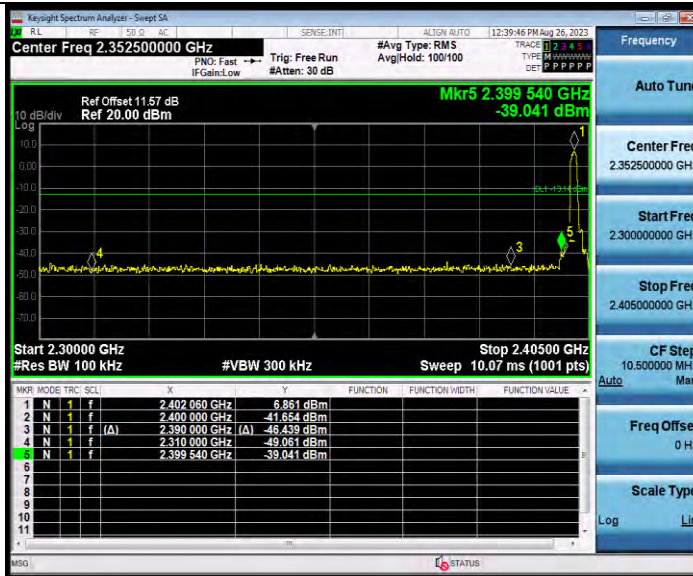

2DH5_Ant1_High_2480

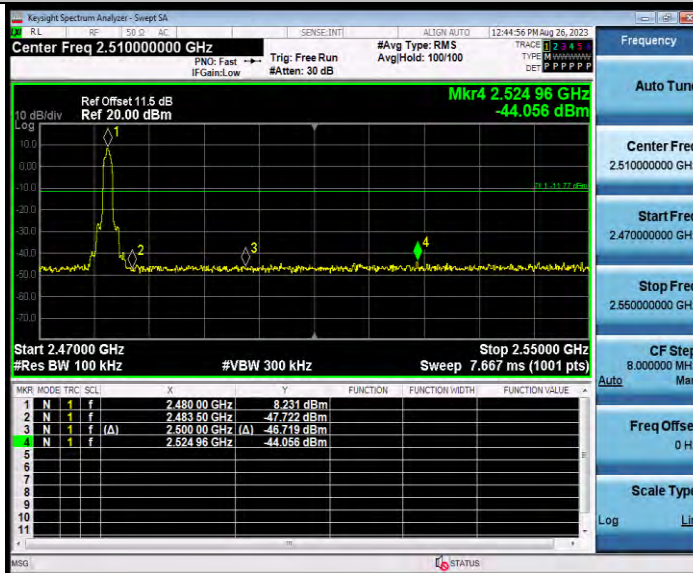


2DH5_Ant1_Low_Hop_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

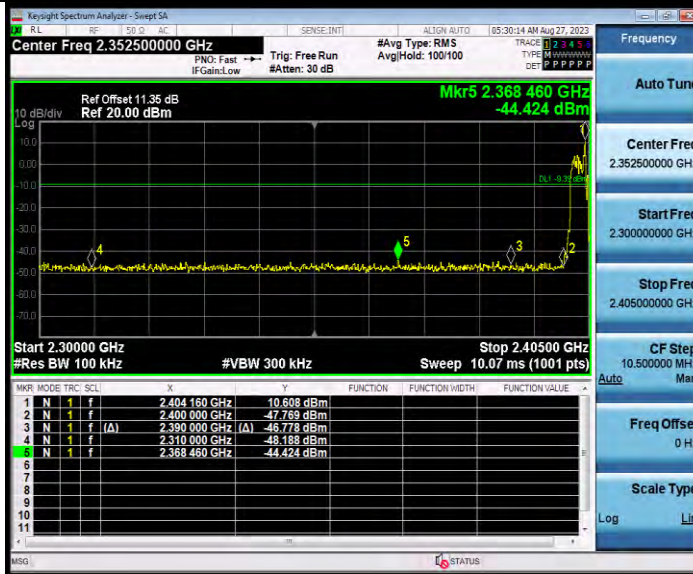

2DH5_Ant1_High_Hop_2480

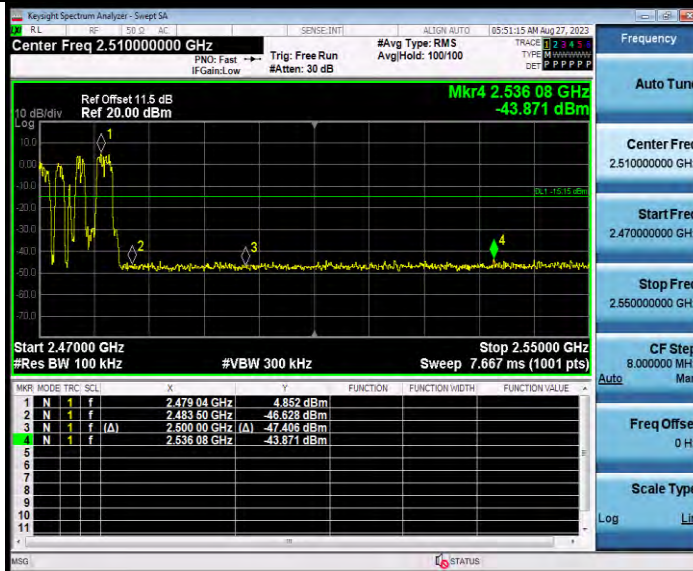


3DH5_Ant1_Low_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

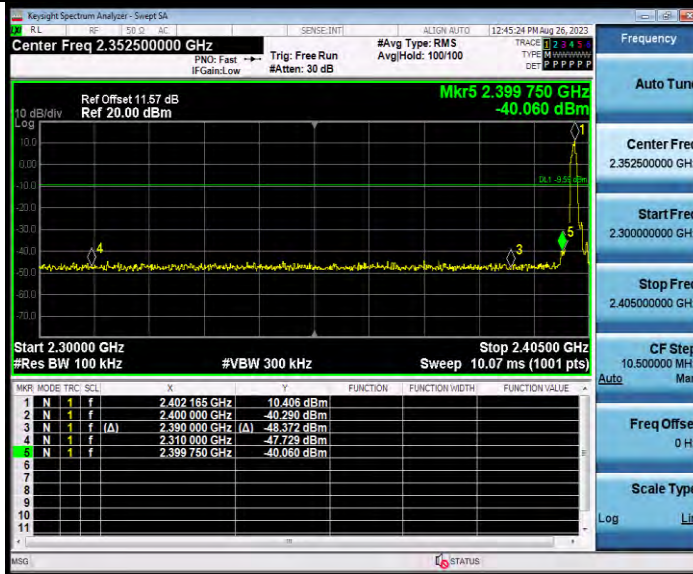

3DH5_Ant1_High_2480

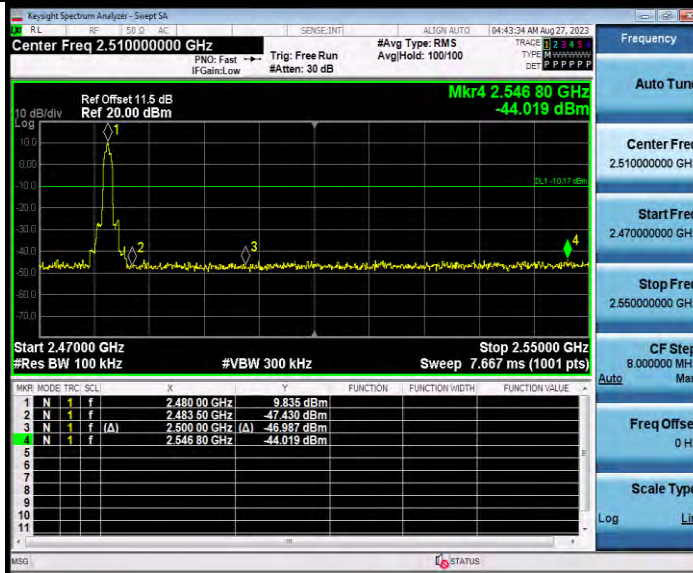


3DH5_Ant1_Low_Hop_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

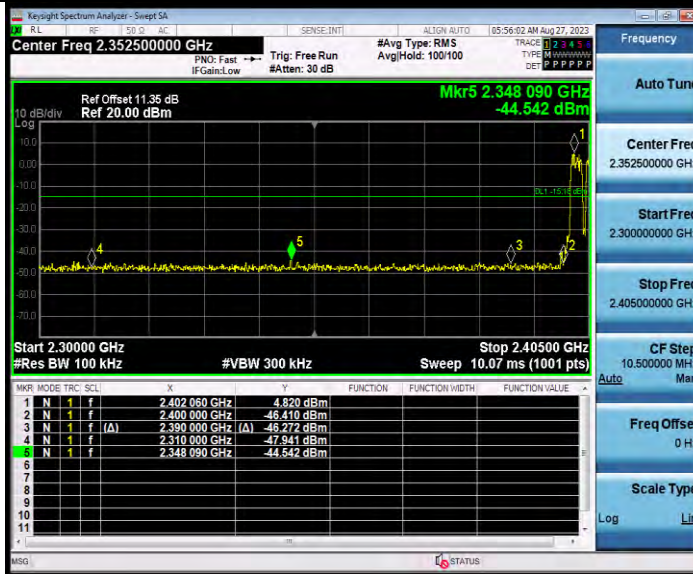

3DH5_Ant1_High_Hop_2480

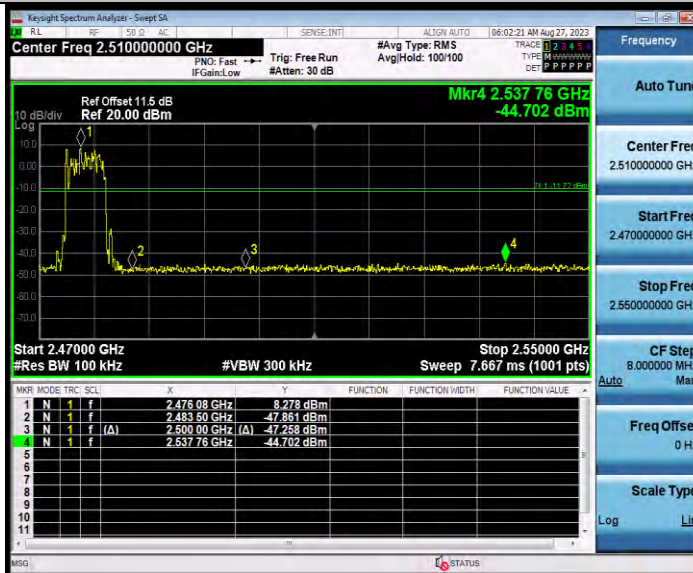

CONDUCTED SPURIOUS EMISSION

TEST RESULT


| Test Mode | Antenna | Frequency[MHz] | FreqRange [MHz] | RefLevel [dBm] | Result [dBm] | Limit [dBm] | Verdict |
|-----------|---------|----------------|-----------------|----------------|--------------|-------------|---------|
| DH5 | Ant1 | 2402 | Reference | 10.32 | 10.32 | --- | PASS |
| | | | 30~1000 | 10.32 | -52.65 | ≤-9.68 | PASS |
| | | | 1000~26500 | 10.32 | -33.8 | ≤-9.68 | PASS |
| | | 2441 | Reference | 10.78 | 10.78 | --- | PASS |
| | | | 30~1000 | 10.78 | -53.44 | ≤-9.22 | PASS |
| | | | 1000~26500 | 10.78 | -34.23 | ≤-9.22 | PASS |
| | | 2480 | Reference | 9.86 | 9.86 | --- | PASS |
| | | | 30~1000 | 9.86 | -53.18 | ≤-10.14 | PASS |
| | | | 1000~26500 | 9.86 | -34.45 | ≤-10.14 | PASS |
| 2DH5 | Ant1 | 2402 | Reference | 6.38 | 6.38 | --- | PASS |
| | | | 30~1000 | 6.38 | -52.7 | ≤-13.62 | PASS |
| | | | 1000~26500 | 6.38 | -34.07 | ≤-13.62 | PASS |
| | | 2441 | Reference | 6.66 | 6.66 | --- | PASS |
| | | | 30~1000 | 6.66 | -53.14 | ≤-13.34 | PASS |
| | | | 1000~26500 | 6.66 | -34.19 | ≤-13.34 | PASS |
| | | 2480 | Reference | 6.33 | 6.33 | --- | PASS |
| | | | 30~1000 | 6.33 | -53.51 | ≤-13.67 | PASS |
| | | | 1000~26500 | 6.33 | -34.61 | ≤-13.67 | PASS |
| 3DH5 | Ant1 | 2402 | Reference | 9.95 | 9.95 | --- | PASS |
| | | | 30~1000 | 9.95 | -53.77 | ≤-10.05 | PASS |
| | | | 1000~26500 | 9.95 | -33.85 | ≤-10.05 | PASS |
| | | 2441 | Reference | 7.45 | 7.45 | --- | PASS |
| | | | 30~1000 | 7.45 | -53.85 | ≤-12.55 | PASS |
| | | | 1000~26500 | 7.45 | -34.25 | ≤-12.55 | PASS |
| | | 2480 | Reference | 9.18 | 9.18 | --- | PASS |
| | | | 30~1000 | 9.18 | -52.84 | ≤-10.82 | PASS |
| | | | 1000~26500 | 9.18 | -33.67 | ≤-10.82 | PASS |

TEST GRAPHS

DH5_Ant1_2402_0~Reference



DH5_Ant1_2402_30~1000

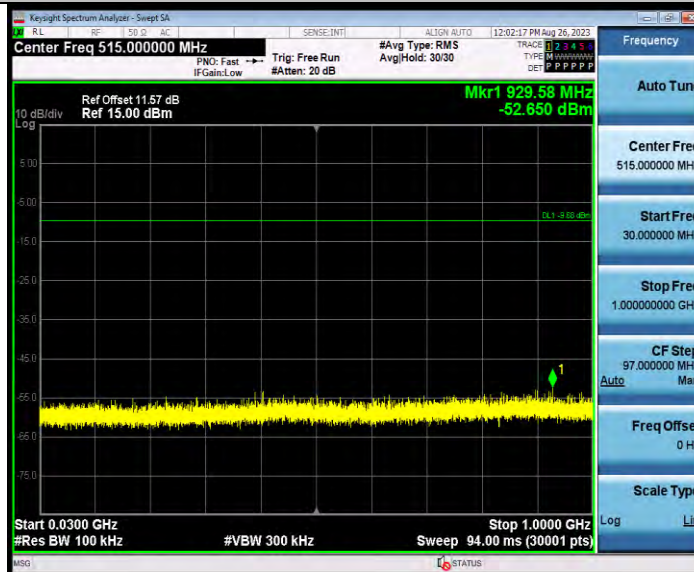

DH5_Ant1_2402_1000~26500



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



DH5_Ant1_2441_0~Reference



DH5_Ant1_2441_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

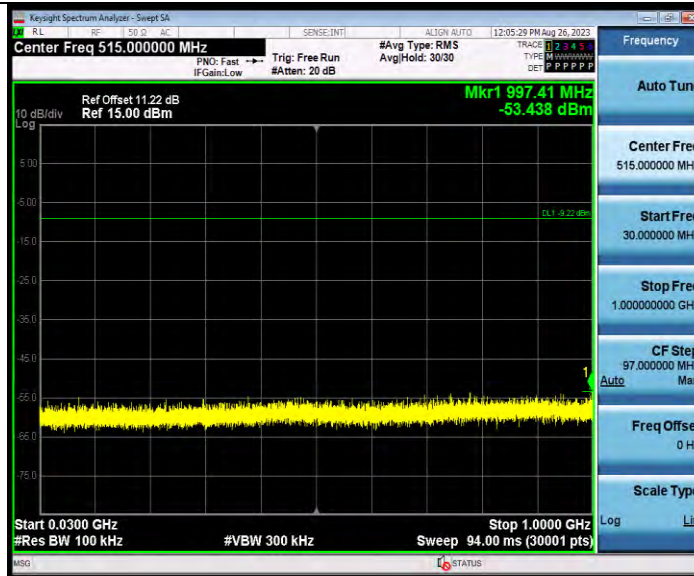

DH5_Ant1_2441_1000~26500



DH5_Ant1_2480_0~Reference

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
 Fax: +86 755 8869 6577
 Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



DH5_Ant1_2480_30~1000

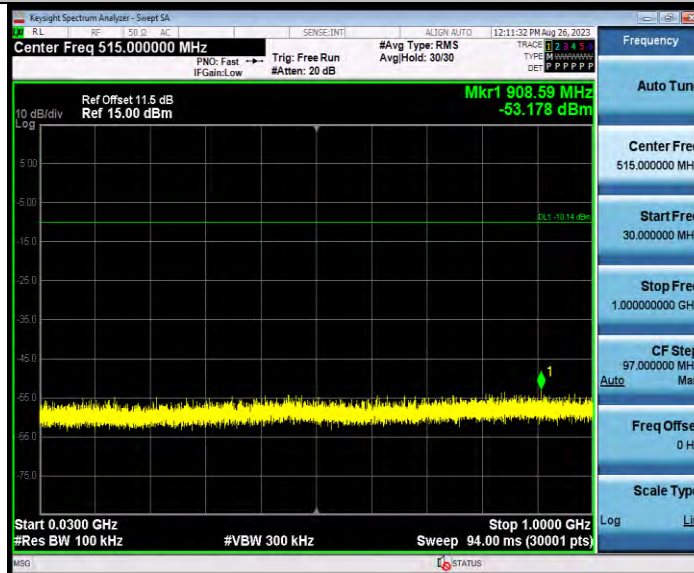

DH5_Ant1_2480_1000~26500



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



2DH5_Ant1_2402_0~Reference




2DH5_Ant1_2402_30~1000



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

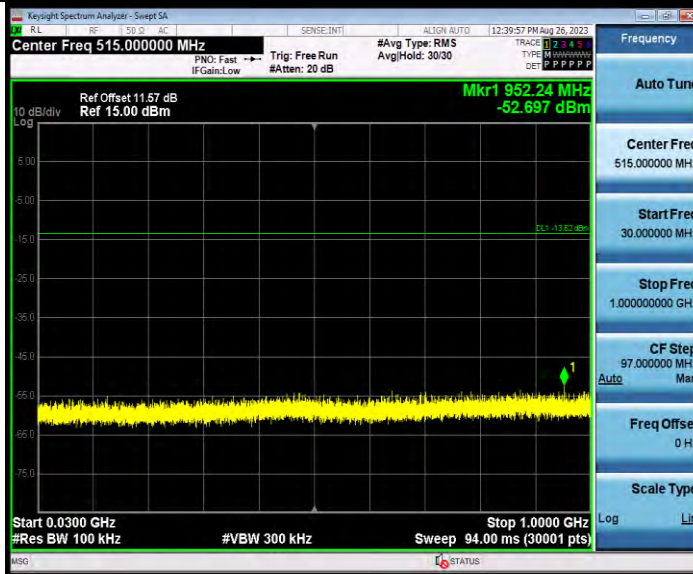

2DH5_Ant1_2402_1000~26500



2DH5_Ant1_2441_0~Reference

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



2DH5_Ant1_2441_30~1000



2DH5_Ant1_2441_1000~26500



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



2DH5_Ant1_2480_0~Reference



2DH5_Ant1_2480_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

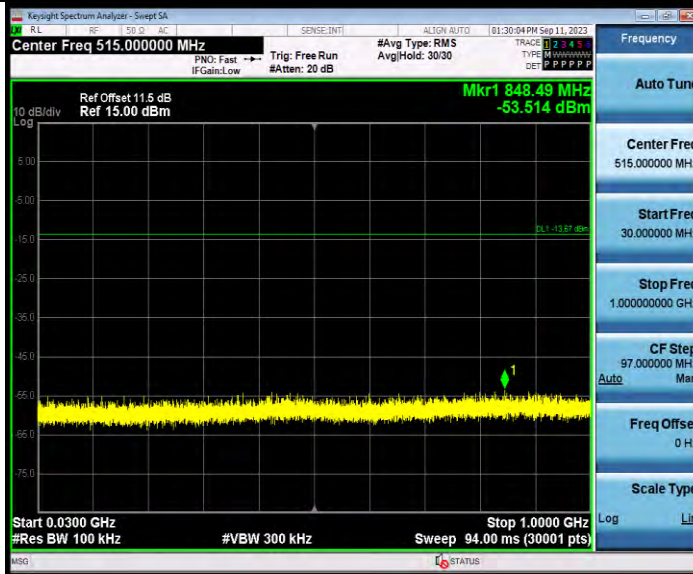

2DH5_Ant1_2480_1000~26500



3DH5_Ant1_2402_0~Reference




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



3DH5_Ant1_2402_30~1000

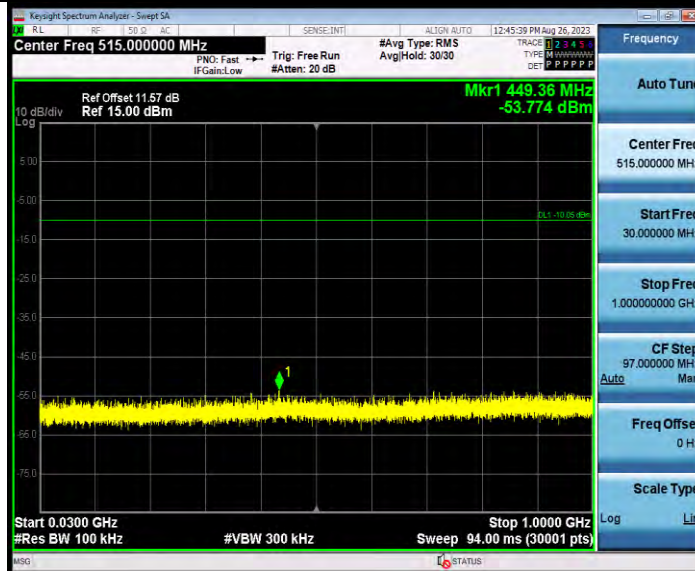

3DH5_Ant1_2402_1000~26500



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



3DH5_Ant1_2441_0~Reference



3DH5_Ant1_2441_30~1000

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



3DH5_Ant1_2441_1000~26500



3DH5_Ant1_2480_0~Reference

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



3DH5_Ant1_2480_30~1000

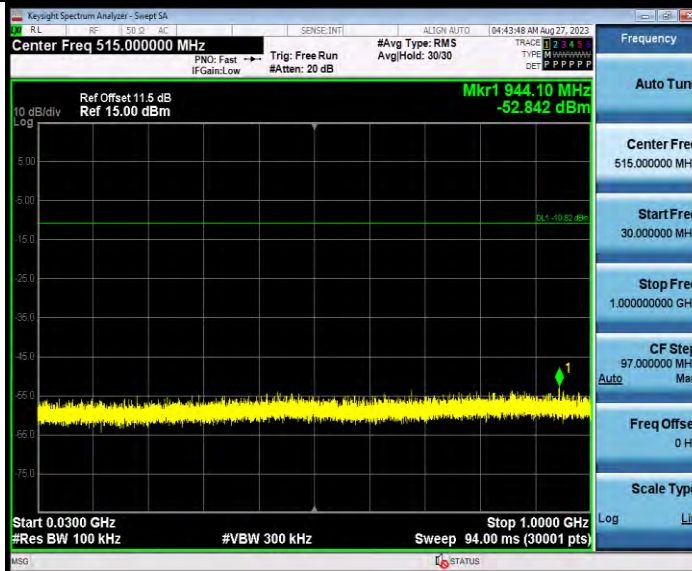

3DH5_Ant1_2480_1000~26500

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01



BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU
VERITAS

Test Report No.: W7L-P23080006RF01


DUTY CYCLE

TEST RESULT


| Test Mode | Antenna | Frequency[M Hz] | ON Time [ms] | Period [ms] | Duty Cycle [%] | Duty Cycle Factor[dB] |
|-----------|---------|-----------------|--------------|-------------|----------------|-----------------------|
| DH5 | Ant1 | 2402 | 2.88 | 3.75 | 76.80 | 1.15 |
| | | 2441 | 2.89 | 3.75 | 77.07 | 1.13 |
| | | 2480 | 2.88 | 3.75 | 76.80 | 1.15 |
| 2DH5 | Ant1 | 2402 | 2.90 | 3.76 | 77.13 | 1.13 |
| | | 2441 | 1.52 | 3.75 | 40.53 | 3.92 |
| | | 2480 | 1.52 | 3.75 | 40.53 | 3.92 |
| 3DH5 | Ant1 | 2402 | 2.89 | 3.75 | 77.07 | 1.13 |
| | | 2441 | 2.89 | 3.75 | 77.07 | 1.13 |
| | | 2480 | 2.89 | 3.75 | 77.07 | 1.13 |

TEST GRAPHS

DH5_Ant1_2402

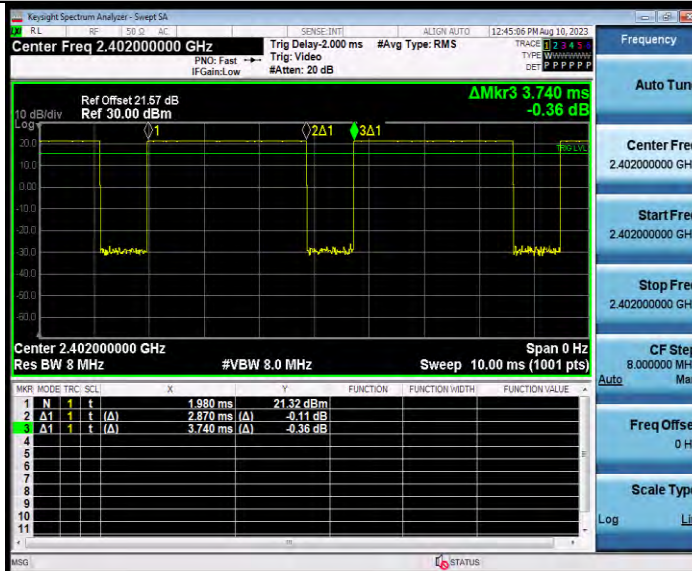

DH5_Ant1_2441

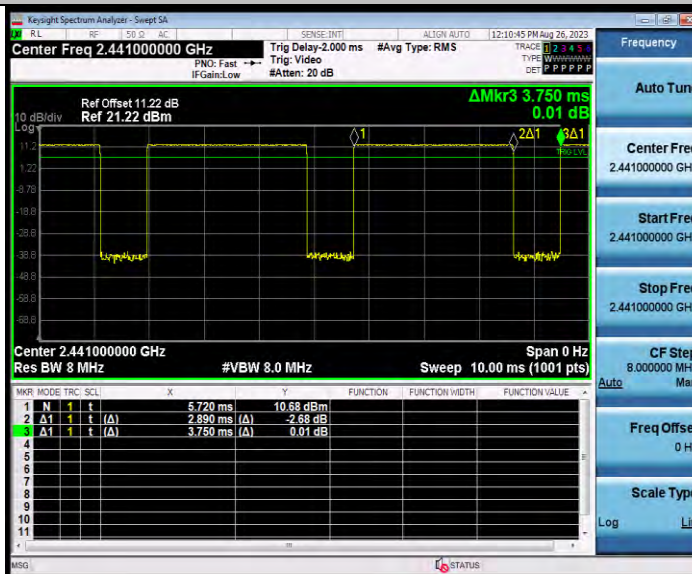


DH5_Ant1_2480




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

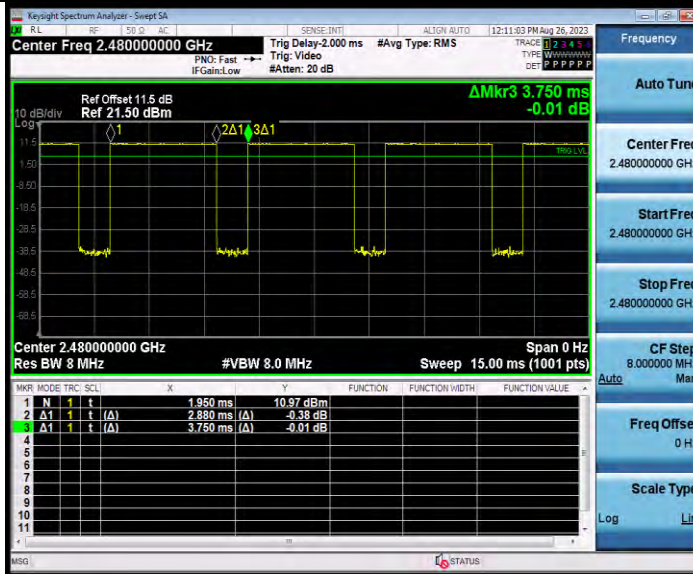

2DH5_Ant1_2402

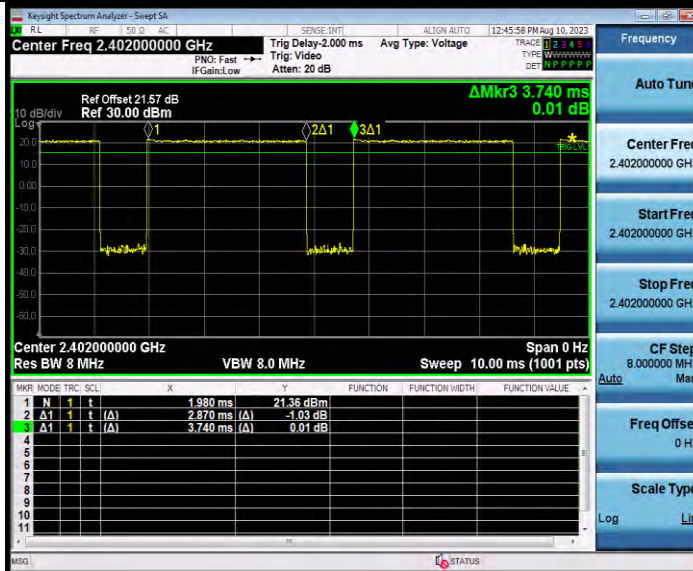


2DH5_Ant1_2441




**BUREAU
VERITAS**

Test Report No.: W7L-P23080006RF01

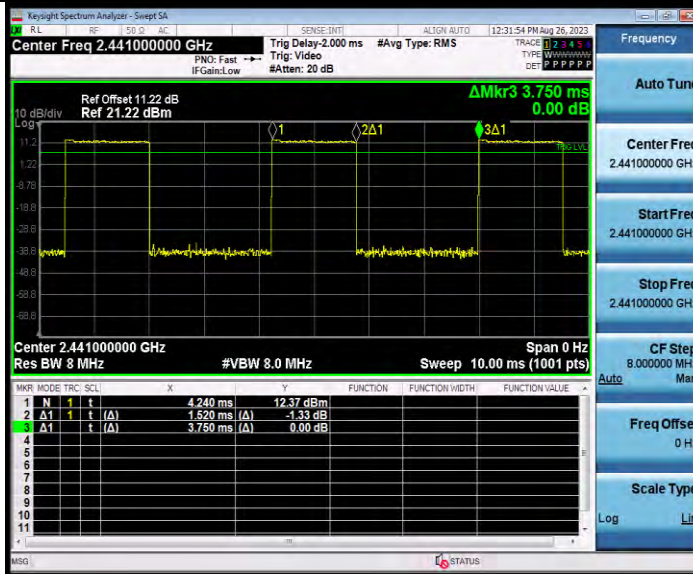

2DH5_Ant1_2480

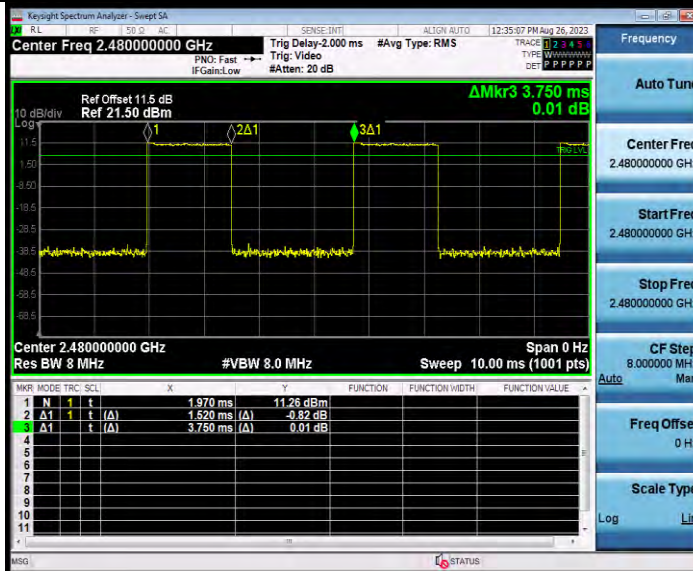


3DH5_Ant1_2402




BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

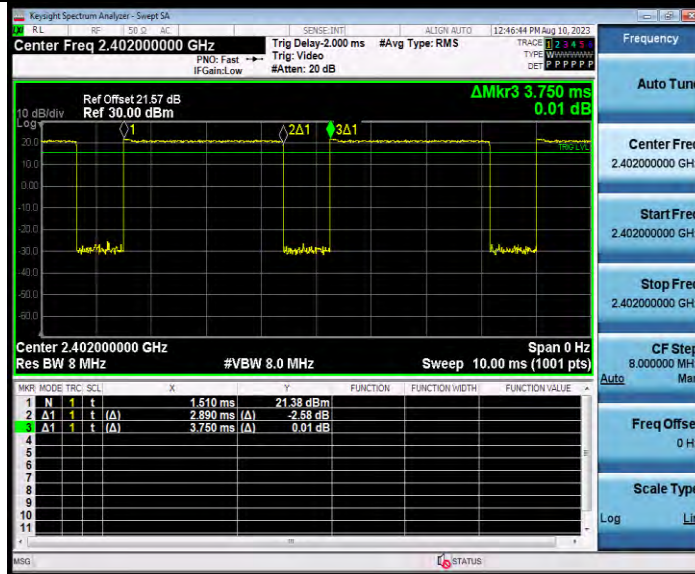

3DH5_Ant1_2441

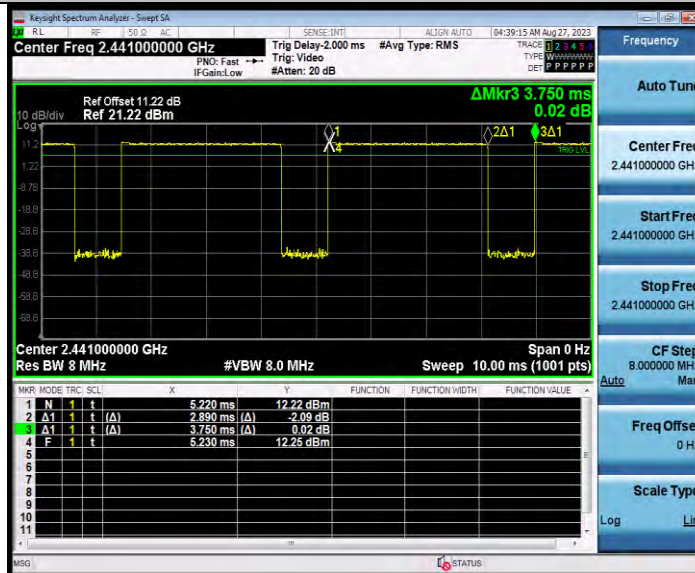

3DH5_Ant1_2480

BV 7Layers Communications Technology (Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BUREAU VERITAS

Test Report No.: W7L-P23080006RF01

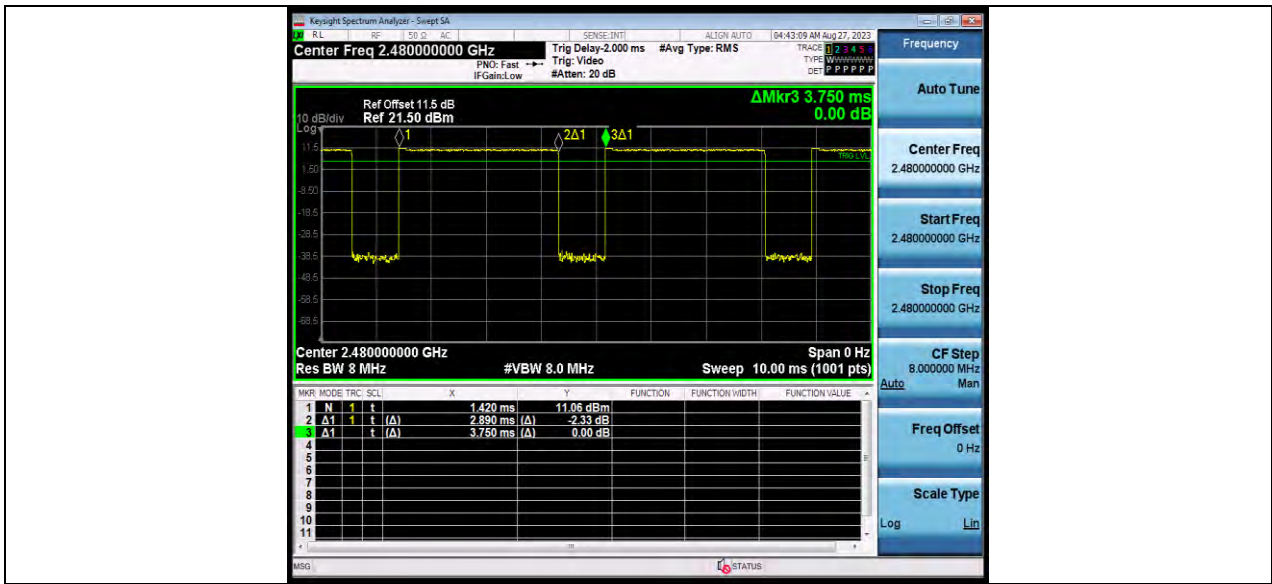

---END---