




## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

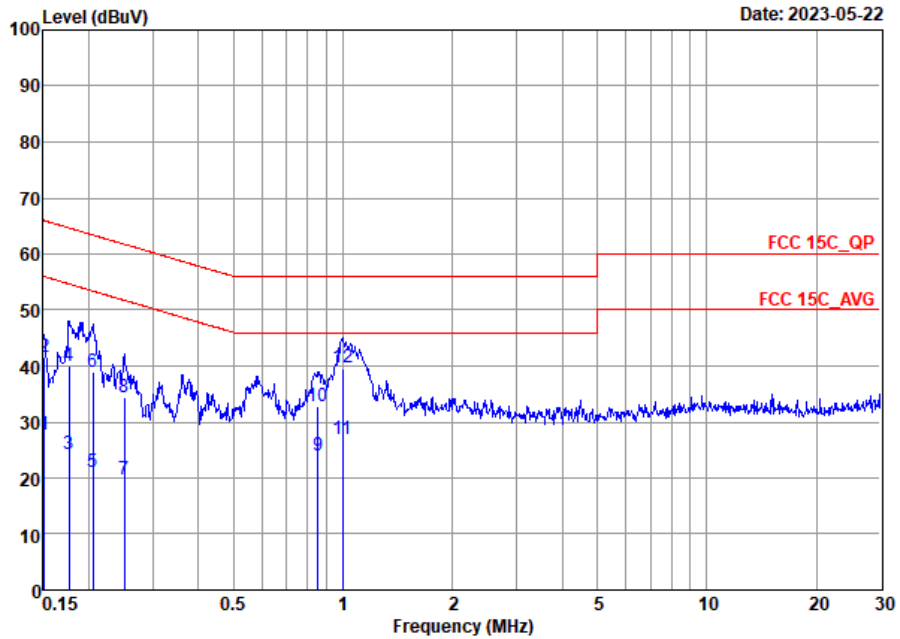


Site : CO01-SZ  
Condition: FCC 15C\_QP LISN\_20230420\_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	27.70	-28.26	55.96	7.10	10.47	10.13	Average
2	0.15	41.60	-24.36	65.96	21.00	10.47	10.13	QP
3	0.18	24.31	-30.33	54.64	3.71	10.46	10.14	Average
4	0.18	40.01	-24.63	64.64	19.41	10.46	10.14	QP
5	0.21	20.96	-32.44	53.40	0.40	10.41	10.15	Average
6	0.21	38.86	-24.54	63.40	18.30	10.41	10.15	QP
7	0.25	19.83	-31.90	51.73	-0.70	10.38	10.15	Average
8	0.25	34.53	-27.20	61.73	14.00	10.38	10.15	QP
9	0.85	24.00	-22.00	46.00	3.60	10.24	10.16	Average
10	0.85	32.90	-23.10	56.00	12.50	10.24	10.16	QP
11	1.00	26.80	-19.20	46.00	6.40	10.24	10.16	Average
12 *	1.00	39.60	-16.40	56.00	19.20	10.24	10.16	QP



Test Engineer :	Lily Qiu	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

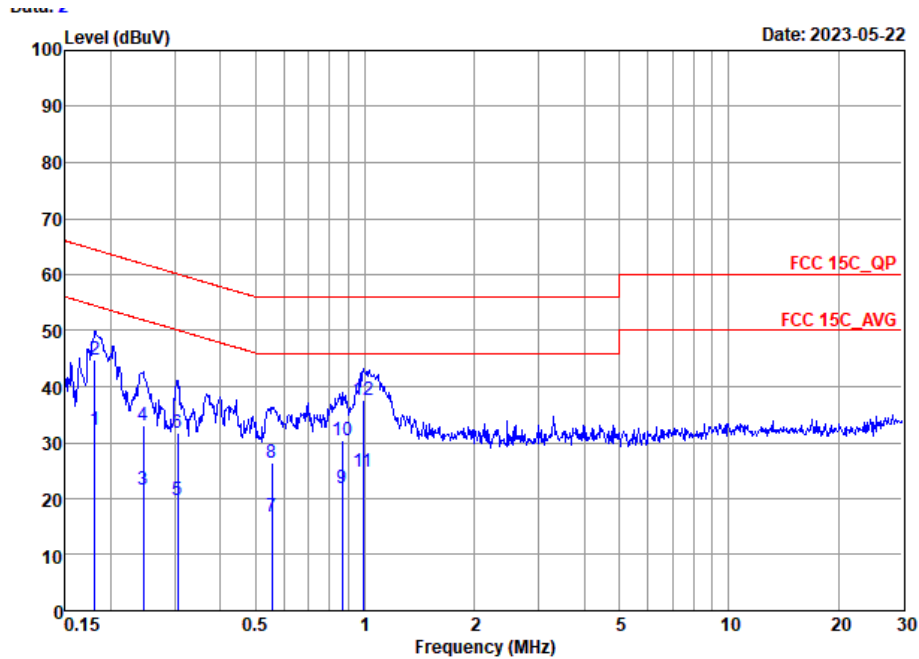

Site : C001-SZ  
 Condition: FCC 15C\_QP LISN\_20230420\_N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.18	32.24	-22.22	54.46	11.70	10.40	10.14	Average
2	0.18	44.84	-19.62	64.46	24.30	10.40	10.14	QP
3	0.25	21.57	-30.34	51.91	1.10	10.32	10.15	Average
4	0.25	33.07	-28.84	61.91	12.60	10.32	10.15	QP
5	0.31	19.76	-30.34	50.10	-0.69	10.30	10.15	Average
6	0.31	31.76	-28.34	60.10	11.31	10.30	10.15	QP
7	0.56	16.78	-29.22	46.00	-3.60	10.22	10.16	Average
8	0.56	26.48	-29.52	56.00	6.10	10.22	10.16	QP
9	0.87	21.98	-24.02	46.00	1.60	10.22	10.16	Average
10	0.87	30.38	-25.62	56.00	10.00	10.22	10.16	QP
11	0.99	24.90	-21.10	46.00	4.50	10.24	10.16	Average
12 *	0.99	37.50	-18.50	56.00	17.10	10.24	10.16	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission Test Data

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 5	2400-2483.5	17	Bluetooth-LE	00	2402	BLE 125kbps	-	-
Mode 6	2400-2483.5	17	Bluetooth-LE	19	2440	BLE 125kbps	-	-
Mode 7	2400-2483.5	17	Bluetooth-LE	39	2480	BLE 125kbps	-	-
Mode 8	2400-2483.5	17	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 9	2400-2483.5	17	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 10	2400-2483.5	17	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 11	-	17	Bluetooth-LE	39	2480	BLE 125kbps	-	LF
Mode 16	2400-2483.5	6	Bluetooth-LE	00	2402	BLE 125kbps	-	-
Mode 17	2400-2483.5	6	Bluetooth-LE	19	2440	BLE 125kbps	-	-
Mode 18	2400-2483.5	6	Bluetooth-LE	39	2480	BLE 125kbps	-	-
Mode 19	2400-2483.5	6	Bluetooth-LE	00	2402	2Mbps	-	-
Mode 20	2400-2483.5	6	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 21	2400-2483.5	6	Bluetooth-LE	39	2480	2Mbps	-	-
Mode 22	-	6	Bluetooth-LE	39	2480	2Mbps	-	LF



## Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
5	Bluetooth-LE	00	2384.43	45.91	54.00	-8.09	V	AVERAGE	Pass	Band Edge
5	Bluetooth-LE	00	4804.00	42.84	74.00	-31.16	V	Peak	Pass	Harmonic
6	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
6	Bluetooth-LE	19	7320.00	44.21	74.00	-29.79	H	Peak	Pass	Harmonic
7	Bluetooth-LE	39	2483.54	49.02	54.00	-4.98	H	AVERAGE	Pass	Band Edge
7	Bluetooth-LE	39	4960.00	47.89	74.00	-26.11	V	Peak	Pass	Harmonic
8	Bluetooth-LE	00	2347.72	48.12	54.00	-5.88	V	AVERAGE	Pass	Band Edge
8	Bluetooth-LE	00	4804.00	48.86	74.00	-25.14	V	Peak	Pass	Harmonic
9	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
9	Bluetooth-LE	19	7320.00	47.96	74.00	-26.04	H	Peak	Pass	Harmonic
10	Bluetooth-LE	39	2483.68	48.84	54.00	-5.16	H	AVERAGE	Pass	Band Edge
10	Bluetooth-LE	39	4960.00	47.91	74.00	-26.09	V	Peak	Pass	Harmonic
11	Bluetooth-LE	39	40.00	25.18	40.00	-14.82	V	Peak	Pass	LF
16	Bluetooth-LE	00	2350.85	45.81	54.00	-8.19	V	AVERAGE	Pass	Band Edge
16	Bluetooth-LE	00	4804.00	43.60	74.00	-30.40	H	Peak	Pass	Harmonic
17	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
17	Bluetooth-LE	19	4880.00	43.49	74.00	-30.51	V	Peak	Pass	Harmonic
18	Bluetooth-LE	39	2486.10	46.24	54.00	-7.76	H	AVERAGE	Pass	Band Edge
18	Bluetooth-LE	39	7440.00	44.34	74.00	-29.66	H	Peak	Pass	Harmonic
19	Bluetooth-LE	00	2332.63	48.32	54.00	-5.68	H	AVERAGE	Pass	Band Edge
19	Bluetooth-LE	00	4804.00	47.98	74.00	-26.02	H	Peak	Pass	Harmonic
20	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
20	Bluetooth-LE	19	4880.00	48.20	74.00	-25.80	V	Peak	Pass	Harmonic
21	Bluetooth-LE	39	2490.54	48.75	54.00	-5.25	V	AVERAGE	Pass	Band Edge
21	Bluetooth-LE	39	7440.00	48.39	74.00	-25.61	V	Peak	Pass	Harmonic
22	Bluetooth-LE	39	942.77	30.3	46	-15.7	H	Peak	Pass	LF



Co-Location





WIFI 802.BLE CH39 & LTE B48 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Cable Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
802.BLE CH 39 2482MHz & LTEB48 Co-colation	*	2480	100.26	-	-	95.15	33.55	5.46	33.9	175	356	P	H
	*	2480	98.4	-	-	93.29	33.55	5.46	33.9	175	356	A	H
		2494.32	54.63	-19.37	74	49.48	33.59	5.46	33.9	175	356	P	H
		2495.68	47.32	-6.68	54	42.17	33.59	5.46	33.9	175	356	A	H
	*	2480	97.85	-	-	92.74	33.55	5.46	33.9	186	304	P	V
	*	2480	96.04	-	-	90.93	33.55	5.46	33.9	186	304	A	V
		2483.56	55.22	-18.78	74	50.1	33.56	5.46	33.9	186	304	P	V
		2483.8	47.24	-6.76	54	42.12	33.56	5.46	33.9	186	304	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Mode	5																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																									
ANT	17																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2380.66</td> <td>58.37</td> <td>74.00</td> <td>-15.63</td> <td>53.61</td> <td>33.29</td> <td>5.35</td> <td>33.88</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2380.66	58.37	74.00	-15.63	53.61	33.29	5.35	33.88	100	338	PEAK	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>97.80</td> <td>74.00</td> <td>23.80</td> <td>92.96</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>338</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	97.80	74.00	23.80	92.96	33.35	5.37	33.88	100	338	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2380.66	58.37	74.00	-15.63	53.61	33.29	5.35	33.88	100	338	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	97.80	74.00	23.80	92.96	33.35	5.37	33.88	100	338	PEAK																																																															
Avg	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2353.06</td> <td>45.76</td> <td>54.00</td> <td>-8.24</td> <td>41.08</td> <td>33.22</td> <td>5.33</td> <td>33.87</td> <td>100</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2353.06	45.76	54.00	-8.24	41.08	33.22	5.33	33.87	100	338	AVERAGE	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.70</td> <td>74.00</td> <td>22.70</td> <td>91.86</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>338</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	96.70	74.00	22.70	91.86	33.35	5.37	33.88	100	338	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2353.06	45.76	54.00	-8.24	41.08	33.22	5.33	33.87	100	338	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	96.70	74.00	22.70	91.86	33.35	5.37	33.88	100	338	AVERAGE																																																															

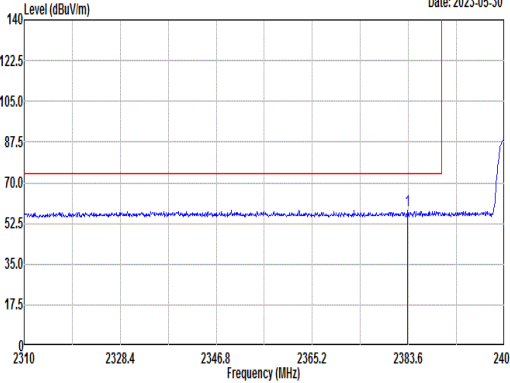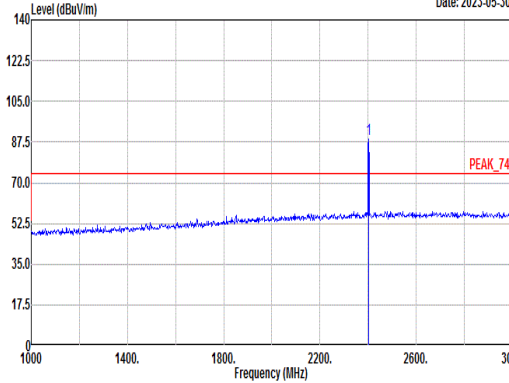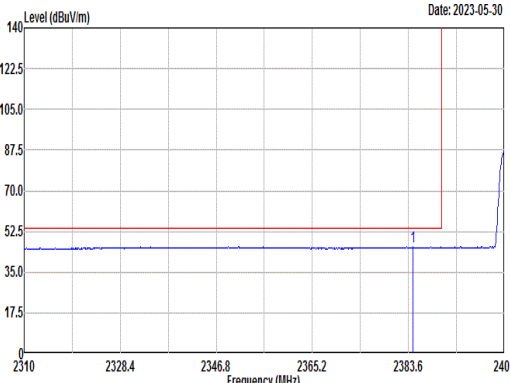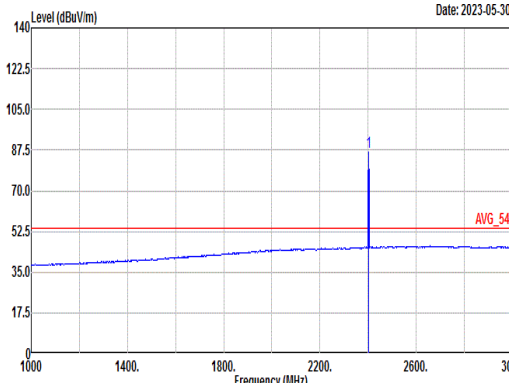

Mode	5																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																									
ANT	17																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. Peak at 2383.6 MHz.</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.42</td> <td>58.33</td> <td>74.00</td> <td>-15.67</td> <td>53.56</td> <td>33.30</td> <td>5.35</td> <td>33.88</td> <td>348</td> <td>40</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2383.42	58.33	74.00	-15.67	53.56	33.30	5.35	33.88	348	40	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Peak at 2402.00 MHz.</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>88.62</td> <td>-----</td> <td>-----</td> <td>83.78</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>348</td> <td>40</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	88.62	-----	-----	83.78	33.35	5.37	33.88	348	40	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2383.42	58.33	74.00	-15.67	53.56	33.30	5.35	33.88	348	40	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	88.62	-----	-----	83.78	33.35	5.37	33.88	348	40	PEAK																																																															
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Vertical polarization. Average level at 2384.43 MHz.</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2384.43</td> <td>45.91</td> <td>54.00</td> <td>-8.09</td> <td>41.14</td> <td>33.30</td> <td>5.35</td> <td>33.88</td> <td>348</td> <td>40</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2384.43	45.91	54.00	-8.09	41.14	33.30	5.35	33.88	348	40	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. Average level at 2402.00 MHz.</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 5 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>86.89</td> <td>-----</td> <td>-----</td> <td>82.05</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>348</td> <td>40</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	86.89	-----	-----	82.05	33.35	5.37	33.88	348	40	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2384.43	45.91	54.00	-8.09	41.14	33.30	5.35	33.88	348	40	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	86.89	-----	-----	82.05	33.35	5.37	33.88	348	40	AVERAGE																																																															





Mode	5																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	17																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Mode : 5 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.36</td> <td>74.00</td> <td>-31.64</td> <td>56.38</td> <td>34.42</td> <td>9.46</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.36	74.00	-31.64	56.38	34.42	9.46	57.90	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL Mode : 5 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.84</td> <td>74.00</td> <td>-31.16</td> <td>56.86</td> <td>34.42</td> <td>9.46</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	42.84	74.00	-31.16	56.86	34.42	9.46	57.90	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4804.00	42.36	74.00	-31.64	56.38	34.42	9.46	57.90	---	---	Peak																																																																							
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4804.00	42.84	74.00	-31.16	56.86	34.42	9.46	57.90	---	---	Peak																																																																							



Mode	6																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																									
ANT	17																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH04-SZ            Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL            Mode : 6            Setting : Default            Plane : Y with Accessories            : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>42.88</td> <td>74.00</td> <td>-31.12</td> <td>56.90</td> <td>34.37</td> <td>9.51</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>44.21</td> <td>74.00</td> <td>-29.79</td> <td>56.44</td> <td>36.04</td> <td>11.24</td> <td>59.51</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	42.88	74.00	-31.12	56.90	34.37	9.51	57.90	---	---	Peak	2	7320.00	44.21	74.00	-29.79	56.44	36.04	11.24	59.51	---	---	Peak	<p>Site : 03CH04-SZ            Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL            Mode : 6            Setting : Default            Plane : Y with Accessories            : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>42.77</td> <td>74.00</td> <td>-31.23</td> <td>56.79</td> <td>34.37</td> <td>9.51</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>43.54</td> <td>74.00</td> <td>-30.46</td> <td>55.77</td> <td>36.04</td> <td>11.24</td> <td>59.51</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	42.77	74.00	-31.23	56.79	34.37	9.51	57.90	---	---	Peak	2	7320.00	43.54	74.00	-30.46	55.77	36.04	11.24	59.51	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4880.00	42.88	74.00	-31.12	56.90	34.37	9.51	57.90	---	---	Peak																																																																																															
2	7320.00	44.21	74.00	-29.79	56.44	36.04	11.24	59.51	---	---	Peak																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4880.00	42.77	74.00	-31.23	56.79	34.37	9.51	57.90	---	---	Peak																																																																																															
2	7320.00	43.54	74.00	-30.46	55.77	36.04	11.24	59.51	---	---	Peak																																																																																															



Mode	7																																																																																	
	Band Edge																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	17																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<p>Level (dBuV/m) vs Frequency (MHz) - Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2494.18</td> <td>59.29</td> <td>74.00</td> <td>-14.71</td> <td>54.14</td> <td>33.58</td> <td>5.47</td> <td>33.90</td> <td>200</td> <td>357</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2494.18	59.29	74.00	-14.71	54.14	33.58	5.47	33.90	200	357	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) - Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.84</td> <td>-----</td> <td>-----</td> <td>94.73</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>200</td> <td>357</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.84	-----	-----	94.73	33.55	5.46	33.90	200	357	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2494.18	59.29	74.00	-14.71	54.14	33.58	5.47	33.90	200	357	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	99.84	-----	-----	94.73	33.55	5.46	33.90	200	357	PEAK																																																																							
Avg	<p>Level (dBuV/m) vs Frequency (MHz) - Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.54</td> <td>49.02</td> <td>54.00</td> <td>-4.98</td> <td>43.90</td> <td>33.56</td> <td>5.46</td> <td>33.90</td> <td>200</td> <td>357</td> <td></td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.54	49.02	54.00	-4.98	43.90	33.56	5.46	33.90	200	357		<p>Level (dBuV/m) vs Frequency (MHz) - Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>99.09</td> <td>-----</td> <td>-----</td> <td>93.98</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>200</td> <td>357</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	99.09	-----	-----	93.98	33.55	5.46	33.90	200	357	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2483.54	49.02	54.00	-4.98	43.90	33.56	5.46	33.90	200	357																																																																								
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	2480.00	99.09	-----	-----	93.98	33.55	5.46	33.90	200	357	AVERAGE																																																																							



Mode	7																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																	
ANT	17																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<p>Level (dBuV/m) vs Frequency (MHz) - Vertical</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2499.58 58.53 74.00 -15.47</td> <td>53.35</td> <td>33.60</td> <td>5.48</td> <td>33.90</td> <td>400</td> <td>284</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2499.58 58.53 74.00 -15.47	53.35	33.60	5.48	33.90	400	284	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) - Fundamental</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>PEAK</th> </tr> </thead> <tbody> <tr> <td>1 2480.00 94.46 -----</td> <td>89.35</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>400</td> <td>284</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK	1 2480.00 94.46 -----	89.35	33.55	5.46	33.90	400	284	PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2499.58 58.53 74.00 -15.47	53.35	33.60	5.48	33.90	400	284	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	PEAK																																																											
1 2480.00 94.46 -----	89.35	33.55	5.46	33.90	400	284	PEAK																																																											
Avg	<p>Level (dBuV/m) vs Frequency (MHz) - Vertical</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2485.34 46.11 54.00 -7.89</td> <td>40.99</td> <td>33.56</td> <td>5.46</td> <td>33.90</td> <td>400</td> <td>284</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2485.34 46.11 54.00 -7.89	40.99	33.56	5.46	33.90	400	284	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) - Fundamental</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>AVERAGE</th> </tr> </thead> <tbody> <tr> <td>1 2480.00 93.32 -----</td> <td>88.21</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>400</td> <td>284</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE	1 2480.00 93.32 -----	88.21	33.55	5.46	33.90	400	284	AVERAGE
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2485.34 46.11 54.00 -7.89	40.99	33.56	5.46	33.90	400	284	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	AVERAGE																																																											
1 2480.00 93.32 -----	88.21	33.55	5.46	33.90	400	284	AVERAGE																																																											



Mode	7																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																	
ANT	17																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 7 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>45.91</td> <td>74.00</td> <td>-28.09</td> <td>53.52</td> <td>33.72</td> <td>8.46</td> <td>49.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>47.71</td> <td>74.00</td> <td>-26.29</td> <td>50.34</td> <td>35.70</td> <td>10.17</td> <td>48.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	4960.00	45.91	74.00	-28.09	53.52	33.72	8.46	49.79	---	---	Peak	2	7440.00	47.71	74.00	-26.29	50.34	35.70	10.17	48.50	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 7 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>47.89</td> <td>74.00</td> <td>-26.11</td> <td>55.50</td> <td>33.72</td> <td>8.46</td> <td>49.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>47.54</td> <td>74.00</td> <td>-26.46</td> <td>50.17</td> <td>35.70</td> <td>10.17</td> <td>48.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	4960.00	47.89	74.00	-26.11	55.50	33.72	8.46	49.79	---	---	Peak	2	7440.00	47.54	74.00	-26.46	50.17	35.70	10.17	48.50	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
1	4960.00	45.91	74.00	-28.09	53.52	33.72	8.46	49.79	---	---	Peak																																																																							
2	7440.00	47.71	74.00	-26.29	50.34	35.70	10.17	48.50	---	---	Peak																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
1	4960.00	47.89	74.00	-26.11	55.50	33.72	8.46	49.79	---	---	Peak																																																																							
2	7440.00	47.54	74.00	-26.46	50.17	35.70	10.17	48.50	---	---	Peak																																																																							



	<b>8</b>																																																																	
<b>Mode</b>	<b>Band Edge</b>																																																																	
<b>ANT</b>	<b>2400-2483.5_Bluetooth-LE_CH00_2402MHz</b>																																																																	
<b>Pol.</b>	<b>Horizontal</b>	<b>Fundamental</b>																																																																
<b>Peak</b>	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2324.81 58.37 74.00 -15.63</td> <td>53.78</td> <td>33.14</td> <td>5.31</td> <td>33.86</td> <td>200</td> <td>353</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2324.81 58.37 74.00 -15.63	53.78	33.14	5.31	33.86	200	353	PEAK	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 98.52</td> <td>93.68</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>200</td> <td>353</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq Level Line (dB) Margin	Level	Factor	Loss	Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2402.00 98.52	93.68	33.35	5.37	33.88	200	353	PEAK
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																											
Freq Level Line Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2324.81 58.37 74.00 -15.63	53.78	33.14	5.31	33.86	200	353	PEAK																																																											
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																											
Freq Level Line (dB) Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2402.00 98.52	93.68	33.35	5.37	33.88	200	353	PEAK																																																											
<b>Avg</b>	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2337.42 48.10 54.00 -5.90</td> <td>43.47</td> <td>33.18</td> <td>5.32</td> <td>33.87</td> <td>200</td> <td>353</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2337.42 48.10 54.00 -5.90	43.47	33.18	5.32	33.87	200	353	AVERAGE	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; font-size:small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 96.55</td> <td>91.71</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>200</td> <td>353</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark	Freq Level Line (dB) Margin	Level	Factor	Loss	Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2402.00 96.55	91.71	33.35	5.37	33.88	200	353	AVERAGE
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																											
Freq Level Line Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2337.42 48.10 54.00 -5.90	43.47	33.18	5.32	33.87	200	353	AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	Apos	Tpos	Remark																																																											
Freq Level Line (dB) Margin	Level	Factor	Loss	Factor	dB	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2402.00 96.55	91.71	33.35	5.37	33.88	200	353	AVERAGE																																																											



Mode	8																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																									
ANT	17																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2335.67</td> <td>58.35</td> <td>74.00</td> <td>-15.65</td> <td>53.74</td> <td>33.17</td> <td>5.31</td> <td>33.87</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2335.67	58.35	74.00	-15.65	53.74	33.17	5.31	33.87	100	0	PEAK	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>91.62</td> <td>-----</td> <td>-----</td> <td>86.78</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	91.62	-----	-----	86.78	33.35	5.37	33.88	100	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2335.67	58.35	74.00	-15.65	53.74	33.17	5.31	33.87	100	0	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	91.62	-----	-----	86.78	33.35	5.37	33.88	100	0	PEAK																																																															
Avg	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2347.72</td> <td>48.12</td> <td>54.00</td> <td>-5.88</td> <td>43.47</td> <td>33.20</td> <td>5.32</td> <td>33.87</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2347.72	48.12	54.00	-5.88	43.47	33.20	5.32	33.87	100	0	AVERAGE	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 8 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>89.71</td> <td>-----</td> <td>-----</td> <td>84.87</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	89.71	-----	-----	84.87	33.35	5.37	33.88	100	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2347.72	48.12	54.00	-5.88	43.47	33.20	5.32	33.87	100	0	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	89.71	-----	-----	84.87	33.35	5.37	33.88	100	0	AVERAGE																																																															



Mode	8																																																																			
	Harmonic																																																																			
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																			
ANT	17																																																																			
Pol.	Horizontal	Vertical																																																																		
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 8 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.55</td> <td>74.00</td> <td>-25.45</td> <td>53.29</td> <td>36.08</td> <td>8.94</td> <td>49.76</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	48.55	74.00	-25.45	53.29	36.08	8.94	49.76	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 8 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.86</td> <td>74.00</td> <td>-25.14</td> <td>53.60</td> <td>36.08</td> <td>8.94</td> <td>49.76</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	48.86	74.00	-25.14	53.60	36.08	8.94	49.76	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1	48.55	74.00	-25.45	53.29	36.08	8.94	49.76	Peak																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																													
1	48.86	74.00	-25.14	53.60	36.08	8.94	49.76	Peak																																																												





Mode	9																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																	
ANT	17																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 9 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>46.75</td> <td>74.00</td> <td>-27.25</td> <td>51.69</td> <td>36.13</td> <td>8.71</td> <td>49.78</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>47.96</td> <td>74.00</td> <td>-26.04</td> <td>50.27</td> <td>36.20</td> <td>10.18</td> <td>48.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	4880.00	46.75	74.00	-27.25	51.69	36.13	8.71	49.78	---	---	Peak	2	7320.00	47.96	74.00	-26.04	50.27	36.20	10.18	48.69	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 9 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>47.58</td> <td>74.00</td> <td>-26.42</td> <td>52.52</td> <td>36.13</td> <td>8.71</td> <td>49.78</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>47.77</td> <td>74.00</td> <td>-26.23</td> <td>50.08</td> <td>36.20</td> <td>10.18</td> <td>48.69</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	1	4880.00	47.58	74.00	-26.42	52.52	36.13	8.71	49.78	---	---	Peak	2	7320.00	47.77	74.00	-26.23	50.08	36.20	10.18	48.69	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
1	4880.00	46.75	74.00	-27.25	51.69	36.13	8.71	49.78	---	---	Peak																																																																							
2	7320.00	47.96	74.00	-26.04	50.27	36.20	10.18	48.69	---	---	Peak																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
1	4880.00	47.58	74.00	-26.42	52.52	36.13	8.71	49.78	---	---	Peak																																																																							
2	7320.00	47.77	74.00	-26.23	50.08	36.20	10.18	48.69	---	---	Peak																																																																							



Mode	10																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																	
ANT	17																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.08</td> <td>61.85</td> <td>74.00</td> <td>-12.15</td> <td>56.73</td> <td>33.56</td> <td>5.46 33.90 198 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	2484.08	61.85	74.00	-12.15	56.73	33.56	5.46 33.90 198 360 PEAK	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>100.03</td> <td>-----</td> <td>-----</td> <td>94.92</td> <td>33.55</td> <td>5.46 33.90 198 360 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	2480.00	100.03	-----	-----	94.92	33.55	5.46 33.90 198 360 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																											
1	2484.08	61.85	74.00	-12.15	56.73	33.56	5.46 33.90 198 360 PEAK																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																											
1	2480.00	100.03	-----	-----	94.92	33.55	5.46 33.90 198 360 PEAK																																																											
Avg	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.68</td> <td>48.84</td> <td>54.00</td> <td>-5.16</td> <td>43.72</td> <td>33.56</td> <td>5.46 33.90 198 360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	2483.68	48.84	54.00	-5.16	43.72	33.56	5.46 33.90 198 360 AVERAGE	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.93</td> <td>-----</td> <td>-----</td> <td>92.82</td> <td>33.55</td> <td>5.46 33.90 198 360 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	2480.00	97.93	-----	-----	92.82	33.55	5.46 33.90 198 360 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																											
1	2483.68	48.84	54.00	-5.16	43.72	33.56	5.46 33.90 198 360 AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																												
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																											
1	2480.00	97.93	-----	-----	92.82	33.55	5.46 33.90 198 360 AVERAGE																																																											



Mode	10																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																	
ANT	17																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2492.52 58.50 74.00 -15.50</td> <td>53.35</td> <td>33.58</td> <td>5.47</td> <td>33.90</td> <td>182</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg			1 2492.52 58.50 74.00 -15.50	53.35	33.58	5.47	33.90	182	308	PEAK	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00 99.79 -----</td> <td>94.68</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>182</td> <td>308</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg			1 2480.00 99.79 -----	94.68	33.55	5.46	33.90	182	308	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg																																																													
1 2492.52 58.50 74.00 -15.50	53.35	33.58	5.47	33.90	182	308	PEAK																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg																																																													
1 2480.00 99.79 -----	94.68	33.55	5.46	33.90	182	308	PEAK																																																											
Avg	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2493.42 48.50 54.00 -5.50</td> <td>43.35</td> <td>33.58</td> <td>5.47</td> <td>33.90</td> <td>182</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg			1 2493.42 48.50 54.00 -5.50	43.35	33.58	5.47	33.90	182	308	AVERAGE	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 10 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00 97.71 -----</td> <td>92.60</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>182</td> <td>308</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg			1 2480.00 97.71 -----	92.60	33.55	5.46	33.90	182	308	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg																																																													
1 2493.42 48.50 54.00 -5.50	43.35	33.58	5.47	33.90	182	308	AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV dB/m	dB	dB	cm	deg																																																													
1 2480.00 97.71 -----	92.60	33.55	5.46	33.90	182	308	AVERAGE																																																											



Mode	10																																																																																					
	Harmonic																																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																					
ANT	17																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<p>Date: 2023-05-25</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 10 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>45.87</td> <td>74.00</td> <td>-28.13</td> <td>53.48</td> <td>33.72</td> <td>8.46</td> <td>49.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>47.72</td> <td>74.00</td> <td>-26.28</td> <td>50.35</td> <td>35.70</td> <td>10.17</td> <td>48.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	4960.00	45.87	74.00	-28.13	53.48	33.72	8.46	49.79	---	---	Peak	2	7440.00	47.72	74.00	-26.28	50.35	35.70	10.17	48.50	---	---	Peak	<p>Date: 2023-05-25</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 10 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>47.91</td> <td>74.00</td> <td>-26.09</td> <td>55.52</td> <td>33.72</td> <td>8.46</td> <td>49.79</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>47.56</td> <td>74.00</td> <td>-26.44</td> <td>50.19</td> <td>35.70</td> <td>10.17</td> <td>48.50</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	1	4960.00	47.91	74.00	-26.09	55.52	33.72	8.46	49.79	---	---	Peak	2	7440.00	47.56	74.00	-26.44	50.19	35.70	10.17	48.50	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																													
1	4960.00	45.87	74.00	-28.13	53.48	33.72	8.46	49.79	---	---	Peak																																																																											
2	7440.00	47.72	74.00	-26.28	50.35	35.70	10.17	48.50	---	---	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg																																																																													
1	4960.00	47.91	74.00	-26.09	55.52	33.72	8.46	49.79	---	---	Peak																																																																											
2	7440.00	47.56	74.00	-26.44	50.19	35.70	10.17	48.50	---	---	Peak																																																																											



Mode	11																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																																																																																																									
ANT	17																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2023-06-05</p> <p>Site : 03CH04-SZ Condition: FCC CLASS-B 3m LF_ANT35408 HORIZONTAL Mode : 11 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>23.64</td><td>40.00</td><td>-16.36</td><td>30.11</td><td>24.90</td><td>0.53</td><td>31.90</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>126.03</td><td>18.37</td><td>43.50</td><td>-25.13</td><td>31.00</td><td>17.81</td><td>1.15</td><td>31.59</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>294.81</td><td>25.84</td><td>46.00</td><td>-20.16</td><td>35.91</td><td>19.25</td><td>1.79</td><td>31.11</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>557.68</td><td>26.98</td><td>46.00</td><td>-19.02</td><td>31.05</td><td>24.37</td><td>2.48</td><td>30.92</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>652.74</td><td>27.39</td><td>46.00</td><td>-18.61</td><td>30.72</td><td>24.96</td><td>2.66</td><td>30.95</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>848.68</td><td>29.32</td><td>46.00</td><td>-16.68</td><td>30.72</td><td>26.55</td><td>3.05</td><td>31.00</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	23.64	40.00	-16.36	30.11	24.90	0.53	31.90	---	---	Peak	2	126.03	18.37	43.50	-25.13	31.00	17.81	1.15	31.59	---	---	Peak	3	294.81	25.84	46.00	-20.16	35.91	19.25	1.79	31.11	---	---	Peak	4	557.68	26.98	46.00	-19.02	31.05	24.37	2.48	30.92	---	---	Peak	5	652.74	27.39	46.00	-18.61	30.72	24.96	2.66	30.95	---	---	Peak	6	848.68	29.32	46.00	-16.68	30.72	26.55	3.05	31.00	---	---	Peak	<p>Date: 2023-06-05</p> <p>Site : 03CH04-SZ Condition: FCC CLASS-B 3m LF_ANT35408 VERTICAL Mode : 11 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>25.18</td><td>40.00</td><td>-14.82</td><td>31.65</td><td>24.90</td><td>0.53</td><td>31.90</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>125.06</td><td>17.46</td><td>43.50</td><td>-26.04</td><td>30.09</td><td>17.83</td><td>1.14</td><td>31.60</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>289.96</td><td>21.90</td><td>46.00</td><td>-24.10</td><td>32.05</td><td>19.20</td><td>1.77</td><td>31.12</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>560.59</td><td>26.74</td><td>46.00</td><td>-19.26</td><td>30.78</td><td>24.40</td><td>2.48</td><td>30.92</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>856.44</td><td>29.03</td><td>46.00</td><td>-16.97</td><td>30.41</td><td>26.57</td><td>3.06</td><td>31.01</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>992.24</td><td>31.94</td><td>54.00</td><td>-22.06</td><td>31.66</td><td>27.53</td><td>3.30</td><td>30.55</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	25.18	40.00	-14.82	31.65	24.90	0.53	31.90	---	---	Peak	2	125.06	17.46	43.50	-26.04	30.09	17.83	1.14	31.60	---	---	Peak	3	289.96	21.90	46.00	-24.10	32.05	19.20	1.77	31.12	---	---	Peak	4	560.59	26.74	46.00	-19.26	30.78	24.40	2.48	30.92	---	---	Peak	5	856.44	29.03	46.00	-16.97	30.41	26.57	3.06	31.01	---	---	Peak	6	992.24	31.94	54.00	-22.06	31.66	27.53	3.30	30.55	---	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	23.64	40.00	-16.36	30.11	24.90	0.53	31.90	---	---	Peak																																																																																																																																																															
2	126.03	18.37	43.50	-25.13	31.00	17.81	1.15	31.59	---	---	Peak																																																																																																																																																															
3	294.81	25.84	46.00	-20.16	35.91	19.25	1.79	31.11	---	---	Peak																																																																																																																																																															
4	557.68	26.98	46.00	-19.02	31.05	24.37	2.48	30.92	---	---	Peak																																																																																																																																																															
5	652.74	27.39	46.00	-18.61	30.72	24.96	2.66	30.95	---	---	Peak																																																																																																																																																															
6	848.68	29.32	46.00	-16.68	30.72	26.55	3.05	31.00	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	25.18	40.00	-14.82	31.65	24.90	0.53	31.90	---	---	Peak																																																																																																																																																															
2	125.06	17.46	43.50	-26.04	30.09	17.83	1.14	31.60	---	---	Peak																																																																																																																																																															
3	289.96	21.90	46.00	-24.10	32.05	19.20	1.77	31.12	---	---	Peak																																																																																																																																																															
4	560.59	26.74	46.00	-19.26	30.78	24.40	2.48	30.92	---	---	Peak																																																																																																																																																															
5	856.44	29.03	46.00	-16.97	30.41	26.57	3.06	31.01	---	---	Peak																																																																																																																																																															
6	992.24	31.94	54.00	-22.06	31.66	27.53	3.30	30.55	---	---	Peak																																																																																																																																																															



Mode	16																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2350.76</td> <td>58.98</td> <td>74.00</td> <td>-15.02</td> <td>54.31</td> <td>33.21</td> <td>5.33</td> <td>33.87</td> <td>396</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2350.76	58.98	74.00	-15.02	54.31	33.21	5.33	33.87	396	30	PEAK	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>97.74</td> <td>-----</td> <td>-----</td> <td>92.90</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>396</td> <td>30</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	97.74	-----	-----	92.90	33.35	5.37	33.88	396	30	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2350.76	58.98	74.00	-15.02	54.31	33.21	5.33	33.87	396	30	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	97.74	-----	-----	92.90	33.35	5.37	33.88	396	30	PEAK																																																															
Avg	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2348.09</td> <td>45.63</td> <td>54.00</td> <td>-8.37</td> <td>40.97</td> <td>33.21</td> <td>5.32</td> <td>33.87</td> <td>396</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2348.09	45.63	54.00	-8.37	40.97	33.21	5.32	33.87	396	30	AVERAGE	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.33</td> <td>-----</td> <td>-----</td> <td>91.49</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>396</td> <td>30</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	96.33	-----	-----	91.49	33.35	5.37	33.88	396	30	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2348.09	45.63	54.00	-8.37	40.97	33.21	5.32	33.87	396	30	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	96.33	-----	-----	91.49	33.35	5.37	33.88	396	30	AVERAGE																																																															



Mode	16																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2387.46</td> <td>58.77</td> <td>74.00</td> <td>-15.23</td> <td>53.98</td> <td>33.31</td> <td>5.36</td> <td>33.88</td> <td>300</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2387.46	58.77	74.00	-15.23	53.98	33.31	5.36	33.88	300	296	PEAK	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>97.51</td> <td>74.00</td> <td>23.51</td> <td>92.67</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>300</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	97.51	74.00	23.51	92.67	33.35	5.37	33.88	300	296	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2387.46	58.77	74.00	-15.23	53.98	33.31	5.36	33.88	300	296	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	97.51	74.00	23.51	92.67	33.35	5.37	33.88	300	296	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2350.85</td> <td>45.81</td> <td>54.00</td> <td>-8.19</td> <td>41.14</td> <td>33.21</td> <td>5.33</td> <td>33.87</td> <td>300</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2350.85	45.81	54.00	-8.19	41.14	33.21	5.33	33.87	300	296	AVERAGE	<p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>96.40</td> <td>54.00</td> <td>42.40</td> <td>91.56</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>300</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	96.40	54.00	42.40	91.56	33.35	5.37	33.88	300	296	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2350.85	45.81	54.00	-8.19	41.14	33.21	5.33	33.87	300	296	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2402.00	96.40	54.00	42.40	91.56	33.35	5.37	33.88	300	296	AVERAGE																																																															



Mode	16																																																																																	
	Harmonic																																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																	
ANT	6																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Mode : 16 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.60</td> <td>74.00</td> <td>-30.40</td> <td>57.62</td> <td>34.42</td> <td>9.46</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.60	74.00	-30.40	57.62	34.42	9.46	57.90	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL Mode : 16 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>43.53</td> <td>74.00</td> <td>-30.47</td> <td>57.55</td> <td>34.42</td> <td>9.46</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4804.00	43.53	74.00	-30.47	57.55	34.42	9.46	57.90	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4804.00	43.60	74.00	-30.40	57.62	34.42	9.46	57.90	---	---	Peak																																																																							
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4804.00	43.53	74.00	-30.47	57.55	34.42	9.46	57.90	---	---	Peak																																																																							





Mode	17																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																									
ANT	6																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Mode : 17 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>43.41</td> <td>74.00</td> <td>-30.59</td> <td>57.43</td> <td>34.37</td> <td>9.51</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>43.37</td> <td>74.00</td> <td>-30.63</td> <td>55.60</td> <td>36.04</td> <td>11.24</td> <td>59.51</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	43.41	74.00	-30.59	57.43	34.37	9.51	57.90	---	---	Peak	2	7320.00	43.37	74.00	-30.63	55.60	36.04	11.24	59.51	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL Mode : 17 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>43.49</td> <td>74.00</td> <td>-30.51</td> <td>57.51</td> <td>34.37</td> <td>9.51</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>43.01</td> <td>74.00</td> <td>-30.99</td> <td>55.24</td> <td>36.04</td> <td>11.24</td> <td>59.51</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	43.49	74.00	-30.51	57.51	34.37	9.51	57.90	---	---	Peak	2	7320.00	43.01	74.00	-30.99	55.24	36.04	11.24	59.51	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4880.00	43.41	74.00	-30.59	57.43	34.37	9.51	57.90	---	---	Peak																																																																																															
2	7320.00	43.37	74.00	-30.63	55.60	36.04	11.24	59.51	---	---	Peak																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4880.00	43.49	74.00	-30.51	57.51	34.37	9.51	57.90	---	---	Peak																																																																																															
2	7320.00	43.01	74.00	-30.99	55.24	36.04	11.24	59.51	---	---	Peak																																																																																															



Mode	18																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																	
ANT	6																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">PEAK_BE_74</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2494.70 58.77 74.00 -15.23</td> <td>53.61</td> <td>33.59</td> <td>5.47</td> <td>33.90</td> <td>359</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2494.70 58.77 74.00 -15.23	53.61	33.59	5.47	33.90	359	0	PEAK	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">PEAK_74</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00 96.23 -----</td> <td>91.12</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>359</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2480.00 96.23 -----	91.12	33.55	5.46	33.90	359	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2494.70 58.77 74.00 -15.23	53.61	33.59	5.47	33.90	359	0	PEAK																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2480.00 96.23 -----	91.12	33.55	5.46	33.90	359	0	PEAK																																																											
Avg	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">AVG_BE_54</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2486.10 46.24 54.00 -7.76</td> <td>41.12</td> <td>33.56</td> <td>5.46</td> <td>33.90</td> <td>359</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2486.10 46.24 54.00 -7.76	41.12	33.56	5.46	33.90	359	0	AVERAGE	<p style="text-align: right;">Date: 2023-05-30</p> <p style="text-align: right;">AVG_54</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2480.00 94.92 -----</td> <td>89.81</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>359</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2480.00 94.92 -----	89.81	33.55	5.46	33.90	359	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line Margin	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2486.10 46.24 54.00 -7.76	41.12	33.56	5.46	33.90	359	0	AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor	Loss Factor	dB	cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2480.00 94.92 -----	89.81	33.55	5.46	33.90	359	0	AVERAGE																																																											



	<b>18</b>																																																																									
<b>Mode</b>	<b>Band Edge</b>																																																																									
	<b>2400-2483.5_Bluetooth-LE_CH39_2480MHz</b>																																																																									
<b>ANT</b>	<b>6</b>																																																																									
<b>Pol.</b>	<b>Vertical</b>	<b>Fundamental</b>																																																																								
<b>Peak</b>	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="text-align:right; color:red; font-weight:bold;">PEAK_BE_74</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; border-collapse: collapse; font-size:small;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2486.90</td> <td>58.52</td> <td>74.00</td> <td>-15.48</td> <td>53.39</td> <td>33.57</td> <td>5.46</td> <td>33.90</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2486.90	58.52	74.00	-15.48	53.39	33.57	5.46	33.90	100	293	PEAK	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="text-align:right; color:red; font-weight:bold;">PEAK_74</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; border-collapse: collapse; font-size:small;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>91.52</td> <td>-----</td> <td>-----</td> <td>86.41</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>100</td> <td>293</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2480.00	91.52	-----	-----	86.41	33.55	5.46	33.90	100	293	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2486.90	58.52	74.00	-15.48	53.39	33.57	5.46	33.90	100	293	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2480.00	91.52	-----	-----	86.41	33.55	5.46	33.90	100	293	PEAK																																																															
<b>Avg</b>	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="text-align:right; color:red; font-weight:bold;">AVG_BE_54</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; border-collapse: collapse; font-size:small;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.48</td> <td>46.17</td> <td>54.00</td> <td>-7.83</td> <td>41.02</td> <td>33.58</td> <td>5.47</td> <td>33.90</td> <td>100</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2490.48	46.17	54.00	-7.83	41.02	33.58	5.47	33.90	100	293	AVERAGE	<p style="text-align:right; font-size:small;">Date: 2023-05-30</p> <p style="text-align:right; color:red; font-weight:bold;">AVG_54</p> <p style="font-size:small;">Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 18 Setting : 125kbps Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1" style="width:100%; border-collapse: collapse; font-size:small;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>90.19</td> <td>-----</td> <td>-----</td> <td>85.08</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>100</td> <td>293</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2480.00	90.19	-----	-----	85.08	33.55	5.46	33.90	100	293	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2490.48	46.17	54.00	-7.83	41.02	33.58	5.47	33.90	100	293	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	2480.00	90.19	-----	-----	85.08	33.55	5.46	33.90	100	293	AVERAGE																																																															



Mode	18																																																																																																									
	Harmonic																																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																									
ANT	6																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 HORIZONTAL Mode : 18 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.47</td> <td>74.00</td> <td>-30.53</td> <td>57.47</td> <td>34.32</td> <td>9.58</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>44.34</td> <td>74.00</td> <td>-29.66</td> <td>56.96</td> <td>35.94</td> <td>11.29</td> <td>59.85</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.47	74.00	-30.53	57.47	34.32	9.58	57.90	---	---	Peak	2	7440.00	44.34	74.00	-29.66	56.96	35.94	11.29	59.85	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117_0107 VERTICAL Mode : 18 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Over</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Limit</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>43.97</td> <td>74.00</td> <td>-30.03</td> <td>57.97</td> <td>34.32</td> <td>9.58</td> <td>57.90</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>43.13</td> <td>74.00</td> <td>-30.87</td> <td>55.75</td> <td>35.94</td> <td>11.29</td> <td>59.85</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Limit	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4960.00	43.97	74.00	-30.03	57.97	34.32	9.58	57.90	---	---	Peak	2	7440.00	43.13	74.00	-30.87	55.75	35.94	11.29	59.85	---	---	Peak
	Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																	
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4960.00	43.47	74.00	-30.53	57.47	34.32	9.58	57.90	---	---	Peak																																																																																															
2	7440.00	44.34	74.00	-29.66	56.96	35.94	11.29	59.85	---	---	Peak																																																																																															
Limit	Over	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																		
Freq	Level	Line	Limit	Level	Factor	Loss	Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	4960.00	43.97	74.00	-30.03	57.97	34.32	9.58	57.90	---	---	Peak																																																																																															
2	7440.00	43.13	74.00	-30.87	55.75	35.94	11.29	59.85	---	---	Peak																																																																																															



<b>19</b>																																																																									
<b>Mode</b>	<b>Band Edge</b>																																																																								
<b>2400-2483.5_Bluetooth-LE_CH00_2402MHz</b>																																																																									
<b>ANT</b>	<b>6</b>																																																																								
<b>Pol.</b>	<b>Horizontal</b>																																																																								
<b>Peak</b>	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2385.53</td> <td>58.25</td> <td>74.00</td> <td>-15.75</td> <td>53.48</td> <td>33.30</td> <td>5.35</td> <td>33.88</td> <td>100</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>80.94</td> <td>-----</td> <td>-----</td> <td>76.10</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>314</td> <td>PEAK</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2385.53	58.25	74.00	-15.75	53.48	33.30	5.35	33.88	100	314	PEAK	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	80.94	-----	-----	76.10	33.35	5.37	33.88	100	314	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																		
1	2385.53	58.25	74.00	-15.75	53.48	33.30	5.35	33.88	100	314	PEAK																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																		
1	2402.00	80.94	-----	-----	76.10	33.35	5.37	33.88	100	314	PEAK																																																														
<b>Avg</b>	<div style="display: flex; justify-content: space-between;"> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 19 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2332.63</td> <td>48.32</td> <td>54.00</td> <td>-5.68</td> <td>43.72</td> <td>33.16</td> <td>5.31</td> <td>33.87</td> <td>100</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> <div style="width: 48%;"> <p style="text-align: right;">Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 19 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>78.66</td> <td>-----</td> <td>-----</td> <td>73.82</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>314</td> <td>AVERAGE</td> </tr> </tbody> </table> </div> </div>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2332.63	48.32	54.00	-5.68	43.72	33.16	5.31	33.87	100	314	AVERAGE	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2402.00	78.66	-----	-----	73.82	33.35	5.37	33.88	100	314	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																		
1	2332.63	48.32	54.00	-5.68	43.72	33.16	5.31	33.87	100	314	AVERAGE																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																		
1	2402.00	78.66	-----	-----	73.82	33.35	5.37	33.88	100	314	AVERAGE																																																														



Mode	19																																																																										
	Band Edge																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																										
ANT	6																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2336.22 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2402 MHz. A red horizontal line indicates the limit at 74.00 dBuV/m. A blue vertical line marks the peak at 2336.22 MHz with a level of 58.44 dBuV/m.</p> <p>Site : 03CH04-SZ          Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz          Mode : 19          Setting : 2M          Plane : Y with Accessories          : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2336.22</td> <td>58.44</td> <td>74.00</td> <td>-15.56</td> <td>53.83</td> <td>33.17</td> <td>5.31</td> <td>33.87</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2336.22	58.44	74.00	-15.56	53.83	33.17	5.31	33.87	100	360	PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot showing a peak at 2402.00 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the limit at 74.00 dBuV/m. A blue vertical line marks the peak at 2402.00 MHz with a level of 88.41 dBuV/m.</p> <p>Site : 03CH04-SZ          Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL          : RBW:1000.000kHz VBW:3000.000kHz          Mode : 19          Setting : 2M          Plane : Y with Accessories          : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>88.41</td> <td>-----</td> <td>-----</td> <td>83.57</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>360</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	88.41	-----	-----	83.57	33.35	5.37	33.88	100	360	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																				
1	2336.22	58.44	74.00	-15.56	53.83	33.17	5.31	33.87	100	360	PEAK																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	2402.00	88.41	-----	-----	83.57	33.35	5.37	33.88	100	360	PEAK																																																																
Avg	<p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 2379.37 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 2310 to 2402 MHz. A red horizontal line indicates the limit at 54.00 dBuV/m. A blue vertical line marks the average level at 2379.37 MHz with a level of 48.16 dBuV/m.</p> <p>Site : 03CH04-SZ          Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL          : RBW:1000.000kHz VBW:10.000kHz          Mode : 19          Setting : 2M          Plane : Y with Accessories          : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2379.37</td> <td>48.16</td> <td>54.00</td> <td>-5.84</td> <td>43.40</td> <td>33.29</td> <td>5.35</td> <td>33.88</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	2379.37	48.16	54.00	-5.84	43.40	33.29	5.35	33.88	100	360	AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) plot showing an average level at 2402.00 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the limit at 74.00 dBuV/m. A blue vertical line marks the average level at 2402.00 MHz with a level of 86.02 dBuV/m.</p> <p>Site : 03CH04-SZ          Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL          : RBW:1000.000kHz VBW:10.000kHz          Mode : 19          Setting : 2M          Plane : Y with Accessories          : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>86.02</td> <td>-----</td> <td>-----</td> <td>81.18</td> <td>33.35</td> <td>5.37</td> <td>33.88</td> <td>100</td> <td>360</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	2402.00	86.02	-----	-----	81.18	33.35	5.37	33.88	100	360	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																				
1	2379.37	48.16	54.00	-5.84	43.40	33.29	5.35	33.88	100	360	AVERAGE																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	2402.00	86.02	-----	-----	81.18	33.35	5.37	33.88	100	360	AVERAGE																																																																



Mode	19																																																																									
	Harmonic																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 19 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>47.98</td> <td>74.00</td> <td>-26.02</td> <td>52.72</td> <td>36.08</td> <td>8.94</td> <td>49.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4804.00	47.98	74.00	-26.02	52.72	36.08	8.94	49.76	---	---	Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 19 Setting : Default Plane : Y with Accessories Plane : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>47.68</td> <td>74.00</td> <td>-26.32</td> <td>52.42</td> <td>36.08</td> <td>8.94</td> <td>49.76</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4804.00	47.68	74.00	-26.32	52.42	36.08	8.94	49.76	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	4804.00	47.98	74.00	-26.02	52.72	36.08	8.94	49.76	---	---	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	4804.00	47.68	74.00	-26.32	52.42	36.08	8.94	49.76	---	---	Peak																																																															



Mode	20																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																					
ANT	6																																																																					
Pol.	Horizontal	Vertical																																																																				
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 20 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>4880.00</td> <td>47.66</td> <td>74.00</td> <td>-26.34</td> <td>52.60</td> <td>36.13</td> <td>8.71</td> <td>49.78</td> <td>--- --- Peak</td> </tr> <tr> <td>7320.00</td> <td>47.11</td> <td>74.00</td> <td>-26.89</td> <td>49.42</td> <td>36.20</td> <td>10.18</td> <td>48.69</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	4880.00	47.66	74.00	-26.34	52.60	36.13	8.71	49.78	--- --- Peak	7320.00	47.11	74.00	-26.89	49.42	36.20	10.18	48.69	--- --- Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 20 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>4880.00</td> <td>48.20</td> <td>74.00</td> <td>-25.80</td> <td>53.14</td> <td>36.13</td> <td>8.71</td> <td>49.78</td> <td>--- --- Peak</td> </tr> <tr> <td>7320.00</td> <td>47.64</td> <td>74.00</td> <td>-26.36</td> <td>49.95</td> <td>36.20</td> <td>10.18</td> <td>48.69</td> <td>--- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	4880.00	48.20	74.00	-25.80	53.14	36.13	8.71	49.78	--- --- Peak	7320.00	47.64	74.00	-26.36	49.95	36.20	10.18	48.69	--- --- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
4880.00	47.66	74.00	-26.34	52.60	36.13	8.71	49.78	--- --- Peak																																																														
7320.00	47.11	74.00	-26.89	49.42	36.20	10.18	48.69	--- --- Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
4880.00	48.20	74.00	-25.80	53.14	36.13	8.71	49.78	--- --- Peak																																																														
7320.00	47.64	74.00	-26.36	49.95	36.20	10.18	48.69	--- --- Peak																																																														





Mode	21																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																									
ANT	6																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.72</td> <td>58.88</td> <td>74.00</td> <td>-15.12</td> <td>53.73</td> <td>33.58</td> <td>5.47</td> <td>33.90</td> <td>400</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2493.72	58.88	74.00	-15.12	53.73	33.58	5.47	33.90	400	10	PEAK	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>98.91</td> <td>-----</td> <td>-----</td> <td>93.80</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>400</td> <td>10</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2480.00	98.91	-----	-----	93.80	33.55	5.46	33.90	400	10	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2493.72	58.88	74.00	-15.12	53.73	33.58	5.47	33.90	400	10	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2480.00	98.91	-----	-----	93.80	33.55	5.46	33.90	400	10	PEAK																																																															
Avg	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.06</td> <td>48.49</td> <td>54.00</td> <td>-5.51</td> <td>43.37</td> <td>33.56</td> <td>5.46</td> <td>33.90</td> <td>400</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2484.06	48.49	54.00	-5.51	43.37	33.56	5.46	33.90	400	10	AVERAGE	<p>Date: 2023-05-30</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>96.76</td> <td>-----</td> <td>-----</td> <td>91.65</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>400</td> <td>10</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2480.00	96.76	-----	-----	91.65	33.55	5.46	33.90	400	10	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2484.06	48.49	54.00	-5.51	43.37	33.56	5.46	33.90	400	10	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2480.00	96.76	-----	-----	91.65	33.55	5.46	33.90	400	10	AVERAGE																																																															



Mode	21																																																																									
	Band Edge																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																									
ANT	6																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Date: 2023-05-30</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH04-SZ Condition: PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.66</td> <td>58.91</td> <td>74.00</td> <td>-15.09</td> <td>53.77</td> <td>33.57</td> <td>5.47</td> <td>33.90</td> <td>291</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2489.66	58.91	74.00	-15.09	53.77	33.57	5.47	33.90	291	0	PEAK	<p>Date: 2023-05-30</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>97.07</td> <td>-----</td> <td>-----</td> <td>91.96</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>291</td> <td>0</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2480.00	97.07	-----	-----	91.96	33.55	5.46	33.90	291	0	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2489.66	58.91	74.00	-15.09	53.77	33.57	5.47	33.90	291	0	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2480.00	97.07	-----	-----	91.96	33.55	5.46	33.90	291	0	PEAK																																																															
Avg	<p>Date: 2023-05-30</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH04-SZ Condition: AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.54</td> <td>48.75</td> <td>54.00</td> <td>-5.25</td> <td>43.60</td> <td>33.58</td> <td>5.47</td> <td>33.90</td> <td>291</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2490.54	48.75	54.00	-5.25	43.60	33.58	5.47	33.90	291	0	AVERAGE	<p>Date: 2023-05-30</p> <p>Level (dBuV/m) vs Frequency (MHz)</p> <p>Site : 03CH04-SZ Condition: AVG_54 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 21 Setting : 2M Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>95.02</td> <td>-----</td> <td>-----</td> <td>89.91</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>291</td> <td>0</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	2480.00	95.02	-----	-----	89.91	33.55	5.46	33.90	291	0	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2490.54	48.75	54.00	-5.25	43.60	33.58	5.47	33.90	291	0	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	2480.00	95.02	-----	-----	89.91	33.55	5.46	33.90	291	0	AVERAGE																																																															



Mode	21																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																					
ANT	6																																																																					
Pol.	Horizontal	Vertical																																																																				
Peak Avg	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL Mode : 21 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>4960.00</td> <td>46.93</td> <td>74.00</td> <td>-27.07</td> <td>52.08</td> <td>36.18</td> <td>8.46</td> <td>49.79</td> <td>--- Peak</td> </tr> <tr> <td>7440.00</td> <td>48.17</td> <td>74.00</td> <td>-25.83</td> <td>50.57</td> <td>35.93</td> <td>10.17</td> <td>48.50</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	4960.00	46.93	74.00	-27.07	52.08	36.18	8.46	49.79	--- Peak	7440.00	48.17	74.00	-25.83	50.57	35.93	10.17	48.50	--- Peak	<p>Site : 03CH04-SZ Condition: PEAK_74 3m HF_ANT_3117(119436) VERTICAL Mode : 21 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> </thead> <tbody> <tr> <td>4960.00</td> <td>45.90</td> <td>74.00</td> <td>-28.10</td> <td>51.05</td> <td>36.18</td> <td>8.46</td> <td>49.79</td> <td>--- Peak</td> </tr> <tr> <td>7440.00</td> <td>48.39</td> <td>74.00</td> <td>-25.61</td> <td>50.79</td> <td>35.93</td> <td>10.17</td> <td>48.50</td> <td>--- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	4960.00	45.90	74.00	-28.10	51.05	36.18	8.46	49.79	--- Peak	7440.00	48.39	74.00	-25.61	50.79	35.93	10.17	48.50	--- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
4960.00	46.93	74.00	-27.07	52.08	36.18	8.46	49.79	--- Peak																																																														
7440.00	48.17	74.00	-25.83	50.57	35.93	10.17	48.50	--- Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
4960.00	45.90	74.00	-28.10	51.05	36.18	8.46	49.79	--- Peak																																																														
7440.00	48.39	74.00	-25.61	50.79	35.93	10.17	48.50	--- Peak																																																														



Mode	22																																																																																																																																																																									
	LF																																																																																																																																																																									
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																																																									
ANT	6																																																																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																																																																								
QP/ Peak	<p>Date: 2023-06-05</p> <p>Site : 03CH04-SZ Condition: FCC CLASS-B 3m LF_ANT35408 HORIZONTAL Mode : 22 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>23.06</td><td>40.00</td><td>-16.94</td><td>29.53</td><td>24.90</td><td>0.53</td><td>31.90</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>123.12</td><td>17.79</td><td>43.50</td><td>-25.71</td><td>30.43</td><td>17.85</td><td>1.13</td><td>31.62</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>294.81</td><td>24.94</td><td>46.00</td><td>-21.06</td><td>35.01</td><td>19.25</td><td>1.79</td><td>31.11</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>612.00</td><td>26.83</td><td>46.00</td><td>-19.17</td><td>30.41</td><td>24.83</td><td>2.58</td><td>30.99</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>730.34</td><td>28.26</td><td>46.00</td><td>-17.74</td><td>30.86</td><td>25.49</td><td>2.81</td><td>30.90</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>942.77</td><td>30.30</td><td>46.00</td><td>-15.70</td><td>30.84</td><td>27.08</td><td>3.22</td><td>30.84</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	23.06	40.00	-16.94	29.53	24.90	0.53	31.90	---	---	Peak	2	123.12	17.79	43.50	-25.71	30.43	17.85	1.13	31.62	---	---	Peak	3	294.81	24.94	46.00	-21.06	35.01	19.25	1.79	31.11	---	---	Peak	4	612.00	26.83	46.00	-19.17	30.41	24.83	2.58	30.99	---	---	Peak	5	730.34	28.26	46.00	-17.74	30.86	25.49	2.81	30.90	---	---	Peak	6	942.77	30.30	46.00	-15.70	30.84	27.08	3.22	30.84	---	---	Peak	<p>Date: 2023-06-05</p> <p>Site : 03CH04-SZ Condition: FCC CLASS-B 3m LF_ANT35408 VERTICAL Mode : 22 Setting : Default Plane : Y with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Line Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr><td>1</td><td>30.00</td><td>23.78</td><td>40.00</td><td>-16.22</td><td>30.25</td><td>24.90</td><td>0.53</td><td>31.90</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>2</td><td>124.09</td><td>18.54</td><td>43.50</td><td>-24.96</td><td>31.17</td><td>17.84</td><td>1.14</td><td>31.61</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>3</td><td>288.99</td><td>22.22</td><td>46.00</td><td>-23.78</td><td>32.38</td><td>19.19</td><td>1.77</td><td>31.12</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>4</td><td>595.51</td><td>27.00</td><td>46.00</td><td>-19.00</td><td>30.69</td><td>24.75</td><td>2.55</td><td>30.99</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>5</td><td>879.72</td><td>29.56</td><td>46.00</td><td>-16.44</td><td>30.86</td><td>26.64</td><td>3.12</td><td>31.06</td><td>---</td><td>---</td><td>Peak</td></tr> <tr><td>6</td><td>935.01</td><td>29.51</td><td>46.00</td><td>-16.49</td><td>30.18</td><td>27.01</td><td>3.21</td><td>30.89</td><td>---</td><td>---</td><td>Peak</td></tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	30.00	23.78	40.00	-16.22	30.25	24.90	0.53	31.90	---	---	Peak	2	124.09	18.54	43.50	-24.96	31.17	17.84	1.14	31.61	---	---	Peak	3	288.99	22.22	46.00	-23.78	32.38	19.19	1.77	31.12	---	---	Peak	4	595.51	27.00	46.00	-19.00	30.69	24.75	2.55	30.99	---	---	Peak	5	879.72	29.56	46.00	-16.44	30.86	26.64	3.12	31.06	---	---	Peak	6	935.01	29.51	46.00	-16.49	30.18	27.01	3.21	30.89	---	---	Peak
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	23.06	40.00	-16.94	29.53	24.90	0.53	31.90	---	---	Peak																																																																																																																																																															
2	123.12	17.79	43.50	-25.71	30.43	17.85	1.13	31.62	---	---	Peak																																																																																																																																																															
3	294.81	24.94	46.00	-21.06	35.01	19.25	1.79	31.11	---	---	Peak																																																																																																																																																															
4	612.00	26.83	46.00	-19.17	30.41	24.83	2.58	30.99	---	---	Peak																																																																																																																																																															
5	730.34	28.26	46.00	-17.74	30.86	25.49	2.81	30.90	---	---	Peak																																																																																																																																																															
6	942.77	30.30	46.00	-15.70	30.84	27.08	3.22	30.84	---	---	Peak																																																																																																																																																															
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Line Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																																																																																																																															
1	30.00	23.78	40.00	-16.22	30.25	24.90	0.53	31.90	---	---	Peak																																																																																																																																																															
2	124.09	18.54	43.50	-24.96	31.17	17.84	1.14	31.61	---	---	Peak																																																																																																																																																															
3	288.99	22.22	46.00	-23.78	32.38	19.19	1.77	31.12	---	---	Peak																																																																																																																																																															
4	595.51	27.00	46.00	-19.00	30.69	24.75	2.55	30.99	---	---	Peak																																																																																																																																																															
5	879.72	29.56	46.00	-16.44	30.86	26.64	3.12	31.06	---	---	Peak																																																																																																																																																															
6	935.01	29.51	46.00	-16.49	30.18	27.01	3.21	30.89	---	---	Peak																																																																																																																																																															



Co-Location

BLE CH39 2480MHz & LTE Band48 (Band Edge @ 3m)

WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																																			
ANT	802.BLE CH39 2480MHz & LTE Band48																																																																			
	Horizontal	Fundamental																																																																		
Peak	<p>Site : 03CH04-SZ Condition : PEAK_BE_74 3m HF_ANT_3117(119436) HORIZONTAL RSM: 1000.0000Hz VBW: 3000.0000Hz Mode : 40 Setting : 120kaps Plane : Y with Accessories 8615850000504186158500005058 LTE B48 IRB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2494.320</td> <td>54.63</td> <td>-19.37</td> <td>74.00</td> <td>49.48</td> <td>33.59</td> <td>5.46</td> <td>33.90</td> <td>175</td> <td>356</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 * 2494.320	54.63	-19.37	74.00	49.48	33.59	5.46	33.90	175	356	Peak	<p>Site : 03CH04-SZ Condition : PEAK_74 3m HF_ANT_3117(119436) HORIZONTAL RSM: 1000.0000Hz VBW: 3000.0000Hz Mode : 40 Setting : 120kaps Plane : Y with Accessories 8615850000504186158500005058 LTE B48 IRB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2480.000</td> <td>100.26</td> <td>26.26</td> <td>74.00</td> <td>95.15</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>175</td> <td>356</td> <td>Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 * 2480.000	100.26	26.26	74.00	95.15	33.55	5.46	33.90	175	356	Peak
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 * 2494.320	54.63	-19.37	74.00	49.48	33.59	5.46	33.90	175	356	Peak																																																										
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 * 2480.000	100.26	26.26	74.00	95.15	33.55	5.46	33.90	175	356	Peak																																																										
Avg.	<p>Site : 03CH04-SZ Condition : AVG_BE_54 3m HF_ANT_3117(119436) HORIZONTAL RSM: 1000.0000Hz VBW: 1.0000Hz Mode : 40 Setting : 120kaps Plane : Y with Accessories 8615850000504186158500005058 LTE B48 IRB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2495.000</td> <td>47.32</td> <td>-6.68</td> <td>54.00</td> <td>42.17</td> <td>35.59</td> <td>5.46</td> <td>33.90</td> <td>175</td> <td>356</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 * 2495.000	47.32	-6.68	54.00	42.17	35.59	5.46	33.90	175	356	Average	<p>Site : 03CH04-SZ Condition : AVG_54 3m HF_ANT_3117(119436) HORIZONTAL RSM: 1000.0000Hz VBW: 1.0000Hz Mode : 40 Setting : 120kaps Plane : Y with Accessories 8615850000504186158500005058 LTE B48 IRB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2480.000</td> <td>98.48</td> <td>44.48</td> <td>54.00</td> <td>95.29</td> <td>33.55</td> <td>5.46</td> <td>33.90</td> <td>175</td> <td>356</td> <td>Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 * 2480.000	98.48	44.48	54.00	95.29	33.55	5.46	33.90	175	356	Average
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 * 2495.000	47.32	-6.68	54.00	42.17	35.59	5.46	33.90	175	356	Average																																																										
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	A/Pos	T/Pos	Remark																																																										
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 * 2480.000	98.48	44.48	54.00	95.29	33.55	5.46	33.90	175	356	Average																																																										




WIFI	2.4GHz 2400~2483.5MHz Band Edge @ 3m																																																													
ANT	802.BLE CH39 2480MHz & LTE Band48																																																													
	Vertical	Fundamental																																																												
<b>Peak</b>	<p>Site : 03CH4-SZ          Condition : PEAK_BE_74 3m HF_ANT_3117(119436) VERTICAL          Mode : 40          Setting : 125kpps          Plane : Y with Accessories          LTE B48 1RB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2483.568</td> <td>55.22</td> <td>-18.78</td> <td>74.00</td> <td>59.18</td> <td>33.56</td> <td>5.46</td> <td>33.98</td> <td>186</td> <td>304 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg		1 * 2483.568	55.22	-18.78	74.00	59.18	33.56	5.46	33.98	186	304 Peak	<p>Site : 03CH4-SZ          Condition : PEAK_74 3m HF_ANT_3117(119436) VERTICAL          Mode : 40          Setting : 125kpps          Plane : Y with Accessories          LTE B48 1RB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2480.000</td> <td>77.85</td> <td>23.85</td> <td>74.00</td> <td>92.74</td> <td>33.55</td> <td>5.46</td> <td>33.98</td> <td>186</td> <td>304 Peak</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg		1 * 2480.000	77.85	23.85	74.00	92.74	33.55	5.46	33.98	186	304 Peak
Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm	dB	dBm	dB	dB	dB	cm	deg																																																						
1 * 2483.568	55.22	-18.78	74.00	59.18	33.56	5.46	33.98	186	304 Peak																																																					
Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm	dB	dBm	dB	dB	dB	cm	deg																																																						
1 * 2480.000	77.85	23.85	74.00	92.74	33.55	5.46	33.98	186	304 Peak																																																					
<b>Avg.</b>	<p>Site : 03CH4-SZ          Condition : AVG_BE_54 3m HF_ANT_3117(119436) VERTICAL          Mode : 40          Setting : 125kpps          Plane : Y with Accessories          LTE B48 1RB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2483.088</td> <td>47.24</td> <td>-6.76</td> <td>54.00</td> <td>42.12</td> <td>33.36</td> <td>5.46</td> <td>33.98</td> <td>186</td> <td>304 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg		1 * 2483.088	47.24	-6.76	54.00	42.12	33.36	5.46	33.98	186	304 Average	<p>Site : 03CH4-SZ          Condition : AVG_54 3m HF_ANT_3117(119436) VERTICAL          Mode : 40          Setting : 125kpps          Plane : Y with Accessories          LTE B48 1RB0 QPSK</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level Factor</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBm</th> <th>dB</th> <th>dBm</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 * 2480.000</td> <td>46.84</td> <td>42.84</td> <td>54.00</td> <td>90.93</td> <td>33.55</td> <td>5.46</td> <td>33.98</td> <td>186</td> <td>304 Average</td> </tr> </tbody> </table>	Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark	MHz	dBm	dB	dBm	dB	dB	dB	cm	deg		1 * 2480.000	46.84	42.84	54.00	90.93	33.55	5.46	33.98	186	304 Average
Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm	dB	dBm	dB	dB	dB	cm	deg																																																						
1 * 2483.088	47.24	-6.76	54.00	42.12	33.36	5.46	33.98	186	304 Average																																																					
Freq	Level	Limit	Line	Level Factor	Cable	Preamp	A/Pos	T/Pos	Remark																																																					
MHz	dBm	dB	dBm	dB	dB	dB	cm	deg																																																						
1 * 2480.000	46.84	42.84	54.00	90.93	33.55	5.46	33.98	186	304 Average																																																					



## Appendix D. Duty Cycle Plots


Ant	Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Ant 17	Bluetooth LE 2Mbps	33.33	0.21	4.762	10 KHz
Ant 17	Bluetooth LE 125kbps	82.67	3.10	0.323	1 KHz
Ant 6	Bluetooth LE 2Mbps	33.33	0.21	4.762	10 KHz
Ant 6	Bluetooth LE 125kbps	82.67	3.10	0.323	1 KHz

Ant.17\_Bluetooth LE 2Mbps

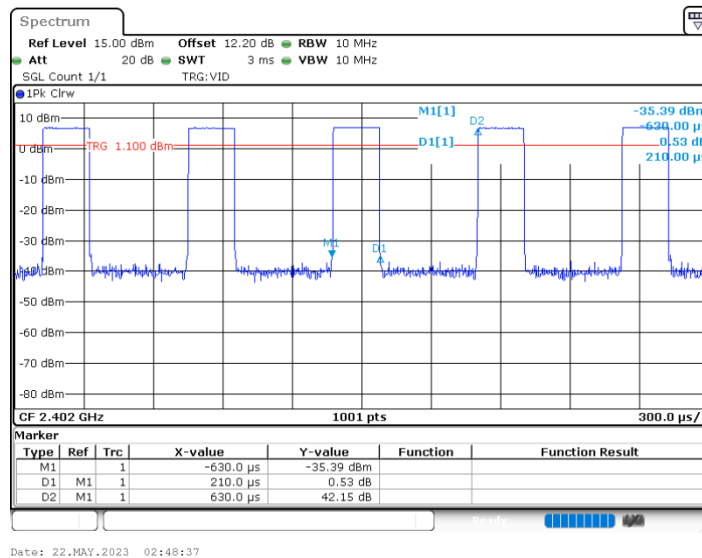

Date: 22.MAY.2023 02:48:37


Ant.17\_Bluetooth LE 125kbps

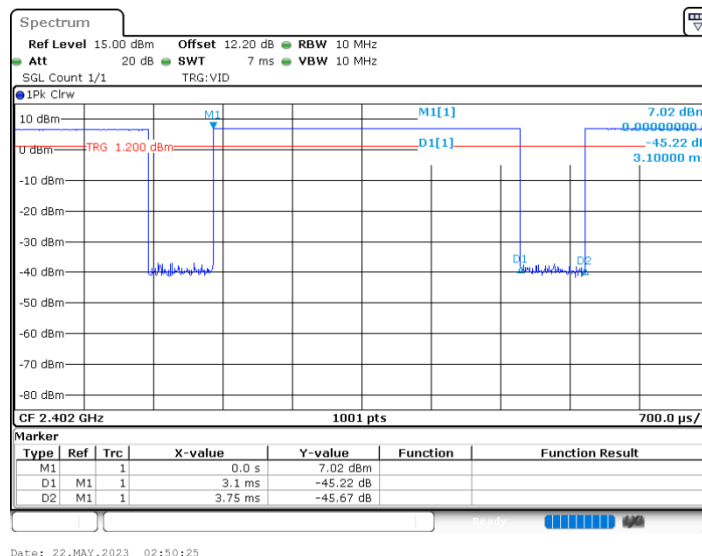

Date: 22.MAY.2023 02:50:25




Ant.6\_Bluetooth LE 2Mbps

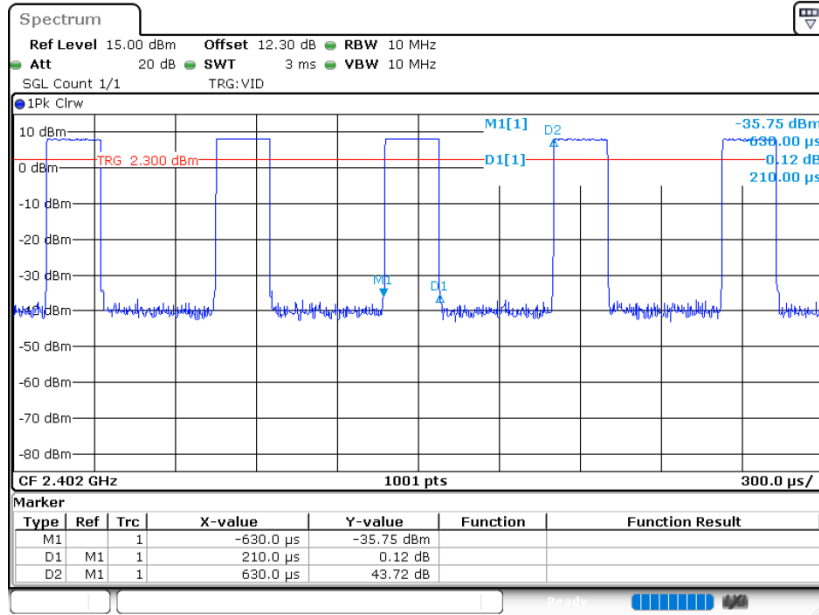

Date: 22.MAY.2023 02:56:59

Ant.6\_Bluetooth LE 125kbps

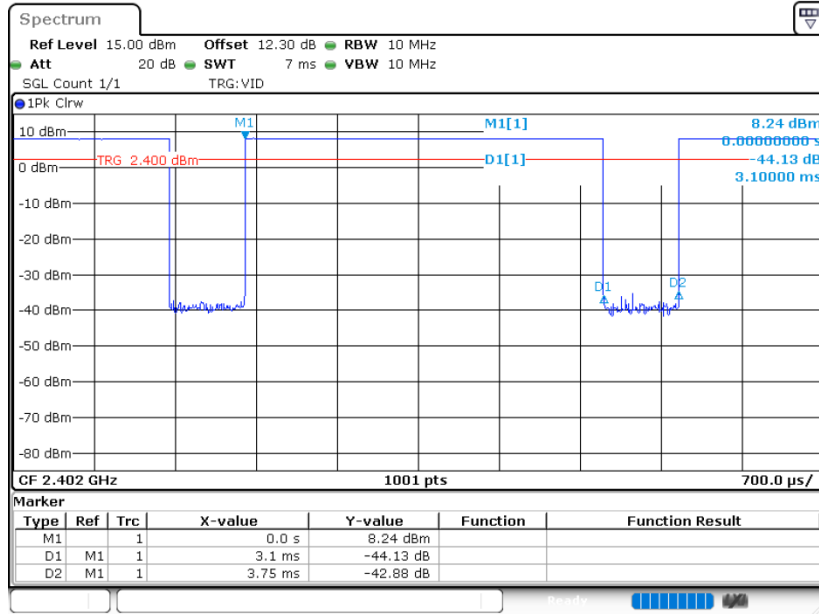

Date: 22.MAY.2023 02:59:11