




Test Data

Maximum Conducted Output Power

Condition	Mode	Frequency	Antenna	Conducted Power	Duty Factor	Total Power	Limit	Verdict
		(MHz)		(dBm)	(dB)	(dBm)	(dBm)	
NVNT	BLE	2402	Ant1	0.935	0	0.935	30	Pass
NVNT	BLE	2442	Ant1	1.092	0	1.092	30	Pass
NVNT	BLE	2480	Ant1	-1.871	0	-1.871	30	Pass



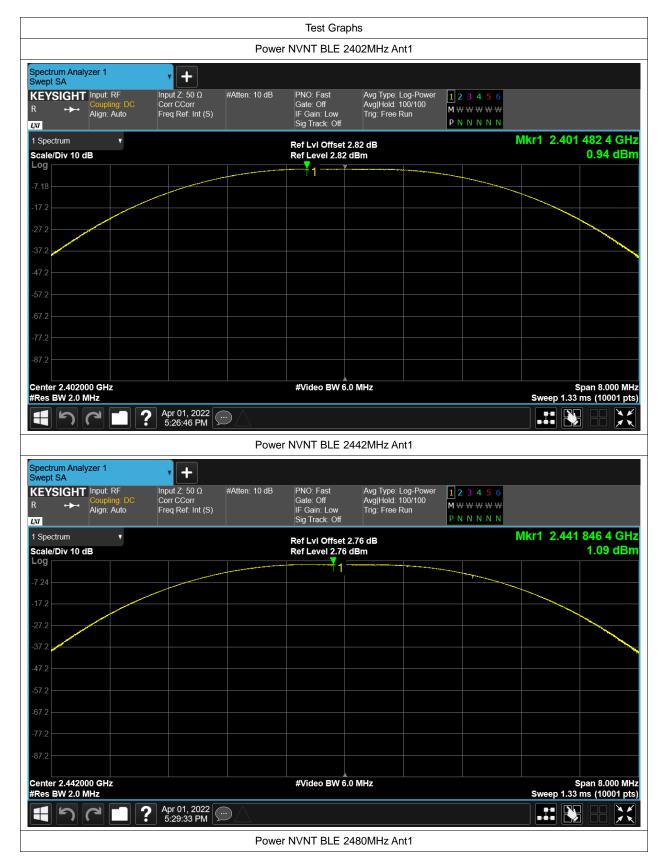









-6dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE	2402	Ant1	1.138	0.5	Pass
NVNT	BLE	2442	Ant1	1.144	0.5	Pass
NVNT	BLE	2480	Ant1	1.149	0.5	Pass













Occupied Channel Bandwidth

Condition Mode		Frequency (MHz)	Antenna	99% OBW (MHz)	
NVNT	BLE	2402	Ant1	2.010230461	
NVNT	BLE	2442	Ant1	2.002096851	
NVNT	BLE	2480	Ant1	2.011297462	















Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Max PSD (dBm)	Limit (dBm)	Verdict
NVNT	BLE	2402	Ant1	-16.829	8	Pass
NVNT	BLE	2442	Ant1	-16.759	8	Pass
NVNT	BLE	2480	Ant1	-19.719	8	Pass



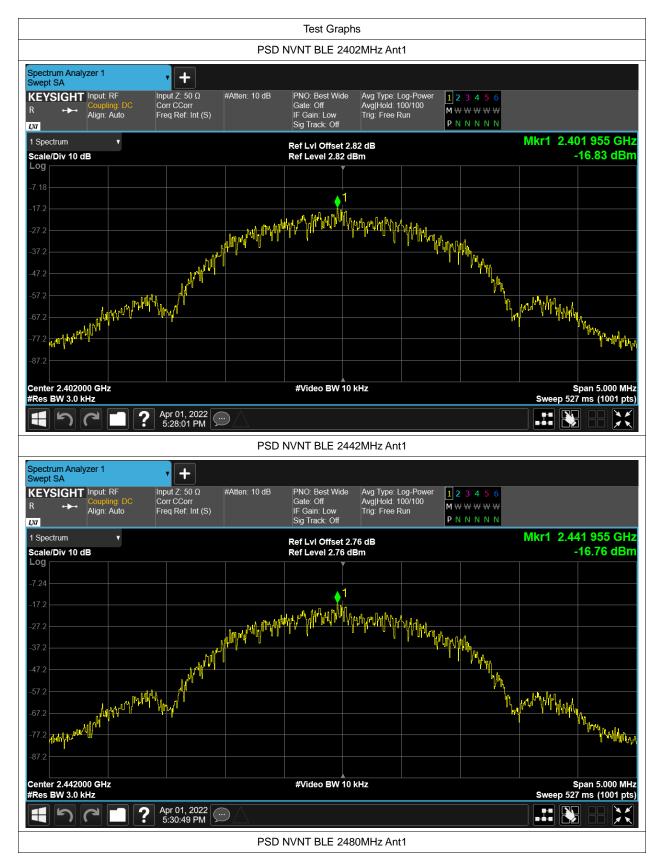



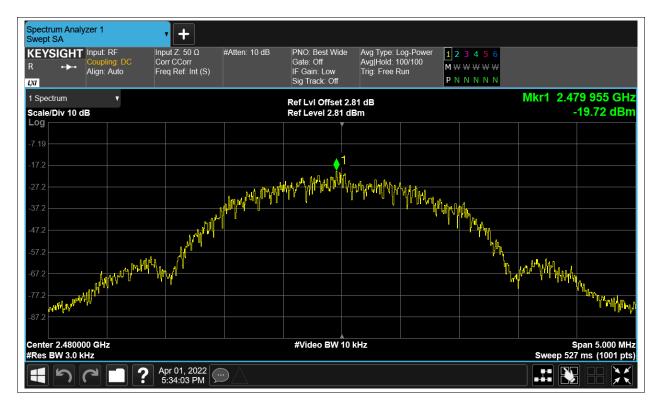






Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-56.09	-20	Pass
NVNT	BLE	2480	Ant1	-68.27	-20	Pass







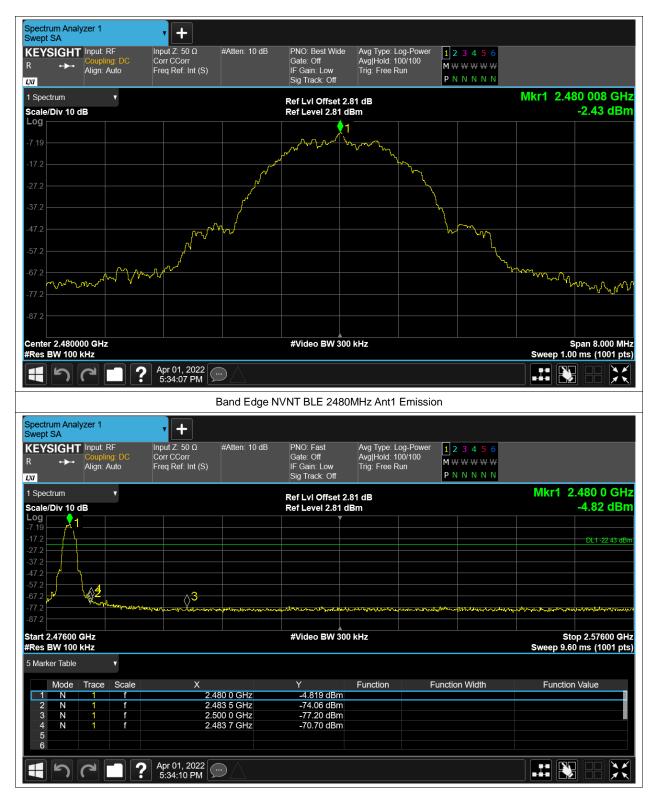





Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE	2402	Ant1	-68.92	-20	Pass
NVNT	BLE	2442	Ant1	-69.49	-20	Pass
NVNT	BLE	2480	Ant1	-66.26	-20	Pass



