



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 37	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT20	CH165	5825	MCS0	Full	-
Mode 38	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT40	CH151	5755	MCS0	Full	-
Mode 39	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT40	CH159	5795	MCS0	Full	-
Mode 40	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT80	CH155	5775	MCS0	Full	-
Mode 45	5.15-5.25	UNII 1	CDD 5+18	802.11be EHT20	CH36	5180	MCS0	Single RU	106/53
Mode 46	5.15-5.25	UNII 2A	CDD 5+18	802.11be EHT20	CH64	5320	MCS0	Single RU	52/40
Mode 47	5.25-5.35	UNII 2C	CDD 5+18	802.11be EHT20	CH100	5500	MCS0	Single RU	52/37
Mode 48	5.25-5.35	UNII 2C	CDD 5+18	802.11be EHT20	CH140	5700	MCS0	Single RU	106/54
Mode 49	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT20	CH149	5745	MCS0	Single RU	106/53
Mode 50	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT20	CH165	5825	MCS0	Single RU	52/40
Mode 51	5.15-5.25	UNII 1	CDD 5+18	802.11be EHT20	CH36	5180	MCS0	Small RU	52/26-①
Mode 52	5.25-5.35	UNII 2A	CDD 5+18	802.11be EHT20	CH64	5320	MCS0	Small RU	52/26-③
Mode 53	5.47-5.725	UNII 2C	CDD 5+18	802.11be EHT20	CH100	5500	MCS0	Small RU	52/26-①
Mode 54	5.47-5.725	UNII 2C	CDD 5+18	802.11be EHT20	CH140	5700	MCS0	Small RU	106/26-②
Mode 55	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT20	CH149	5745	MCS0	Small RU	106/26-①
Mode 56	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT20	CH165	5825	MCS0	Small RU	106/26-②
Mode 57	5.15-5.25	UNII 1	CDD 5+18	802.11be EHT80	CH42	5210	MCS0	Puncturing20M	④
Mode 58	5.25-5.35	UNII 2A	CDD 5+18	802.11be EHT80	CH58	5290	MCS0	Puncturing20M	①
Mode 59	5.47-5.725	UNII 2C	CDD 5+18	802.11be EHT80	CH106	5530	MCS0	Puncturing20M	④
Mode 60	5.15-5.35	UNII 1-2A	CDD 5+18	802.11be EHT160	CH50	5250	MCS0	Puncturing 20M	⑥



Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 61	5.15-5.35	UNII 1-2A	CDD 5+18	802.11be EHT160	CH50	5250	MCS0	Puncturing 40M	③
Mode 62	5.15-5.35	UNII 2C	CDD 5+18	802.11be EHT160	CH114	5570	MCS0	Puncturing 20M	⑧
Mode 63	5.15-5.35	UNII 2C	CDD 5+18	802.11be EHT160	CH114	5570	MCS0	Puncturing 40M	④
Mode 64	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT80	CH155	5775	MCS0	Puncturing 20M	②
Mode 65	5.15-5.25	UNII 1	CDD 5+18	802.11be EHT80	CH42	5210	MCS0	Large RU 484+242	④
Mode 66	5.25-5.35	UNII 2A	CDD 5+18	802.11be EHT80	CH58	5290	MCS0	Large RU 484+242	①
Mode 67	5.47-5.725	UNII 2C	CDD 5+18	802.11be EHT80	CH106	5530	MCS0	Large RU 484+242	④
Mode 69	5.15-5.35	UNII 1-2A	CDD 5+18	802.11be EHT160	CH50	5250	MCS0	Large RU 484+242	①
Mode 70	5.15-5.35	UNII 1-2A	CDD 5+18	802.11be EHT160	CH50	5250	MCS0	Large RU 996+484+242	②
Mode 71	5.15-5.35	UNII 1-2A	CDD 5+18	802.11be EHT160	CH114	5570	MCS0	Large RU 996+484	④
Mode 72	5.15-5.35	UNII 1-2A	CDD 5+18	802.11be EHT160	CH114	5570	MCS0	Large RU 996+484+242	⑧
Mode 73	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT80	CH155	5775	MCS0	Large RU 484+242	②
Mode 74	5.47-5.725	UNII 2C	CDD 5+18	802.11be EHT20	CH140	5700	MCS0	Full	LF
Mode 75	5.725-5.85	UNII 3	CDD 5+18	802.11be EHT80	CH155	5775	MCS0	Large RU 484+242_②	LF

Co-location mode

WLAN 2.4G 802.11g CH01 Tx + WLAN 5G 802.11be EHT20 CH140 Tx + LTE Band 48 Link

WLAN 2.4G 802.11g CH01 Tx + WLAN 5G 802.11be EHT20 CH140 Tx + BLE(2M) Ch39 Tx + LTE Band 48 Link



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	CH36	5149.94	47.43	54.00	-6.57	H	AVERAGE	Pass	Band Edge
	802.11a	CH36	10360.00	61.73	68.30	-6.57	H	Peak	Pass	Harmonic
2	802.11a	CH44	-	-	-	-	-	-	-	Band Edge
	802.11a	CH44	10440.00	60.44	68.30	-7.86	H	Peak	Pass	Harmonic
3	802.11a	CH48	-	-	-	-	-	-	-	Band Edge
	802.11a	CH48	10480.00	60.66	68.30	-7.64	V	Peak	Pass	Harmonic
4	802.11a	CH52	-	-	-	-	-	-	-	Band Edge
	802.11a	CH52	10520.00	59.38	68.3	-8.92	V	Peak	Pass	Harmonic
5	802.11a	CH60	-	-	-	-	-	-	-	Band Edge
	802.11a	CH60	10600.00	55.53	74.00	-18.47	H	Peak	Pass	Harmonic
6	802.11a	CH64	5350.10	49.73	54.00	-4.27	H	AVERAGE	Pass	Band Edge
	802.11a	CH64	10640.00	46.28	54.00	-7.72	H	Average	Pass	Harmonic
7	802.11a	CH100	5459.80	41.45	54.00	-12.55	H	AVERAGE	Pass	Band Edge
	802.11a	CH100	16500.00	52.86	68.30	-15.44	H	Peak	Pass	Harmonic
8	802.11a	CH116	-	-	-	-	-	-	-	Band Edge
	802.11a	CH116	16740.00	52.14	68.30	-16.16	V	Peak	Pass	Harmonic
9	802.11a	CH140	5725.16	55.16	68.30	-13.14	H	PEAK	Pass	Band Edge
	802.11a	CH140	17100.00	50.97	68.30	-17.33	H	Peak	Pass	Harmonic
10	802.11be EHT20	CH36	5149.58	49.88	54.00	-4.12	H	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH36	10360.00	58.75	68.30	-9.55	H	Peak	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
11	802.11be EHT20	CH44	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	CH44	10440.00	59.42	68.30	-8.88	H	Peak	Pass	Harmonic
12	802.11be EHT20	CH48	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	CH48	10480.00	58.65	68.30	-9.65	H	Peak	Pass	Harmonic
13	802.11be EHT20	CH52	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	CH52	10520.00	58.61	68.30	-9.69	H	Peak	Pass	Harmonic
14	802.11be EHT20	CH60	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	CH60	10600.00	48.77	54.00	-5.23	H	Average	Pass	Harmonic
15	802.11be EHT20	CH64	5350.38	48.12	54.00	-5.88	H	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH64	10640.00	45.86	54.00	-8.14	H	Average	Pass	Harmonic
16	802.11be EHT20	CH100	5469.70	63.91	68.30	-4.39	H	PEAK	Pass	Band Edge
	802.11be EHT20	CH100	16500.00	50.95	68.30	-17.35	V	Peak	Pass	Harmonic
17	802.11be EHT20	CH116	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	CH116	16740.00	50.56	68.30	-17.74	H	Peak	Pass	Harmonic
18	802.11be EHT20	CH140	5725.16	64.99	68.30	-3.31	H	PEAK	Pass	Band Edge
	802.11be EHT20	CH140	17100.00	50.37	68.30	-17.93	H	Peak	Pass	Harmonic
19	802.11be EHT40	CH38	5148.58	49.13	54.00	-4.87	H	AVERAGE	Pass	Band Edge
	802.11be EHT40	CH38	10380.00	50.83	68.30	-17.47	V	Peak	Pass	Harmonic
20	802.11be EHT40	CH46	5142.14	45.58	54.00	-8.42	V	AVERAGE	Pass	Band Edge
	802.11be EHT40	CH46	10460.00	50.83	68.30	-17.47	H	Peak	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
21	802.11be EHT40	CH54	5353.98	44.30	54.00	-9.70	H	AVERAGE	Pass	Band Edge
	802.11be EHT40	CH54	10540.00	55.27	68.30	-13.03	H	Peak	Pass	Harmonic
22	802.11be EHT40	CH62	5350.95	50.37	54.00	-3.63	H	AVERAGE	Pass	Band Edge
	802.11be EHT40	CH62	10620.00	50.95	74.00	-23.05	H	Peak	Pass	Harmonic
23	802.11be EHT40	CH102	5469.52	63.41	68.30	-4.89	H	PEAK	Pass	Band Edge
	802.11be EHT40	CH102	16530.00	50.85	68.30	-17.45	H	Peak	Pass	Harmonic
24	802.11be EHT40	CH110	-	-	-	-	-	-	-	Band Edge
	802.11be EHT40	CH110	16650.00	50.95	68.30	-17.35	V	Peak	Pass	Harmonic
25	802.11be EHT40	CH134	5725.48	64.33	68.30	-3.97	H	PEAK	Pass	Band Edge
	802.11be EHT40	CH134	17010.00	50.50	68.30	-17.80	H	Peak	Pass	Harmonic
26	802.11be EHT80	CH42	5145.95	50.00	54.00	-4.00	V	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH42	10420.00	50.96	68.30	-17.34	H	Peak	Pass	Harmonic
27	802.11be EHT80	CH58	5358.17	50.16	54.00	-3.84	H	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH58	10580.00	50.73	68.30	-17.57	H	Peak	Pass	Harmonic
28	802.11be EHT80	CH106	5457.28	49.69	54.00	-4.31	H	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH106	16590.00	50.95	68.30	-17.35	H	Peak	Pass	Harmonic
29	802.11be EHT80	CH122	5459.72	44.43	54.00	-9.57	H	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH122	16830.00	50.73	68.30	-17.57	V	Peak	Pass	Harmonic
30	802.11be EHT160	CH50	5145.00	50.42	54.00	-3.58	H	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH50	10500.00	50.92	68.30	-17.38	H	Peak	Pass	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
31	802.11be EHT160	CH114	5459.12	50.38	54.00	-3.62	H	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH114	16710.00	50.56	68.30	-17.74	H	Peak	Pass	Harmonic
32	802.11a	CH149	5607.11	52.93	68.30	-15.37	H	PEAK	Pass	Band Edge
	802.11a	CH149	17235.00	51.13	68.30	-17.17	H	Peak	Pass	Harmonic
33	802.11a	CH157	-	-	-	-	-	-	-	Band Edge
	802.11a	CH157	17355.00	50.87	68.30	-17.43	V	Peak	Pass	Harmonic
34	802.11a	CH165	5929.38	53.61	68.30	-14.69	V	PEAK	Pass	Band Edge
	802.11a	CH165	17475.00	50.67	68.30	-17.63	V	Peak	Pass	Harmonic
35	802.11be EHT20	CH149	5634.08	53.62	68.30	-14.68	V	PEAK	Pass	Band Edge
	802.11be EHT20	CH149	17235.00	50.79	68.30	-17.51	V	Peak	Pass	Harmonic
36	802.11be EHT20	CH157	-	-	-	-	-	-	-	Band Edge
	802.11be EHT20	CH157	17355.00	50.22	68.30	-18.08	H	Peak	Pass	Harmonic
37	802.11be EHT20	CH165	5928.25	54.53	68.30	-13.77	V	PEAK	Pass	Band Edge
	802.11be EHT20	CH165	17475.00	50.64	68.30	-17.66	V	Peak	Pass	Harmonic
38	802.11be EHT40	CH151	5938.69	55.14	68.30	-13.16	V	PEAK	Pass	Band Edge
	802.11be EHT40	CH151	17265.00	50.77	68.30	-17.53	H	Peak	Pass	Harmonic
39	802.11be EHT40	CH159	5943.65	54.57	68.30	-13.73	V	PEAK	Pass	Band Edge
	802.11be EHT40	CH159	17385.00	50.98	68.30	-17.32	H	Peak	Pass	Harmonic
40	802.11be EHT80	CH155	5649.70	55.17	68.30	-13.13	V	PEAK	Pass	Band Edge
	802.11be EHT80	CH155	17325.00	50.97	68.30	-17.33	V	Peak	Pass	Harmonic



Mode 41 UNII-2C - Straddle Channel

WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
5+18		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz		5439.1	51.69	-22.31	74	37.66	34.65	9.88	30.5	100	297	P	H
		5460	51.01	-17.29	68.3	36.97	34.66	9.88	30.5	100	297	P	H
	*	5720	104.81	-----	-----	90.22	35.06	10.12	30.59	100	297	P	H
		5897.25	53.63	-14.67	68.3	38.72	35.33	10.24	30.66	100	297	P	H
		5455.6	42.1	-11.9	54	28.06	34.66	9.88	30.5	100	297	A	H
		5720	97.53	-----	-----	82.94	35.06	10.12	30.59	100	297	A	H
		5391.8	51.71	-22.29	74	37.76	34.61	9.84	30.5	337	204	P	V
		5469.35	51.08	-17.22	68.3	36.99	34.67	9.92	30.5	337	204	P	V
	*	5720	101.38	-----	-----	86.79	35.06	10.12	30.59	337	204	P	V
		5875.25	53.58	-14.72	68.3	38.71	35.31	10.21	30.65	337	204	P	V
		5456.7	42.1	-11.9	54	28.06	34.66	9.88	30.5	337	204	A	V
		5720	94.19	-----	-----	79.6	35.06	10.12	30.59	337	204	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Mode 41 UNII-2C - Straddle Channel

WIFI 802.11a (Harmonic @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
5+18		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz		11440	49.69	-24.31	74	55.39	38.53	13.71	57.94	-	-	P	H
		17160	50.67	-17.63	68.3	49.62	41.27	16.55	56.77	-	-	P	H
		11440	49.34	-24.66	74	55.04	38.53	13.71	57.94	-	-	P	V
		17160	50.57	-17.73	68.3	49.52	41.27	16.55	56.77	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Mode 42 UNII-2C - Straddle Channel
WIFI 802.11BE EHT20 (Band Edge @ 3m)

WIFI Ant. 5+18	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802.11BE EHT20CH 144 5720MHz		5407.75	51.77	-22.23	74	37.81	34.62	9.84	30.5	100	296	P	H
		5460.55	51.58	-16.72	68.3	37.54	34.66	9.88	30.5	100	296	P	H
	*	5720	113.39	-----	-----	98.8	35.06	10.12	30.59	100	296	P	H
		5879.1	53.1	-15.2	68.3	38.23	35.31	10.21	30.65	100	296	P	H
		5457.8	42.37	-11.63	54	28.33	34.66	9.88	30.5	100	296	A	H
		5720	103.66	-----	-----	89.07	35.06	10.12	30.59	100	296	A	H
		5441.85	51.72	-22.28	74	37.69	34.65	9.88	30.5	305	201	P	V
		5463.85	50.13	-18.17	68.3	36.08	34.67	9.88	30.5	305	201	P	V
	*	5720	106.66	-----	-----	92.07	35.06	10.12	30.59	305	201	P	V
		5891.2	53.16	-15.14	68.3	38.27	35.33	10.21	30.65	305	201	P	V
		5452.85	42.05	-11.95	54	28.01	34.66	9.88	30.5	305	201	A	V
		5720	99.1	-----	-----	84.51	35.06	10.12	30.59	305	201	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Mode 42 UNII-2C - Straddle Channel
WIFI 802.11BE EHT20 (Harmonic @ 3m)

WIFI Ant. 5+18	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802.11BE EHT20 CH 144 5720MHz		11440	48.97	-25.03	74	54.67	38.53	13.71	57.94	-	-	P	H
		17160	49.15	-19.15	68.3	48.1	41.27	16.55	56.77	-	-	P	H
		11440	49.65	-24.35	74	55.35	38.53	13.71	57.94	-	-	P	V
		17160	50.68	-17.62	68.3	49.63	41.27	16.55	56.77	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Mode 43 UNII-2C - Straddle Channel
WIFI 802.11BE EHT 40 (Band Edge @ 3m)

WIFI Ant. 5+18	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802.11BE EHT 40 CH 142 5710MHz		5442.95	51.12	-22.88	74	37.09	34.65	9.88	30.5	100	294	P	H
		5462.75	50.87	-17.43	68.3	36.82	34.67	9.88	30.5	100	294	P	H
	*	5710	107.59	-----	-----	93.02	35.03	10.12	30.58	100	294	P	H
		5872.5	52.76	-15.54	68.3	37.89	35.31	10.21	30.65	100	294	P	H
		5450.65	42.74	-11.26	54	28.7	34.66	9.88	30.5	100	294	A	H
		5710	99.62	-----	-----	85.05	35.03	10.12	30.58	100	294	A	H
		5356.6	51.04	-22.96	74	37.12	34.58	9.84	30.5	275	360	P	V
		5468.25	52.47	-15.83	68.3	38.38	34.67	9.92	30.5	275	360	P	V
	*	5710	95.82	-----	-----	81.25	35.03	10.12	30.58	275	360	P	V
		5853.25	52.8	-15.5	68.3	38	35.25	10.19	30.64	275	360	P	V
		5449	42.84	-11.16	54	28.8	34.66	9.88	30.5	275	360	A	V
		5710	88.61	-----	-----	74.04	35.03	10.12	30.58	275	360	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Mode 43 UNII-2C - Straddle Channel
WIFI 802.11BE EHT 40 (Harmonic @ 3m)

WIFI Ant. 5+18	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802.11BE EHT 40 CH 142 5710MHz		11420	49.1	-24.9	74	54.82	38.52	13.71	57.95	-	-	P	H
		17130	50.2	-18.1	68.3	49.13	41.25	16.55	56.73	-	-	P	H
		11420	48.28	-25.72	74	54	38.52	13.71	57.95	-	-	P	V
		17130	50.23	-18.07	68.3	49.16	41.25	16.55	56.73	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Mode 44 UNII-2C - Straddle Channel
WIFI 802.11BE EHT 80 (Band Edge @ 3m)

WIFI Ant. 5+18	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802.11BE EHT 80 CH 138 5690MHz		5425.35	51.76	-22.24	74	37.79	34.63	9.84	30.5	100	296	P	H
		5461.1	50.79	-17.51	68.3	36.75	34.66	9.88	30.5	100	296	P	H
	*	5690	103.17	-----	-----	88.66	35	10.09	30.58	100	296	P	H
		5887.9	54.39	-13.91	68.3	39.5	35.33	10.21	30.65	100	296	P	H
		5440.75	44.41	-9.59	54	30.38	34.65	9.88	30.5	100	296	A	H
		5690	96.04	-----	-----	81.53	35	10.09	30.58	100	296	A	H
		5405.55	51.42	-22.58	74	37.46	34.62	9.84	30.5	275	211	P	V
		5466.6	52.37	-15.93	68.3	38.28	34.67	9.92	30.5	275	211	P	V
	*	5690	99.52	-----	-----	85.01	35	10.09	30.58	275	211	P	V
		5872.5	53.07	-15.23	68.3	38.2	35.31	10.21	30.65	275	211	P	V
		5447.9	44.16	-9.84	54	30.12	34.66	9.88	30.5	275	211	A	V
	5690	91.53	-----	-----	77.02	35	10.09	30.58	275	211	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

Mode 44 UNII-2C - Straddle Channel
WIFI 802.11BE EHT 80 (Harmonic @ 3m)

WIFI Ant. 5+18	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
WIFI 802.11BE EHT 80 CH 138 5690MHz		11380	48.18	-25.82	74	53.95	38.48	13.72	57.97	-	-	P	H
		17070	51.11	-17.19	68.3	49.98	41.23	16.57	56.67	-	-	P	H
		11380	48.38	-25.62	74	54.15	38.48	13.72	57.97	-	-	P	V
		17070	51.43	-16.87	68.3	50.3	41.23	16.57	56.67	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
45	802.11be EHT20	CH36	5146.52	42.30	54.00	-11.70	V	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH36	-	-	-	-	-	-	-	Harmonic
46	802.11be EHT20	CH64	5422.06	41.20	54.00	-12.80	H	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH64	-	-	-	-	-	-	-	Harmonic
47	802.11be EHT20	CH100	5454.10	40.73	54.00	-13.27	V	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH100	-	-	-	-	-	-	-	Harmonic
48	802.11be EHT20	CH140	5725.03	55.71	68.30	-12.59	H	PEAK	Pass	Band Edge
	802.11be EHT20	CH140	-	-	-	-	-	-	-	Harmonic
49	802.11be EHT20	CH149	5649.35	52.68	68.30	-15.62	H	PEAK	Pass	Band Edge
	802.11be EHT20	CH149	-	-	-	-	-	-	-	Harmonic
50	802.11be EHT20	CH165	5929.60	54.22	68.30	-14.08	H	PEAK	Pass	Band Edge
	802.11be EHT20	CH165	-	-	-	-	-	-	-	Harmonic
51	802.11be EHT20	CH36	5050.40	39.94	54.00	-14.06	V	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH36	-	-	-	-	-	-	-	Harmonic
52	802.11be EHT20	CH64	5352.20	38.21	54.00	-15.79	H	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH64	-	-	-	-	-	-	-	Harmonic
53	802.11be EHT20	CH100	5404.45	38.00	54.00	-16.00	H	AVERAGE	Pass	Band Edge
	802.11be EHT20	CH100	-	-	-	-	-	-	-	Harmonic
54	802.11be EHT20	CH140	5725.22	51.78	68.30	-16.52	V	PEAK	Pass	Band Edge
	802.11be EHT20	CH140	-	-	-	-	-	-	-	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
55	802.11be EHT20	CH149	5612.62	50.35	68.30	-17.95	H	PEAK	Pass	Band Edge
	802.11be EHT20	CH149	-	-	-	-	-	-	-	Harmonic
56	802.11be EHT20	CH165	5928.38	52.02	68.30	-16.28	V	PEAK	Pass	Band Edge
	802.11be EHT20	CH165	-	-	-	-	-	-	-	Harmonic
57	802.11be EHT80	CH42	5147.84	45.10	54.00	-8.90	V	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH42	-	-	-	-	-	-	-	Harmonic
58	802.11be EHT80	CH58	5083.23	41.49	54.00	-12.51	H	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH58	-	-	-	-	-	-	-	Harmonic
59	802.11be EHT80	CH106	5459.98	40.86	54.00	-13.14	V	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH106	-	-	-	-	-	-	-	Harmonic
60	802.11be EHT160	CH50	5125.50	49.64	54.00	-4.36	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH50	-	-	-	-	-	-	-	Harmonic
61	802.11be EHT160	CH50	5146.25	48.79	54.00	-5.21	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH50	-	-	-	-	-	-	-	Harmonic
62	802.11be EHT160	CH114	5455.38	44.49	54.00	-9.51	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH114	-	-	-	-	-	-	-	Harmonic
63	802.11be EHT160	CH114	5447.68	42.12	54.00	-11.88	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH114	-	-	-	-	-	-	-	Harmonic
64	802.11be EHT80	CH155	5649.88	57.47	68.30	-10.83	H	PEAK	Pass	Band Edge
	802.11be EHT80	CH155	-	-	-	-	-	-	-	Harmonic



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
65	802.11be EHT80	CH42	5137.76	45.20	54.00	-8.80	H	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH42	-	-	-	-	-	-	-	Harmonic
66	802.11be EHT80	CH58	5350.01	43.70	54.00	-10.30	V	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH58	-	-	-	-	-	-	-	Harmonic
67	802.11be EHT80	CH106	5458.18	43.24	54.00	-10.76	V	AVERAGE	Pass	Band Edge
	802.11be EHT80	CH106	-	-	-	-	-	-	-	Harmonic
69	802.11be EHT160	CH50	5145.00	46.38	54.00	-7.62	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH50	-	-	-	-	-	-	-	Harmonic
70	802.11be EHT160	CH50	5095.25	49.71	54.00	-4.29	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH50	-	-	-	-	-	-	-	Harmonic
71	802.11be EHT160	CH114	5452.96	47.23	54.00	-6.77	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH114	-	-	-	-	-	-	-	Harmonic
72	802.11be EHT160	CH114	5456.26	47.06	54.00	-6.94	V	AVERAGE	Pass	Band Edge
	802.11be EHT160	CH114	-	-	-	-	-	-	-	Harmonic
73	802.11be EHT80	CH155	5649.35	64.27	68.30	-4.03	H	PEAK	Pass	Band Edge
	802.11be EHT80	CH155	-	-	-	-	-	-	-	Harmonic
74	802.11be EHT20	CH140	30.97	25.7	40	-14.3	V	PEAK	Pass	LF
75	802.11be EHT80	CH155	31.94	23.83	40	-16.17	H	PEAK	Pass	LF



Co-colation

UNII 2C - 5475-5725MHzMHz

WIFI 802. 11be_EHT20_CH140+11g20_TX_CH01+B48 Link (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location	*	5700	110.34	-	-	95.8	35	10.12	30.58	100	142	P	H
	*	5700	104.09	-	-	89.55	35	10.12	30.58	100	142	A	H
		5726.2	62.72	-5.58	68.3	48.13	35.06	10.12	30.59	100	142	P	H
		5700	107.29	-	-	92.75	35	10.12	30.58	100	252	P	V
		5700	101	-	-	86.46	35	10.12	30.58	100	252	A	V
		5729.56	57.41	-10.89	68.3	42.82	35.06	10.12	30.59	100	252	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI 802. 11be_EHT20_CH140+11g20_TX_CH01+B48 Link (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location		2388.855	64.68	-9.32	74	57.61	32.36	6.44	31.73	344	322	P	H
		2389.905	48.83	-5.17	54	41.76	32.36	6.44	31.73	344	322	A	H
	*	2412	110.98	-	-	103.84	32.37	6.44	31.67	344	322	P	H
	*	2412	103.65	-	-	96.51	32.37	6.44	31.67	344	322	A	H
		2389.485	59.93	-14.07	74	52.86	32.36	6.44	31.73	100	351	P	V
		2389.38	45.75	-8.25	54	38.68	32.36	6.44	31.73	100	351	A	V
	*	2412	110.29	-	-	103.15	32.37	6.44	31.67	100	351	P	V
	*	2412	102.42	-	-	95.28	32.37	6.44	31.67	100	351	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



UNII 2C - 5475-5725MHzMHz

WIFI_11be_EHT20_CH140+B48+11g20_TX_CH01+Link+BLE(125K)_TX_CH39

(Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location	*	5700	108.05	-	-	93.51	35	10.12	30.58	100	153	P	H
	*	5700	101.77	-	-	87.23	35	10.12	30.58	100	153	A	H
		5726.28	64.87	-3.43	68.3	50.28	35.06	10.12	30.59	100	153	P	H
	*	5700	104.69	-	-	90.15	35	10.12	30.58	100	87	P	V
	*	5700	99.1	-	-	84.56	35	10.12	30.58	100	87	A	V
		5725.24	61.78	-6.52	68.3	47.19	35.06	10.12	30.59	100	87	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

WIFI_11be_EHT20_CH140+B48+11g20_TX_CH01+Link+BLE_TX_CH39 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBµV/m)	Margin Limit (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location		2389.38	65.33	-8.67	74	58.26	32.36	6.44	31.73	174	327	P	H
		2389.905	50.23	-3.77	54	43.16	32.36	6.44	31.73	174	327	A	H
	*	2412	106.16	-	-	99.02	32.37	6.44	31.67	174	327	P	H
	*	2412	98.7	-	-	91.56	32.37	6.44	31.67	174	327	P	H
		2389.905	61.33	-12.67	74	54.26	32.36	6.44	31.73	100	272	P	V
		2389.905	47.52	-6.48	54	40.45	32.36	6.44	31.73	100	272	A	V
	*	2412	103.76	-	-	96.62	32.37	6.44	31.67	100	272	P	V
	*	2412	96.29	-	-	89.15	32.37	6.44	31.67	100	272	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI_11be_EHT20_CH140+B48+11g20_TX_CH01+Link+BLE_TX_CH39 (Band Edge @ 3m)

WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location	*	2480	92.16	-	-	84.8	32.39	6.53	31.56	180	11	P	H
	*	2480	91.38	-	-	84.02	32.39	6.53	31.56	180	11	A	H
		2498.08	53.11	-20.89	74	45.68	32.4	6.53	31.5	180	11	P	H
		2483.84	46.23	-7.77	54	38.87	32.39	6.53	31.56	180	11	P	H
	*	2480	90.42	-	-	83.06	32.39	6.53	31.56	100	334	P	V
	*	2480	89.93	-	-	82.57	32.39	6.53	31.56	100	334	A	V
		2485.56	53.37	-20.63	74	46.01	32.39	6.53	31.56	100	334	P	V
		2485.28	44.17	-9.83	54	36.81	32.39	6.53	31.56	100	334	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												

UNII 2C - 5475-5725MHzMHz

WIFI 802. 11be_EHT20_CH140+11g20_TX_CH01+B48 Link (Harmonic @ 3m)
(Harmonic @ 3m)





WIFI Ant.	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
Co-location		4824	53.2	-20.8	74	39.98	34.4	9.47	30.65	-	-	P	H
		11400	48.52	-25.48	74	27.65	38.5	13.71	31.34	-	-	P	H
		17100	52.91	-15.39	68.3	27.73	41.24	16.56	32.62	-	-	P	H
		4824	53.72	-20.28	74	40.5	34.4	9.47	30.65	-	-	P	V
		11400	48.53	-25.47	74	27.66	38.5	13.71	31.34	-	-	P	V
		17100	53.16	-15.14	68.3	27.98	41.24	16.56	32.62	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



WIFI_11be_EHT20_CH140+B48+11g20_TX_CH01+Link+BLE_TX_CH39 (Harmonic @ 3m)
(Harmonic @ 3m)

Table with 14 columns: WIFI Ant., Note, Frequency (MHz), Level (dBµV/m), Margin (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Path Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include Co-location data for frequencies 4824, 4960, 7440, 11400, 17100 and a Remark section.

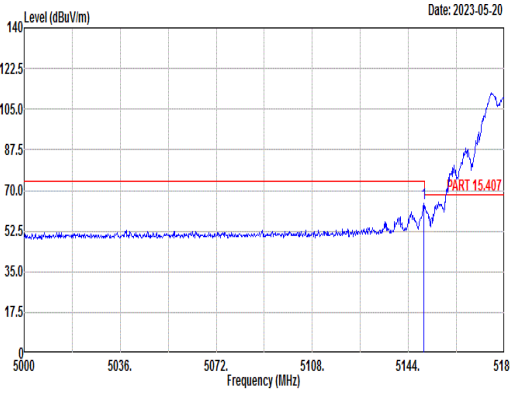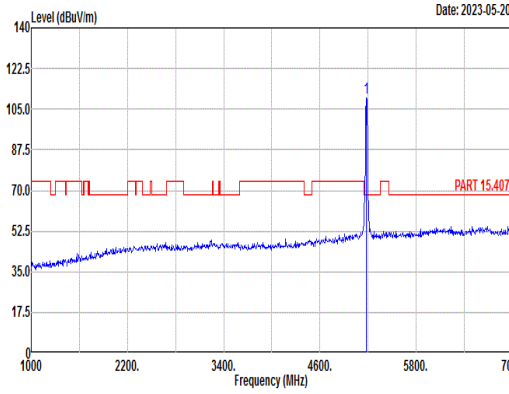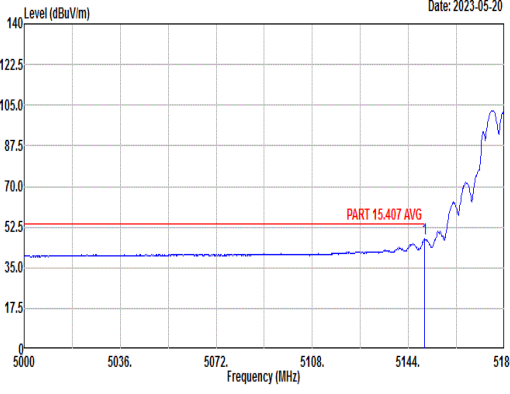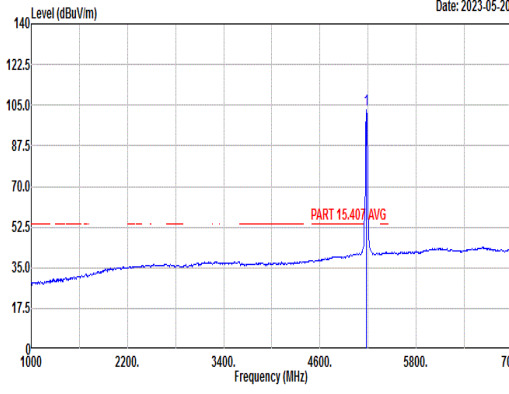

		1																																																																												
Mode	Band Edge																																																																													
	5.15-5.25_UNII 1_802.11a_CH36_5180MHz																																																																													
ANT	CDD 5+18																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>64.56</td> <td>74.00</td> <td>-9.44</td> <td>52.85</td> <td>36.14</td> <td>8.54</td> <td>32.97</td> <td>100</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5149.76	64.56	74.00	-9.44	52.85	36.14	8.54	32.97	100	298 PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.94</td> <td>-----</td> <td>98.25</td> <td>36.13</td> <td>8.59</td> <td>33.03</td> <td>100</td> <td>298 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5180.00	109.94	-----	98.25	36.13	8.59	33.03	100	298 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5149.76	64.56	74.00	-9.44	52.85	36.14	8.54	32.97	100	298 PEAK																																																																				
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5180.00	109.94	-----	98.25	36.13	8.59	33.03	100	298 PEAK																																																																					
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>47.43</td> <td>54.00</td> <td>-6.57</td> <td>35.72</td> <td>36.14</td> <td>8.54</td> <td>32.97</td> <td>100</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5149.94	47.43	54.00	-6.57	35.72	36.14	8.54	32.97	100	298 AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>102.77</td> <td>-----</td> <td>91.08</td> <td>36.13</td> <td>8.59</td> <td>33.03</td> <td>100</td> <td>298 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5180.00	102.77	-----	91.08	36.13	8.59	33.03	100	298 AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5149.94	47.43	54.00	-6.57	35.72	36.14	8.54	32.97	100	298 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5180.00	102.77	-----	91.08	36.13	8.59	33.03	100	298 AVERAGE																																																																					



Mode	1																																																																		
	Band Edge																																																																		
	5.15-5.25_UNII 1_802.11a_CH36_5180MHz																																																																		
ANT	CDD 5+18																																																																		
Pol.	Vertical	Fundamental																																																																	
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.06</td> <td>62.32</td> <td>74.00</td> <td>-11.68</td> <td>50.61</td> <td>36.14</td> <td>8.53 32.96 400 199 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5147.06	62.32	74.00	-11.68	50.61	36.14	8.53 32.96 400 199 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>109.68</td> <td>-----</td> <td>97.99</td> <td>36.13</td> <td>8.58 33.02</td> <td>400 199 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5180.00	109.68	-----	97.99	36.13	8.58 33.02	400 199 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5147.06	62.32	74.00	-11.68	50.61	36.14	8.53 32.96 400 199 PEAK																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5180.00	109.68	-----	97.99	36.13	8.58 33.02	400 199 PEAK																																																												
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.88</td> <td>46.04</td> <td>54.00</td> <td>-7.96</td> <td>34.33</td> <td>36.14</td> <td>8.53 32.96 400 199 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5146.88	46.04	54.00	-7.96	34.33	36.14	8.53 32.96 400 199 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 1 Setting : GM Powersetting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.06</td> <td>-----</td> <td>89.37</td> <td>36.13</td> <td>8.58 33.02</td> <td>400 199 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5180.00	101.06	-----	89.37	36.13	8.58 33.02	400 199 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5146.88	46.04	54.00	-7.96	34.33	36.14	8.53 32.96 400 199 AVERAGE																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5180.00	101.06	-----	89.37	36.13	8.58 33.02	400 199 AVERAGE																																																												



Mode	1																																																																																																									
	Harmonic																																																																																																									
	5.15-5.25_UNII 1_802.11a_CH36_5180MHz																																																																																																									
ANT	CDD 5+18																																																																																																									
Pol.	Horizontal	Vertical																																																																																																								
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 1 Setting : 6W Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>61.73</td> <td>68.30</td> <td>-6.57</td> <td>57.67</td> <td>39.36</td> <td>12.06</td> <td>47.36</td> <td>100</td> <td>284</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.09</td> <td>74.00</td> <td>-23.91</td> <td>43.78</td> <td>42.05</td> <td>14.58</td> <td>50.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	61.73	68.30	-6.57	57.67	39.36	12.06	47.36	100	284	Peak	2	15540.00	50.09	74.00	-23.91	43.78	42.05	14.58	50.32	---	---	Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 1 Setting : 6W Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>59.23</td> <td>68.30</td> <td>-9.07</td> <td>55.17</td> <td>39.36</td> <td>12.06</td> <td>47.36</td> <td>100</td> <td>120</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>49.80</td> <td>74.00</td> <td>-24.20</td> <td>43.49</td> <td>42.05</td> <td>14.58</td> <td>50.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	59.23	68.30	-9.07	55.17	39.36	12.06	47.36	100	120	Peak	2	15540.00	49.80	74.00	-24.20	43.49	42.05	14.58	50.32	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	10360.00	61.73	68.30	-6.57	57.67	39.36	12.06	47.36	100	284	Peak																																																																																															
2	15540.00	50.09	74.00	-23.91	43.78	42.05	14.58	50.32	---	---	Peak																																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																	
1	10360.00	59.23	68.30	-9.07	55.17	39.36	12.06	47.36	100	120	Peak																																																																																															
2	15540.00	49.80	74.00	-24.20	43.49	42.05	14.58	50.32	---	---	Peak																																																																																															



Mode	2																																																																																																											
	Harmonic																																																																																																											
	5.15-5.25_UNII 1_802.11a_CH44_5220MHz																																																																																																											
ANT	CDD 5+18																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 2 Setting : 6W Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>60.44</td> <td>68.30</td> <td>-7.86</td> <td>56.20</td> <td>39.44</td> <td>12.12</td> <td>47.32</td> <td>100</td> <td>282</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>47.92</td> <td>74.00</td> <td>-26.08</td> <td>41.45</td> <td>42.19</td> <td>14.64</td> <td>50.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	60.44	68.30	-7.86	56.20	39.44	12.12	47.32	100	282	Peak	2	15660.00	47.92	74.00	-26.08	41.45	42.19	14.64	50.36	---	---	Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 2 Setting : 6W Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>58.94</td> <td>68.30</td> <td>-9.36</td> <td>54.70</td> <td>39.44</td> <td>12.12</td> <td>47.32</td> <td>100</td> <td>119</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.24</td> <td>74.00</td> <td>-25.76</td> <td>41.77</td> <td>42.19</td> <td>14.64</td> <td>50.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	58.94	68.30	-9.36	54.70	39.44	12.12	47.32	100	119	Peak	2	15660.00	48.24	74.00	-25.76	41.77	42.19	14.64	50.36	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	10440.00	60.44	68.30	-7.86	56.20	39.44	12.12	47.32	100	282	Peak																																																																																																	
2	15660.00	47.92	74.00	-26.08	41.45	42.19	14.64	50.36	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	10440.00	58.94	68.30	-9.36	54.70	39.44	12.12	47.32	100	119	Peak																																																																																																	
2	15660.00	48.24	74.00	-25.76	41.77	42.19	14.64	50.36	---	---	Peak																																																																																																	



Mode	3																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11a_CH48_5240MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 3 Setting : 6W Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>59.78</td> <td>68.30</td> <td>-8.52</td> <td>55.46</td> <td>39.48</td> <td>12.15</td> <td>47.31</td> <td>100</td> <td>284</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>43.34</td> <td>42.26</td> <td>14.66</td> <td>50.39</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	59.78	68.30	-8.52	55.46	39.48	12.15	47.31	100	284	Peak	2	15720.00	49.87	74.00	-24.13	43.34	42.26	14.66	50.39	---	---	Peak	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 3 Setting : 6W Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>60.66</td> <td>68.30</td> <td>-7.64</td> <td>56.34</td> <td>39.48</td> <td>12.15</td> <td>47.31</td> <td>100</td> <td>121</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.34</td> <td>74.00</td> <td>-23.66</td> <td>43.81</td> <td>42.26</td> <td>14.66</td> <td>50.39</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	60.66	68.30	-7.64	56.34	39.48	12.15	47.31	100	121	Peak	2	15720.00	50.34	74.00	-23.66	43.81	42.26	14.66	50.39	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	59.78	68.30	-8.52	55.46	39.48	12.15	47.31	100	284	Peak																																																																																							
2	15720.00	49.87	74.00	-24.13	43.34	42.26	14.66	50.39	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	60.66	68.30	-7.64	56.34	39.48	12.15	47.31	100	121	Peak																																																																																							
2	15720.00	50.34	74.00	-23.66	43.81	42.26	14.66	50.39	---	---	Peak																																																																																							







Mode	4																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11a_CH52_5280MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 4 Setting : 6N Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>57.93</td> <td>68.30</td> <td>-10.37</td> <td>53.54</td> <td>39.50</td> <td>12.18</td> <td>47.29</td> <td>100</td> <td>273</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>51.27</td> <td>74.00</td> <td>-22.73</td> <td>44.65</td> <td>42.34</td> <td>14.69</td> <td>50.41</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	57.93	68.30	-10.37	53.54	39.50	12.18	47.29	100	273	Peak	2	15780.00	51.27	74.00	-22.73	44.65	42.34	14.69	50.41	---	---	Peak	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 4 Setting : 6N Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>59.38</td> <td>68.30</td> <td>-8.92</td> <td>54.99</td> <td>39.50</td> <td>12.18</td> <td>47.29</td> <td>100</td> <td>117</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.51</td> <td>74.00</td> <td>-24.49</td> <td>42.89</td> <td>42.34</td> <td>14.69</td> <td>50.41</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	59.38	68.30	-8.92	54.99	39.50	12.18	47.29	100	117	Peak	2	15780.00	49.51	74.00	-24.49	42.89	42.34	14.69	50.41	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	57.93	68.30	-10.37	53.54	39.50	12.18	47.29	100	273	Peak																																																																																							
2	15780.00	51.27	74.00	-22.73	44.65	42.34	14.69	50.41	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	59.38	68.30	-8.92	54.99	39.50	12.18	47.29	100	117	Peak																																																																																							
2	15780.00	49.51	74.00	-24.49	42.89	42.34	14.69	50.41	---	---	Peak																																																																																							



Mode	5																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11a_CH60_5300MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 5 Setting : 6W Power setting 17.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>55.53</td> <td>74.00</td> <td>-18.47</td> <td>51.04</td> <td>39.52</td> <td>12.23</td> <td>47.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>49.36</td> <td>74.00</td> <td>-24.64</td> <td>42.59</td> <td>42.48</td> <td>14.75</td> <td>50.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	55.53	74.00	-18.47	51.04	39.52	12.23	47.26	---	---	Peak	2	15900.00	49.36	74.00	-24.64	42.59	42.48	14.75	50.46	---	---	Peak	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 5 Setting : 6W Power setting 17.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>55.46</td> <td>74.00</td> <td>-18.54</td> <td>50.97</td> <td>39.52</td> <td>12.23</td> <td>47.26</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>51.18</td> <td>74.00</td> <td>-22.82</td> <td>44.41</td> <td>42.48</td> <td>14.75</td> <td>50.46</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10600.00	55.46	74.00	-18.54	50.97	39.52	12.23	47.26	---	---	Peak	2	15900.00	51.18	74.00	-22.82	44.41	42.48	14.75	50.46	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10600.00	55.53	74.00	-18.47	51.04	39.52	12.23	47.26	---	---	Peak																																																																																							
2	15900.00	49.36	74.00	-24.64	42.59	42.48	14.75	50.46	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10600.00	55.46	74.00	-18.54	50.97	39.52	12.23	47.26	---	---	Peak																																																																																							
2	15900.00	51.18	74.00	-22.82	44.41	42.48	14.75	50.46	---	---	Peak																																																																																							

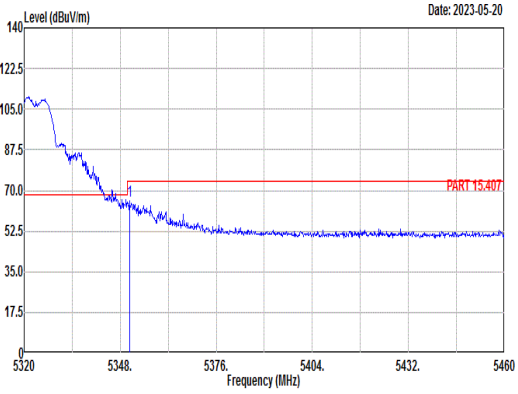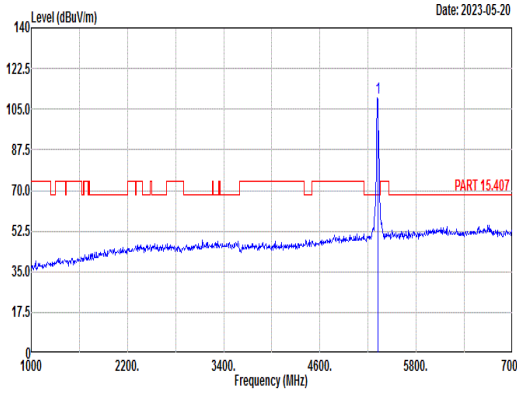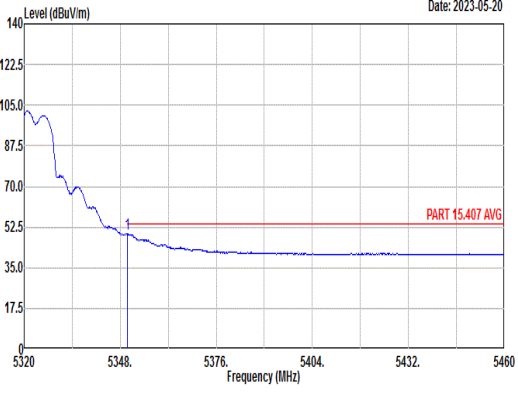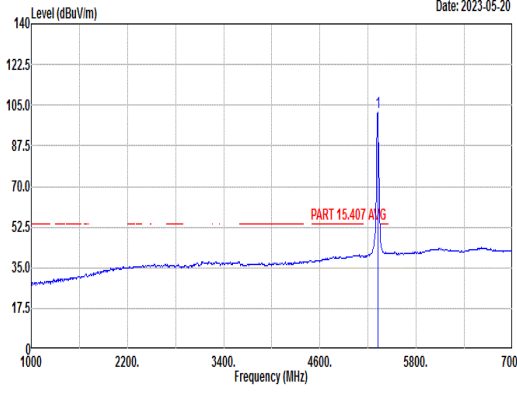

Mode	6																																																																																																																										
	Band Edge																																																																																																																										
	5.25-5.35_UNII 2A_802.11a_CH64_5320MHz																																																																																																																										
ANT	CDD 5+18																																																																																																																										
Pol.	Horizontal	Fundamental																																																																																																																									
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.66</td> <td>65.46</td> <td>74.00</td> <td>-8.54</td> <td>53.36</td> <td>36.06</td> <td>9.37</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.33</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>144</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5350.66	65.46	74.00	-8.54	53.36	36.06	9.37								33.33								112								144								PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>109.93</td> <td>-----</td> <td>97.95</td> <td>36.07</td> <td>9.18</td> <td>33.27</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>144</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5320.00	109.93	-----	97.95	36.07	9.18	33.27								112								144								PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																																				
1	5350.66	65.46	74.00	-8.54	53.36	36.06	9.37																																																																																																																				
							33.33																																																																																																																				
							112																																																																																																																				
							144																																																																																																																				
							PEAK																																																																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																																				
1	5320.00	109.93	-----	97.95	36.07	9.18	33.27																																																																																																																				
							112																																																																																																																				
							144																																																																																																																				
							PEAK																																																																																																																				
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>49.73</td> <td>54.00</td> <td>-4.27</td> <td>37.63</td> <td>36.06</td> <td>9.37</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.33</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>144</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5350.10	49.73	54.00	-4.27	37.63	36.06	9.37								33.33								112								144								AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>102.00</td> <td>-----</td> <td>90.00</td> <td>36.07</td> <td>9.21</td> <td>33.28</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>144</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5320.00	102.00	-----	90.00	36.07	9.21	33.28								112								144								AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																																				
1	5350.10	49.73	54.00	-4.27	37.63	36.06	9.37																																																																																																																				
							33.33																																																																																																																				
							112																																																																																																																				
							144																																																																																																																				
							AVERAGE																																																																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																																																																				
1	5320.00	102.00	-----	90.00	36.07	9.21	33.28																																																																																																																				
							112																																																																																																																				
							144																																																																																																																				
							AVERAGE																																																																																																																				



		6																																																																																	
Mode	Band Edge																																																																																		
	5.25-5.35_UNII 2A_802.11a_CH64_5320MHz																																																																																		
ANT	CDD 5+18																																																																																		
Pol.	Vertical	Fundamental																																																																																	
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.50</td> <td>62.50</td> <td>74.00</td> <td>-11.50</td> <td>50.40</td> <td>36.06</td> <td>9.37</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.33</td> <td>368</td> <td>212 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5351.50	62.50	74.00	-11.50	50.40	36.06	9.37						33.33	368	212 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>106.67</td> <td>-----</td> <td>94.67</td> <td>36.07</td> <td>9.21</td> <td>33.28</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>368</td> <td>212</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5320.00	106.67	-----	94.67	36.07	9.21	33.28						368	212	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5351.50	62.50	74.00	-11.50	50.40	36.06	9.37																																																																												
					33.33	368	212 PEAK																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5320.00	106.67	-----	94.67	36.07	9.21	33.28																																																																												
					368	212	PEAK																																																																												
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>46.78</td> <td>54.00</td> <td>-7.22</td> <td>34.68</td> <td>36.06</td> <td>9.37</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>33.33</td> <td>368</td> <td>212 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5350.80	46.78	54.00	-7.22	34.68	36.06	9.37						33.33	368	212 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 6 Setting : 6M Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>98.91</td> <td>-----</td> <td>86.91</td> <td>36.07</td> <td>9.21</td> <td>33.28</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>368</td> <td>212</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5320.00	98.91	-----	86.91	36.07	9.21	33.28						368	212	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5350.80	46.78	54.00	-7.22	34.68	36.06	9.37																																																																												
					33.33	368	212 AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5320.00	98.91	-----	86.91	36.07	9.21	33.28																																																																												
					368	212	AVERAGE																																																																												







Mode	6																																																																																																																									
	Harmonic																																																																																																																									
	5.25-5.35_UNII 2A_802.11a_CH64_5320MHz																																																																																																																									
ANT	CDD 5+18																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 6 Setting : 0N Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>56.04</td> <td>74.00</td> <td>-17.96</td> <td>51.49</td> <td>39.53</td> <td>12.26</td> <td>47.24</td> <td>100</td> <td>275</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.28</td> <td>54.00</td> <td>-7.72</td> <td>41.73</td> <td>39.53</td> <td>12.26</td> <td>47.24</td> <td>100</td> <td>275</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.07</td> <td>74.00</td> <td>-24.93</td> <td>42.23</td> <td>42.55</td> <td>14.77</td> <td>50.48</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10640.00	56.04	74.00	-17.96	51.49	39.53	12.26	47.24	100	275	Peak	2	10640.00	46.28	54.00	-7.72	41.73	39.53	12.26	47.24	100	275	Average	3	15960.00	49.07	74.00	-24.93	42.23	42.55	14.77	50.48	---	---	Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 6 Setting : 0N Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>55.14</td> <td>74.00</td> <td>-18.86</td> <td>50.59</td> <td>39.53</td> <td>12.26</td> <td>47.24</td> <td>106</td> <td>94</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>46.06</td> <td>54.00</td> <td>-7.94</td> <td>41.51</td> <td>39.53</td> <td>12.26</td> <td>47.24</td> <td>106</td> <td>94</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>49.75</td> <td>74.00</td> <td>-24.25</td> <td>42.91</td> <td>42.55</td> <td>14.77</td> <td>50.48</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	10640.00	55.14	74.00	-18.86	50.59	39.53	12.26	47.24	106	94	Peak	2	10640.00	46.06	54.00	-7.94	41.51	39.53	12.26	47.24	106	94	Average	3	15960.00	49.75	74.00	-24.25	42.91	42.55	14.77	50.48	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																																			
1	10640.00	56.04	74.00	-17.96	51.49	39.53	12.26	47.24	100	275	Peak																																																																																																															
2	10640.00	46.28	54.00	-7.72	41.73	39.53	12.26	47.24	100	275	Average																																																																																																															
3	15960.00	49.07	74.00	-24.93	42.23	42.55	14.77	50.48	---	---	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																																																																			
1	10640.00	55.14	74.00	-18.86	50.59	39.53	12.26	47.24	106	94	Peak																																																																																																															
2	10640.00	46.06	54.00	-7.94	41.51	39.53	12.26	47.24	106	94	Average																																																																																																															
3	15960.00	49.75	74.00	-24.25	42.91	42.55	14.77	50.48	---	---	Peak																																																																																																															



Mode	7																																																																
	Band Edge																																																																
	5.47-5.725_UNII 2C_802.11a_CH100_5500MHz																																																																
ANT	CDD 5+18																																																																
Pol.	Horizontal	Fundamental																																																															
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5442.40 52.84 74.00 -21.16</td> <td>40.64</td> <td>36.02</td> <td>9.68</td> <td>33.50</td> <td>102</td> <td>42 PEAK</td> </tr> <tr> <td>2 5467.90 53.04 68.30 -15.26</td> <td>40.88</td> <td>36.01</td> <td>9.69</td> <td>33.54</td> <td>102</td> <td>42 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor				MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5442.40 52.84 74.00 -21.16	40.64	36.02	9.68	33.50	102	42 PEAK	2 5467.90 53.04 68.30 -15.26	40.88	36.01	9.69	33.54	102	42 PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBN:3000.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00 108.61</td> <td>96.50</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>102</td> <td>42 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB) Level Factor Loss Factor							MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5500.00 108.61	96.50	36.00	9.71	33.60	102	42 PEAK
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line Margin	Level	Factor	Loss Factor																																																														
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5442.40 52.84 74.00 -21.16	40.64	36.02	9.68	33.50	102	42 PEAK																																																											
2 5467.90 53.04 68.30 -15.26	40.88	36.01	9.69	33.54	102	42 PEAK																																																											
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB) Level Factor Loss Factor																																																																	
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5500.00 108.61	96.50	36.00	9.71	33.60	102	42 PEAK																																																											
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.80 41.45 54.00 -12.55</td> <td>29.27</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>102</td> <td>42 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor				MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5459.80 41.45 54.00 -12.55	29.27	36.02	9.69	33.53	102	42 AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBN:1.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Level Factor Loss Factor</th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00 100.21</td> <td>88.10</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>102</td> <td>42 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB) Level Factor Loss Factor							MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5500.00 100.21	88.10	36.00	9.71	33.60	102	42 AVERAGE							
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line Margin	Level	Factor	Loss Factor																																																														
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5459.80 41.45 54.00 -12.55	29.27	36.02	9.69	33.53	102	42 AVERAGE																																																											
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB) Level Factor Loss Factor																																																																	
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5500.00 100.21	88.10	36.00	9.71	33.60	102	42 AVERAGE																																																											

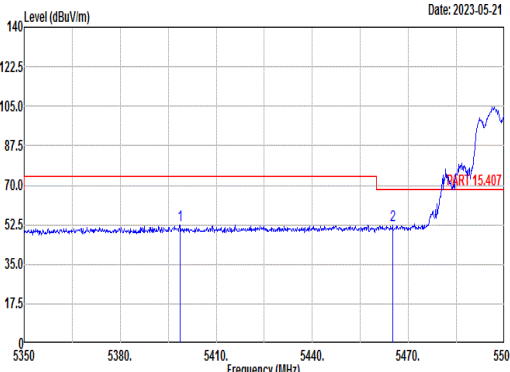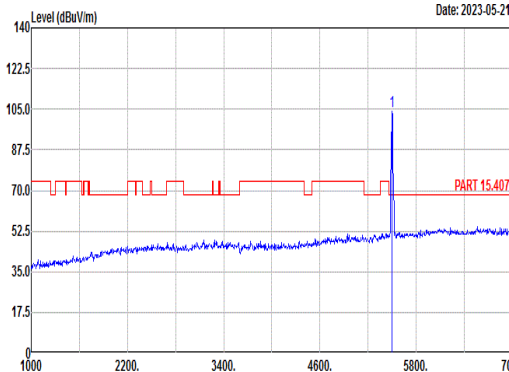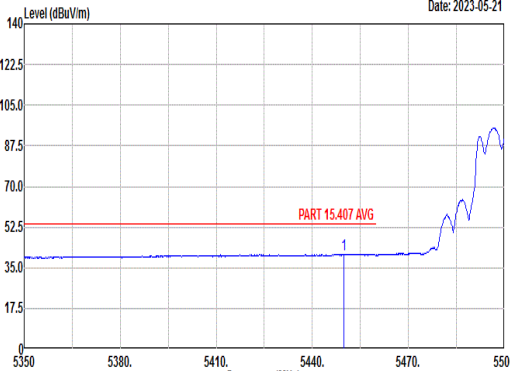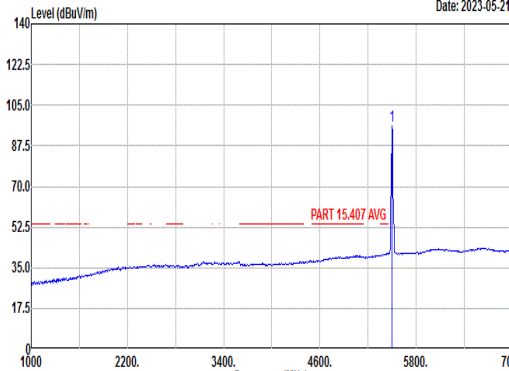

		7																																																															
Mode		Band Edge																																																															
		5.47-5.725_UNII 2C_802.11a_CH100_5500MHz																																																															
ANT		CDD 5+18																																																															
Pol.	Vertical	Fundamental																																																															
Peak	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Preamp</th> <th>Loss</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5398.75 52.36 74.00 -21.64</td> <td>40.12</td> <td>36.04</td> <td>9.62</td> <td>33.42</td> <td>318</td> <td>201 PEAK</td> </tr> <tr> <td>2 5465.05 52.24 68.30 -16.06</td> <td>40.08</td> <td>36.01</td> <td>9.69</td> <td>33.54</td> <td>318</td> <td>201 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Preamp	Loss	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5398.75 52.36 74.00 -21.64	40.12	36.04	9.62	33.42	318	201 PEAK	2 5465.05 52.24 68.30 -16.06	40.08	36.01	9.69	33.54	318	201 PEAK	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Level Factor Loss Factor</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00 104.09</td> <td>91.98</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>318</td> <td>201 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	Tpos	Remark	Freq Level Line (dB) Level Factor Loss Factor	Level	Loss	Factor	cm	deg	Remark	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5500.00 104.09	91.98	36.00	9.71	33.60	318	201 PEAK
	Limit	Read	Ant	Cable	Apos	Tpos	Remark																																																										
Freq Level Line Margin	Level	Factor	Preamp	Loss	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5398.75 52.36 74.00 -21.64	40.12	36.04	9.62	33.42	318	201 PEAK																																																											
2 5465.05 52.24 68.30 -16.06	40.08	36.01	9.69	33.54	318	201 PEAK																																																											
Limit	Read	Ant	Cable	Apos	Tpos	Remark																																																											
Freq Level Line (dB) Level Factor Loss Factor	Level	Loss	Factor	cm	deg	Remark																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5500.00 104.09	91.98	36.00	9.71	33.60	318	201 PEAK																																																											
Avg	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5449.90 40.77 54.00 -13.23</td> <td>28.58</td> <td>36.02</td> <td>9.68</td> <td>33.51</td> <td>318</td> <td>201 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	Tpos	Remark	Freq Level Line Margin	Level	Factor	Loss	Factor	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5449.90 40.77 54.00 -13.23	28.58	36.02	9.68	33.51	318	201 AVERAGE	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 7 Setting : 6M Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Apos</th> <th>Tpos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB) Level Factor Loss Factor</th> <th>Level</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00 95.98</td> <td>83.87</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>318</td> <td>201 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Apos	Tpos	Remark	Freq Level Line (dB) Level Factor Loss Factor	Level	Loss	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5500.00 95.98	83.87	36.00	9.71	33.60	318	201 AVERAGE							
	Limit	Read	Ant	Cable	Apos	Tpos	Remark																																																										
Freq Level Line Margin	Level	Factor	Loss	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5449.90 40.77 54.00 -13.23	28.58	36.02	9.68	33.51	318	201 AVERAGE																																																											
Limit	Read	Ant	Cable	Apos	Tpos	Remark																																																											
Freq Level Line (dB) Level Factor Loss Factor	Level	Loss	Factor	Factor	cm	deg																																																											
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																											
1 5500.00 95.98	83.87	36.00	9.71	33.60	318	201 AVERAGE																																																											






Mode	7																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11a_CH100_5500MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 7 Setting : 6N Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>50.41</td> <td>74.00</td> <td>-23.59</td> <td>45.39</td> <td>39.60</td> <td>12.52</td> <td>47.10</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>52.86</td> <td>68.30</td> <td>-15.44</td> <td>44.34</td> <td>43.25</td> <td>15.17</td> <td>49.90</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	50.41	74.00	-23.59	45.39	39.60	12.52	47.10	--- Peak	2	16500.00	52.86	68.30	-15.44	44.34	43.25	15.17	49.90	--- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 7 Setting : 6N Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>50.82</td> <td>74.00</td> <td>-23.18</td> <td>45.80</td> <td>39.60</td> <td>12.52</td> <td>47.10</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>52.79</td> <td>68.30</td> <td>-15.51</td> <td>44.27</td> <td>43.25</td> <td>15.17</td> <td>49.90</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	50.82	74.00	-23.18	45.80	39.60	12.52	47.10	--- Peak	2	16500.00	52.79	68.30	-15.51	44.27	43.25	15.17	49.90	--- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11000.00	50.41	74.00	-23.59	45.39	39.60	12.52	47.10	--- Peak																																																																																									
2	16500.00	52.86	68.30	-15.44	44.34	43.25	15.17	49.90	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11000.00	50.82	74.00	-23.18	45.80	39.60	12.52	47.10	--- Peak																																																																																									
2	16500.00	52.79	68.30	-15.51	44.27	43.25	15.17	49.90	--- Peak																																																																																									






Mode	8																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11a_CH116_5580MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 8 Setting : 6M Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>50.88</td> <td>74.00</td> <td>-23.12</td> <td>46.32</td> <td>39.60</td> <td>12.64</td> <td>47.68</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>51.98</td> <td>68.30</td> <td>-16.32</td> <td>44.65</td> <td>43.56</td> <td>15.35</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	50.88	74.00	-23.12	46.32	39.60	12.64	47.68	---	---	Peak	2	16740.00	51.98	68.30	-16.32	44.65	43.56	15.35	51.58	---	---	Peak	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 8 Setting : 6M Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>50.58</td> <td>74.00</td> <td>-23.42</td> <td>46.02</td> <td>39.60</td> <td>12.64</td> <td>47.68</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>52.14</td> <td>68.30</td> <td>-16.16</td> <td>44.81</td> <td>43.56</td> <td>15.35</td> <td>51.58</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	50.58	74.00	-23.42	46.02	39.60	12.64	47.68	---	---	Peak	2	16740.00	52.14	68.30	-16.16	44.81	43.56	15.35	51.58	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11160.00	50.88	74.00	-23.12	46.32	39.60	12.64	47.68	---	---	Peak																																																																																							
2	16740.00	51.98	68.30	-16.32	44.65	43.56	15.35	51.58	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11160.00	50.58	74.00	-23.42	46.02	39.60	12.64	47.68	---	---	Peak																																																																																							
2	16740.00	52.14	68.30	-16.16	44.81	43.56	15.35	51.58	---	---	Peak																																																																																							

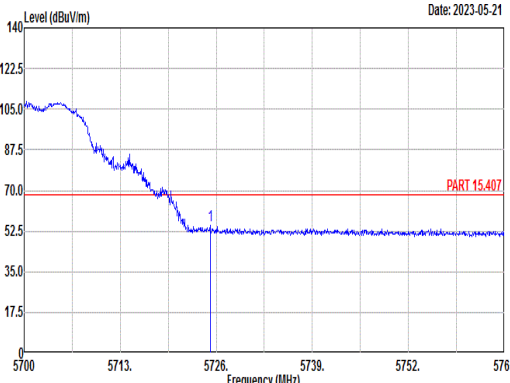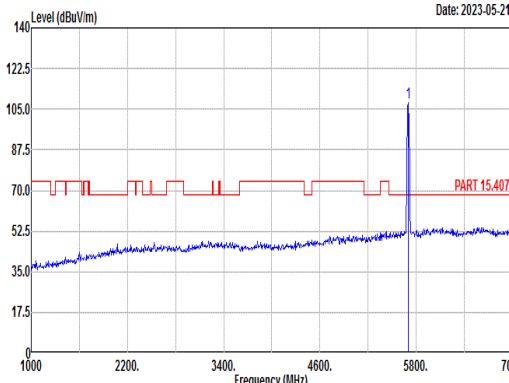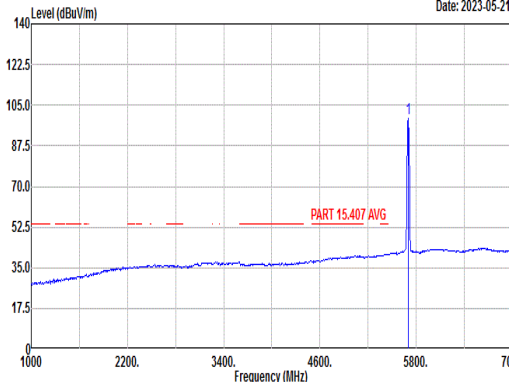

Mode	9																																																																									
	Band Edge																																																																									
	5.47-5.725_UNII 2C_802.11a_CH140_5700MHz																																																																									
ANT	CDD 5+18																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : GM Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>55.16</td> <td>68.30</td> <td>-13.14</td> <td>42.28</td> <td>36.32</td> <td>10.02</td> <td>33.46</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5725.16	55.16	68.30	-13.14	42.28	36.32	10.02	33.46	100	292	PEAK	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : GM Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>107.56</td> <td>-----</td> <td>94.80</td> <td>36.28</td> <td>9.96</td> <td>33.48</td> <td>100</td> <td>292</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	107.56	-----	94.80	36.28	9.96	33.48	100	292	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	5725.16	55.16	68.30	-13.14	42.28	36.32	10.02	33.46	100	292	PEAK																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	107.56	-----	94.80	36.28	9.96	33.48	100	292	PEAK																																																																
Avg	Blank	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 9 Setting : GM Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>99.18</td> <td>-----</td> <td>86.42</td> <td>36.28</td> <td>9.96</td> <td>33.48</td> <td>100</td> <td>292</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	99.18	-----	86.42	36.28	9.96	33.48	100	292	AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	99.18	-----	86.42	36.28	9.96	33.48	100	292	AVERAGE																																																																

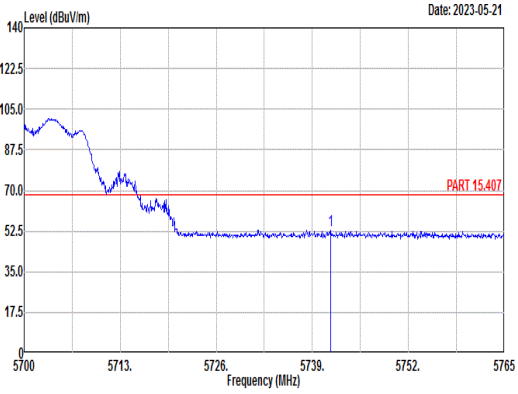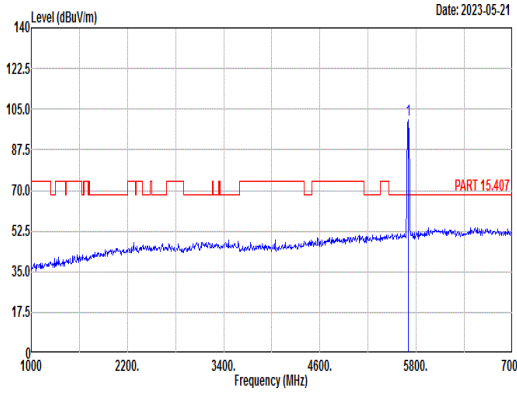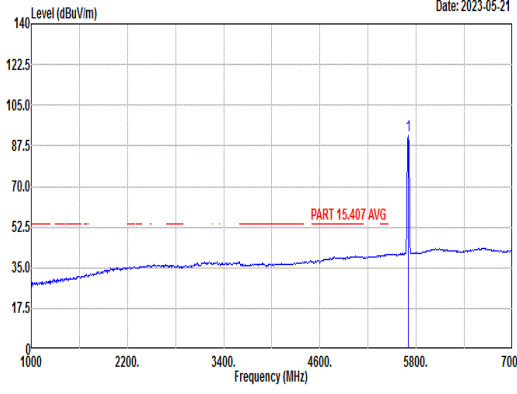

Mode	9																																																																									
	Band Edge																																																																									
	5.47-5.725_UNII 2C_802.11a_CH140_5700MHz																																																																									
ANT	CDD 5+18																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : GM Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5741.47</td> <td>52.79</td> <td>68.30</td> <td>-15.51</td> <td>39.86</td> <td>36.34</td> <td>10.05</td> <td>33.46</td> <td>300</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5741.47	52.79	68.30	-15.51	39.86	36.34	10.05	33.46	300	162	PEAK	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 9 Setting : GM Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.40</td> <td>-----</td> <td>87.64</td> <td>36.28</td> <td>9.96</td> <td>33.48</td> <td>300</td> <td>162</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5700.00	100.40	-----	87.64	36.28	9.96	33.48	300	162	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																			
1	5741.47	52.79	68.30	-15.51	39.86	36.34	10.05	33.46	300	162	PEAK																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5700.00	100.40	-----	87.64	36.28	9.96	33.48	300	162	PEAK																																																																
Avg	Blank	 <p>Date: 2023-05-21</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 9 Setting : GM Powersetting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>92.05</td> <td>-----</td> <td>79.27</td> <td>36.29</td> <td>9.97</td> <td>33.48</td> <td>300</td> <td>162</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5700.00	92.05	-----	79.27	36.29	9.97	33.48	300	162	AVERAGE																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5700.00	92.05	-----	79.27	36.29	9.97	33.48	300	162	AVERAGE																																																																







Mode	9																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11a_CH140_5700MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 9 Setting : 6N Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>50.38</td> <td>74.00</td> <td>-23.62</td> <td>46.51</td> <td>39.60</td> <td>12.81</td> <td>48.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.97</td> <td>68.30</td> <td>-17.33</td> <td>44.97</td> <td>44.02</td> <td>15.62</td> <td>53.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	50.38	74.00	-23.62	46.51	39.60	12.81	48.54	---	---	Peak	2	17100.00	50.97	68.30	-17.33	44.97	44.02	15.62	53.64	---	---	Peak	<p>Date: 2023-05-22</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 9 Setting : 6N Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>49.09</td> <td>74.00</td> <td>-24.91</td> <td>45.22</td> <td>39.60</td> <td>12.81</td> <td>48.54</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.00</td> <td>68.30</td> <td>-18.30</td> <td>44.00</td> <td>44.02</td> <td>15.62</td> <td>53.64</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11400.00	49.09	74.00	-24.91	45.22	39.60	12.81	48.54	---	---	Peak	2	17100.00	50.00	68.30	-18.30	44.00	44.02	15.62	53.64	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	50.38	74.00	-23.62	46.51	39.60	12.81	48.54	---	---	Peak																																																																																							
2	17100.00	50.97	68.30	-17.33	44.97	44.02	15.62	53.64	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11400.00	49.09	74.00	-24.91	45.22	39.60	12.81	48.54	---	---	Peak																																																																																							
2	17100.00	50.00	68.30	-18.30	44.00	44.02	15.62	53.64	---	---	Peak																																																																																							



Mode	10																																																																																		
	Band Edge																																																																																		
	5.15-5.25_UNII 1_802.11be EHT20_CH36_Full_5180MHz																																																																																		
ANT	CDD 5+18																																																																																		
Pol.	Horizontal	Fundamental																																																																																	
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.70</td> <td>64.90</td> <td>74.00</td> <td>-9.10</td> <td>53.19</td> <td>36.14</td> <td>8.53</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>32.96</td> <td>122</td> <td>34 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5146.70	64.90	74.00	-9.10	53.19	36.14	8.53						32.96	122	34 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>108.93</td> <td>-----</td> <td>97.24</td> <td>36.13</td> <td>8.57</td> <td>33.01</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>122</td> <td></td> <td>34 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5180.00	108.93	-----	97.24	36.13	8.57	33.01						122		34 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5146.70	64.90	74.00	-9.10	53.19	36.14	8.53																																																																												
					32.96	122	34 PEAK																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5180.00	108.93	-----	97.24	36.13	8.57	33.01																																																																												
					122		34 PEAK																																																																												
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>49.88</td> <td>54.00</td> <td>-4.12</td> <td>38.18</td> <td>36.14</td> <td>8.53</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>32.97</td> <td>122</td> <td>34 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5149.58	49.88	54.00	-4.12	38.18	36.14	8.53						32.97	122	34 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.55</td> <td>-----</td> <td>88.86</td> <td>36.13</td> <td>8.59</td> <td>33.03</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td>122</td> <td></td> <td>34 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5180.00	100.55	-----	88.86	36.13	8.59	33.03						122		34 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5149.58	49.88	54.00	-4.12	38.18	36.14	8.53																																																																												
					32.97	122	34 AVERAGE																																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																												
1	5180.00	100.55	-----	88.86	36.13	8.59	33.03																																																																												
					122		34 AVERAGE																																																																												

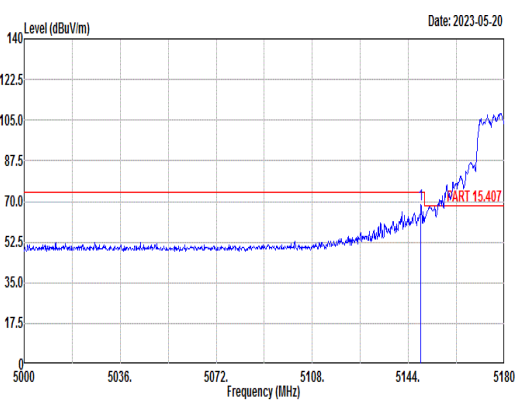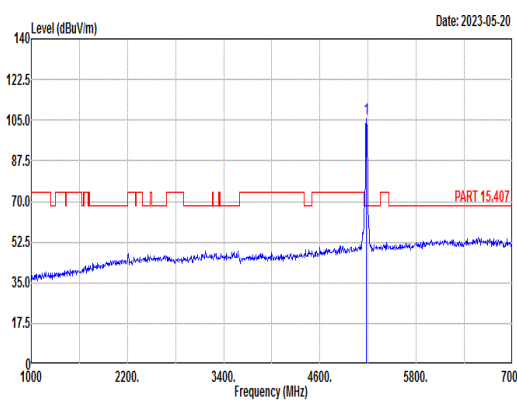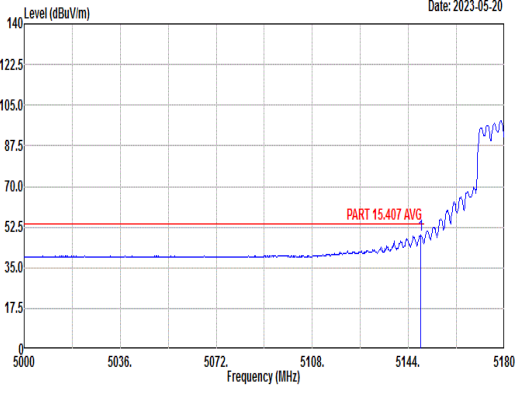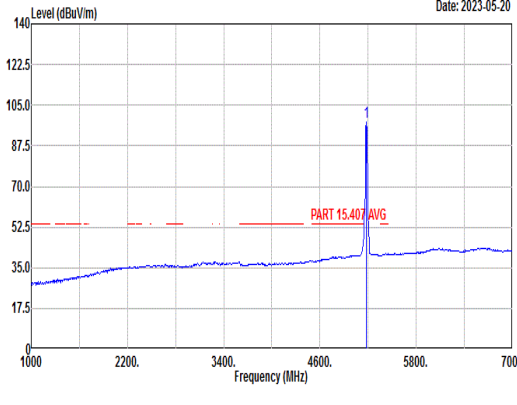

Mode	10																																																																																									
	Band Edge																																																																																									
	5.15-5.25_UNII 1_802.11be EHT20_CH36_Full_5180MHz																																																																																									
ANT	CDD 5+18																																																																																									
Pol.	Vertical	Fundamental																																																																																								
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>-</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.68</td> <td>68.55</td> <td>74.00</td> <td>-5.45</td> <td>56.85</td> <td>36.14</td> <td>8.53</td> <td>32.97</td> <td>400</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB	cm	deg							1	5148.68	68.55	74.00	-5.45	56.85	36.14	8.53	32.97	400	192	PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>-</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>105.56</td> <td>-----</td> <td>93.87</td> <td>36.13</td> <td>8.58</td> <td>33.02</td> <td>400</td> <td>192</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB	cm	deg							1	5180.00	105.56	-----	93.87	36.13	8.58	33.02	400	192	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5148.68	68.55	74.00	-5.45	56.85	36.14	8.53	32.97	400	192	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5180.00	105.56	-----	93.87	36.13	8.58	33.02	400	192	PEAK																																																																																
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>-</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.68</td> <td>49.34</td> <td>54.00</td> <td>-4.66</td> <td>37.64</td> <td>36.14</td> <td>8.53</td> <td>32.97</td> <td>400</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB	cm	deg							1	5148.68	49.34	54.00	-4.66	37.64	36.14	8.53	32.97	400	192	AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 10 Setting : MCS0 Powersetting 17.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>-</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th>cm</th> <th>deg</th> <th colspan="6"></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>97.81</td> <td>-----</td> <td>86.12</td> <td>36.13</td> <td>8.58</td> <td>33.02</td> <td>400</td> <td>192</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB	cm	deg							1	5180.00	97.81	-----	86.12	36.13	8.58	33.02	400	192	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5148.68	49.34	54.00	-4.66	37.64	36.14	8.53	32.97	400	192	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	-	dBuV	dB/m	dB	dB																																																																																			
cm	deg																																																																																									
1	5180.00	97.81	-----	86.12	36.13	8.58	33.02	400	192	AVERAGE																																																																																



Mode	10																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11be EHT20_CH36_Full_5180MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 10 Setting : MCS0 Power setting 17.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>58.75</td> <td>68.30</td> <td>-9.55</td> <td>57.03</td> <td>37.02</td> <td>12.06</td> <td>47.36</td> <td>100</td> <td>285</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>49.92</td> <td>74.00</td> <td>-24.08</td> <td>44.87</td> <td>40.79</td> <td>14.58</td> <td>50.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	58.75	68.30	-9.55	57.03	37.02	12.06	47.36	100	285	Peak	2	15540.00	49.92	74.00	-24.08	44.87	40.79	14.58	50.32	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 10 Setting : MCS0 Power setting 17.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>57.05</td> <td>68.30</td> <td>-11.25</td> <td>55.33</td> <td>37.02</td> <td>12.06</td> <td>47.36</td> <td>157</td> <td>126</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>50.89</td> <td>74.00</td> <td>-23.11</td> <td>45.84</td> <td>40.79</td> <td>14.58</td> <td>50.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	57.05	68.30	-11.25	55.33	37.02	12.06	47.36	157	126	Peak	2	15540.00	50.89	74.00	-23.11	45.84	40.79	14.58	50.32	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	58.75	68.30	-9.55	57.03	37.02	12.06	47.36	100	285	Peak																																																																																							
2	15540.00	49.92	74.00	-24.08	44.87	40.79	14.58	50.32	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10360.00	57.05	68.30	-11.25	55.33	37.02	12.06	47.36	157	126	Peak																																																																																							
2	15540.00	50.89	74.00	-23.11	45.84	40.79	14.58	50.32	---	---	Peak																																																																																							



Mode	11																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11be EHT20_CH44_Full_5220MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 11 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>59.42</td> <td>68.30</td> <td>-8.88</td> <td>57.55</td> <td>37.07</td> <td>12.12</td> <td>47.32</td> <td>102</td> <td>285</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>49.42</td> <td>74.00</td> <td>-24.58</td> <td>44.05</td> <td>41.09</td> <td>14.64</td> <td>50.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	59.42	68.30	-8.88	57.55	37.07	12.12	47.32	102	285	Peak	2	15660.00	49.42	74.00	-24.58	44.05	41.09	14.64	50.36	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 11 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>56.59</td> <td>68.30</td> <td>-11.71</td> <td>54.72</td> <td>37.07</td> <td>12.12</td> <td>47.32</td> <td>116</td> <td>120</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>50.82</td> <td>74.00</td> <td>-23.18</td> <td>45.45</td> <td>41.09</td> <td>14.64</td> <td>50.36</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	56.59	68.30	-11.71	54.72	37.07	12.12	47.32	116	120	Peak	2	15660.00	50.82	74.00	-23.18	45.45	41.09	14.64	50.36	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	59.42	68.30	-8.88	57.55	37.07	12.12	47.32	102	285	Peak																																																																																							
2	15660.00	49.42	74.00	-24.58	44.05	41.09	14.64	50.36	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	56.59	68.30	-11.71	54.72	37.07	12.12	47.32	116	120	Peak																																																																																							
2	15660.00	50.82	74.00	-23.18	45.45	41.09	14.64	50.36	---	---	Peak																																																																																							



Mode	12																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11be EHT20_CH48_Full_5240MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 12 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>58.65</td> <td>68.30</td> <td>-9.65</td> <td>56.72</td> <td>37.09</td> <td>12.15</td> <td>47.31</td> <td>100</td> <td>184</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.78</td> <td>74.00</td> <td>-23.22</td> <td>45.28</td> <td>41.23</td> <td>14.66</td> <td>50.39</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	58.65	68.30	-9.65	56.72	37.09	12.15	47.31	100	184	Peak	2	15720.00	50.78	74.00	-23.22	45.28	41.23	14.66	50.39	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 12 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>57.48</td> <td>68.30</td> <td>-10.82</td> <td>55.55</td> <td>37.09</td> <td>12.15</td> <td>47.31</td> <td>162</td> <td>127</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>50.79</td> <td>74.00</td> <td>-23.21</td> <td>45.29</td> <td>41.23</td> <td>14.66</td> <td>50.39</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	57.48	68.30	-10.82	55.55	37.09	12.15	47.31	162	127	Peak	2	15720.00	50.79	74.00	-23.21	45.29	41.23	14.66	50.39	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	58.65	68.30	-9.65	56.72	37.09	12.15	47.31	100	184	Peak																																																																																							
2	15720.00	50.78	74.00	-23.22	45.28	41.23	14.66	50.39	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10480.00	57.48	68.30	-10.82	55.55	37.09	12.15	47.31	162	127	Peak																																																																																							
2	15720.00	50.79	74.00	-23.21	45.29	41.23	14.66	50.39	---	---	Peak																																																																																							



Mode	13																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11be EHT20_CH52_Full_5280MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 13 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>58.61</td> <td>68.30</td> <td>-9.69</td> <td>56.61</td> <td>37.11</td> <td>12.18</td> <td>47.29</td> <td>100</td> <td>278</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>50.88</td> <td>74.00</td> <td>-23.12</td> <td>45.22</td> <td>41.38</td> <td>14.69</td> <td>50.41</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	58.61	68.30	-9.69	56.61	37.11	12.18	47.29	100	278	Peak	2	15780.00	50.88	74.00	-23.12	45.22	41.38	14.69	50.41	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 13 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>57.04</td> <td>68.30</td> <td>-11.26</td> <td>55.04</td> <td>37.11</td> <td>12.18</td> <td>47.29</td> <td>100</td> <td>122</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.24</td> <td>74.00</td> <td>-24.76</td> <td>43.58</td> <td>41.38</td> <td>14.69</td> <td>50.41</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	57.04	68.30	-11.26	55.04	37.11	12.18	47.29	100	122	Peak	2	15780.00	49.24	74.00	-24.76	43.58	41.38	14.69	50.41	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	58.61	68.30	-9.69	56.61	37.11	12.18	47.29	100	278	Peak																																																																																							
2	15780.00	50.88	74.00	-23.12	45.22	41.38	14.69	50.41	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10520.00	57.04	68.30	-11.26	55.04	37.11	12.18	47.29	100	122	Peak																																																																																							
2	15780.00	49.24	74.00	-24.76	43.58	41.38	14.69	50.41	---	---	Peak																																																																																							



Mode	14																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11be EHT20_CH60_Full_5300MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 14 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>58.61</td> <td>74.00</td> <td>-15.39</td> <td>56.48</td> <td>37.16</td> <td>12.23</td> <td>47.26 100 284 Peak</td> </tr> <tr> <td>2 10600.00</td> <td>48.77</td> <td>54.00</td> <td>-5.23</td> <td>46.64</td> <td>37.16</td> <td>12.23</td> <td>47.26 100 284 Average</td> </tr> <tr> <td>3 15900.00</td> <td>49.87</td> <td>74.00</td> <td>-24.13</td> <td>43.91</td> <td>41.67</td> <td>14.75</td> <td>50.46 --- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10600.00	58.61	74.00	-15.39	56.48	37.16	12.23	47.26 100 284 Peak	2 10600.00	48.77	54.00	-5.23	46.64	37.16	12.23	47.26 100 284 Average	3 15900.00	49.87	74.00	-24.13	43.91	41.67	14.75	50.46 --- --- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 14 Setting : MCS0 Power setting 18 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>57.24</td> <td>74.00</td> <td>-16.76</td> <td>55.11</td> <td>37.16</td> <td>12.23</td> <td>47.26 164 128 Peak</td> </tr> <tr> <td>2 10600.00</td> <td>47.95</td> <td>54.00</td> <td>-6.05</td> <td>45.82</td> <td>37.16</td> <td>12.23</td> <td>47.26 164 128 Average</td> </tr> <tr> <td>3 15900.00</td> <td>49.78</td> <td>74.00</td> <td>-24.22</td> <td>43.82</td> <td>41.67</td> <td>14.75</td> <td>50.46 --- --- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10600.00	57.24	74.00	-16.76	55.11	37.16	12.23	47.26 164 128 Peak	2 10600.00	47.95	54.00	-6.05	45.82	37.16	12.23	47.26 164 128 Average	3 15900.00	49.78	74.00	-24.22	43.82	41.67	14.75	50.46 --- --- Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 10600.00	58.61	74.00	-15.39	56.48	37.16	12.23	47.26 100 284 Peak																																																																																											
2 10600.00	48.77	54.00	-5.23	46.64	37.16	12.23	47.26 100 284 Average																																																																																											
3 15900.00	49.87	74.00	-24.13	43.91	41.67	14.75	50.46 --- --- Peak																																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1 10600.00	57.24	74.00	-16.76	55.11	37.16	12.23	47.26 164 128 Peak																																																																																											
2 10600.00	47.95	54.00	-6.05	45.82	37.16	12.23	47.26 164 128 Average																																																																																											
3 15900.00	49.78	74.00	-24.22	43.82	41.67	14.75	50.46 --- --- Peak																																																																																											



Mode	15																																																																									
	Band Edge																																																																									
	5.25-5.35_UNII 2A_802.11be EHT20_CH64_Full_5320MHz																																																																									
ANT	CDD 5+18																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>64.83</td> <td>74.00</td> <td>-9.17</td> <td>52.73</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5350.24	64.83	74.00	-9.17	52.73	36.06	9.37	33.33	100	149	PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>108.10</td> <td>-----</td> <td>96.10</td> <td>36.07</td> <td>9.21</td> <td>33.28</td> <td>100</td> <td>149</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5320.00	108.10	-----	96.10	36.07	9.21	33.28	100	149	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																																			
1	5350.24	64.83	74.00	-9.17	52.73	36.06	9.37	33.33	100	149	PEAK																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																																			
1	5320.00	108.10	-----	96.10	36.07	9.21	33.28	100	149	PEAK																																																																
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>48.12</td> <td>54.00</td> <td>-5.88</td> <td>36.02</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5350.38	48.12	54.00	-5.88	36.02	36.06	9.37	33.33	100	149	AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.41</td> <td>-----</td> <td>88.41</td> <td>36.07</td> <td>9.21</td> <td>33.28</td> <td>100</td> <td>149</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5320.00	100.41	-----	88.41	36.07	9.21	33.28	100	149	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																																			
1	5350.38	48.12	54.00	-5.88	36.02	36.06	9.37	33.33	100	149	AVERAGE																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																																			
1	5320.00	100.41	-----	88.41	36.07	9.21	33.28	100	149	AVERAGE																																																																



Mode	15																																																																						
	Band Edge																																																																						
	5.25-5.35_UNII 2A_802.11be EHT20_CH64_Full_5320MHz																																																																						
ANT	CDD 5+18																																																																						
Pol.	Vertical	Fundamental																																																																					
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.66</td> <td>62.76</td> <td>74.00</td> <td>-11.24</td> <td>50.66</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>395</td> <td>214 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1 5350.66	62.76	74.00	-11.24	50.66	36.06	9.37	33.33	395	214 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>107.44</td> <td>-----</td> <td>-----</td> <td>95.42</td> <td>36.07</td> <td>9.24</td> <td>33.29</td> <td>395</td> <td>214 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1 5320.00	107.44	-----	-----	95.42	36.07	9.24	33.29	395	214 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																
1 5350.66	62.76	74.00	-11.24	50.66	36.06	9.37	33.33	395	214 PEAK																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																
1 5320.00	107.44	-----	-----	95.42	36.07	9.24	33.29	395	214 PEAK																																																														
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5350.80</td> <td>46.96</td> <td>54.00</td> <td>-7.04</td> <td>34.86</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>395</td> <td>214 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1 5350.80	46.96	54.00	-7.04	34.86	36.06	9.37	33.33	395	214 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 15 Setting : MCS0 Powersetting 16 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>99.13</td> <td>-----</td> <td>-----</td> <td>87.13</td> <td>36.07</td> <td>9.21</td> <td>33.28</td> <td>395</td> <td>214 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1 5320.00	99.13	-----	-----	87.13	36.07	9.21	33.28	395	214 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																
1 5350.80	46.96	54.00	-7.04	34.86	36.06	9.37	33.33	395	214 AVERAGE																																																														
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																
1 5320.00	99.13	-----	-----	87.13	36.07	9.21	33.28	395	214 AVERAGE																																																														







Mode	15																																																																																																																									
	Harmonic																																																																																																																									
	5.25-5.35_UNII 2A_802.11be EHT20_CH64_Full_5320MHz																																																																																																																									
ANT	CDD 5+18																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 15 Setting : MCS0 Power setting 16 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>54.06</td> <td>74.00</td> <td>-19.94</td> <td>51.86</td> <td>37.18</td> <td>12.26</td> <td>47.24</td> <td>100</td> <td>283</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>45.86</td> <td>54.00</td> <td>-8.14</td> <td>43.66</td> <td>37.18</td> <td>12.26</td> <td>47.24</td> <td>100</td> <td>283</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>50.91</td> <td>74.00</td> <td>-23.09</td> <td>44.80</td> <td>41.82</td> <td>14.77</td> <td>50.48</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	54.06	74.00	-19.94	51.86	37.18	12.26	47.24	100	283	Peak	2	10640.00	45.86	54.00	-8.14	43.66	37.18	12.26	47.24	100	283	Average	3	15960.00	50.91	74.00	-23.09	44.80	41.82	14.77	50.48	---	---	Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 15 Setting : MCS0 Power setting 16 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>52.90</td> <td>74.00</td> <td>-21.10</td> <td>50.70</td> <td>37.18</td> <td>12.26</td> <td>47.24</td> <td>158</td> <td>129</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>10640.00</td> <td>44.96</td> <td>54.00</td> <td>-9.04</td> <td>42.76</td> <td>37.18</td> <td>12.26</td> <td>47.24</td> <td>158</td> <td>129</td> <td>Average</td> </tr> <tr> <td>3</td> <td>15960.00</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>44.69</td> <td>41.82</td> <td>14.77</td> <td>50.48</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10640.00	52.90	74.00	-21.10	50.70	37.18	12.26	47.24	158	129	Peak	2	10640.00	44.96	54.00	-9.04	42.76	37.18	12.26	47.24	158	129	Average	3	15960.00	50.80	74.00	-23.20	44.69	41.82	14.77	50.48	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	10640.00	54.06	74.00	-19.94	51.86	37.18	12.26	47.24	100	283	Peak																																																																																																															
2	10640.00	45.86	54.00	-8.14	43.66	37.18	12.26	47.24	100	283	Average																																																																																																															
3	15960.00	50.91	74.00	-23.09	44.80	41.82	14.77	50.48	---	---	Peak																																																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																																			
1	10640.00	52.90	74.00	-21.10	50.70	37.18	12.26	47.24	158	129	Peak																																																																																																															
2	10640.00	44.96	54.00	-9.04	42.76	37.18	12.26	47.24	158	129	Average																																																																																																															
3	15960.00	50.80	74.00	-23.20	44.69	41.82	14.77	50.48	---	---	Peak																																																																																																															



Mode	16																																																																																					
	Band Edge																																																																																					
	5.47-5.725_UNII 2C_802.11be EHT20_CH100_Full_5500MHz																																																																																					
ANT	CDD 5+18																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.20</td> <td>57.25</td> <td>74.00</td> <td>-16.75</td> <td>45.07</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>107</td> <td>44</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.70</td> <td>63.91</td> <td>68.30</td> <td>-4.39</td> <td>51.76</td> <td>36.01</td> <td>9.69</td> <td>33.55</td> <td>107</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5459.20	57.25	74.00	-16.75	45.07	36.02	9.69	33.53	107	44	PEAK	2	5469.70	63.91	68.30	-4.39	51.76	36.01	9.69	33.55	107	44	PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>109.38</td> <td>-----</td> <td>-----</td> <td>97.27</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>107</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	109.38	-----	-----	97.27	36.00	9.71	33.60	107	44	PEAK
Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5459.20	57.25	74.00	-16.75	45.07	36.02	9.69	33.53	107	44	PEAK																																																																											
2	5469.70	63.91	68.30	-4.39	51.76	36.01	9.69	33.55	107	44	PEAK																																																																											
Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5500.00	109.38	-----	-----	97.27	36.00	9.71	33.60	107	44	PEAK																																																																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.20</td> <td>42.46</td> <td>54.00</td> <td>-11.54</td> <td>30.28</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>107</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5459.20	42.46	54.00	-11.54	30.28	36.02	9.69	33.53	107	44	AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Line</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>101.57</td> <td>-----</td> <td>-----</td> <td>89.46</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>107</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	101.57	-----	-----	89.46	36.00	9.71	33.60	107	44	AVERAGE												
Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5459.20	42.46	54.00	-11.54	30.28	36.02	9.69	33.53	107	44	AVERAGE																																																																											
Line	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5500.00	101.57	-----	-----	89.46	36.00	9.71	33.60	107	44	AVERAGE																																																																											

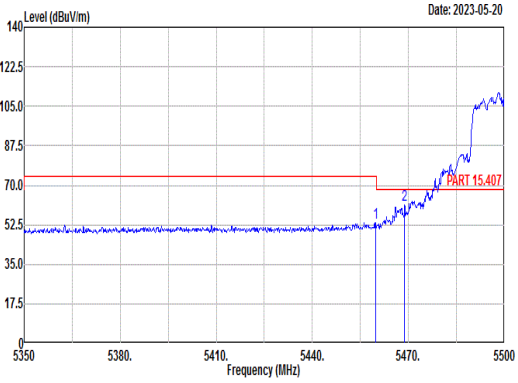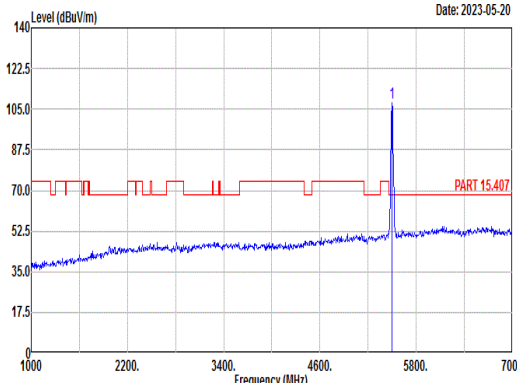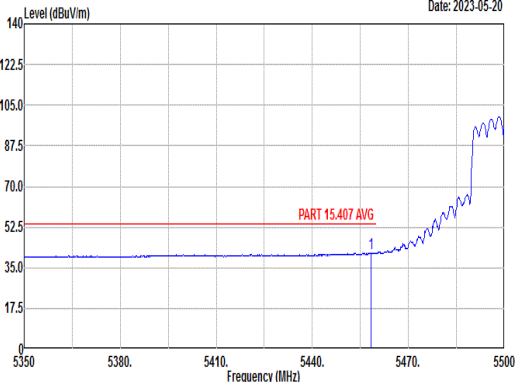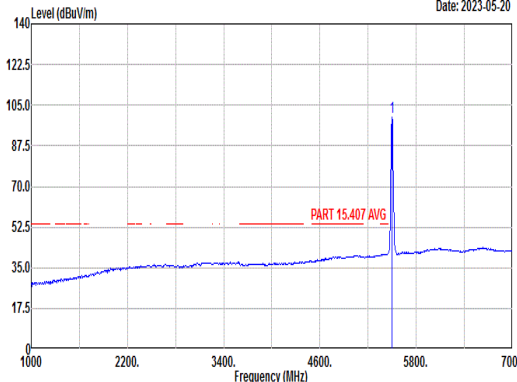

Mode	16																																																																																					
	Band Edge																																																																																					
	5.47-5.725_UNII 2C_802.11be EHT20_CH100_Full_5500MHz																																																																																					
ANT	CDD 5+18																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.80</td> <td>53.51</td> <td>74.00</td> <td>-20.49</td> <td>41.33</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>340</td> <td>210</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.80</td> <td>61.20</td> <td>68.30</td> <td>-7.10</td> <td>49.04</td> <td>36.01</td> <td>9.69</td> <td>33.54</td> <td>340</td> <td>210</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5459.80	53.51	74.00	-20.49	41.33	36.02	9.69	33.53	340	210	PEAK	2	5468.80	61.20	68.30	-7.10	49.04	36.01	9.69	33.54	340	210	PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>107.83</td> <td>-----</td> <td>-----</td> <td>95.72</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>340</td> <td>210</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5500.00	107.83	-----	-----	95.72	36.00	9.71	33.60	340	210	PEAK
	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																																											
1	5459.80	53.51	74.00	-20.49	41.33	36.02	9.69	33.53	340	210	PEAK																																																																											
2	5468.80	61.20	68.30	-7.10	49.04	36.01	9.69	33.54	340	210	PEAK																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																																											
1	5500.00	107.83	-----	-----	95.72	36.00	9.71	33.60	340	210	PEAK																																																																											
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.30</td> <td>41.23</td> <td>54.00</td> <td>-12.77</td> <td>29.04</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>340</td> <td>210</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5458.30	41.23	54.00	-12.77	29.04	36.02	9.69	33.52	340	210	AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 16 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.99</td> <td>-----</td> <td>-----</td> <td>87.88</td> <td>36.00</td> <td>9.71</td> <td>33.60</td> <td>340</td> <td>210</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg	1	5500.00	99.99	-----	-----	87.88	36.00	9.71	33.60	340	210	AVERAGE												
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																																											
1	5458.30	41.23	54.00	-12.77	29.04	36.02	9.69	33.52	340	210	AVERAGE																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	Line	(dB)	Level	Factor	Loss	Factor	dB	cm	deg																																																																											
1	5500.00	99.99	-----	-----	87.88	36.00	9.71	33.60	340	210	AVERAGE																																																																											






Mode	16																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11be EHT20_CH100_Full_5500MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 16 Setting : MCS0 Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>50.56</td> <td>74.00</td> <td>-23.44</td> <td>47.74</td> <td>37.40</td> <td>12.52</td> <td>47.10</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>50.46</td> <td>68.30</td> <td>-17.84</td> <td>41.93</td> <td>43.26</td> <td>15.17</td> <td>49.90</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	50.56	74.00	-23.44	47.74	37.40	12.52	47.10	--- Peak	2	16500.00	50.46	68.30	-17.84	41.93	43.26	15.17	49.90	--- Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 16 Setting : MCS0 Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>50.21</td> <td>74.00</td> <td>-23.79</td> <td>47.39</td> <td>37.40</td> <td>12.52</td> <td>47.10</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>42.42</td> <td>43.26</td> <td>15.17</td> <td>49.90</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	50.21	74.00	-23.79	47.39	37.40	12.52	47.10	--- Peak	2	16500.00	50.95	68.30	-17.35	42.42	43.26	15.17	49.90	--- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11000.00	50.56	74.00	-23.44	47.74	37.40	12.52	47.10	--- Peak																																																																																									
2	16500.00	50.46	68.30	-17.84	41.93	43.26	15.17	49.90	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11000.00	50.21	74.00	-23.79	47.39	37.40	12.52	47.10	--- Peak																																																																																									
2	16500.00	50.95	68.30	-17.35	42.42	43.26	15.17	49.90	--- Peak																																																																																									






Mode	17																																																																																											
	Harmonic																																																																																											
	5.47-5.725_UNII 2C_802.11be EHT20_CH116_Full_5580MHz																																																																																											
ANT	CDD 5+18																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 17 Setting : MCS0 Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>50.15</td> <td>74.00</td> <td>-23.85</td> <td>47.70</td> <td>37.49</td> <td>12.64</td> <td>47.68</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.56</td> <td>68.30</td> <td>-17.74</td> <td>42.88</td> <td>43.91</td> <td>15.35</td> <td>51.58</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	50.15	74.00	-23.85	47.70	37.49	12.64	47.68	2	16740.00	50.56	68.30	-17.74	42.88	43.91	15.35	51.58	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 17 Setting : MCS0 Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>47.81</td> <td>37.49</td> <td>12.64</td> <td>47.68</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>50.44</td> <td>68.30</td> <td>-17.86</td> <td>42.76</td> <td>43.91</td> <td>15.35</td> <td>51.58</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	50.26	74.00	-23.74	47.81	37.49	12.64	47.68	2	16740.00	50.44	68.30	-17.86	42.76	43.91	15.35	51.58
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1	11160.00	50.15	74.00	-23.85	47.70	37.49	12.64	47.68																																																																																				
2	16740.00	50.56	68.30	-17.74	42.88	43.91	15.35	51.58																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																				
1	11160.00	50.26	74.00	-23.74	47.81	37.49	12.64	47.68																																																																																				
2	16740.00	50.44	68.30	-17.86	42.76	43.91	15.35	51.58																																																																																				

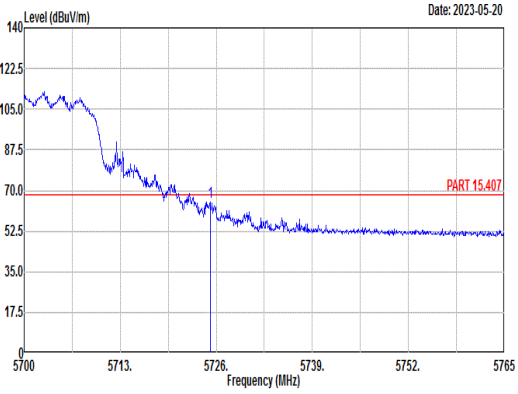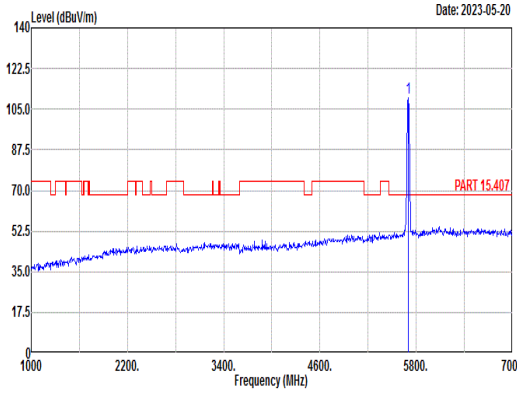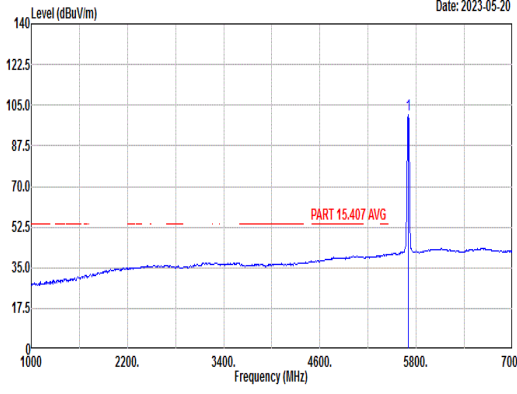

Mode	18																																																																			
	Band Edge																																																																			
	5.47-5.725_UNII 2C_802.11be EHT20_CH140_Full_5700MHz																																																																			
ANT	CDD 5+18																																																																			
Pol.	Horizontal	Fundamental																																																																		
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.16</td> <td>64.99</td> <td>68.30</td> <td>-3.31</td> <td>52.11</td> <td>36.32</td> <td>10.02 33.46</td> <td>100 62 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	5725.16	64.99	68.30	-3.31	52.11	36.32	10.02 33.46	100 62 PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>109.90</td> <td>-----</td> <td>-----</td> <td>97.14</td> <td>36.28</td> <td>9.96 33.48</td> <td>100 62 PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	5700.00	109.90	-----	-----	97.14	36.28	9.96 33.48	100 62 PEAK
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																													
1	5725.16	64.99	68.30	-3.31	52.11	36.32	10.02 33.46	100 62 PEAK																																																												
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																													
1	5700.00	109.90	-----	-----	97.14	36.28	9.96 33.48	100 62 PEAK																																																												
Avg	Blank	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:1.000kHz Mode : 18 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.85</td> <td>-----</td> <td>-----</td> <td>88.07</td> <td>36.29</td> <td>9.97 33.48</td> <td>100 62 AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg	1	5700.00	100.85	-----	-----	88.07	36.29	9.97 33.48	100 62 AVERAGE																																	
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm deg																																																													
1	5700.00	100.85	-----	-----	88.07	36.29	9.97 33.48	100 62 AVERAGE																																																												

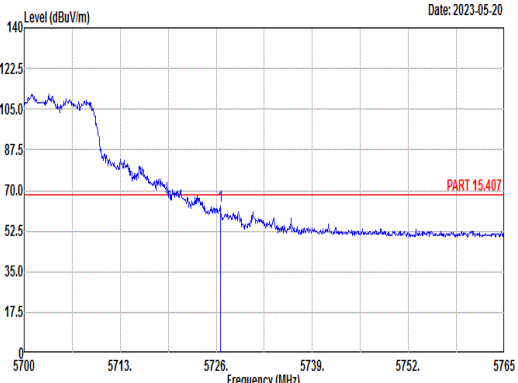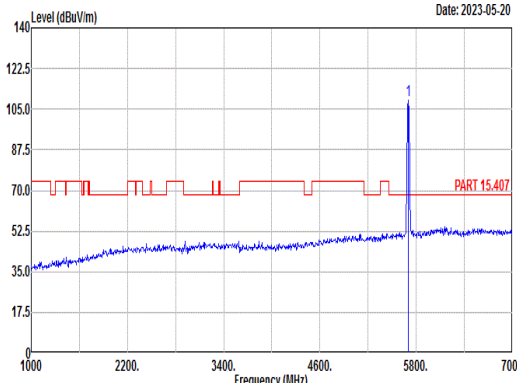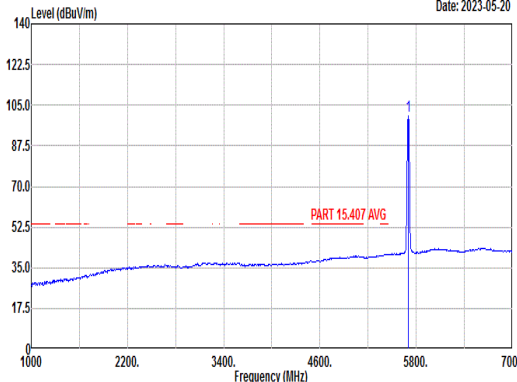

Mode	18																																																																														
	Band Edge																																																																														
	5.47-5.725_UNII 2C_802.11be EHT20_CH140_Full_5700MHz																																																																														
ANT	CDD 5+18																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.52</td> <td>63.60</td> <td>68.30</td> <td>-4.70</td> <td>50.72</td> <td>36.32</td> <td>10.02</td> <td>33.46</td> <td>341</td> <td>199</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5726.52	63.60	68.30	-4.70	50.72	36.32	10.02	33.46	341	199	PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 18 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>108.86</td> <td>-----</td> <td>96.10</td> <td>36.28</td> <td>9.96</td> <td>33.48</td> <td>341</td> <td>199</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	108.86	-----	96.10	36.28	9.96	33.48	341	199	PEAK
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5726.52	63.60	68.30	-4.70	50.72	36.32	10.02	33.46	341	199	PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5700.00	108.86	-----	96.10	36.28	9.96	33.48	341	199	PEAK																																																																					
Avg	Blank	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:1.000kHz Mode : 18 Setting : MCS0 Powersetting 13 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>100.34</td> <td>-----</td> <td>87.58</td> <td>36.28</td> <td>9.96</td> <td>33.48</td> <td>341</td> <td>199</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5700.00	100.34	-----	87.58	36.28	9.96	33.48	341	199	AVERAGE																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																								
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	5700.00	100.34	-----	87.58	36.28	9.96	33.48	341	199	AVERAGE																																																																					



Mode	18																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11be EHT20_CH140_Full_5700MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 18 Setting : MCS0 Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>50.60</td> <td>74.00</td> <td>-23.40</td> <td>48.69</td> <td>37.64</td> <td>12.81</td> <td>48.54</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.37</td> <td>68.30</td> <td>-17.93</td> <td>44.10</td> <td>44.29</td> <td>15.62</td> <td>53.64</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	50.60	74.00	-23.40	48.69	37.64	12.81	48.54	--- Peak	2	17100.00	50.37	68.30	-17.93	44.10	44.29	15.62	53.64	--- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 18 Setting : MCS0 Power setting 13 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>50.26</td> <td>74.00</td> <td>-23.74</td> <td>48.35</td> <td>37.64</td> <td>12.81</td> <td>48.54</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>50.27</td> <td>68.30</td> <td>-18.03</td> <td>44.00</td> <td>44.29</td> <td>15.62</td> <td>53.64</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	50.26	74.00	-23.74	48.35	37.64	12.81	48.54	--- Peak	2	17100.00	50.27	68.30	-18.03	44.00	44.29	15.62	53.64	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11400.00	50.60	74.00	-23.40	48.69	37.64	12.81	48.54	--- Peak																																																																																									
2	17100.00	50.37	68.30	-17.93	44.10	44.29	15.62	53.64	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11400.00	50.26	74.00	-23.74	48.35	37.64	12.81	48.54	--- Peak																																																																																									
2	17100.00	50.27	68.30	-18.03	44.00	44.29	15.62	53.64	--- Peak																																																																																									







Mode	19																																																												
	Band Edge - L																																																												
	5.15-5.25_UNII 1_802.11be EHT40_CH38_Full_5190MHz																																																												
ANT	CDD 5+18																																																												
Pol.	Horizontal	Fundamental																																																											
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5148.96 64.27 74.00 -9.73</td> <td>52.57</td> <td>36.14</td> <td>8.53</td> <td>32.97</td> <td>100</td> <td>35 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5148.96 64.27 74.00 -9.73	52.57	36.14	8.53	32.97	100	35 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00 101.70</td> <td>-----</td> <td>90.01</td> <td>36.12</td> <td>8.61</td> <td>33.04</td> <td>100</td> <td>35 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5190.00 101.70	-----	90.01	36.12	8.61	33.04	100	35 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																							
1 5148.96 64.27 74.00 -9.73	52.57	36.14	8.53	32.97	100	35 PEAK																																																							
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq Level Line (dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																						
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																							
1 5190.00 101.70	-----	90.01	36.12	8.61	33.04	100	35 PEAK																																																						
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5148.58 49.13 54.00 -4.87</td> <td>37.43</td> <td>36.14</td> <td>8.53</td> <td>32.97</td> <td>100</td> <td>35 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5148.58 49.13 54.00 -4.87	37.43	36.14	8.53	32.97	100	35 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5190.00 94.22</td> <td>-----</td> <td>82.53</td> <td>36.12</td> <td>8.62</td> <td>33.05</td> <td>100</td> <td>35 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level	Factor	Loss Factor	dB	dB	cm	deg	MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5190.00 94.22	-----	82.53	36.12	8.62	33.05	100	35 AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																							
Freq Level Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																							
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																							
1 5148.58 49.13 54.00 -4.87	37.43	36.14	8.53	32.97	100	35 AVERAGE																																																							
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																						
Freq Level Line (dB)	Level	Factor	Loss Factor	dB	dB	cm	deg																																																						
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																							
1 5190.00 94.22	-----	82.53	36.12	8.62	33.05	100	35 AVERAGE																																																						



Mode	19																																					
	Band Edge - R																																					
	5.15-5.25_UNII 1_802.11be EHT40_CH38_Full_5190MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5439.21</td> <td>52.46</td> <td>74.00</td> <td>-21.54</td> <td>40.25</td> <td>36.02</td> <td>9.68</td> <td>33.49</td> <td>100</td> <td>35</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5439.21	52.46	74.00	-21.54	40.25	36.02	9.68	33.49	100	35	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5439.21	52.46	74.00	-21.54	40.25	36.02	9.68	33.49	100	35	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.22</td> <td>41.45</td> <td>54.00</td> <td>-12.55</td> <td>29.22</td> <td>36.03</td> <td>9.67</td> <td>33.47</td> <td>100</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5429.22	41.45	54.00	-12.55	29.22	36.03	9.67	33.47	100	35	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5429.22	41.45	54.00	-12.55	29.22	36.03	9.67	33.47	100	35	AVERAGE																											

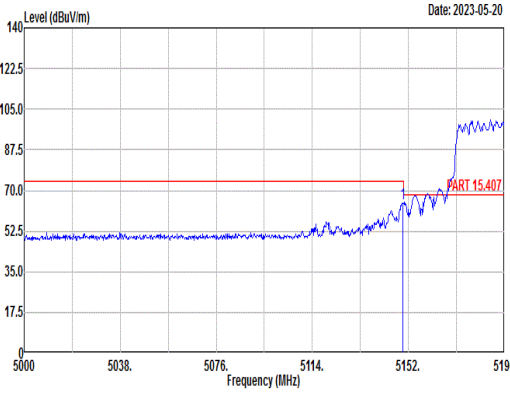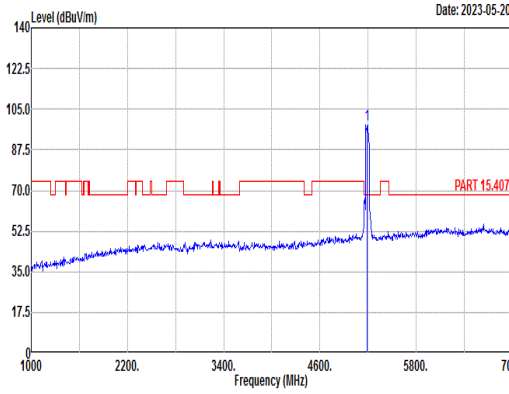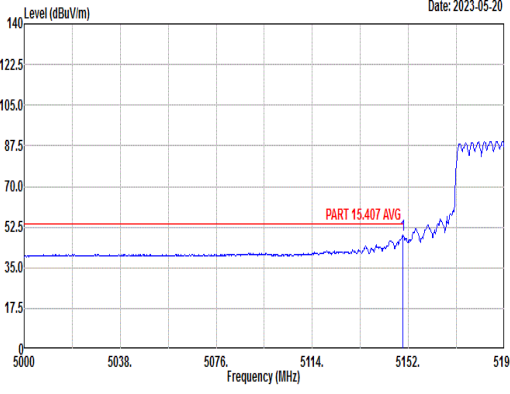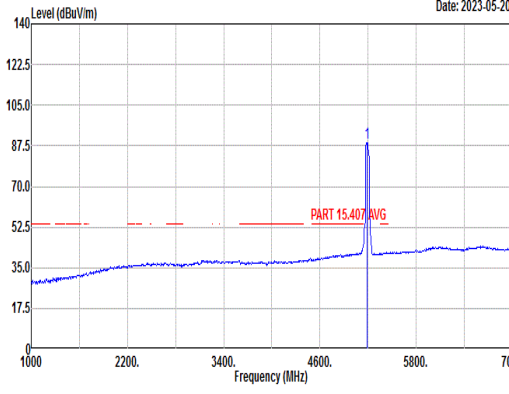

		19																																																								
Mode	Band Edge - L																																																									
	5.15-5.25_UNII 1_802.11be EHT40_CH38_Full_5190MHz																																																									
ANT	CDD 5+18																																																									
Pol.	Vertical	Fundamental																																																								
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.91</td> <td>64.63</td> <td>74.00</td> <td>-9.37</td> <td>52.92</td> <td>36.14</td> <td>8.54</td> <td>32.97</td> <td>367</td> <td>230 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5149.91	64.63	74.00	-9.37	52.92	36.14	8.54	32.97	367	230 PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>98.50</td> <td>-----</td> <td>86.81</td> <td>36.13</td> <td>8.57</td> <td>33.01</td> <td>367</td> <td>230 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	1	5190.00	98.50	-----	86.81	36.13	8.57	33.01	367	230 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg																																																	
1	5149.91	64.63	74.00	-9.37	52.92	36.14	8.54	32.97	367	230 PEAK																																																
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																	
1	5190.00	98.50	-----	86.81	36.13	8.57	33.01	367	230 PEAK																																																	
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.72</td> <td>48.87</td> <td>54.00</td> <td>-5.13</td> <td>37.16</td> <td>36.14</td> <td>8.54</td> <td>32.97</td> <td>367</td> <td>230 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5149.72	48.87	54.00	-5.13	37.16	36.14	8.54	32.97	367	230 AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>88.97</td> <td>-----</td> <td>77.28</td> <td>36.12</td> <td>8.61</td> <td>33.04</td> <td>367</td> <td>230 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	1	5190.00	88.97	-----	77.28	36.12	8.61	33.04	367	230 AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg																																																	
1	5149.72	48.87	54.00	-5.13	37.16	36.14	8.54	32.97	367	230 AVERAGE																																																
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																	
1	5190.00	88.97	-----	77.28	36.12	8.61	33.04	367	230 AVERAGE																																																	



Mode	19																																									
	Band Edge - R																																									
	5.15-5.25_UNII 1_802.11be EHT40_CH38_Full_5190MHz																																									
ANT	CDD 5+18																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5439.48</td> <td>51.67</td> <td>74.00</td> <td>-22.33</td> <td>39.46</td> <td>36.02</td> <td>9.68</td> <td>33.49</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>367</td> <td>230 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1 5439.48	51.67	74.00	-22.33	39.46	36.02	9.68	33.49							367	230 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																			
1 5439.48	51.67	74.00	-22.33	39.46	36.02	9.68	33.49																																			
						367	230 PEAK																																			
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 19 Setting : MCS0 Powersetting 15 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5419.77</td> <td>41.38</td> <td>54.00</td> <td>-12.62</td> <td>29.14</td> <td>36.03</td> <td>9.67</td> <td>33.46</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>367</td> <td>230 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1 5419.77	41.38	54.00	-12.62	29.14	36.03	9.67	33.46							367	230 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																			
1 5419.77	41.38	54.00	-12.62	29.14	36.03	9.67	33.46																																			
						367	230 AVERAGE																																			



Mode	19																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11be EHT40_CH38_Full_5190MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 19 Setting : MCS0 Power setting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>50.48</td> <td>68.30</td> <td>-17.82</td> <td>48.72</td> <td>37.03</td> <td>12.08</td> <td>47.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>50.46</td> <td>74.00</td> <td>-23.54</td> <td>45.32</td> <td>40.87</td> <td>14.60</td> <td>50.33</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10380.00	50.48	68.30	-17.82	48.72	37.03	12.08	47.35	---	---	Peak	2	15570.00	50.46	74.00	-23.54	45.32	40.87	14.60	50.33	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 19 Setting : MCS0 Power setting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>50.83</td> <td>68.30</td> <td>-17.47</td> <td>49.07</td> <td>37.03</td> <td>12.08</td> <td>47.35</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>51.24</td> <td>74.00</td> <td>-22.76</td> <td>46.10</td> <td>40.87</td> <td>14.60</td> <td>50.33</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10380.00	50.83	68.30	-17.47	49.07	37.03	12.08	47.35	---	---	Peak	2	15570.00	51.24	74.00	-22.76	46.10	40.87	14.60	50.33	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10380.00	50.48	68.30	-17.82	48.72	37.03	12.08	47.35	---	---	Peak																																																																																							
2	15570.00	50.46	74.00	-23.54	45.32	40.87	14.60	50.33	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10380.00	50.83	68.30	-17.47	49.07	37.03	12.08	47.35	---	---	Peak																																																																																							
2	15570.00	51.24	74.00	-22.76	46.10	40.87	14.60	50.33	---	---	Peak																																																																																							



Mode	20																																																																										
	Band Edge - L																																																																										
	5.15-5.25_UNII 1_802.11be EHT40_CH46_Full_5230MHz																																																																										
ANT	CDD 5+18																																																																										
Pol.	Horizontal	Fundamental																																																																									
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.99</td> <td>57.53</td> <td>74.00</td> <td>-16.47</td> <td>45.82</td> <td>36.14</td> <td>8.52</td> <td>32.95</td> <td>100</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5140.99	57.53	74.00	-16.47	45.82	36.14	8.52	32.95	100	150	PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>106.08</td> <td>-----</td> <td>94.34</td> <td>36.11</td> <td>8.74</td> <td>33.11</td> <td>100</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5230.00	106.08	-----	94.34	36.11	8.74	33.11	100	150	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5140.99	57.53	74.00	-16.47	45.82	36.14	8.52	32.95	100	150	PEAK																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5230.00	106.08	-----	94.34	36.11	8.74	33.11	100	150	PEAK																																																																	
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.99</td> <td>42.98</td> <td>54.00</td> <td>-11.02</td> <td>31.27</td> <td>36.14</td> <td>8.52</td> <td>32.95</td> <td>100</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5140.99	42.98	54.00	-11.02	31.27	36.14	8.52	32.95	100	150	AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>98.09</td> <td>-----</td> <td>86.35</td> <td>36.11</td> <td>8.74</td> <td>33.11</td> <td>100</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5230.00	98.09	-----	86.35	36.11	8.74	33.11	100	150	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5140.99	42.98	54.00	-11.02	31.27	36.14	8.52	32.95	100	150	AVERAGE																																																																
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																				
1	5230.00	98.09	-----	86.35	36.11	8.74	33.11	100	150	AVERAGE																																																																	



Mode	20																																					
	Band Edge - R																																					
	5.15-5.25_UNII 1_802.11be EHT40_CH46_Full_5230MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5399.28</td> <td>52.80</td> <td>74.00</td> <td>-21.20</td> <td>40.56</td> <td>36.04</td> <td>9.62</td> <td>33.42</td> <td>100</td> <td>150</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5399.28	52.80	74.00	-21.20	40.56	36.04	9.62	33.42	100	150	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5399.28	52.80	74.00	-21.20	40.56	36.04	9.62	33.42	100	150	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.50</td> <td>41.74</td> <td>54.00</td> <td>-12.26</td> <td>29.51</td> <td>36.03</td> <td>9.67</td> <td>33.47</td> <td>100</td> <td>150</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5425.50	41.74	54.00	-12.26	29.51	36.03	9.67	33.47	100	150	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5425.50	41.74	54.00	-12.26	29.51	36.03	9.67	33.47	100	150	AVERAGE																											



Mode	20																																																																											
	Band Edge - L																																																																											
	5.15-5.25_UNII 1_802.11be EHT40_CH46_Full_5230MHz																																																																											
ANT	CDD 5+18																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.91</td> <td>59.73</td> <td>74.00</td> <td>-14.27</td> <td>48.03</td> <td>36.14</td> <td>8.52</td> <td>32.96</td> <td>400</td> <td>200 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5141.91	59.73	74.00	-14.27	48.03	36.14	8.52	32.96	400	200 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>98.06</td> <td>-----</td> <td>86.30</td> <td>36.11</td> <td>8.77</td> <td>33.12</td> <td>400</td> <td>200 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5230.00	98.06	-----	86.30	36.11	8.77	33.12	400	200 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																			
1	5141.91	59.73	74.00	-14.27	48.03	36.14	8.52	32.96	400	200 PEAK																																																																		
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	Remark																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																			
1	5230.00	98.06	-----	86.30	36.11	8.77	33.12	400	200 PEAK																																																																			
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5142.14</td> <td>45.58</td> <td>54.00</td> <td>-8.42</td> <td>33.88</td> <td>36.14</td> <td>8.52</td> <td>32.96</td> <td>400</td> <td>200 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5142.14	45.58	54.00	-8.42	33.88	36.14	8.52	32.96	400	200 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>90.89</td> <td>-----</td> <td>79.15</td> <td>36.11</td> <td>8.74</td> <td>33.11</td> <td>400</td> <td>200 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5230.00	90.89	-----	79.15	36.11	8.74	33.11	400	200 AVERAGE
Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor	APos	TPos	Remark																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																			
1	5142.14	45.58	54.00	-8.42	33.88	36.14	8.52	32.96	400	200 AVERAGE																																																																		
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	Remark																																																																					
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																			
1	5230.00	90.89	-----	79.15	36.11	8.74	33.11	400	200 AVERAGE																																																																			



Mode	20																																					
	Band Edge - R																																					
	5.15-5.25_UNII 1_802.11be EHT40_CH46_Full_5230MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5411.70</td> <td>52.49</td> <td>74.00</td> <td>-21.51</td> <td>40.23</td> <td>36.04</td> <td>9.66</td> <td>33.44</td> <td>400</td> <td>200</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5411.70	52.49	74.00	-21.51	40.23	36.04	9.66	33.44	400	200	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5411.70	52.49	74.00	-21.51	40.23	36.04	9.66	33.44	400	200	PEAK																											
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 20 Setting : MCS0 Powersetting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.26</td> <td>41.74</td> <td>54.00</td> <td>-12.26</td> <td>29.55</td> <td>36.02</td> <td>9.68</td> <td>33.51</td> <td>400</td> <td>200</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5451.26	41.74	54.00	-12.26	29.55	36.02	9.68	33.51	400	200	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5451.26	41.74	54.00	-12.26	29.55	36.02	9.68	33.51	400	200	AVERAGE																											



Mode	20																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11be EHT40_CH46_Full_5230MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 20 Setting : MCS0 Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>50.83</td> <td>68.30</td> <td>-17.47</td> <td>48.94</td> <td>37.08</td> <td>12.13</td> <td>47.32</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>50.31</td> <td>74.00</td> <td>-23.69</td> <td>44.88</td> <td>41.16</td> <td>14.65</td> <td>50.38</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10460.00	50.83	68.30	-17.47	48.94	37.08	12.13	47.32	--- Peak	2	15690.00	50.31	74.00	-23.69	44.88	41.16	14.65	50.38	--- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 20 Setting : MCS0 Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>50.80</td> <td>68.30</td> <td>-17.50</td> <td>48.91</td> <td>37.08</td> <td>12.13</td> <td>47.32</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>45.37</td> <td>41.16</td> <td>14.65</td> <td>50.38</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10460.00	50.80	68.30	-17.50	48.91	37.08	12.13	47.32	--- Peak	2	15690.00	50.80	74.00	-23.20	45.37	41.16	14.65	50.38	--- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10460.00	50.83	68.30	-17.47	48.94	37.08	12.13	47.32	--- Peak																																																																																									
2	15690.00	50.31	74.00	-23.69	44.88	41.16	14.65	50.38	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10460.00	50.80	68.30	-17.50	48.91	37.08	12.13	47.32	--- Peak																																																																																									
2	15690.00	50.80	74.00	-23.20	45.37	41.16	14.65	50.38	--- Peak																																																																																									



Mode	21																																																																																									
	Band Edge - L																																																																																									
	5.25-5.35_UNII 2A_802.11be EHT40_CH54_Full_5270MHz																																																																																									
ANT	CDD 5+18																																																																																									
Pol.	Horizontal	Fundamental																																																																																								
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5095.04</td> <td>52.04</td> <td>74.00</td> <td>-21.96</td> <td>40.32</td> <td>36.16</td> <td>8.43</td> <td>32.87</td> <td>104</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm								deg	1	5095.04	52.04	74.00	-21.96	40.32	36.16	8.43	32.87	104	48	PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>107.18</td> <td>-----</td> <td>95.30</td> <td>36.09</td> <td>8.99</td> <td>33.20</td> <td>104</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm								deg	1	5270.00	107.18	-----	95.30	36.09	8.99	33.20	104	48	PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																			
							deg																																																																																			
1	5095.04	52.04	74.00	-21.96	40.32	36.16	8.43	32.87	104	48	PEAK																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																			
							deg																																																																																			
1	5270.00	107.18	-----	95.30	36.09	8.99	33.20	104	48	PEAK																																																																																
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5121.77</td> <td>41.01</td> <td>54.00</td> <td>-12.99</td> <td>29.30</td> <td>36.15</td> <td>8.48</td> <td>32.92</td> <td>104</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm								deg	1	5121.77	41.01	54.00	-12.99	29.30	36.15	8.48	32.92	104	48	AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>98.17</td> <td>-----</td> <td>86.31</td> <td>36.09</td> <td>8.96</td> <td>33.19</td> <td>104</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm								deg	1	5270.00	98.17	-----	86.31	36.09	8.96	33.19	104	48	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																			
							deg																																																																																			
1	5121.77	41.01	54.00	-12.99	29.30	36.15	8.48	32.92	104	48	AVERAGE																																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																			
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																			
							deg																																																																																			
1	5270.00	98.17	-----	86.31	36.09	8.96	33.19	104	48	AVERAGE																																																																																



Mode	21																																					
	Band Edge - R																																					
	5.25-5.35_UNII 2A_802.11be EHT40_CH54_Full_5270MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.73</td> <td>57.76</td> <td>74.00</td> <td>-16.24</td> <td>45.64</td> <td>36.06</td> <td>9.41</td> <td>33.35</td> <td>104</td> <td>48</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5358.73	57.76	74.00	-16.24	45.64	36.06	9.41	33.35	104	48	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																															
1	5358.73	57.76	74.00	-16.24	45.64	36.06	9.41	33.35	104	48	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.98</td> <td>44.30</td> <td>54.00</td> <td>-9.70</td> <td>32.19</td> <td>36.06</td> <td>9.39</td> <td>33.34</td> <td>104</td> <td>48</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5353.98	44.30	54.00	-9.70	32.19	36.06	9.39	33.34	104	48	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																															
1	5353.98	44.30	54.00	-9.70	32.19	36.06	9.39	33.34	104	48	AVERAGE																											



Mode	21																																																																									
	Band Edge - L																																																																									
	5.25-5.35_UNII 2A_802.11be EHT40_CH54_Full_5270MHz																																																																									
ANT	CDD 5+18																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5130.14</td> <td>52.26</td> <td>74.00</td> <td>-21.74</td> <td>40.54</td> <td>36.15</td> <td>8.50</td> <td>32.93</td> <td>383</td> <td>205</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5130.14	52.26	74.00	-21.74	40.54	36.15	8.50	32.93	383	205	PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>106.35</td> <td>-----</td> <td>94.47</td> <td>36.09</td> <td>8.99</td> <td>33.20</td> <td>383</td> <td>205</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5270.00	106.35	-----	94.47	36.09	8.99	33.20	383	205	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5130.14	52.26	74.00	-21.74	40.54	36.15	8.50	32.93	383	205	PEAK																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5270.00	106.35	-----	94.47	36.09	8.99	33.20	383	205	PEAK																																																																
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.57</td> <td>41.30</td> <td>54.00</td> <td>-12.70</td> <td>29.59</td> <td>36.15</td> <td>8.50</td> <td>32.94</td> <td>383</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5132.57	41.30	54.00	-12.70	29.59	36.15	8.50	32.94	383	205	AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>98.78</td> <td>-----</td> <td>86.92</td> <td>36.09</td> <td>8.96</td> <td>33.19</td> <td>383</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5270.00	98.78	-----	86.92	36.09	8.96	33.19	383	205	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5132.57	41.30	54.00	-12.70	29.59	36.15	8.50	32.94	383	205	AVERAGE																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5270.00	98.78	-----	86.92	36.09	8.96	33.19	383	205	AVERAGE																																																																



Mode	21																																					
	Band Edge - R																																					
	5.25-5.35_UNII 2A_802.11be EHT40_CH54_Full_5270MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5361.39</td> <td>54.35</td> <td>74.00</td> <td>-19.65</td> <td>42.22</td> <td>36.06</td> <td>9.42</td> <td>33.35</td> <td>383</td> <td>205</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5361.39	54.35	74.00	-19.65	42.22	36.06	9.42	33.35	383	205	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5361.39	54.35	74.00	-19.65	42.22	36.06	9.42	33.35	383	205	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 21 Setting : MCS0 Powersetting 17 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5393.50</td> <td>41.77</td> <td>54.00</td> <td>-12.23</td> <td>29.55</td> <td>36.04</td> <td>9.59</td> <td>33.41</td> <td>383</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5393.50	41.77	54.00	-12.23	29.55	36.04	9.59	33.41	383	205	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5393.50	41.77	54.00	-12.23	29.55	36.04	9.59	33.41	383	205	AVERAGE																											



Mode	21																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11be EHT40_CH54_Full_5270MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 21 Setting : MCS0 Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>55.27</td> <td>68.30</td> <td>-13.03</td> <td>53.23</td> <td>37.13</td> <td>12.19</td> <td>47.28</td> <td>100</td> <td>288</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>50.87</td> <td>74.00</td> <td>-23.13</td> <td>45.13</td> <td>41.45</td> <td>14.71</td> <td>50.42</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10540.00	55.27	68.30	-13.03	53.23	37.13	12.19	47.28	100	288	Peak	2	15810.00	50.87	74.00	-23.13	45.13	41.45	14.71	50.42	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 21 Setting : MCS0 Power setting 17 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>54.23</td> <td>68.30</td> <td>-14.07</td> <td>52.19</td> <td>37.13</td> <td>12.19</td> <td>47.28</td> <td>162</td> <td>127</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>50.89</td> <td>74.00</td> <td>-23.11</td> <td>45.15</td> <td>41.45</td> <td>14.71</td> <td>50.42</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10540.00	54.23	68.30	-14.07	52.19	37.13	12.19	47.28	162	127	Peak	2	15810.00	50.89	74.00	-23.11	45.15	41.45	14.71	50.42	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10540.00	55.27	68.30	-13.03	53.23	37.13	12.19	47.28	100	288	Peak																																																																																							
2	15810.00	50.87	74.00	-23.13	45.13	41.45	14.71	50.42	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10540.00	54.23	68.30	-14.07	52.19	37.13	12.19	47.28	162	127	Peak																																																																																							
2	15810.00	50.89	74.00	-23.11	45.15	41.45	14.71	50.42	---	---	Peak																																																																																							



Mode	22																																																																																																																							
	Band Edge - L																																																																																																																							
	5.25-5.35_UNII 2A_802.11be EHT40_CH62_Full_5310MHz																																																																																																																							
ANT	CDD 5+18																																																																																																																							
Pol.	Horizontal	Fundamental																																																																																																																						
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5052.70</td> <td>51.06</td> <td>74.00</td> <td>-22.94</td> <td>39.31</td> <td>36.18</td> <td>8.36</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>32.79</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>153</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5052.70	51.06	74.00	-22.94	39.31	36.18	8.36								32.79								100								153								PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>105.28</td> <td>-----</td> <td>93.30</td> <td>36.08</td> <td>9.15</td> <td>33.25</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>153</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	105.28	-----	93.30	36.08	9.15	33.25	100									153									PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																																	
1	5052.70	51.06	74.00	-22.94	39.31	36.18	8.36																																																																																																																	
							32.79																																																																																																																	
							100																																																																																																																	
							153																																																																																																																	
							PEAK																																																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5310.00	105.28	-----	93.30	36.08	9.15	33.25	100																																																																																																																
								153																																																																																																																
								PEAK																																																																																																																
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5080.60</td> <td>40.77</td> <td>54.00</td> <td>-13.23</td> <td>29.04</td> <td>36.17</td> <td>8.41</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>32.85</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>153</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	1	5080.60	40.77	54.00	-13.23	29.04	36.17	8.41								32.85								100								153								AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>96.42</td> <td>-----</td> <td>84.44</td> <td>36.08</td> <td>9.15</td> <td>33.25</td> <td>100</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>153</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	96.42	-----	84.44	36.08	9.15	33.25	100									153									AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm																																																																																																																	
1	5080.60	40.77	54.00	-13.23	29.04	36.17	8.41																																																																																																																	
							32.85																																																																																																																	
							100																																																																																																																	
							153																																																																																																																	
							AVERAGE																																																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Factor																																																																																																																
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																																
1	5310.00	96.42	-----	84.44	36.08	9.15	33.25	100																																																																																																																
								153																																																																																																																
								AVERAGE																																																																																																																



Mode	22																																			
	Band Edge - R																																			
	5.25-5.35_UNII 2A_802.11be EHT40_CH62_Full_5310MHz																																			
ANT	CDD 5+18																																			
Pol.	Horizontal	Fundamental																																		
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.80</td> <td>63.78</td> <td>74.00</td> <td>-10.22</td> <td>51.68</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>100</td> <td>153 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1 5350.80	63.78	74.00	-10.22	51.68	36.06	9.37	33.33	100	153 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																													
1 5350.80	63.78	74.00	-10.22	51.68	36.06	9.37	33.33	100	153 PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.95</td> <td>50.37</td> <td>54.00</td> <td>-3.63</td> <td>38.27</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>100</td> <td>153 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1 5350.95	50.37	54.00	-3.63	38.27	36.06	9.37	33.33	100	153 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																													
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																													
1 5350.95	50.37	54.00	-3.63	38.27	36.06	9.37	33.33	100	153 AVERAGE																											



Mode	22																																																																																														
	Band Edge - L																																																																																														
	5.25-5.35_UNII 2A_802.11be EHT40_CH62_Full_5310MHz																																																																																														
ANT	CDD 5+18																																																																																														
Pol.	Vertical	Fundamental																																																																																													
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5067.89</td> <td>51.61</td> <td>74.00</td> <td>-22.39</td> <td>39.88</td> <td>36.17</td> <td>8.38</td> <td>32.82</td> <td>397</td> <td>214</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB					cm	deg			1	5067.89	51.61	74.00	-22.39	39.88	36.17	8.38	32.82	397	214	PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>104.34</td> <td>-----</td> <td>92.36</td> <td>36.08</td> <td>9.15</td> <td>33.25</td> <td>397</td> <td>214</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg											1	5310.00	104.34	-----	92.36	36.08	9.15	33.25	397	214	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																																																								
				cm	deg																																																																																										
1	5067.89	51.61	74.00	-22.39	39.88	36.17	8.38	32.82	397	214	PEAK																																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5310.00	104.34	-----	92.36	36.08	9.15	33.25	397	214	PEAK																																																																																					
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5092.69</td> <td>41.02</td> <td>54.00</td> <td>-12.98</td> <td>29.30</td> <td>36.16</td> <td>8.43</td> <td>32.87</td> <td>397</td> <td>214</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB					cm	deg			1	5092.69	41.02	54.00	-12.98	29.30	36.16	8.43	32.87	397	214	AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>95.28</td> <td>-----</td> <td>83.30</td> <td>36.08</td> <td>9.15</td> <td>33.25</td> <td>397</td> <td>214</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg											1	5310.00	95.28	-----	83.30	36.08	9.15	33.25	397	214	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																																																																								
				cm	deg																																																																																										
1	5092.69	41.02	54.00	-12.98	29.30	36.16	8.43	32.87	397	214	AVERAGE																																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5310.00	95.28	-----	83.30	36.08	9.15	33.25	397	214	AVERAGE																																																																																					







Mode	22																																					
	Band Edge - R																																					
	5.25-5.35_UNII 2A_802.11be EHT40_CH62_Full_5310MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.95</td> <td>63.25</td> <td>74.00</td> <td>-10.75</td> <td>51.15</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>397</td> <td>214</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5350.95	63.25	74.00	-10.75	51.15	36.06	9.37	33.33	397	214	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5350.95	63.25	74.00	-10.75	51.15	36.06	9.37	33.33	397	214	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 22 Setting : MCS0 Powersetting 14.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.10</td> <td>49.80</td> <td>54.00</td> <td>-4.20</td> <td>37.70</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>397</td> <td>214</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5351.10	49.80	54.00	-4.20	37.70	36.06	9.37	33.33	397	214	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5351.10	49.80	54.00	-4.20	37.70	36.06	9.37	33.33	397	214	AVERAGE																											



Mode	22																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11be EHT40_CH62_Full_5310MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 22 Setting : MCS0 Power setting 14.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>50.95</td> <td>74.00</td> <td>-23.05</td> <td>48.78</td> <td>37.17</td> <td>12.25</td> <td>47.25</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>44.77</td> <td>41.74</td> <td>14.76</td> <td>50.47</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10620.00	50.95	74.00	-23.05	48.78	37.17	12.25	47.25	---	---	Peak	2	15930.00	50.80	74.00	-23.20	44.77	41.74	14.76	50.47	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 22 Setting : MCS0 Power setting 14.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>50.72</td> <td>74.00</td> <td>-23.28</td> <td>48.55</td> <td>37.17</td> <td>12.25</td> <td>47.25</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>50.77</td> <td>74.00</td> <td>-23.23</td> <td>44.74</td> <td>41.74</td> <td>14.76</td> <td>50.47</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10620.00	50.72	74.00	-23.28	48.55	37.17	12.25	47.25	---	---	Peak	2	15930.00	50.77	74.00	-23.23	44.74	41.74	14.76	50.47	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10620.00	50.95	74.00	-23.05	48.78	37.17	12.25	47.25	---	---	Peak																																																																																							
2	15930.00	50.80	74.00	-23.20	44.77	41.74	14.76	50.47	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10620.00	50.72	74.00	-23.28	48.55	37.17	12.25	47.25	---	---	Peak																																																																																							
2	15930.00	50.77	74.00	-23.23	44.74	41.74	14.76	50.47	---	---	Peak																																																																																							

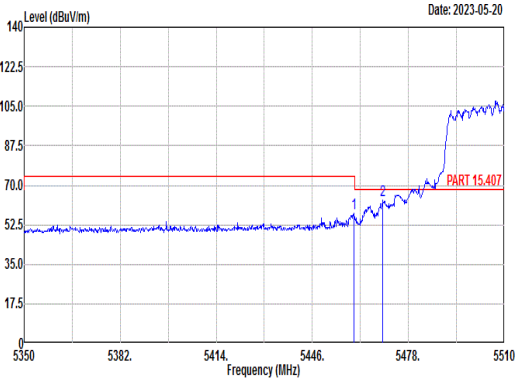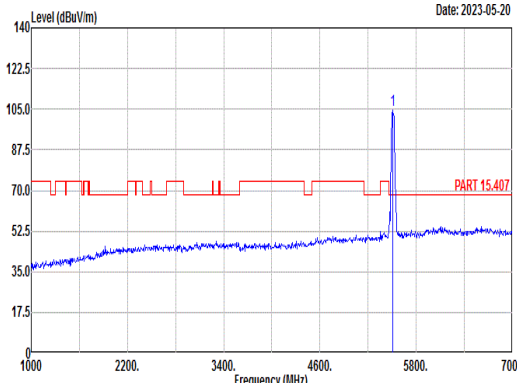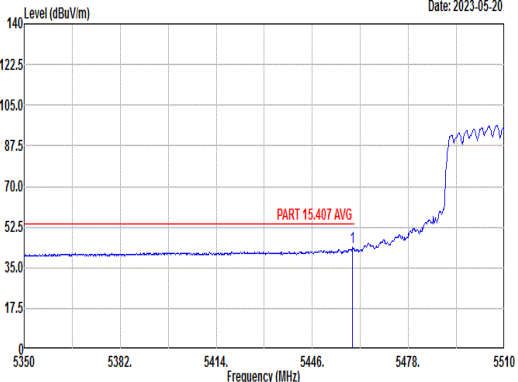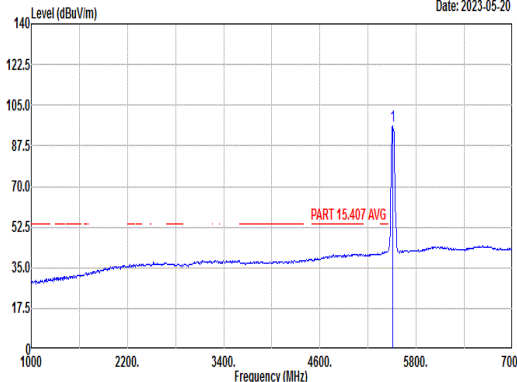

Mode	23																																																																																					
	Band Edge - L																																																																																					
	5.47-5.725_UNII 2C_802.11be EHT40_CH102_Full_5510MHz																																																																																					
ANT	CDD 5+18																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>57.36</td> <td>74.00</td> <td>-16.64</td> <td>45.18</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>113</td> <td>51</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>63.41</td> <td>68.30</td> <td>-4.89</td> <td>51.26</td> <td>36.01</td> <td>9.69</td> <td>33.55</td> <td>113</td> <td>51</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5459.76	57.36	74.00	-16.64	45.18	36.02	9.69	33.53	113	51	PEAK	2	5469.52	63.41	68.30	-4.89	51.26	36.01	9.69	33.55	113	51	PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>104.52</td> <td>-----</td> <td>-----</td> <td>92.40</td> <td>36.01</td> <td>9.71</td> <td>33.60</td> <td>113</td> <td>51</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	104.52	-----	-----	92.40	36.01	9.71	33.60	113	51	PEAK
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5459.76	57.36	74.00	-16.64	45.18	36.02	9.69	33.53	113	51	PEAK																																																																											
2	5469.52	63.41	68.30	-4.89	51.26	36.01	9.69	33.55	113	51	PEAK																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5510.00	104.52	-----	-----	92.40	36.01	9.71	33.60	113	51	PEAK																																																																											
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>31.76</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>113</td> <td>51</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5459.44	43.94	54.00	-10.06	31.76	36.02	9.69	33.53	113	51	AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>96.06</td> <td>-----</td> <td>-----</td> <td>83.94</td> <td>36.01</td> <td>9.71</td> <td>33.60</td> <td>113</td> <td>51</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5510.00	96.06	-----	-----	83.94	36.01	9.71	33.60	113	51	AVERAGE												
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5459.44	43.94	54.00	-10.06	31.76	36.02	9.69	33.53	113	51	AVERAGE																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5510.00	96.06	-----	-----	83.94	36.01	9.71	33.60	113	51	AVERAGE																																																																											



Mode	23																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT40_CH102_Full_5510MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5746.13</td> <td>52.93</td> <td>68.30</td> <td>-15.37</td> <td>39.98</td> <td>36.34</td> <td>10.06</td> <td>33.45</td> <td>113 51 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5746.13	52.93	68.30	-15.37	39.98	36.34	10.06	33.45	113 51 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5746.13	52.93	68.30	-15.37	39.98	36.34	10.06	33.45	113 51 PEAK																														



Mode	23																																																													
	Band Edge - L																																																													
	5.47-5.725_UNII 2C_802.11be EHT40_CH102_Full_5510MHz																																																													
ANT	CDD 5+18																																																													
Pol.	Vertical	Fundamental																																																												
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.72</td> <td>56.45</td> <td>74.00</td> <td>-17.55</td> <td>44.26</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>327</td> <td>216</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.80</td> <td>60.14</td> <td>68.30</td> <td>-8.16</td> <td>47.98</td> <td>36.01</td> <td>9.69</td> <td>33.54</td> <td>327</td> <td>216</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5456.72	56.45	74.00	-17.55	44.26	36.02	9.69	33.52	327	216	PEAK	2	5466.80	60.14	68.30	-8.16	47.98	36.01	9.69	33.54	327	216	PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>99.80</td> <td>70.00</td> <td>29.80</td> <td>87.66</td> <td>36.02</td> <td>9.71</td> <td>33.59</td> <td>327</td> <td>216</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5510.00	99.80	70.00	29.80	87.66	36.02	9.71	33.59	327	216	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																		
1	5456.72	56.45	74.00	-17.55	44.26	36.02	9.69	33.52	327	216	PEAK																																																			
2	5466.80	60.14	68.30	-8.16	47.98	36.01	9.69	33.54	327	216	PEAK																																																			
Peak	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5510.00	99.80	70.00	29.80	87.66	36.02	9.71	33.59	327	216	PEAK																																																			
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.92</td> <td>42.47</td> <td>54.00</td> <td>-11.53</td> <td>30.28</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>327</td> <td>216</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5455.92	42.47	54.00	-11.53	30.28	36.02	9.69	33.52	327	216	AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit (dBuV/m)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (cm)</th> <th>TPos (deg)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.16</td> <td>52.50</td> <td>39.66</td> <td>80.02</td> <td>36.02</td> <td>9.71</td> <td>33.59</td> <td>327</td> <td>216</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark	1	5510.00	92.16	52.50	39.66	80.02	36.02	9.71	33.59	327	216	AVERAGE												
Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5455.92	42.47	54.00	-11.53	30.28	36.02	9.69	33.52	327	216	AVERAGE																																																			
Avg	Freq (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (cm)	TPos (deg)	Remark																																																			
1	5510.00	92.16	52.50	39.66	80.02	36.02	9.71	33.59	327	216	AVERAGE																																																			



Mode	23																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT40_CH102_Full_5510MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 23 Setting : MCS0 Powersetting 12.5 Plane : X with Accessory : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5763.22</td> <td>52.78</td> <td>68.30</td> <td>-15.52</td> <td>39.75</td> <td>36.37</td> <td>10.10</td> <td>33.44</td> <td>327 216 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5763.22	52.78	68.30	-15.52	39.75	36.37	10.10	33.44	327 216 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5763.22	52.78	68.30	-15.52	39.75	36.37	10.10	33.44	327 216 PEAK																														







Mode	23																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11be EHT40_CH102_Full_5510MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 23 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>50.33</td> <td>74.00</td> <td>-23.67</td> <td>47.55</td> <td>37.41</td> <td>12.54</td> <td>47.17</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>50.85</td> <td>68.30</td> <td>-17.45</td> <td>42.43</td> <td>43.34</td> <td>15.19</td> <td>50.11</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11020.00	50.33	74.00	-23.67	47.55	37.41	12.54	47.17	--- Peak	2	16530.00	50.85	68.30	-17.45	42.43	43.34	15.19	50.11	--- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 23 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>50.49</td> <td>74.00</td> <td>-23.51</td> <td>47.71</td> <td>37.41</td> <td>12.54</td> <td>47.17</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>50.02</td> <td>68.30</td> <td>-18.28</td> <td>41.60</td> <td>43.34</td> <td>15.19</td> <td>50.11</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11020.00	50.49	74.00	-23.51	47.71	37.41	12.54	47.17	--- Peak	2	16530.00	50.02	68.30	-18.28	41.60	43.34	15.19	50.11	--- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11020.00	50.33	74.00	-23.67	47.55	37.41	12.54	47.17	--- Peak																																																																																									
2	16530.00	50.85	68.30	-17.45	42.43	43.34	15.19	50.11	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11020.00	50.49	74.00	-23.51	47.71	37.41	12.54	47.17	--- Peak																																																																																									
2	16530.00	50.02	68.30	-18.28	41.60	43.34	15.19	50.11	--- Peak																																																																																									



Mode	24																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11be EHT40_CH110_Full_5550MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 24 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>50.92</td> <td>74.00</td> <td>-23.08</td> <td>48.33</td> <td>37.46</td> <td>12.59</td> <td>47.46</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>49.47</td> <td>68.30</td> <td>-18.83</td> <td>41.47</td> <td>43.67</td> <td>15.28</td> <td>50.95</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11100.00	50.92	74.00	-23.08	48.33	37.46	12.59	47.46	--- Peak	2	16650.00	49.47	68.30	-18.83	41.47	43.67	15.28	50.95	--- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 24 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11100.00</td> <td>50.72</td> <td>74.00</td> <td>-23.28</td> <td>48.13</td> <td>37.46</td> <td>12.59</td> <td>47.46</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>16650.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>42.95</td> <td>43.67</td> <td>15.28</td> <td>50.95</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11100.00	50.72	74.00	-23.28	48.13	37.46	12.59	47.46	--- Peak	2	16650.00	50.95	68.30	-17.35	42.95	43.67	15.28	50.95	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11100.00	50.92	74.00	-23.08	48.33	37.46	12.59	47.46	--- Peak																																																																																									
2	16650.00	49.47	68.30	-18.83	41.47	43.67	15.28	50.95	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11100.00	50.72	74.00	-23.28	48.13	37.46	12.59	47.46	--- Peak																																																																																									
2	16650.00	50.95	68.30	-17.35	42.95	43.67	15.28	50.95	--- Peak																																																																																									

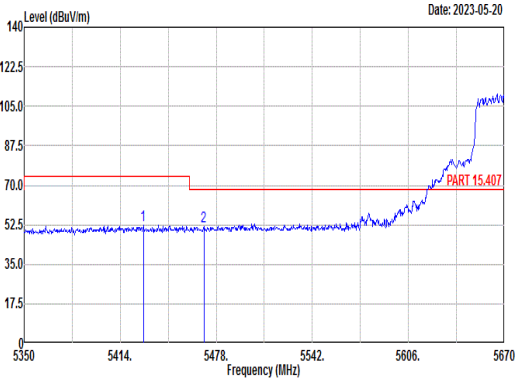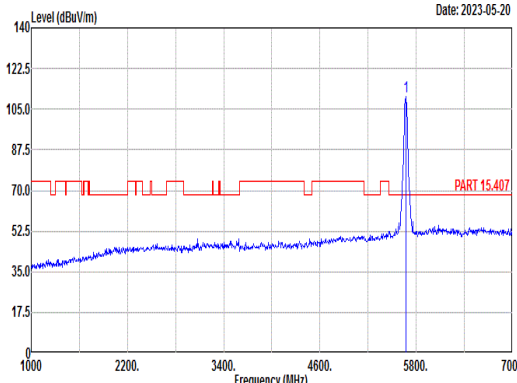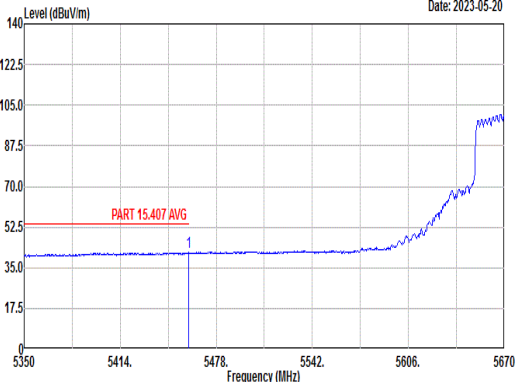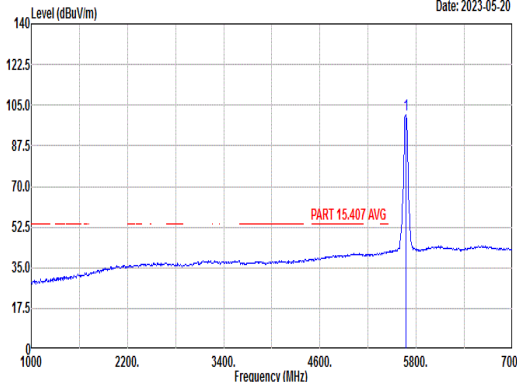

Mode	25																																																													
	Band Edge - L																																																													
	5.47-5.725_UNII 2C_802.11be EHT40_CH134_Full_5670MHz																																																													
ANT	CDD 5+18																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5429.36</td> <td>52.31</td> <td>74.00</td> <td>-21.69</td> <td>40.08</td> <td>36.03</td> <td>9.67</td> <td>33.47</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.68</td> <td>51.59</td> <td>68.30</td> <td>-16.71</td> <td>39.44</td> <td>36.01</td> <td>9.69</td> <td>33.55</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5429.36	52.31	74.00	-21.69	40.08	36.03	9.67	33.47	100	301	PEAK	2	5469.68	51.59	68.30	-16.71	39.44	36.01	9.69	33.55	100	301	PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>110.51</td> <td>70.00</td> <td>40.51</td> <td>97.87</td> <td>36.24</td> <td>9.90</td> <td>33.50</td> <td>100</td> <td>301</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5670.00	110.51	70.00	40.51	97.87	36.24	9.90	33.50	100	301	PEAK
	Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																		
1	5429.36	52.31	74.00	-21.69	40.08	36.03	9.67	33.47	100	301	PEAK																																																			
2	5469.68	51.59	68.30	-16.71	39.44	36.01	9.69	33.55	100	301	PEAK																																																			
Peak	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																			
1	5670.00	110.51	70.00	40.51	97.87	36.24	9.90	33.50	100	301	PEAK																																																			
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.44</td> <td>41.48</td> <td>54.00</td> <td>-12.52</td> <td>29.30</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5459.44	41.48	54.00	-12.52	29.30	36.02	9.69	33.53	100	301	AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Avg</th> <th>Freq (MHz)</th> <th>Level (dBuV/m)</th> <th>Limit Line (dB)</th> <th>Margin (dB)</th> <th>Read Level (dBuV)</th> <th>Ant Factor (dB/m)</th> <th>Cable Loss (dB)</th> <th>Preamp Loss (dB)</th> <th>APos (dB)</th> <th>TPos (cm)</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>100.88</td> <td>52.50</td> <td>48.38</td> <td>88.24</td> <td>36.24</td> <td>9.90</td> <td>33.50</td> <td>100</td> <td>301</td> <td>AVERAGE</td> </tr> </tbody> </table>	Avg	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark	1	5670.00	100.88	52.50	48.38	88.24	36.24	9.90	33.50	100	301	AVERAGE												
Avg	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																			
1	5459.44	41.48	54.00	-12.52	29.30	36.02	9.69	33.53	100	301	AVERAGE																																																			
Avg	Freq (MHz)	Level (dBuV/m)	Limit Line (dB)	Margin (dB)	Read Level (dBuV)	Ant Factor (dB/m)	Cable Loss (dB)	Preamp Loss (dB)	APos (dB)	TPos (cm)	Remark																																																			
1	5670.00	100.88	52.50	48.38	88.24	36.24	9.90	33.50	100	301	AVERAGE																																																			



Mode	25																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT40_CH134_Full_5670MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.48</td> <td>64.33</td> <td>68.30</td> <td>-3.97</td> <td>51.45</td> <td>36.32</td> <td>10.02</td> <td>33.46</td> <td>100 301 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5725.48	64.33	68.30	-3.97	51.45	36.32	10.02	33.46	100 301 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																														
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5725.48	64.33	68.30	-3.97	51.45	36.32	10.02	33.46	100 301 PEAK																														



Mode	25																																																																																					
	Band Edge - L																																																																																					
	5.47-5.725_UNII 2C_802.11be EHT40_CH134_Full_5670MHz																																																																																					
ANT	CDD 5+18																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5399.28</td> <td>52.02</td> <td>74.00</td> <td>-21.98</td> <td>39.78</td> <td>36.04</td> <td>9.62</td> <td>33.42</td> <td>338</td> <td>204</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.40</td> <td>52.20</td> <td>68.30</td> <td>-16.10</td> <td>40.02</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>338</td> <td>204</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5399.28	52.02	74.00	-21.98	39.78	36.04	9.62	33.42	338	204	PEAK	2	5468.40	52.20	68.30	-16.10	40.02	36.02	9.69	33.53	338	204	PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>104.92</td> <td>-----</td> <td>-----</td> <td>92.27</td> <td>36.24</td> <td>9.91</td> <td>33.50</td> <td>338</td> <td>204</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	104.92	-----	-----	92.27	36.24	9.91	33.50	338	204	PEAK
	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5399.28	52.02	74.00	-21.98	39.78	36.04	9.62	33.42	338	204	PEAK																																																																											
2	5468.40	52.20	68.30	-16.10	40.02	36.02	9.69	33.53	338	204	PEAK																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5670.00	104.92	-----	-----	92.27	36.24	9.91	33.50	338	204	PEAK																																																																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.08</td> <td>41.27</td> <td>54.00</td> <td>-12.73</td> <td>29.05</td> <td>36.03</td> <td>9.67</td> <td>33.48</td> <td>338</td> <td>204</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5436.08	41.27	54.00	-12.73	29.05	36.03	9.67	33.48	338	204	AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.65</td> <td>-----</td> <td>-----</td> <td>84.00</td> <td>36.24</td> <td>9.91</td> <td>33.50</td> <td>338</td> <td>204</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	96.65	-----	-----	84.00	36.24	9.91	33.50	338	204	AVERAGE												
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5436.08	41.27	54.00	-12.73	29.05	36.03	9.67	33.48	338	204	AVERAGE																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5670.00	96.65	-----	-----	84.00	36.24	9.91	33.50	338	204	AVERAGE																																																																											



Mode	25																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT40_CH134_Full_5670MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 25 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5727.29</td> <td>63.07</td> <td>68.30</td> <td>-5.23</td> <td>50.19</td> <td>36.32</td> <td>10.02</td> <td>33.46</td> <td>338 204 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5727.29	63.07	68.30	-5.23	50.19	36.32	10.02	33.46	338 204 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5727.29	63.07	68.30	-5.23	50.19	36.32	10.02	33.46	338 204 PEAK																														



Mode	25																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11be EHT40_CH134_Full_5670MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 25 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>50.98</td> <td>74.00</td> <td>-23.02</td> <td>48.93</td> <td>37.60</td> <td>12.77</td> <td>48.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>50.50</td> <td>68.30</td> <td>-17.80</td> <td>43.81</td> <td>44.56</td> <td>15.55</td> <td>53.42</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11340.00	50.98	74.00	-23.02	48.93	37.60	12.77	48.32	---	---	Peak	2	17010.00	50.50	68.30	-17.80	43.81	44.56	15.55	53.42	---	---	Peak	<p>Date: 2023-05-23</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 25 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>50.92</td> <td>74.00</td> <td>-23.08</td> <td>48.87</td> <td>37.60</td> <td>12.77</td> <td>48.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>50.24</td> <td>68.30</td> <td>-18.06</td> <td>43.55</td> <td>44.56</td> <td>15.55</td> <td>53.42</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11340.00	50.92	74.00	-23.08	48.87	37.60	12.77	48.32	---	---	Peak	2	17010.00	50.24	68.30	-18.06	43.55	44.56	15.55	53.42	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11340.00	50.98	74.00	-23.02	48.93	37.60	12.77	48.32	---	---	Peak																																																																																							
2	17010.00	50.50	68.30	-17.80	43.81	44.56	15.55	53.42	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11340.00	50.92	74.00	-23.08	48.87	37.60	12.77	48.32	---	---	Peak																																																																																							
2	17010.00	50.24	68.30	-18.06	43.55	44.56	15.55	53.42	---	---	Peak																																																																																							







Mode	26																																																																											
	Band Edge - L																																																																											
	5.15-5.25_UNII 1_802.11be EHT80_CH42_Full_5210MHz																																																																											
ANT	CDD 5+18																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.84</td> <td>57.60</td> <td>74.00</td> <td>-16.40</td> <td>45.90</td> <td>36.14</td> <td>8.53</td> <td>32.97</td> <td>106</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5147.84	57.60	74.00	-16.40	45.90	36.14	8.53	32.97	106	299	PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>101.54</td> <td>-----</td> <td>89.82</td> <td>36.11</td> <td>8.71</td> <td>33.10</td> <td>106</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5210.00	101.54	-----	89.82	36.11	8.71	33.10	106	299	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																					
1	5147.84	57.60	74.00	-16.40	45.90	36.14	8.53	32.97	106	299	PEAK																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																				
1	5210.00	101.54	-----	89.82	36.11	8.71	33.10	106	299	PEAK																																																																		
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5143.22</td> <td>49.76</td> <td>54.00</td> <td>-4.24</td> <td>38.06</td> <td>36.14</td> <td>8.52</td> <td>32.96</td> <td>106</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5143.22	49.76	54.00	-4.24	38.06	36.14	8.52	32.96	106	299	AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>92.47</td> <td>-----</td> <td>80.78</td> <td>36.12</td> <td>8.64</td> <td>33.07</td> <td>106</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	1	5210.00	92.47	-----	80.78	36.12	8.64	33.07	106	299	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																					
1	5143.22	49.76	54.00	-4.24	38.06	36.14	8.52	32.96	106	299	AVERAGE																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	Remark																																																																				
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg																																																																				
1	5210.00	92.47	-----	80.78	36.12	8.64	33.07	106	299	AVERAGE																																																																		



Mode	26																																					
	Band Edge - R																																					
	5.15-5.25_UNII 1_802.11be EHT80_CH42_Full_5210MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5432.25</td> <td>52.55</td> <td>74.00</td> <td>-21.45</td> <td>40.33</td> <td>36.03</td> <td>9.67</td> <td>33.48</td> <td>106</td> <td>299</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5432.25	52.55	74.00	-21.45	40.33	36.03	9.67	33.48	106	299	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5432.25	52.55	74.00	-21.45	40.33	36.03	9.67	33.48	106	299	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5451.25</td> <td>43.29</td> <td>54.00</td> <td>-10.71</td> <td>31.10</td> <td>36.02</td> <td>9.68</td> <td>33.51</td> <td>106</td> <td>299</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5451.25	43.29	54.00	-10.71	31.10	36.02	9.68	33.51	106	299	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5451.25	43.29	54.00	-10.71	31.10	36.02	9.68	33.51	106	299	AVERAGE																											

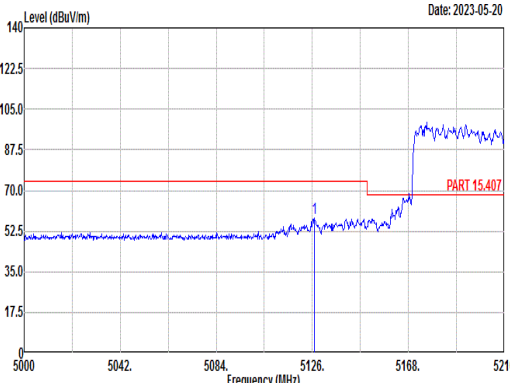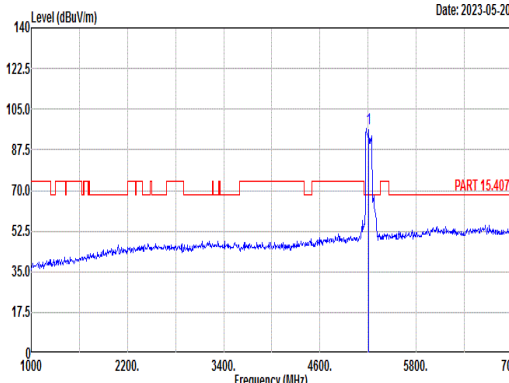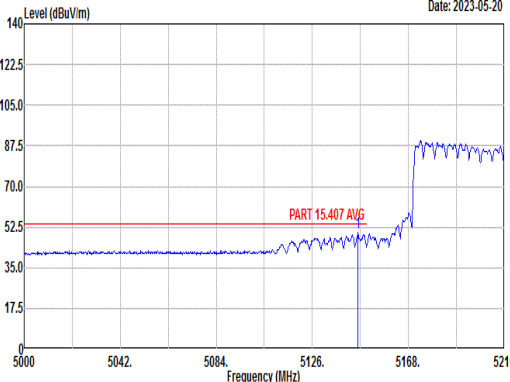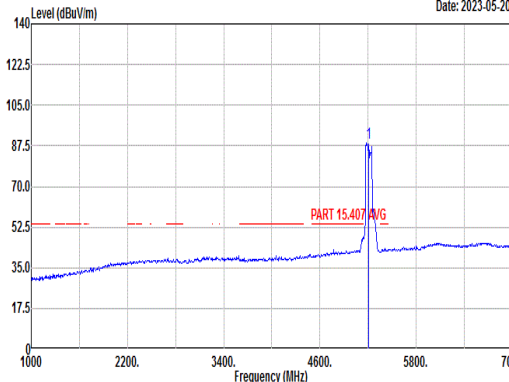

		26																																																																												
Mode		Band Edge - L																																																																												
		5.15-5.25_UNII 1_802.11be EHT80_CH42_Full_5210MHz																																																																												
ANT		CDD 5+18																																																																												
Pol.	Vertical	Fundamental																																																																												
Peak	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5126.84</td> <td>58.00</td> <td>74.00</td> <td>-16.00</td> <td>46.29</td> <td>36.15</td> <td>8.49</td> <td>32.93</td> <td>400</td> <td>201 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5126.84	58.00	74.00	-16.00	46.29	36.15	8.49	32.93	400	201 PEAK	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>96.71</td> <td>-----</td> <td>85.02</td> <td>36.13</td> <td>8.58</td> <td>33.02</td> <td>400</td> <td>201 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5210.00	96.71	-----	85.02	36.13	8.58	33.02	400	201 PEAK
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5126.84	58.00	74.00	-16.00	46.29	36.15	8.49	32.93	400	201 PEAK																																																																				
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5210.00	96.71	-----	85.02	36.13	8.58	33.02	400	201 PEAK																																																																					
Avg	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.95</td> <td>50.00</td> <td>54.00</td> <td>-4.00</td> <td>38.29</td> <td>36.14</td> <td>8.53</td> <td>32.96</td> <td>400</td> <td>201 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5145.95	50.00	54.00	-4.00	38.29	36.14	8.53	32.96	400	201 AVERAGE	 <p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>88.56</td> <td>-----</td> <td>76.87</td> <td>36.13</td> <td>8.58</td> <td>33.02</td> <td>400</td> <td>201 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark	1	5210.00	88.56	-----	76.87	36.13	8.58	33.02	400	201 AVERAGE
	Limit	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5145.95	50.00	54.00	-4.00	38.29	36.14	8.53	32.96	400	201 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor	dB	cm	deg																																																																					
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	deg	Remark																																																																					
1	5210.00	88.56	-----	76.87	36.13	8.58	33.02	400	201 AVERAGE																																																																					



Mode	26																																																									
	Band Edge - R																																																									
	5.15-5.25_UNII 1_802.11be EHT80_CH42_Full_5210MHz																																																									
ANT	CDD 5+18																																																									
Pol.	Vertical	Fundamental																																																								
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5452.25</td> <td>52.16</td> <td>74.00</td> <td>-21.84</td> <td>39.97</td> <td>36.02</td> <td>9.68</td> <td>33.51</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>400</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>201</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV/m	dB/m	dB	dB	cm	1 5452.25	52.16	74.00	-21.84	39.97	36.02	9.68	33.51								400								201								PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m	dBuV/m	dB/m	dB	dB	cm																																																			
1 5452.25	52.16	74.00	-21.84	39.97	36.02	9.68	33.51																																																			
							400																																																			
							201																																																			
							PEAK																																																			
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 26 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5409.25</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>31.49</td> <td>36.04</td> <td>9.66</td> <td>33.44</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>400</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>201</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dBuV/m	dB/m	dB	dB	cm	1 5409.25	43.75	54.00	-10.25	31.49	36.04	9.66	33.44								400								201								AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																			
MHz	dBuV/m	dBuV/m	dBuV/m	dB/m	dB	dB	cm																																																			
1 5409.25	43.75	54.00	-10.25	31.49	36.04	9.66	33.44																																																			
							400																																																			
							201																																																			
							AVERAGE																																																			



Mode	26																																																																																																	
	Harmonic																																																																																																	
	5.15-5.25_UNII 1_802.11be EHT80_CH42_Full_5210MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 26 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>50.96</td> <td>68.30</td> <td>-17.34</td> <td>49.13</td> <td>37.05</td> <td>12.11</td> <td>47.33</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>50.80</td> <td>74.00</td> <td>-23.20</td> <td>45.52</td> <td>41.01</td> <td>14.62</td> <td>50.35</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10420.00	50.96	68.30	-17.34	49.13	37.05	12.11	47.33	--- Peak	2	15630.00	50.80	74.00	-23.20	45.52	41.01	14.62	50.35	--- Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 26 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10420.00</td> <td>50.32</td> <td>68.30</td> <td>-17.98</td> <td>48.49</td> <td>37.05</td> <td>12.11</td> <td>47.33</td> <td>--- Peak</td> </tr> <tr> <td>2</td> <td>15630.00</td> <td>50.94</td> <td>74.00</td> <td>-23.06</td> <td>45.66</td> <td>41.01</td> <td>14.62</td> <td>50.35</td> <td>--- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10420.00	50.32	68.30	-17.98	48.49	37.05	12.11	47.33	--- Peak	2	15630.00	50.94	74.00	-23.06	45.66	41.01	14.62	50.35	--- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10420.00	50.96	68.30	-17.34	49.13	37.05	12.11	47.33	--- Peak																																																																																									
2	15630.00	50.80	74.00	-23.20	45.52	41.01	14.62	50.35	--- Peak																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	10420.00	50.32	68.30	-17.98	48.49	37.05	12.11	47.33	--- Peak																																																																																									
2	15630.00	50.94	74.00	-23.06	45.66	41.01	14.62	50.35	--- Peak																																																																																									



Mode	27																																																																		
	Band Edge - L																																																																		
	5.25-5.35_UNII 2A_802.11be EHT80_CH58_Full_5290MHz																																																																		
ANT	CDD 5+18																																																																		
Pol.	Horizontal	Fundamental																																																																	
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5134.85</td> <td>52.04</td> <td>74.00</td> <td>-21.96</td> <td>40.32</td> <td>36.15</td> <td>8.51 32.94 100 136 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5134.85	52.04	74.00	-21.96	40.32	36.15	8.51 32.94 100 136 PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>104.13</td> <td>-----</td> <td>92.22</td> <td>36.08</td> <td>9.05</td> <td>33.22 100 136 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5290.00	104.13	-----	92.22	36.08	9.05	33.22 100 136 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5134.85	52.04	74.00	-21.96	40.32	36.15	8.51 32.94 100 136 PEAK																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5290.00	104.13	-----	92.22	36.08	9.05	33.22 100 136 PEAK																																																												
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5134.27</td> <td>43.32</td> <td>54.00</td> <td>-10.68</td> <td>31.60</td> <td>36.15</td> <td>8.51 32.94 100 136 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5134.27	43.32	54.00	-10.68	31.60	36.15	8.51 32.94 100 136 AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>95.94</td> <td>-----</td> <td>84.00</td> <td>36.08</td> <td>9.09</td> <td>33.23 100 136 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg	1	5290.00	95.94	-----	84.00	36.08	9.09	33.23 100 136 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5134.27	43.32	54.00	-10.68	31.60	36.15	8.51 32.94 100 136 AVERAGE																																																												
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																												
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm deg																																																												
1	5290.00	95.94	-----	84.00	36.08	9.09	33.23 100 136 AVERAGE																																																												



Mode	27																																					
	Band Edge - R																																					
	5.25-5.35_UNII 2A_802.11be EHT80_CH58_Full_5290MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5372.62</td> <td>61.69</td> <td>74.00</td> <td>-12.31</td> <td>49.53</td> <td>36.05</td> <td>9.48</td> <td>33.37</td> <td>100</td> <td>136</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5372.62	61.69	74.00	-12.31	49.53	36.05	9.48	33.37	100	136	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5372.62	61.69	74.00	-12.31	49.53	36.05	9.48	33.37	100	136	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.17</td> <td>50.16</td> <td>54.00</td> <td>-3.84</td> <td>38.03</td> <td>36.06</td> <td>9.41</td> <td>33.34</td> <td>100</td> <td>136</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5358.17	50.16	54.00	-3.84	38.03	36.06	9.41	33.34	100	136	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5358.17	50.16	54.00	-3.84	38.03	36.06	9.41	33.34	100	136	AVERAGE																											



Mode	27																																																																									
	Band Edge - L																																																																									
	5.25-5.35_UNII 2A_802.11be EHT80_CH58_Full_5290MHz																																																																									
ANT	CDD 5+18																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5118.90</td> <td>51.75</td> <td>74.00</td> <td>-22.25</td> <td>40.03</td> <td>36.15</td> <td>8.48</td> <td>32.91</td> <td>391</td> <td>208</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5118.90	51.75	74.00	-22.25	40.03	36.15	8.48	32.91	391	208	PEAK	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>100.41</td> <td>-----</td> <td>88.43</td> <td>36.08</td> <td>9.15</td> <td>33.25</td> <td>391</td> <td>208</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5290.00	100.41	-----	88.43	36.08	9.15	33.25	391	208	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5118.90	51.75	74.00	-22.25	40.03	36.15	8.48	32.91	391	208	PEAK																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5290.00	100.41	-----	88.43	36.08	9.15	33.25	391	208	PEAK																																																																
Avg	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5083.52</td> <td>42.56</td> <td>54.00</td> <td>-11.44</td> <td>30.83</td> <td>36.17</td> <td>8.41</td> <td>32.85</td> <td>391</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5083.52	42.56	54.00	-11.44	30.83	36.17	8.41	32.85	391	208	AVERAGE	<p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>92.49</td> <td>-----</td> <td>80.47</td> <td>36.07</td> <td>9.24</td> <td>33.29</td> <td>391</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm	1	5290.00	92.49	-----	80.47	36.07	9.24	33.29	391	208	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5083.52	42.56	54.00	-11.44	30.83	36.17	8.41	32.85	391	208	AVERAGE																																																															
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dB/m	dB	dB	cm																																																																			
1	5290.00	92.49	-----	80.47	36.07	9.24	33.29	391	208	AVERAGE																																																																



Mode	27																																					
	Band Edge - R																																					
	5.25-5.35_UNII 2A_802.11be EHT80_CH58_Full_5290MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.34</td> <td>60.24</td> <td>74.00</td> <td>-13.76</td> <td>48.12</td> <td>36.06</td> <td>9.41</td> <td>33.35</td> <td>391</td> <td>208</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5358.34	60.24	74.00	-13.76	48.12	36.06	9.41	33.35	391	208	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5358.34	60.24	74.00	-13.76	48.12	36.06	9.41	33.35	391	208	PEAK																											
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 27 Setting : MCS0 Powersetting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th></th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.35</td> <td>48.56</td> <td>54.00</td> <td>-5.44</td> <td>36.46</td> <td>36.06</td> <td>9.37</td> <td>33.33</td> <td>391</td> <td>208</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5350.35	48.56	54.00	-5.44	36.46	36.06	9.37	33.33	391	208	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																															
1	5350.35	48.56	54.00	-5.44	36.46	36.06	9.37	33.33	391	208	AVERAGE																											



Mode	27																																																																																																	
	Harmonic																																																																																																	
	5.25-5.35_UNII 2A_802.11be EHT80_CH58_Full_5290MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-25</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 27 Setting : MCS0 Power setting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>50.73</td> <td>68.30</td> <td>-17.57</td> <td>48.63</td> <td>37.15</td> <td>12.22</td> <td>47.27</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>50.51</td> <td>74.00</td> <td>-23.49</td> <td>44.63</td> <td>41.60</td> <td>14.73</td> <td>50.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10580.00	50.73	68.30	-17.57	48.63	37.15	12.22	47.27	---	---	Peak	2	15870.00	50.51	74.00	-23.49	44.63	41.60	14.73	50.45	---	---	Peak	<p>Date: 2023-05-25</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 27 Setting : MCS0 Power setting 15 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10580.00</td> <td>50.65</td> <td>68.30</td> <td>-17.65</td> <td>48.55</td> <td>37.15</td> <td>12.22</td> <td>47.27</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15870.00</td> <td>50.92</td> <td>74.00</td> <td>-23.08</td> <td>45.04</td> <td>41.60</td> <td>14.73</td> <td>50.45</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10580.00	50.65	68.30	-17.65	48.55	37.15	12.22	47.27	---	---	Peak	2	15870.00	50.92	74.00	-23.08	45.04	41.60	14.73	50.45	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10580.00	50.73	68.30	-17.57	48.63	37.15	12.22	47.27	---	---	Peak																																																																																							
2	15870.00	50.51	74.00	-23.49	44.63	41.60	14.73	50.45	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10580.00	50.65	68.30	-17.65	48.55	37.15	12.22	47.27	---	---	Peak																																																																																							
2	15870.00	50.92	74.00	-23.08	45.04	41.60	14.73	50.45	---	---	Peak																																																																																							



Mode	28																																																																														
	Band Edge - L																																																																														
	5.47-5.725_UNII 2C_802.11be EHT80_CH106_Full_5530MHz																																																																														
ANT	CDD 5+18																																																																														
Pol.	Horizontal	Fundamental																																																																													
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.62</td> <td>59.56</td> <td>74.00</td> <td>-14.44</td> <td>47.38</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>100</td> <td>297 PEAK</td> </tr> <tr> <td>2</td> <td>5466.64</td> <td>59.86</td> <td>68.30</td> <td>-8.44</td> <td>47.70</td> <td>36.01</td> <td>9.69</td> <td>33.54</td> <td>100</td> <td>297 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5459.62	59.56	74.00	-14.44	47.38	36.02	9.69	33.53	100	297 PEAK	2	5466.64	59.86	68.30	-8.44	47.70	36.01	9.69	33.54	100	297 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>105.02</td> <td>-----</td> <td>92.80</td> <td>36.06</td> <td>9.73</td> <td>33.57</td> <td>100</td> <td>297</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	105.02	-----	92.80	36.06	9.73	33.57	100	297	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5459.62	59.56	74.00	-14.44	47.38	36.02	9.69	33.53	100	297 PEAK																																																																					
2	5466.64	59.86	68.30	-8.44	47.70	36.01	9.69	33.54	100	297 PEAK																																																																					
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5530.00	105.02	-----	92.80	36.06	9.73	33.57	100	297	PEAK																																																																					
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.28</td> <td>49.69</td> <td>54.00</td> <td>-4.31</td> <td>37.50</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>100</td> <td>297 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5457.28	49.69	54.00	-4.31	37.50	36.02	9.69	33.52	100	297 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>96.97</td> <td>-----</td> <td>84.79</td> <td>36.04</td> <td>9.72</td> <td>33.58</td> <td>100</td> <td>297</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	96.97	-----	84.79	36.04	9.72	33.58	100	297	AVERAGE											
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5457.28	49.69	54.00	-4.31	37.50	36.02	9.69	33.52	100	297 AVERAGE																																																																					
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5530.00	96.97	-----	84.79	36.04	9.72	33.58	100	297	AVERAGE																																																																					



Mode	28																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT80_CH106_Full_5530MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5748.55</td> <td>52.96</td> <td>68.30</td> <td>-15.34</td> <td>39.99</td> <td>36.35</td> <td>10.07</td> <td>33.45</td> <td>100 297 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5748.55	52.96	68.30	-15.34	39.99	36.35	10.07	33.45	100 297 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5748.55	52.96	68.30	-15.34	39.99	36.35	10.07	33.45	100 297 PEAK																														



Mode	28																																																																														
	Band Edge - L																																																																														
	5.47-5.725_UNII 2C_802.11be EHT80_CH106_Full_5530MHz																																																																														
ANT	CDD 5+18																																																																														
Pol.	Vertical	Fundamental																																																																													
Peak	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.20</td> <td>58.61</td> <td>74.00</td> <td>-15.39</td> <td>46.42</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>395</td> <td>200 PEAK</td> </tr> <tr> <td>2</td> <td>5460.70</td> <td>58.66</td> <td>68.30</td> <td>-9.64</td> <td>46.48</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>395</td> <td>200 PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5456.20	58.61	74.00	-15.39	46.42	36.02	9.69	33.52	395	200 PEAK	2	5460.70	58.66	68.30	-9.64	46.48	36.02	9.69	33.53	395	200 PEAK	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>99.48</td> <td>-----</td> <td>87.30</td> <td>36.04</td> <td>9.72</td> <td>33.58</td> <td>395</td> <td>200</td> <td>PEAK</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	99.48	-----	87.30	36.04	9.72	33.58	395	200	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5456.20	58.61	74.00	-15.39	46.42	36.02	9.69	33.52	395	200 PEAK																																																																					
2	5460.70	58.66	68.30	-9.64	46.48	36.02	9.69	33.53	395	200 PEAK																																																																					
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5530.00	99.48	-----	87.30	36.04	9.72	33.58	395	200	PEAK																																																																					
Avg	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.18</td> <td>49.11</td> <td>54.00</td> <td>-4.89</td> <td>36.92</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>395</td> <td>200 AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5458.18	49.11	54.00	-4.89	36.92	36.02	9.69	33.52	395	200 AVERAGE	<p>Date: 2023-05-20</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5530.00</td> <td>91.56</td> <td>-----</td> <td>79.36</td> <td>36.05</td> <td>9.73</td> <td>33.58</td> <td>395</td> <td>200</td> <td>AVERAGE</td> </tr> </tbody> </table>	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5530.00	91.56	-----	79.36	36.05	9.73	33.58	395	200	AVERAGE											
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5458.18	49.11	54.00	-4.89	36.92	36.02	9.69	33.52	395	200 AVERAGE																																																																					
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5530.00	91.56	-----	79.36	36.05	9.73	33.58	395	200	AVERAGE																																																																					







Mode	28																																						
	Band Edge - R																																						
	5.47-5.725_UNII 2C_802.11be EHT80_CH106_Full_5530MHz																																						
ANT	CDD 5+18																																						
Pol.	Vertical	Fundamental																																					
Peak	<p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 28 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5729.28</td> <td>54.07</td> <td>68.30</td> <td>-14.23</td> <td>41.18</td> <td>36.32</td> <td>10.03</td> <td>33.46</td> <td>395</td> <td>200 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5729.28	54.07	68.30	-14.23	41.18	36.32	10.03	33.46	395	200 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Level	Factor	Loss	Factor	cm	deg																															
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																															
1 5729.28	54.07	68.30	-14.23	41.18	36.32	10.03	33.46	395	200 PEAK																														



Mode	28																																																																																																	
	Harmonic																																																																																																	
	5.47-5.725_UNII 2C_802.11be EHT80_CH106_Full_5530MHz																																																																																																	
ANT	CDD 5+18																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<p>Date: 2023-05-25</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL Mode : 28 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>50.47</td> <td>74.00</td> <td>-23.53</td> <td>47.79</td> <td>37.43</td> <td>12.57</td> <td>47.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>50.95</td> <td>68.30</td> <td>-17.35</td> <td>42.75</td> <td>43.50</td> <td>15.23</td> <td>50.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11060.00	50.47	74.00	-23.53	47.79	37.43	12.57	47.32	---	---	Peak	2	16590.00	50.95	68.30	-17.35	42.75	43.50	15.23	50.53	---	---	Peak	<p>Date: 2023-05-25</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL Mode : 28 Setting : MCS0 Power setting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11060.00</td> <td>50.82</td> <td>74.00</td> <td>-23.18</td> <td>48.14</td> <td>37.43</td> <td>12.57</td> <td>47.32</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16590.00</td> <td>50.86</td> <td>68.30</td> <td>-17.44</td> <td>42.66</td> <td>43.50</td> <td>15.23</td> <td>50.53</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11060.00	50.82	74.00	-23.18	48.14	37.43	12.57	47.32	---	---	Peak	2	16590.00	50.86	68.30	-17.44	42.66	43.50	15.23	50.53	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11060.00	50.47	74.00	-23.53	47.79	37.43	12.57	47.32	---	---	Peak																																																																																							
2	16590.00	50.95	68.30	-17.35	42.75	43.50	15.23	50.53	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	11060.00	50.82	74.00	-23.18	48.14	37.43	12.57	47.32	---	---	Peak																																																																																							
2	16590.00	50.86	68.30	-17.44	42.66	43.50	15.23	50.53	---	---	Peak																																																																																							

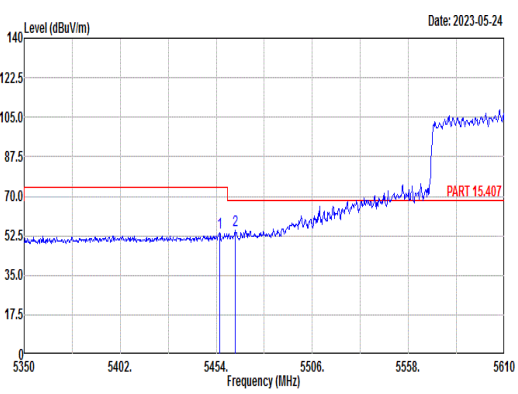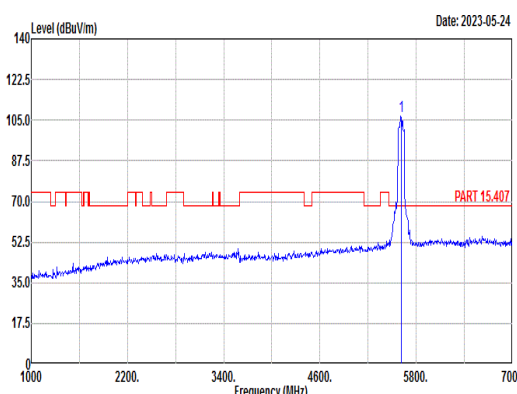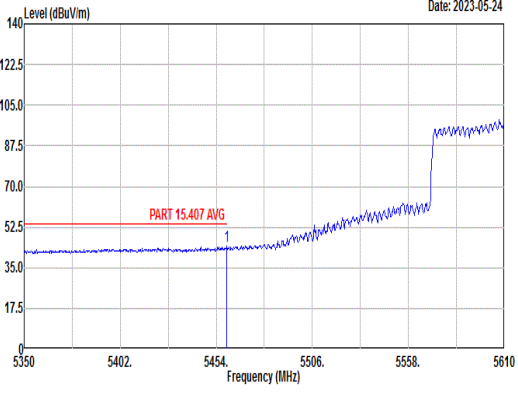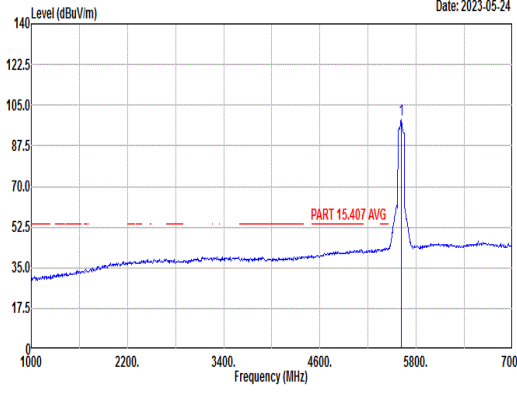

Mode	29																																																																																					
	Band Edge - L																																																																																					
	5.47-5.725_UNII 2C_802.11be EHT80_CH122_Full_5610MHz																																																																																					
ANT	CDD 5+18																																																																																					
Pol.	Horizontal	Fundamental																																																																																				
Peak	 <p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.82</td> <td>53.92</td> <td>74.00</td> <td>-20.08</td> <td>41.73</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5464.40</td> <td>55.19</td> <td>68.30</td> <td>-13.11</td> <td>43.03</td> <td>36.01</td> <td>9.69</td> <td>33.54</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5455.82	53.92	74.00	-20.08	41.73	36.02	9.69	33.52	100	296	PEAK	2	5464.40	55.19	68.30	-13.11	43.03	36.01	9.69	33.54	100	296	PEAK	 <p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>106.58</td> <td>-----</td> <td>-----</td> <td>94.22</td> <td>36.14</td> <td>9.76</td> <td>33.54</td> <td>100</td> <td>296</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5610.00	106.58	-----	-----	94.22	36.14	9.76	33.54	100	296	PEAK
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5455.82	53.92	74.00	-20.08	41.73	36.02	9.69	33.52	100	296	PEAK																																																																											
2	5464.40	55.19	68.30	-13.11	43.03	36.01	9.69	33.54	100	296	PEAK																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5610.00	106.58	-----	-----	94.22	36.14	9.76	33.54	100	296	PEAK																																																																											
Avg	 <p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.72</td> <td>44.43</td> <td>54.00</td> <td>-9.57</td> <td>32.25</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>100</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5459.72	44.43	54.00	-9.57	32.25	36.02	9.69	33.53	100	296	AVERAGE	 <p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:10.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>98.87</td> <td>-----</td> <td>-----</td> <td>86.45</td> <td>36.16</td> <td>9.79</td> <td>33.53</td> <td>100</td> <td>296</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5610.00	98.87	-----	-----	86.45	36.16	9.79	33.53	100	296	AVERAGE												
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5459.72	44.43	54.00	-9.57	32.25	36.02	9.69	33.53	100	296	AVERAGE																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5610.00	98.87	-----	-----	86.45	36.16	9.79	33.53	100	296	AVERAGE																																																																											



Mode	29																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT80_CH122_Full_5610MHz																																					
ANT	CDD 5+18																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.32</td> <td>55.92</td> <td>68.30</td> <td>-12.38</td> <td>43.04</td> <td>36.32</td> <td>10.02</td> <td>33.46</td> <td>100 296 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5725.32	55.92	68.30	-12.38	43.04	36.32	10.02	33.46	100 296 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5725.32	55.92	68.30	-12.38	43.04	36.32	10.02	33.46	100 296 PEAK																														



Mode	29																																																																																					
	Band Edge - L																																																																																					
	5.47-5.725_UNII 2C_802.11be EHT80_CH122_Full_5610MHz																																																																																					
ANT	CDD 5+18																																																																																					
Pol.	Vertical	Fundamental																																																																																				
Peak	<p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.86</td> <td>53.44</td> <td>74.00</td> <td>-20.56</td> <td>41.25</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>400</td> <td>194</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5468.50</td> <td>53.05</td> <td>68.30</td> <td>-15.25</td> <td>40.87</td> <td>36.02</td> <td>9.69</td> <td>33.53</td> <td>400</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5456.86	53.44	74.00	-20.56	41.25	36.02	9.69	33.52	400	194	PEAK	2	5468.50	53.05	68.30	-15.25	40.87	36.02	9.69	33.53	400	194	PEAK	<p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>102.51</td> <td>-----</td> <td>-----</td> <td>90.09</td> <td>36.16</td> <td>9.79</td> <td>33.53</td> <td>400</td> <td>194</td> <td>PEAK</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5610.00	102.51	-----	-----	90.09	36.16	9.79	33.53	400	194	PEAK
	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5456.86	53.44	74.00	-20.56	41.25	36.02	9.69	33.52	400	194	PEAK																																																																											
2	5468.50	53.05	68.30	-15.25	40.87	36.02	9.69	33.53	400	194	PEAK																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5610.00	102.51	-----	-----	90.09	36.16	9.79	33.53	400	194	PEAK																																																																											
Avg	<p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.86</td> <td>43.94</td> <td>54.00</td> <td>-10.06</td> <td>31.75</td> <td>36.02</td> <td>9.69</td> <td>33.52</td> <td>400</td> <td>194</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5456.86	43.94	54.00	-10.06	31.75	36.02	9.69	33.52	400	194	AVERAGE	<p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 AVG 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:10.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Peak</th> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>(dB)</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5610.00</td> <td>95.62</td> <td>-----</td> <td>-----</td> <td>83.24</td> <td>36.15</td> <td>9.77</td> <td>33.54</td> <td>400</td> <td>194</td> <td>AVERAGE</td> </tr> </tbody> </table>	Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5610.00	95.62	-----	-----	83.24	36.15	9.77	33.54	400	194	AVERAGE												
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5456.86	43.94	54.00	-10.06	31.75	36.02	9.69	33.52	400	194	AVERAGE																																																																											
Peak	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																												
1	5610.00	95.62	-----	-----	83.24	36.15	9.77	33.54	400	194	AVERAGE																																																																											



Mode	29																																					
	Band Edge - R																																					
	5.47-5.725_UNII 2C_802.11be EHT80_CH122_Full_5610MHz																																					
ANT	CDD 5+18																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2023-05-24</p> <p>Site : 03CH04-SZ Condition: PART 15.407 3m HF_ANT_3117(119436) VERTICAL : RBW:1000.000kHz VBW:3000.000kHz Mode : 29 Setting : MCS0 Powersetting 12.5 Plane : X with Accessories : 861585060047220/861585060047238</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5728.27</td> <td>55.49</td> <td>68.30</td> <td>-12.81</td> <td>42.60</td> <td>36.32</td> <td>10.03</td> <td>33.46</td> <td>400 194 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1 5728.27	55.49	68.30	-12.81	42.60	36.32	10.03	33.46	400 194 PEAK	Blank
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Level	Factor	Loss Factor																																	
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																														
1 5728.27	55.49	68.30	-12.81	42.60	36.32	10.03	33.46	400 194 PEAK																														