





11AX20MIMO_Ant9_2437

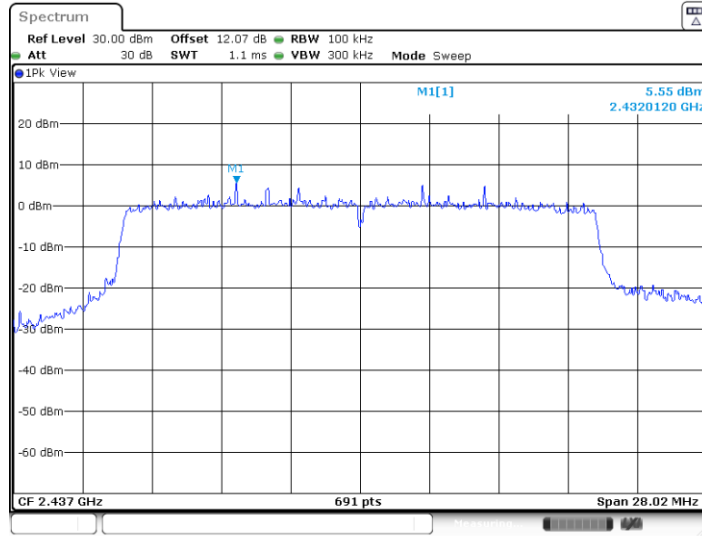


11AX20MIMO_Ant8_2437

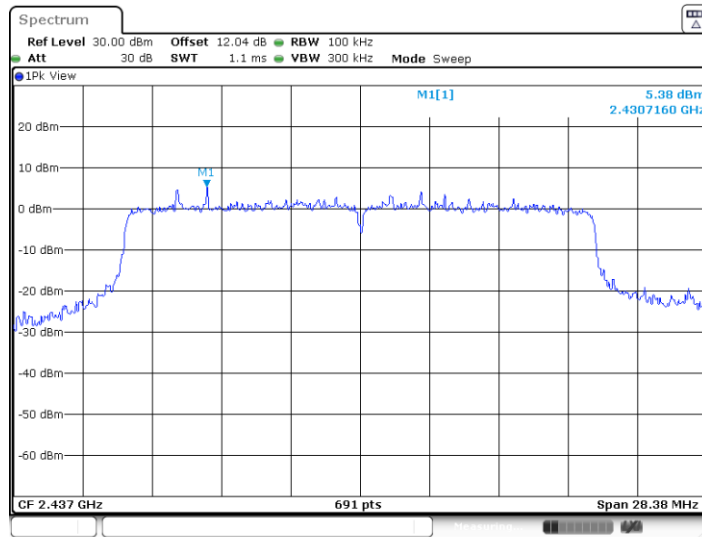




11AX20MIMO_Ant9_2462

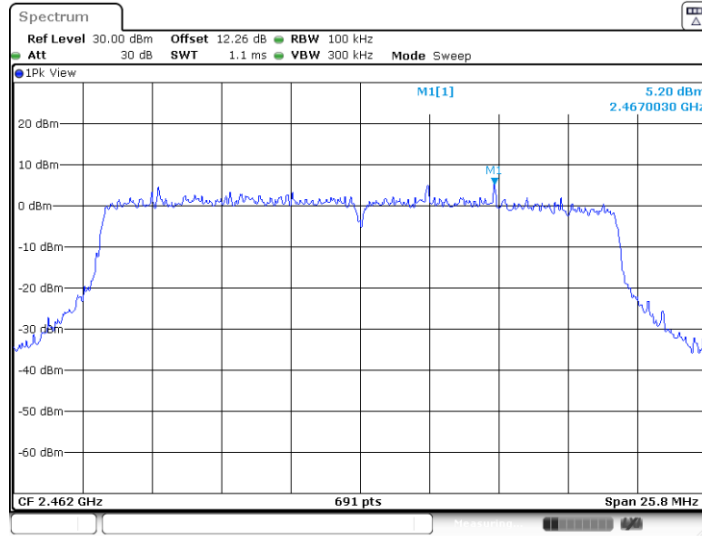


Date: 22.FEB.2024 19:36:58

11AX20MIMO_Ant8_2462

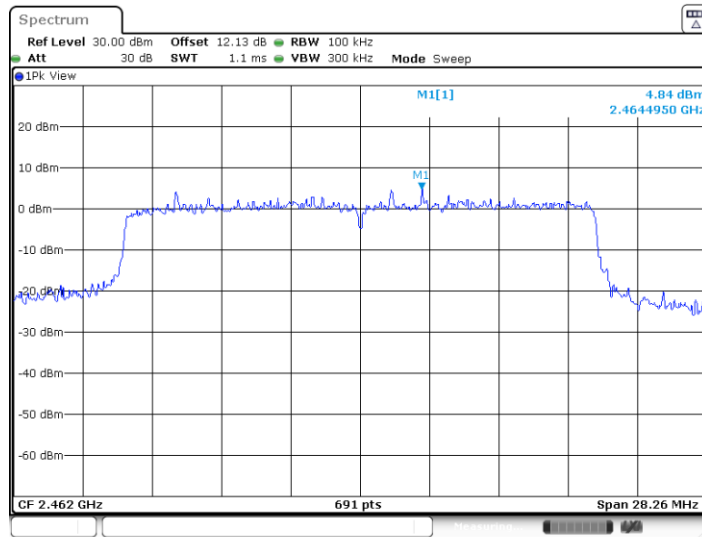


Date: 22.FEB.2024 19:38:35

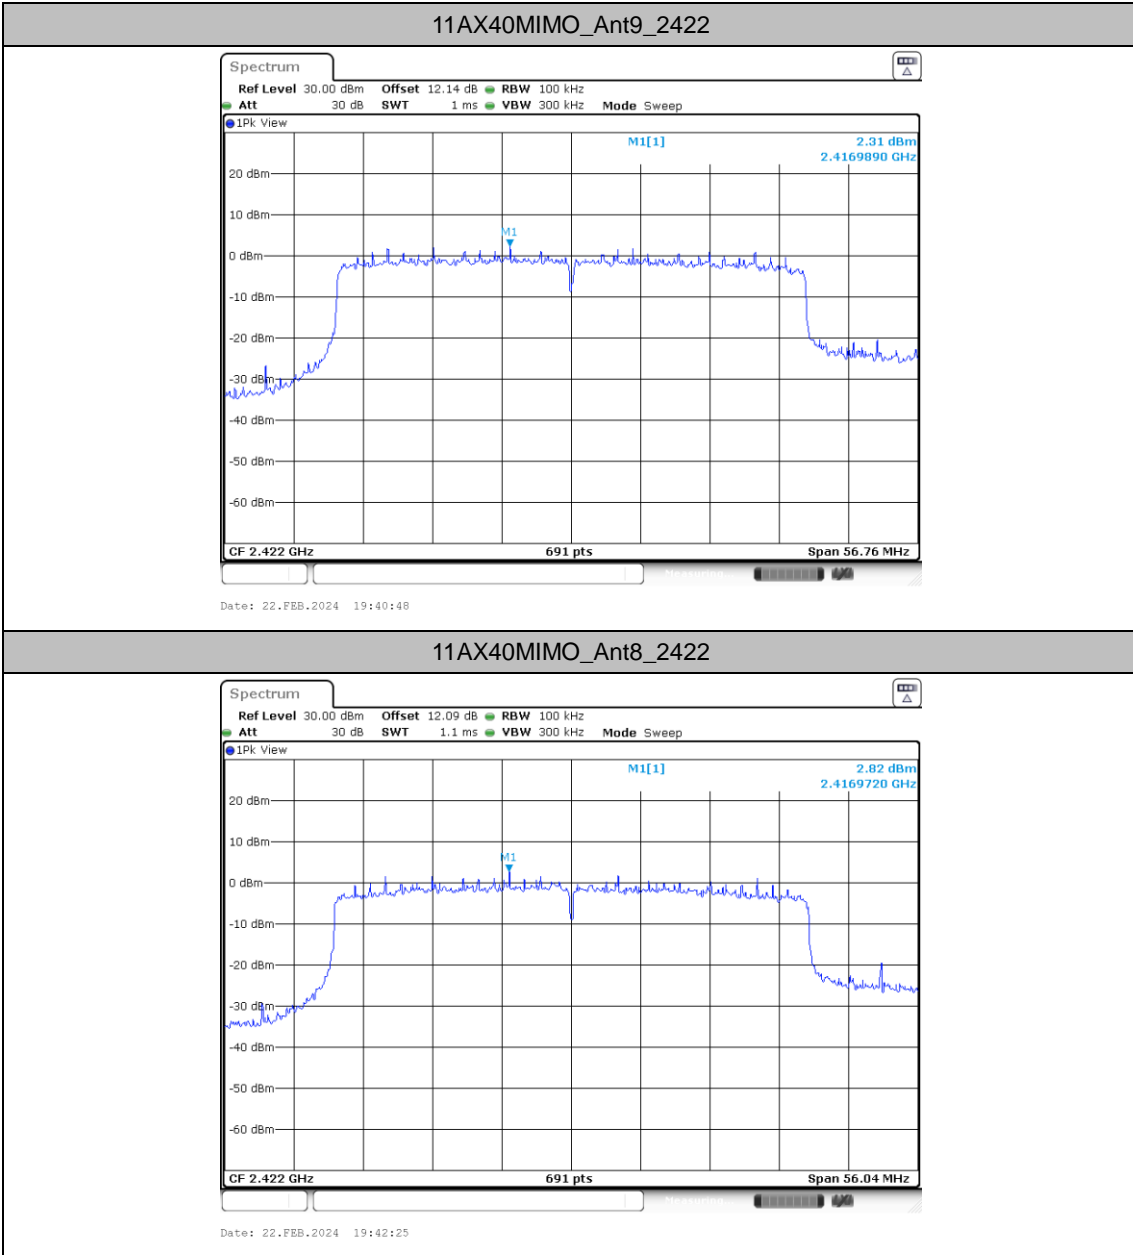




11AX40MIMO_Ant9_2437

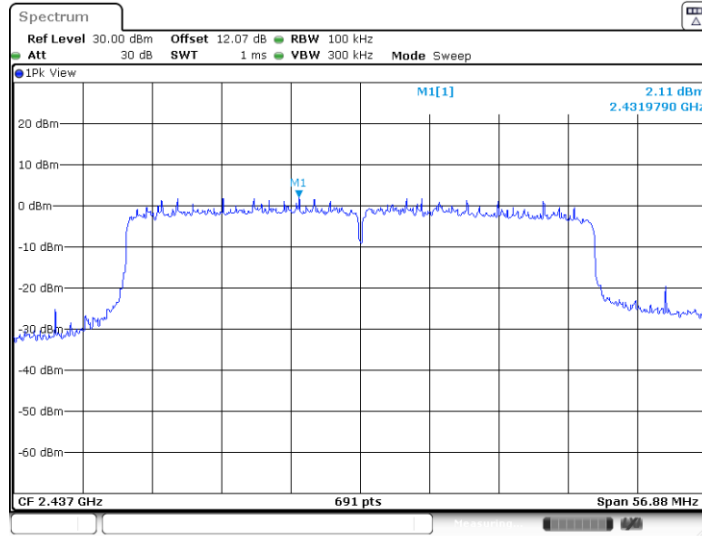

Date: 22.FEB.2024 19:44:44


11AX40MIMO_Ant8_2437

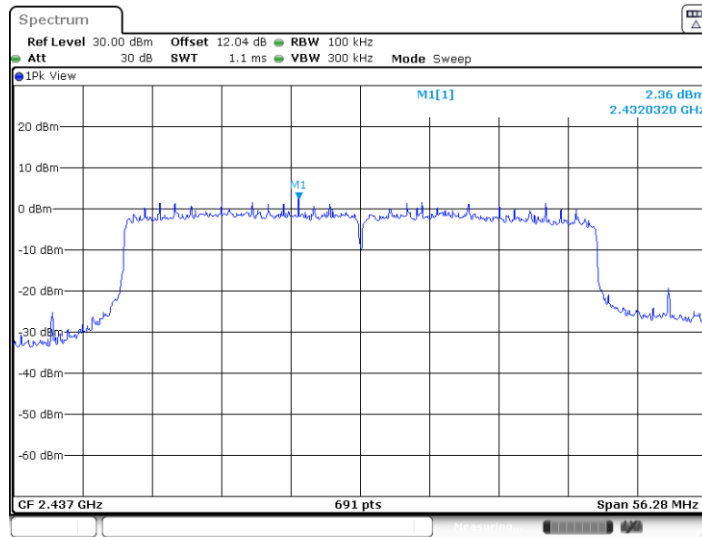

Date: 22.FEB.2024 19:46:03




11AX40MIMO_Ant9_2452

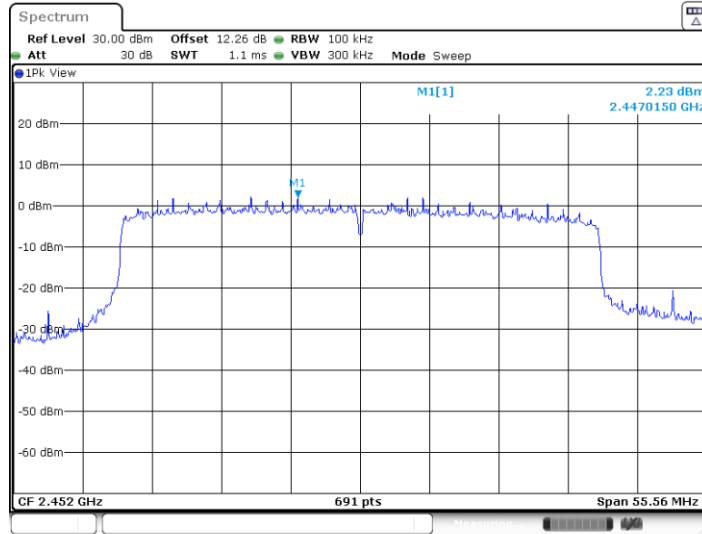

Date: 22.FEB.2024 19:47:57

11AX40MIMO_Ant8_2452

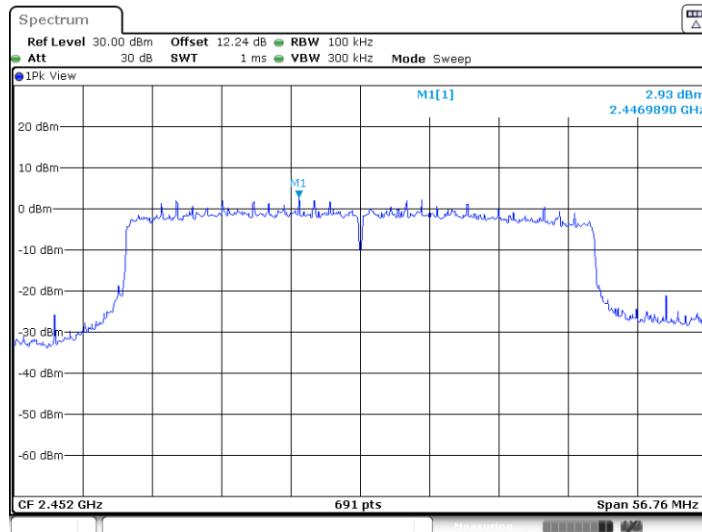

Date: 22.FEB.2024 19:49:32




Band edge measurements


Test Result


TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
11B-CDD	Ant9	Low	2412	8.86	-31.84	≤-11.14	PASS
	Ant8	Low	2412	8.77	-32.76	≤-11.23	PASS
	Ant9	High	2462	7.92	-43.61	≤-12.08	PASS
	Ant8	High	2462	7.89	-43.86	≤-12.11	PASS
11G-CDD	Ant9	Low	2412	5.63	-30.54	≤-14.37	PASS
	Ant8	Low	2412	6.17	-25.58	≤-13.83	PASS
	Ant9	High	2462	5.80	-43.39	≤-14.2	PASS
	Ant8	High	2462	5.59	-29.71	≤-14.41	PASS
11AX20MIMO	Ant9	Low	2412	4.98	-30.48	≤-15.02	PASS
	Ant8	Low	2412	5.78	-28.54	≤-14.22	PASS
	Ant9	High	2462	5.20	-41.67	≤-14.8	PASS
	Ant8	High	2462	4.84	-25.9	≤-15.16	PASS
11AX40MIMO	Ant9	Low	2422	2.31	-28.17	≤-17.69	PASS
	Ant8	Low	2422	2.82	-26.88	≤-17.18	PASS
	Ant9	High	2452	2.23	-26.1	≤-17.77	PASS
	Ant8	High	2452	2.93	-24.7	≤-17.07	PASS





Test Graphs

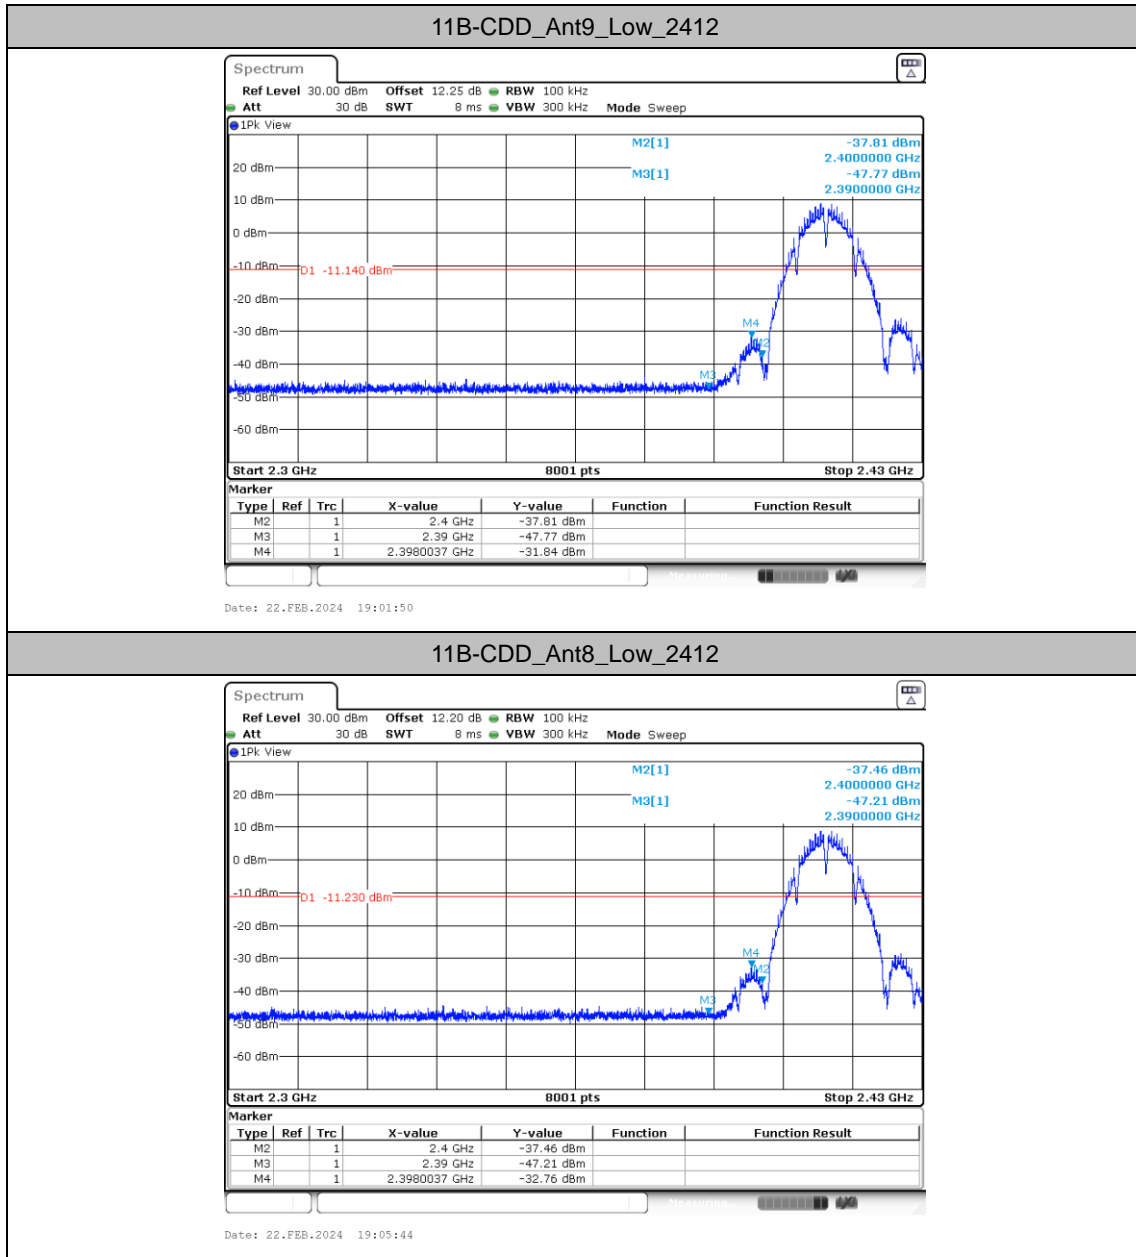


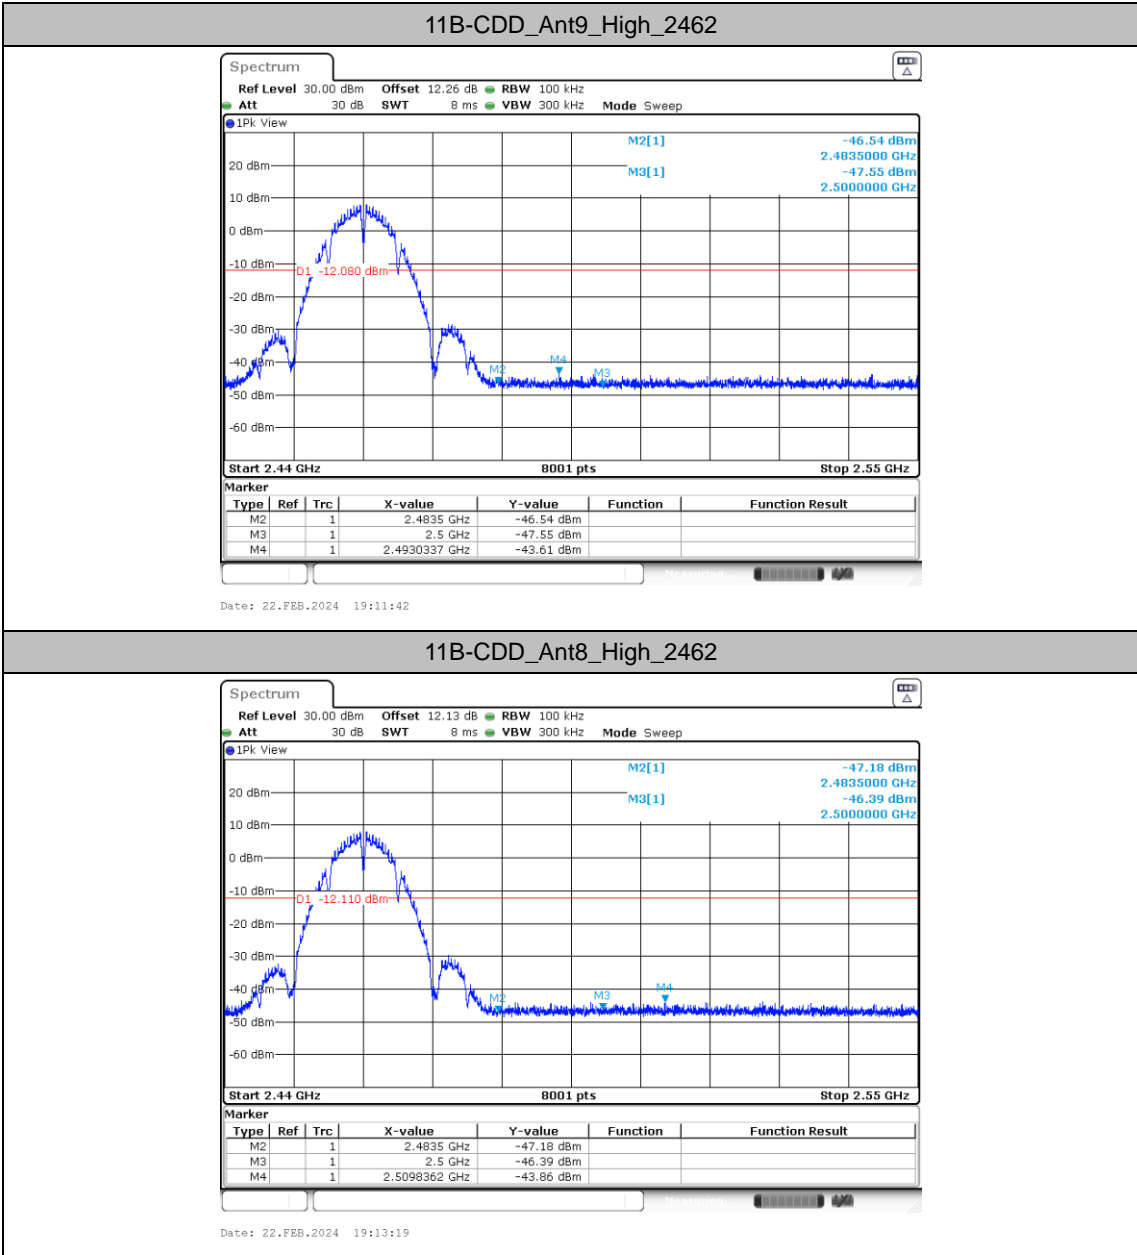


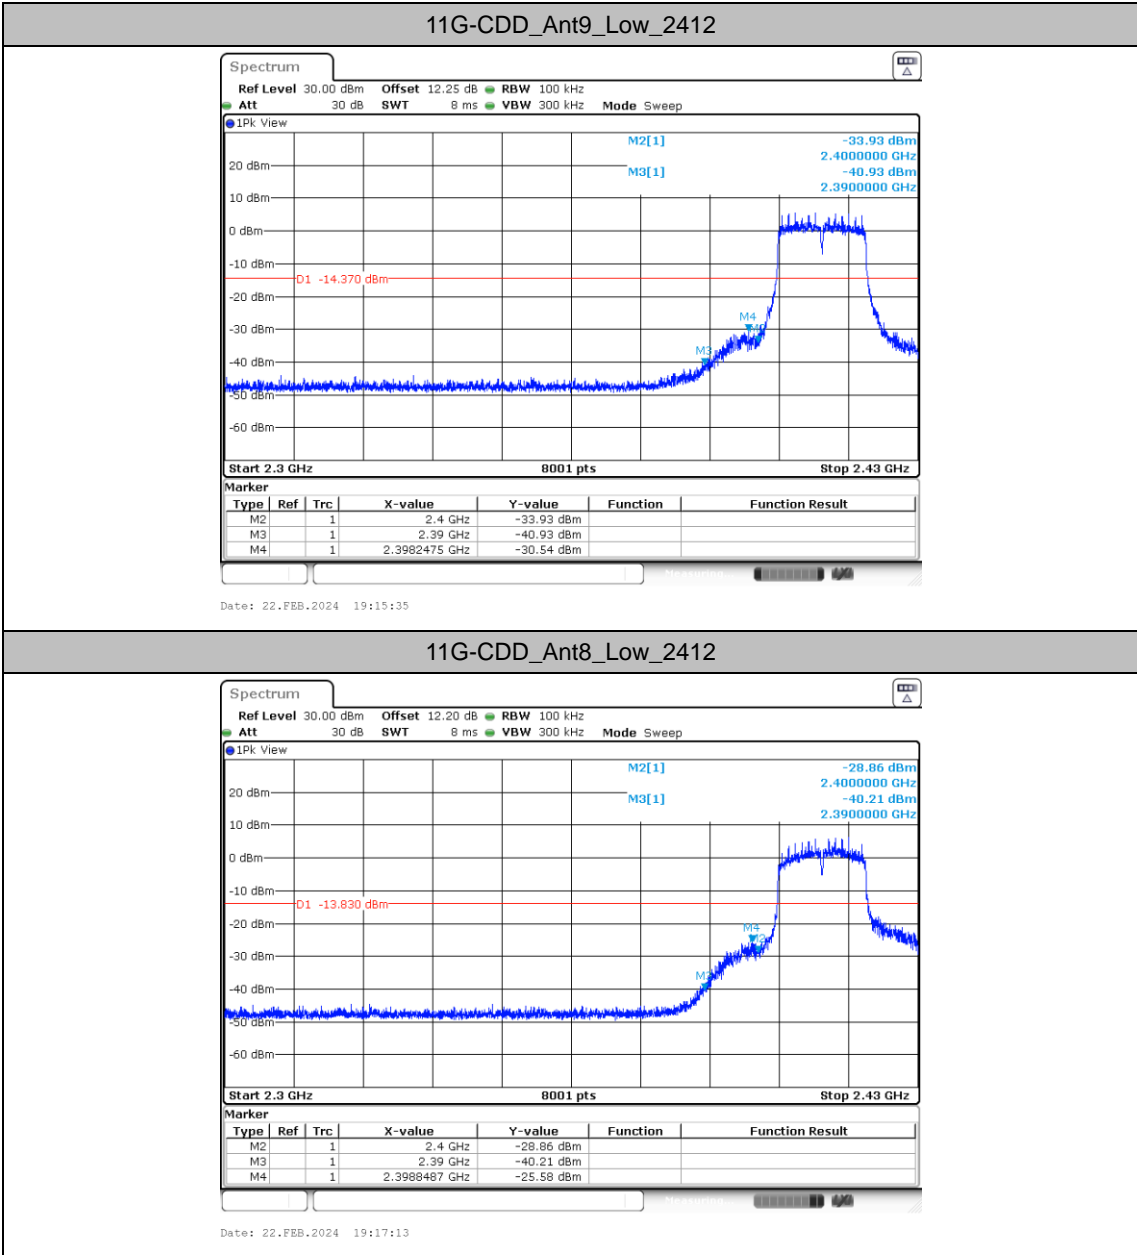


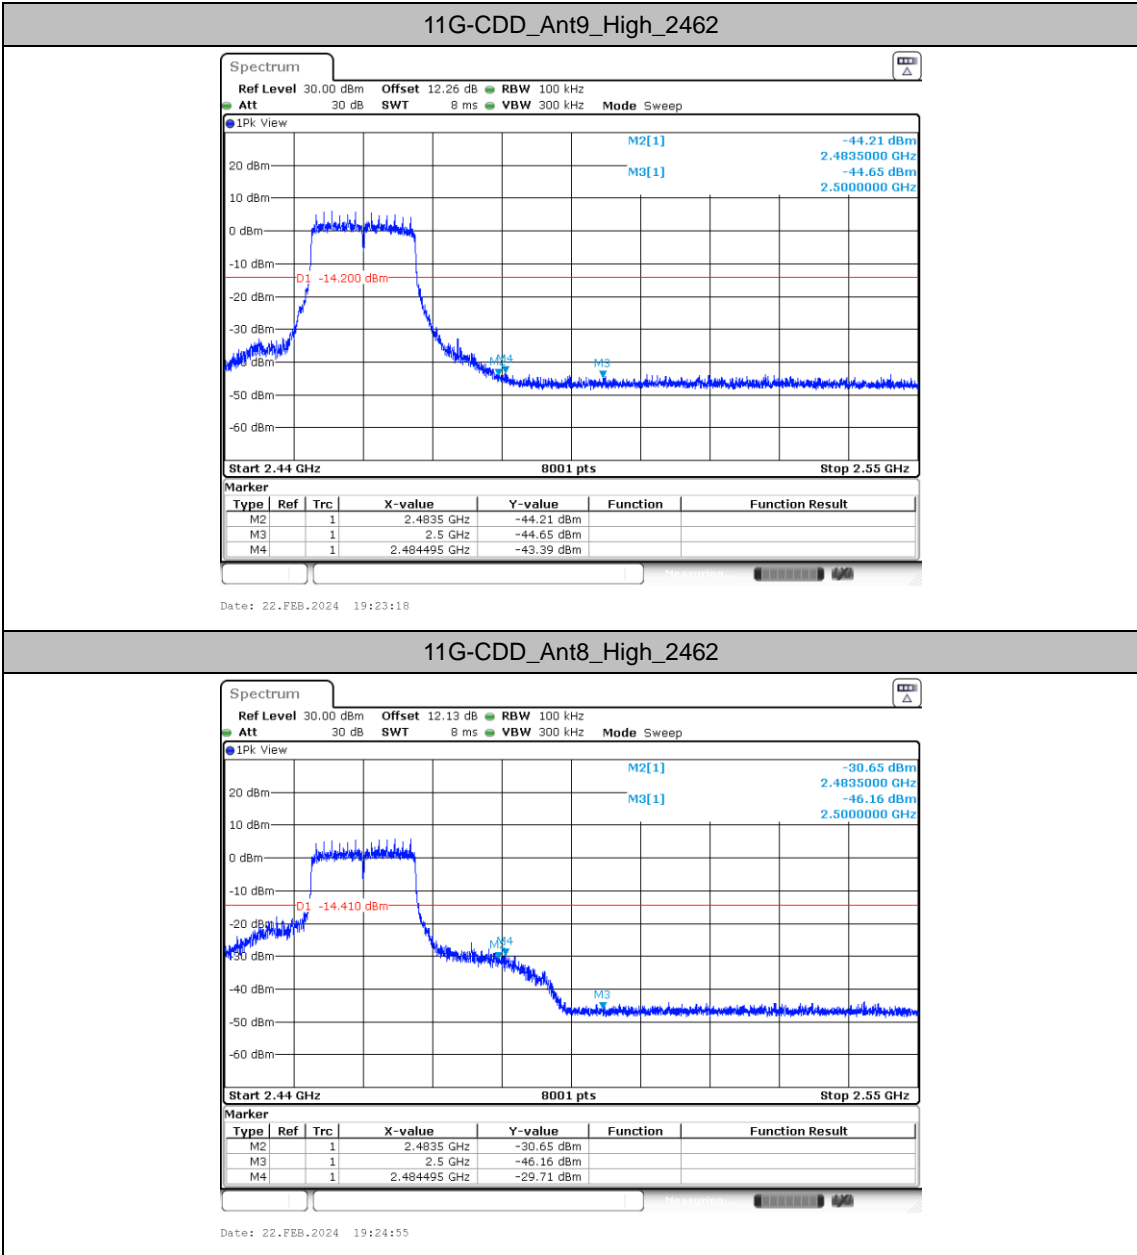

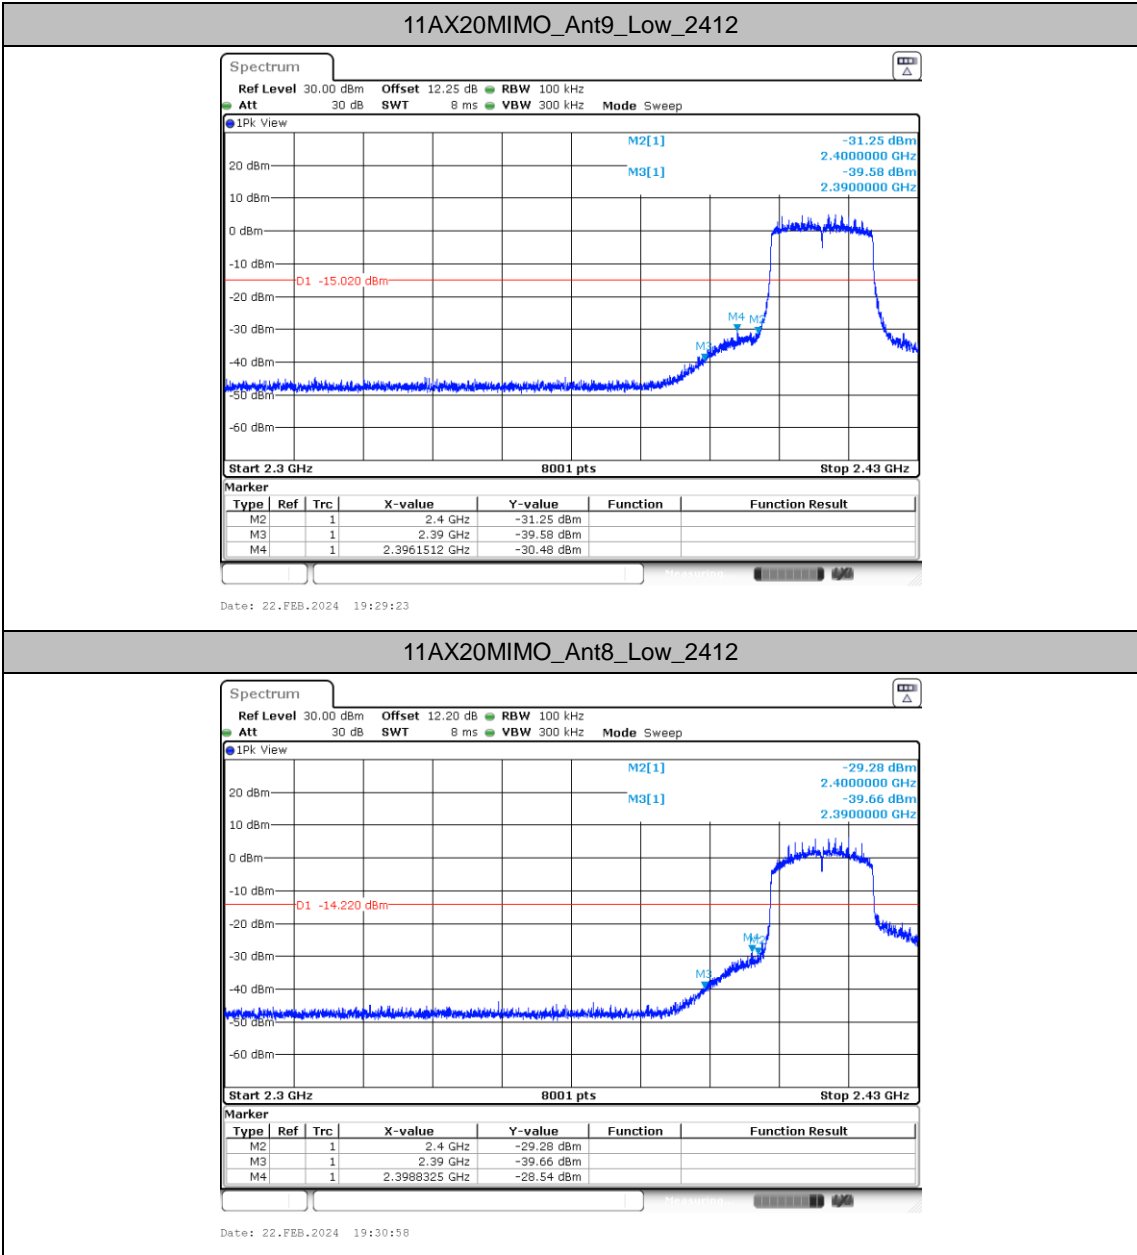

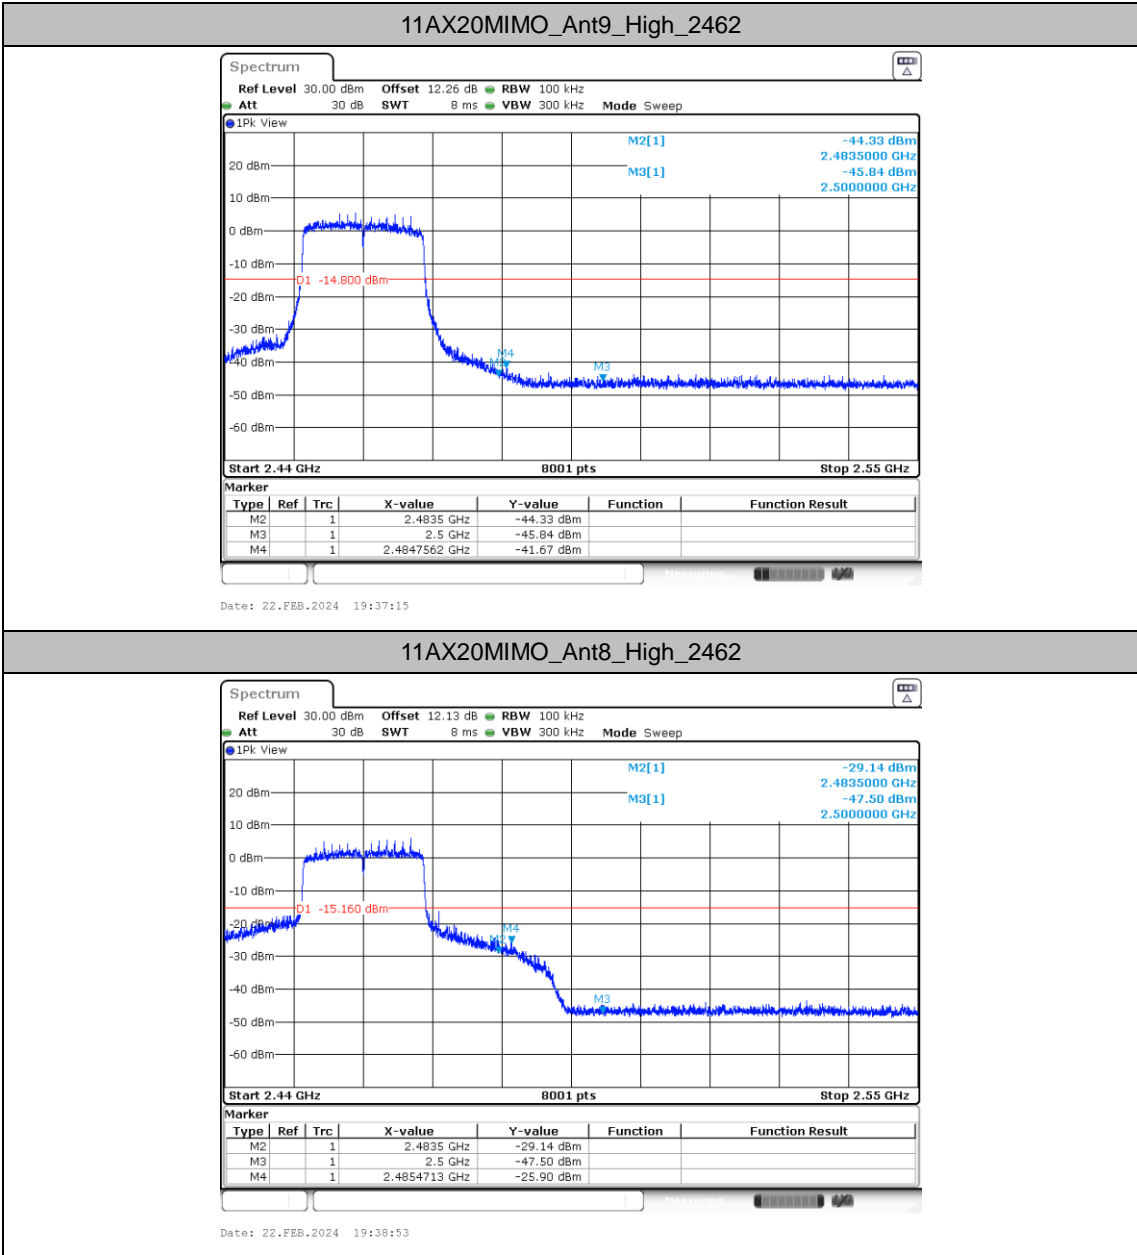

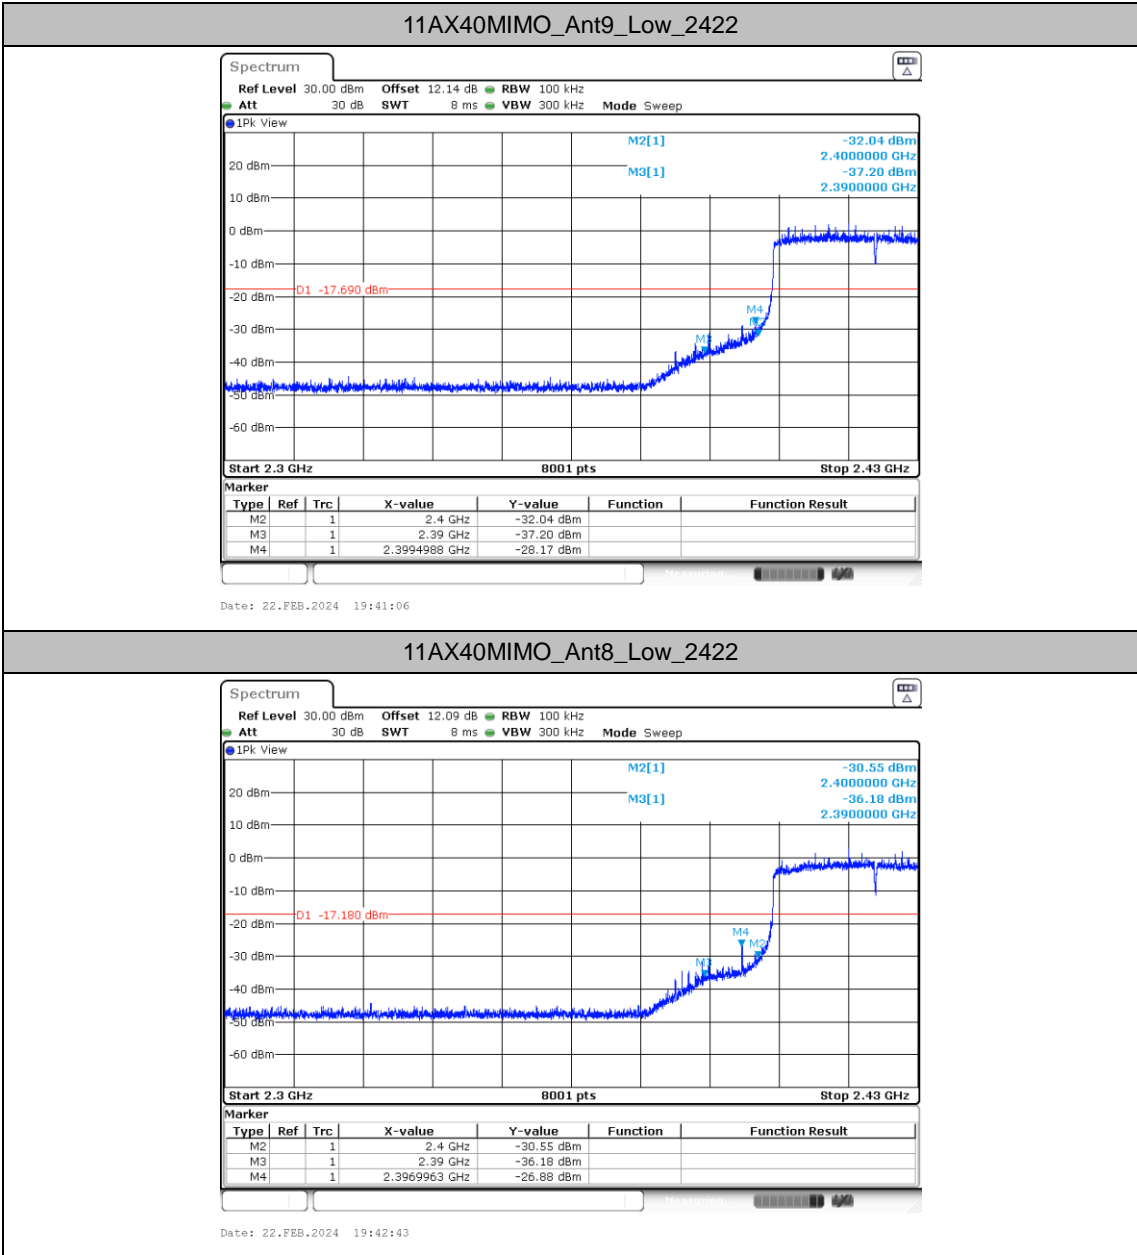

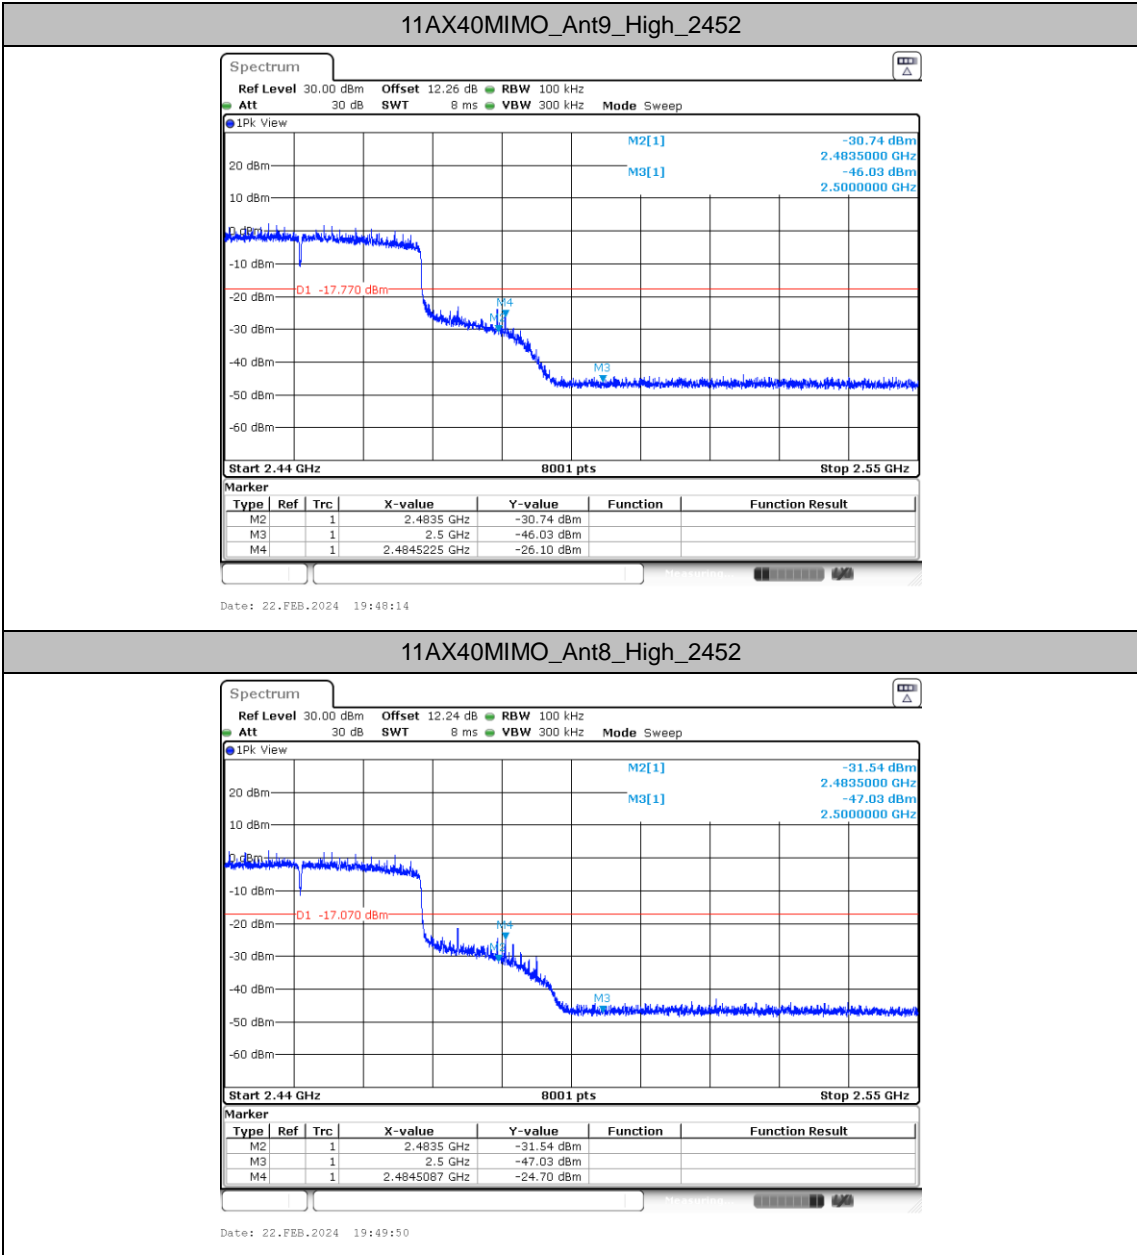




Conducted Spurious Emission

Test Result

TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B-CDD	Ant9	2412	30~1000	8.86	-45.52	≤-11.14	PASS
			1000~26500	8.86	-36.07	≤-11.14	PASS
	Ant8	2412	30~1000	8.77	-45.27	≤-11.23	PASS
			1000~26500	8.77	-36.45	≤-11.23	PASS
	Ant9	2437	30~1000	7.68	-45.11	≤-12.32	PASS
			1000~26500	7.68	-36.59	≤-12.32	PASS
	Ant8	2437	30~1000	7.74	-45.19	≤-12.26	PASS
			1000~26500	7.74	-36.05	≤-12.26	PASS
	Ant9	2462	30~1000	7.92	-45.14	≤-12.08	PASS
			1000~26500	7.92	-36.5	≤-12.08	PASS
	Ant8	2462	30~1000	7.89	-44.3	≤-12.11	PASS
			1000~26500	7.89	-36.68	≤-12.11	PASS
11G-CDD	Ant9	2412	30~1000	5.63	-45.17	≤-14.37	PASS
			1000~26500	5.63	-36.15	≤-14.37	PASS
	Ant8	2412	30~1000	6.17	-46.01	≤-13.83	PASS
			1000~26500	6.17	-36.84	≤-13.83	PASS
	Ant9	2437	30~1000	5.55	-45.36	≤-14.45	PASS
			1000~26500	5.55	-35.87	≤-14.45	PASS
	Ant8	2437	30~1000	5.87	-45.36	≤-14.13	PASS
			1000~26500	5.87	-36.25	≤-14.13	PASS
	Ant9	2462	30~1000	5.80	-45.67	≤-14.2	PASS
			1000~26500	5.80	-36.22	≤-14.2	PASS
	Ant8	2462	30~1000	5.59	-45.7	≤-14.41	PASS
			1000~26500	5.59	-35.19	≤-14.41	PASS
11AX20MIMO	Ant9	2412	30~1000	4.98	-45.28	≤-15.02	PASS
			1000~26500	4.98	-35.37	≤-15.02	PASS
	Ant8	2412	30~1000	5.78	-45.24	≤-14.22	PASS
			1000~26500	5.78	-35.72	≤-14.22	PASS
	Ant9	2437	30~1000	5.55	-45.73	≤-14.45	PASS
			1000~26500	5.55	-35.92	≤-14.45	PASS
	Ant8	2437	30~1000	5.38	-45.81	≤-14.62	PASS
			1000~26500	5.38	-36.62	≤-14.62	PASS
	Ant9	2462	30~1000	5.20	-44.51	≤-14.8	PASS
			1000~26500	5.20	-35.85	≤-14.8	PASS
	Ant8	2462	30~1000	4.84	-45.47	≤-15.16	PASS
			1000~26500	4.84	-36.65	≤-15.16	PASS
11AX40MIMO	Ant9	2422	30~1000	2.31	-45.8	≤-17.69	PASS
			1000~26500	2.31	-36.03	≤-17.69	PASS
	Ant8	2422	30~1000	2.82	-44.31	≤-17.18	PASS
			1000~26500	2.82	-35.95	≤-17.18	PASS
	Ant9	2437	30~1000	2.11	-45.81	≤-17.89	PASS
			1000~26500	2.11	-36.45	≤-17.89	PASS
	Ant8	2437	30~1000	2.36	-45.52	≤-17.64	PASS
			1000~26500	2.36	-36.69	≤-17.64	PASS
	Ant9	2452	30~1000	2.23	-45.6	≤-17.77	PASS
			1000~26500	2.23	-36.35	≤-17.77	PASS
	Ant8	2452	30~1000	2.93	-44.88	≤-17.07	PASS
			1000~26500	2.93	-35.22	≤-17.07	PASS




Test Graphs

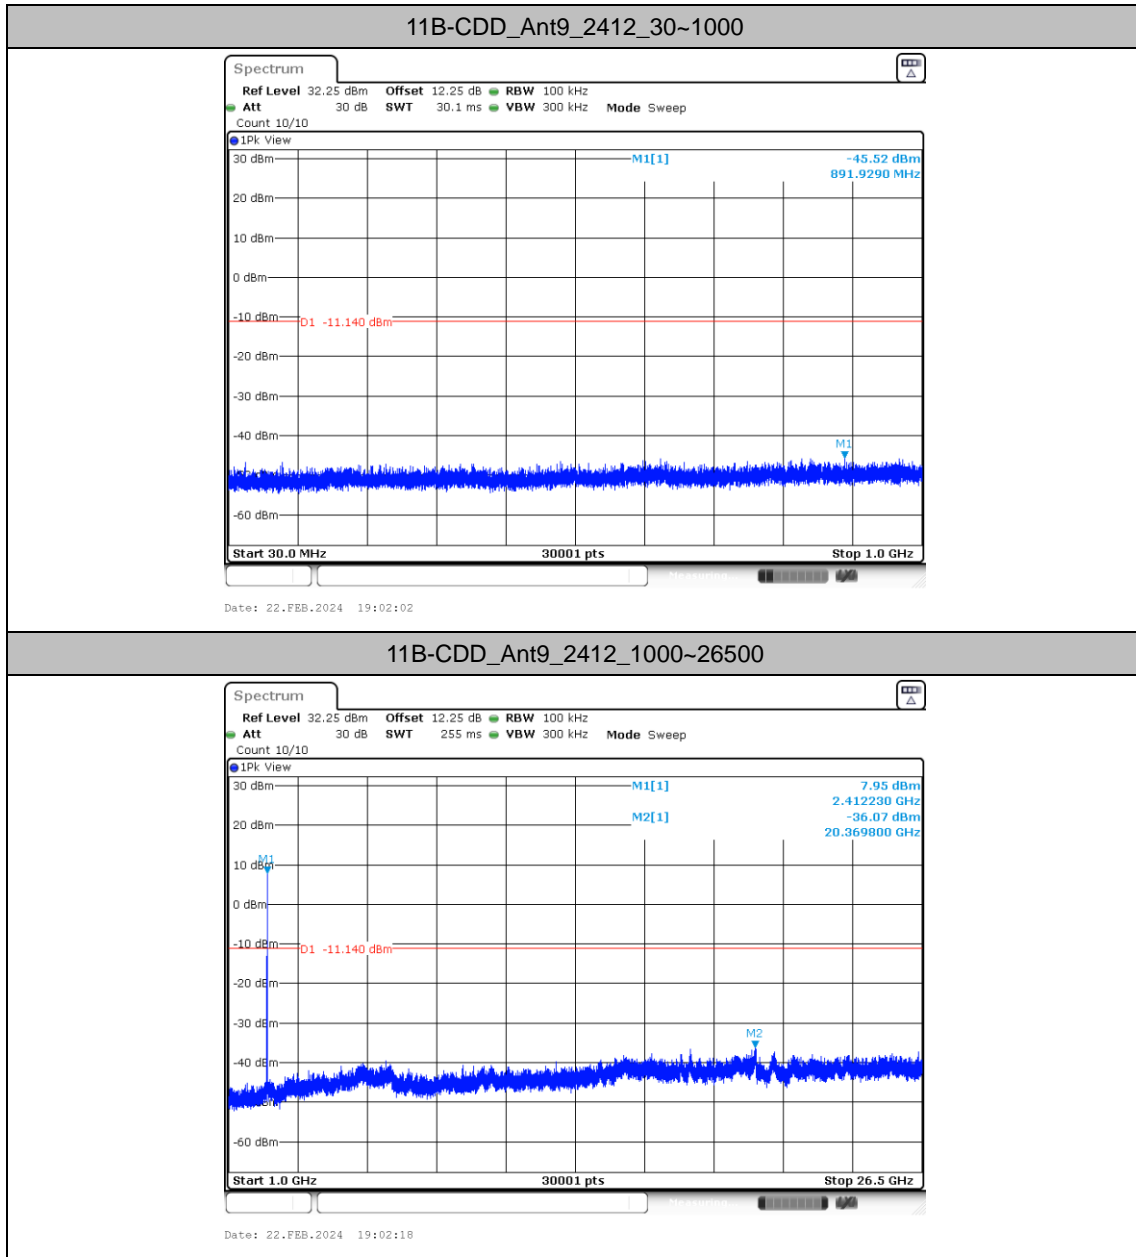




11B-CDD_Ant8_2412_30~1000

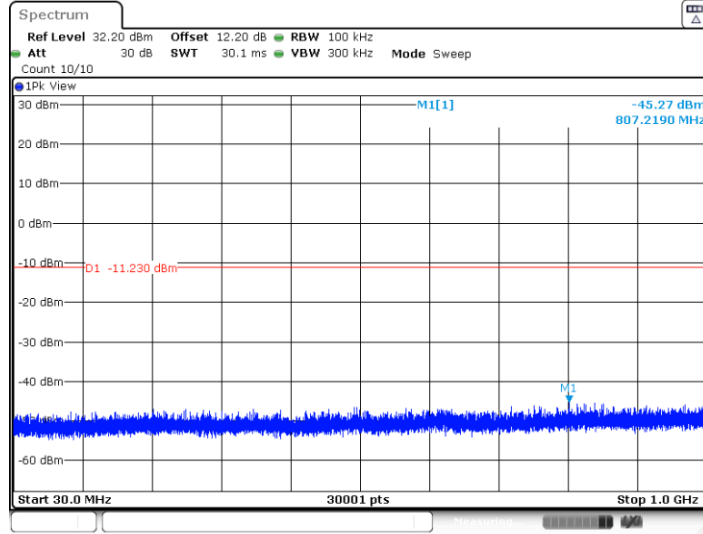



Date: 22.FEB.2024 19:05:56


11B-CDD_Ant8_2412_1000~26500

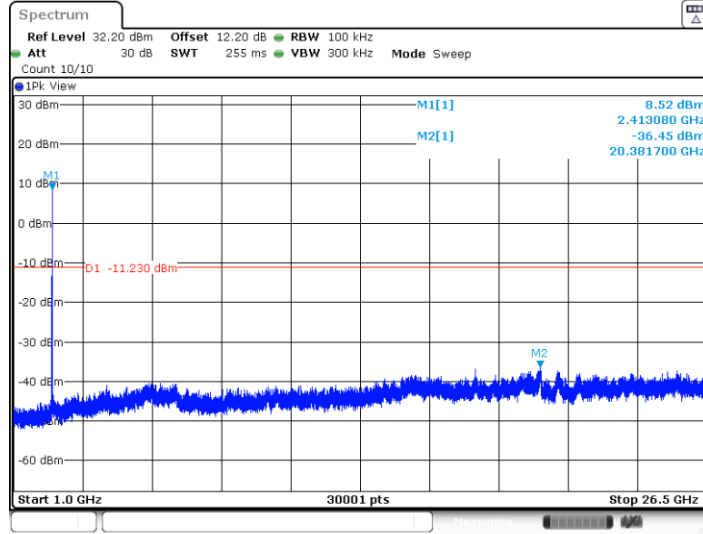


Date: 22.FEB.2024 19:06:11

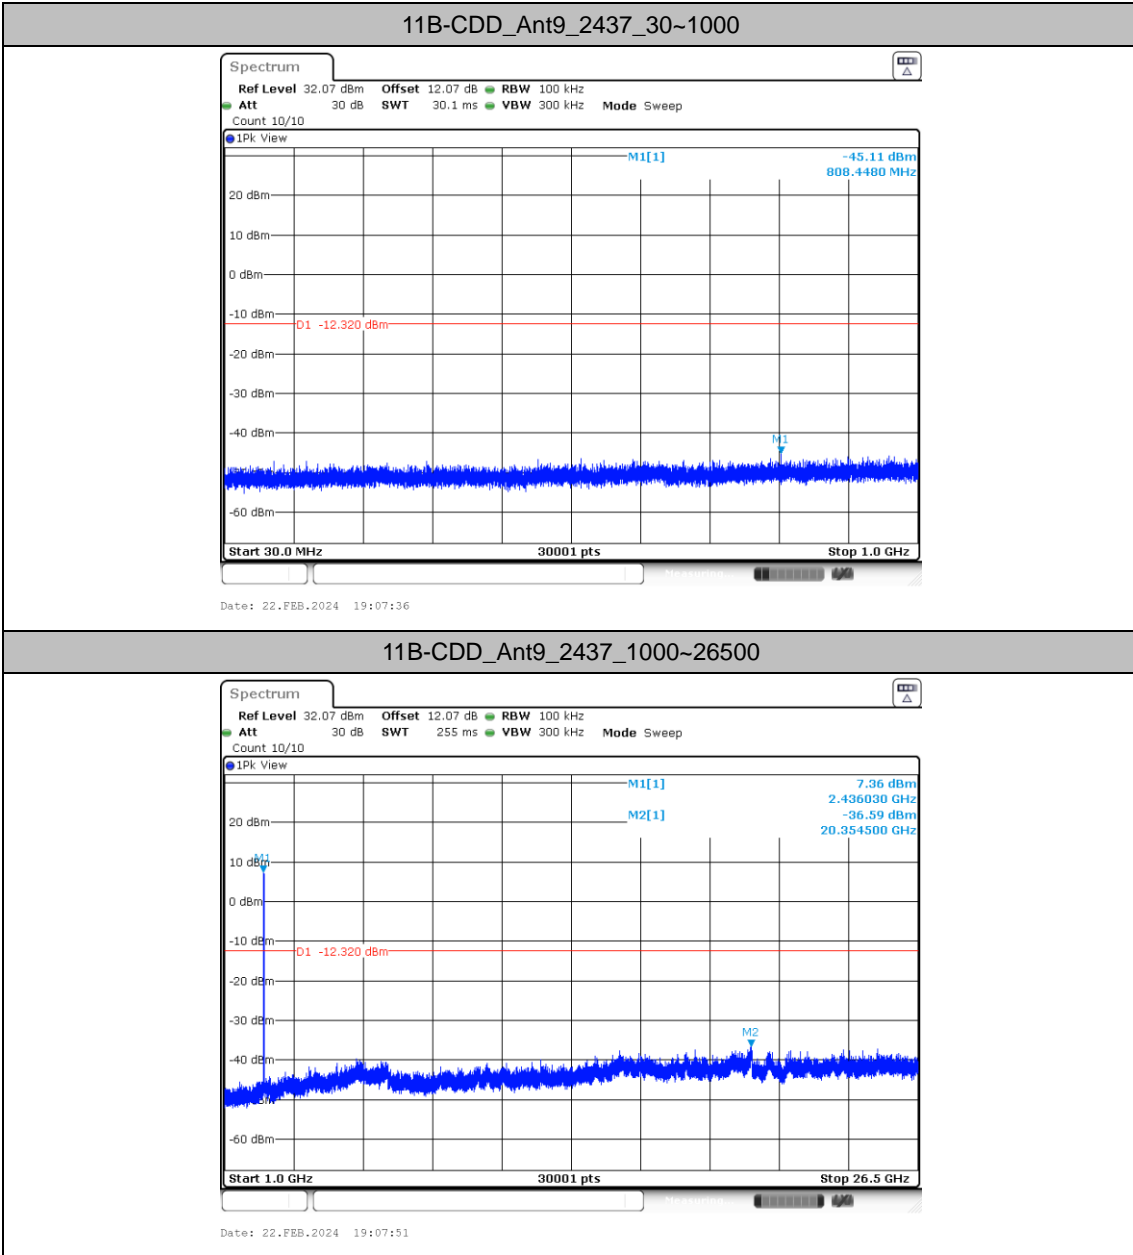

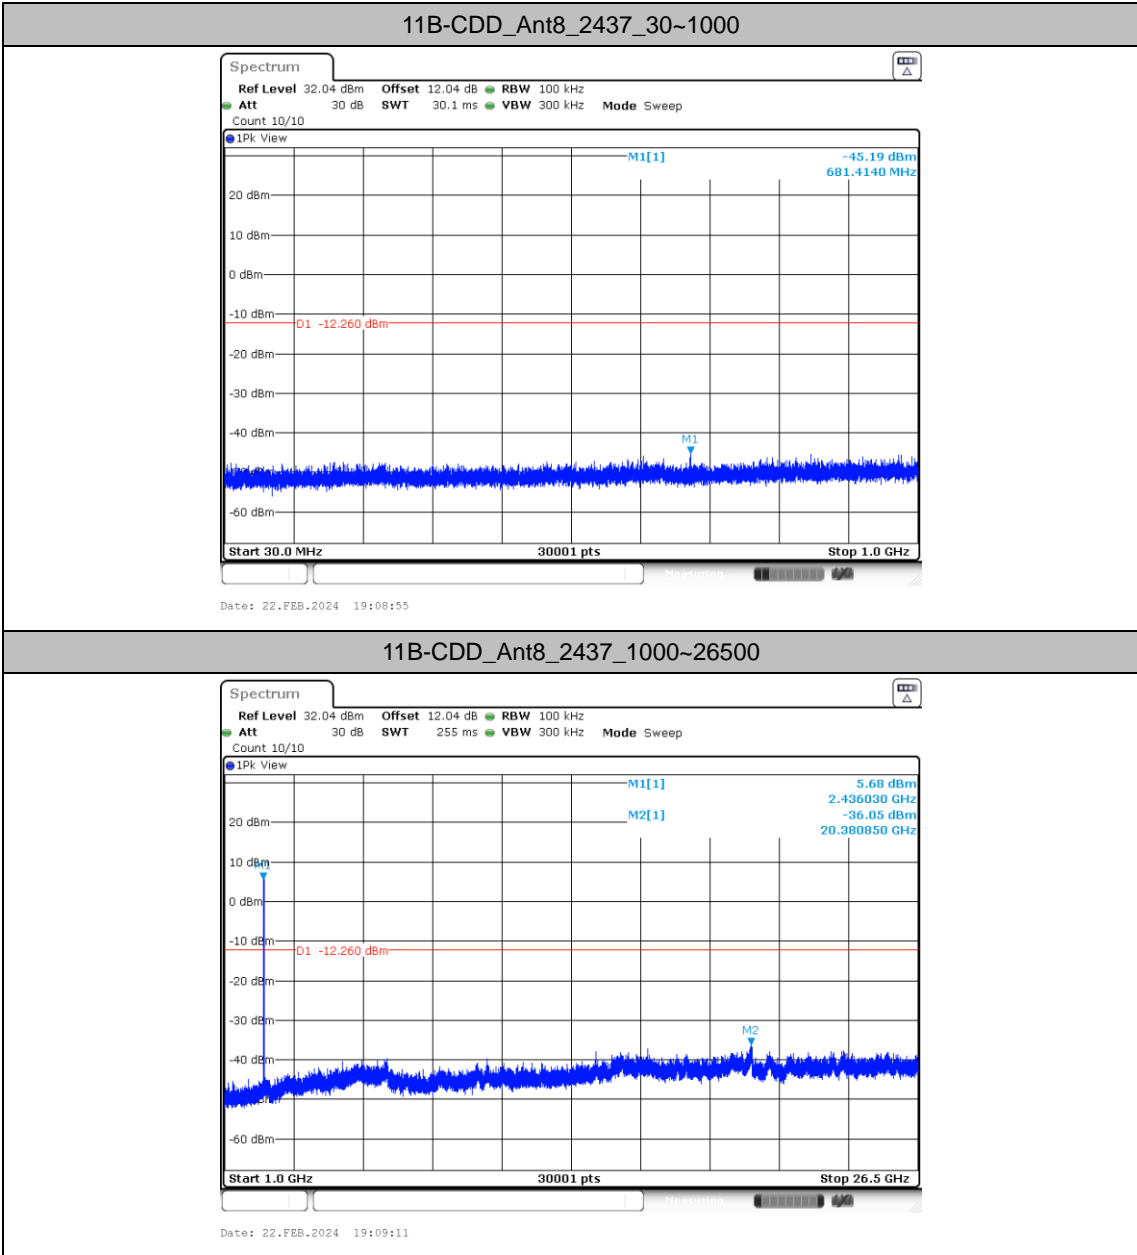


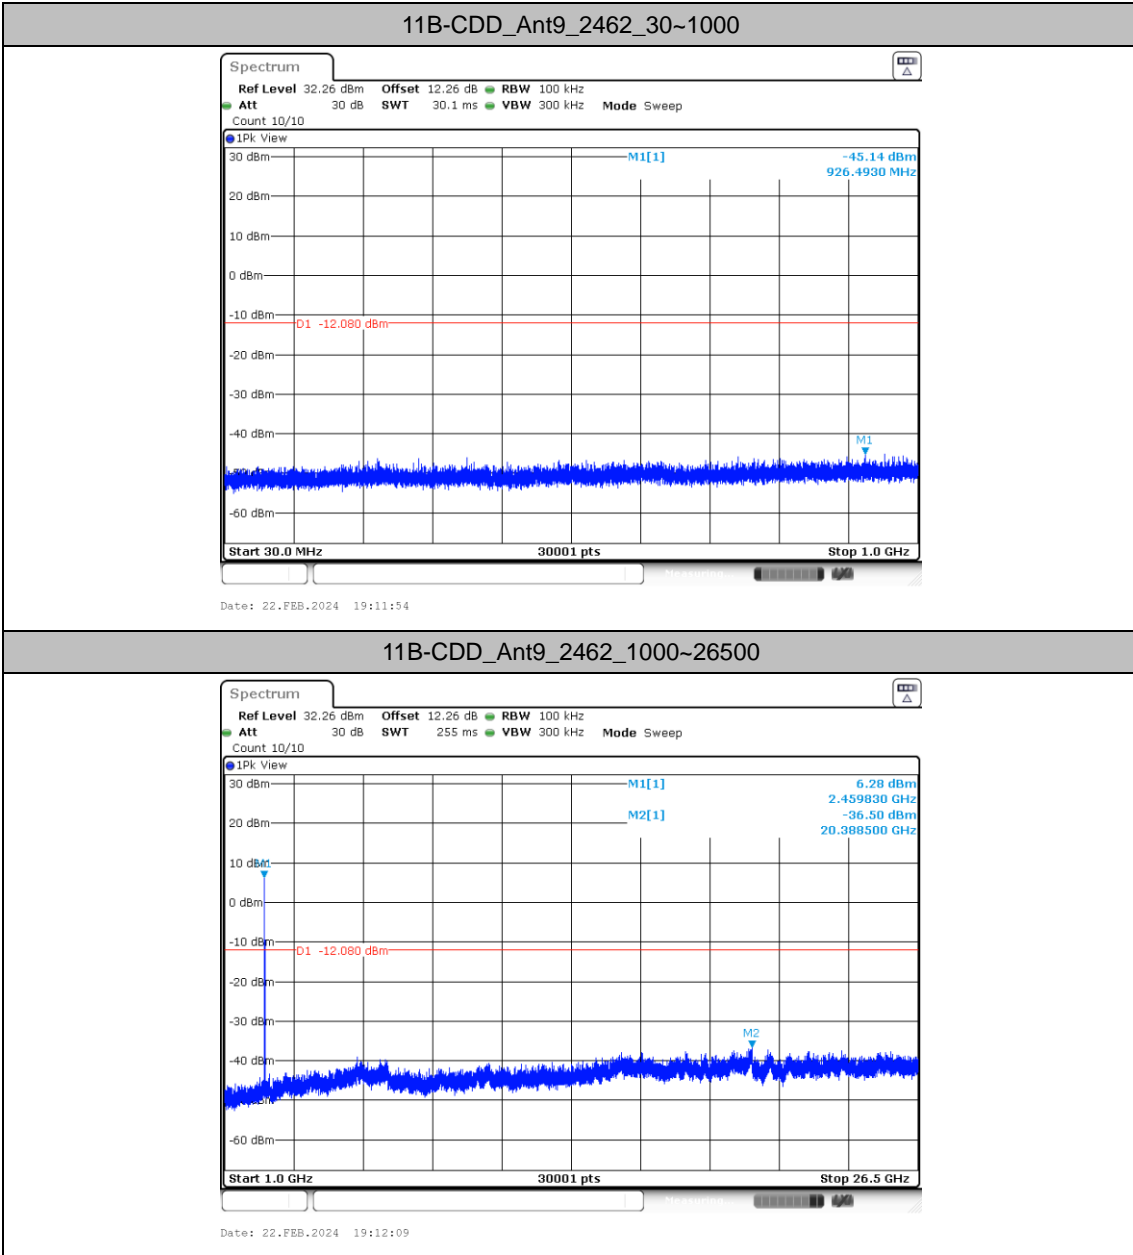

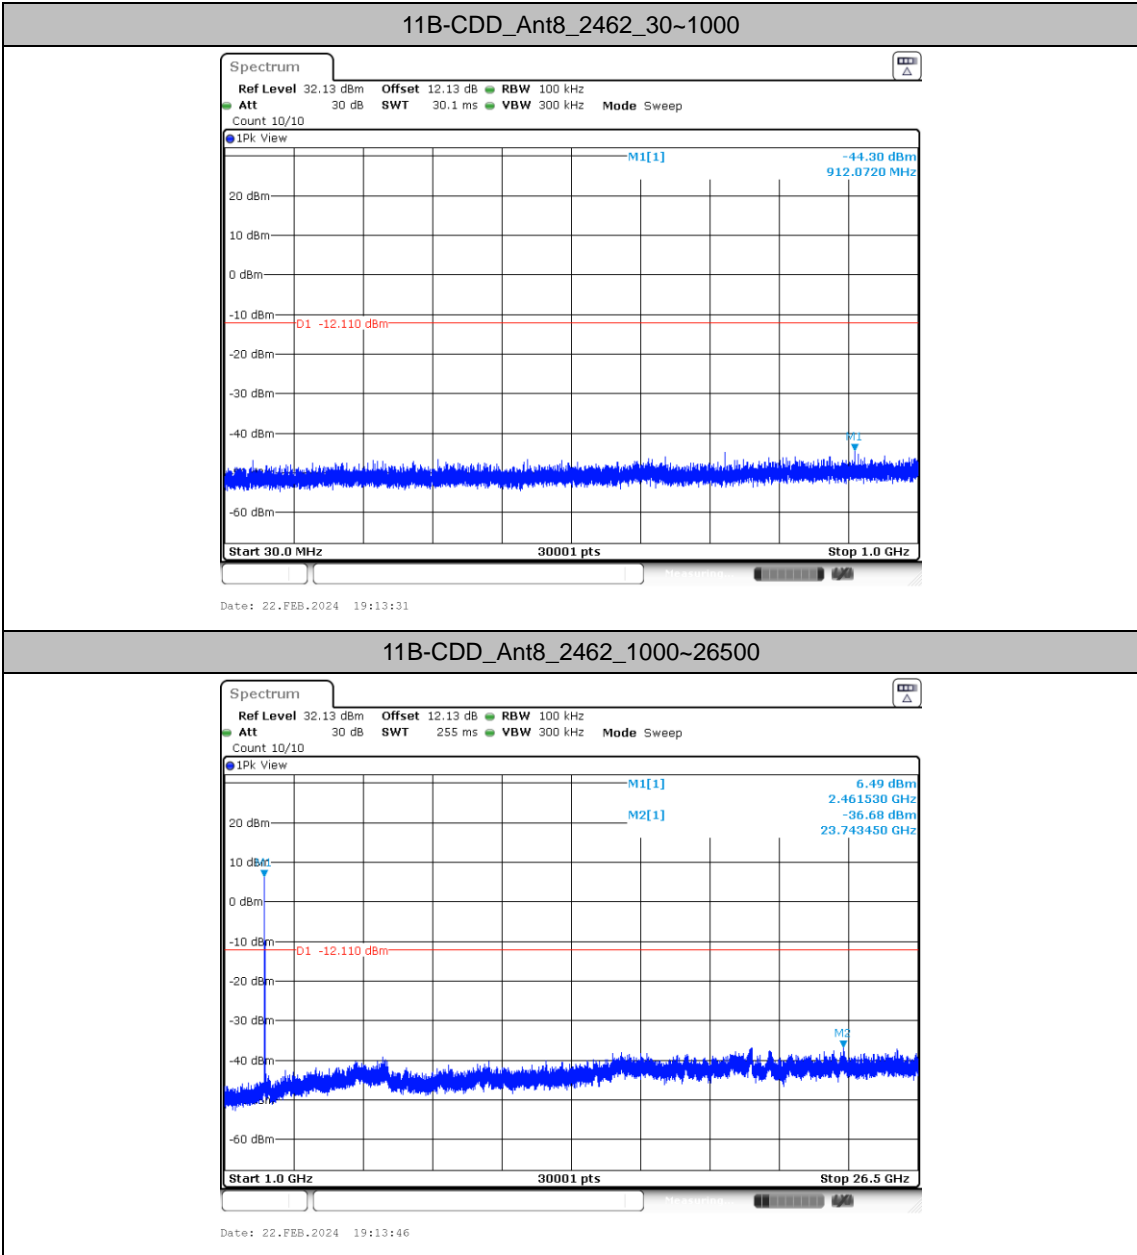




11G-CDD_Ant9_2412_30~1000

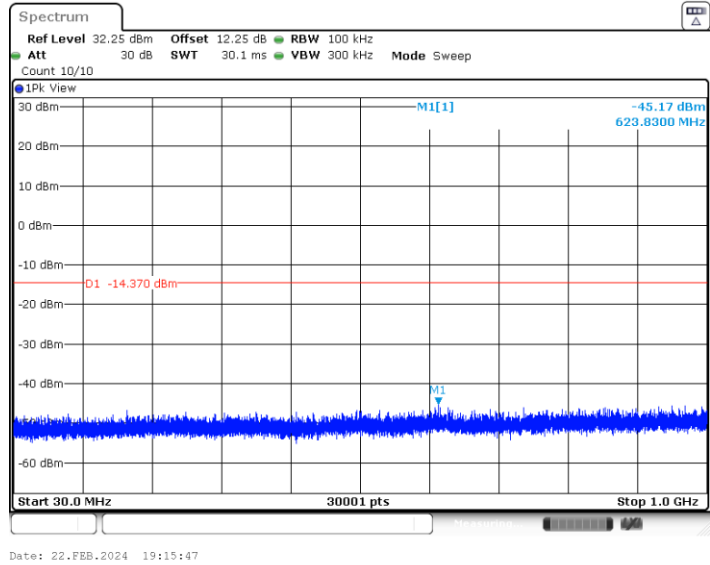


11G-CDD_Ant9_2412_1000~26500

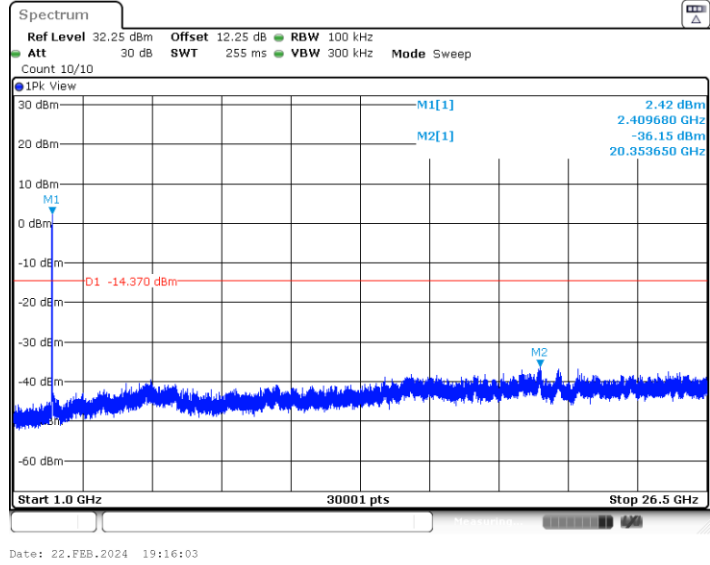






11G-CDD_Ant8_2412_30~1000

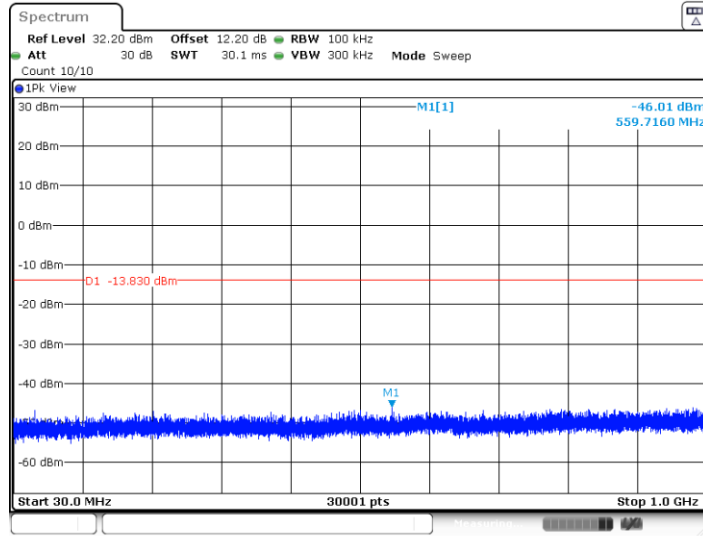

11G-CDD_Ant8_2412_1000~26500

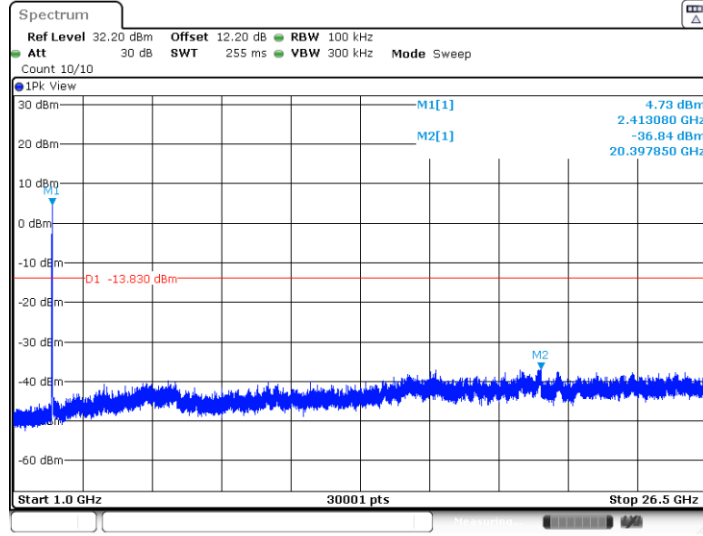


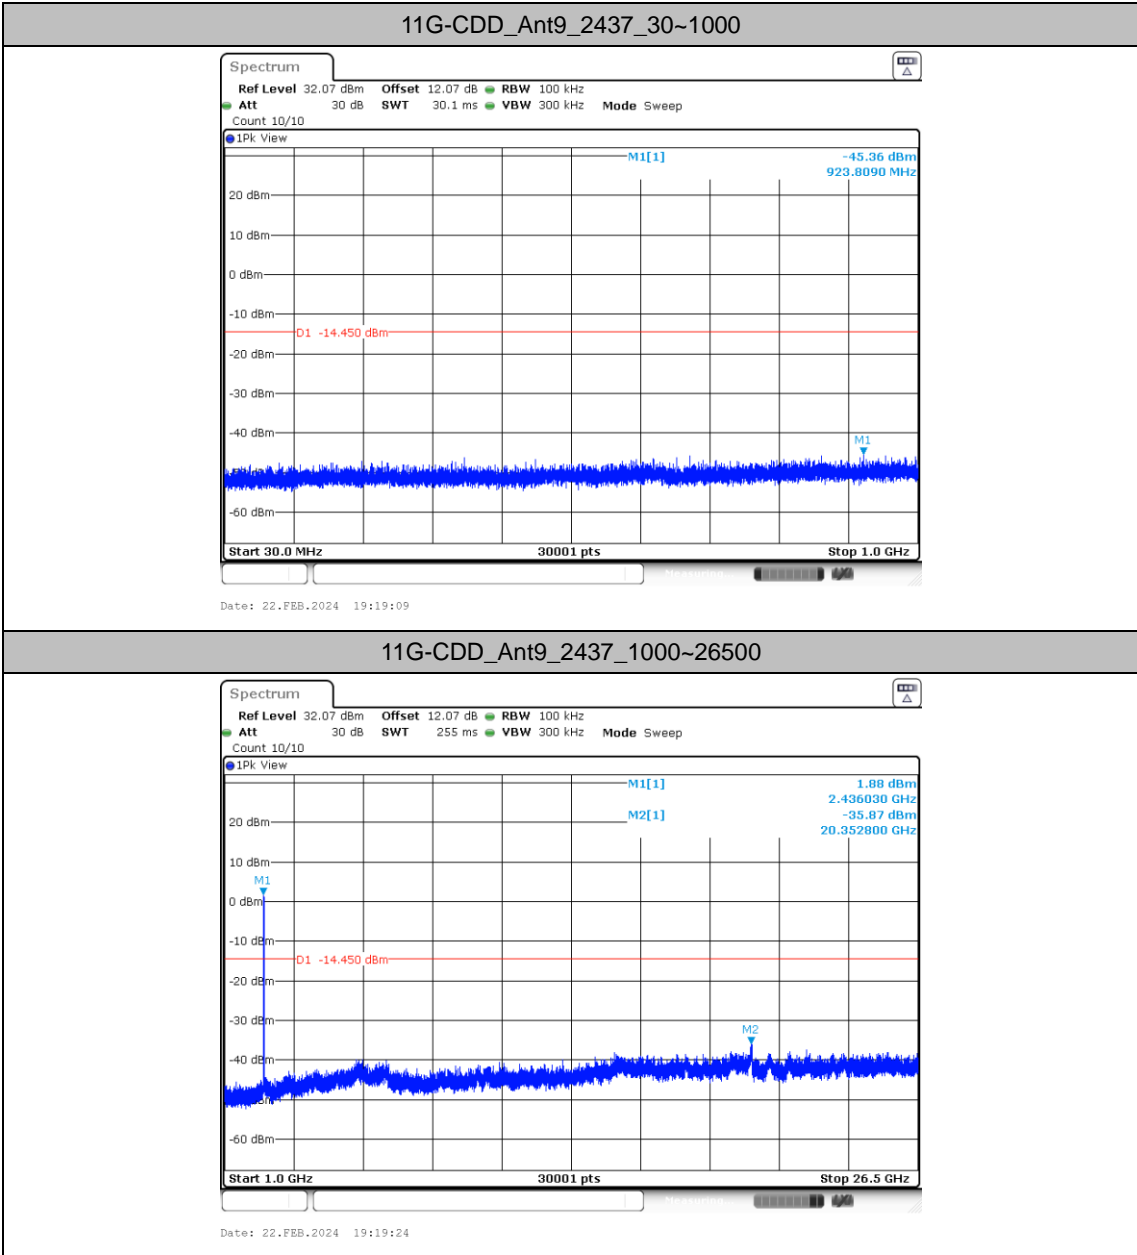

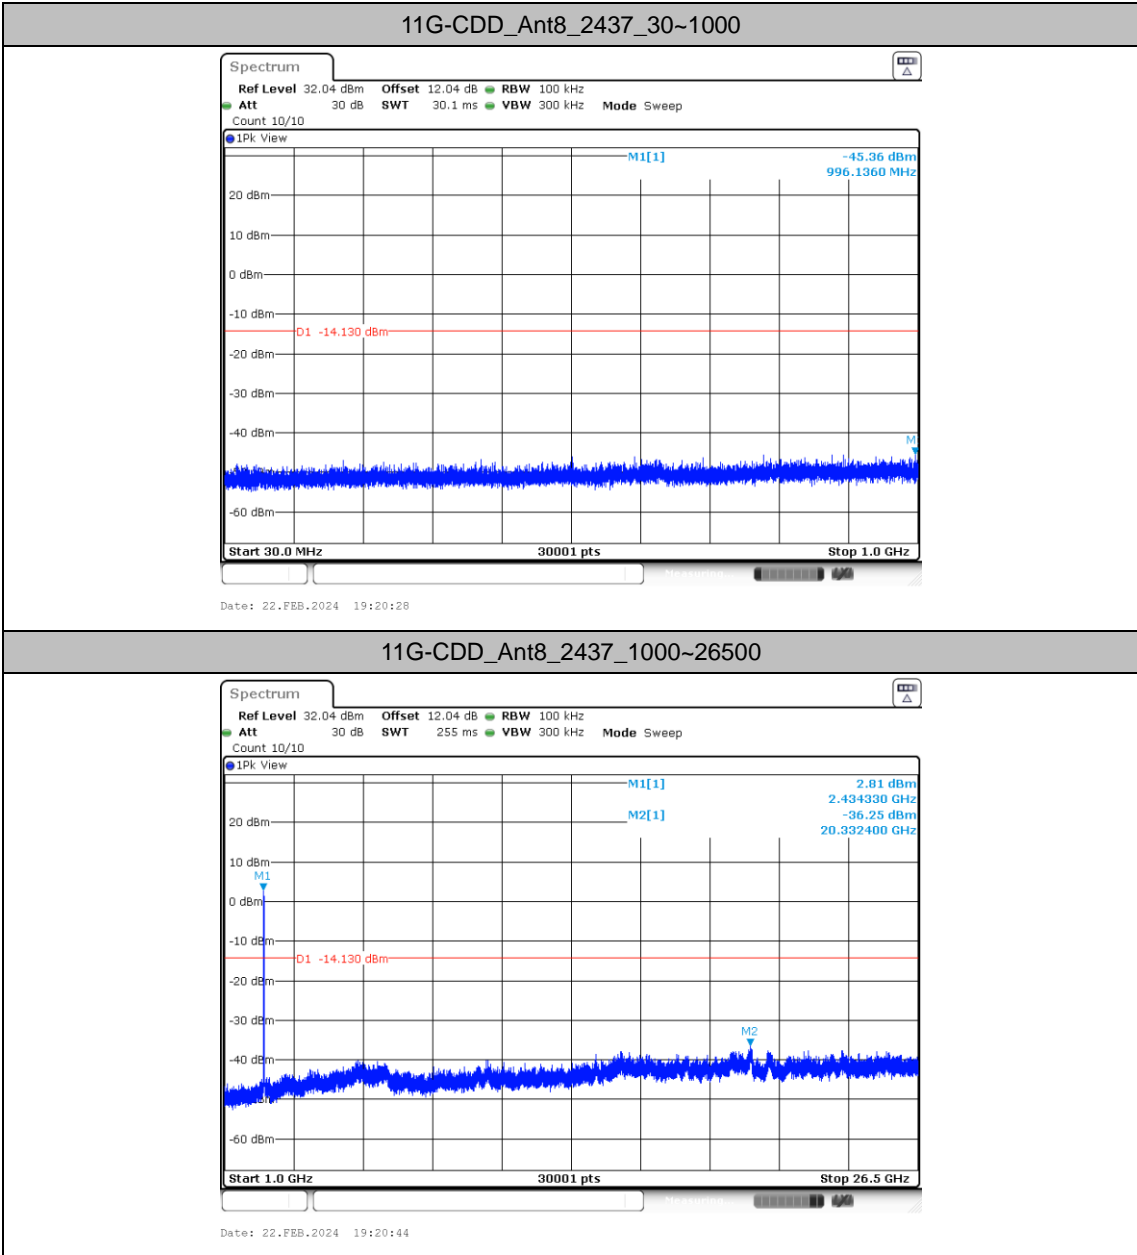




11G-CDD_Ant9_2462_30~1000

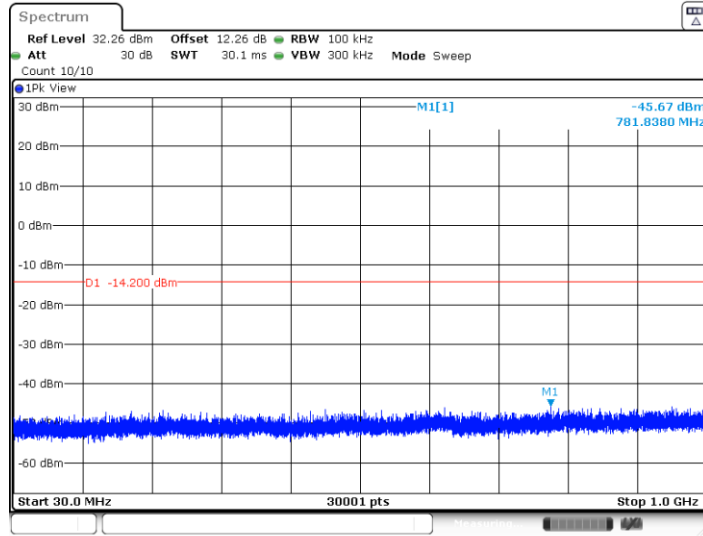

Date: 22.FEB.2024 19:23:30


11G-CDD_Ant9_2462_1000~26500

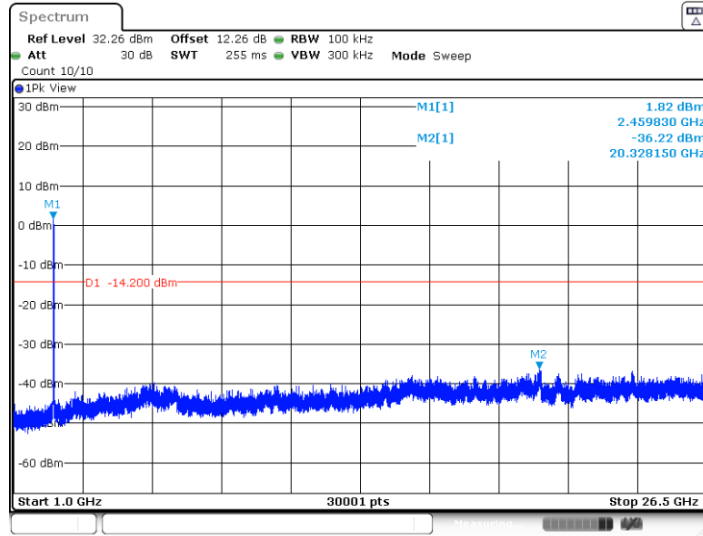


Date: 22.FEB.2024 19:23:45



11G-CDD_Ant8_2462_30~1000

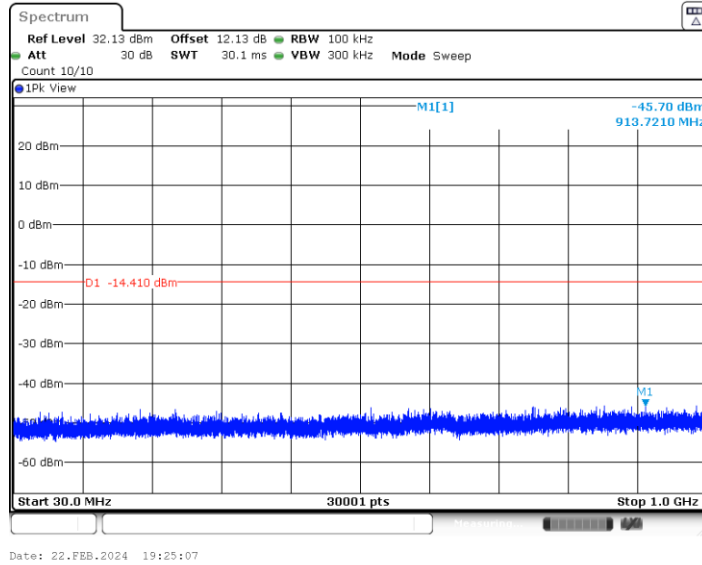


11G-CDD_Ant8_2462_1000~26500

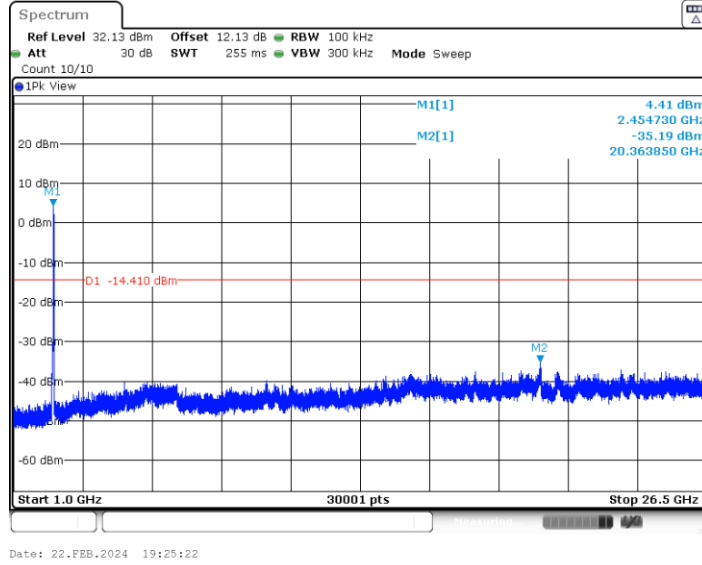




11AX20MIMO_Ant9_2412_30~1000

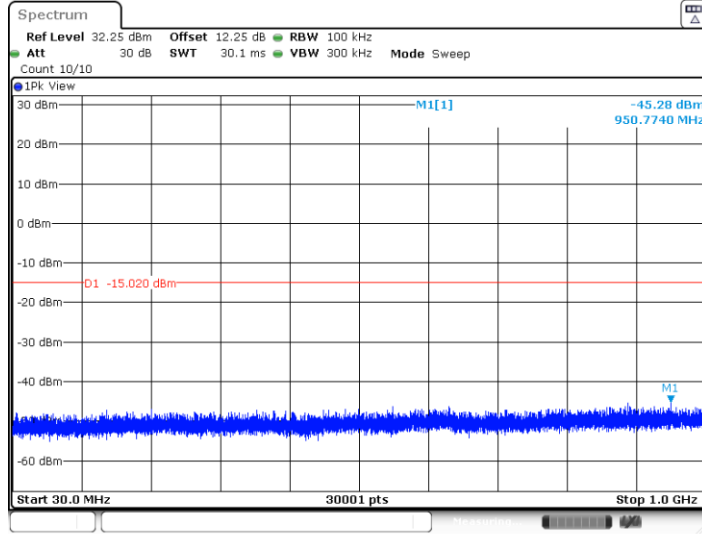

Date: 22.FEB.2024 19:29:35


11AX20MIMO_Ant9_2412_1000~26500

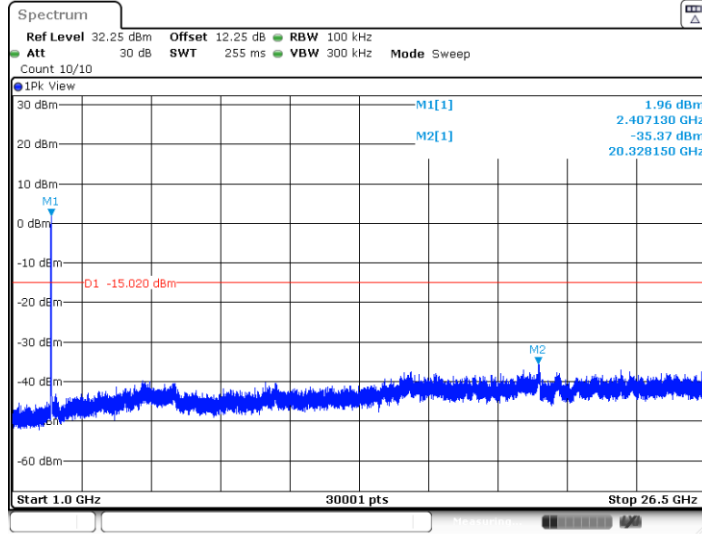


Date: 22.FEB.2024 19:29:50



11AX20MIMO_Ant8_2412_30~1000

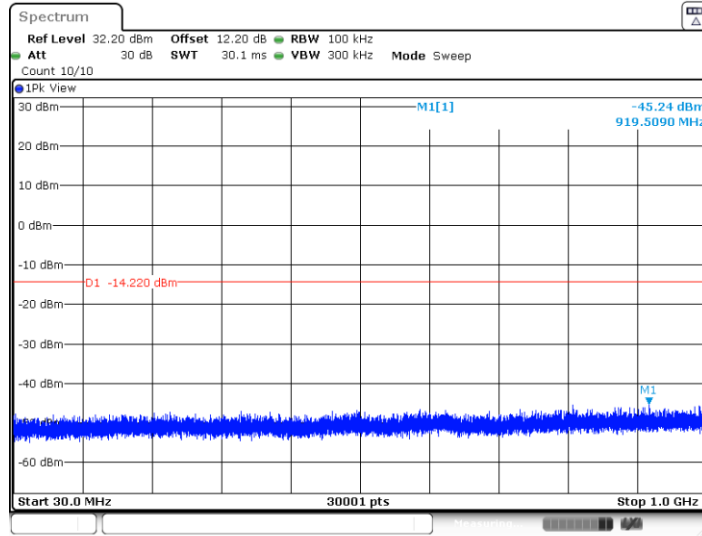


11AX20MIMO_Ant8_2412_1000~26500

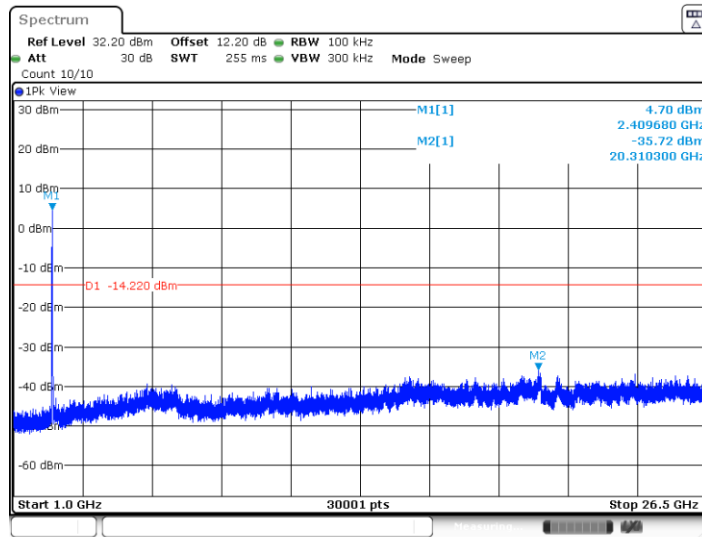




11AX20MIMO_Ant9_2437_30~1000

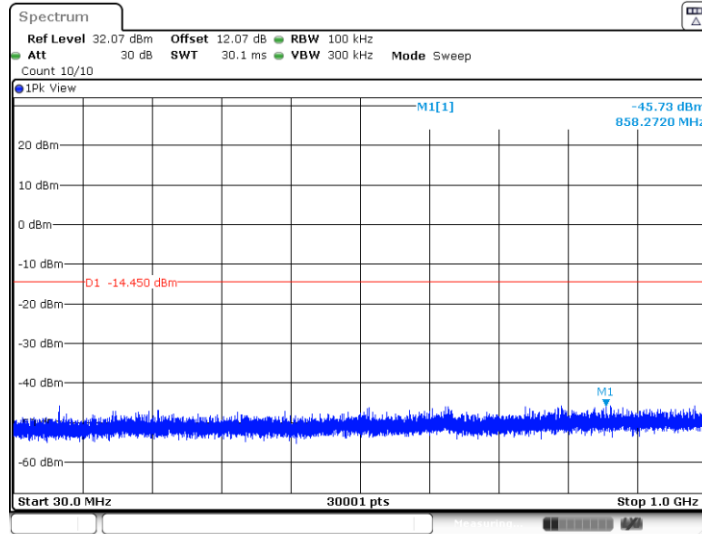

Date: 22.FEB.2024 19:33:00


11AX20MIMO_Ant9_2437_1000~26500

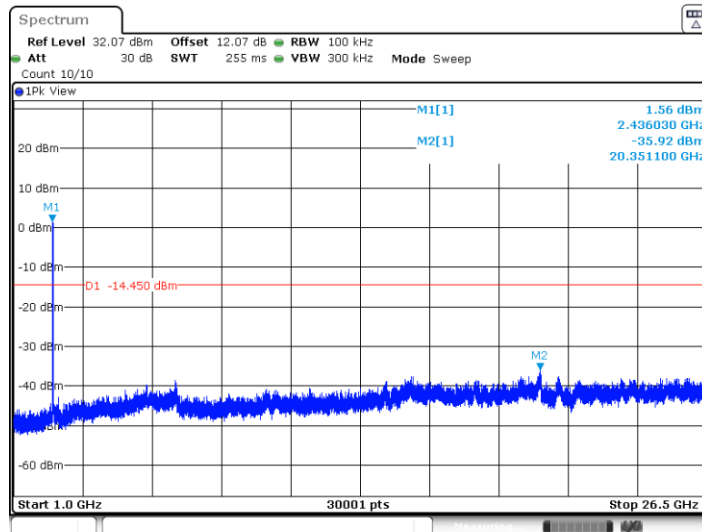


Date: 22.FEB.2024 19:33:15



11AX20MIMO_Ant8_2437_30~1000

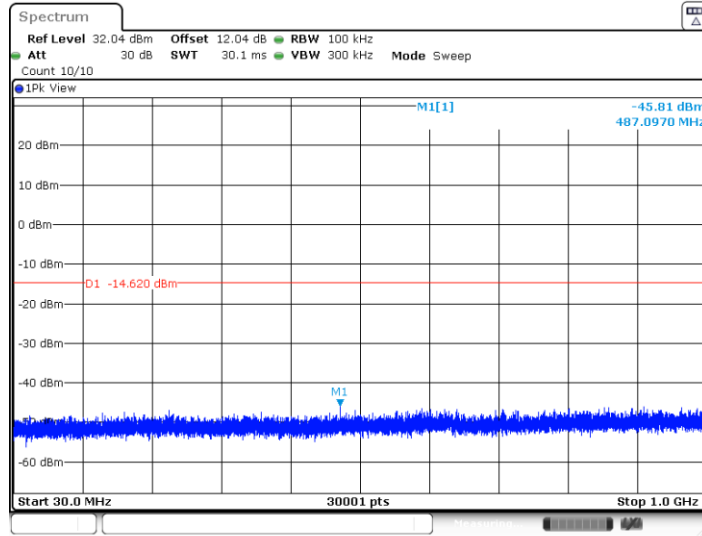


11AX20MIMO_Ant8_2437_1000~26500

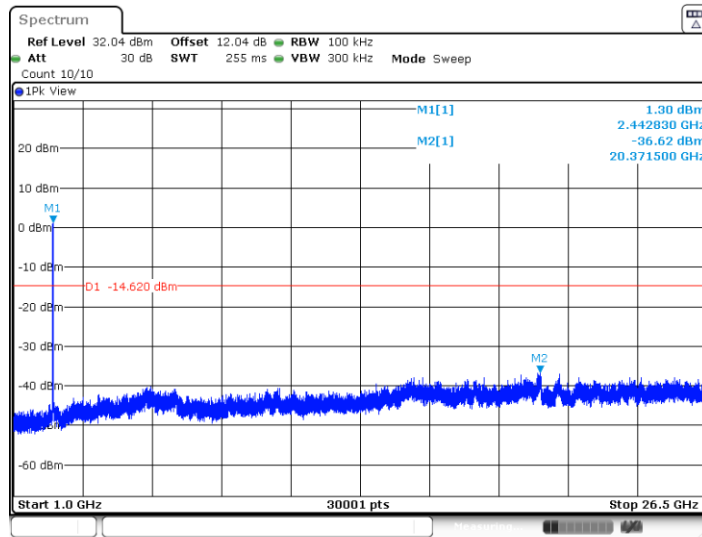




11AX20MIMO_Ant9_2462_30~1000

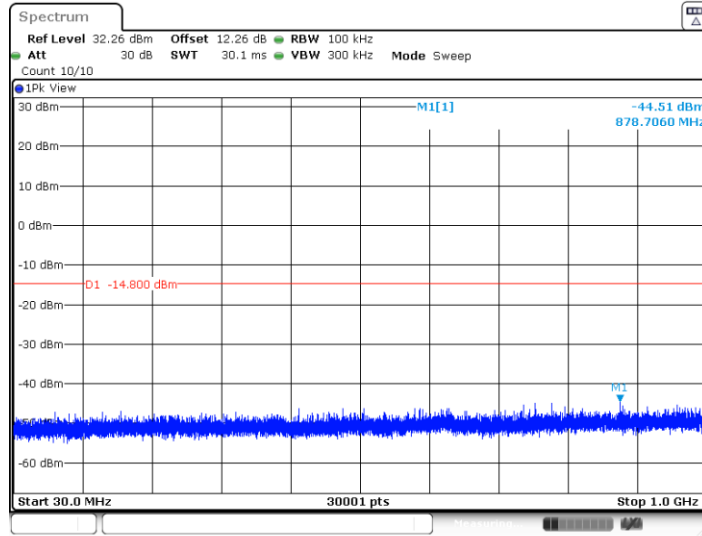

Date: 22.FEB.2024 19:37:27


11AX20MIMO_Ant9_2462_1000~26500

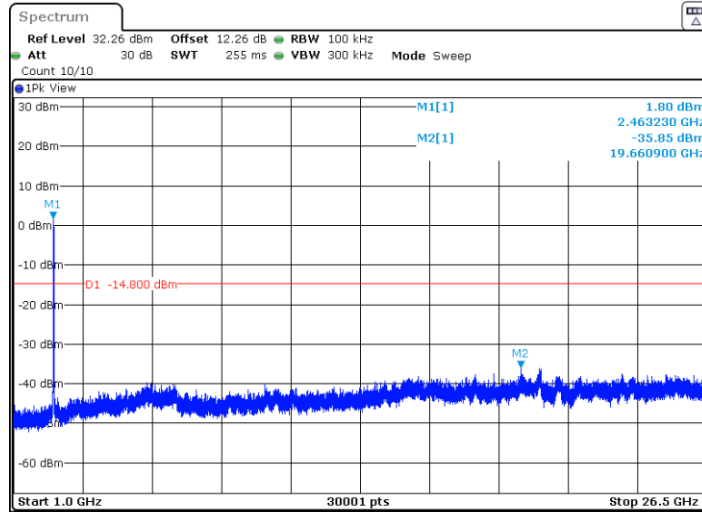

Date: 22.FEB.2024 19:37:43




11AX20MIMO_Ant8_2462_30~1000

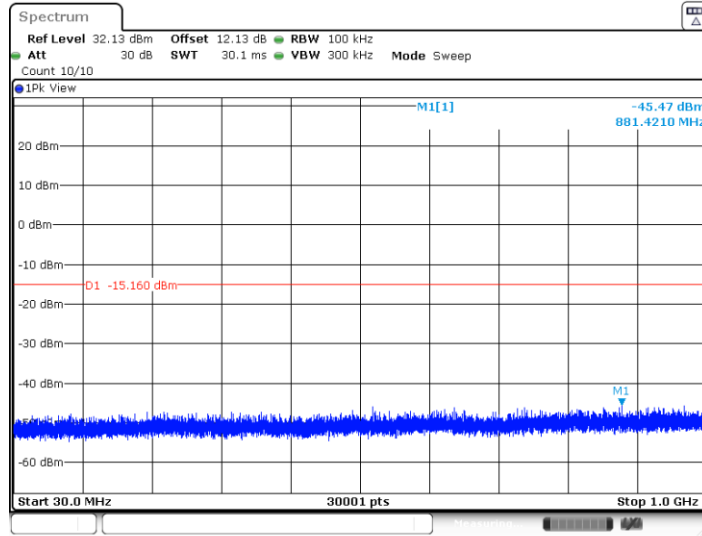

Date: 22.FEB.2024 19:39:05


11AX20MIMO_Ant8_2462_1000~26500

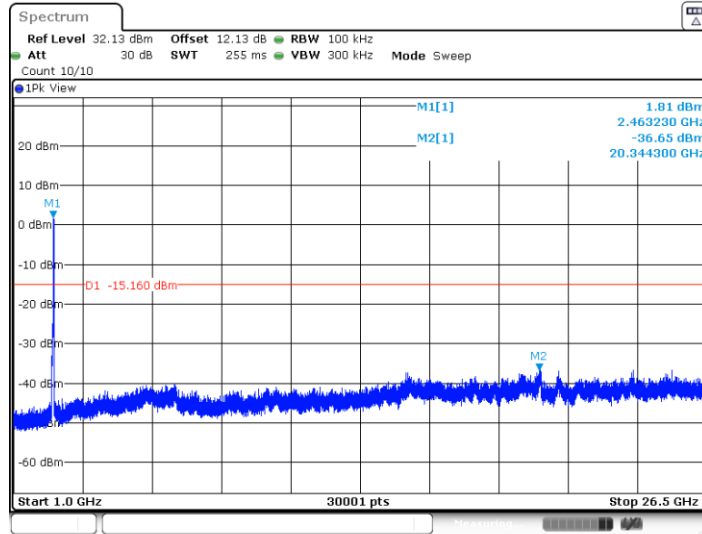


Date: 22.FEB.2024 19:39:20



11AX40MIMO_Ant9_2422_30~1000

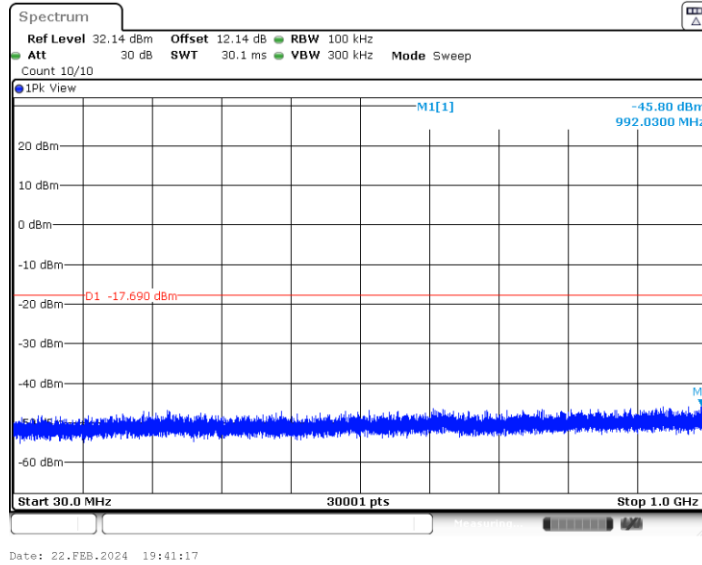


11AX40MIMO_Ant9_2422_1000~26500

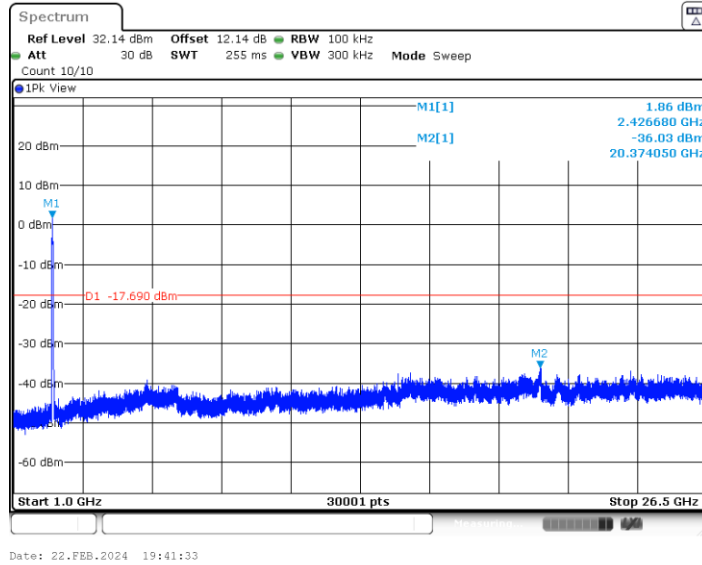




11AX40MIMO_Ant8_2422_30~1000

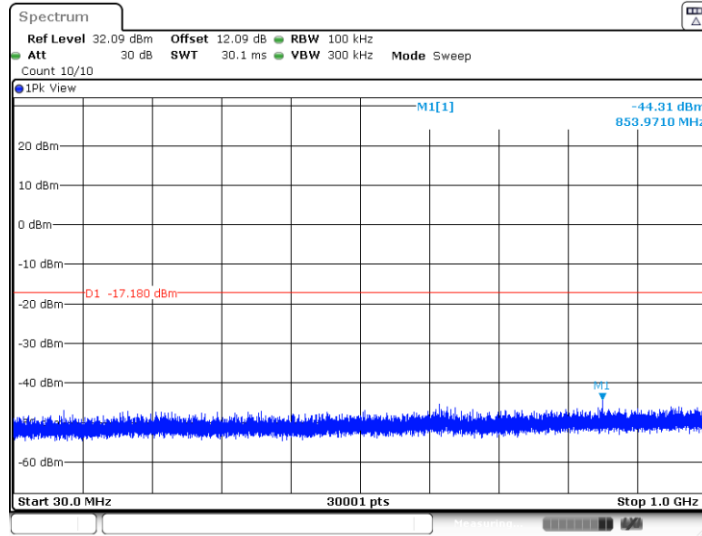

Date: 22.FEB.2024 19:42:55


11AX40MIMO_Ant8_2422_1000~26500

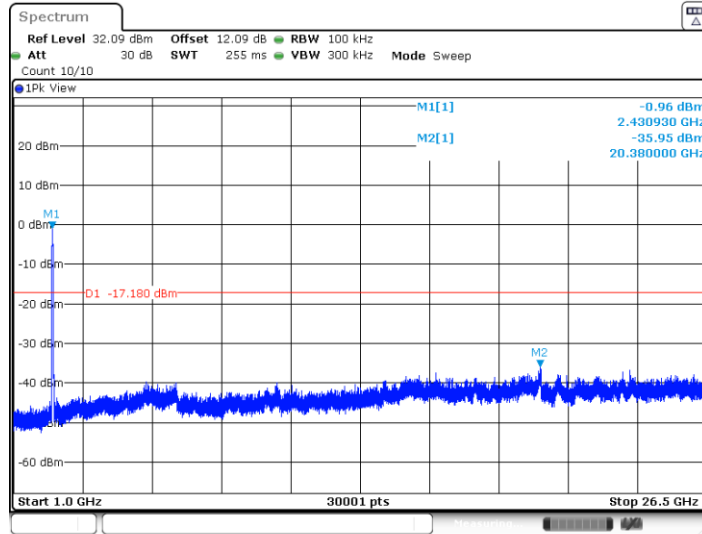

Date: 22.FEB.2024 19:43:10




11AX40MIMO_Ant9_2437_30~1000

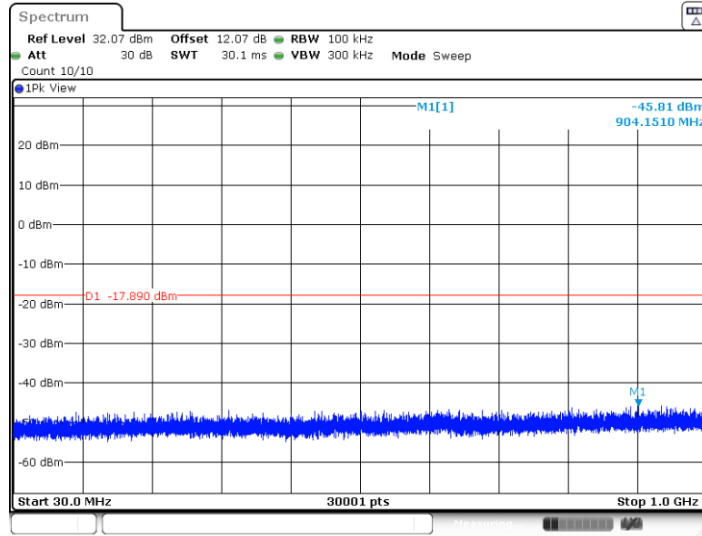

Date: 22.FEB.2024 19:44:55


11AX40MIMO_Ant9_2437_1000~26500

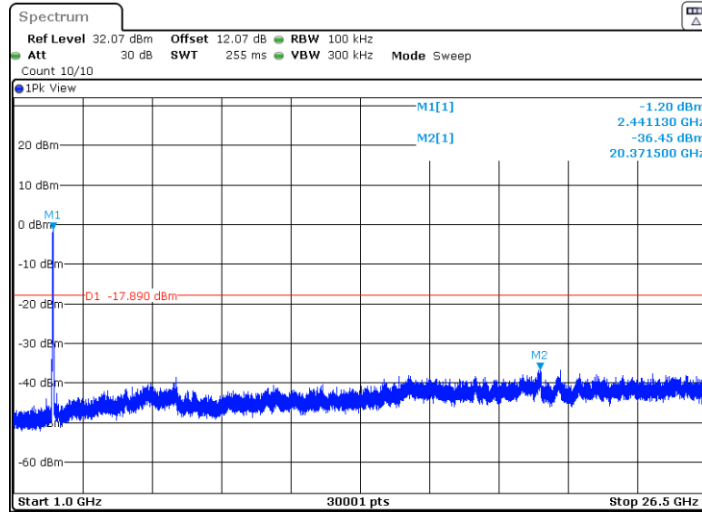

Date: 22.FEB.2024 19:45:10




11AX40MIMO_Ant8_2437_30~1000

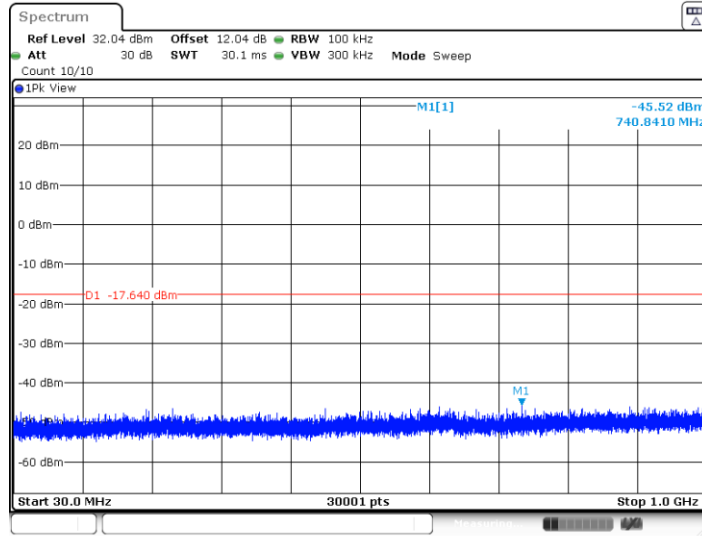

Date: 22.FEB.2024 19:46:14


11AX40MIMO_Ant8_2437_1000~26500

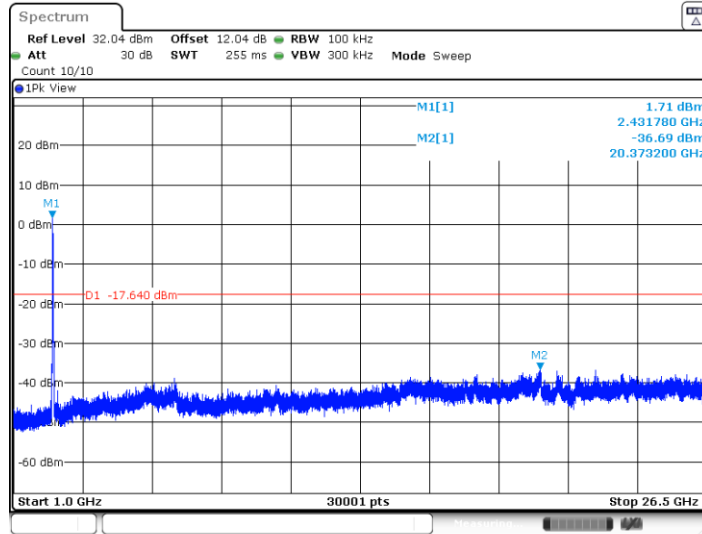

Date: 22.FEB.2024 19:46:29




11AX40MIMO_Ant9_2452_30~1000

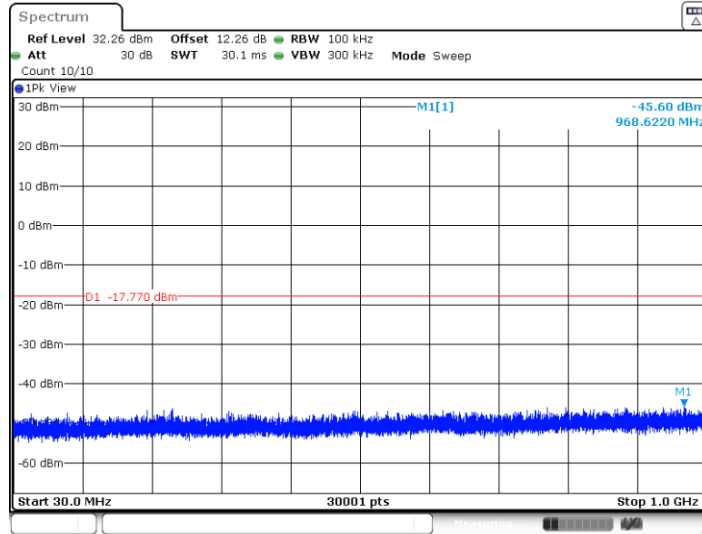

Date: 22.FEB.2024 19:48:26


11AX40MIMO_Ant9_2452_1000~26500

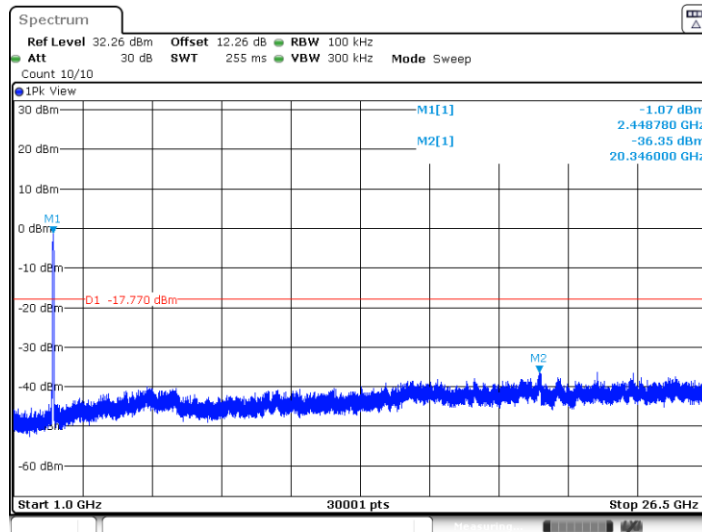

Date: 22.FEB.2024 19:48:42




11AX40MIMO_Ant8_2452_30~1000

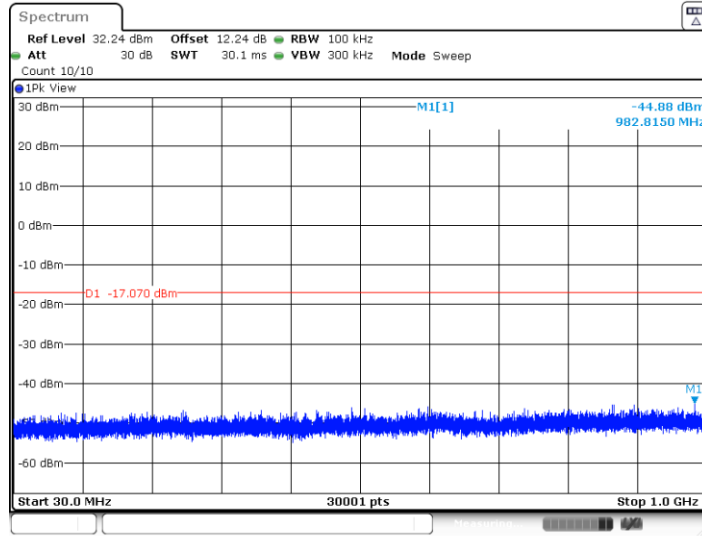

Date: 22.FEB.2024 19:50:02

11AX40MIMO_Ant8_2452_1000~26500

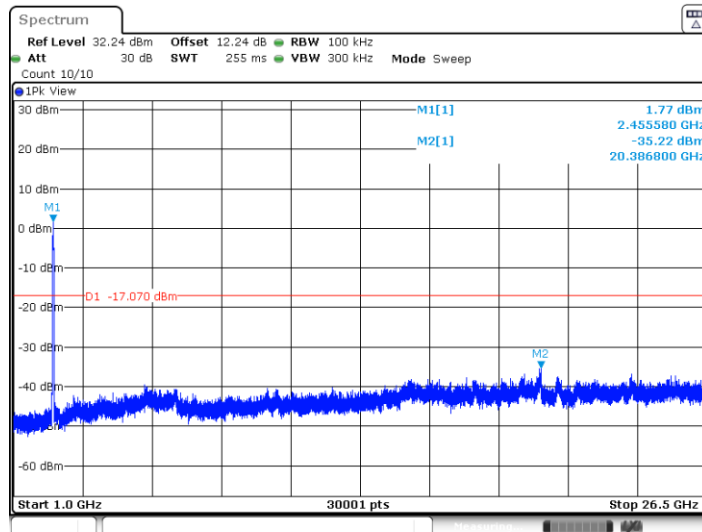

Date: 22.FEB.2024 19:50:17



For 11ax Partial RU


Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20MIMO	Ant9	2412	26Tone	RU0	-10.46	≤8.00	PASS
			52Tone	RU37	-10.62	≤8.00	PASS
			106Tone	RU53	-10.51	≤8.00	PASS
	Ant8	2412	26Tone	RU0	-10.58	≤8.00	PASS
			52Tone	RU37	-10.18	≤8.00	PASS
			106Tone	RU53	-10.26	≤8.00	PASS
	total	2412	26Tone	RU0	-7.51	≤8.00	PASS
			52Tone	RU37	-7.38	≤8.00	PASS
			106Tone	RU53	-7.37	≤8.00	PASS
	Ant9	2437	26Tone	RU0	-10.25	≤8.00	PASS
			52Tone	RU37	-10.01	≤8.00	PASS
			106Tone	RU53	-10.28	≤8.00	PASS
	Ant8	2437	26Tone	RU0	-10.39	≤8.00	PASS
			52Tone	RU37	-10.38	≤8.00	PASS
			106Tone	RU53	-10.70	≤8.00	PASS
	total	2437	26Tone	RU0	-7.31	≤8.00	PASS
			52Tone	RU37	-7.18	≤8.00	PASS
			106Tone	RU53	-7.47	≤8.00	PASS
	Ant9	2462	26Tone	RU8	-13.45	≤8.00	PASS
			52Tone	RU40	-13.46	≤8.00	PASS
			106Tone	RU54	-13.63	≤8.00	PASS
	Ant8	2462	26Tone	RU8	-13.35	≤8.00	PASS
			52Tone	RU40	-13.17	≤8.00	PASS
			106Tone	RU54	-13.57	≤8.00	PASS
	total	2462	26Tone	RU8	-10.39	≤8.00	PASS
			52Tone	RU40	-10.30	≤8.00	PASS
			106Tone	RU54	-10.59	≤8.00	PASS




Test Graphs

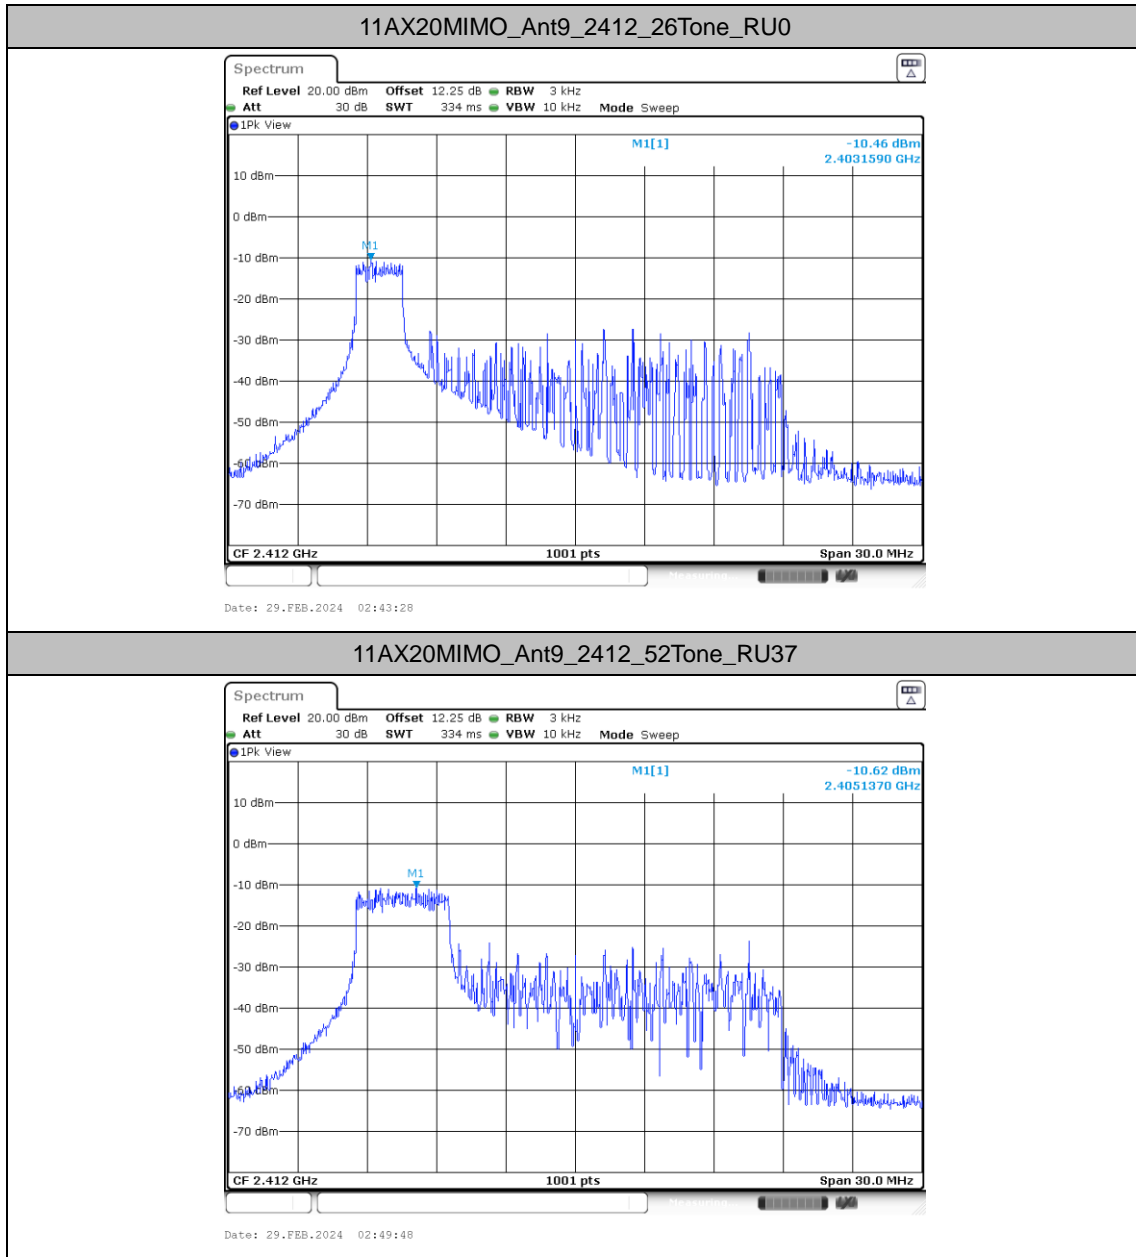




11AX20MIMO_Ant9_2412_106Tone_RU53

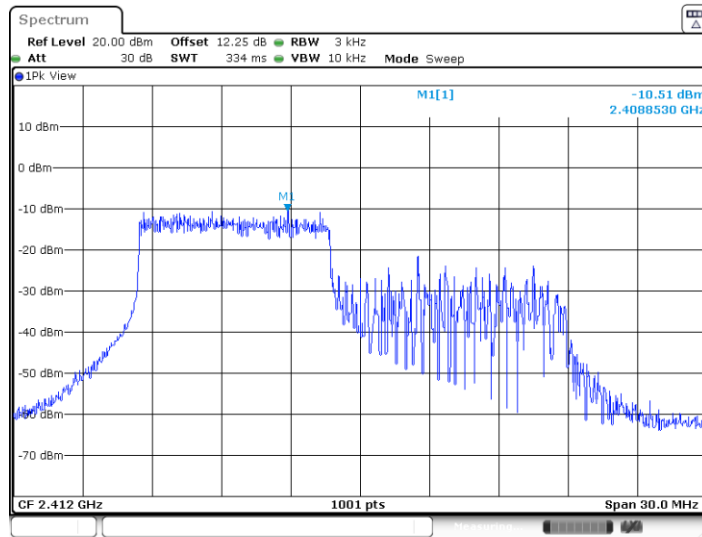


11AX20MIMO_Ant8_2412_26Tone_RU0

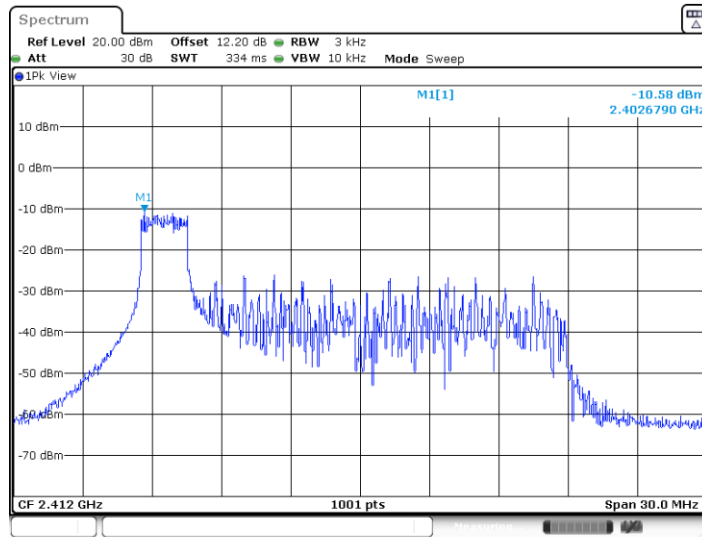




11AX20MIMO_Ant8_2412_52Tone_RU37

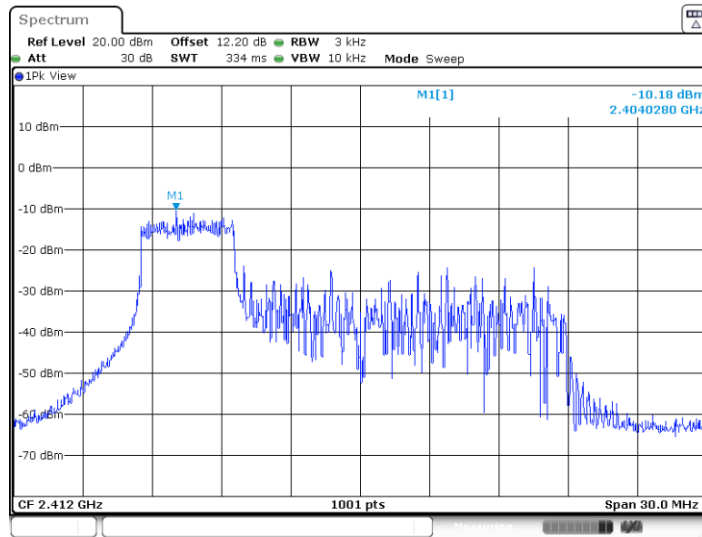


11AX20MIMO_Ant8_2412_106Tone_RU53

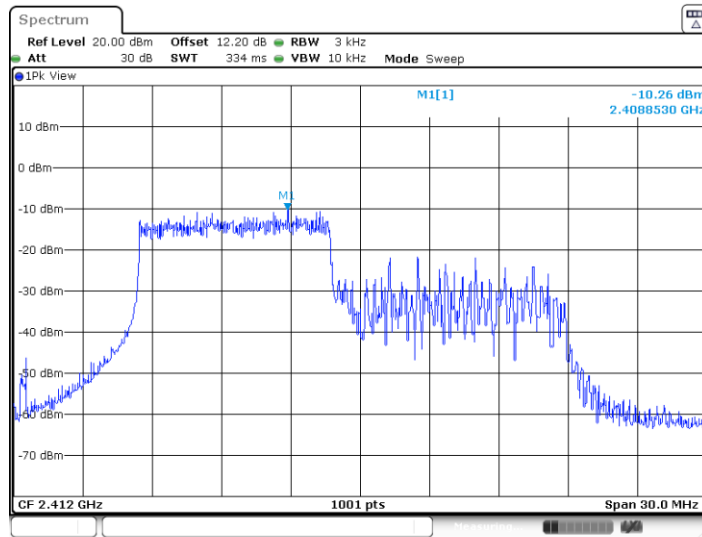




11AX20MIMO_Ant9_2437_26Tone_RU0

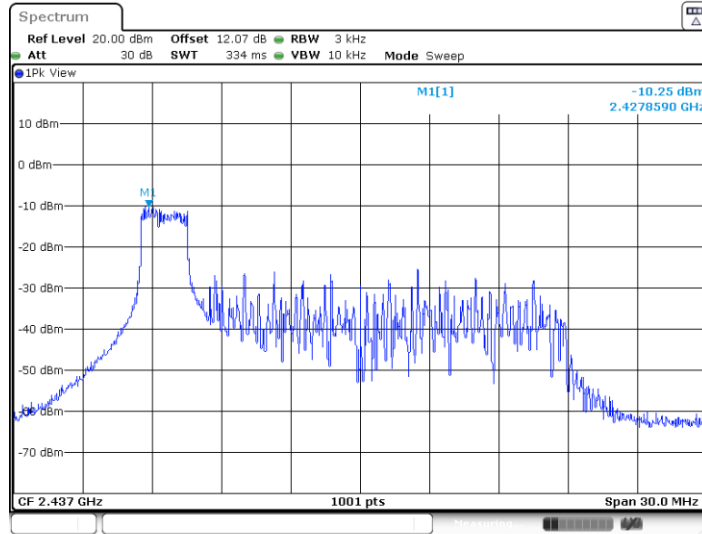

Date: 29.FEB.2024 03:01:18


11AX20MIMO_Ant9_2437_52Tone_RU37

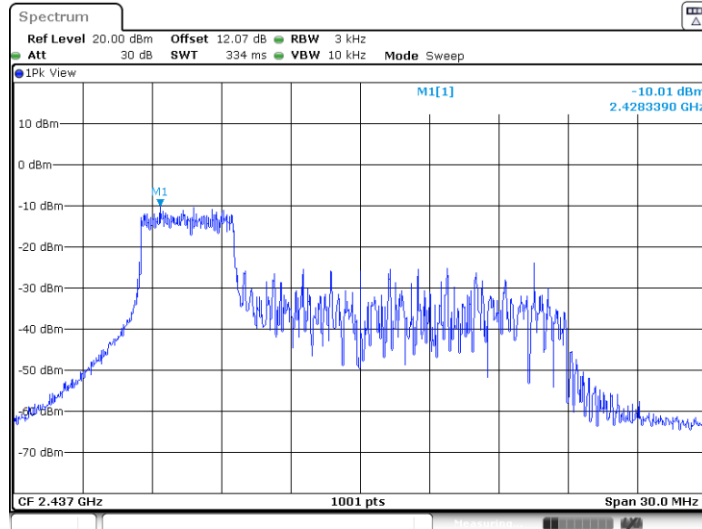

Date: 29.FEB.2024 03:02:38




11AX20MIMO_Ant9_2437_106Tone_RU53

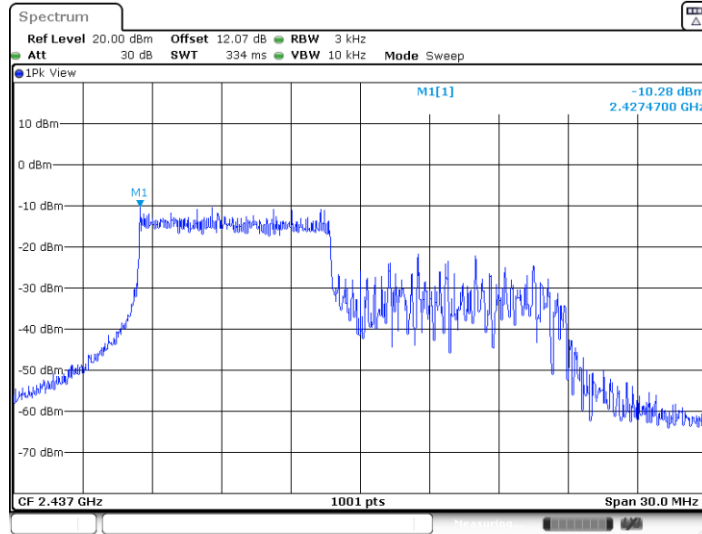

Date: 29.FEB.2024 03:06:21


11AX20MIMO_Ant8_2437_26Tone_RU0

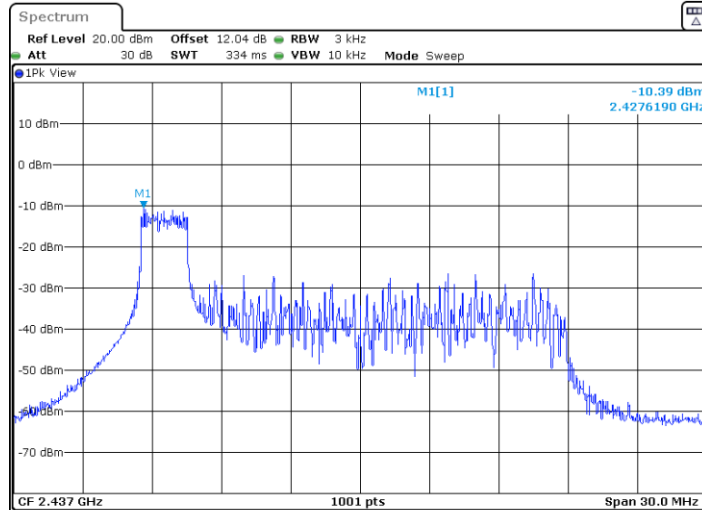


Date: 29.FEB.2024 03:01:58



11AX20MIMO_Ant8_2437_52Tone_RU37

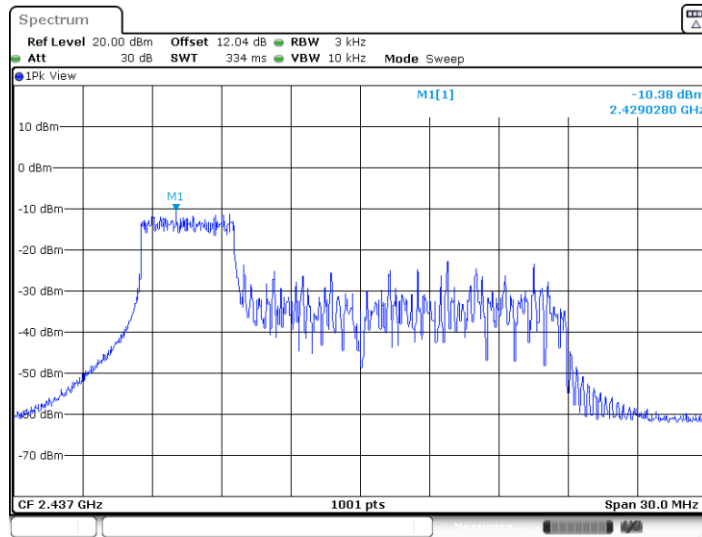


11AX20MIMO_Ant8_2437_106Tone_RU53

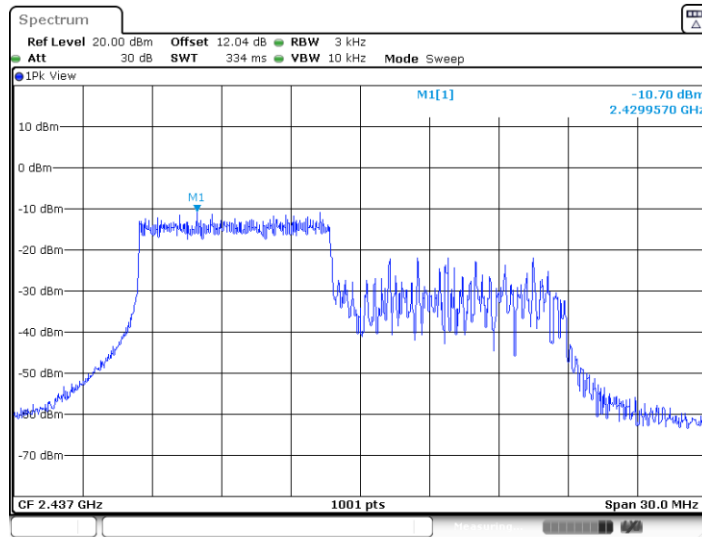




11AX20MIMO_Ant9_2462_26Tone_RU8

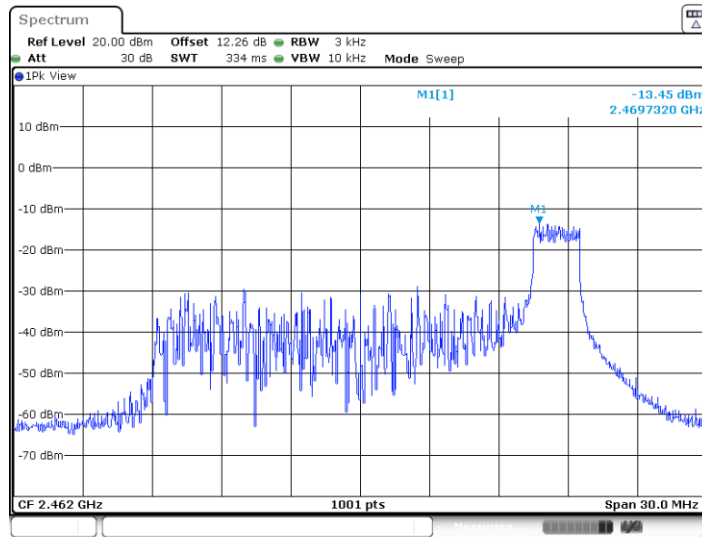


11AX20MIMO_Ant9_2462_52Tone_RU40

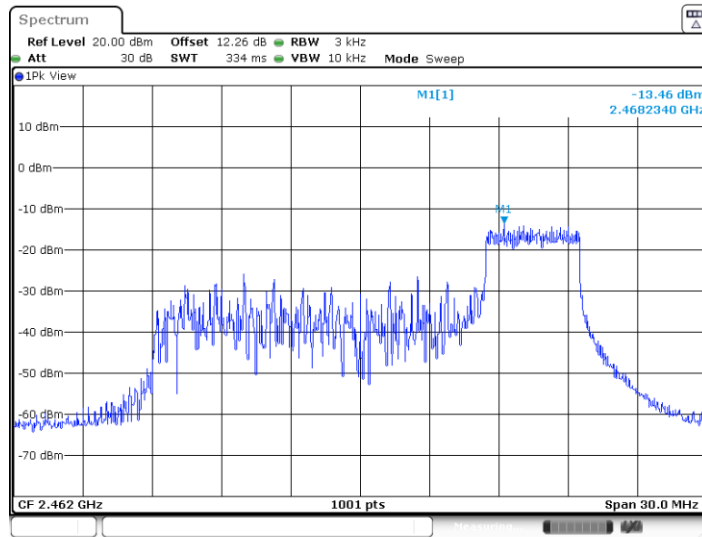




11AX20MIMO_Ant9_2462_106Tone_RU54

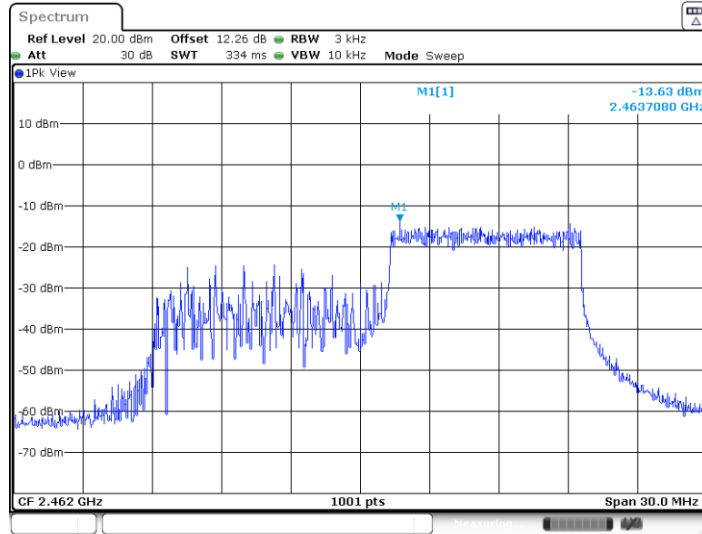


11AX20MIMO_Ant8_2462_26Tone_RU8

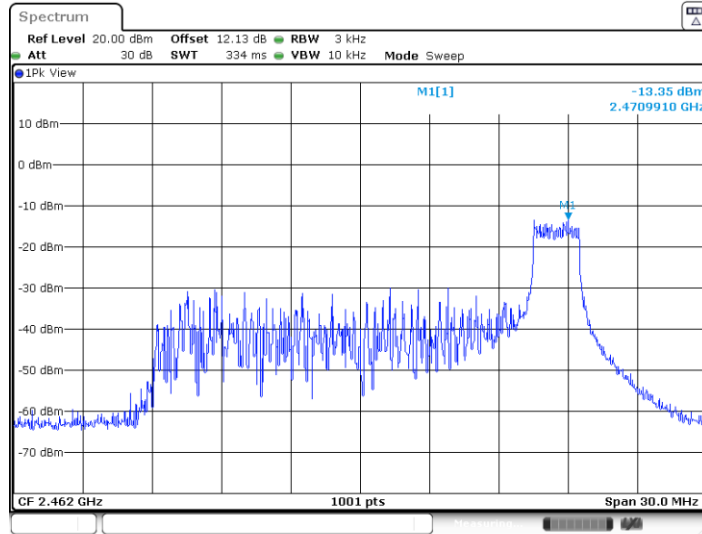




11AX20MIMO_Ant8_2462_52Tone_RU40

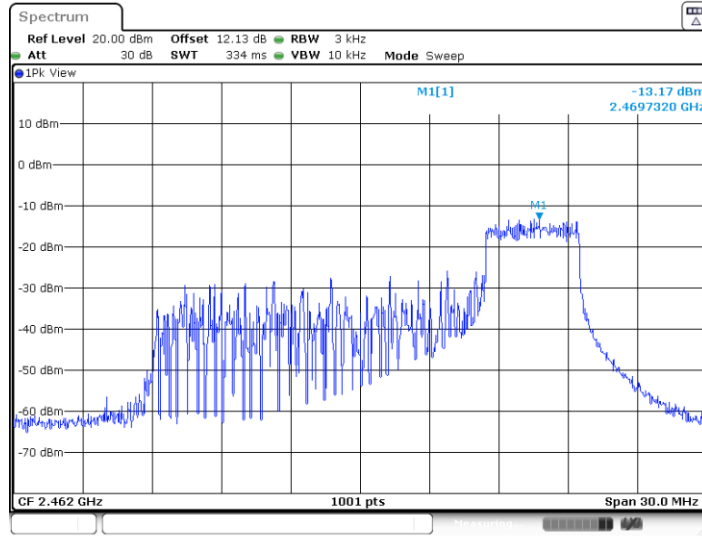


11AX20MIMO_Ant8_2462_106Tone_RU54

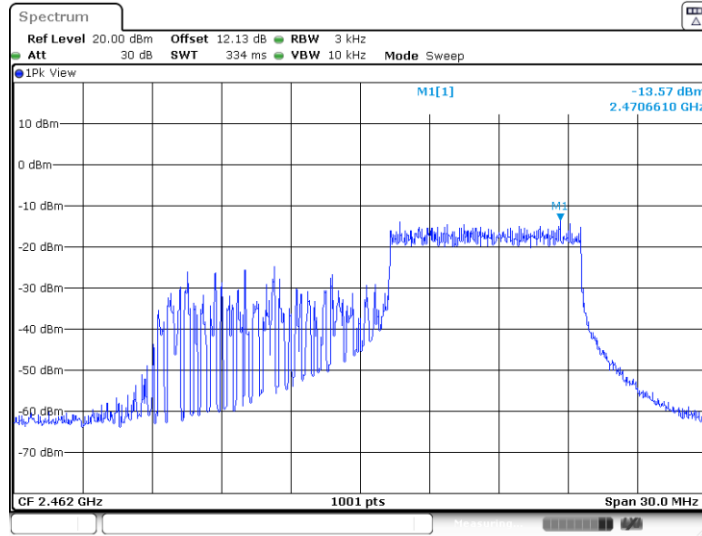



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

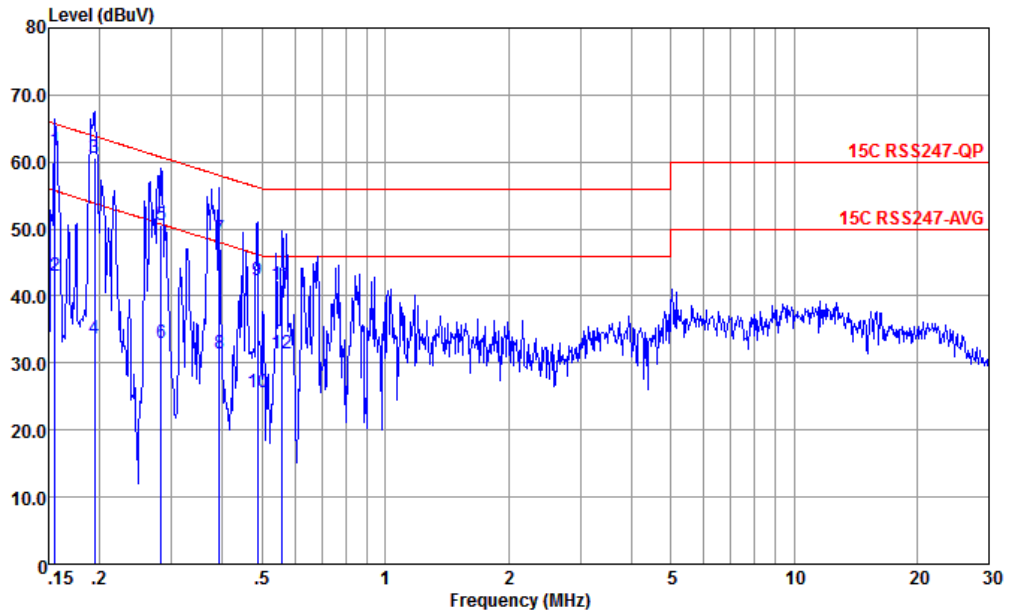


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	61.67	-4.02	65.69	51.20	0.05	10.42	QP
2	0.156	43.07	-12.62	55.69	32.60	0.05	10.42	Average
3 *	0.194	60.54	-3.30	63.84	50.10	0.03	10.41	QP
4	0.194	33.74	-20.10	53.84	23.30	0.03	10.41	Average
5	0.283	50.58	-10.14	60.72	40.20	0.04	10.34	QP
6	0.283	32.98	-17.74	50.72	22.60	0.04	10.34	Average
7	0.393	48.49	-9.50	57.99	38.21	0.00	10.28	QP
8	0.393	31.49	-16.50	47.99	21.21	0.00	10.28	Average
9	0.486	42.40	-13.83	56.23	32.20	-0.03	10.23	QP
10	0.486	25.70	-20.53	46.23	15.50	-0.03	10.23	Average
11	0.558	41.65	-14.35	56.00	31.50	-0.04	10.19	QP
12	0.558	31.35	-14.65	46.00	21.20	-0.04	10.19	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

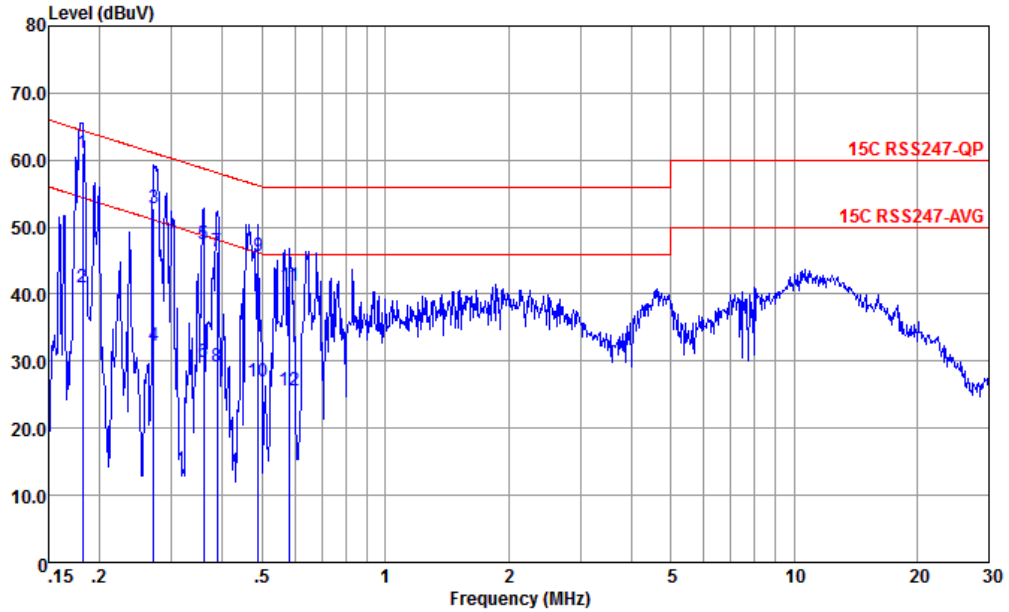

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.182	60.96	-3.46	64.42	50.50	0.05	10.41	QP
2	0.182	41.06	-13.36	54.42	30.60	0.05	10.41	Average
3	0.272	52.83	-8.24	61.07	42.50	-0.02	10.35	QP
4	0.272	32.23	-18.84	51.07	21.90	-0.02	10.35	Average
5	0.360	47.45	-11.29	58.74	37.20	-0.05	10.30	QP
6	0.360	29.85	-18.89	48.74	19.60	-0.05	10.30	Average
7	0.387	46.43	-11.69	58.12	36.20	-0.06	10.29	QP
8	0.387	29.12	-19.00	48.12	18.89	-0.06	10.29	Average
9	0.489	45.66	-10.53	56.19	35.50	-0.07	10.23	QP
10	0.489	26.96	-19.23	46.19	16.80	-0.07	10.23	Average
11	0.582	41.31	-14.69	56.00	31.20	-0.07	10.18	QP
12	0.582	25.61	-20.39	46.00	15.50	-0.07	10.18	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission

Test Engineer :	Koi Ji	Relative Humidity :	41 ~42%
		Temperature :	22~23℃

Radiated Spurious Emission Test Modes





Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	CDD 8+9	802.11b	01	2412	MCS0	-	-
Mode 2	2400-2483.5	CDD 8+9	802.11b	06	2437	MCS0	-	-
Mode 3	2400-2483.5	CDD 8+9	802.11b	11	2462	MCS0	-	-
Mode 4	2400-2483.5	CDD 8+9	802.11g	01	2412	MCS0	-	-
Mode 5	2400-2483.5	CDD 8+9	802.11g	06	2437	MCS0	-	-
Mode 6	2400-2483.5	CDD 8+9	802.11g	11	2462	MCS0	-	-
Mode 7	2400-2483.5	CDD 8+9	802.11ax HE20	01	2412	MCS0	Full	-
Mode 8	2400-2483.5	CDD 8+9	802.11ax HE20	06	2437	MCS0	Full	-
Mode 9	2400-2483.5	CDD 8+9	802.11ax HE20	11	2462	MCS0	Full	-
Mode 10	2400-2483.5	CDD 8+9	802.11ax HE20	01	2412	MCS0	Partial RU26/0	-
Mode 11	2400-2483.5	CDD 8+9	802.11ax HE20	01	2412	MCS0	Partial RU52/37	-
Mode 12	2400-2483.5	CDD 8+9	802.11ax HE20	01	2412	MCS0	Partial RU106/53	-
Mode 13	2400-2483.5	CDD 8+9	802.11ax HE20	11	2462	MCS0	Partial RU26/8	-
Mode 14	2400-2483.5	CDD 8+9	802.11ax HE20	11	2462	MCS0	Partial RU52/40	-
Mode 15	2400-2483.5	CDD 8+9	802.11ax HE20	11	2462	MCS0	Partial RU106/54	-
Mode 16	2400-2483.5	CDD 8+9	802.11ax HE40	03	2422	MCS0	-	-
Mode 17	2400-2483.5	CDD 8+9	802.11ax HE40	06	2437	MCS0	-	-
Mode 18	2400-2483.5	CDD 8+9	802.11ax HE40	09	2452	MCS0	-	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.30	44.23	54.00	-9.77	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	40.01	74.00	-33.99	V	PEAK	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	7311.00	43.26	74.00	-30.74	H	PEAK	Pass	Harmonic
3	802.11b	11	2483.50	44.91	54.00	-9.09	H	AVERAGE	Pass	Band Edge
3	802.11b	11	7386.00	44.92	54.00	-9.08	H	AVERAGE	Pass	Harmonic
4	802.11g	01	2389.95	50.19	54.00	-3.81	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	40.33	74.00	-33.67	H	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	45.30	74.00	-28.70	H	PEAK	Pass	Harmonic
6	802.11g	11	2484.46	50.34	54.00	-3.66	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	44.75	74.00	-29.25	H	PEAK	Pass	Harmonic
7	802.11ax HE20	01	2387.22	49.44	54.00	-4.56	H	AVERAGE	Pass	Band Edge
7	802.11ax HE20	01	4824.00	40.66	74.00	-33.34	V	PEAK	Pass	Harmonic
8	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
8	802.11ax HE20	06	7311.00	44.66	74.00	-29.34	H	PEAK	Pass	Harmonic
9	802.11ax HE20	11	2483.50	50.37	54.00	-3.63	H	AVERAGE	Pass	Band Edge
9	802.11ax HE20	11	7386.00	44.73	74.00	-29.27	V	PEAK	Pass	Harmonic
10	802.11ax HE20	01	2389.95	43.03	54.00	-10.97	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
11	802.11ax HE20	01	2389.17	42.89	54.00	-11.11	V	AVERAGE	Pass	Band Edge
11	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
12	802.11ax HE20	01	2389.82	66.34	74.00	-7.66	H	PEAK	Pass	Band Edge
12	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
13	802.11ax HE20	11	2483.68	42.85	54.00	-11.15	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
14	802.11ax HE20	11	2483.68	42.98	54.00	-11.02	H	AVERAGE	Pass	Band Edge
14	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	11	2483.74	42.88	54.00	-11.12	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
16	802.11ax HE40	03	2388.26	50.64	54.00	-3.36	H	AVERAGE	Pass	Band Edge
16	802.11ax HE40	03	7266.00	44.98	74.00	-29.02	V	PEAK	Pass	Harmonic
17	802.11ax HE40	06	2483.50	50.76	54.00	-3.24	H	AVERAGE	Pass	Band Edge
17	802.11ax HE40	06	7311.00	44.54	74.00	-29.46	H	PEAK	Pass	Harmonic
18	802.11ax HE40	09	2483.50	50.27	54.00	-3.73	V	AVERAGE	Pass	Band Edge
18	802.11ax HE40	09	7356.00	44.16	74.00	-29.84	V	PEAK	Pass	Harmonic

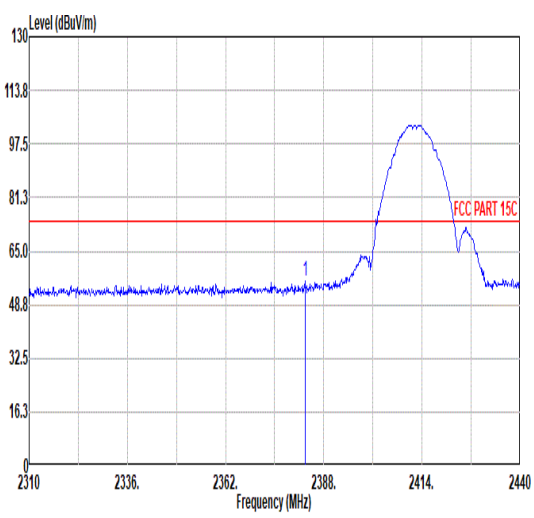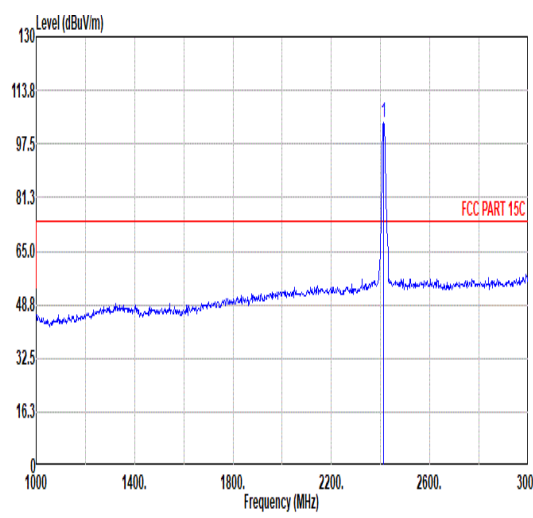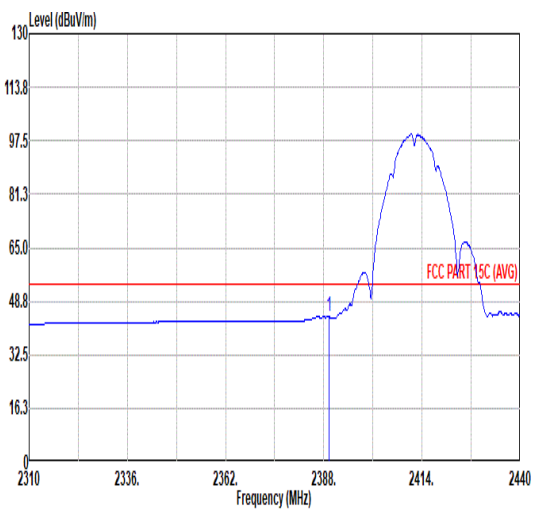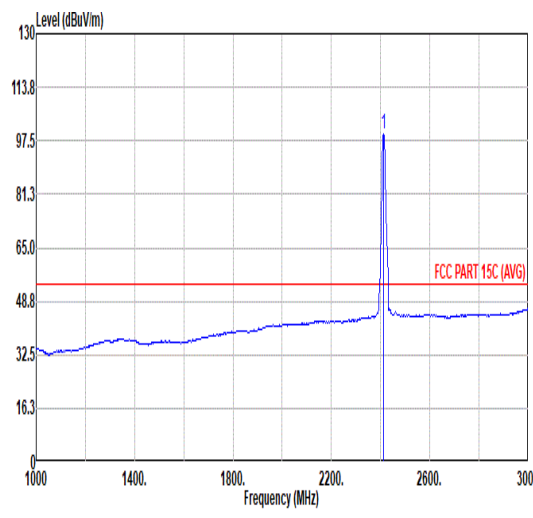

	1																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	CDD 8+9																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2440 MHz. A red horizontal line labeled 'FCC PART 15C' is at approximately 70 dBuV/m. A peak is observed at 2412 MHz, reaching approximately 100 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2383.06</td> <td>55.70</td> <td>74.00</td> <td>-18.30</td> <td>39.50</td> <td>32.37</td> <td>8.76</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>197</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2383.06	55.70	74.00	-18.30	39.50	32.37	8.76	30.93	6.00	100	197	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line labeled 'FCC PART 15C' is at approximately 70 dBuV/m. A sharp peak is observed at 2412 MHz, reaching approximately 100 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.88</td> <td>-----</td> <td>-----</td> <td>87.60</td> <td>32.40</td> <td>8.82</td> <td>30.94</td> <td>6.00</td> <td>100</td> <td>197</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	103.88	-----	-----	87.60	32.40	8.82	30.94	6.00	100	197	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2383.06	55.70	74.00	-18.30	39.50	32.37	8.76	30.93	6.00	100	197	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	103.88	-----	-----	87.60	32.40	8.82	30.94	6.00	100	197	PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization, averaged. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 2310 to 2440 MHz. A red horizontal line labeled 'FCC PART 15C (AVG)' is at approximately 55 dBuV/m. A peak is observed at 2412 MHz, reaching approximately 95 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.30</td> <td>44.23</td> <td>54.00</td> <td>-9.77</td> <td>28.01</td> <td>32.38</td> <td>8.77</td> <td>30.93</td> <td>6.00</td> <td>100</td> <td>197</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.30	44.23	54.00	-9.77	28.01	32.38	8.77	30.93	6.00	100	197	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, averaged. The y-axis ranges from 0 to 130 dBuV/m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line labeled 'FCC PART 15C (AVG)' is at approximately 55 dBuV/m. A sharp peak is observed at 2412 MHz, reaching approximately 95 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>99.41</td> <td>-----</td> <td>-----</td> <td>83.13</td> <td>32.40</td> <td>8.82</td> <td>30.94</td> <td>6.00</td> <td>100</td> <td>197</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	99.41	-----	-----	83.13	32.40	8.82	30.94	6.00	100	197	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.30	44.23	54.00	-9.77	28.01	32.38	8.77	30.93	6.00	100	197	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	99.41	-----	-----	83.13	32.40	8.82	30.94	6.00	100	197	AVERAGE																																																																								



	1																																																																									
Mode	Band Edge																																																																									
	2400-2483.5_802.11b_CH01_2412MHz																																																																									
ANT	CDD 8+9																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2356.80 55.44 74.00 -18.56 39.37 32.31 8.70 30.94 6.00 387 26 PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg	1 2356.80 55.44 74.00 -18.56 39.37 32.31 8.70 30.94 6.00 387 26 PEAK										<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 97.77 ----- 81.48 32.40 8.83 30.94 6.00 387 26 PEAK</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg	1 2412.00 97.77 ----- 81.48 32.40 8.83 30.94 6.00 387 26 PEAK									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg																																																																			
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																	
1 2356.80 55.44 74.00 -18.56 39.37 32.31 8.70 30.94 6.00 387 26 PEAK																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg																																																																			
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																	
1 2412.00 97.77 ----- 81.48 32.40 8.83 30.94 6.00 387 26 PEAK																																																																										
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2389.30 42.93 54.00 -11.07 26.71 32.38 8.77 30.93 6.00 387 26 AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg	1 2389.30 42.93 54.00 -11.07 26.71 32.38 8.77 30.93 6.00 387 26 AVERAGE										<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq Level Line Margin Level Factor Loss Factor Factor</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 2412.00 93.42 ----- 77.14 32.40 8.82 30.94 6.00 387 26 AVERAGE</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg	MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg	1 2412.00 93.42 ----- 77.14 32.40 8.82 30.94 6.00 387 26 AVERAGE									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																		
Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg																																																																			
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																	
1 2389.30 42.93 54.00 -11.07 26.71 32.38 8.77 30.93 6.00 387 26 AVERAGE																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																			
Freq Level Line Margin Level Factor Loss Factor Factor	Level	Factor	Loss	Factor	Factor	cm	deg																																																																			
MHz dBuV/m dBuV/m dB dB dB dB dB dB dB cm deg	dB	dB	dB	dB	dB	dB	dB	cm	deg																																																																	
1 2412.00 93.42 ----- 77.14 32.40 8.82 30.94 6.00 387 26 AVERAGE																																																																										







Mode	1																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	CDD 8+9																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.24</td> <td>39.94</td> <td>74.00</td> <td>-34.06</td> <td>58.96</td> <td>34.25</td> <td>12.38</td> <td>65.65</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	48.24	39.94	74.00	-34.06	58.96	34.25	12.38	65.65	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>48.24</td> <td>40.01</td> <td>74.00</td> <td>-33.99</td> <td>59.03</td> <td>34.25</td> <td>12.38</td> <td>65.65</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	48.24	40.01	74.00	-33.99	59.03	34.25	12.38	65.65	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	48.24	39.94	74.00	-34.06	58.96	34.25	12.38	65.65	0.00	--	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	48.24	40.01	74.00	-33.99	59.03	34.25	12.38	65.65	0.00	--	PEAK																																																																							







Mode	2																																																																																																										
	Harmonic																																																																																																										
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																										
ANT	CDD 8+9																																																																																																										
Pol.	Horizontal	Vertical																																																																																																									
Peak Avg																																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>40.62</td> <td>74.00</td> <td>-33.38</td> <td>59.89</td> <td>34.20</td> <td>12.09</td> <td>65.56</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.26</td> <td>74.00</td> <td>-30.74</td> <td>57.34</td> <td>35.00</td> <td>14.95</td> <td>64.83</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	40.62	74.00	-33.38	59.89	34.20	12.09	65.56	0.00	-- -- PEAK	2	7311.00	43.26	74.00	-30.74	57.34	35.00	14.95	64.83	0.00	-- -- PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.29</td> <td>74.00</td> <td>-32.71</td> <td>60.56</td> <td>34.20</td> <td>12.09</td> <td>65.56</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>43.25</td> <td>74.00</td> <td>-30.75</td> <td>57.33</td> <td>35.00</td> <td>14.95</td> <td>64.83</td> <td>0.00</td> <td>-- -- PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	4874.00	41.29	74.00	-32.71	60.56	34.20	12.09	65.56	0.00	-- -- PEAK	2	7311.00	43.25	74.00	-30.75	57.33	35.00	14.95	64.83	0.00
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	4874.00	40.62	74.00	-33.38	59.89	34.20	12.09	65.56	0.00	-- -- PEAK																																																																																																	
2	7311.00	43.26	74.00	-30.74	57.34	35.00	14.95	64.83	0.00	-- -- PEAK																																																																																																	
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor			cm	deg																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																	
1	4874.00	41.29	74.00	-32.71	60.56	34.20	12.09	65.56	0.00	-- -- PEAK																																																																																																	
2	7311.00	43.25	74.00	-30.75	57.33	35.00	14.95	64.83	0.00	-- -- PEAK																																																																																																	

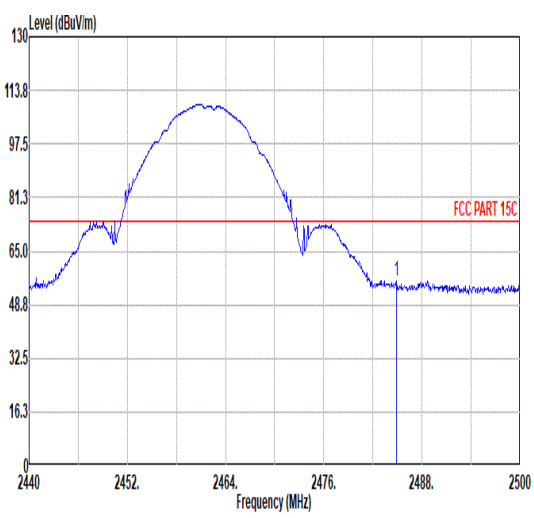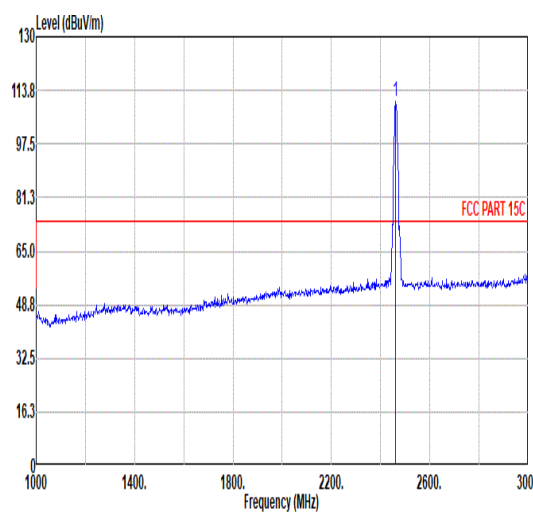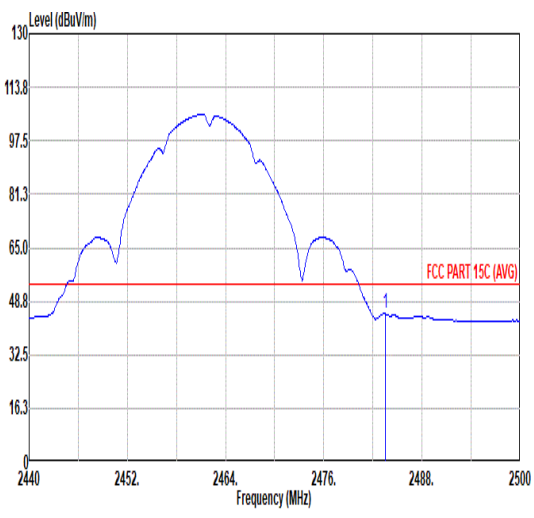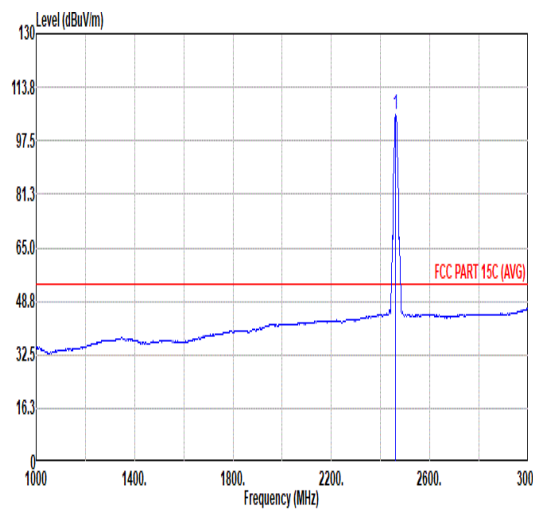

	3																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	CDD 8+9																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a broad signal between 2440 and 2500 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. A peak is marked at 2488 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.88</td> <td>55.95</td> <td>74.00</td> <td>-18.05</td> <td>39.64</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.88	55.95	74.00	-18.05	39.64	32.40	8.88	30.97	6.00	100	189	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a sharp peak at 2462 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>110.18</td> <td>-----</td> <td>-----</td> <td>93.85</td> <td>32.40</td> <td>8.89</td> <td>30.96</td> <td>6.00</td> <td>100</td> <td>189</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.18	-----	-----	93.85	32.40	8.89	30.96	6.00	100	189	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2484.88	55.95	74.00	-18.05	39.64	32.40	8.88	30.97	6.00	100	189	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	110.18	-----	-----	93.85	32.40	8.89	30.96	6.00	100	189	PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization, averaged. The plot shows a broad signal between 2440 and 2500 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. A peak is marked at 2488 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>44.91</td> <td>54.00</td> <td>-9.09</td> <td>28.60</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	44.91	54.00	-9.09	28.60	32.40	8.88	30.97	6.00	100	189	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization, averaged. The plot shows a sharp peak at 2462 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>105.67</td> <td>-----</td> <td>-----</td> <td>89.34</td> <td>32.40</td> <td>8.89</td> <td>30.96</td> <td>6.00</td> <td>100</td> <td>189</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	105.67	-----	-----	89.34	32.40	8.89	30.96	6.00	100	189	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.50	44.91	54.00	-9.09	28.60	32.40	8.88	30.97	6.00	100	189	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	105.67	-----	-----	89.34	32.40	8.89	30.96	6.00	100	189	AVERAGE																																																																								

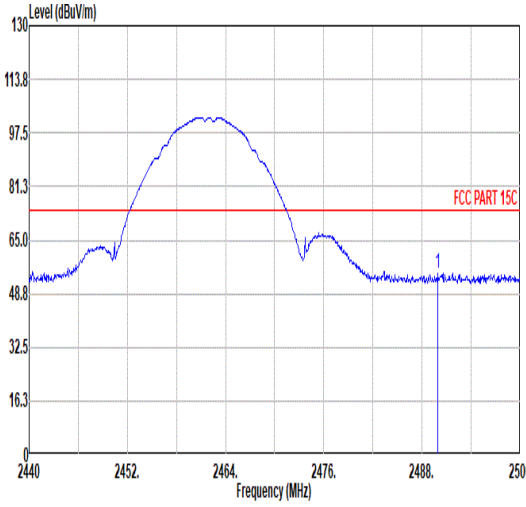
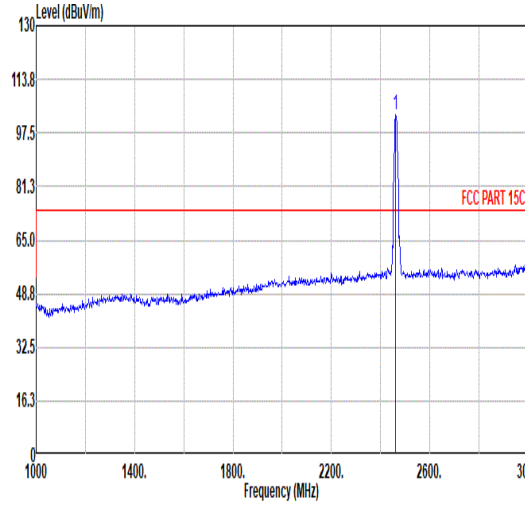
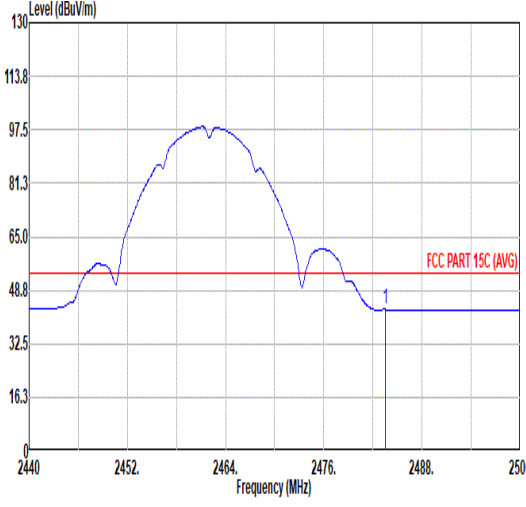
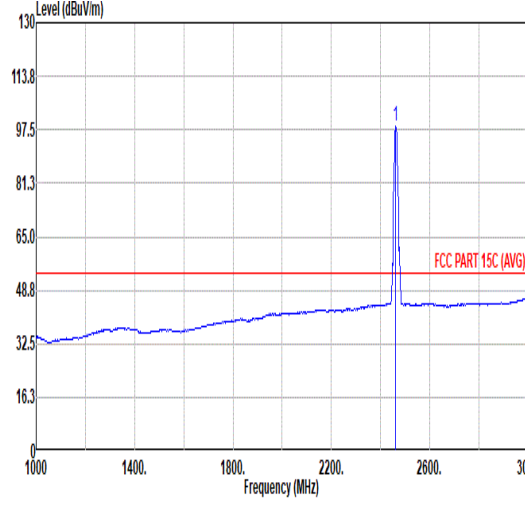


Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	CDD 8+9																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization. The plot shows a broad signal between 2440 and 2500 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 70 dBuV/m. A peak is observed at 2488.92 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2489.92</td> <td>54.90</td> <td>74.00</td> <td>-19.10</td> <td>38.59</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>215</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2489.92	54.90	74.00	-19.10	38.59	32.40	8.88	30.97	6.00	100	215	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a sharp peak at 2462.00 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 70 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>103.00</td> <td>-----</td> <td>-----</td> <td>86.67</td> <td>32.40</td> <td>8.89</td> <td>30.96</td> <td>6.00</td> <td>100</td> <td>215</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	103.00	-----	-----	86.67	32.40	8.89	30.96	6.00	100	215	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2489.92	54.90	74.00	-19.10	38.59	32.40	8.88	30.97	6.00	100	215	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	103.00	-----	-----	86.67	32.40	8.89	30.96	6.00	100	215	PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Vertical polarization, Average. The plot shows the average signal level. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 50 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>42.93</td> <td>54.00</td> <td>-11.07</td> <td>26.62</td> <td>32.40</td> <td>8.88</td> <td>30.97</td> <td>6.00</td> <td>100</td> <td>215</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	42.93	54.00	-11.07	26.62	32.40	8.88	30.97	6.00	100	215	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization, Average. The plot shows the average signal level. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 50 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>98.53</td> <td>-----</td> <td>-----</td> <td>82.20</td> <td>32.40</td> <td>8.89</td> <td>30.96</td> <td>6.00</td> <td>100</td> <td>215</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	98.53	-----	-----	82.20	32.40	8.89	30.96	6.00	100	215	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.50	42.93	54.00	-11.07	26.62	32.40	8.88	30.97	6.00	100	215	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	98.53	-----	-----	82.20	32.40	8.89	30.96	6.00	100	215	AVERAGE																																																																								



Mode	3																																																																																																																										
	Harmonic																																																																																																																										
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																																										
ANT	CDD 8+9																																																																																																																										
Pol.	Horizontal	Vertical																																																																																																																									
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>42.73</td> <td>74.00</td> <td>-31.27</td> <td>61.94</td> <td>34.25</td> <td>12.00</td> <td>65.46</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>50.22</td> <td>74.00</td> <td>-23.78</td> <td>64.59</td> <td>35.80</td> <td>14.87</td> <td>65.04</td> <td>0.00</td> <td>100</td> <td>110</td> <td>PEAK</td> </tr> <tr> <td>3</td> <td>7386.00</td> <td>44.92</td> <td>54.00</td> <td>-9.08</td> <td>59.29</td> <td>35.00</td> <td>14.87</td> <td>65.04</td> <td>0.00</td> <td>100</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	42.73	74.00	-31.27	61.94	34.25	12.00	65.46	0.00	--	--	PEAK	2	7386.00	50.22	74.00	-23.78	64.59	35.80	14.87	65.04	0.00	100	110	PEAK	3	7386.00	44.92	54.00	-9.08	59.29	35.00	14.87	65.04	0.00	100	110	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.00</td> <td>74.00</td> <td>-33.00</td> <td>60.21</td> <td>34.25</td> <td>12.00</td> <td>65.46</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>44.74</td> <td>74.00</td> <td>-29.26</td> <td>59.11</td> <td>35.80</td> <td>14.87</td> <td>65.04</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4924.00	41.00	74.00	-33.00	60.21	34.25	12.00	65.46	0.00	--	--	PEAK	2	7386.00	44.74	74.00	-29.26	59.11	35.80	14.87	65.04	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4924.00	42.73	74.00	-31.27	61.94	34.25	12.00	65.46	0.00	--	--	PEAK																																																																																																															
2	7386.00	50.22	74.00	-23.78	64.59	35.80	14.87	65.04	0.00	100	110	PEAK																																																																																																															
3	7386.00	44.92	54.00	-9.08	59.29	35.00	14.87	65.04	0.00	100	110	AVERAGE																																																																																																															
Limit	Read	Ant	Cable	Preamp	Aux	Apos	TPos	Remark																																																																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																		
1	4924.00	41.00	74.00	-33.00	60.21	34.25	12.00	65.46	0.00	--	--	PEAK																																																																																																															
2	7386.00	44.74	74.00	-29.26	59.11	35.80	14.87	65.04	0.00	--	--	PEAK																																																																																																															

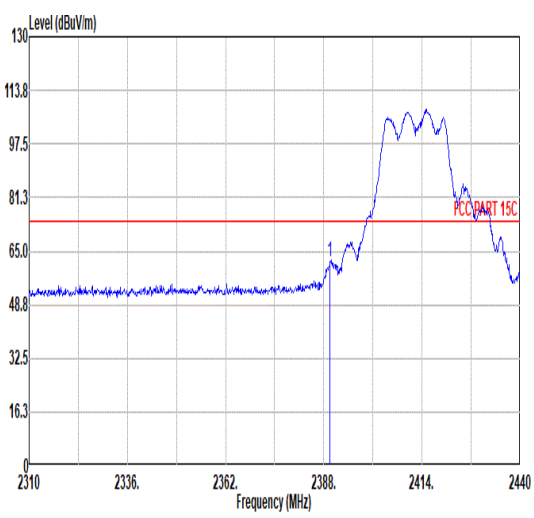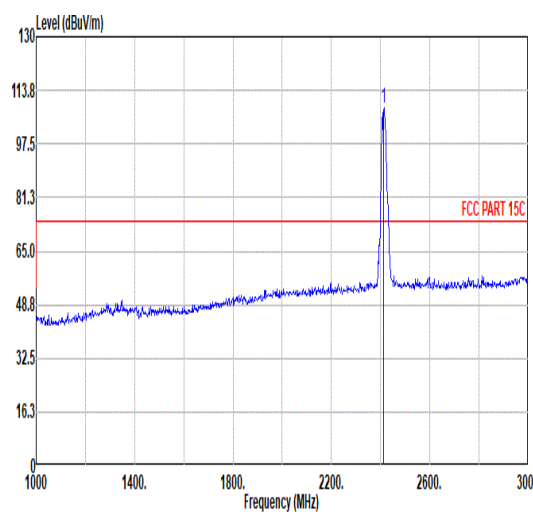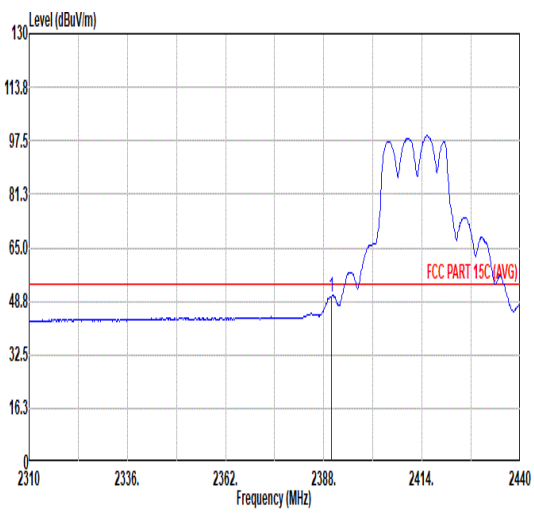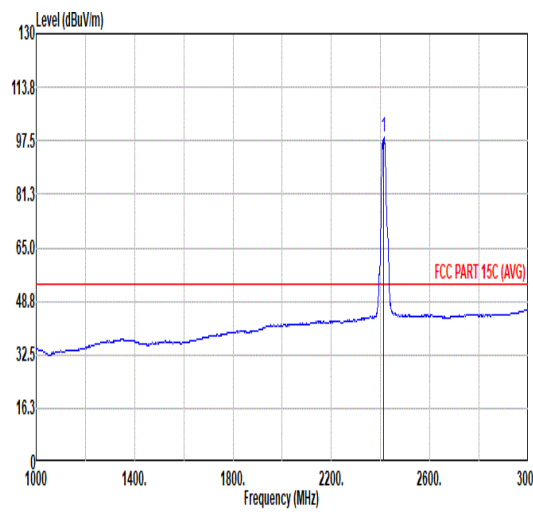

	4																																																																															
Mode	Band Edge																																																																															
	2400-2483.5_802.11g_CH01_2412MHz																																																																															
ANT	CDD 8+9																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal between 2388 and 2440 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. The signal peaks at approximately 100 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.69</td> <td>61.66</td> <td>74.00</td> <td>-12.34</td> <td>45.43</td> <td>32.38</td> <td>8.78</td> <td>30.93</td> <td>6.00</td> <td>124</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.69	61.66	74.00	-12.34	45.43	32.38	8.78	30.93	6.00	124	340	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal between 2400 and 3000 MHz. A red horizontal line indicates the FCC PART 15C limit at approximately 74 dBuV/m. The signal peaks at approximately 100 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>108.31</td> <td>-----</td> <td>-----</td> <td>92.02</td> <td>32.40</td> <td>8.83</td> <td>30.94</td> <td>6.00</td> <td>124</td> <td>340</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	108.31	-----	-----	92.02	32.40	8.83	30.94	6.00	124	340	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.69	61.66	74.00	-12.34	45.43	32.38	8.78	30.93	6.00	124	340	PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	108.31	-----	-----	92.02	32.40	8.83	30.94	6.00	124	340	PEAK																																																																				
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal between 2388 and 2440 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. The signal peaks at approximately 98 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>50.19</td> <td>54.00</td> <td>-3.81</td> <td>33.96</td> <td>32.38</td> <td>8.78</td> <td>30.93</td> <td>6.00</td> <td>124</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	50.19	54.00	-3.81	33.96	32.38	8.78	30.93	6.00	124	340	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal between 2400 and 3000 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at approximately 54 dBuV/m. The signal peaks at approximately 98 dBuV/m.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.45</td> <td>-----</td> <td>-----</td> <td>82.16</td> <td>32.40</td> <td>8.83</td> <td>30.94</td> <td>6.00</td> <td>124</td> <td>340</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.45	-----	-----	82.16	32.40	8.83	30.94	6.00	124	340	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2389.95	50.19	54.00	-3.81	33.96	32.38	8.78	30.93	6.00	124	340	AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Remark																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																							
1	2412.00	98.45	-----	-----	82.16	32.40	8.83	30.94	6.00	124	340	AVERAGE																																																																				



	4																																																																																			
Mode	Band Edge																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																			
ANT	CDD 8+9																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>61.12</td> <td>74.00</td> <td>-12.88</td> <td>44.89</td> <td>32.38</td> <td>8.78</td> <td>30.93</td> <td>6.00</td> <td>389</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	61.12	74.00	-12.88	44.89	32.38	8.78	30.93	6.00	389	47	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>107.58</td> <td>-----</td> <td>-----</td> <td>91.29</td> <td>32.40</td> <td>8.83</td> <td>30.94</td> <td>6.00</td> <td>389</td> <td>47</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	107.58	-----	-----	91.29	32.40	8.83	30.94	6.00	389	47	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	61.12	74.00	-12.88	44.89	32.38	8.78	30.93	6.00	389	47	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	107.58	-----	-----	91.29	32.40	8.83	30.94	6.00	389	47	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>49.21</td> <td>54.00</td> <td>-4.79</td> <td>32.98</td> <td>32.38</td> <td>8.78</td> <td>30.93</td> <td>6.00</td> <td>389</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.21	54.00	-4.79	32.98	32.38	8.78	30.93	6.00	389	47	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>98.47</td> <td>-----</td> <td>-----</td> <td>82.18</td> <td>32.40</td> <td>8.83</td> <td>30.94</td> <td>6.00</td> <td>389</td> <td>47</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	98.47	-----	-----	82.18	32.40	8.83	30.94	6.00	389	47	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	49.21	54.00	-4.79	32.98	32.38	8.78	30.93	6.00	389	47	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	98.47	-----	-----	82.18	32.40	8.83	30.94	6.00	389	47	AVERAGE																																																																								