





11AX20MIMO_Ant16_2437

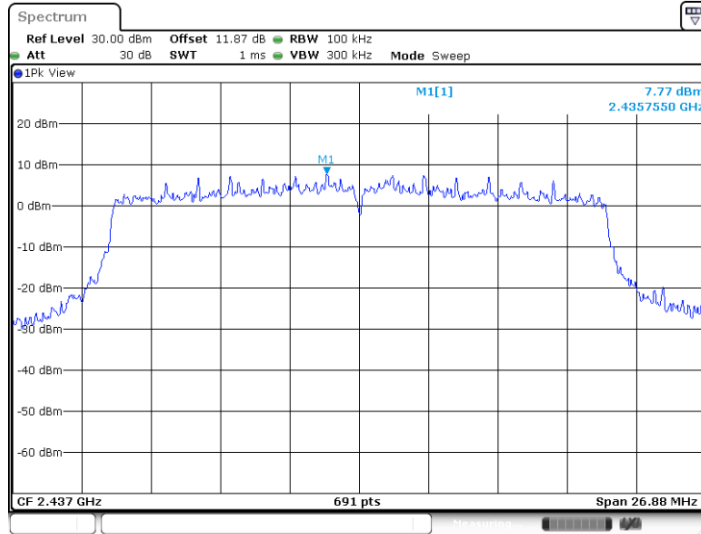

Date: 6 MAY 2024 19:11:15


11AX20MIMO_Ant7_2437

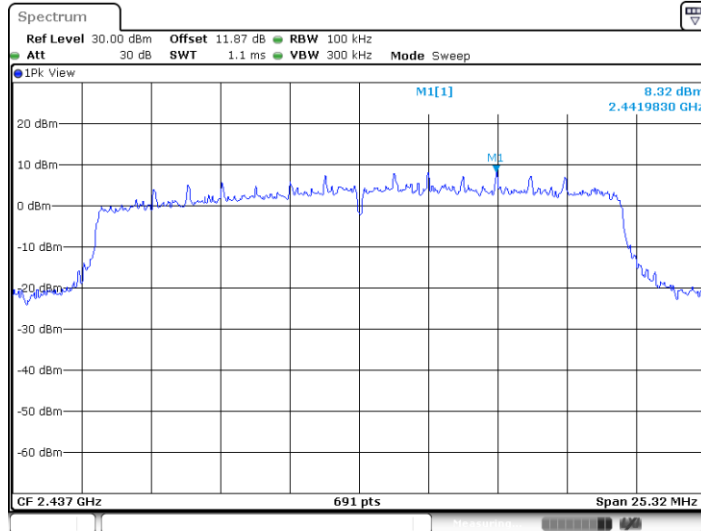

Date: 6 MAY 2024 19:12:10




11AX20MIMO_Ant16_2462

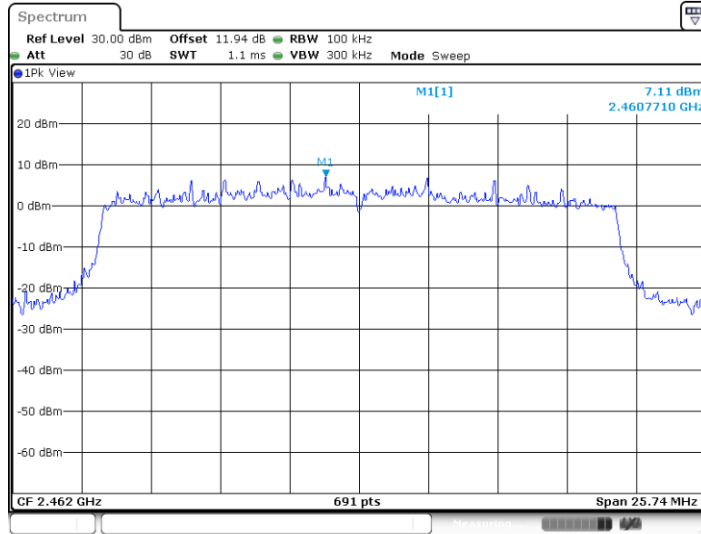

Date: 6 MAY 2024 18:56:12


11AX20MIMO_Ant7_2462

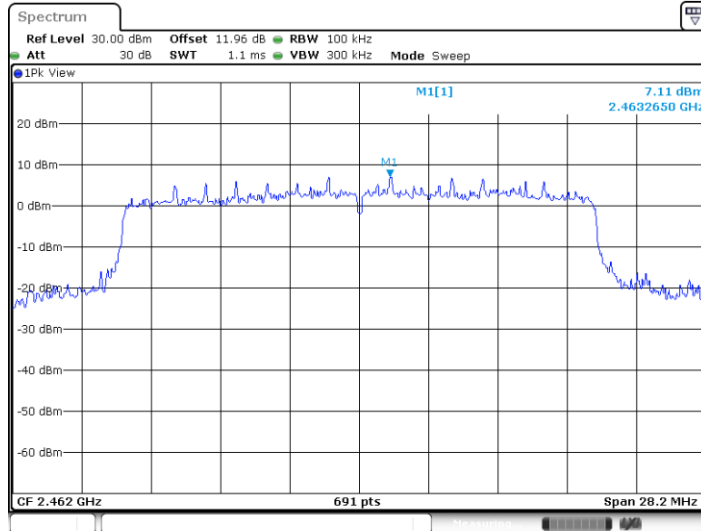

Date: 6 MAY 2024 18:57:19




11AX40MIMO_Ant16_2422

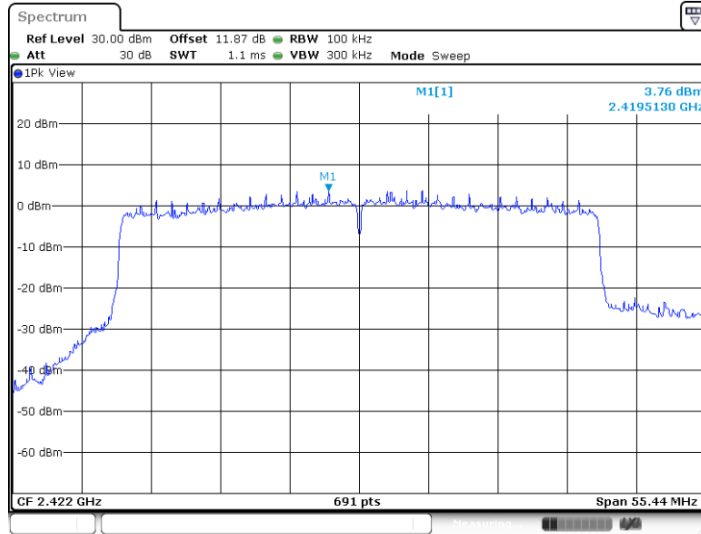

Date: 6 MAY 2024 18:58:56


11AX40MIMO_Ant7_2422

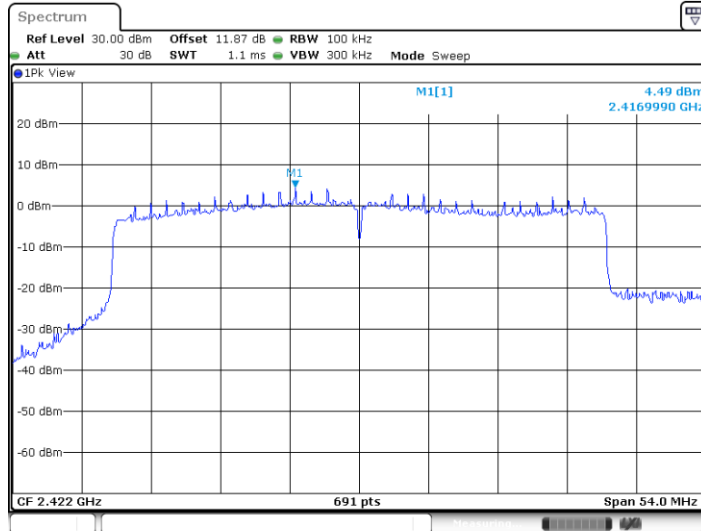

Date: 6 MAY 2024 19:00:02




11AX40MIMO_Ant16_2437

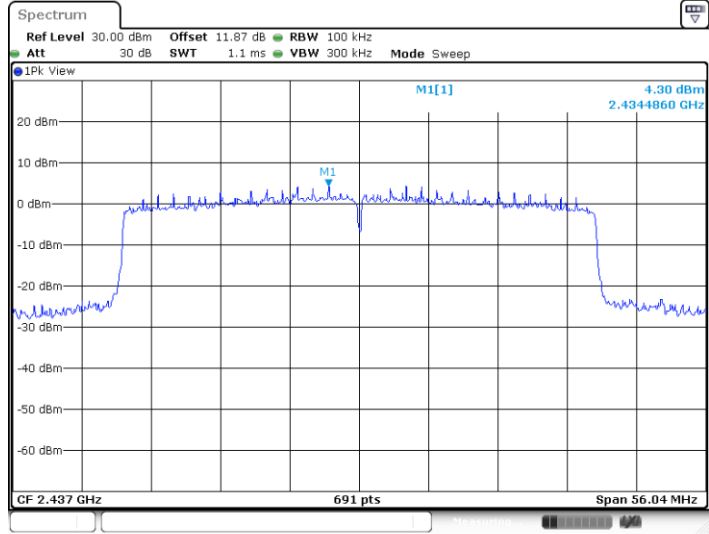

Date: 6 MAY 2024 19:01:48


11AX40MIMO_Ant7_2437

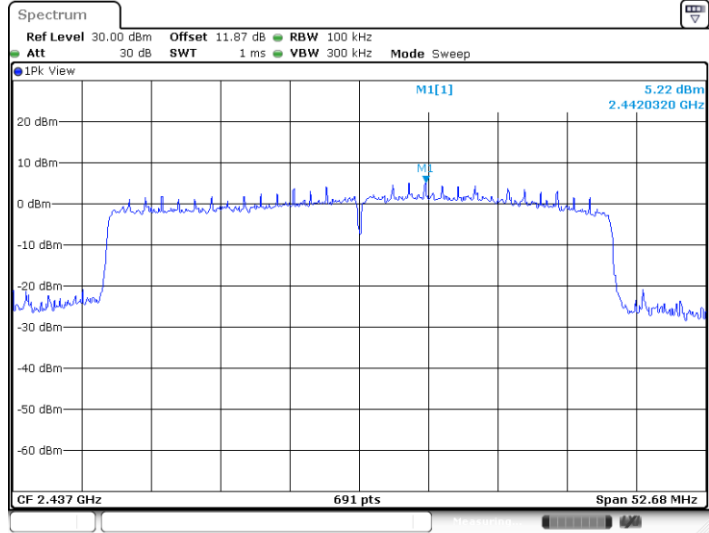

Date: 6 MAY 2024 19:02:44




11AX40MIMO_Ant16_2452

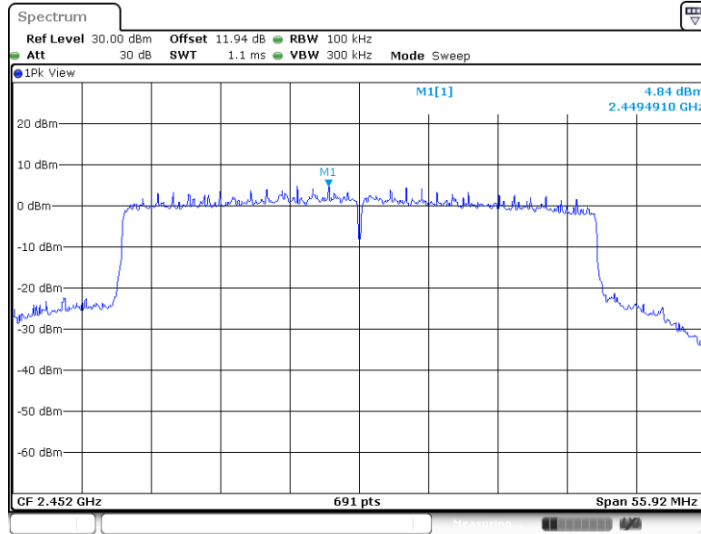

Date: 6 MAY 2024 19:03:57

11AX40MIMO_Ant7_2452

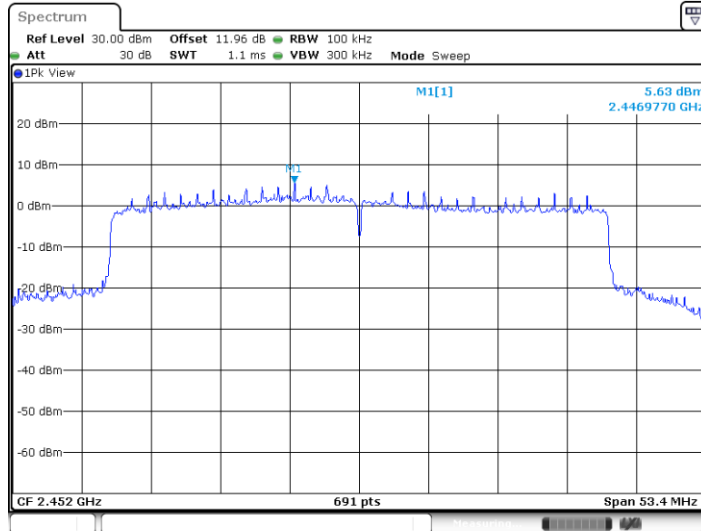

Date: 6 MAY 2024 19:05:03





Band edge measurements


Test Result


TestMode	Antenna	Channel Name	Freq(MHz)	RefLevel[dBm/100KHz]	Result[dBm/100KHz]	Limit[dBm/100KHz]	Verdict
11B-CDD	Ant16	Low	2412	10.85	-39.07	≤-9.15	PASS
	Ant7	Low	2412	10.73	-29.95	≤-9.27	PASS
	Ant16	High	2462	10.26	-45.69	≤-9.74	PASS
	Ant7	High	2462	10.55	-44.62	≤-9.45	PASS
11G-CDD	Ant16	Low	2412	8.37	-31.17	≤-11.63	PASS
	Ant7	Low	2412	8.68	-30.32	≤-11.32	PASS
	Ant16	High	2462	7.86	-44.6	≤-12.14	PASS
	Ant7	High	2462	7.78	-32.19	≤-12.22	PASS
11AX20MI MO	Ant16	Low	2412	7.72	-26.97	≤-12.28	PASS
	Ant7	Low	2412	8.19	-24.49	≤-11.81	PASS
	Ant16	High	2462	7.11	-42.12	≤-12.89	PASS
	Ant7	High	2462	7.11	-28.86	≤-12.89	PASS
11AX40MI MO	Ant16	Low	2422	3.76	-31.3	≤-16.24	PASS
	Ant7	Low	2422	4.49	-29.86	≤-15.51	PASS
	Ant16	High	2452	4.84	-40.21	≤-15.16	PASS
	Ant7	High	2452	5.63	-30.21	≤-14.37	PASS





Test Graphs

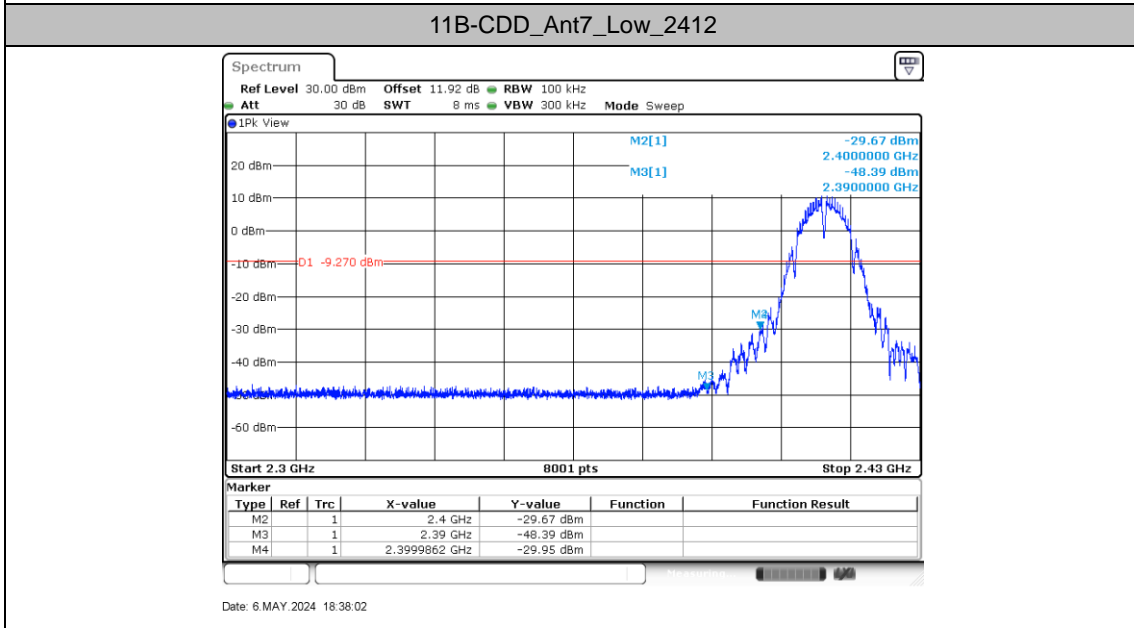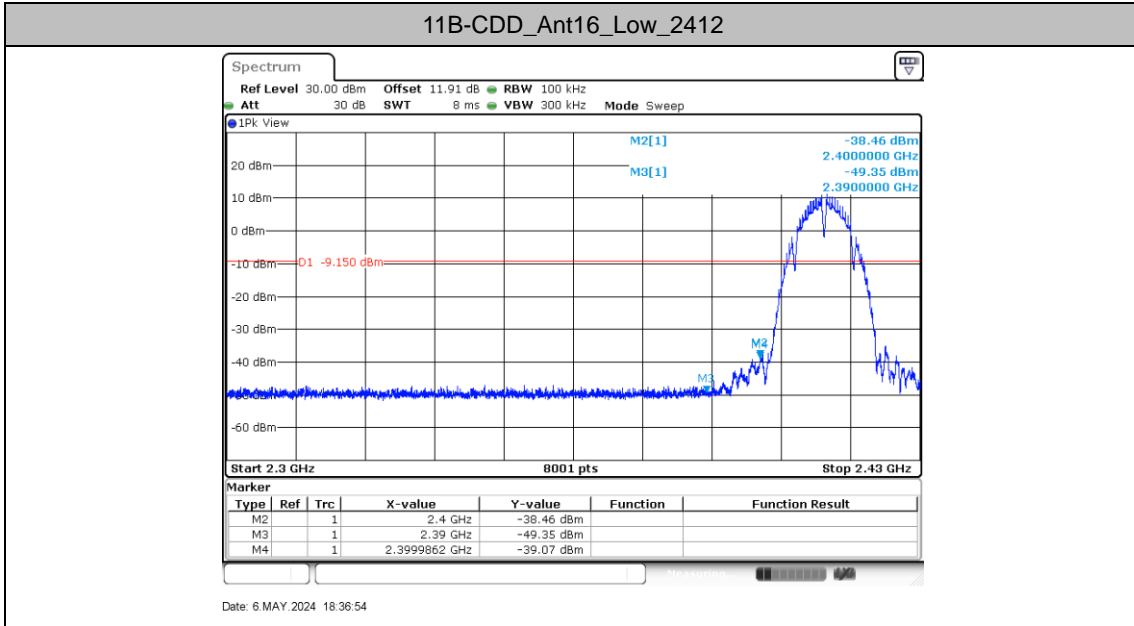



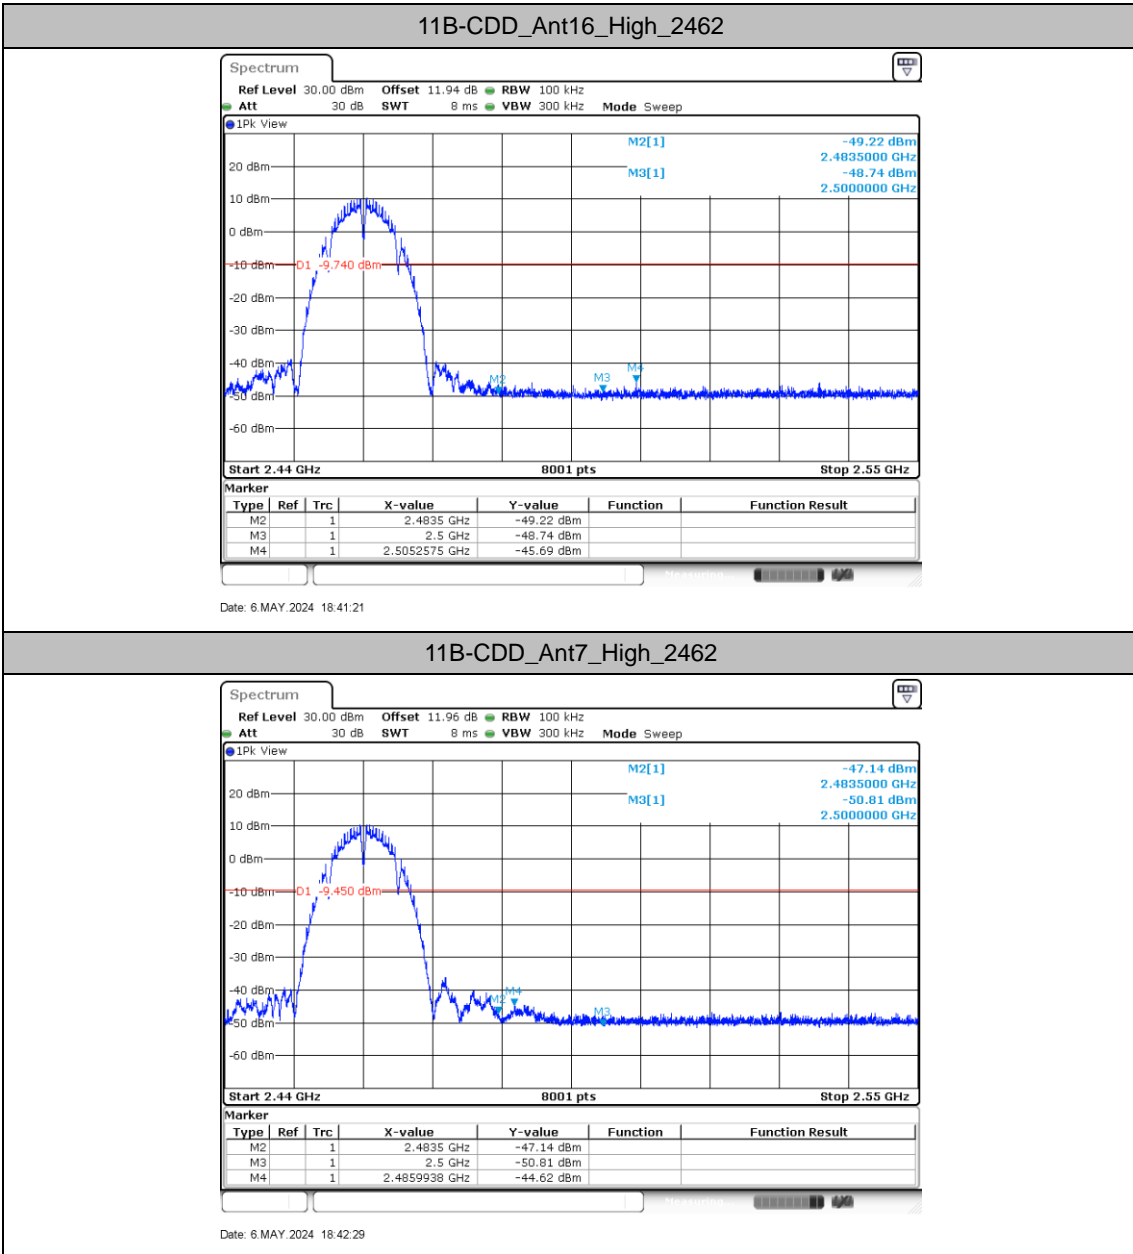


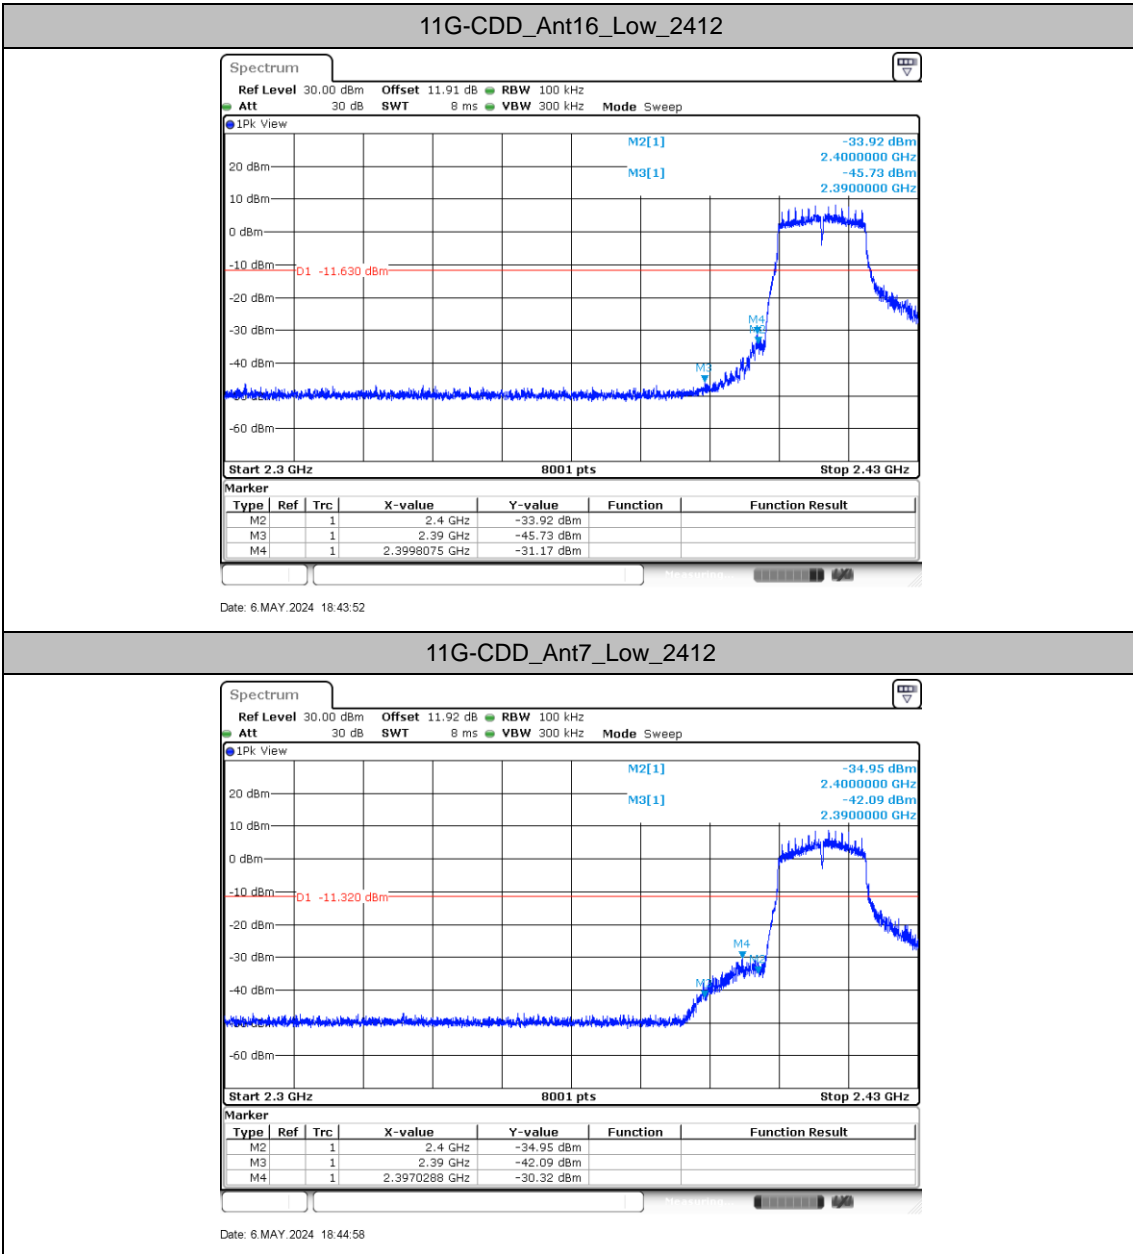


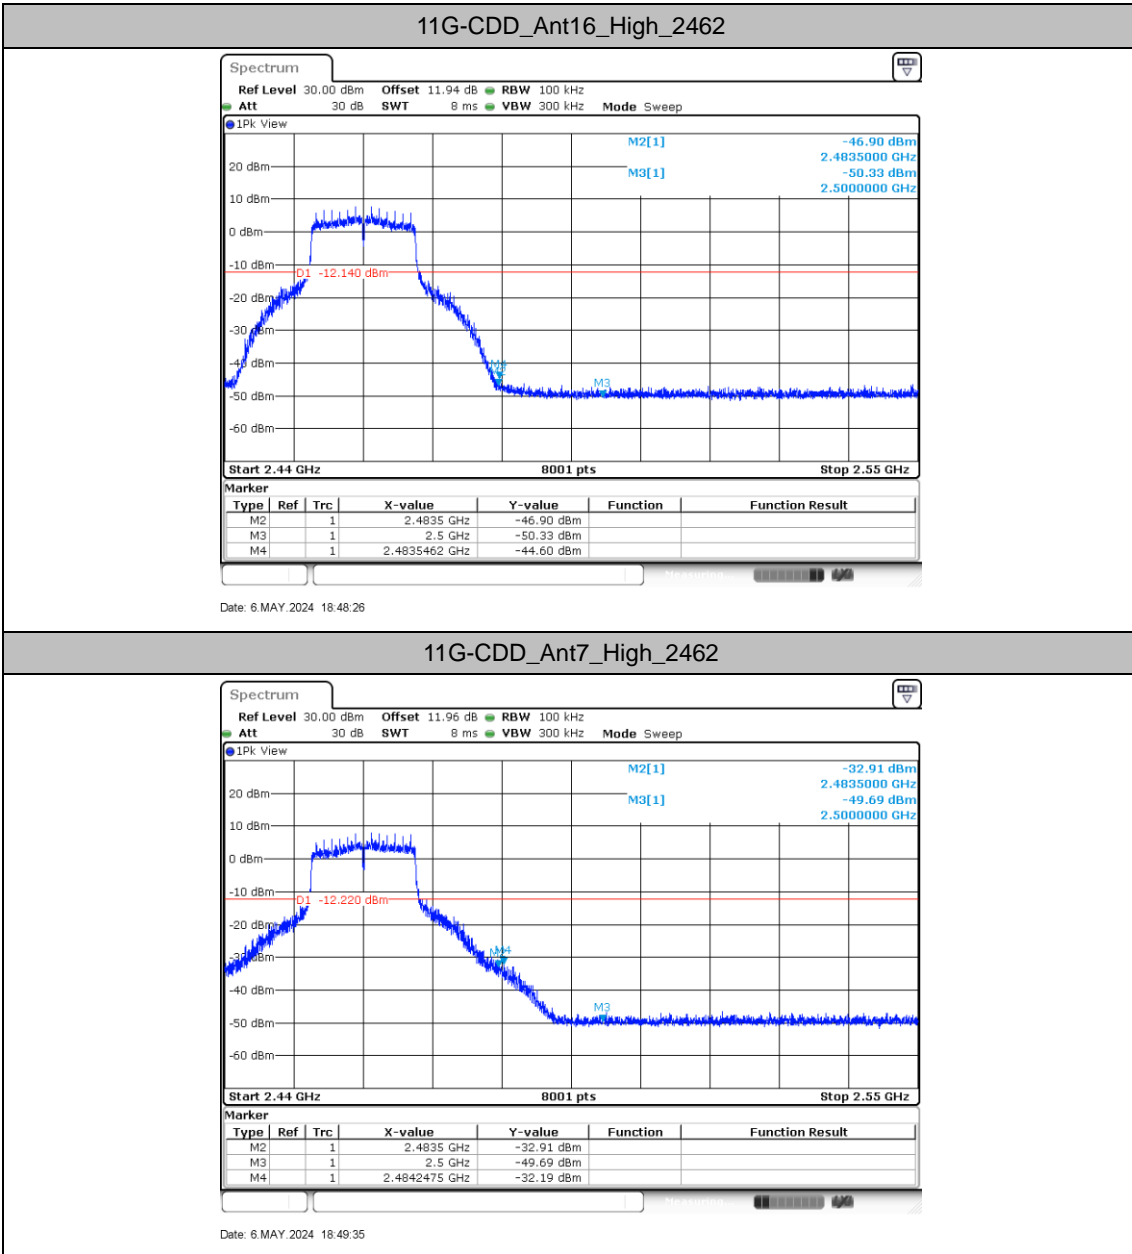

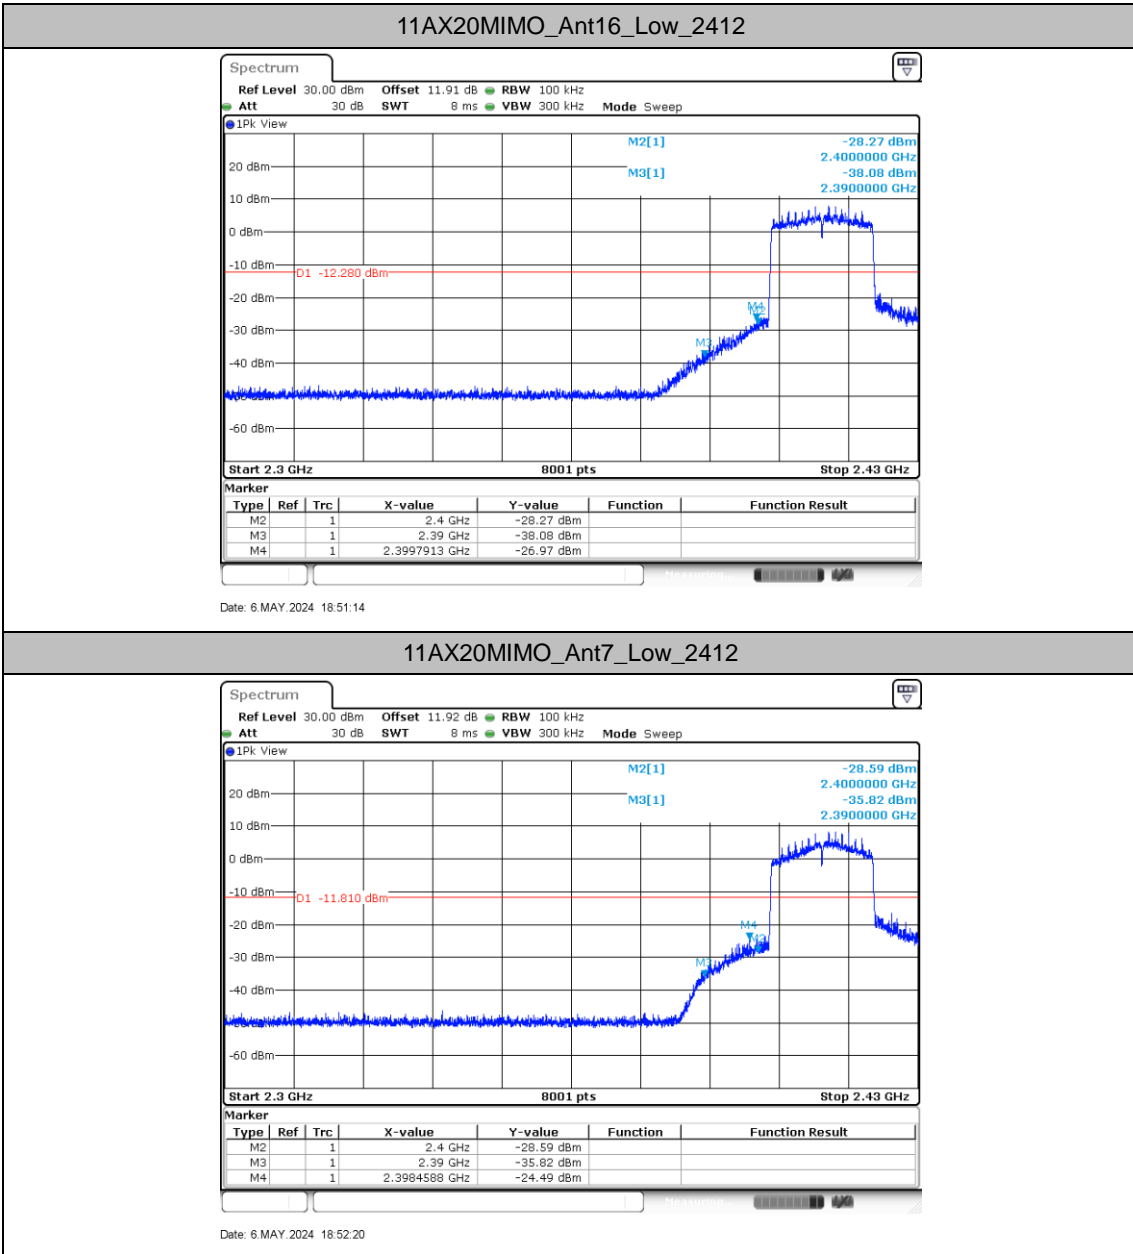

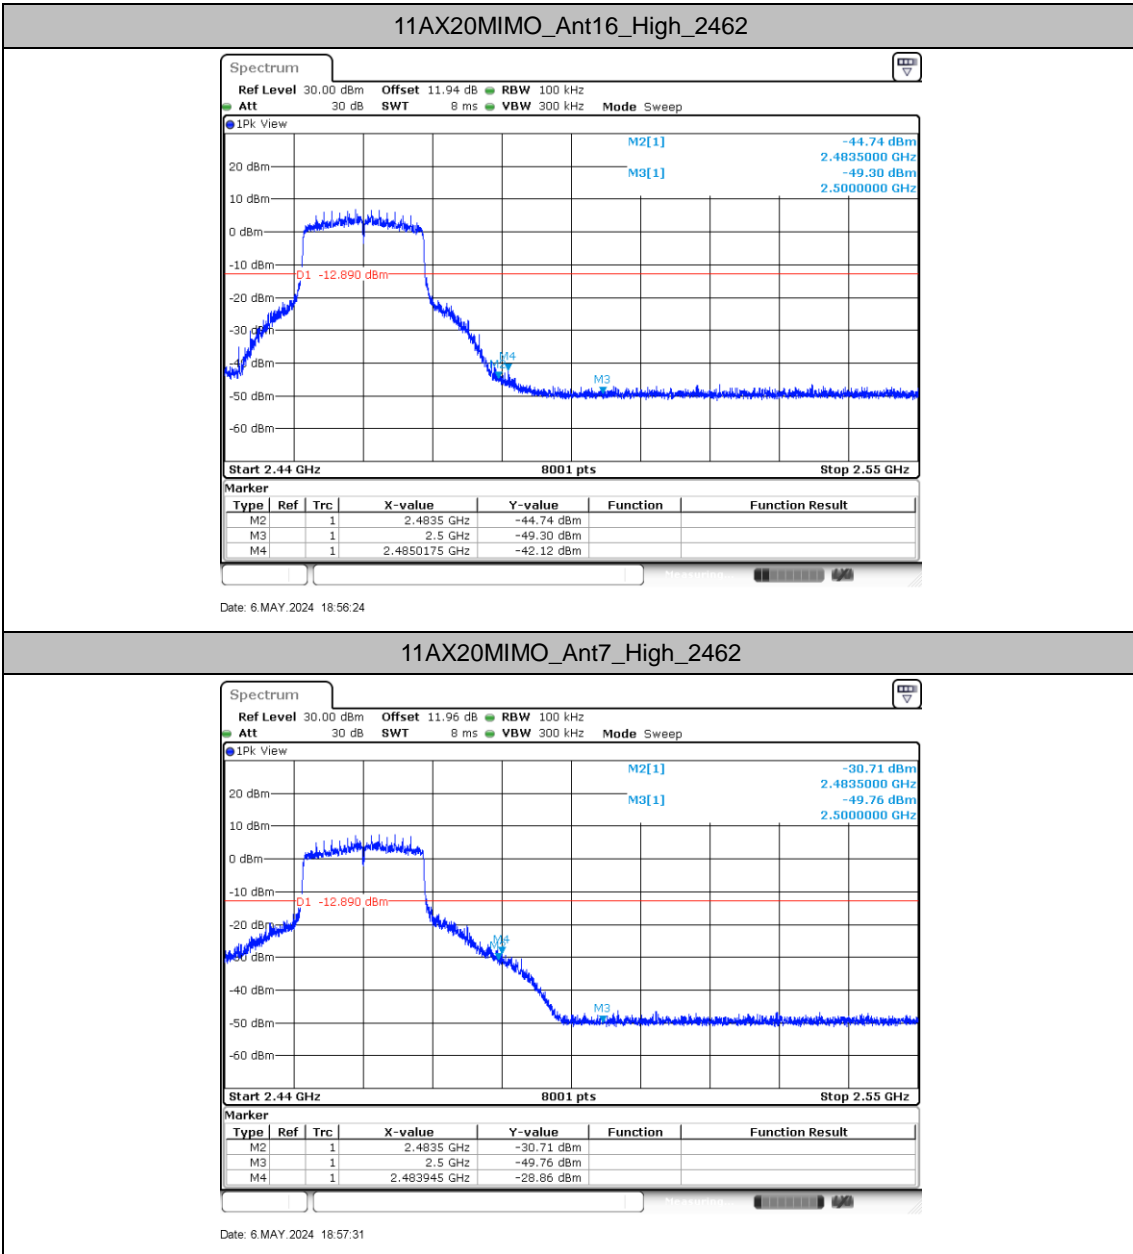

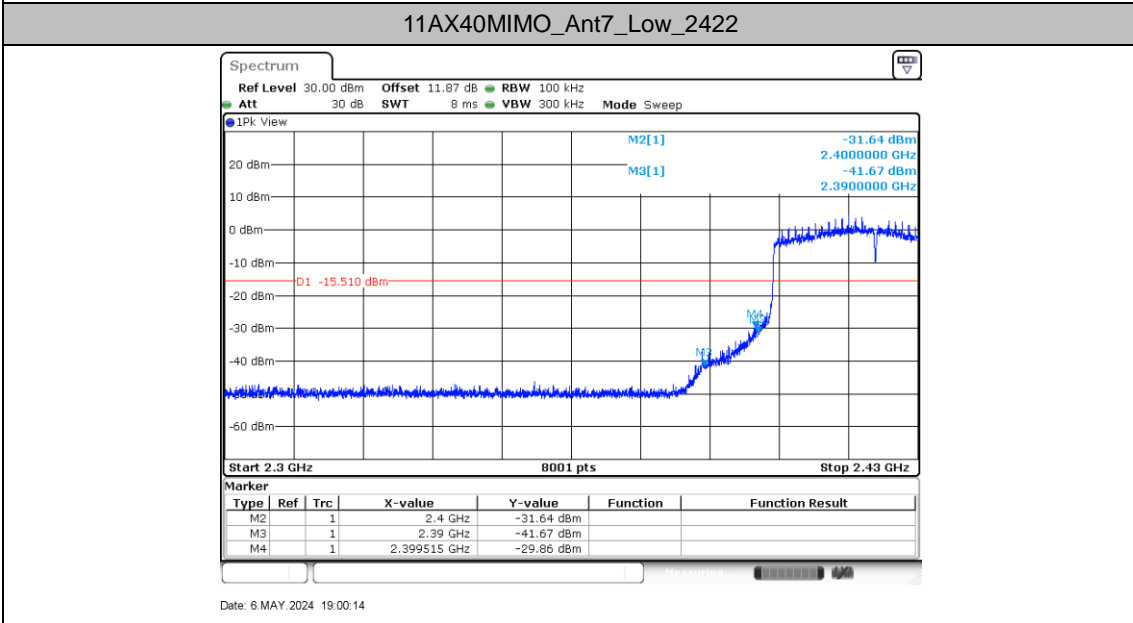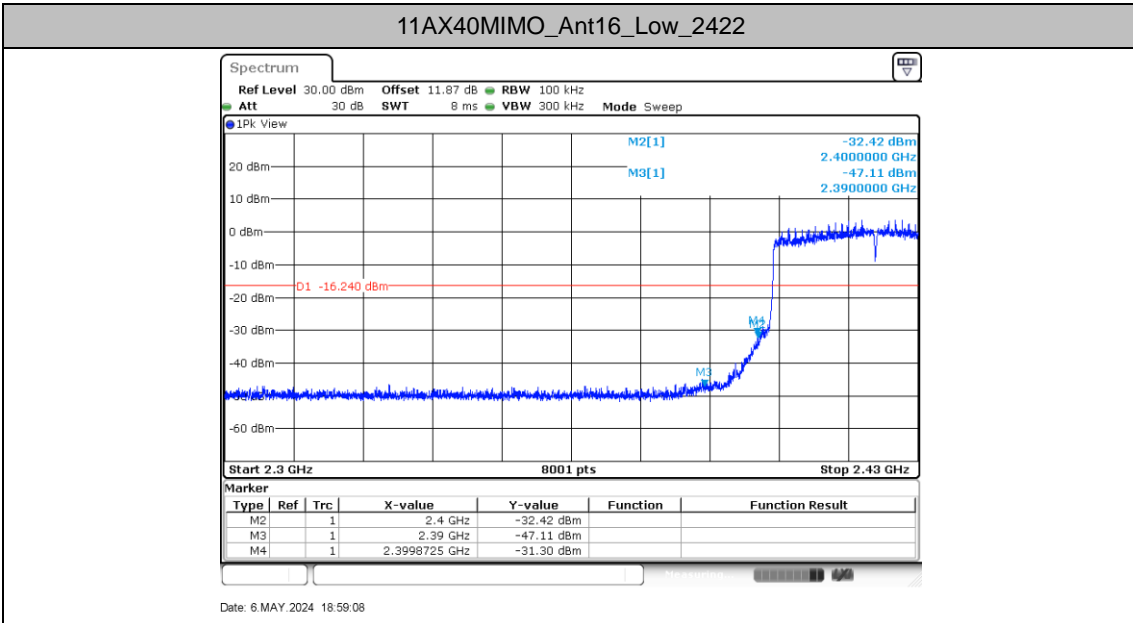

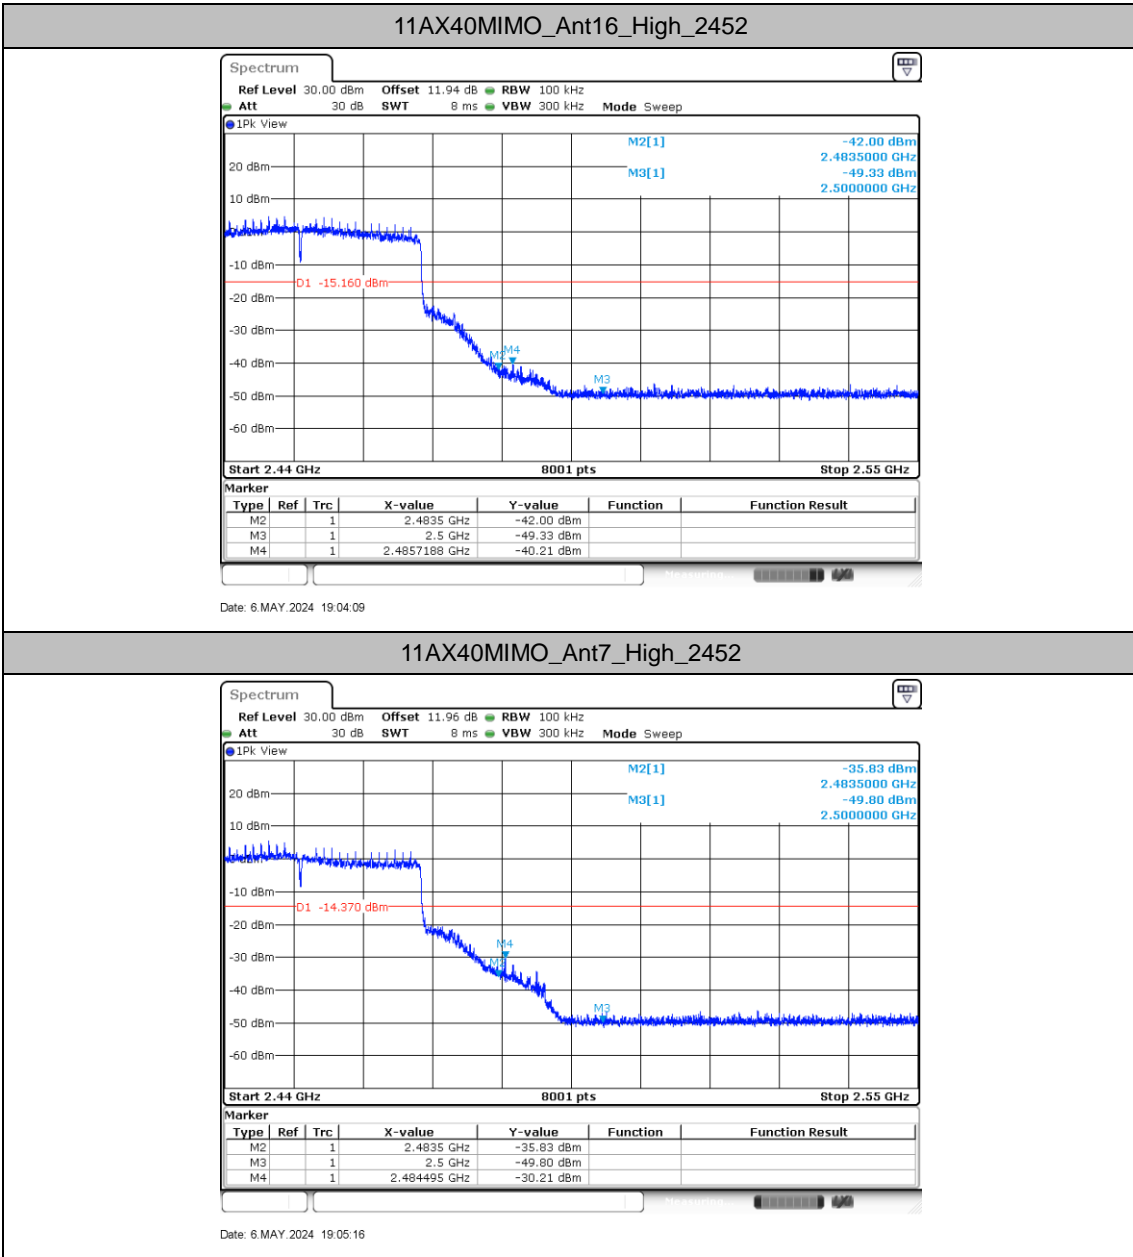



Conducted Spurious Emission

Test Result



TestMode	Antenna	Freq(MHz)	FreqRange [Mhz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
11B-CDD	Ant16	2412	30~1000	10.85	-50.35	≤-9.15	PASS
			1000~26500	10.85	-45.31	≤-9.15	PASS
	Ant7	2412	30~1000	10.73	-50.48	≤-9.27	PASS
			1000~26500	10.73	-44.94	≤-9.27	PASS
	Ant16	2437	30~1000	11.30	-50.73	≤-8.7	PASS
			1000~26500	11.30	-45.19	≤-8.7	PASS
	Ant7	2437	30~1000	10.89	-50.4	≤-9.11	PASS
			1000~26500	10.89	-45.64	≤-9.11	PASS
	Ant16	2462	30~1000	10.26	-50.7	≤-9.74	PASS
			1000~26500	10.26	-45.19	≤-9.74	PASS
	Ant7	2462	30~1000	10.55	-50.7	≤-9.45	PASS
			1000~26500	10.55	-45.47	≤-9.45	PASS
11G-CDD	Ant16	2412	30~1000	8.37	-50.44	≤-11.63	PASS
			1000~26500	8.37	-44.87	≤-11.63	PASS
	Ant7	2412	30~1000	8.68	-50.68	≤-11.32	PASS
			1000~26500	8.68	-45.4	≤-11.32	PASS
	Ant16	2437	30~1000	8.66	-50.44	≤-11.34	PASS
			1000~26500	8.66	-45.57	≤-11.34	PASS
	Ant7	2437	30~1000	8.65	-50.98	≤-11.35	PASS
			1000~26500	8.65	-45.3	≤-11.35	PASS
	Ant16	2462	30~1000	7.86	-51.33	≤-12.14	PASS
			1000~26500	7.86	-45.52	≤-12.14	PASS
	Ant7	2462	30~1000	7.78	-50.45	≤-12.22	PASS
			1000~26500	7.78	-45.24	≤-12.22	PASS
11AX20MIMO	Ant16	2412	30~1000	7.72	-50.79	≤-12.28	PASS
			1000~26500	7.72	-45.73	≤-12.28	PASS
	Ant7	2412	30~1000	8.19	-51.07	≤-11.81	PASS
			1000~26500	8.19	-45.52	≤-11.81	PASS
	Ant16	2437	30~1000	7.77	-50.03	≤-12.23	PASS
			1000~26500	7.77	-44.56	≤-12.23	PASS
	Ant7	2437	30~1000	8.32	-51.09	≤-11.68	PASS
			1000~26500	8.32	-44.18	≤-11.68	PASS
	Ant16	2462	30~1000	7.11	-49.99	≤-12.89	PASS
			1000~26500	7.11	-44.49	≤-12.89	PASS




	Ant7	2462	30~1000	7.11	-50.74	≤-12.89	PASS
			1000~26500	7.11	-45.11	≤-12.89	PASS
11AX40MIMO	Ant16	2422	30~1000	3.76	-51.04	≤-16.24	PASS
			1000~26500	3.76	-45.15	≤-16.24	PASS
	Ant7	2422	30~1000	4.49	-50.48	≤-15.51	PASS
			1000~26500	4.49	-43.9	≤-15.51	PASS
	Ant16	2437	30~1000	4.30	-50.02	≤-15.7	PASS
			1000~26500	4.30	-45.34	≤-15.7	PASS
	Ant7	2437	30~1000	5.22	-50.47	≤-14.78	PASS
			1000~26500	5.22	-44.98	≤-14.78	PASS
	Ant16	2452	30~1000	4.84	-50.87	≤-15.16	PASS
			1000~26500	4.84	-44.44	≤-15.16	PASS
	Ant7	2452	30~1000	5.63	-51.15	≤-14.37	PASS
			1000~26500	5.63	-45.19	≤-14.37	PASS




Test Graphs

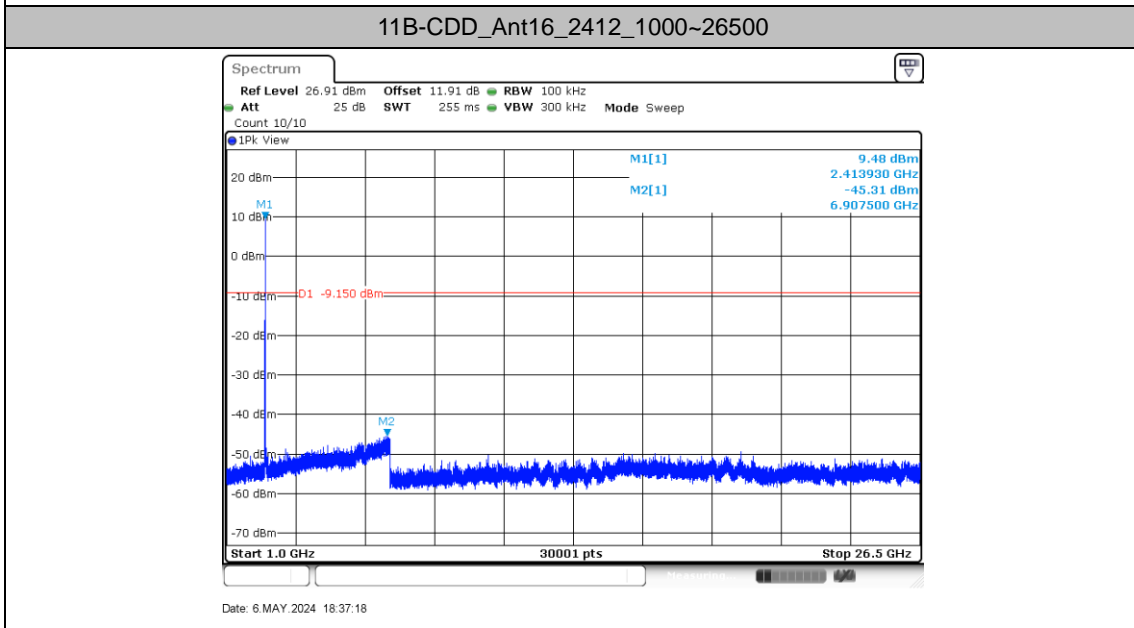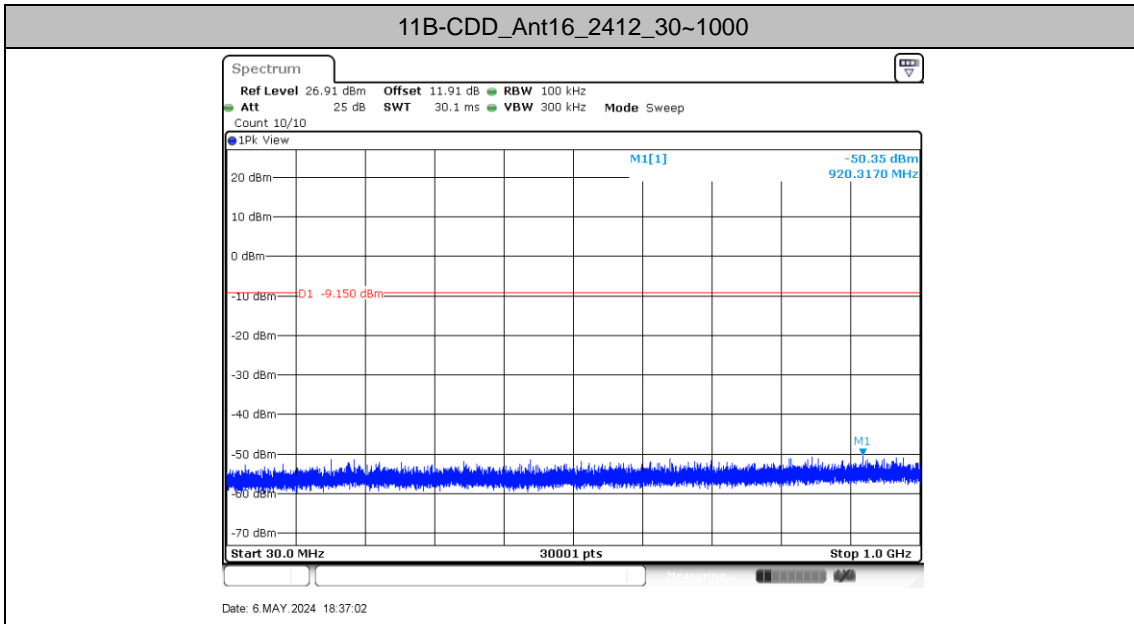

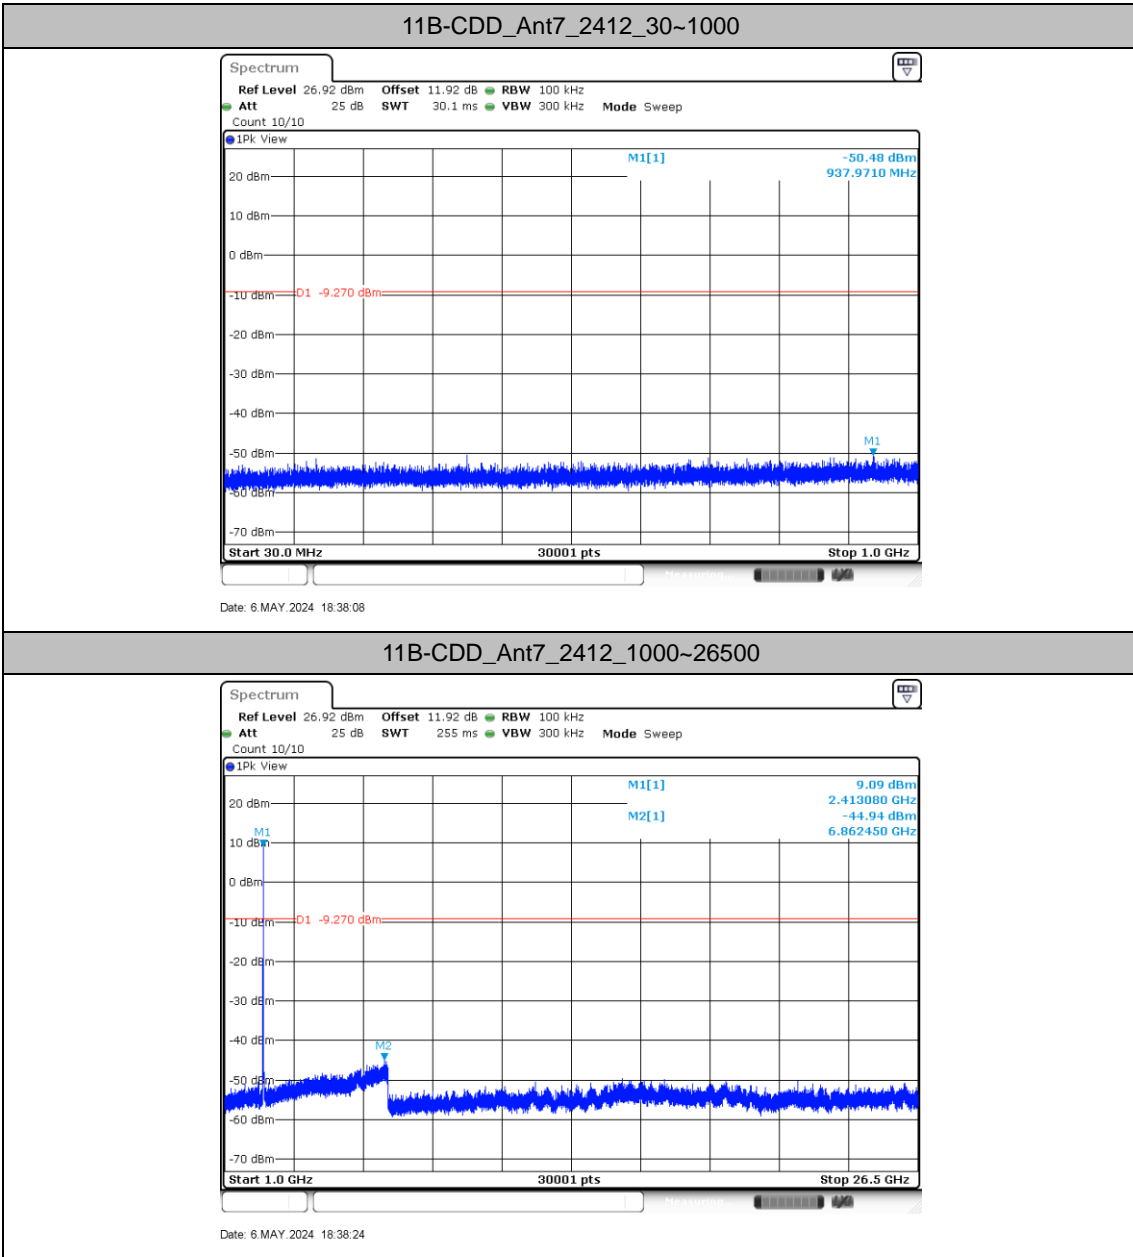




11B-CDD_Ant16_2437_30~1000

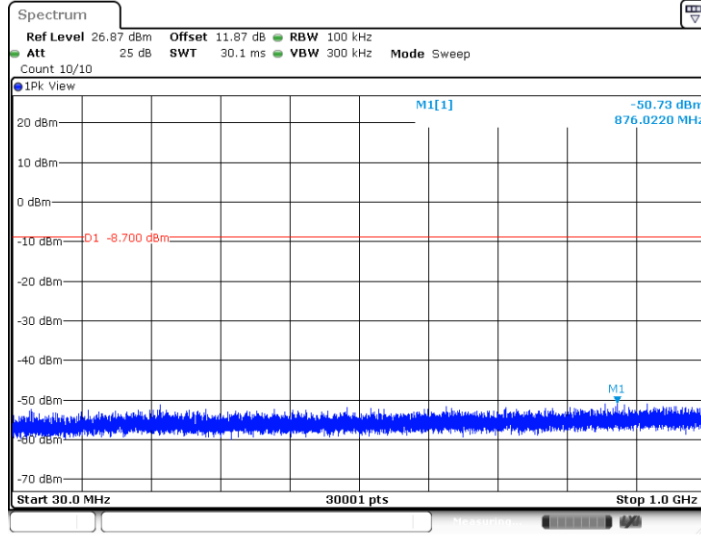

Date: 6 MAY 2024 18:39:19


11B-CDD_Ant16_2437_1000~26500

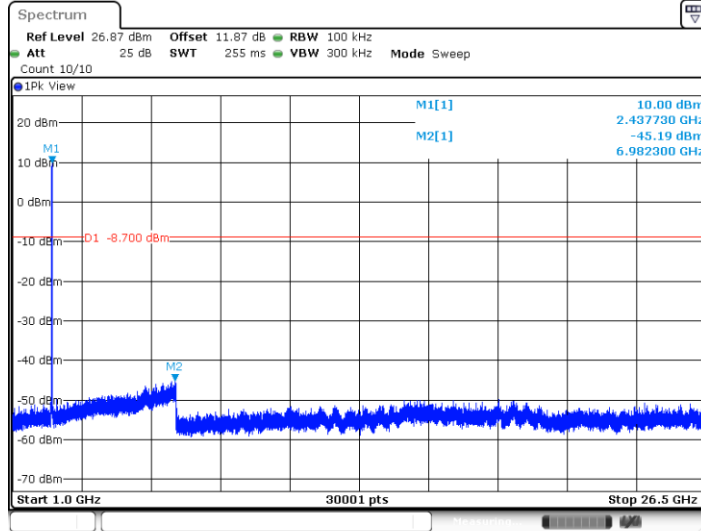

Date: 6 MAY 2024 18:39:35




11B-CDD_Ant7_2437_30~1000

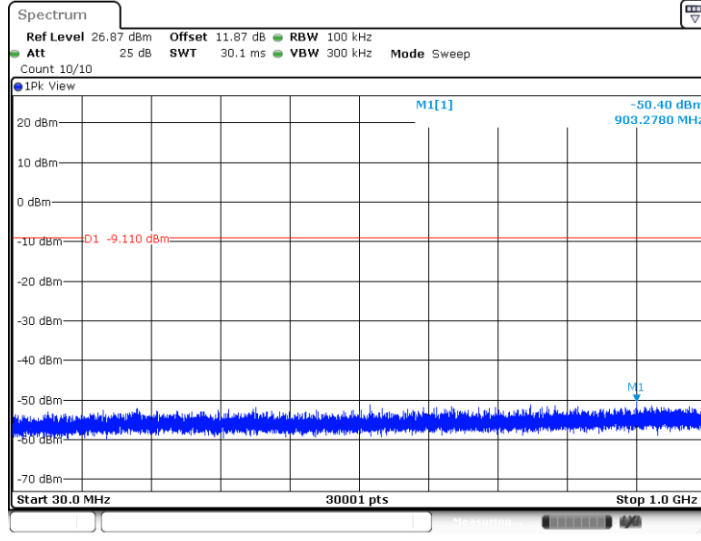

Date: 6 MAY 2024 18:40:13


11B-CDD_Ant7_2437_1000~26500

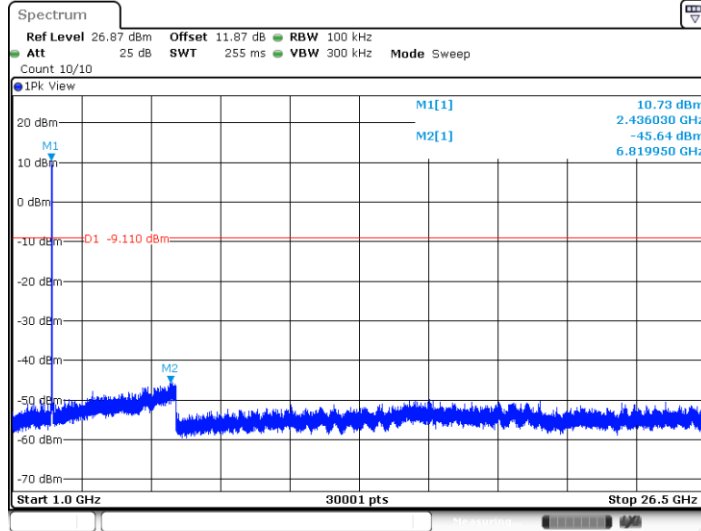

Date: 6 MAY 2024 18:40:28




11B-CDD_Ant16_2462_30~1000

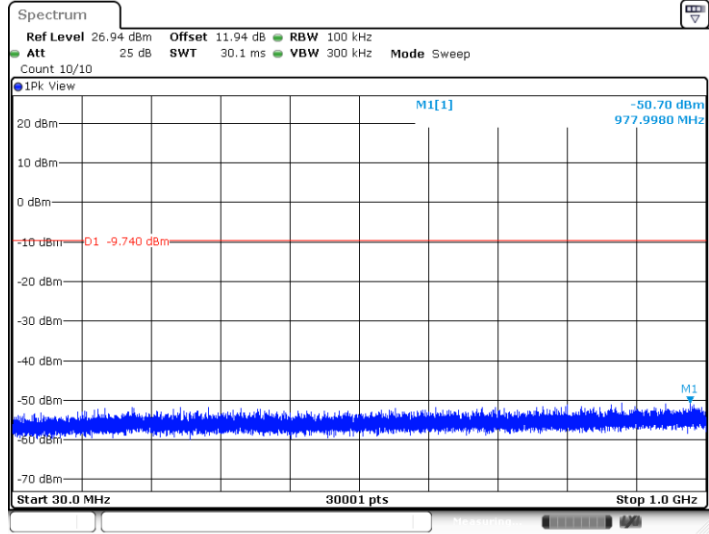

Date: 6 MAY 2024 18:41:28


11B-CDD_Ant16_2462_1000~26500

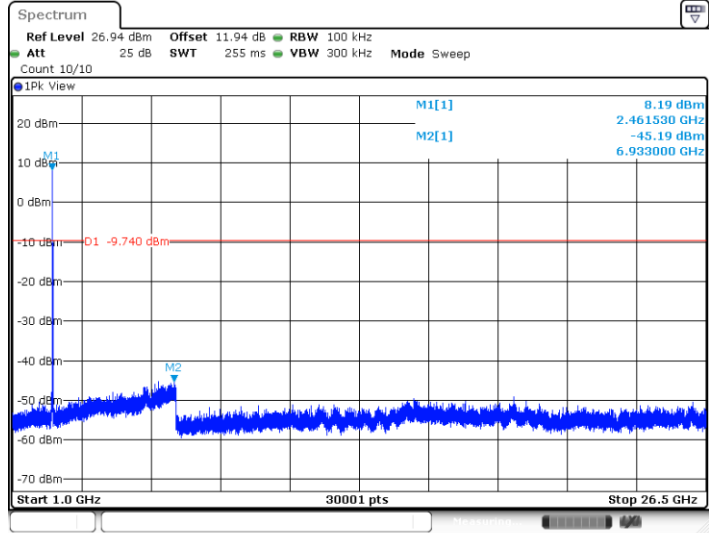

Date: 6 MAY 2024 18:41:43




11B-CDD_Ant7_2462_30~1000

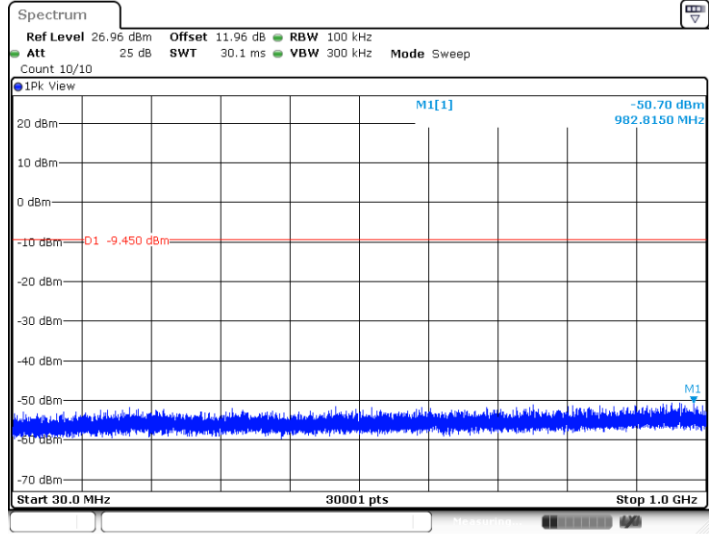


Date: 6 MAY 2024 18:42:35

11B-CDD_Ant7_2462_1000~26500

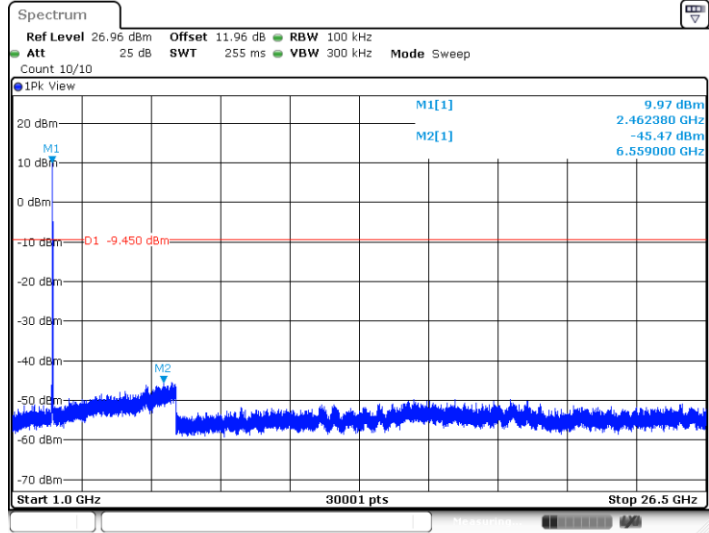


Date: 6 MAY 2024 18:42:51

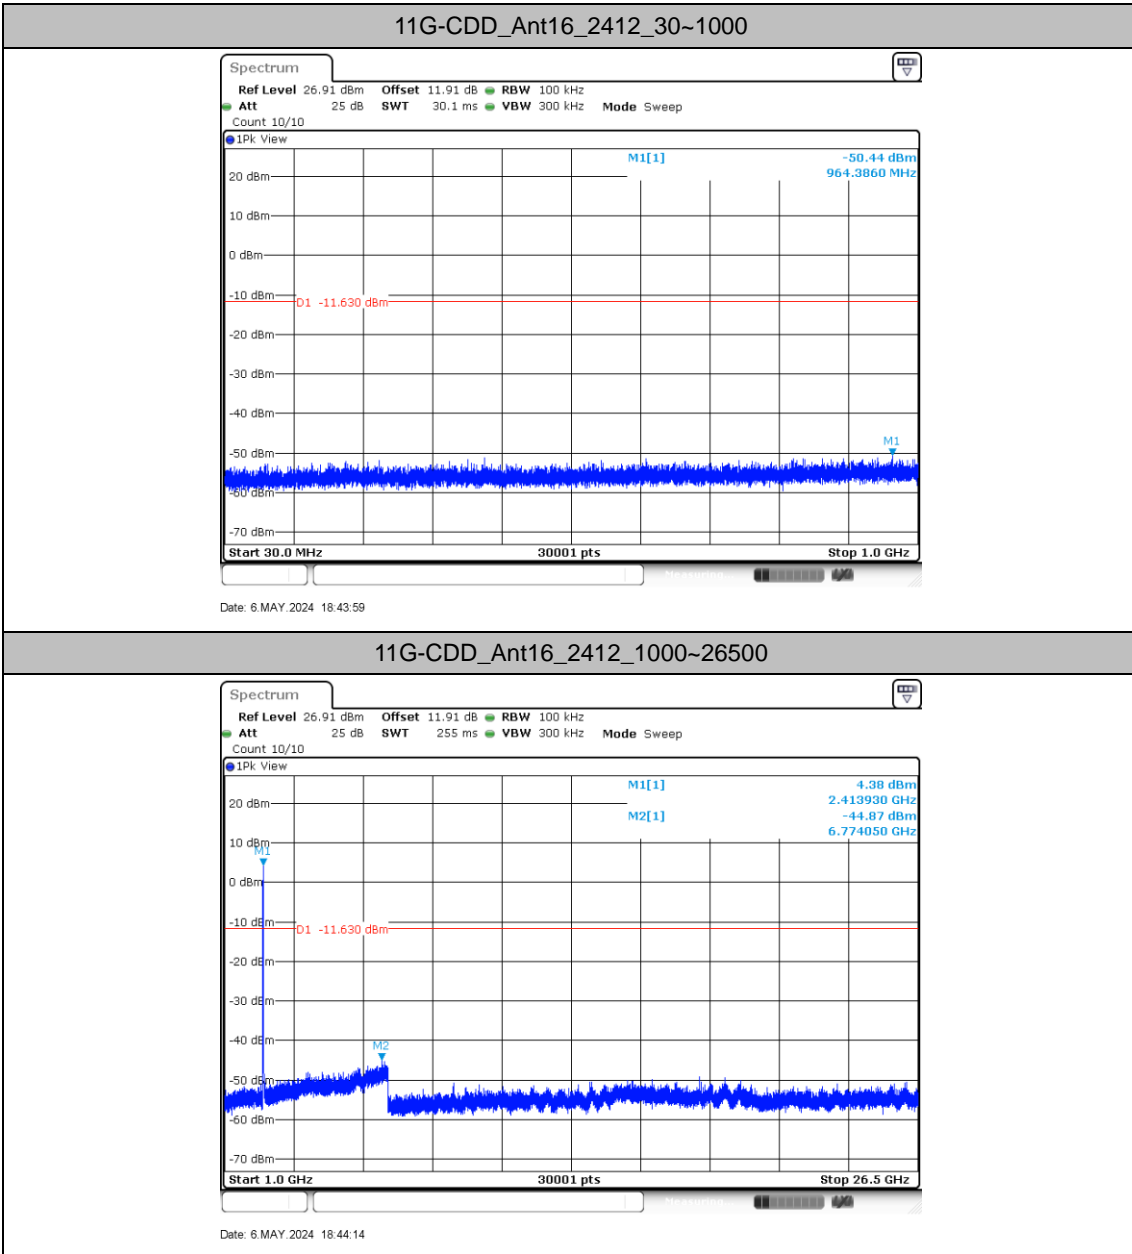




11G-CDD_Ant7_2412_30~1000

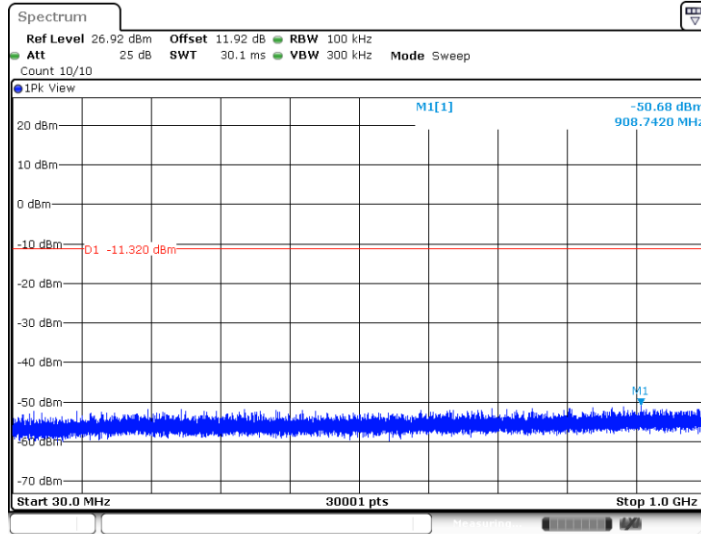

Date: 6 MAY 2024 18:45:05


11G-CDD_Ant7_2412_1000~26500

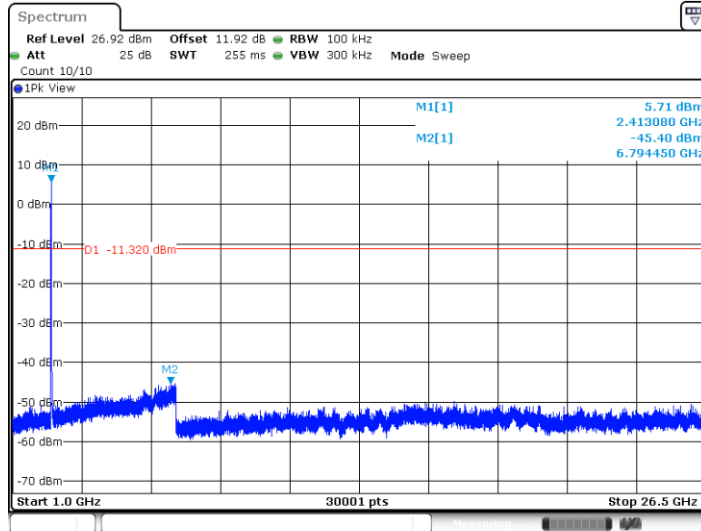

Date: 6 MAY 2024 18:45:21




11G-CDD_Ant16_2437_30~1000

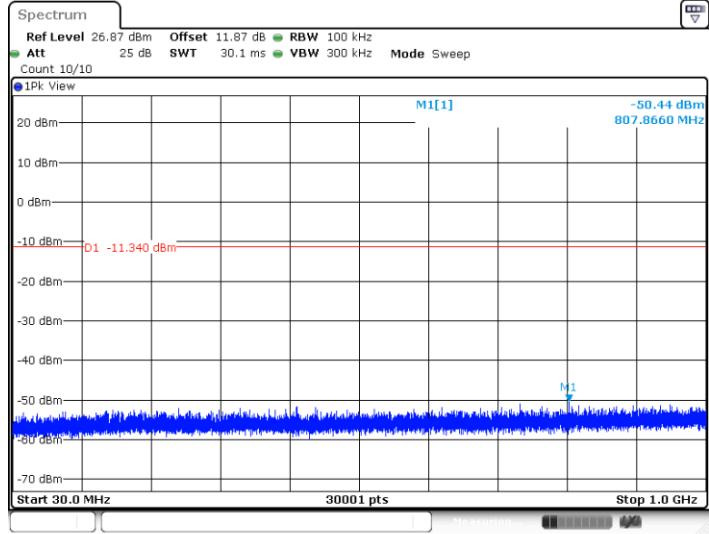



Date: 6 MAY 2024 18:46:09


11G-CDD_Ant16_2437_1000~26500

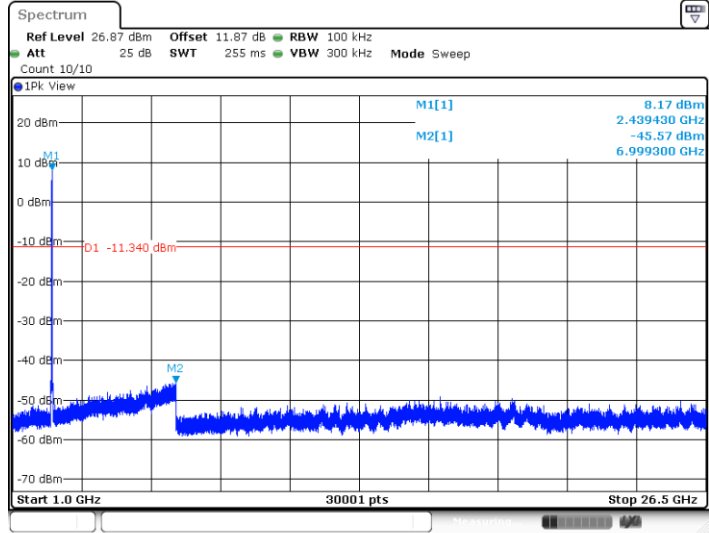



Date: 6 MAY 2024 18:46:24

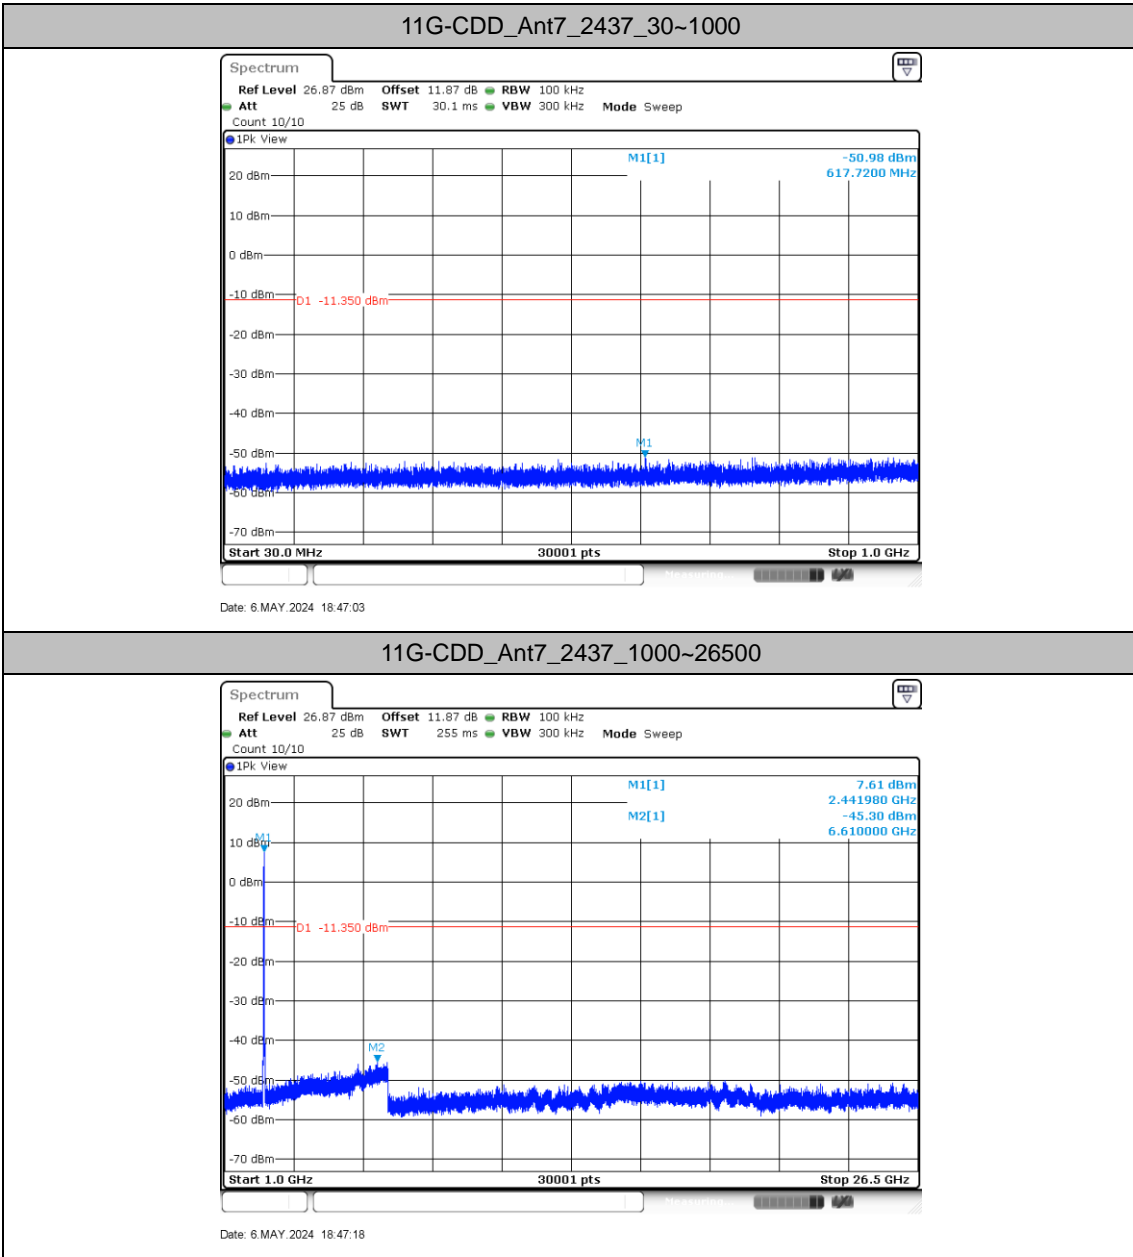


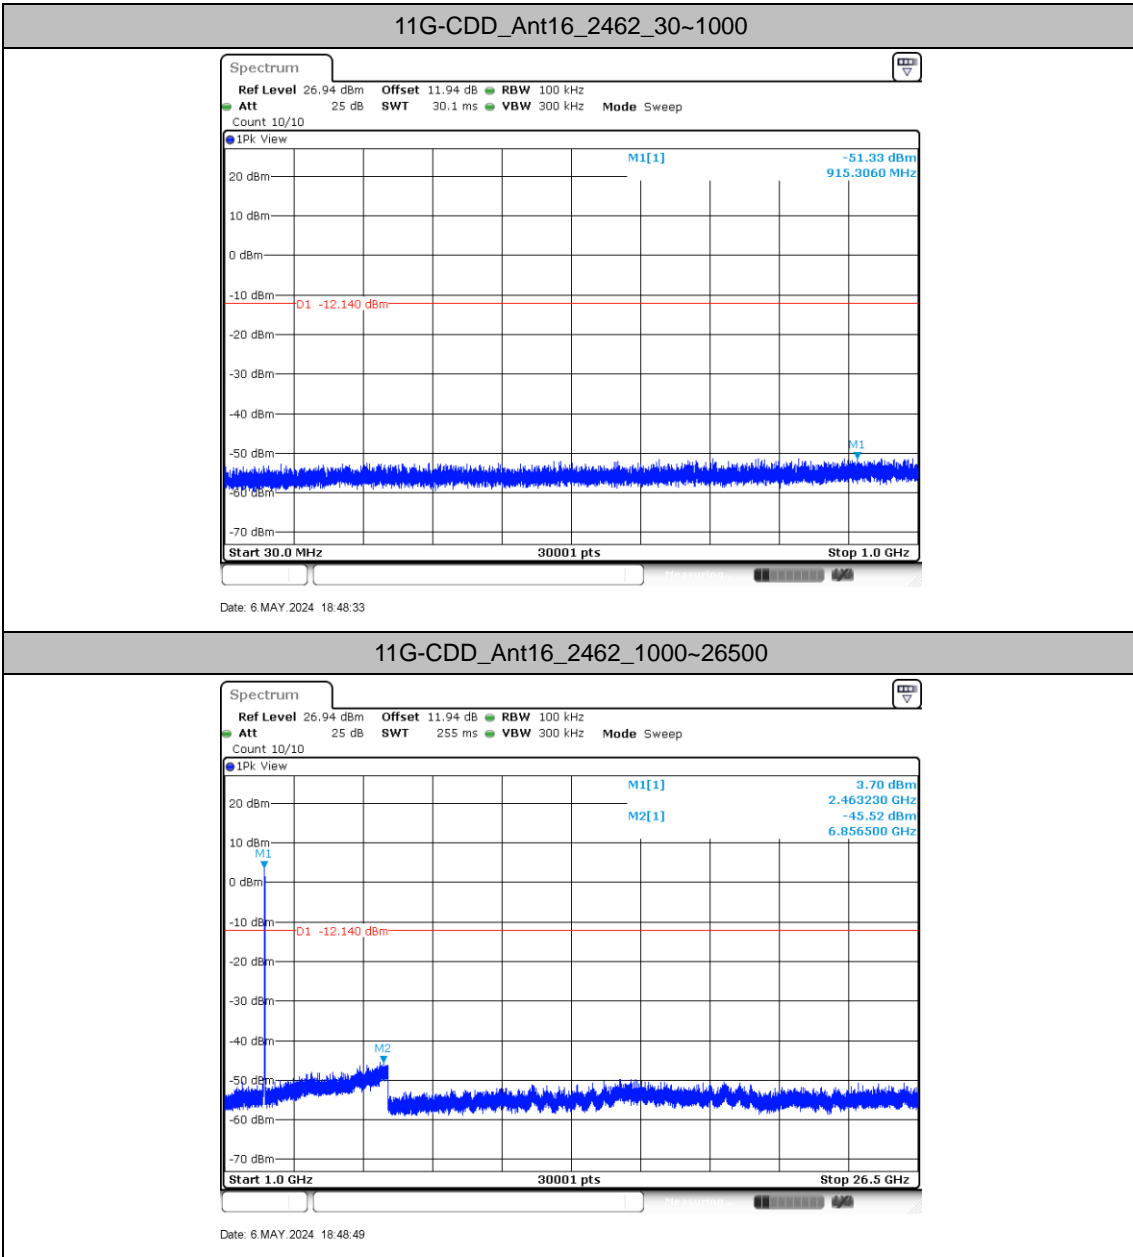


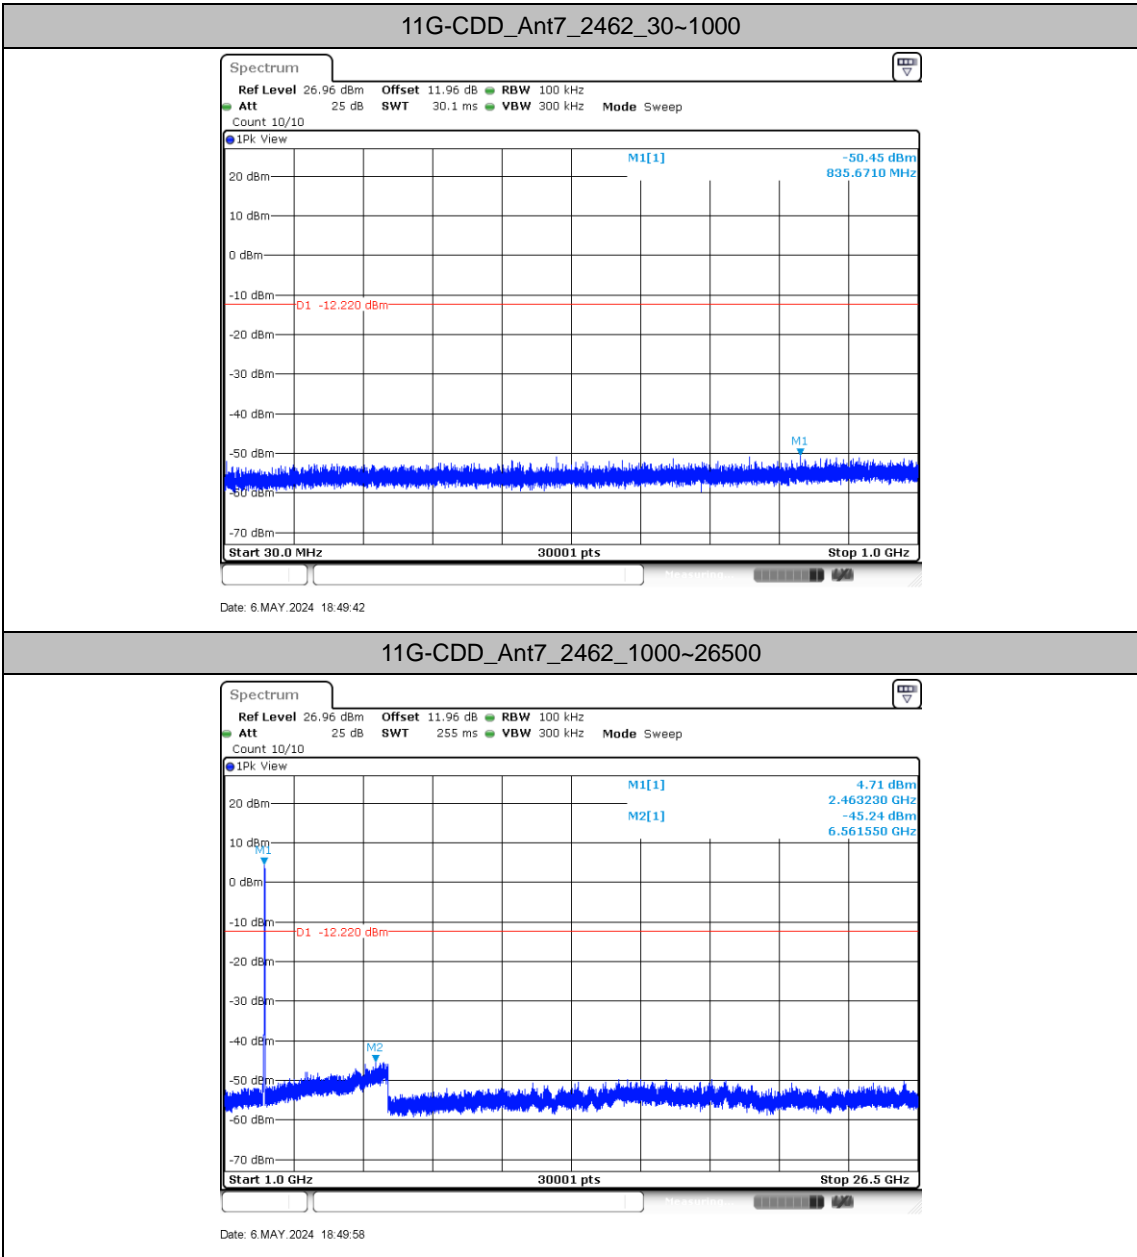


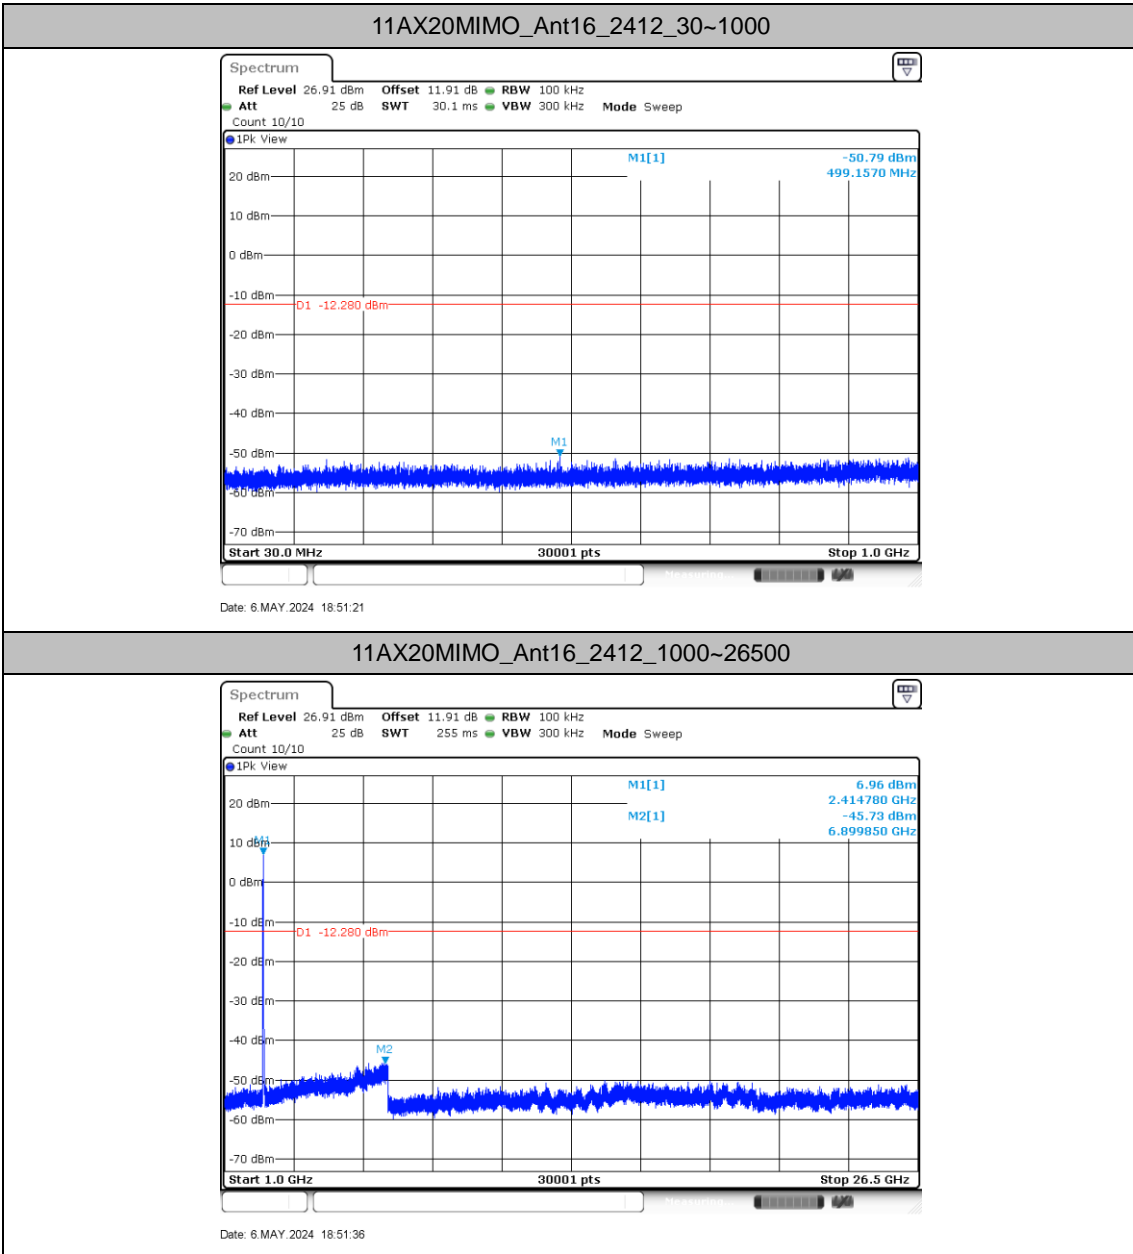


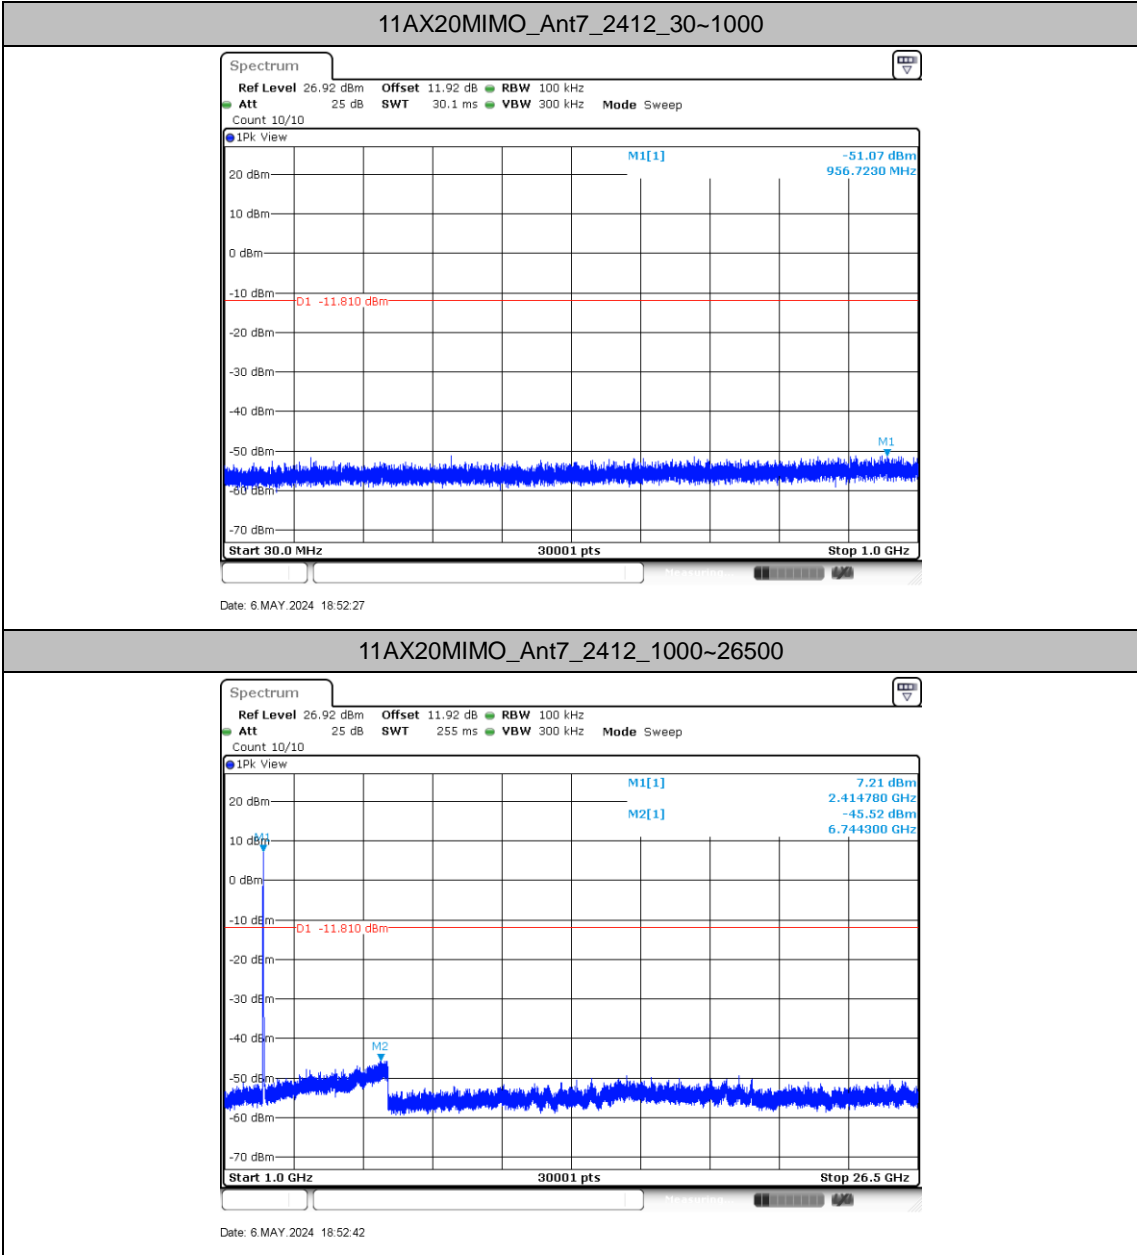


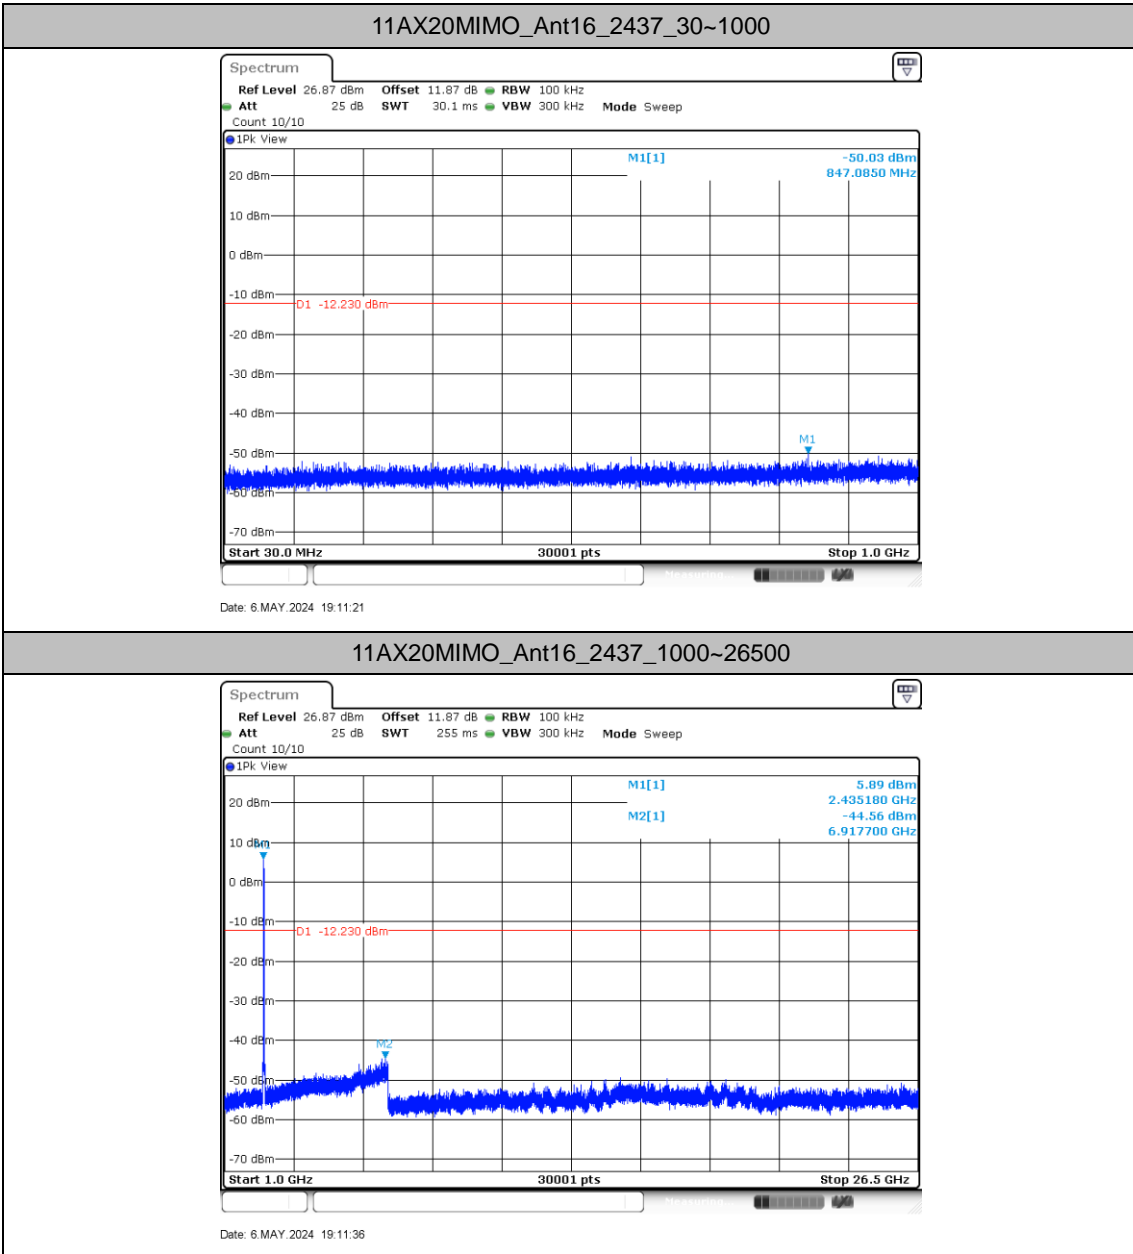


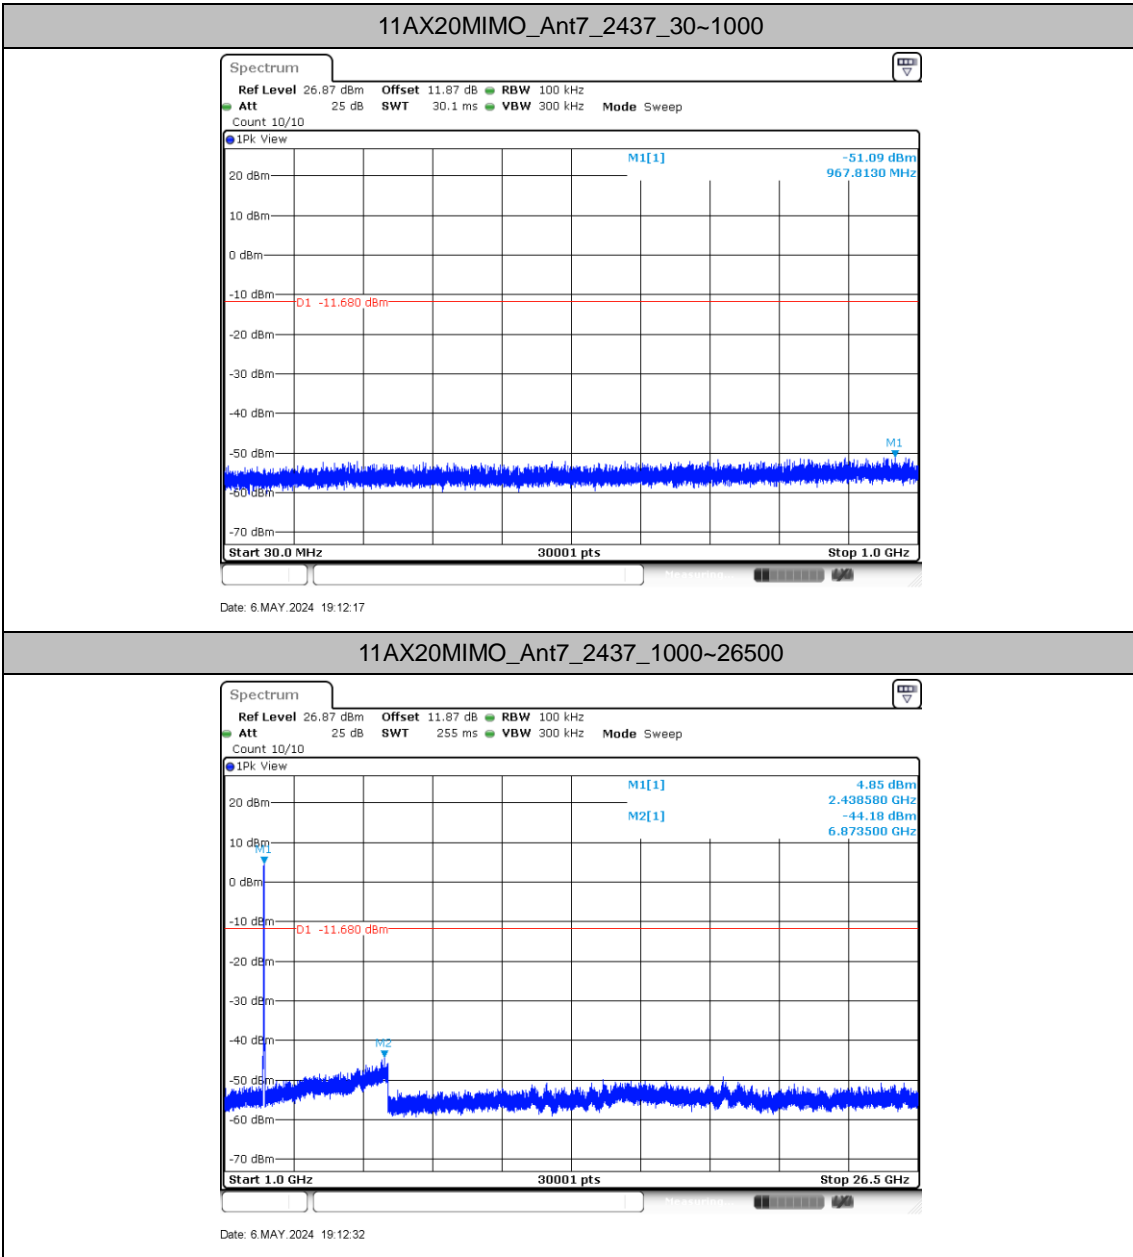


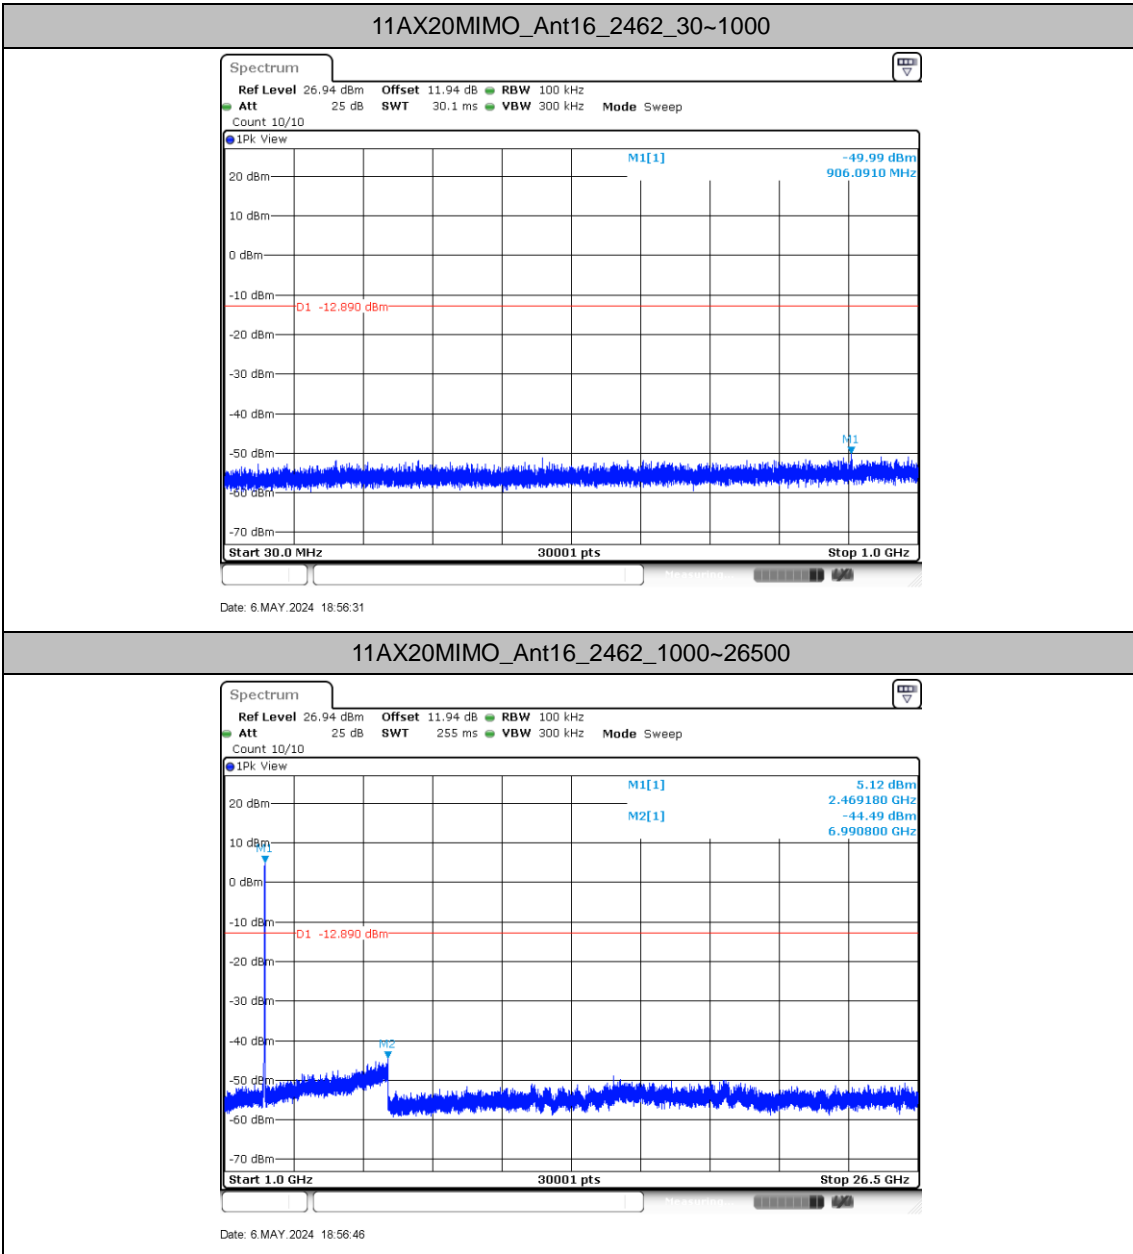


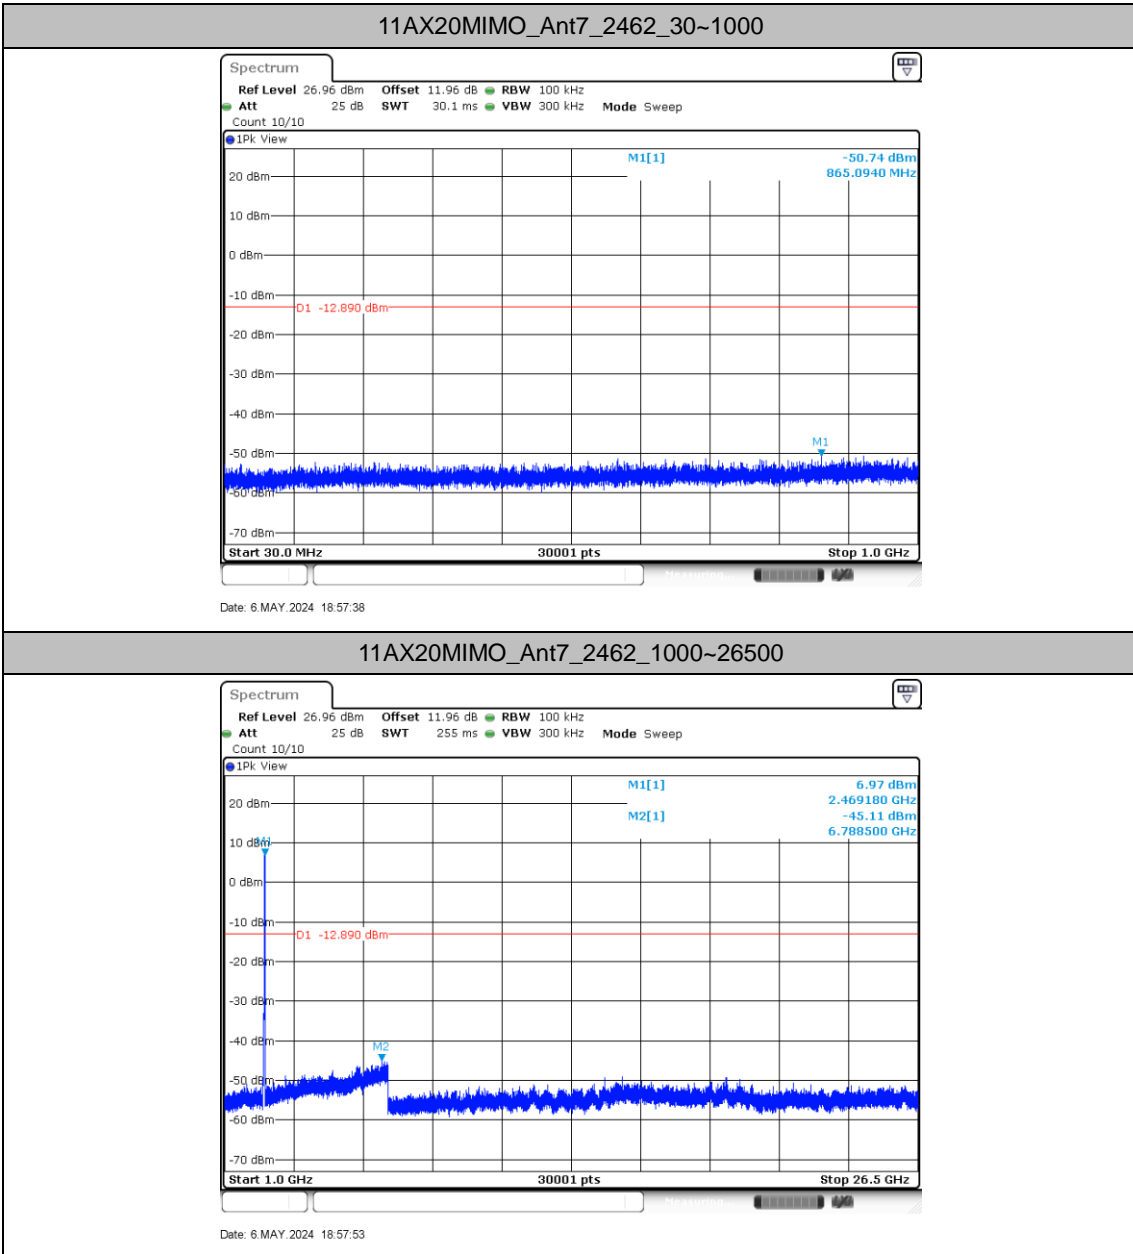


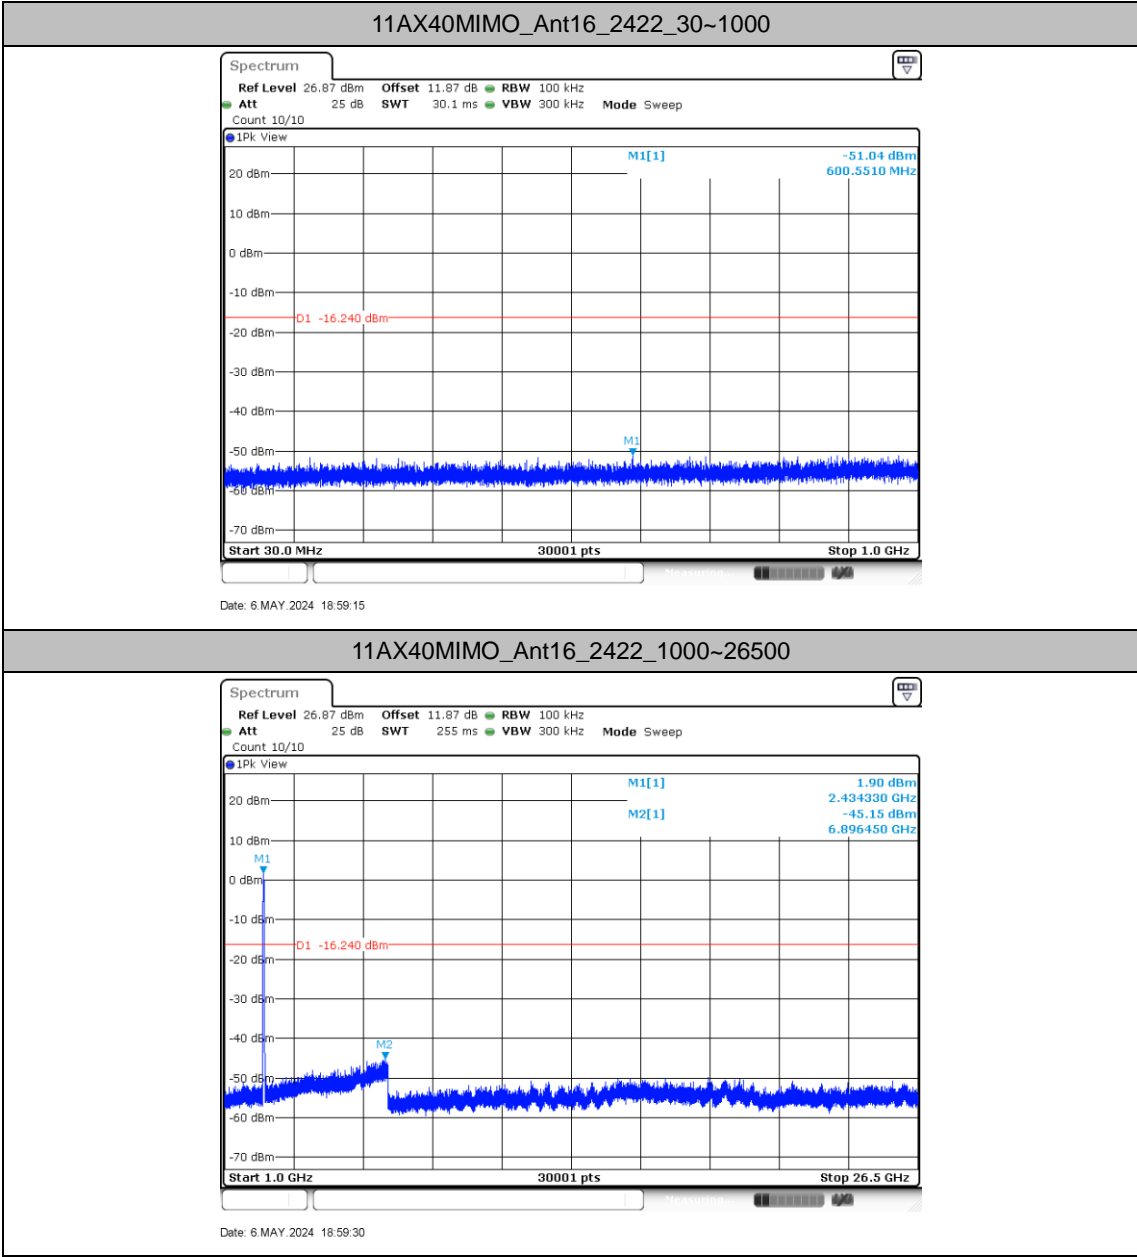


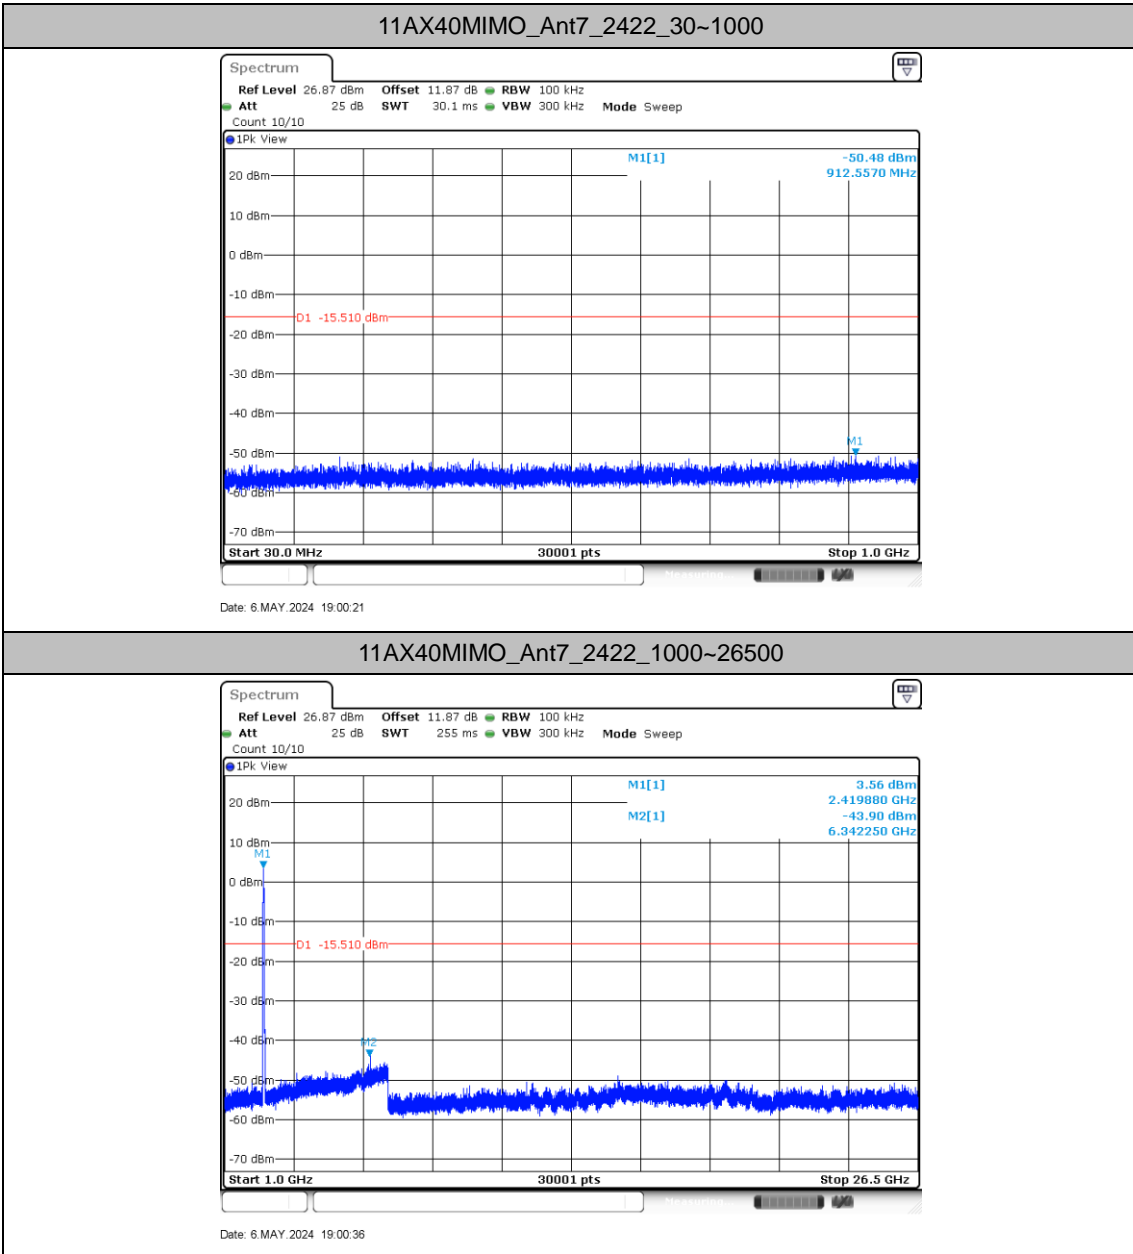

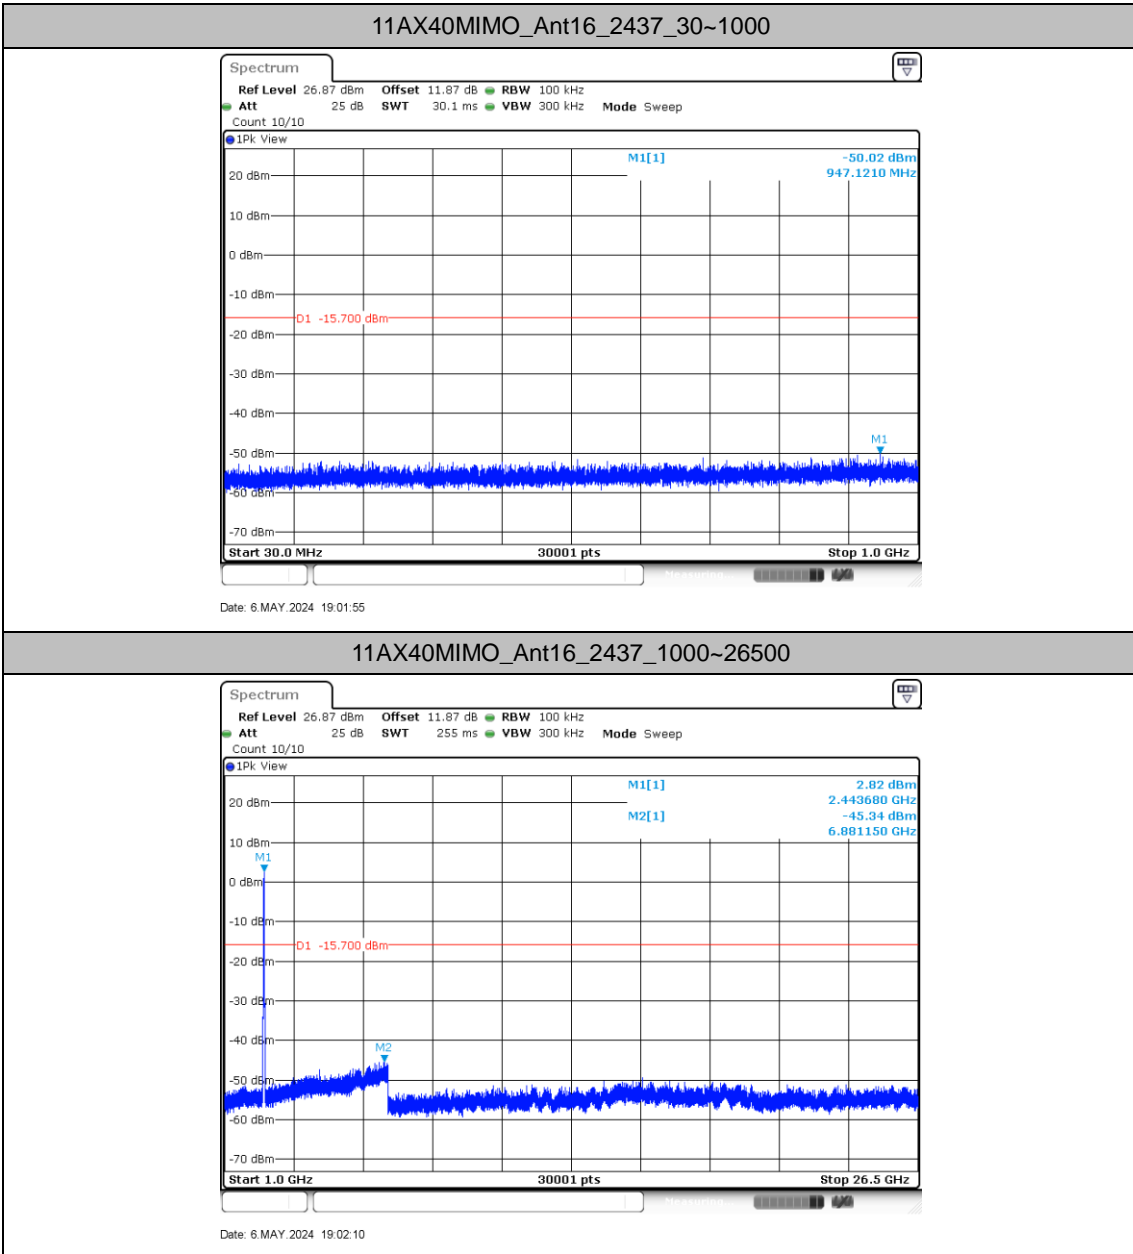

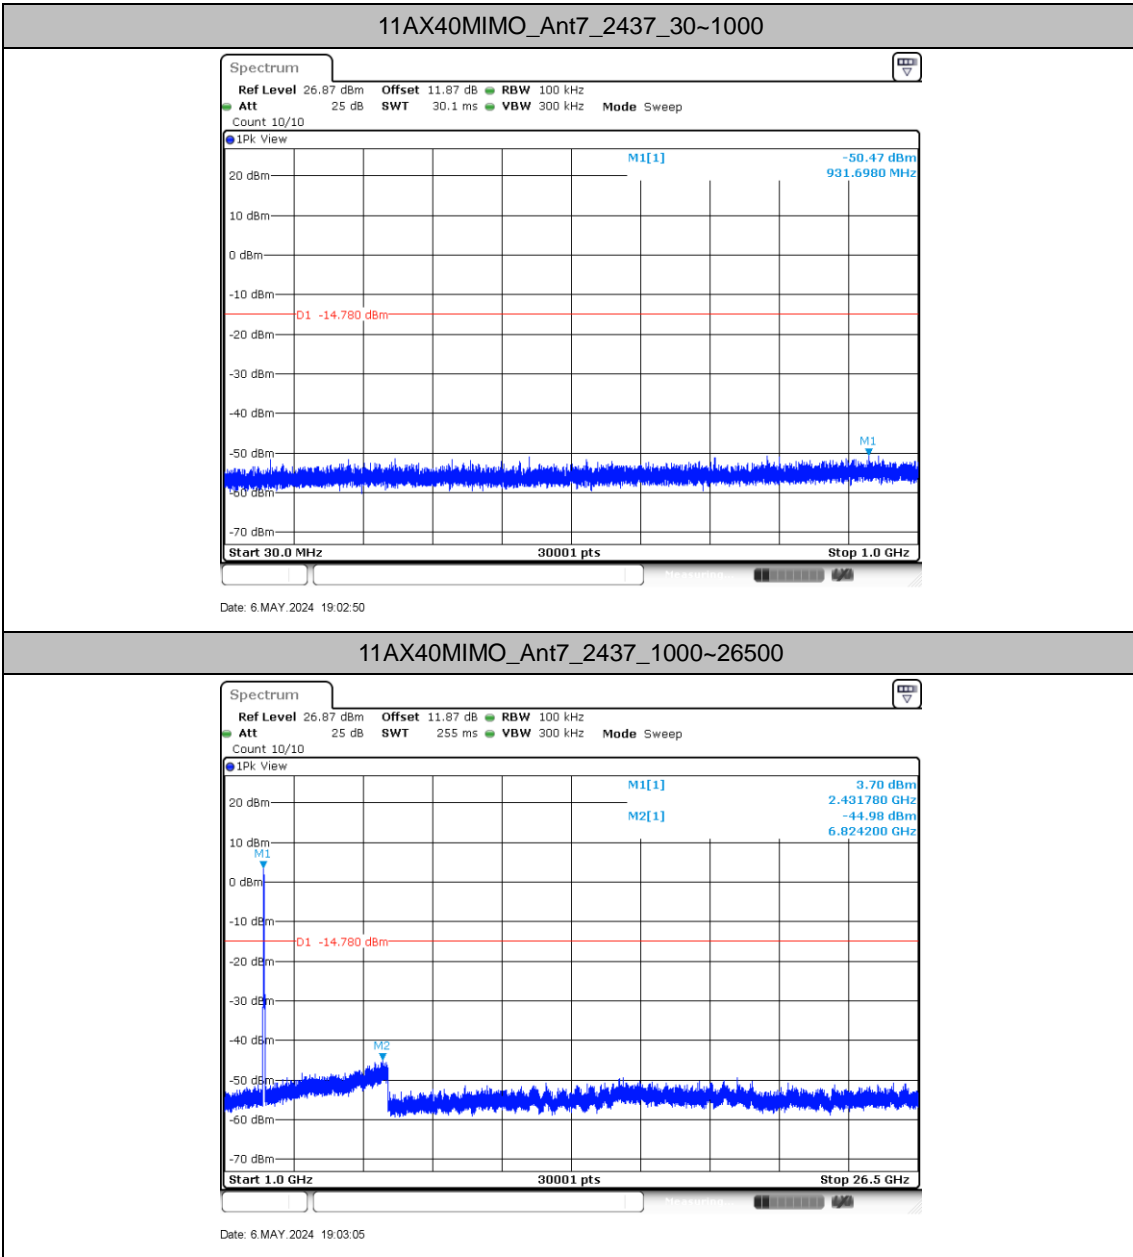

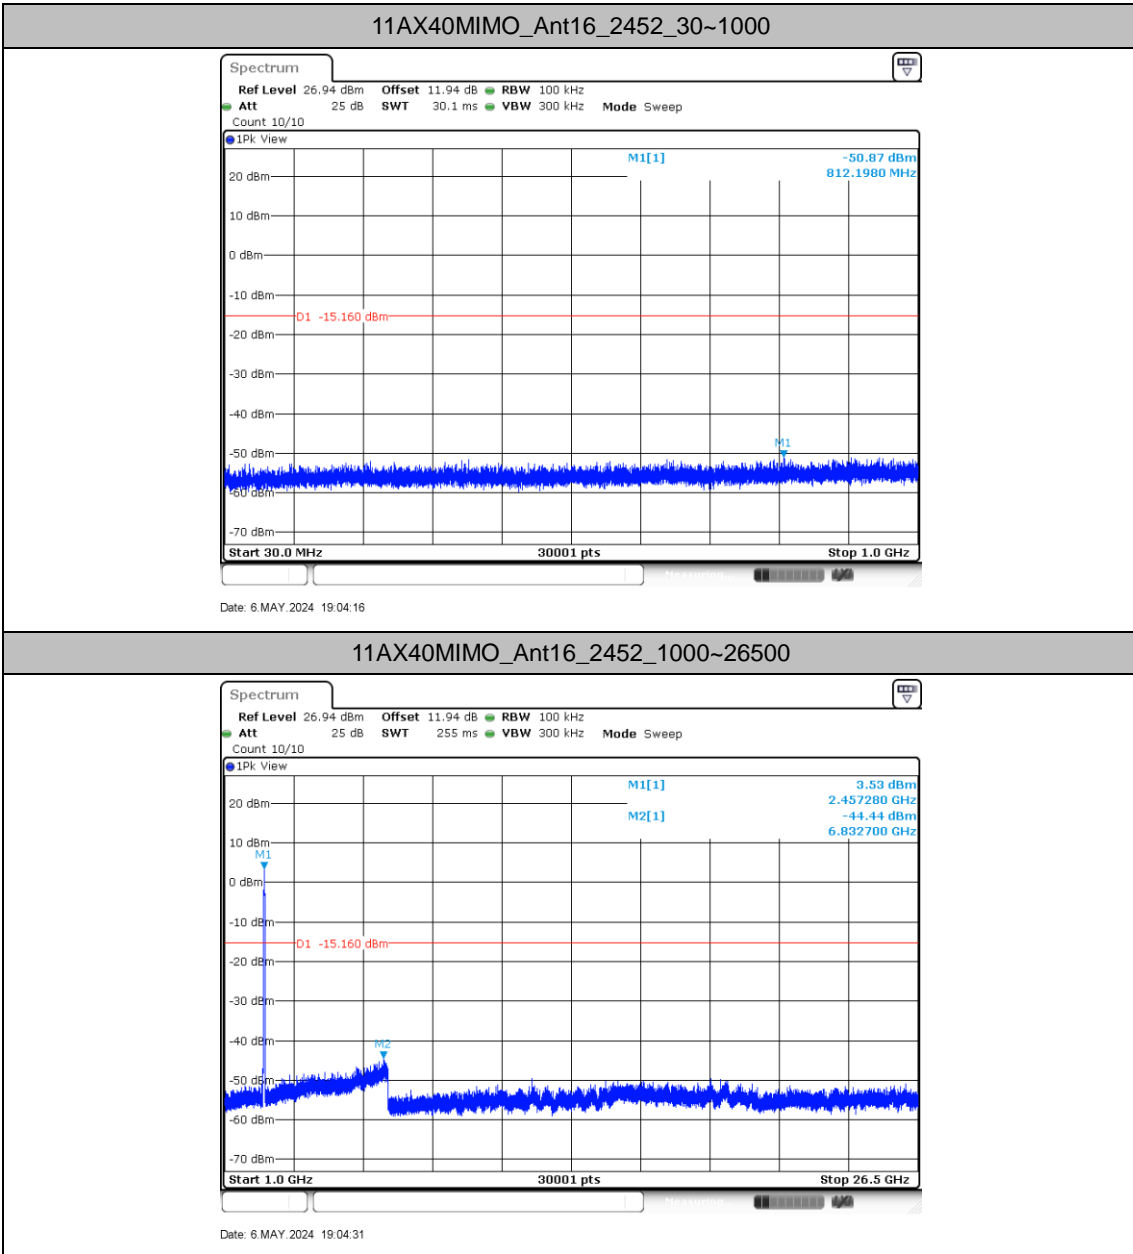

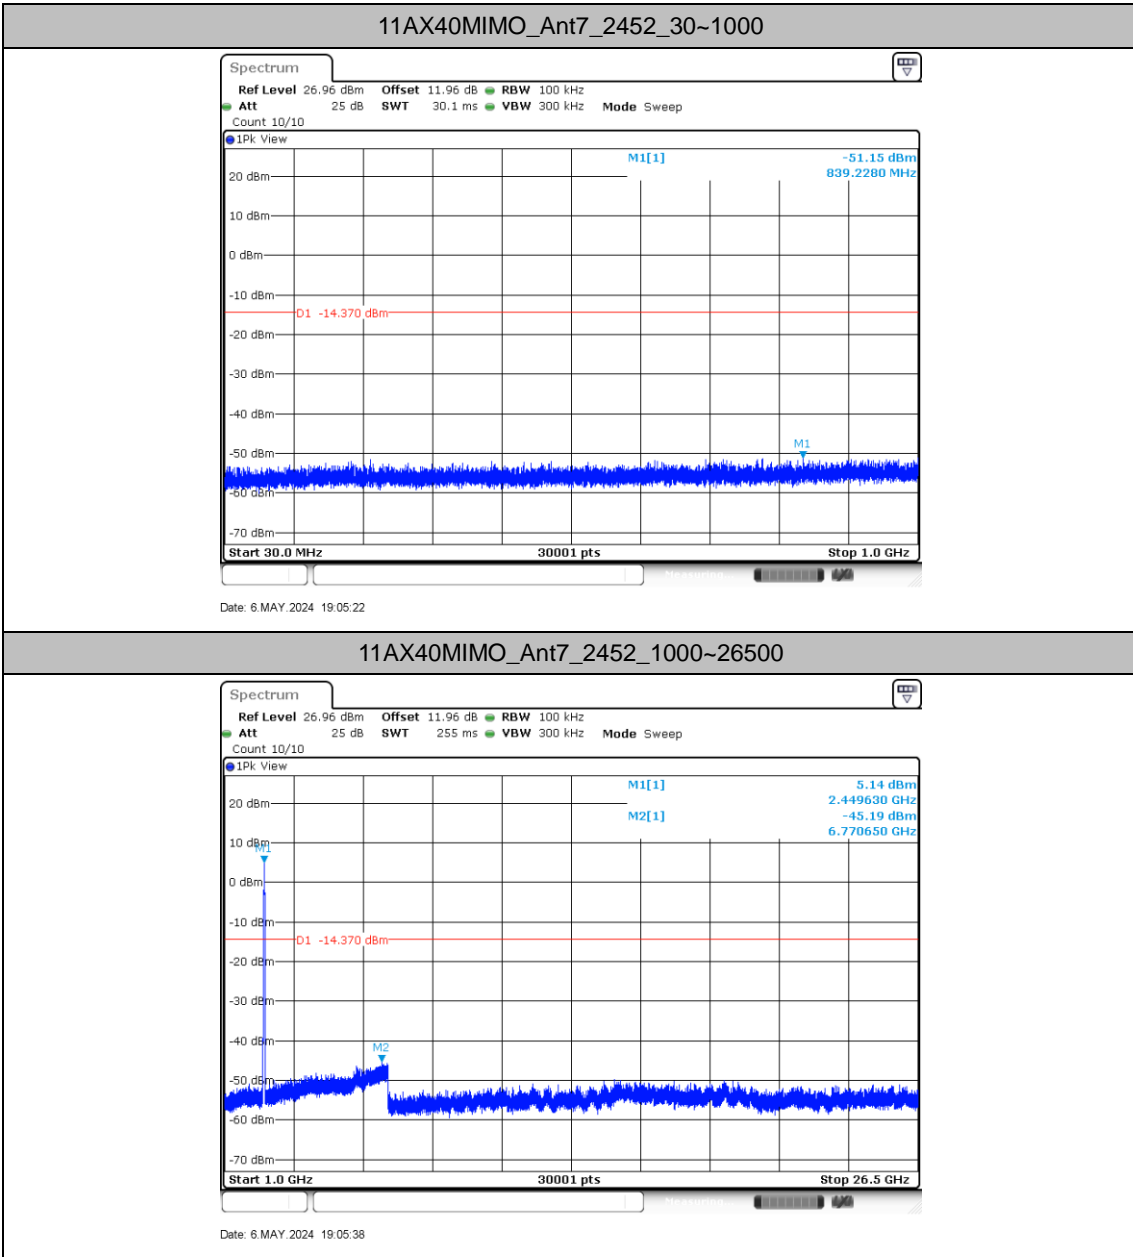



For Partial RU


Maximum power spectral density


Test Result

TestMode	Antenna	Freq(MHz)	RuSize	RuIndex	Result [dBm/3kHz]	Limit [dBm/3kHz]	Verdict
11AX20MIMO	16	2412	26Tone	RU0	-7.17	≤8.00	PASS
			52Tone	RU37	-8.46	≤8.00	PASS
			106Tone	RU53	-7.99	≤8.00	PASS
	7	2412	26Tone	RU0	-7.64	≤8.00	PASS
			52Tone	RU37	-6.68	≤8.00	PASS
			106Tone	RU53	-6.61	≤8.00	PASS
	total	2412	26Tone	RU0	-4.39	≤8.00	PASS
			52Tone	RU37	-4.47	≤8.00	PASS
			106Tone	RU53	-4.24	≤8.00	PASS
	16	2437	26Tone	RU0	-6.38	≤8.00	PASS
			52Tone	RU37	-6.15	≤8.00	PASS
			106Tone	RU53	-6.6	≤8.00	PASS
	7	2437	26Tone	RU0	-7.62	≤8.00	PASS
			52Tone	RU37	-7.57	≤8.00	PASS
			106Tone	RU53	-7.23	≤8.00	PASS
	total	2437	26Tone	RU0	-3.95	≤8.00	PASS
			52Tone	RU37	-3.79	≤8.00	PASS
			106Tone	RU53	-3.89	≤8.00	PASS
	16	2462	26Tone	RU8	-9.25	≤8.00	PASS
			52Tone	RU40	-9.01	≤8.00	PASS
			106Tone	RU54	-9.46	≤8.00	PASS
	7	2462	26Tone	RU8	-8.9	≤8.00	PASS
			52Tone	RU40	-8.7	≤8.00	PASS
			106Tone	RU54	-8.99	≤8.00	PASS
	total	2462	26Tone	RU8	-6.06	≤8.00	PASS
			52Tone	RU40	-5.84	≤8.00	PASS
			106Tone	RU54	-6.21	≤8.00	PASS




Test Graphs

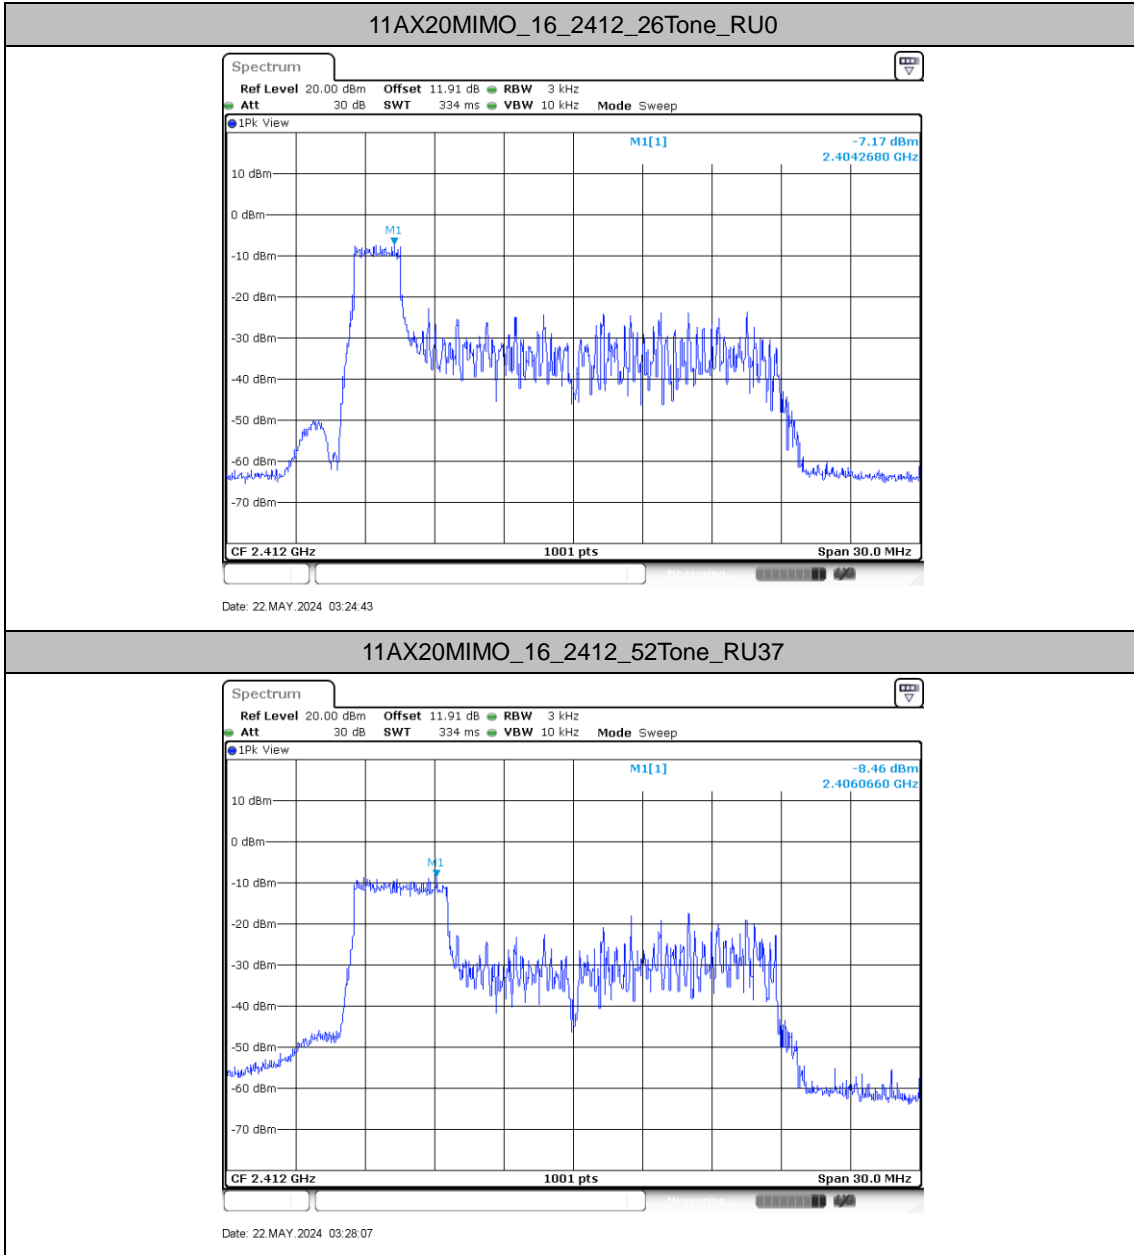

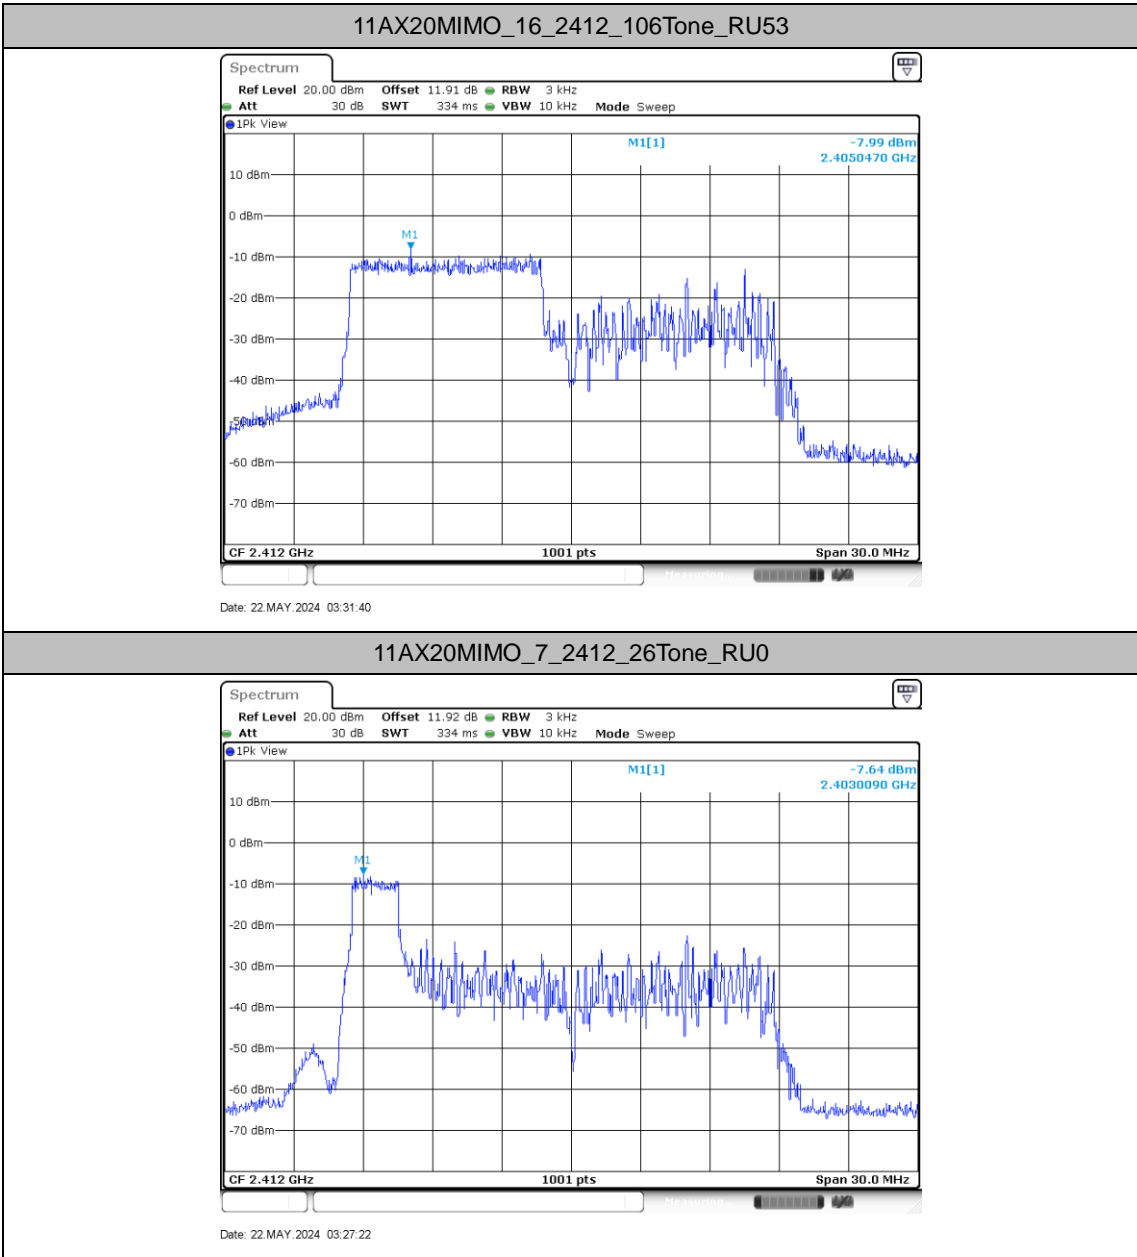




11AX20MIMO_7_2412_52Tone_RU37

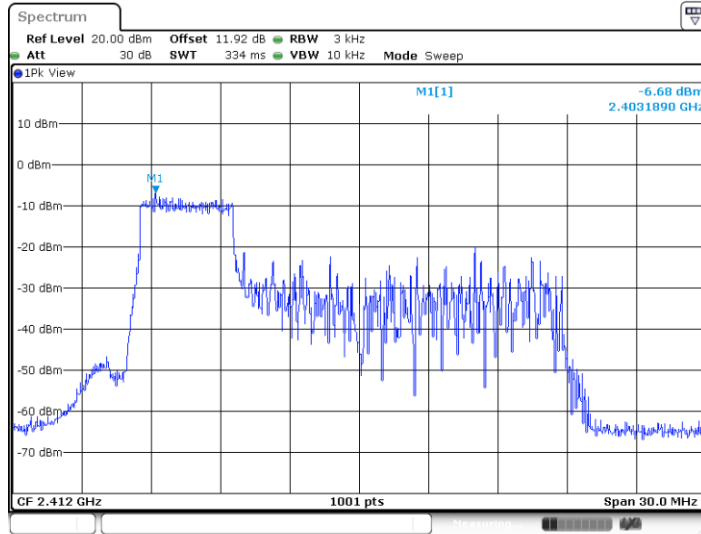

Date: 22.MAY.2024 03:30:34


11AX20MIMO_7_2412_106Tone_RU53

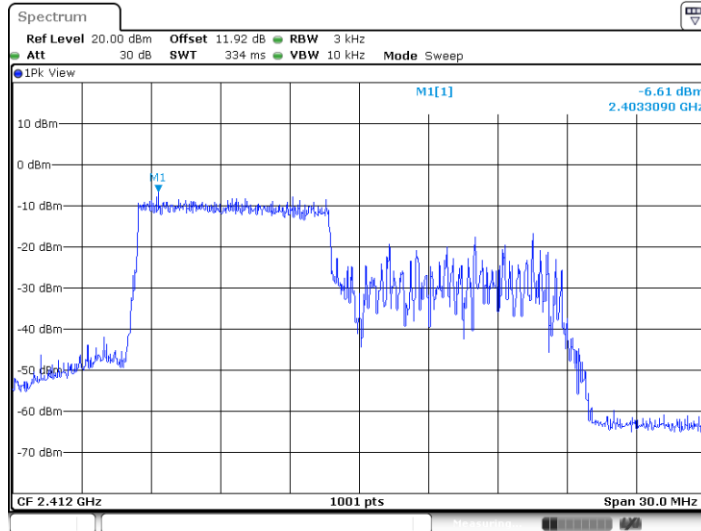

Date: 22.MAY.2024 03:32:01




11AX20MIMO_16_2437_26Tone_RU0

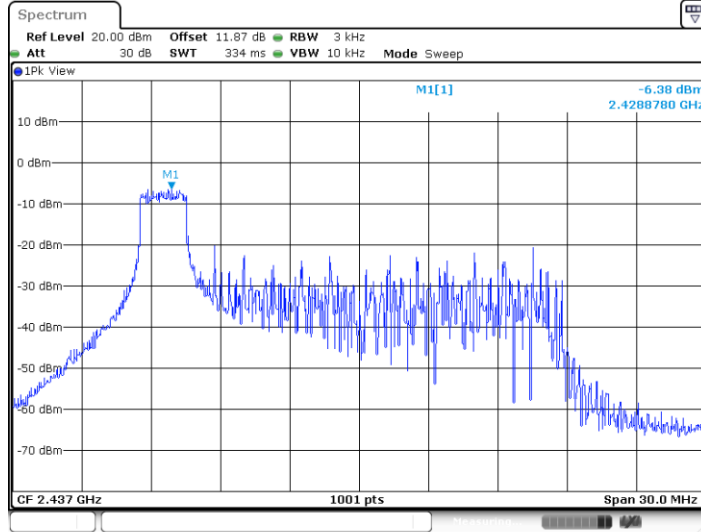

Date: 7.MAY.2024 09:57:36


11AX20MIMO_16_2437_52Tone_RU37

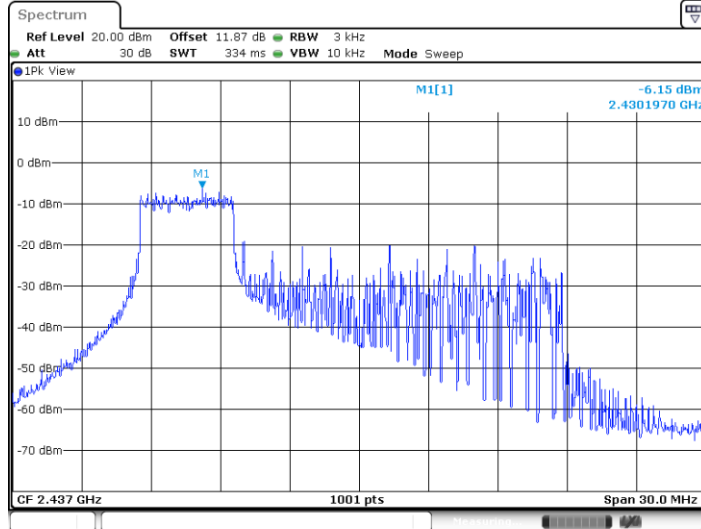

Date: 7.MAY.2024 10:02:52




11AX20MIMO_16_2437_106Tone_RU53

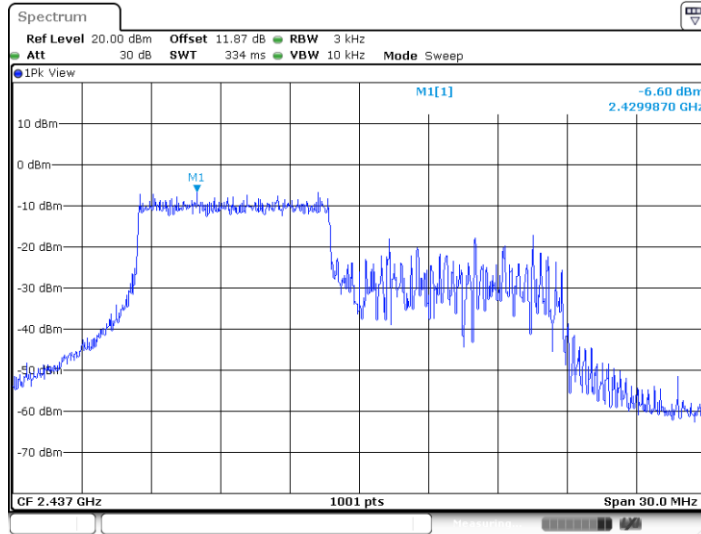

Date: 7.MAY.2024 10:04:28


11AX20MIMO_7_2437_26Tone_RU0

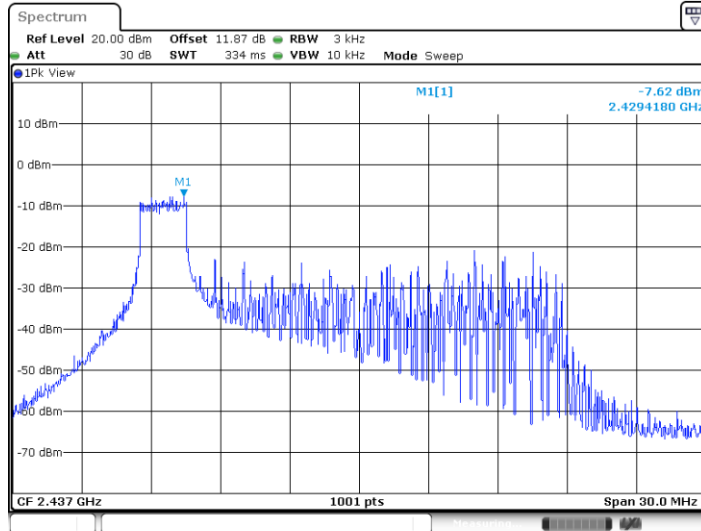

Date: 7.MAY.2024 09:57:57




11AX20MIMO_7_2437_52Tone_RU37

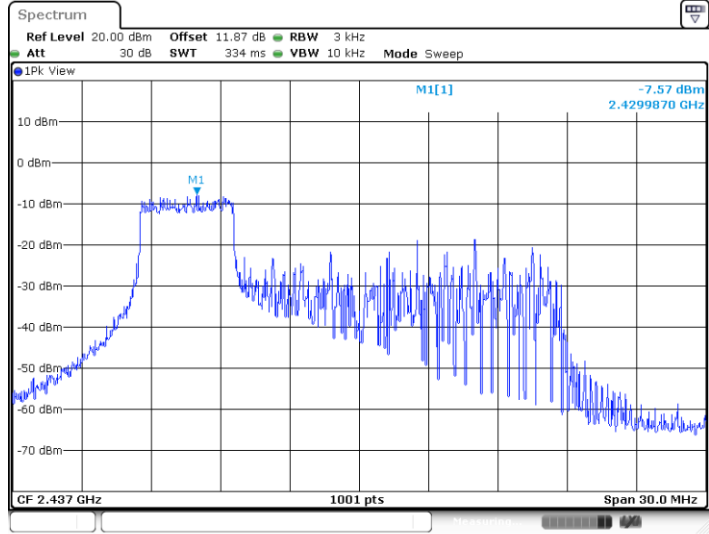

Date: 7.MAY.2024 10:03:04


11AX20MIMO_7_2437_106Tone_RU53

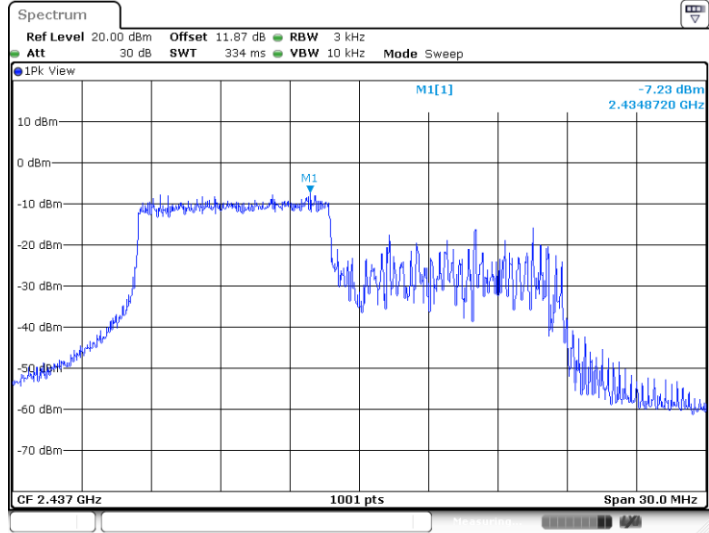


Date: 7.MAY.2024 10:04:48





11AX20MIMO_16_2462_26Tone_RU8

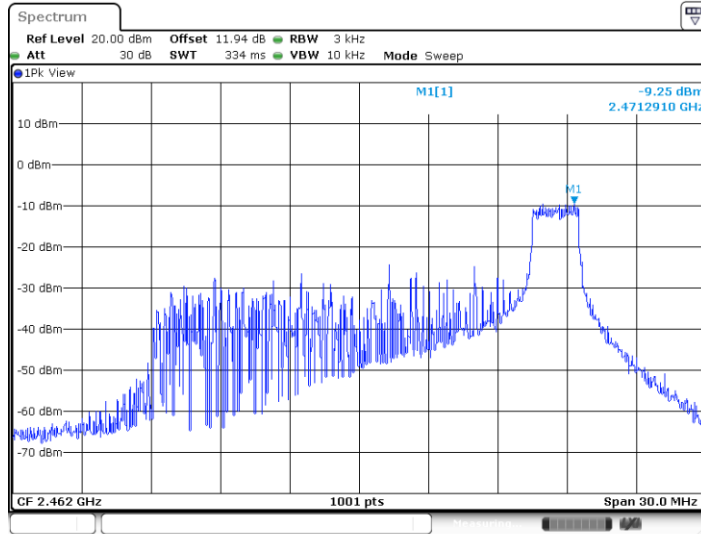

11AX20MIMO_16_2462_52Tone_RU40

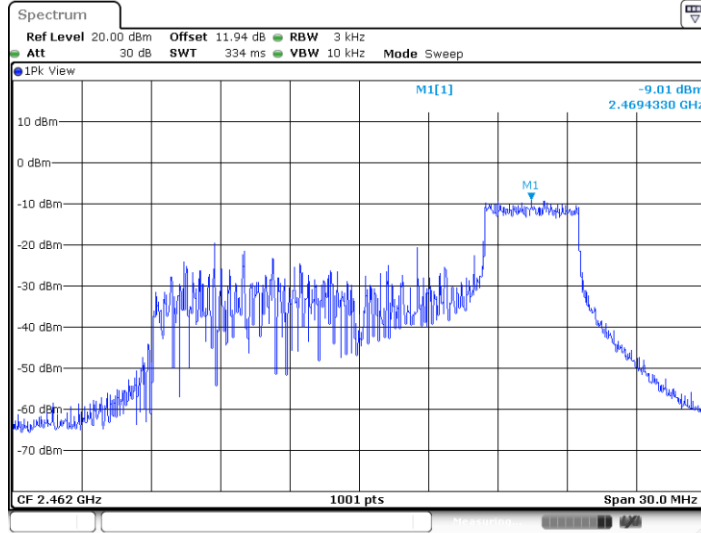

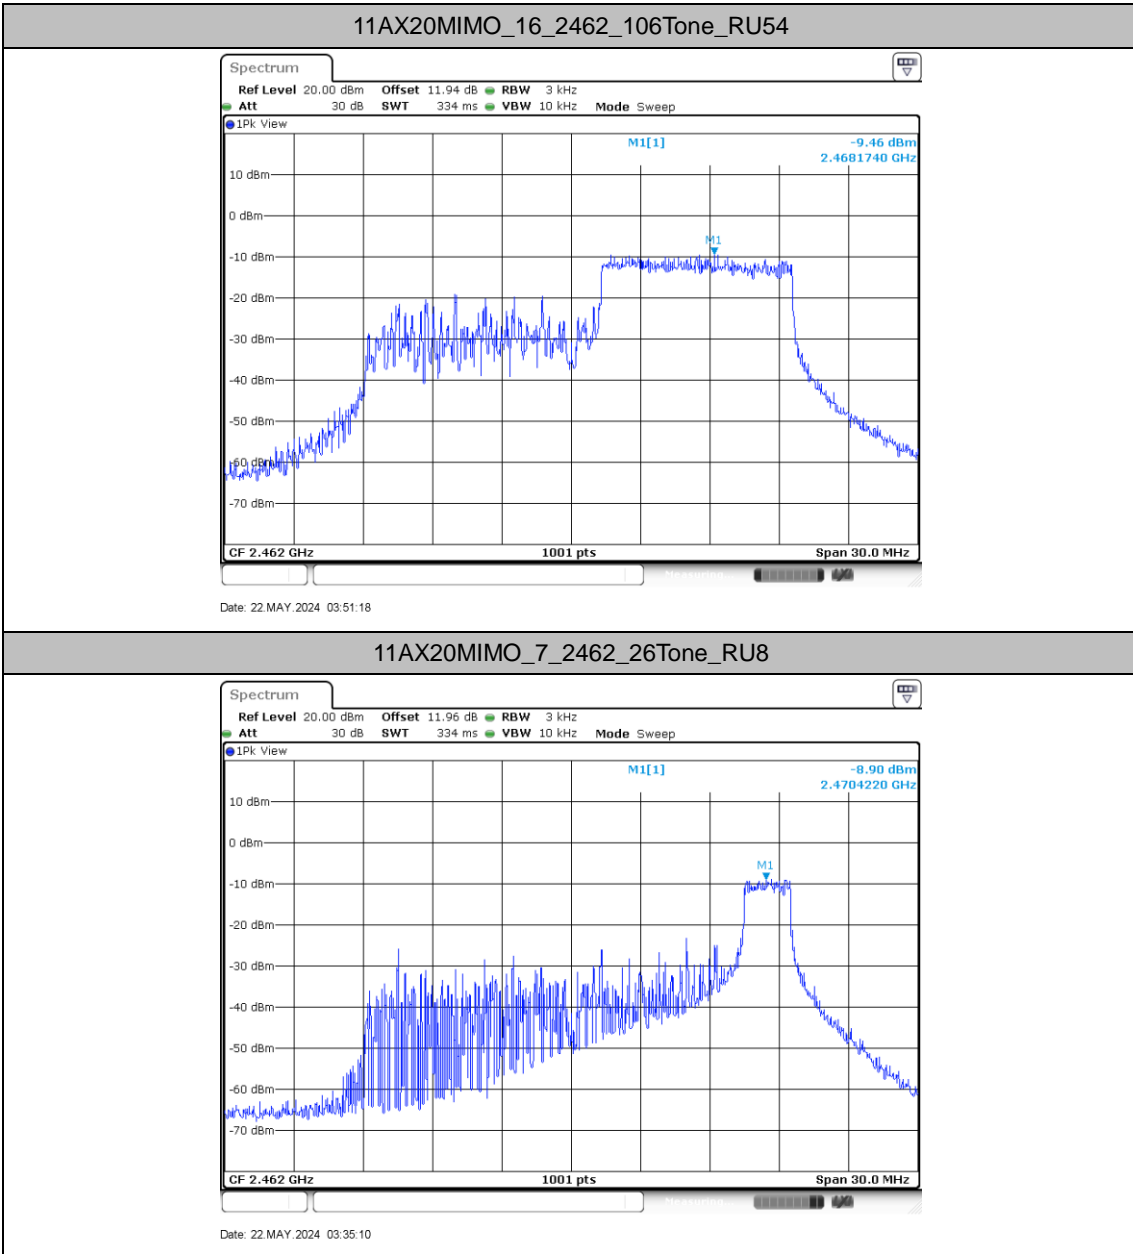


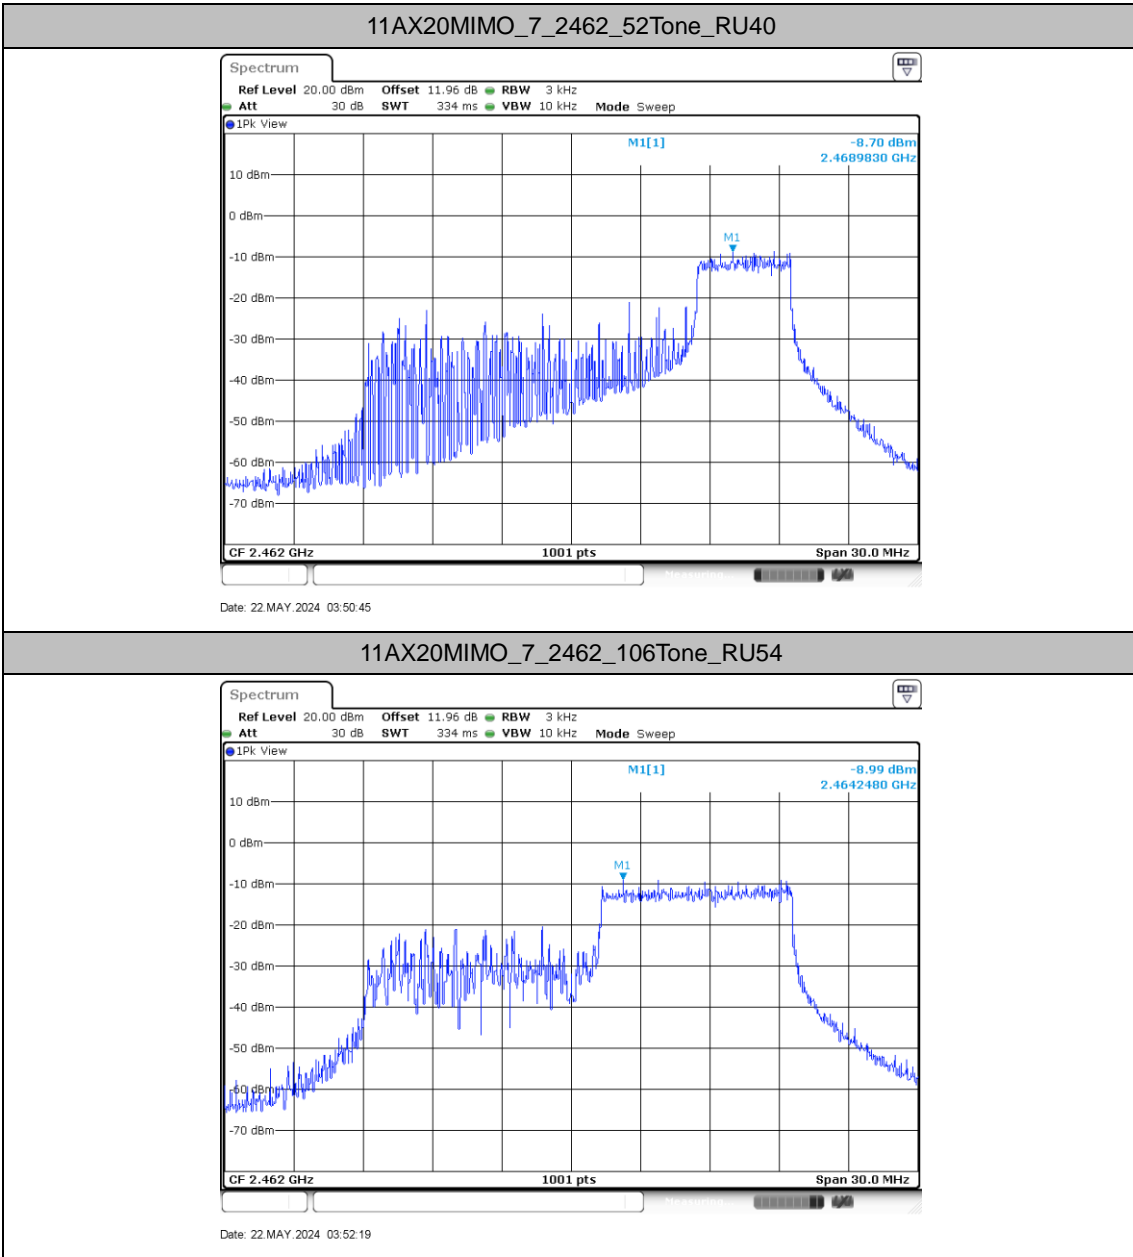



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

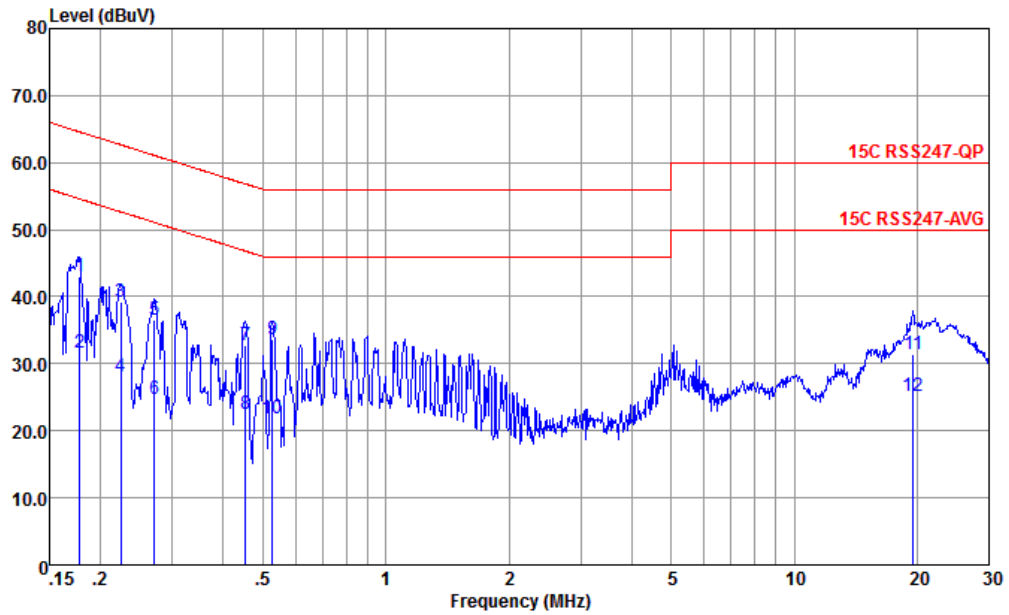


Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-L 2023 LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.178	43.05	-21.54	64.59	32.60	0.04	10.41	QP
2	0.178	31.65	-22.94	54.59	21.20	0.04	10.41	Average
3	0.224	39.22	-23.44	62.66	28.80	0.03	10.39	QP
4	0.224	28.02	-24.64	52.66	17.60	0.03	10.39	Average
5	0.272	36.59	-24.48	61.07	26.20	0.04	10.35	QP
6	0.272	24.69	-26.38	51.07	14.30	0.04	10.35	Average
7	0.454	32.83	-23.97	56.80	22.60	-0.02	10.25	QP
8	0.454	22.43	-24.37	46.80	12.20	-0.02	10.25	Average
9	0.527	33.67	-22.33	56.00	23.50	-0.04	10.21	QP
10	0.527	21.77	-24.23	46.00	11.60	-0.04	10.21	Average
11	19.532	31.48	-28.52	60.00	20.50	-0.35	11.33	QP
12	19.532	25.18	-24.82	50.00	14.20	-0.35	11.33	Average



Test Engineer :	Amos	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

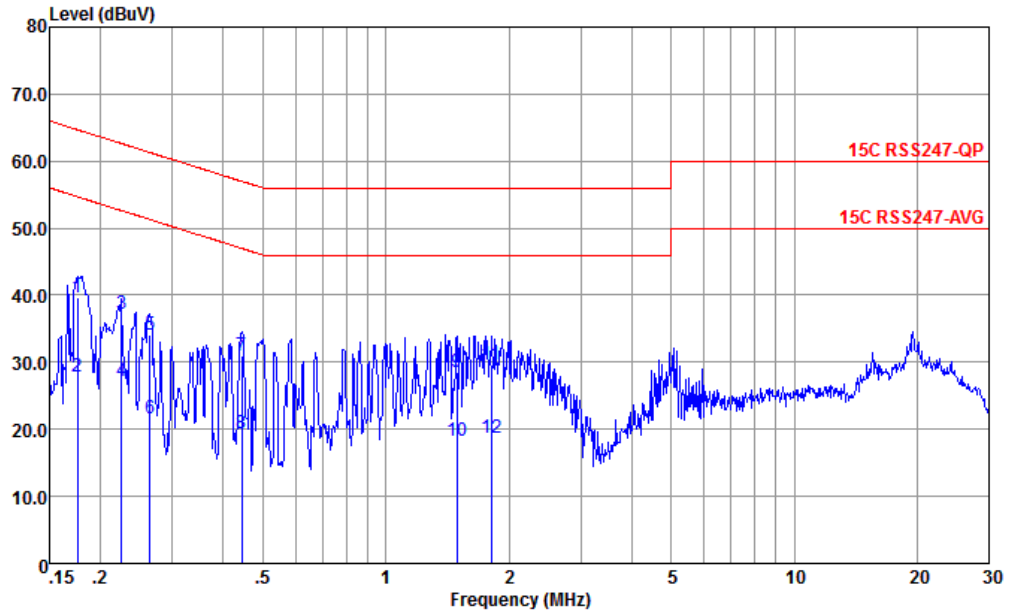

Site : CO01-KS
 Condition : 15C RSS247-QP LISN-060105-N 2023 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1 *	0.176	39.66	-25.02	64.68	29.20	0.05	10.41	QP
2	0.176	27.96	-26.72	54.68	17.50	0.05	10.41	Average
3	0.226	37.21	-25.40	62.61	26.80	0.02	10.39	QP
4	0.226	27.21	-25.40	52.61	16.80	0.02	10.39	Average
5	0.264	34.14	-27.15	61.29	23.79	-0.01	10.36	QP
6	0.264	21.54	-29.75	51.29	11.19	-0.01	10.36	Average
7	0.444	30.99	-25.99	56.98	20.80	-0.06	10.25	QP
8	0.444	19.49	-27.49	46.98	9.30	-0.06	10.25	Average
9	1.495	28.47	-27.53	56.00	18.50	-0.11	10.08	QP
10	1.495	18.17	-27.83	46.00	8.20	-0.11	10.08	Average
11	1.810	29.56	-26.44	56.00	19.60	-0.12	10.08	QP
12	1.810	18.76	-27.24	46.00	8.80	-0.12	10.08	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Carry	Relative Humidity :	48~49%
		Temperature :	24~25°C

Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	CDD 7+16	802.11b	01	2412	1Mbps	-	-
Mode 2	2400-2483.5	CDD 7+16	802.11b	06	2437	1Mbps	-	-
Mode 3	2400-2483.5	CDD 7+16	802.11b	11	2462	1Mbps	-	-
Mode 4	2400-2483.5	CDD 7+16	802.11g	01	2412	6Mbps	-	-
Mode 5	2400-2483.5	CDD 7+16	802.11g	06	2437	6Mbps	-	-
Mode 6	2400-2483.5	CDD 7+16	802.11g	11	2462	6Mbps	-	-
Mode 7	2400-2483.5	CDD 7+16	802.11ax HE20	01	2412	MCS0	Full	-
Mode 8	2400-2483.5	CDD 7+16	802.11ax HE20	06	2437	MCS0	Full	-
Mode 9	2400-2483.5	CDD 7+16	802.11ax HE20	11	2462	MCS0	Full	-
Mode 10	2400-2483.5	CDD 7+16	802.11ax HE40	03	2422	MCS0	Full	-
Mode 11	2400-2483.5	CDD 7+16	802.11ax HE40	06	2437	MCS0	Full	-
Mode 12	2400-2483.5	CDD 7+16	802.11ax HE40	09	2452	MCS0	Full	-
Mode 13	2400-2483.5	CDD 7+16	802.11ax HE20	01	2412	MCS0	Partial RU26/0	-
Mode 14	2400-2483.5	CDD 7+16	802.11ax HE20	01	2412	MCS0	Partial RU52/37	-
Mode 15	2400-2483.5	CDD 7+16	802.11ax HE20	01	2412	MCS0	Partial RU106/53	-
Mode 16	2400-2483.5	CDD 7+16	802.11ax HE20	11	2462	MCS0	Partial RU26/8	-
Mode 17	2400-2483.5	CDD 7+16	802.11ax HE20	11	2462	MCS0	Partial RU52/40	-
Mode 18	2400-2483.5	CDD 7+16	802.11ax HE20	11	2462	MCS0	Partial RU106/54	-
Mode 21	2400-2483.5	CDD 7+16	802.11g LF	11	2462	6Mbps	-	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11b	01	2389.95	41.57	54.00	-12.43	H	AVERAGE	Pass	Band Edge
1	802.11b	01	4824.00	41.47	74.00	-32.53	H	PEAK	Pass	Harmonic
2	802.11b	06	-	-	-	-	-	-	-	Band Edge
2	802.11b	06	7311.00	42.32	74.00	-31.68	H	PEAK	Pass	Harmonic
3	802.11b	11	2483.50	39.12	54.00	-14.88	V	AVERAGE	Pass	Band Edge
3	802.11b	11	7386.00	43.18	74.00	-30.82	H	PEAK	Pass	Harmonic
4	802.11g	01	2389.95	49.36	54.00	-4.64	H	AVERAGE	Pass	Band Edge
4	802.11g	01	4824.00	41.77	74.00	-32.23	H	PEAK	Pass	Harmonic
5	802.11g	06	-	-	-	-	-	-	-	Band Edge
5	802.11g	06	7311.00	42.70	74.00	-31.30	V	PEAK	Pass	Harmonic
6	802.11g	11	2484.34	50.69	54.00	-3.31	H	AVERAGE	Pass	Band Edge
6	802.11g	11	7386.00	42.51	74.00	-31.49	H	PEAK	Pass	Harmonic
7	802.11ax HE20	01	2388.65	49.57	54.00	-4.43	H	AVERAGE	Pass	Band Edge
7	802.11ax HE20	01	4824.00	41.42	74.00	-32.58	V	PEAK	Pass	Harmonic
8	802.11ax HE20	06	-	-	-	-	-	-	-	Band Edge
8	802.11ax HE20	06	7311.00	42.73	74.00	-31.27	H	PEAK	Pass	Harmonic
9	802.11ax HE20	11	2484.52	50.42	54.00	-3.58	H	AVERAGE	Pass	Band Edge
9	802.11ax HE20	11	7386.00	42.75	74.00	-31.25	H	PEAK	Pass	Harmonic
10	802.11ax HE40	03	2389.69	49.93	54.00	-4.07	H	AVERAGE	Pass	Band Edge
10	802.11ax HE40	03	7266.00	42.85	74.00	-31.15	H	PEAK	Pass	Harmonic
11	802.11ax HE40	06	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE40	06	4874.00	43.41	74.00	-30.59	V	PEAK	Pass	Harmonic
12	802.11ax HE40	09	2484.34	49.41	54.00	-4.59	H	AVERAGE	Pass	Band Edge
12	802.11ax HE40	09	7356.00	42.38	74.00	-31.62	H	PEAK	Pass	Harmonic
13	802.11ax HE20	01	2387.22	35.15	54.00	-18.85	H	AVERAGE	Pass	Band Edge
13	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
14	802.11ax HE20	01	2389.69	39.35	54.00	-14.65	H	AVERAGE	Pass	Band Edge
14	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
15	802.11ax HE20	01	2389.82	50.09	54.00	-3.91	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	01	-	-	-	-	-	-	-	Harmonic
16	802.11ax HE20	11	2487.23	36.60	54.00	-17.40	H	AVERAGE	Pass	Band Edge
16	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
17	802.11ax HE20	11	2484.88	43.74	54.00	-10.26	H	AVERAGE	Pass	Band Edge
17	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
18	802.11ax HE20	11	2484.88	48.05	54.00	-5.95	H	AVERAGE	Pass	Band Edge
18	802.11ax HE20	11	-	-	-	-	-	-	-	Harmonic
21	802.11g	11	951.50	31.77	46.00	-14.23	H	PEAK	Pass	LF



Mode	1																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH01_2412MHz																																																																																			
ANT	CDD 7+16																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>51.58</td> <td>74.00</td> <td>-22.42</td> <td>43.45</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.82	51.58	74.00	-22.42	43.45	31.83	7.16	36.86	6.00	100	116	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>113.39</td> <td>-----</td> <td>-----</td> <td>105.08</td> <td>31.96</td> <td>7.21</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>116</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	113.39	-----	-----	105.08	31.96	7.21	36.86	6.00	100	116	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.82	51.58	74.00	-22.42	43.45	31.83	7.16	36.86	6.00	100	116	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	113.39	-----	-----	105.08	31.96	7.21	36.86	6.00	100	116	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>41.57</td> <td>54.00</td> <td>-12.43</td> <td>33.44</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	41.57	54.00	-12.43	33.44	31.83	7.16	36.86	6.00	100	116	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>109.04</td> <td>-----</td> <td>-----</td> <td>100.73</td> <td>31.96</td> <td>7.21</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>116</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	109.04	-----	-----	100.73	31.96	7.21	36.86	6.00	100	116	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	41.57	54.00	-12.43	33.44	31.83	7.16	36.86	6.00	100	116	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	109.04	-----	-----	100.73	31.96	7.21	36.86	6.00	100	116	AVERAGE																																																																								



Mode	1																																																															
	Band Edge																																																															
	2400-2483.5_802.11b_CH01_2412MHz																																																															
ANT	CDD 7+16																																																															
Pol.	Vertical	Fundamental																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.82</td> <td>50.16</td> <td>74.00</td> <td>-23.84</td> <td>42.03</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>364</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	2389.82	50.16	74.00	-23.84	42.03	31.83	7.16	36.86	6.00	364	44	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>108.10</td> <td>-----</td> <td>-----</td> <td>99.81</td> <td>31.95</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>364</td> <td>44</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	2412.00	108.10	-----	-----	99.81	31.95	7.20	36.86	6.00	364	44	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	2389.82	50.16	74.00	-23.84	42.03	31.83	7.16	36.86	6.00	364	44	PEAK																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	2412.00	108.10	-----	-----	99.81	31.95	7.20	36.86	6.00	364	44	PEAK																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.43</td> <td>40.27</td> <td>54.00</td> <td>-13.73</td> <td>32.14</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>364</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	2389.43	40.27	54.00	-13.73	32.14	31.83	7.16	36.86	6.00	364	44	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>103.66</td> <td>-----</td> <td>-----</td> <td>95.37</td> <td>31.95</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>364</td> <td>44</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg	1	2412.00	103.66	-----	-----	95.37	31.95	7.20	36.86	6.00	364	44	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	2389.43	40.27	54.00	-13.73	32.14	31.83	7.16	36.86	6.00	364	44	AVERAGE																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor	cm	deg																																																								
1	2412.00	103.66	-----	-----	95.37	31.95	7.20	36.86	6.00	364	44	AVERAGE																																																				







Mode	1																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11b_CH01_2412MHz																																																																																	
ANT	CDD 7+16																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.47</td> <td>74.00</td> <td>-32.53</td> <td>62.87</td> <td>34.05</td> <td>10.29</td> <td>65.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.47	74.00	-32.53	62.87	34.05	10.29	65.74	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>40.71</td> <td>74.00</td> <td>-33.29</td> <td>62.11</td> <td>34.05</td> <td>10.29</td> <td>65.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	40.71	74.00	-33.29	62.11	34.05	10.29	65.74	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4824.00	41.47	74.00	-32.53	62.87	34.05	10.29	65.74	0.00	--	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4824.00	40.71	74.00	-33.29	62.11	34.05	10.29	65.74	0.00	--	PEAK																																																																							



Mode	2																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_802.11b_CH06_2437MHz																																																																																																																	
ANT	CDD 7+16																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.22</td> <td>74.00</td> <td>-32.78</td> <td>62.73</td> <td>33.95</td> <td>10.34</td> <td>65.80</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>42.32</td> <td>74.00</td> <td>-31.68</td> <td>60.21</td> <td>35.60</td> <td>12.78</td> <td>66.27</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.22	74.00	-32.78	62.73	33.95	10.34	65.80	0.00	--	--	PEAK	2	7311.00	42.32	74.00	-31.68	60.21	35.60	12.78	66.27	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>40.97</td> <td>74.00</td> <td>-33.03</td> <td>62.48</td> <td>33.95</td> <td>10.34</td> <td>65.80</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>41.84</td> <td>74.00</td> <td>-32.16</td> <td>59.73</td> <td>35.60</td> <td>12.78</td> <td>66.27</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.97	74.00	-33.03	62.48	33.95	10.34	65.80	0.00	--	--	PEAK	2	7311.00	41.84	74.00	-32.16	59.73	35.60	12.78	66.27	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4874.00	41.22	74.00	-32.78	62.73	33.95	10.34	65.80	0.00	--	--	PEAK																																																																																																						
2	7311.00	42.32	74.00	-31.68	60.21	35.60	12.78	66.27	0.00	--	--	PEAK																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4874.00	40.97	74.00	-33.03	62.48	33.95	10.34	65.80	0.00	--	--	PEAK																																																																																																						
2	7311.00	41.84	74.00	-32.16	59.73	35.60	12.78	66.27	0.00	--	--	PEAK																																																																																																						

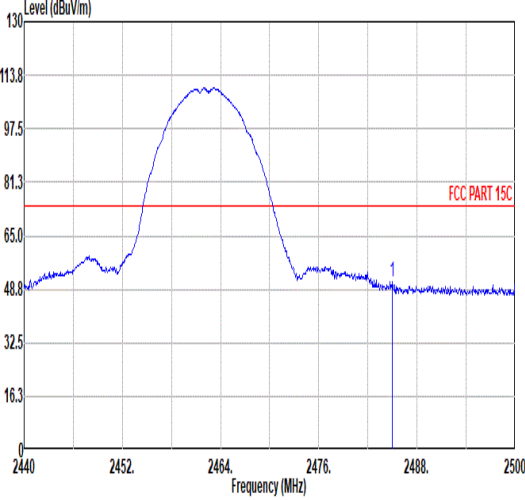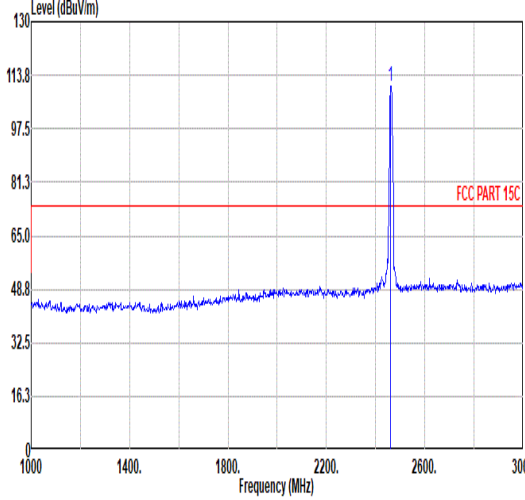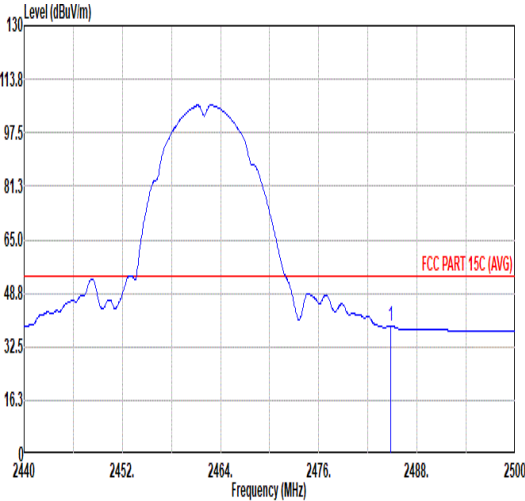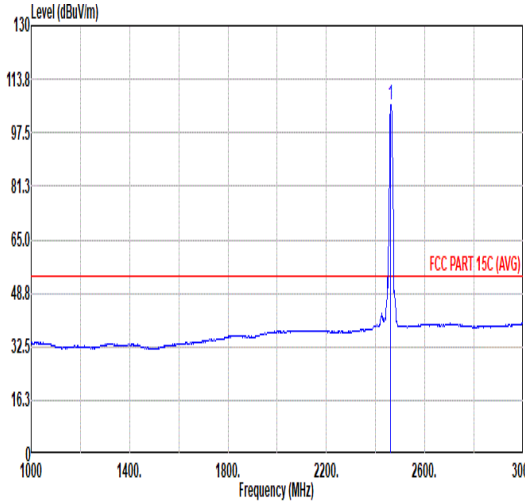

Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	CDD 7+16																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <table border="1" data-bbox="268 1120 794 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.00</td> <td>51.22</td> <td>74.00</td> <td>-22.78</td> <td>42.50</td> <td>32.24</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>165</td> <td>229</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2485.00	51.22	74.00	-22.78	42.50	32.24	7.33	36.85	6.00	165	229	PEAK	 <table border="1" data-bbox="906 1120 1433 1243"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>110.32</td> <td>-----</td> <td>-----</td> <td>101.73</td> <td>32.15</td> <td>7.29</td> <td>36.85</td> <td>6.00</td> <td>165</td> <td>229</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	110.32	-----	-----	101.73	32.15	7.29	36.85	6.00	165	229	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2485.00	51.22	74.00	-22.78	42.50	32.24	7.33	36.85	6.00	165	229	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	110.32	-----	-----	101.73	32.15	7.29	36.85	6.00	165	229	PEAK																																																																								
Avg	 <table border="1" data-bbox="268 1796 794 1919"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.76</td> <td>38.78</td> <td>54.00</td> <td>-15.22</td> <td>30.06</td> <td>32.24</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>165</td> <td>229</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.76	38.78	54.00	-15.22	30.06	32.24	7.33	36.85	6.00	165	229	AVERAGE	 <table border="1" data-bbox="906 1796 1433 1919"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>106.03</td> <td>-----</td> <td>-----</td> <td>97.42</td> <td>32.16</td> <td>7.30</td> <td>36.85</td> <td>6.00</td> <td>165</td> <td>229</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.03	-----	-----	97.42	32.16	7.30	36.85	6.00	165	229	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2484.76	38.78	54.00	-15.22	30.06	32.24	7.33	36.85	6.00	165	229	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	106.03	-----	-----	97.42	32.16	7.30	36.85	6.00	165	229	AVERAGE																																																																								







Mode	3																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11b_CH11_2462MHz																																																																																			
ANT	CDD 7+16																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.12</td> <td>51.05</td> <td>74.00</td> <td>-22.95</td> <td>42.31</td> <td>32.25</td> <td>7.34</td> <td>36.85</td> <td>6.00</td> <td>383</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2488.12	51.05	74.00	-22.95	42.31	32.25	7.34	36.85	6.00	383	76	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>106.94</td> <td>-----</td> <td>-----</td> <td>98.33</td> <td>32.16</td> <td>7.30</td> <td>36.85</td> <td>6.00</td> <td>383</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	106.94	-----	-----	98.33	32.16	7.30	36.85	6.00	383	76	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2488.12	51.05	74.00	-22.95	42.31	32.25	7.34	36.85	6.00	383	76	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	106.94	-----	-----	98.33	32.16	7.30	36.85	6.00	383	76	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2483.50</td> <td>39.12</td> <td>54.00</td> <td>-14.88</td> <td>30.41</td> <td>32.23</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>383</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2483.50	39.12	54.00	-14.88	30.41	32.23	7.33	36.85	6.00	383	76	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>102.74</td> <td>-----</td> <td>-----</td> <td>94.13</td> <td>32.16</td> <td>7.30</td> <td>36.85</td> <td>6.00</td> <td>383</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	102.74	-----	-----	94.13	32.16	7.30	36.85	6.00	383	76	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2483.50	39.12	54.00	-14.88	30.41	32.23	7.33	36.85	6.00	383	76	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	102.74	-----	-----	94.13	32.16	7.30	36.85	6.00	383	76	AVERAGE																																																																								



Mode	3																																																																																																					
	Harmonic																																																																																																					
	2400-2483.5_802.11b_CH11_2462MHz																																																																																																					
ANT	CDD 7+16																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>42.23</td> <td>74.00</td> <td>-31.77</td> <td>63.78</td> <td>33.92</td> <td>10.40</td> <td>65.87</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>43.18</td> <td>74.00</td> <td>-30.82</td> <td>61.11</td> <td>35.60</td> <td>12.88</td> <td>66.41</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	42.23	74.00	-31.77	63.78	33.92	10.40	65.87	0.00	--	--	PEAK	2	7386.00	43.18	74.00	-30.82	61.11	35.60	12.88	66.41	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4924.00</td> <td>41.57</td> <td>74.00</td> <td>-32.43</td> <td>63.12</td> <td>33.92</td> <td>10.40</td> <td>65.87</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7386.00</td> <td>42.48</td> <td>74.00</td> <td>-31.52</td> <td>60.41</td> <td>35.60</td> <td>12.88</td> <td>66.41</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4924.00	41.57	74.00	-32.43	63.12	33.92	10.40	65.87	0.00	--	--	PEAK	2	7386.00	42.48	74.00	-31.52	60.41	35.60	12.88	66.41	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	4924.00	42.23	74.00	-31.77	63.78	33.92	10.40	65.87	0.00	--	--	PEAK																																																																																										
2	7386.00	43.18	74.00	-30.82	61.11	35.60	12.88	66.41	0.00	--	--	PEAK																																																																																										
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	4924.00	41.57	74.00	-32.43	63.12	33.92	10.40	65.87	0.00	--	--	PEAK																																																																																										
2	7386.00	42.48	74.00	-31.52	60.41	35.60	12.88	66.41	0.00	--	--	PEAK																																																																																										

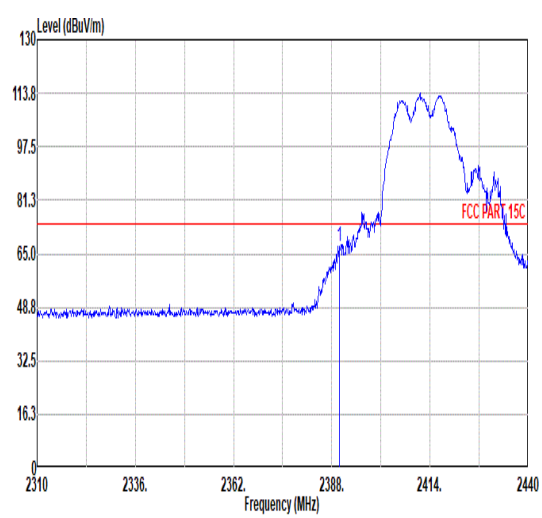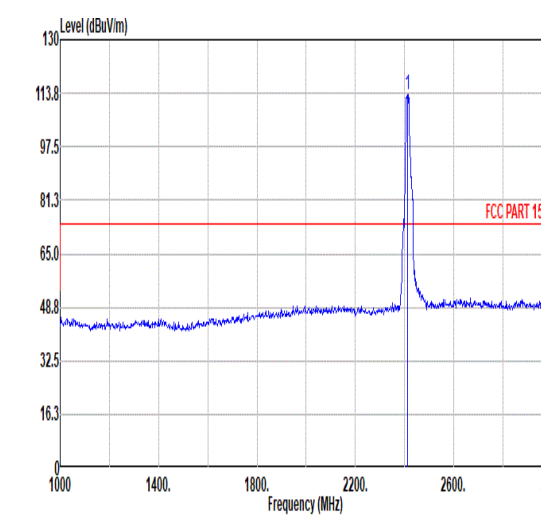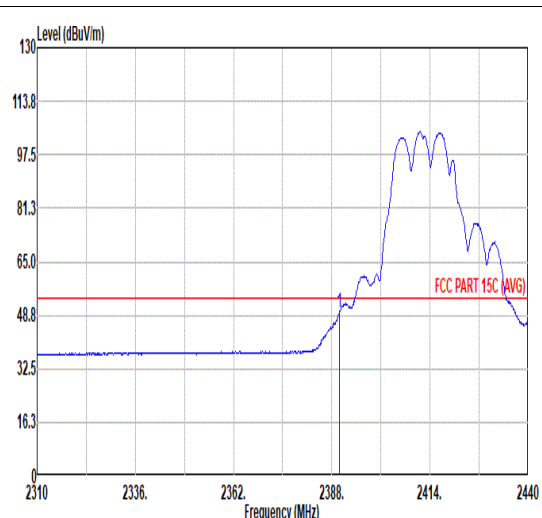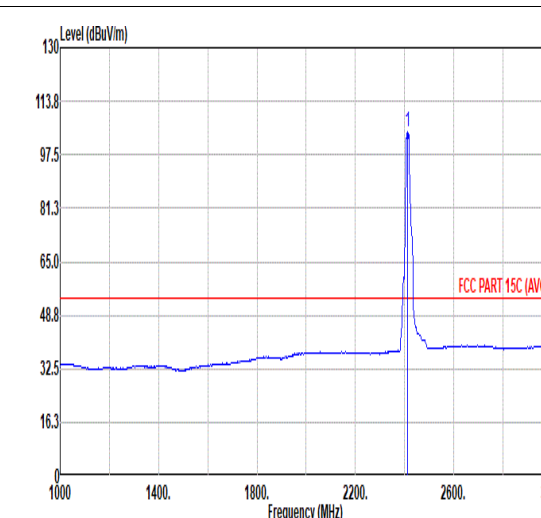

Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																			
ANT	CDD 7+16																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization. The plot shows a signal rising from 48.8 dBuV/m at 2310 MHz to a peak of approximately 113.8 dBuV/m at 2412 MHz. A red horizontal line indicates the FCC PART 15C limit at 74.00 dB.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>67.26</td> <td>74.00</td> <td>-6.74</td> <td>59.13</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>101</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	67.26	74.00	-6.74	59.13	31.83	7.16	36.86	6.00	100	101	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization. The plot shows a sharp peak at 2412.00 MHz with a level of 113.37 dBuV/m. A red horizontal line indicates the FCC PART 15C limit at 74.00 dB.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>113.37</td> <td>74.00</td> <td>49.37</td> <td>105.06</td> <td>31.96</td> <td>7.21</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>101</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	113.37	74.00	49.37	105.06	31.96	7.21	36.86	6.00	100	101	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	67.26	74.00	-6.74	59.13	31.83	7.16	36.86	6.00	100	101	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	113.37	74.00	49.37	105.06	31.96	7.21	36.86	6.00	100	101	PEAK																																																																								
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) for Horizontal polarization (Average). The plot shows a signal rising from 49.36 dBuV/m at 2310 MHz to a peak of approximately 104.30 dBuV/m at 2412 MHz. A red horizontal line indicates the FCC PART 15C (AVG) limit at 54.00 dB.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>49.36</td> <td>54.00</td> <td>-4.64</td> <td>41.23</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>101</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	49.36	54.00	-4.64	41.23	31.83	7.16	36.86	6.00	100	101	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) for Fundamental polarization (Average). The plot shows a sharp peak at 2412.00 MHz with a level of 104.30 dBuV/m. A red horizontal line indicates the FCC PART 15C (AVG) limit at 54.00 dB.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>104.30</td> <td>54.00</td> <td>50.30</td> <td>96.01</td> <td>31.95</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>100</td> <td>101</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	104.30	54.00	50.30	96.01	31.95	7.20	36.86	6.00	100	101	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	49.36	54.00	-4.64	41.23	31.83	7.16	36.86	6.00	100	101	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	104.30	54.00	50.30	96.01	31.95	7.20	36.86	6.00	100	101	AVERAGE																																																																								



Mode	4																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH01_2412MHz																																																																																			
ANT	CDD 7+16																																																																																			
Pol.	Vertical	Fundamental																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>63.00</td> <td>74.00</td> <td>-10.92</td> <td>54.95</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>399</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	63.00	74.00	-10.92	54.95	31.83	7.16	36.86	6.00	399	62	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>110.57</td> <td>-----</td> <td>-----</td> <td>102.26</td> <td>31.96</td> <td>7.21</td> <td>36.86</td> <td>6.00</td> <td>399</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	110.57	-----	-----	102.26	31.96	7.21	36.86	6.00	399	62	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	63.00	74.00	-10.92	54.95	31.83	7.16	36.86	6.00	399	62	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	110.57	-----	-----	102.26	31.96	7.21	36.86	6.00	399	62	PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2389.95</td> <td>45.49</td> <td>54.00</td> <td>-8.51</td> <td>37.36</td> <td>31.83</td> <td>7.16</td> <td>36.86</td> <td>6.00</td> <td>399</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2389.95	45.49	54.00	-8.51	37.36	31.83	7.16	36.86	6.00	399	62	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2412.00</td> <td>102.39</td> <td>-----</td> <td>-----</td> <td>94.10</td> <td>31.95</td> <td>7.20</td> <td>36.86</td> <td>6.00</td> <td>399</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2412.00	102.39	-----	-----	94.10	31.95	7.20	36.86	6.00	399	62	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2389.95	45.49	54.00	-8.51	37.36	31.83	7.16	36.86	6.00	399	62	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2412.00	102.39	-----	-----	94.10	31.95	7.20	36.86	6.00	399	62	AVERAGE																																																																								







Mode	4																																																																																	
	Harmonic																																																																																	
	2400-2483.5_802.11g_CH01_2412MHz																																																																																	
ANT	CDD 7+16																																																																																	
Pol.	Horizontal	Vertical																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.77</td> <td>74.00</td> <td>-32.23</td> <td>63.17</td> <td>34.05</td> <td>10.29</td> <td>65.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.77	74.00	-32.23	63.17	34.05	10.29	65.74	0.00	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Factor</th> <th>Factor</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4824.00</td> <td>41.40</td> <td>74.00</td> <td>-32.60</td> <td>62.80</td> <td>34.05</td> <td>10.29</td> <td>65.74</td> <td>0.00</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4824.00	41.40	74.00	-32.60	62.80	34.05	10.29	65.74	0.00	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4824.00	41.77	74.00	-32.23	63.17	34.05	10.29	65.74	0.00	--	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Factor	Factor	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	4824.00	41.40	74.00	-32.60	62.80	34.05	10.29	65.74	0.00	--	PEAK																																																																							



Mode	5																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_802.11g_CH06_2437MHz																																																																																																																	
ANT	CDD 7+16																																																																																																																	
Pol.	Horizontal	Vertical																																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>41.30</td> <td>74.00</td> <td>-32.70</td> <td>62.81</td> <td>33.95</td> <td>10.34</td> <td>65.80</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>42.03</td> <td>74.00</td> <td>-31.97</td> <td>59.92</td> <td>35.60</td> <td>12.78</td> <td>66.27</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	41.30	74.00	-32.70	62.81	33.95	10.34	65.80	0.00	--	--	PEAK	2	7311.00	42.03	74.00	-31.97	59.92	35.60	12.78	66.27	0.00	--	--	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4874.00</td> <td>40.97</td> <td>74.00</td> <td>-33.03</td> <td>62.48</td> <td>33.95</td> <td>10.34</td> <td>65.80</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>7311.00</td> <td>42.70</td> <td>74.00</td> <td>-31.30</td> <td>60.59</td> <td>35.60</td> <td>12.78</td> <td>66.27</td> <td>0.00</td> <td>--</td> <td>--</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4874.00	40.97	74.00	-33.03	62.48	33.95	10.34	65.80	0.00	--	--	PEAK	2	7311.00	42.70	74.00	-31.30	60.59	35.60	12.78	66.27	0.00	--	--	PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4874.00	41.30	74.00	-32.70	62.81	33.95	10.34	65.80	0.00	--	--	PEAK																																																																																																						
2	7311.00	42.03	74.00	-31.97	59.92	35.60	12.78	66.27	0.00	--	--	PEAK																																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Factor		cm	deg																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4874.00	40.97	74.00	-33.03	62.48	33.95	10.34	65.80	0.00	--	--	PEAK																																																																																																						
2	7311.00	42.70	74.00	-31.30	60.59	35.60	12.78	66.27	0.00	--	--	PEAK																																																																																																						

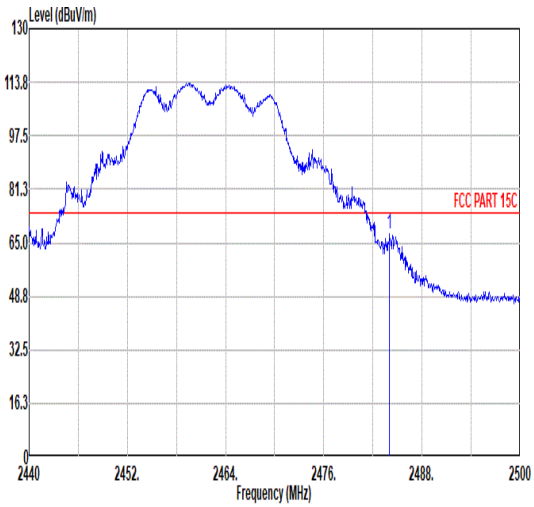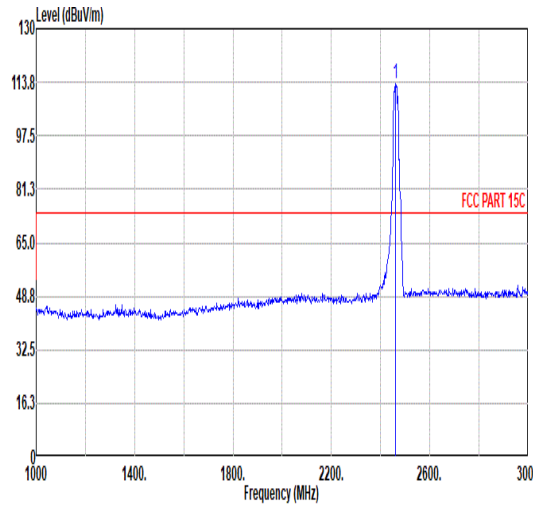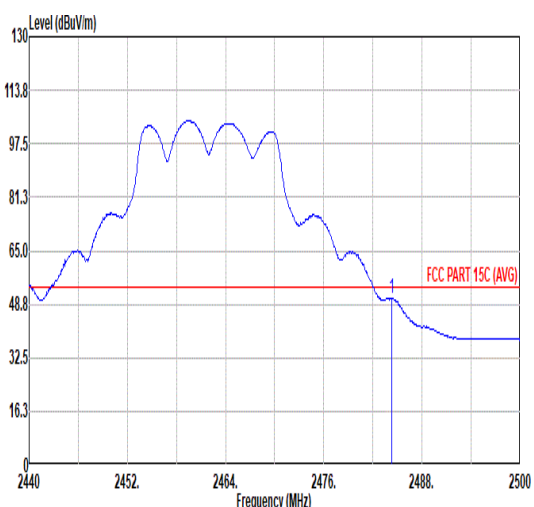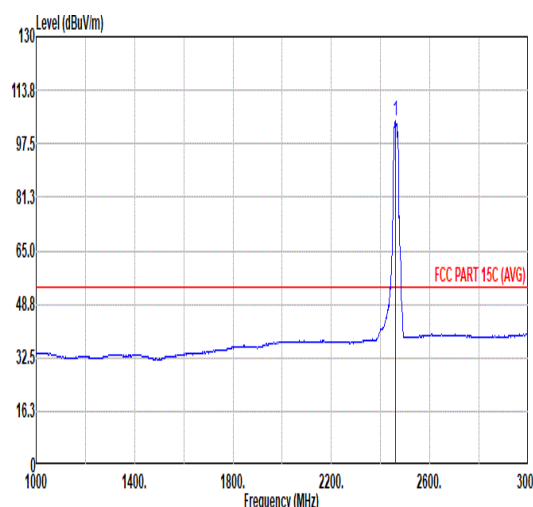

Mode	6																																																																																			
	Band Edge																																																																																			
	2400-2483.5_802.11g_CH11_2462MHz																																																																																			
ANT	CDD 7+16																																																																																			
Pol.	Horizontal	Fundamental																																																																																		
Peak	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.04</td> <td>67.59</td> <td>74.00</td> <td>-6.41</td> <td>58.87</td> <td>32.24</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>125</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.04	67.59	74.00	-6.41	58.87	32.24	7.33	36.85	6.00	125	110	PEAK	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>113.45</td> <td>-----</td> <td>-----</td> <td>104.87</td> <td>32.14</td> <td>7.29</td> <td>36.85</td> <td>6.00</td> <td>125</td> <td>110</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	113.45	-----	-----	104.87	32.14	7.29	36.85	6.00	125	110	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2484.04	67.59	74.00	-6.41	58.87	32.24	7.33	36.85	6.00	125	110	PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	113.45	-----	-----	104.87	32.14	7.29	36.85	6.00	125	110	PEAK																																																																								
Avg	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.34</td> <td>50.69</td> <td>54.00</td> <td>-3.31</td> <td>41.97</td> <td>32.24</td> <td>7.33</td> <td>36.85</td> <td>6.00</td> <td>125</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2484.34	50.69	54.00	-3.31	41.97	32.24	7.33	36.85	6.00	125	110	AVERAGE	 <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Aux</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th>Loss Factor</th> <th>Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2462.00</td> <td>104.26</td> <td>-----</td> <td>-----</td> <td>95.68</td> <td>32.14</td> <td>7.29</td> <td>36.85</td> <td>6.00</td> <td>125</td> <td>110</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2462.00	104.26	-----	-----	95.68	32.14	7.29	36.85	6.00	125	110	AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2484.34	50.69	54.00	-3.31	41.97	32.24	7.33	36.85	6.00	125	110	AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																											
1	2462.00	104.26	-----	-----	95.68	32.14	7.29	36.85	6.00	125	110	AVERAGE																																																																								