




Power measurement connection diagram:

The power measurement for 2G/3G/LTE/5G FR1/UL and DL CA is to establish a connection between device and call box, and via call box to configure Bands, channel, BWs, RB size, carrier aggregation of CA, frequency channels, SCS and maximum output power.
Hereunder is screenshot call box connection information for 2G/3G/LTE/5G FR1/UL and DL CA.

<GSM>

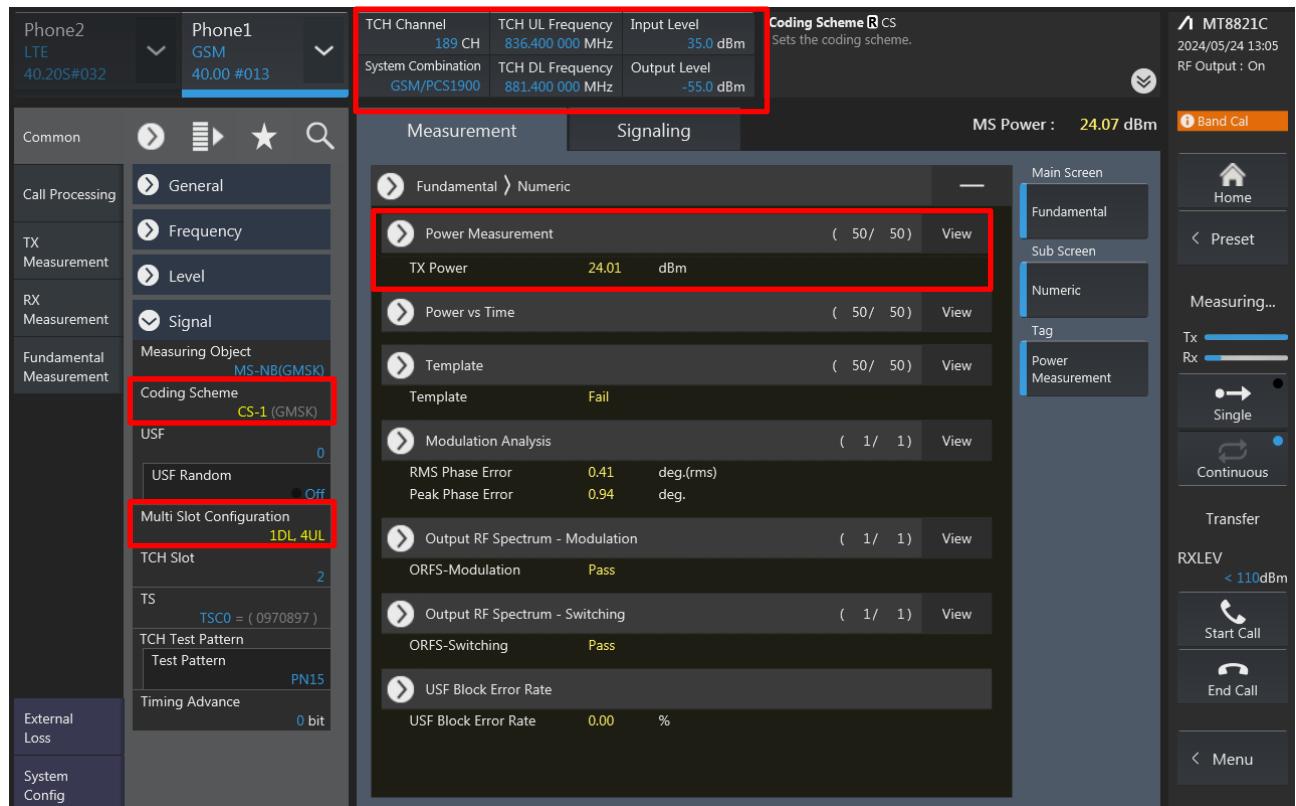



<WCDMA>


The screenshot shows the WCDMA measurement interface. The top header displays 'Phone2 LTE 40.20S#032' and 'Phone1 W-CDMA 40.00 #013'. The left sidebar includes sections for Common, Physical Channel, Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, Meas Setup, External Loss, and System Config. The 'External Loss' section is highlighted with a red box. The main panel has tabs for Measurement and Signaling. Under Measurement, there is a 'Fundamental > Numeric' section with a sub-section for 'Power Measurement' which shows 'TX Power 23.28 dBm'. Other sections include Frequency Error, Occupied Bandwidth, Spectrum Emission Mask, Adjacent Channel Power, Modulation Analysis, and Peak Code Domain Error. A right sidebar shows 'Main Screen', 'UE Power : 22.6 dBm', and various measurement parameters like 'Average Count 8 PWR_AVG'. The bottom right corner shows 'Band Cal' and 'MT8821C 2024/05/24 12:58 RF Output : On'.

<LTE>

The screenshot shows the LTE measurement interface. The top header displays 'Phone2 LTE 40.20S#021' and 'Phone1 LTE 40.20S#021'. The left sidebar includes sections for Common, Physical Channel, Call Processing, TX Measurement, RX Measurement, Fundamental Measurement, Test Parameter, Band Definition, External Loss, and System Config. The 'Test Parameter' section is highlighted with a red box. The main panel has tabs for Measurement and Signaling. Under Measurement, there is a 'Numeric' section with a sub-section for 'TX Power 23.01 dBm'. Other sections include Occupied Bandwidth, Spectrum Emission Mask, Adjacent Channel Power, In-Band Emission, Spectrum Flatness, EVM, Phase Error, Magnitude Error, Constellation, and Throughput. A right sidebar shows 'Main Screen', 'UE Power : 23.4 dBm', and various measurement parameters like 'External Loss - Main DL DLEXLOSS'. The bottom right corner shows 'Connected' and 'MT8821C 2024/05/31 13:15 RF Output : On'.






<LTE TDD Power class 3>

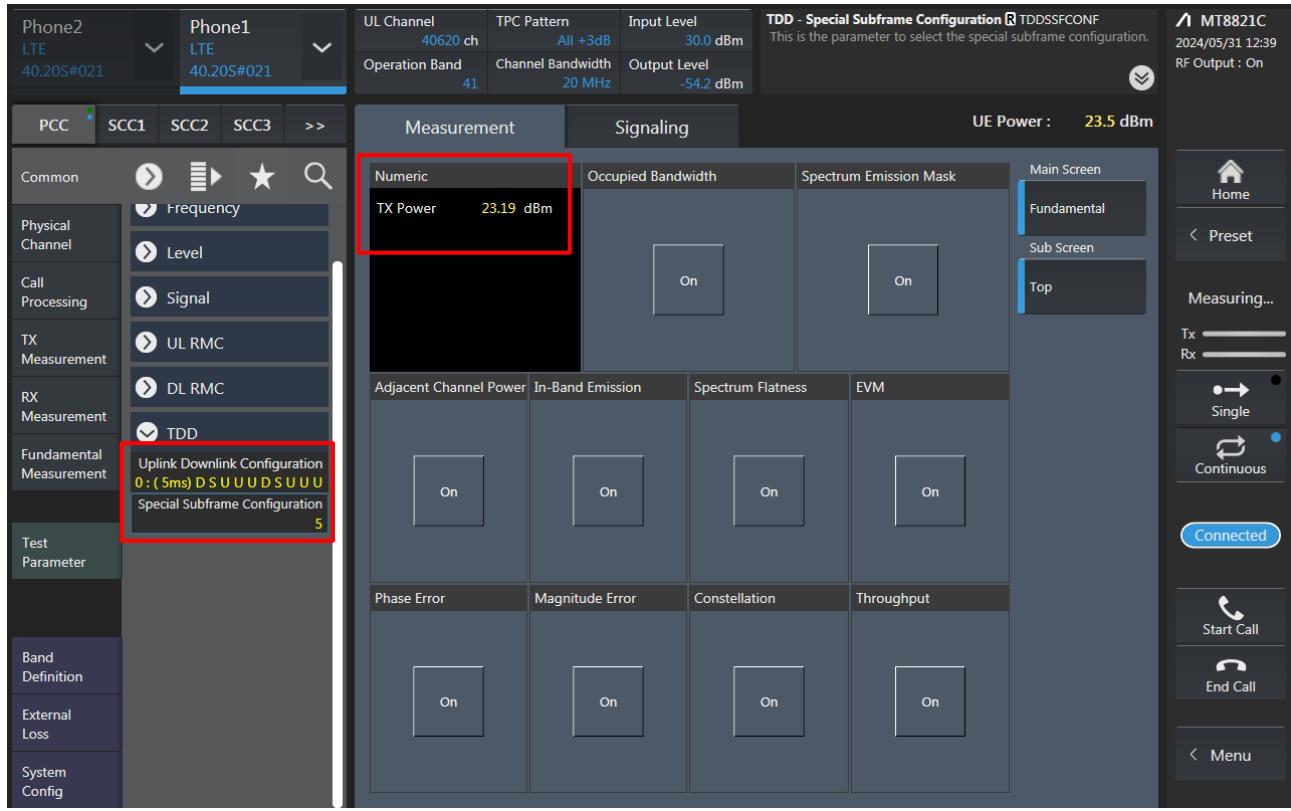




<5GNR FR1>

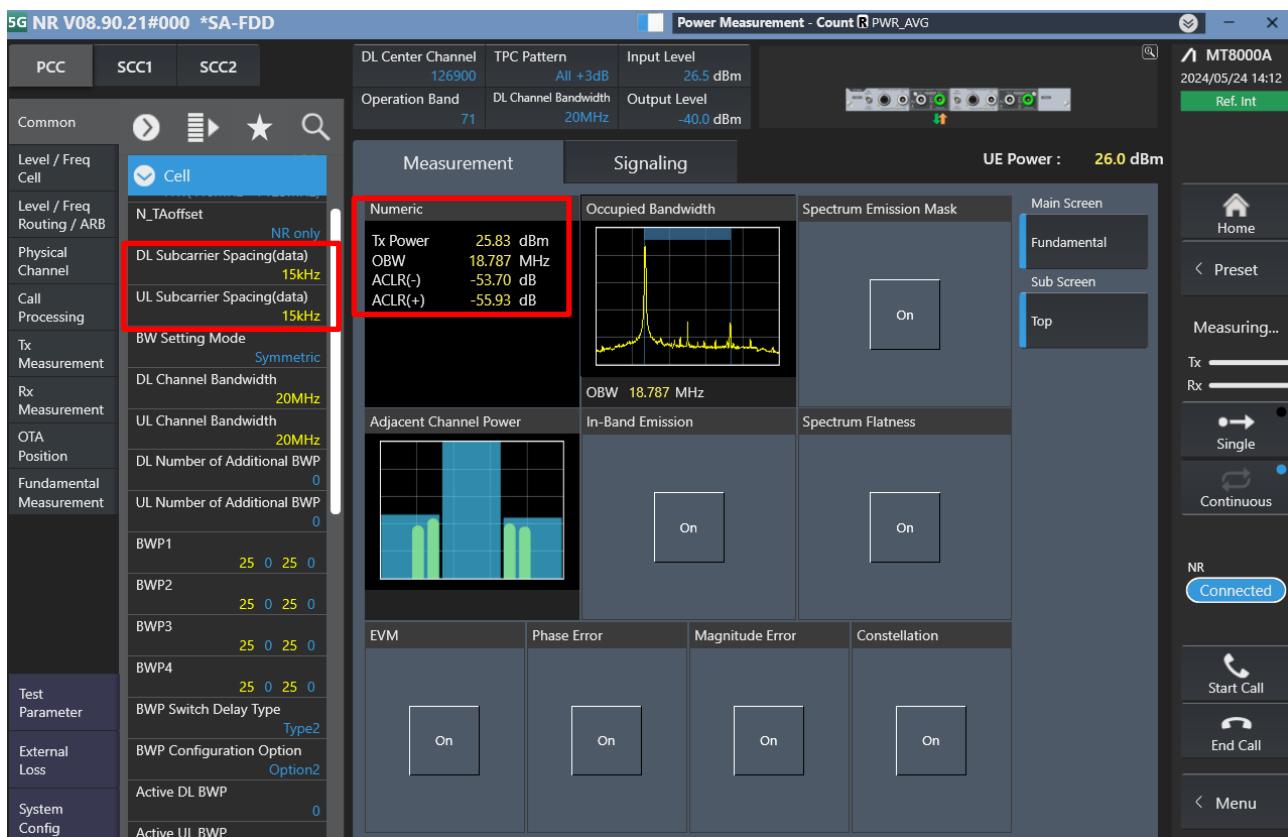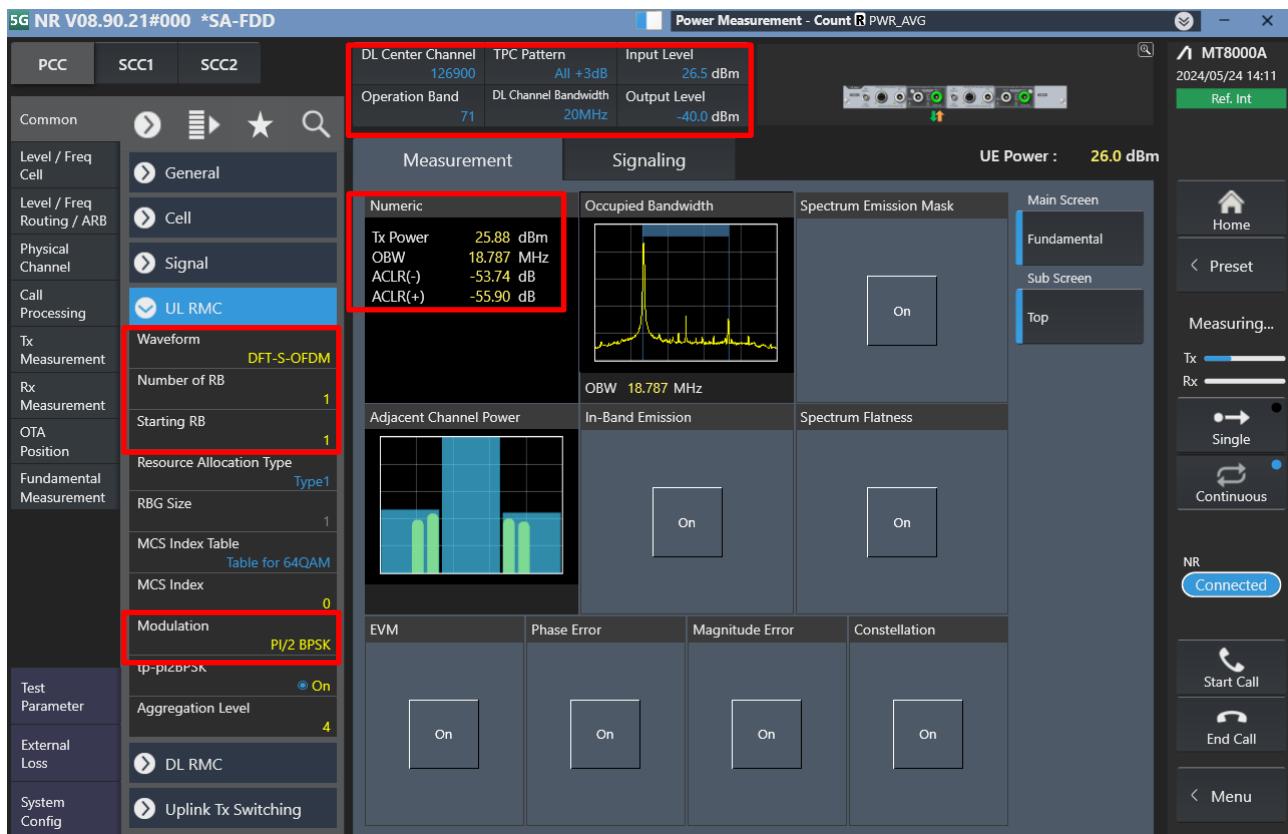

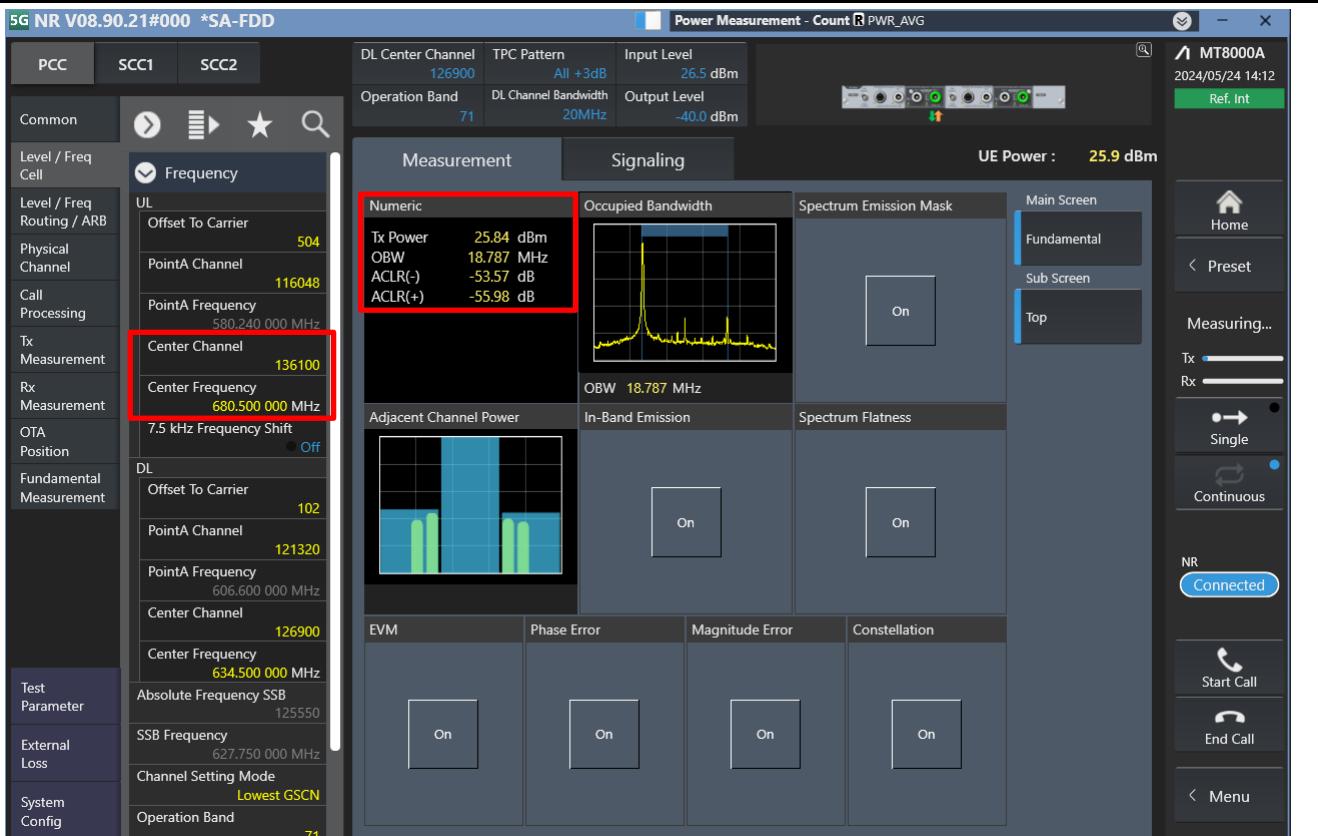

LTE Uplink and Downlink Carrier Aggregation configurations:

- Change the Scenario in the Configuration of Phone1 LTE Signaling and Preset.

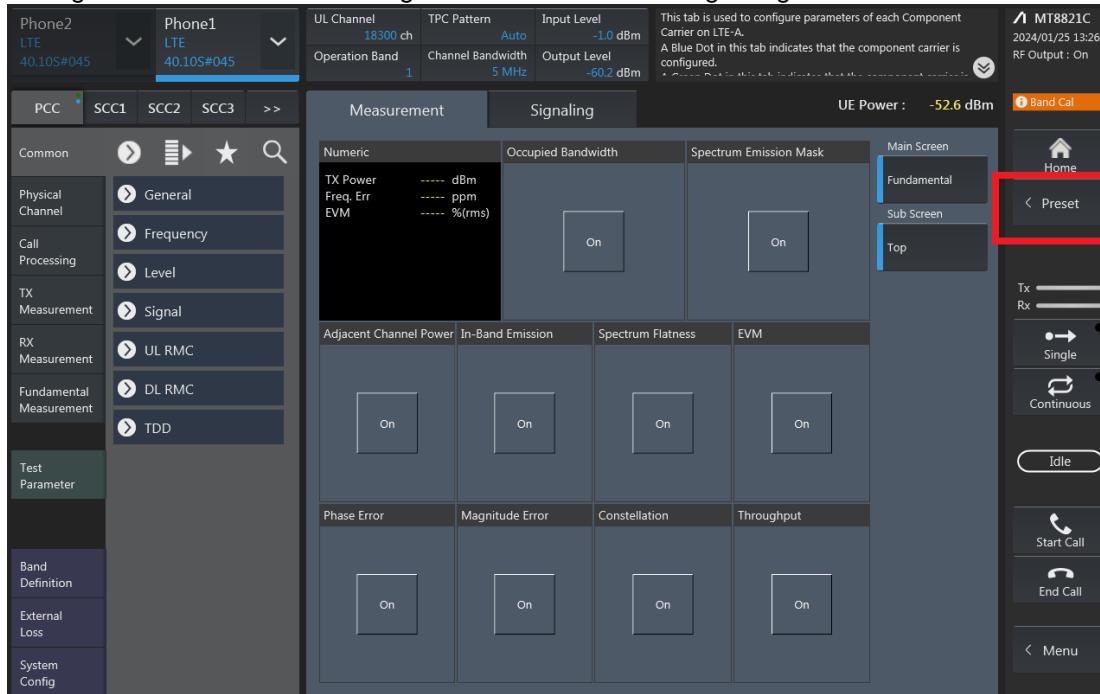


- If Select "RMC (DL/UL CA)" for Uplink Carrier Aggregation;

If Select "RMC (DL CA)" for Downlink Carrier Aggregation.

For example, Uplink Carrier Aggregation:

Detailed operation: PCC → Common → Signal → Channel Coding → Select 【RMC (DL/UL CA)】

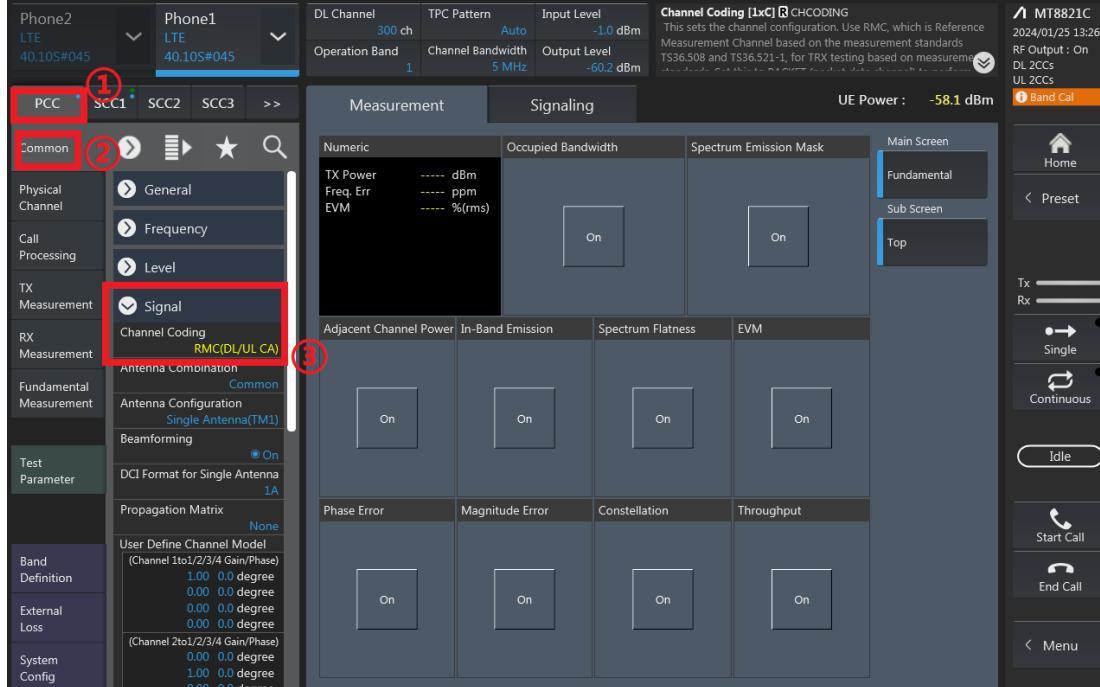



3. PCC parameter Settings: on the screen, and then select the PCC tab and Set operating band, BW, channel and RB configurations for PCC;

Phone2
LTE
40.10S#045

Phone1
LTE
40.10S#045

DL Channel: 39750 ch | TPC Pattern: All +3dB | Input Level: 30.0 dBm | Modulation Analysis: MOD_MEAS

Operation Band: 41 | Channel Bandwidth: 20 MHz | Output Level: -54.2 dBm

Measurement **Signaling** UE Power: -15.2 dBm

Common ①

Physical Channel
Call Processing
TX Measurement
RX Measurement
Fundamental Measurement
Test Parameter
Band Definition
External Loss
System Config

② Operation Band: 41
③ Channel: 39750 ch
④ Channel Bandwidth: 20 MHz

Main Screen: Fundamental, Sub Screen: Top

MT8821C
2024/01/25 14:29
RF Output: On
DL 2CCs
UL 2CCs Cont.
① Band Cal

Home
Preset
Stop
Tx Rx
Single
Continuous
Idle
Start Call
End Call
Menu

RB configurations (Number of RB / Starting RB) for PCC;

Phone2
LTE
40.10S#045

Phone1
LTE
40.10S#045

DL Channel: 39750 ch | TPC Pattern: All +3dB | Input Level: 30.0 dBm | Modulation Analysis: MOD_MEAS

Operation Band: 41 | Channel Bandwidth: 20 MHz | Output Level: -54.2 dBm

Measurement **Signaling** UE Power: -15.5 dBm

Common ①

Physical Channel
Call Processing
TX Measurement
RX Measurement
Fundamental Measurement
Test Parameter
Band Definition
External Loss
System Config

② UL RMC
③ Number of RB: 100
Starting RB: 0

Main Screen: Fundamental, Sub Screen: Top

MT8821C
2024/01/25 14:30
RF Output: On
DL 2CCs
UL 2CCs Cont.
① Band Cal

Home
Preset
Stop
Tx Rx
Single
Continuous
Idle
Start Call
End Call
Menu



4. SCC parameter Settings: Select the SCC1 tab, Set operating band, BW, channel, and RB configurations for SCC1;

This screenshot shows the MT8821C software interface for configuring SCC1 parameters. The main window displays the following settings:

- Phone2 LTE 40.10S#045** and **Phone1 LTE 40.10S#045**
- DL Channel**: 39948 ch, Activation: On, Output: On
- Operation Band**: 41, Channel Bandwidth: 20 MHz, Output Level: -54.2 dBm
- Measurement Tab** selected.
- Numeric** section: TX Power, PCC Freq. Err, PCC EVM, SCC-1 Freq. Err, SCC-1 EVM.
- Occupied Bandwidth** and **Spectrum Emission Mask** sections are active.
- Main Screen** is set to **Top**.
- Tx/Rx** panel: Tx: Single, Rx: Continuous, Idle.
- Buttons**: Home, Preset, Stop, Start Call, End Call, Menu.

RB configurations (Number of RB / Starting RB) for SCC1;

This screenshot shows the MT8821C software interface for configuring RB parameters for SCC1. The main window displays the following settings:

- Phone2 LTE 40.10S#045** and **Phone1 LTE 40.10S#045**
- DL Channel**: 39948 ch, Activation: On, Output: On
- Operation Band**: 41, Channel Bandwidth: 20 MHz, Output Level: -54.2 dBm
- Measurement Tab** selected.
- Numeric** section: TX Power, PCC Freq. Err, PCC EVM, SCC-1 Freq. Err, SCC-1 EVM.
- Occupied Bandwidth** and **Spectrum Emission Mask** sections are active.
- Main Screen** is set to **Top**.
- Tx/Rx** panel: Tx: Single, Rx: Continuous, Idle.
- Buttons**: Home, Preset, Stop, Start Call, End Call, Menu.

In the left sidebar under **Physical Channel**, the **UL RMC** section is expanded, showing:

- RB Pos.: Min(#0)
- Number of RB: 100
- Starting RB: 0
- Max UL Throughput: 3504 kbps
- MCS Index: 5 QPSK 5 8760 8
- DL RMC
- TDD



5. Select the PCC tab, then set “SIM Model Number” and select max power;

Phone2 LTE 40.10S#045 Phone1 LTE 40.10S#045

PCC SCC1 SCC2 SCC3 >>

Common

- Call Processing (①)
- TX Measurement
- RX Measurement
- Fundamental Measurement
- Test Parameter
- Band Definition
- External Loss
- System Config

Measurement

Signaling

Numeric

	Occupied Bandwidth	Spectrum Emission Mask	Main Screen
TX Power	dBm	On	Fundamental
PCC Freq, Err	ppm	On	Sub Screen
PCC EVM	%rms	On	Top
SCC-1 Freq, Err	ppm	On	
SCC-1 EVM	%rms	On	

Adjacent Channel Power **In-Band Emission** **Spectrum Flatness** **EVM**

Phase Error **Magnitude Error** **Constellation** **Throughput**

Modulation Analysis MOD_MEAS
This sets whether to perform modulation analysis.

UE Power : -15.5 dBm

MT8821C
2024/01/25 14:30
RF Output : On
DL 2CCs
UL 2CCs Cont.
 Band Cal

Home **Preset** **Stop**
Tx **Rx**
Single **Continuous**
Idle
Start Call **End Call**
Menu

6. Click the “Connect” button at the Right of the screen, if necessary, turn the Airplane mode on/off in the DUT

Phone2 LTE 40.10S#045 Phone1 LTE 40.10S#045

PCC SCC1 SCC2 SCC3 >>

Common

- Call Processing
- TX Measurement
- RX Measurement
- Fundamental Measurement
- Test Parameter
- Band Definition
- External Loss
- System Config

Measurement

Signaling

Fundamental (③) **Numeric**

Power Measurement (④) (1 / 1)

	Avg.	Max.	Min.
Total	22.38	22.38	22.38 dBm
PCC	21.85	21.85	21.85 dBm
TX Power	21.84	21.84	21.84 dBm
Channel Power			
SCC-1	13.02	13.02	13.02 dBm
TX Power	13.02	13.02	13.02 dBm
Channel Power			

This tab is used to configure parameters of each Component Carrier on LTE-A. A Blue Dot in this tab indicates that the component carrier is configured.

MT8821C
2024/01/25 16:26
RF Output : On
DL 2CCs
UL 2CCs Cont.
 Band Cal

Home **Preset** **Measuring (UL CA Tx)...**
Tx **Rx**
Single **Continuous**
Connected (②)
Start Call (①) **End Call** (⑥)
Menu

7. The inter-band ULCA test method is similar to intra-band ULCA, and DLCA test method is similar to intra-band ULCA too.

Uplink CA_Full & Default Power

CA_7C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	23.24	24.50		
21100	21298	QPSK	1	99	1	0	23.29	24.50		
21350	21152	QPSK	1	0	1	99	23.28	24.50		

CA_38C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)	RB Size	RB offset
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	23.36	24.50		
37901	38099	QPSK	1	99	1	0	23.39	24.50		
38150	37952	QPSK	1	0	1	99	23.36	24.50		

CA_7C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)	RB Size	RB offset
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	22.79	24.50		
21100	21298	QPSK	1	99	1	0	22.93	24.50		
21350	21152	QPSK	1	0	1	99	22.85	24.50		

CA_38C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)	RB Size	RB offset
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	22.92	24.50		
37901	38099	QPSK	1	99	1	0	22.99	24.50		
38150	37952	QPSK	1	0	1	99	22.97	24.50		

Uplink CA_DSI1 Power

CA_7C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	23.24	24.50		
21100	21298	QPSK	1	99	1	0	23.29	24.50		
21350	21152	QPSK	1	0	1	99	23.28	24.50		

CA_38C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	23.38	24.50		
37901	38099	QPSK	1	99	1	0	23.39	24.50		
38150	37952	QPSK	1	0	1	99	23.36	24.50		

CA_7C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	16.75	18.50		
21100	21298	QPSK	1	99	1	0	16.86	18.50		
21350	21152	QPSK	1	0	1	99	16.77	18.50		

CA_38C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	19.02	20.50		
37901	38099	QPSK	1	99	1	0	19.08	20.50		
38150	37952	QPSK	1	0	1	99	18.99	20.50		

Uplink CA_DSI2 Power

CA_7C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	23.24	24.50		
21100	21298	QPSK	1	99	1	0	23.29	24.50		
21350	21152	QPSK	1	0	1	99	23.28	24.50		

CA_38C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	23.38	24.50		
37901	38099	QPSK	1	99	1	0	23.39	24.50		
38150	37952	QPSK	1	0	1	99	23.36	24.50		

CA_7C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	22.79	24.50		
21100	21298	QPSK	1	99	1	0	22.93	24.50		
21350	21152	QPSK	1	0	1	99	22.85	24.50		

CA_38C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	22.92	24.50		
37901	38099	QPSK	1	99	1	0	22.99	24.50		
38150	37952	QPSK	1	0	1	99	22.97	24.50		

Uplink CA_DSI3 Power

CA_7C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)		
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	18.71	20.00		
21100	21298	QPSK	1	99	1	0	18.86	20.00		
21350	21152	QPSK	1	0	1	99	18.67	20.00		

CA_38C Ant 1										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)	RB Size	RB offset
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	19.36	20.50		
37901	38099	QPSK	1	99	1	0	19.41	20.50		
38150	37952	QPSK	1	0	1	99	19.39	20.50		

CA_7C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)	RB Size	RB offset
			RB Size	RB offset	RB Size	RB offset				
20850	21048	QPSK	1	99	1	0	22.79	24.50		
21100	21298	QPSK	1	99	1	0	22.93	24.50		
21350	21152	QPSK	1	0	1	99	22.85	24.50		

CA_38C Ant 4										
Combination 20MHz+20MHz (100RB+100RB)										
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)	RB Size	RB offset
			RB Size	RB offset	RB Size	RB offset				
37850	38048	QPSK	1	99	1	0	22.92	24.50		
37901	38099	QPSK	1	99	1	0	22.99	24.50		
38150	37952	QPSK	1	0	1	99	22.97	24.50		

Uplink CA_DSI4 Power

CA_7C Ant 1								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	18.71	20.00
21100	21298	QPSK	1	99	1	0	18.86	20.00
21350	21152	QPSK	1	0	1	99	18.67	20.00

CA_38C Ant 1								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	19.36	20.50
37901	38099	QPSK	1	99	1	0	19.41	20.50
38150	37952	QPSK	1	0	1	99	19.39	20.50

CA_7C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
20850	21048	QPSK	1	99	1	0	16.75	18.50
21100	21298	QPSK	1	99	1	0	16.86	18.50
21350	21152	QPSK	1	0	1	99	16.77	18.50

CA_38C Ant 4								
Combination 20MHz+20MHz (100RB+100RB)								
PCC Channel	SCC Channel	Modulation	PCC		SCC		Measured Power (dBm)	Tune up Power (dBm)
			RB Size	RB offset	RB Size	RB offset		
37850	38048	QPSK	1	99	1	0	19.02	20.50
37901	38099	QPSK	1	99	1	0	19.08	20.50
38150	37952	QPSK	1	0	1	99	18.99	20.50

Downlink CA Power

CA List	PCC										SCC				Power		
	LTE Band	BW	BW	UL Freq (MHz)	UL Channel	UL# Mod.	UL Rb Offset	DL Antenna Configuration			LTE Band	BW	DL Freq (MHz)	DL Channel	DL Antenna Configuration		
		Ar1 (MHz)	(MHz)	(MHz)	Channel	UL#	UL Rb Offset	DL Antenna Configuration	DL Band	(MHz)	Tx. Power (dBm)	Tx. Power (dBm)	With CA	Without CA	(dBm)	(dBm)	
CA_2A-2A	Band 2	1	20M	1880	18900	QPSK	1	0	Band 2	5M	1987.5	1175			22.91	22.98	
CA_2A-26A	Band 2	2	20M	1880	18900	QPSK	1	0	Band 26	15M	831.5	2686			22.93	23.05	
CA_2A-38A	Band 26	1	15M	831.5	26865	QPSK	1	0	Band 2	20M	1960	900			24.30	24.41	
CA_2A-38A	Band 2	1	20M	1880	18900	QPSK	1	0	Band 38	20M	2595	38000	4x4MIMO		22.91	22.98	
CA_2C	Band 26	3	20M	2695	28000	QPSK	1	0	4x4MIMO	Band 2	20M	1960	900		23.44	23.52	
CA_2C	Band 2	2	20M	1880	18900	QPSK	1	0	Band 2	20M	1979.8	1098			22.93	23.05	
CA_4A-17A	Band 4	1	10M	1722.5	2011.5	QPSK	1	0	4x4MIMO	Band 17	10M	740	5790			23.66	23.81
CA_4A-17A	Band 17	4	10M	710	23700	QPSK	1	0	Band 4	10M	2132.5	2175	4x4MIMO		24.32	24.46	
CA_26A-38A	Band 26	1	15M	831.5	26865	QPSK	1	0	Band 38	20M	2695	38000	4x4MIMO		24.30	24.41	
CA_7A-26A	Band 7	1	20M	2635	21100	QPSK	1	0	4x4MIMO	Band 26	15M	K76.5	8865			23.37	23.47
CA_26A-41A	Band 26	4	15M	831.5	26865	QPSK	1	0	Band 7	20M	2655	3100	4x4MIMO		24.39	24.58	
CA_26A-41A	Band 26	1	15M	831.5	26865	QPSK	1	0	Band 41	20M	2933	49620	4x4MIMO		24.30	24.41	
CA_38A-41A	Band 26	1	20M	2695	28000	QPSK	1	0	4x4MIMO	Band 41	20M	2933	49620	4x4MIMO		24.42	23.91
CA_41C	Band 41	1	20M	2593	40620	QPSK	1	0	4x4MIMO	Band 38	20M	2595	38000	4x4MIMO		23.40	23.80
CA_38C	Band 38	1	20M	2580	37855	QPSK	1	0	4x4MIMO	Band 38	20M	2599.8	38048	4x4MIMO		23.42	23.91
CA_41C	Band 41	1	20M	2593	40620	QPSK	1	0	4x4MIMO	Band 41	20M	2612.8	40818	4x4MIMO		23.46	23.80
CA_66B	Band 66	1	15M	1745	132322	QPSK	1	0	Band 66	5M	2164.3	66979			23.68	23.82	
CA_66C	Band 66	1	20M	1745	132322	QPSK	1	0	Band 66	20M	2164.8	66964			23.78	23.94	



3CA DI