



CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.32	57.36	74	-24.68	31.75	6.18	45.97	140	200	Peak
2390	40.97	49.01	54	-13.03	31.75	6.18	45.97	140	200	Average
2480	96.16	103.75	/	/	32.04	6.3	45.93	140	200	Peak
2480	94.7	102.29	/	/	32.04	6.3	45.93	140	200	Average
2483.5	51.39	58.96	74	-22.61	32.05	6.31	45.93	140	200	Peak
2483.5	43.03	50.6	54	-10.97	32.05	6.31	45.93	140	200	Average

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M										
FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	READ LEVEL (dBuV)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA FACTOR (dB /m)	CABLE LOSS (dB)	PREAMP FACTOR (dB)	ANTENNA HEIGHT (cm)	TABLE ANGLE (Degree)	REMARK
2390	49.88	57.53	74	-24.12	32.14	6.18	45.97	100	150	Peak
2390	40.92	48.57	54	-13.08	32.14	6.18	45.97	100	150	Average
2480	93.95	101.23	/	/	32.35	6.3	45.93	100	150	Peak
2480	93.1	100.38	/	/	32.35	6.3	45.93	100	150	Average
2483.5	51.73	58.99	74	-22.27	32.36	6.31	45.93	100	150	Peak
2483.5	42.4	49.66	54	-11.6	32.36	6.31	45.93	100	150	Average

REMARKS:

- Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
- 2480MHz: Fundamental frequency.



**BUREAU
VERITAS**


Test Report No.: W7L-P23030003RF02

Worst case harmonic:

CHANNEL	TX Channel 39	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M


	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4961.000	46.76	47.95	74.00	-27.24	-1.19	Peak	Horizontal
2 PP	7440.000	49.22	47.24	74.00	-24.78	1.98	Peak	Horizontal

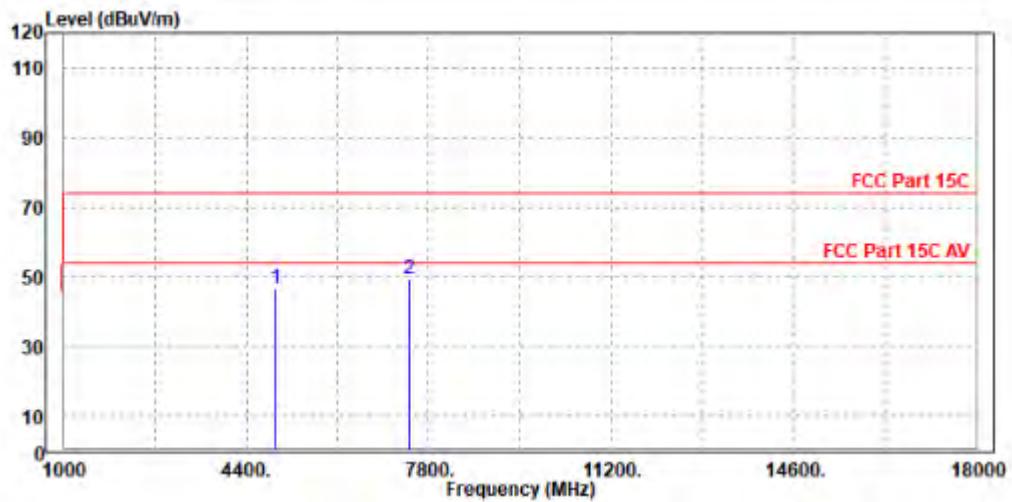



ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m		
1	4960.000	47.21	48.20	74.00	-26.79	-0.99	Peak	Vertical
2 PP	7443.000	50.30	48.30	74.00	-23.70	2.00	Peak	Vertical

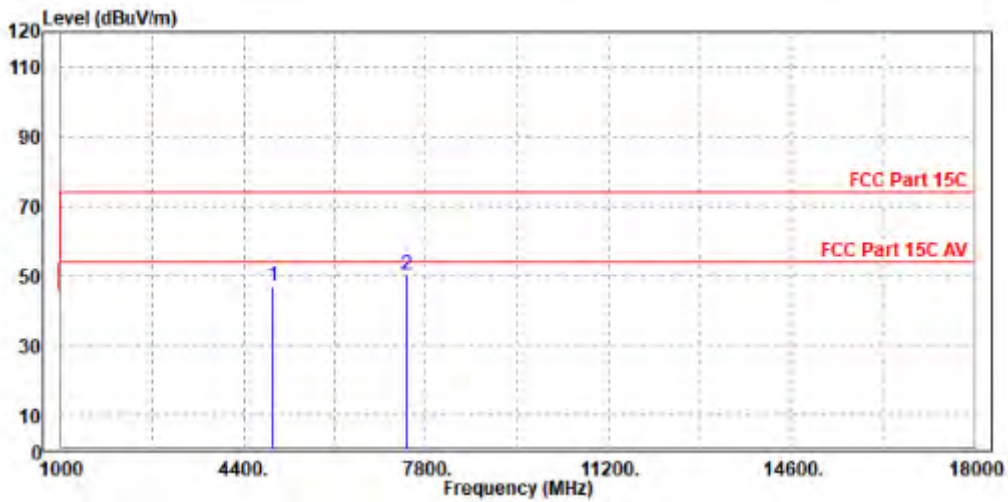

REMARKS:

1. Emission Level = Read Level+ Antenna Factor + Cable Loss- Preamp Factor
Margin value = Emission level – Limit value.
2. 2480MHz: Fundamental frequency.
3. For frequency above 18GHz, the emission was tested 20db below the limit so the data not recorded in the sheet



3.3 6 dB BANDWIDTH MEASUREMENT

3.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

3.3.2 TEST INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
Power Meter	ANRITSU	ML2495A	1506002	Feb. 14,23	Feb. 13,24
EXA Signal Analyzer	KEYSIGHT	N9010A-526	MY54510322	Feb. 17,23	Feb. 16,24
EXA Signal Analyzer	KEYSIGHT	N9010A-544	MY54510355	May.14,22	May.13,23
Power Sensor	ANRITSU	MA2411B	1339352	Feb. 14,23	Feb. 13,24

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
2. The test was performed in RF Oven room.

3.3.3 TEST PROCEDURE


1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) ≥ 3 RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



3.3.4 DEVIATION FROM TEST STANDARD

No deviation.

3.3.5 TEST SETUP

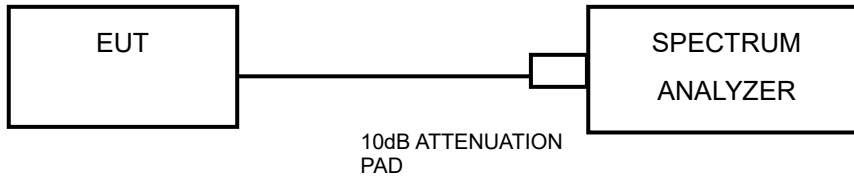

3.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU Test Report No.: W7L-P23030003RF02
VERITAS

3.3.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.4 CONDUCTED OUTPUT POWER

3.4.1 LIMITS OF CONDUCTED OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

3.4.2 TEST SETUP

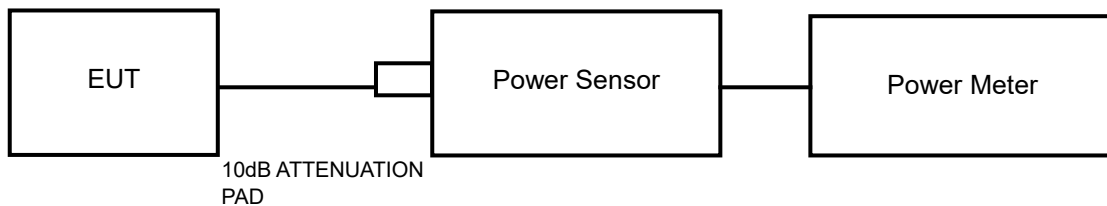

3.4.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.4.4 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the power level.

3.4.5 DEVIATION FROM TEST STANDARD

No deviation.

3.4.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU VERITAS Test Report No.: W7L-P23030003RF02

3.4.7 TEST RESULTS

3.4.7.1 MAXIMUM PEAK OUTPUT POWER

Please Refer to Appendix1/2 Of this test report.



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

3.4.7.2 AVERAGE OUTPUT POWER (FOR REFERENCE)

The average power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

Please Refer to Appendix1/2 Of this test report.




3.5 POWER SPECTRAL DENSITY MEASUREMENT

3.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm/3KHz.

3.5.2 TEST SETUP

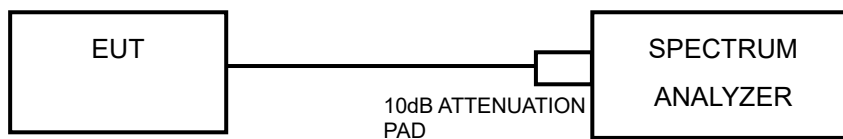

3.5.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.5.4 TEST PROCEDURE

1. Set the span to 1.5 times the DTS bandwidth
2. Set the RBW = 3 kHz, VBW $\geq 3 \times$ RBW, Detector = peak.
3. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

3.5.5 DEVIATION FROM TEST STANDARD

No deviation.

3.5.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



BUREAU Test Report No.: W7L-P23030003RF02
VERITAS

3.5.7 TEST RESULTS

Please Refer to Appendix1/2 Of this test report.




3.6 OUT OF BAND EMISSION MEASUREMENT

3.6.1 LIMITS OF OUT OF BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

3.6.2 TEST SETUP

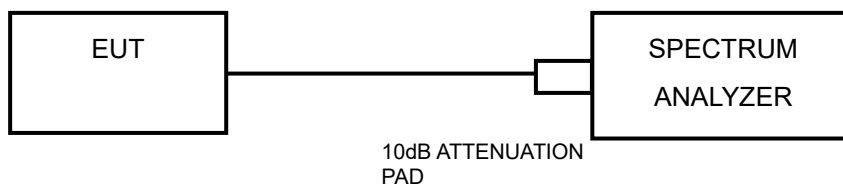

3.6.3 TEST INSTRUMENTS

Refer to section 3.3.2 to get information of above instrument.

3.6.4 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.



MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

3.6.5 DEVIATION FROM TEST STANDARD

No deviation.

3.6.6 EUT OPERATING CONDITION

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

3.6.7 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level. D2 line indicates the 20dB offset below D1. It shows compliance to the requirement.

Please Refer to Appendix1/2 Of this test report.



3.7 ANTENNA REQUIREMENTS

3.7.1 STANDARD APPLICABLE

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.7.2 ANTENNA CONNECTED CONSTRUCTION

An embedded-in antenna design is used.

3.7.3 ANTENNA GAIN

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit and PSD limit



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

4 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

5 MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.



6 APPENDIX 1 :WLAN 2.4G

DTS BANDWIDTH

TEST RESULT

TestMode	Antenna	Frequency[MHz]	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	8.040	2408.000	2416.040	0.5	PASS
		2437	7.080	2433.440	2440.520	0.5	PASS
		2462	8.560	2457.480	2466.040	0.5	PASS
11G	Ant1	2412	14.480	2405.680	2420.160	0.5	PASS
		2437	14.800	2429.480	2444.280	0.5	PASS
		2462	15.800	2453.880	2469.680	0.5	PASS
11N20SISO	Ant1	2412	15.040	2404.520	2419.560	0.5	PASS
		2437	15.440	2429.120	2444.560	0.5	PASS
		2462	14.400	2455.120	2469.520	0.5	PASS



TEST GRAPHS

11B_Ant1_2412



11B_Ant1_2437




11B_Ant1_2462



BUREAU VERITAS

Test Report No.: W7L-P23030003RF02

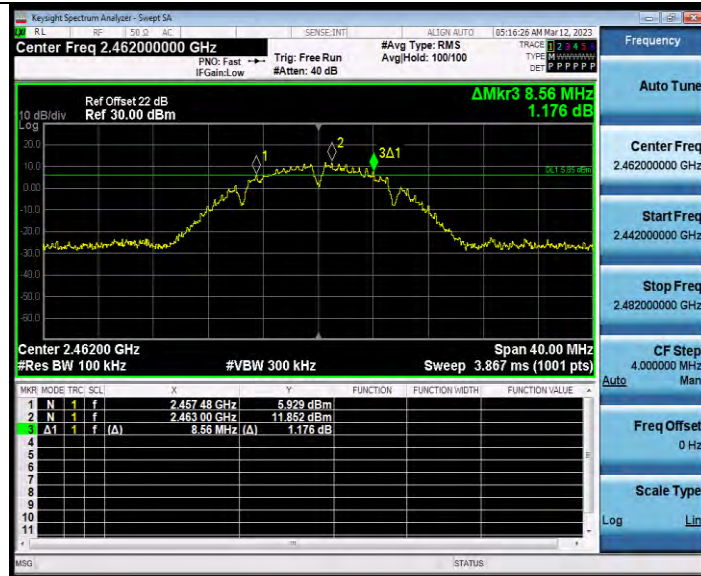

11G_Ant1_2412




11G_Ant1_2437



BUREAU VERITAS

Test Report No.: W7L-P23030003RF02

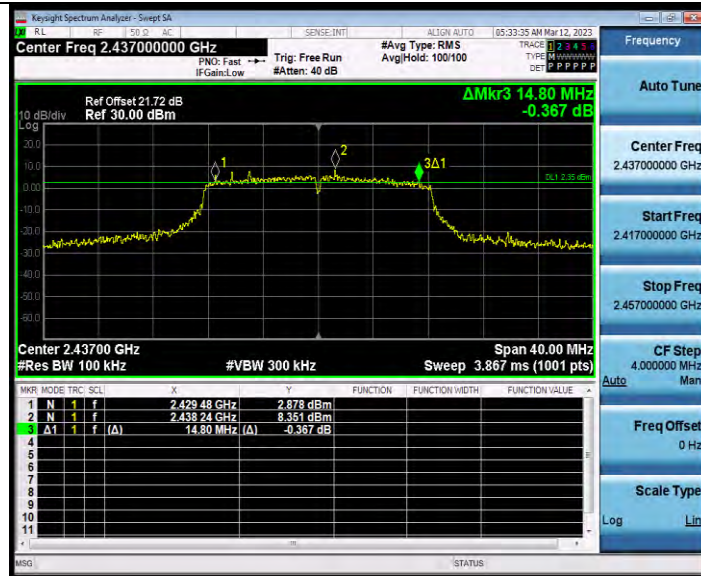

11G_Ant1_2462




11N20SISO_Ant1_2412



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

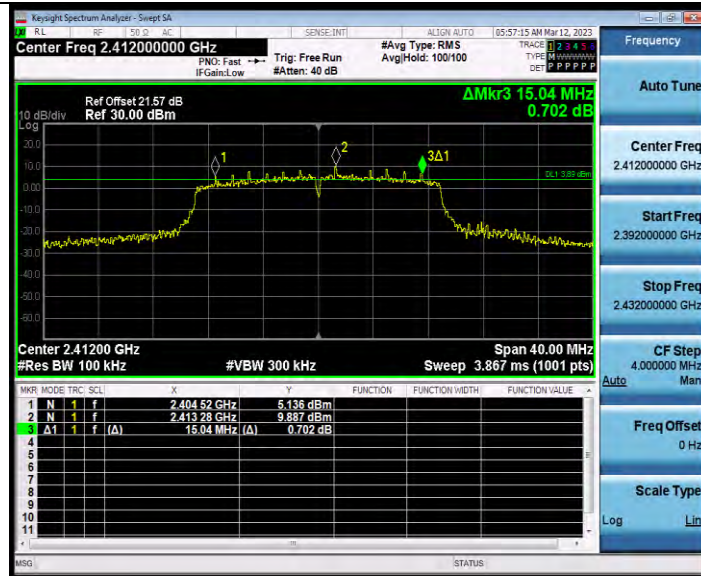

11N20SISO_Ant1_2437



11N20SISO_Ant1_2462



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



OCCUPIED CHANNEL BANDWIDTH TEST RESULT

TestMode	Antenna	Channel Frequency[MHz]	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11B	Ant1	2412	13.571	2405.3711	2418.9421	---	---
		2437	13.756	2430.0482	2443.8042	---	---
		2462	14.138	2454.8712	2469.0092	---	---
11G	Ant1	2412	17.121	2403.5412	2420.6622	---	---
		2437	17.021	2428.4477	2445.4687	---	---
		2462	17.303	2453.2988	2470.6018	---	---
11N20SISO	Ant1	2412	18.060	2403.0510	2421.1110	---	---
		2437	18.049	2427.9015	2445.9505	---	---
		2462	18.228	2452.8549	2471.0829	---	---



**BUREAU
VERITAS**


Test Report No.: W7L-P23030003RF02

TEST GRAPHS

11B_Ant1_2412



11B_Ant1_2437

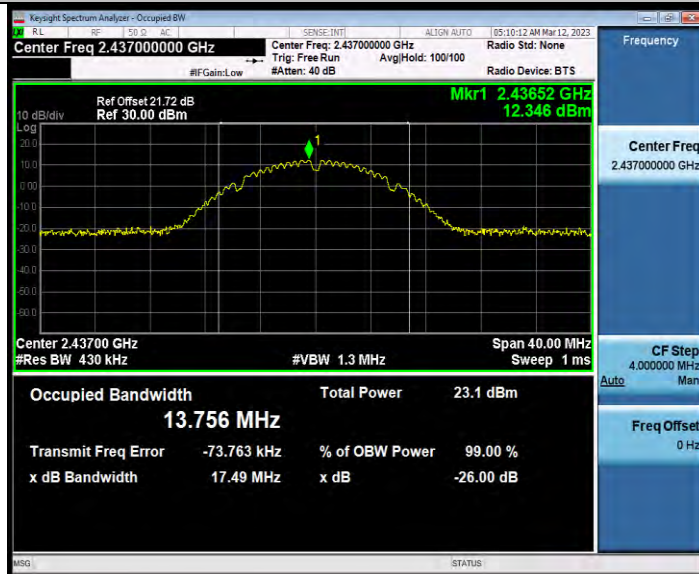

11B_Ant1_2462




**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11G_Ant1_2412

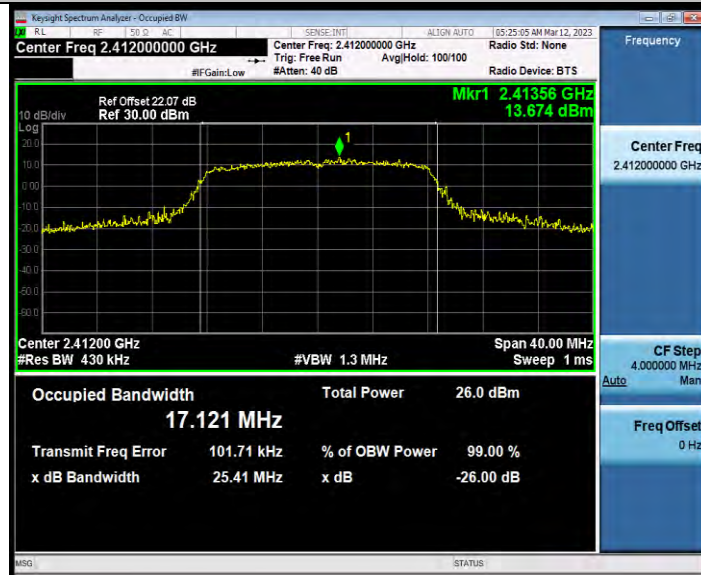

11G_Ant1_2437




**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11G_Ant1_2462

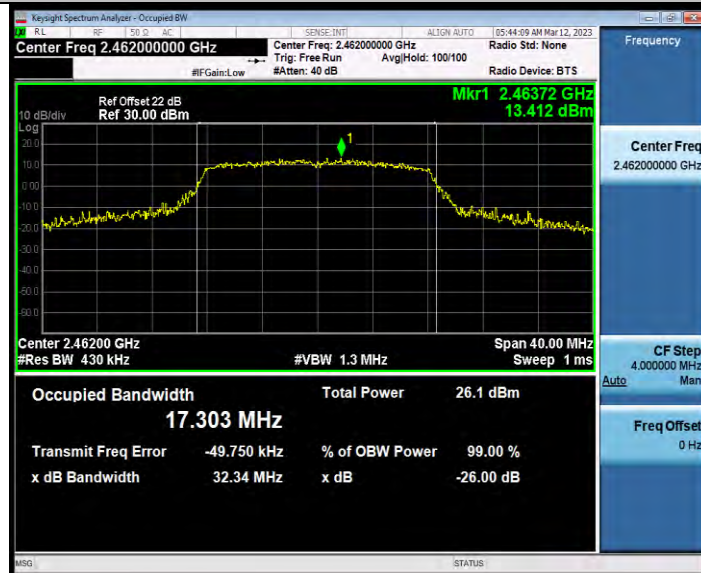

11N20SISO_Ant1_2412




**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11N20SISO_Ant1_2437

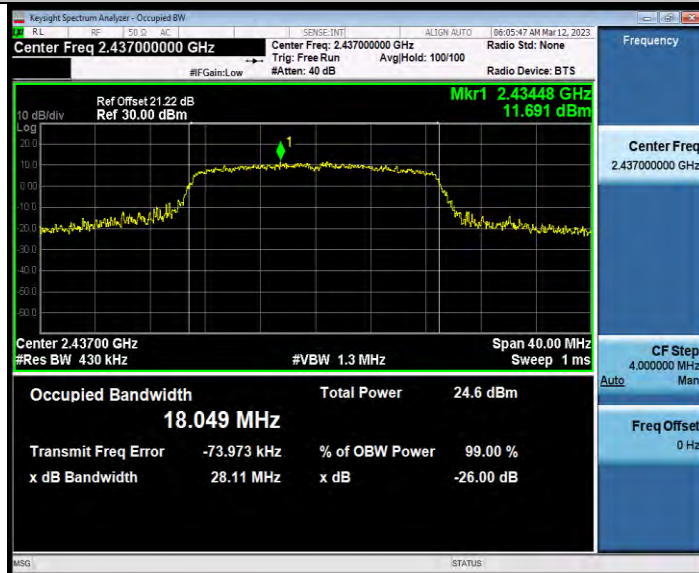


11N20SISO_Ant1_2462



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

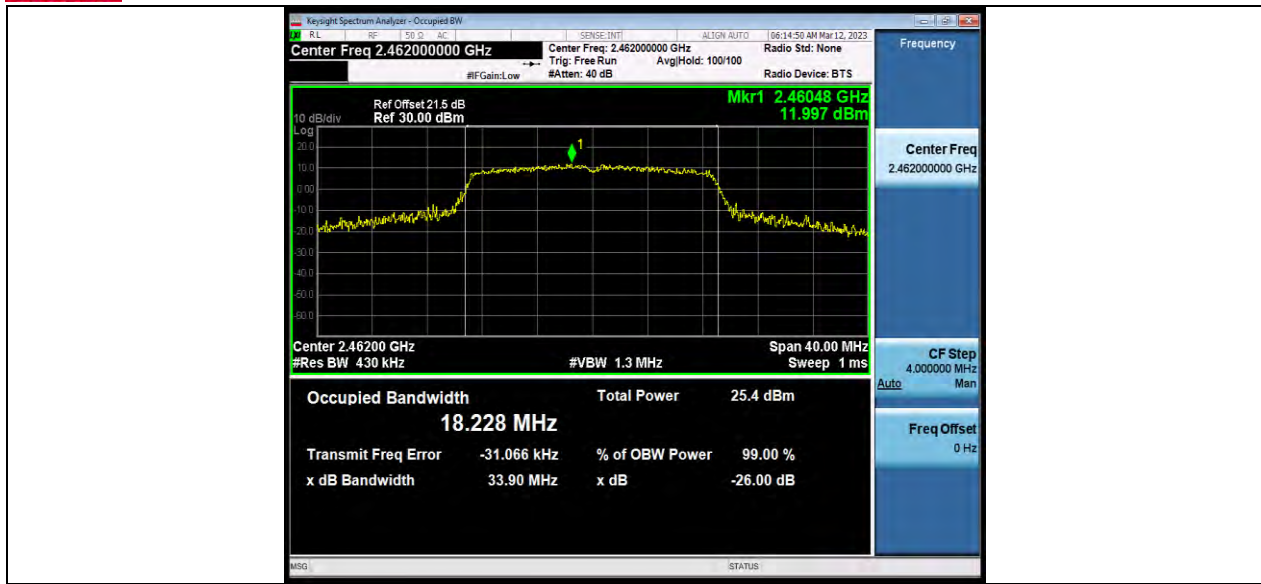



MAXIMUM CONDUCTED OUTPUT POWER

TEST RESULT

TestMode	Antenna	Freq. [MHz]	Average power [dBm]	Peak Power [dBm]	Peak Power [mw]	Conducted Limit [dBm]	EIRP [dBm]	EIRP [mw]	EIRP Limit [dBm]	Verdict	Power Setting
11B	Ant1	2412	19.01	21.39	137.72	≤30.00	17.69	58.75	≤36.00	PASS	19
		2437	19.28	21.68	147.23	≤30.00	17.98	62.81	≤36.00	PASS	19
		2462	19.08	21.57	143.55	≤30.00	17.87	61.24	≤36.00	PASS	19
11G	Ant1	2412	18.12	24.82	303.39	≤30.00	21.12	129.42	≤36.00	PASS	18.5
		2437	18.07	25.36	343.56	≤30.00	21.66	146.55	≤36.00	PASS	18
		2462	18.25	25.04	319.15	≤30.00	21.34	136.14	≤36.00	PASS	18.5
11N20SI SO	Ant1	2412	18.11	24.97	314.05	≤30.00	21.27	133.97	≤36.00	PASS	18.5
		2437	18.06	25.46	351.56	≤30.00	21.76	149.97	≤36.00	PASS	18
		2462	18.17	25.20	331.13	≤30.00	21.50	141.25	≤36.00	PASS	18.5

Note: EIRP=Peak Power + Gain



MAXIMUM POWER SPECTRAL DENSITY TEST RESULT

TestMode	Antenna	Frequency[MHz]	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
11B	Ant1	2412	-0.19	≤8.00	PASS
		2437	0.22	≤8.00	PASS
		2462	-0.32	≤8.00	PASS
11G	Ant1	2412	-3.55	≤8.00	PASS
		2437	-4.76	≤8.00	PASS
		2462	-3.42	≤8.00	PASS
11N20SISO	Ant1	2412	-3.91	≤8.00	PASS
		2437	-5.36	≤8.00	PASS
		2462	-4.25	≤8.00	PASS



BUREAU
VERITAS

Test Report No.: W7L-P23030003RF02

TEST GRAPHS

11B_Ant1_2412



11B_Ant1_2437



11B_Ant1_2462




**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11G_Ant1_2412

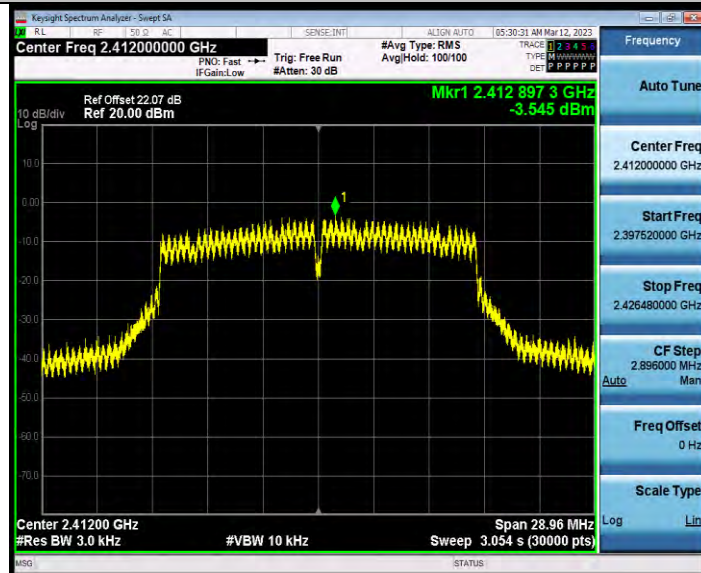


11G_Ant1_2437



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

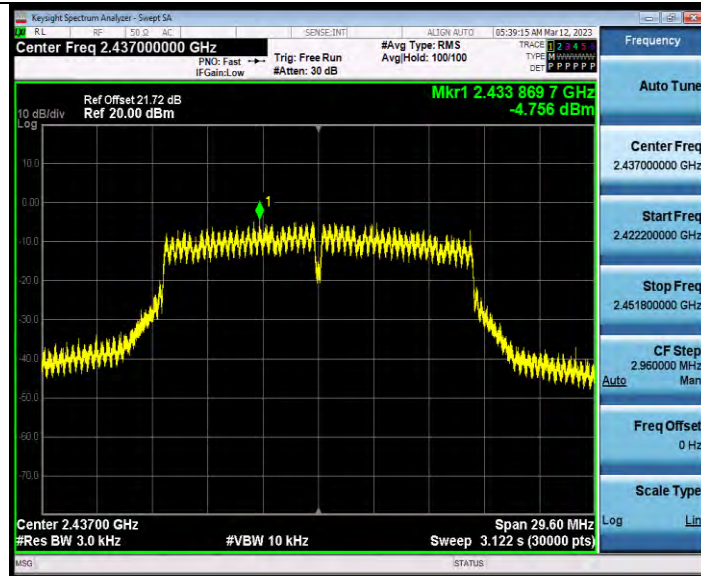

11G_Ant1_2462




11N20SISO_Ant1_2412



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

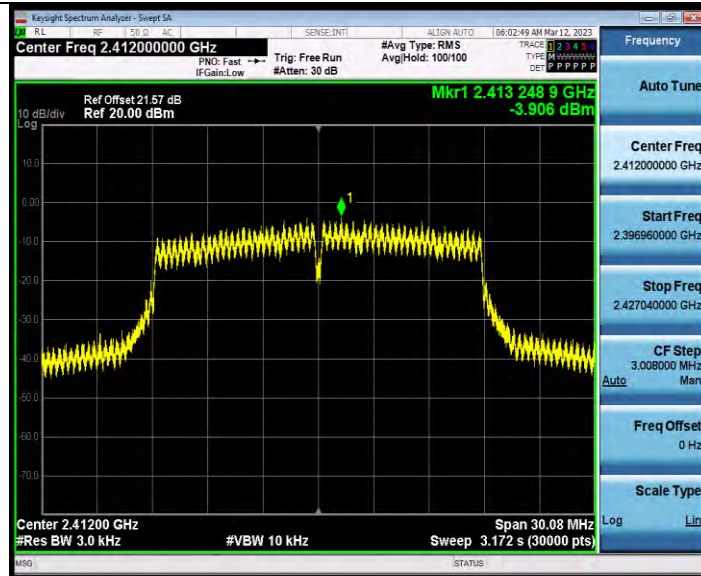

11N20SISO_Ant1_2437




11N20SISO_Ant1_2462



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

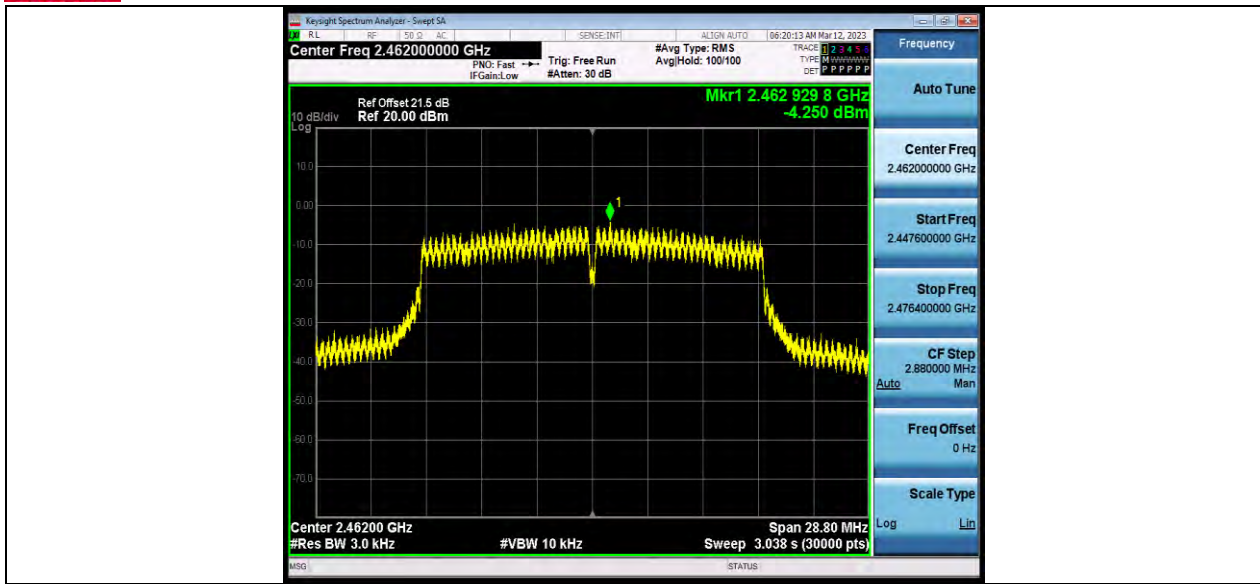

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan
Avenue, North Area, Hi-Tech Industrial Park, Nanshan
District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



BAND EDGE MEASUREMENTS

TEST RESULT

TestMode	Antenna	ChName	Frequency[MHz]	RefLevel[dBm]	Result[dBm]	Limit[dBm]	Verdict
11B	Ant1	Low	2412	12.45	-31.86	≤-7.56	PASS
		High	2462	12.43	-32.87	≤-7.57	PASS
11G	Ant1	Low	2412	9.38	-20.92	≤-10.62	PASS
		High	2462	9.86	-32.96	≤-10.14	PASS
11N20SISO	Ant1	Low	2412	9.21	-20.06	≤-10.79	PASS
		High	2462	9.44	-31.31	≤-10.56	PASS



TEST GRAPHS

11B_Ant1_Low_2412



11B_Ant1_High_2462



11G_Ant1_Low_2412



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11G_Ant1_High_2462



11N20SISO_Ant1_Low_2412



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11N20SISO_Ant1_High_2462



BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



CONDUCTED SPURIOUS EMISSION

TEST RESULT


TestMode	Antenna	Frequency[MHz]	FreqRange [Mhz]	RefLevel [dBm]	Result [dBm]	Limit [dBm]	Verdict
11B	Ant1	2412	Reference	10.97	10.97	---	PASS
			30~1000	10.97	-43.08	≤-9.03	PASS
			1000~26500	10.97	-22.82	≤-9.03	PASS
		2437	Reference	11.49	11.49	---	PASS
			30~1000	11.49	-43.3	≤-8.51	PASS
			1000~26500	11.49	-23.45	≤-8.51	PASS
		2462	Reference	11.21	11.21	---	PASS
			30~1000	11.21	-43.22	≤-8.79	PASS
			1000~26500	11.21	-23.52	≤-8.79	PASS
11G	Ant1	2412	Reference	8.79	8.79	---	PASS
			30~1000	8.79	-42.73	≤-11.21	PASS
			1000~26500	8.79	-23.67	≤-11.21	PASS
		2437	Reference	6.65	6.65	---	PASS
			30~1000	6.65	-43.27	≤-13.35	PASS
			1000~26500	6.65	-24.12	≤-13.35	PASS
		2462	Reference	9.22	9.22	---	PASS
			30~1000	9.22	-41.72	≤-10.78	PASS
			1000~26500	9.22	-23.86	≤-10.78	PASS
11N20SISO	Ant1	2412	Reference	6.10	6.10	---	PASS
			30~1000	6.10	-43.32	≤-13.9	PASS
			1000~26500	6.10	-23.66	≤-13.9	PASS
		2437	Reference	7.18	7.18	---	PASS
			30~1000	7.18	-43.4	≤-12.82	PASS
			1000~26500	7.18	-24.67	≤-12.82	PASS
		2462	Reference	5.02	5.02	---	PASS
			30~1000	5.02	-42.41	≤-14.98	PASS
			1000~26500	5.02	-24.5	≤-14.98	PASS



BUREAU VERITAS

Test Report No.: W7L-P23030003RF02

TEST GRAPHS

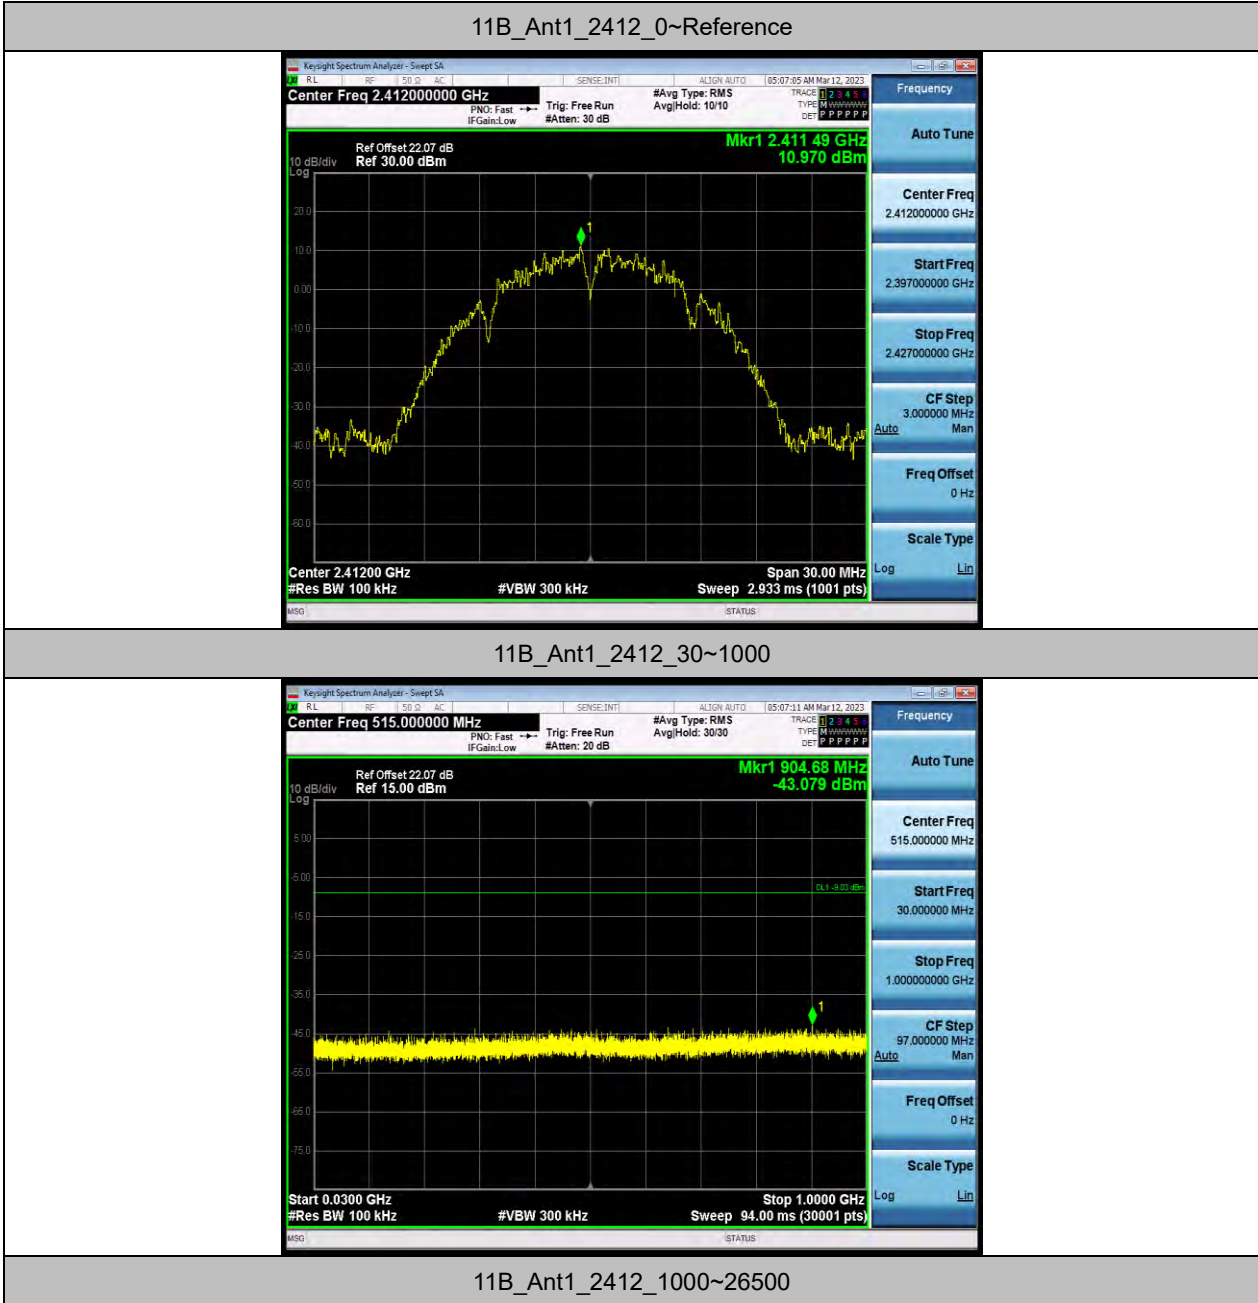



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11B_Ant1_2437_0~Reference



11B_Ant1_2437_30~1000

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd


No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

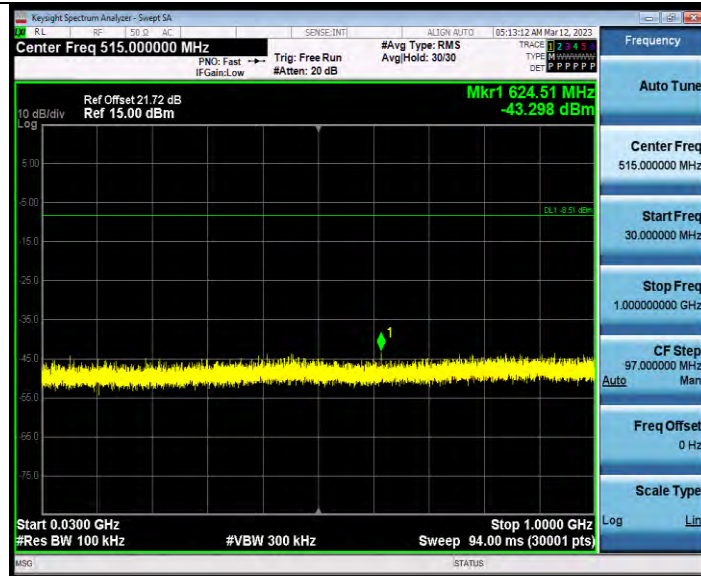

11B_Ant1_2437_1000~26500



11B_Ant1_2462_0~Reference




BUREAU
VERITAS

Test Report No.: W7L-P23030003RF02



11B_Ant1_2462_30~1000

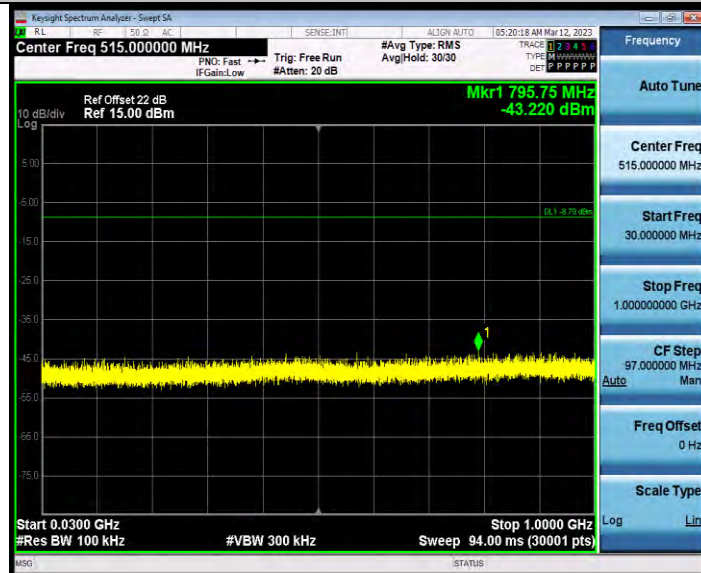

11B_Ant1_2462_1000~26500



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11G_Ant1_2412_0~Reference




11G_Ant1_2412_30~1000



BUREAU VERITAS

Test Report No.: W7L-P23030003RF02

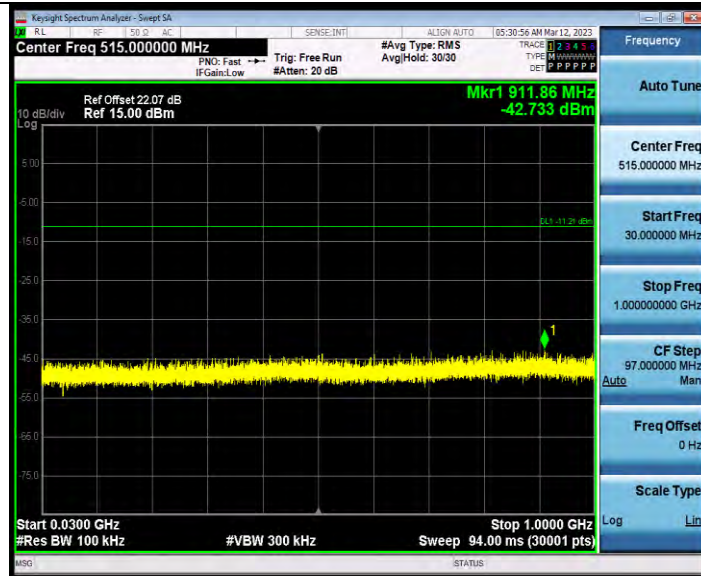

11G_Ant1_2412_1000~26500



11G_Ant1_2437_0~Reference



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11G_Ant1_2437_30~1000




11G_Ant1_2437_1000~26500



BUREAU VERITAS

Test Report No.: W7L-P23030003RF02

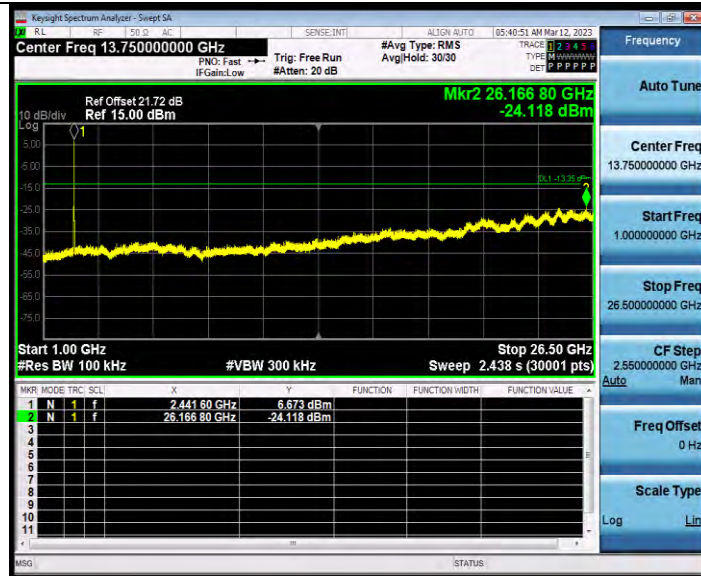

11G_Ant1_2462_0~Reference



11G_Ant1_2462_30~1000



BUREAU VERITAS

Test Report No.: W7L-P23030003RF02



11G_Ant1_2462_1000~26500



11N20SISO_Ant1_2412_0~Reference

BV 7Layers Communications Technology (Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11N20SISO_Ant1_2412_30~1000



11N20SISO_Ant1_2412_1000~26500



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11N20SISO_Ant1_2437_0~Reference



11N20SISO_Ant1_2437_30~1000



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11N20SISO_Ant1_2437_1000~26500



11N20SISO_Ant1_2462_0~Reference




**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02



11N20SISO_Ant1_2462_30~1000

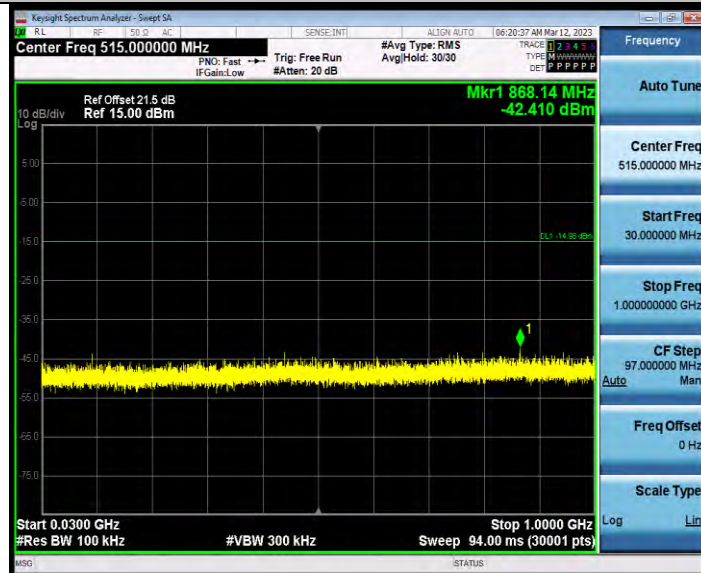


11N20SISO_Ant1_2462_1000~26500



**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

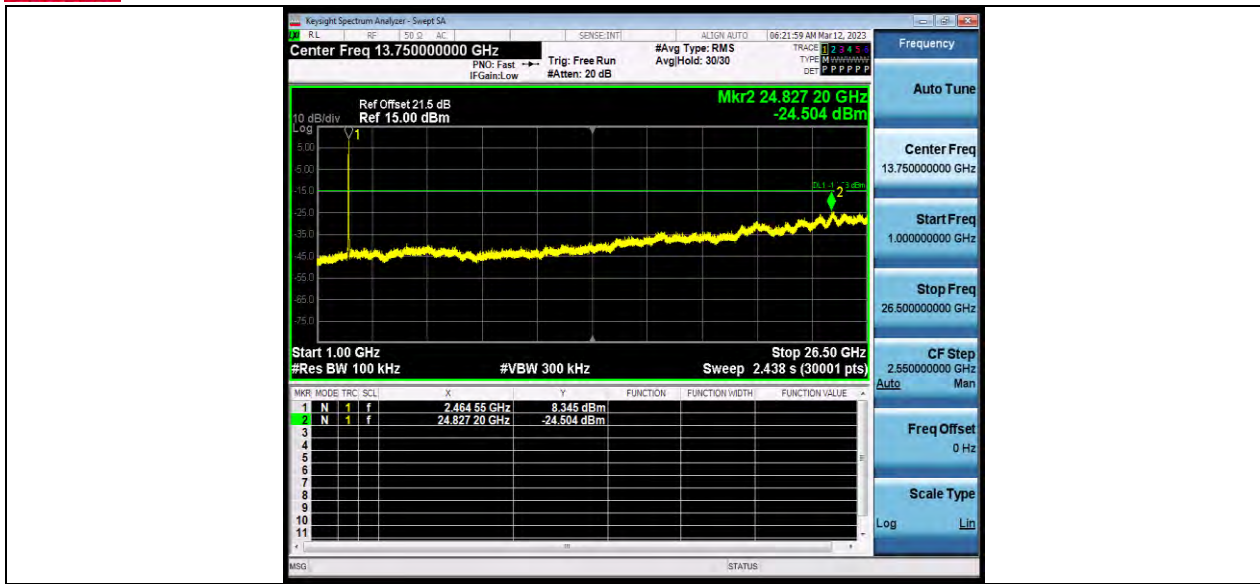

BV 7Layers Communications Technology
(Shenzhen) Co., Ltd

No.B102, Dazu Chuangxin Mansion, North of Beihuan Avenue, North Area, Hi-Tech Industrial Park, Nanshan District, Shenzhen, Guangdong, China

Tel: +86 755 8869 6566
Fax: +86 755 8869 6577
Email: customerservice.sw@bureauveritas.com




DUTY CYCLE TEST RESULT

TestMode	Antenna	Frequency[MHz]	Transmission Duration [ms]	Transmission Period [ms]	Duty Cycle [%]	Factor
11B	Ant1	2412	8.38	8.42	99.52	0.02
		2437	8.39	8.42	99.64	0.02
		2462	8.39	8.43	99.53	0.02
11G	Ant1	2412	1.40	1.44	97.22	0.12
		2437	1.39	1.44	96.53	0.15
		2462	1.39	1.44	96.53	0.15
11N20SISO	Ant1	2412	1.30	1.34	97.01	0.13
		2437	1.30	1.35	96.30	0.16
		2462	1.30	1.35	96.30	0.16




TEST GRAPHS

11B_Ant1_2412

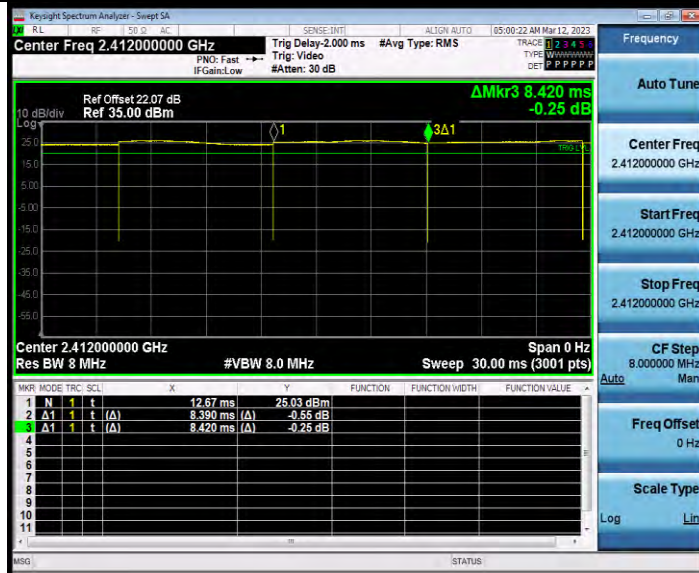

11B_Ant1_2437

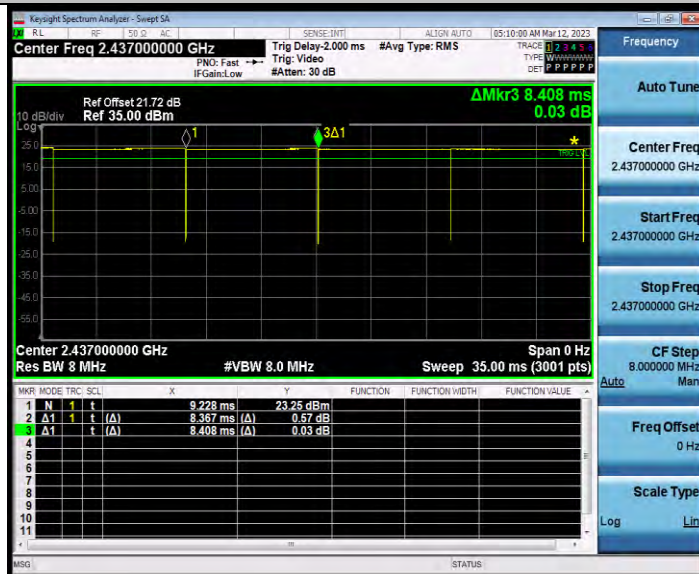


11B_Ant1_2462




**BUREAU
VERITAS**

Test Report No.: W7L-P23030003RF02

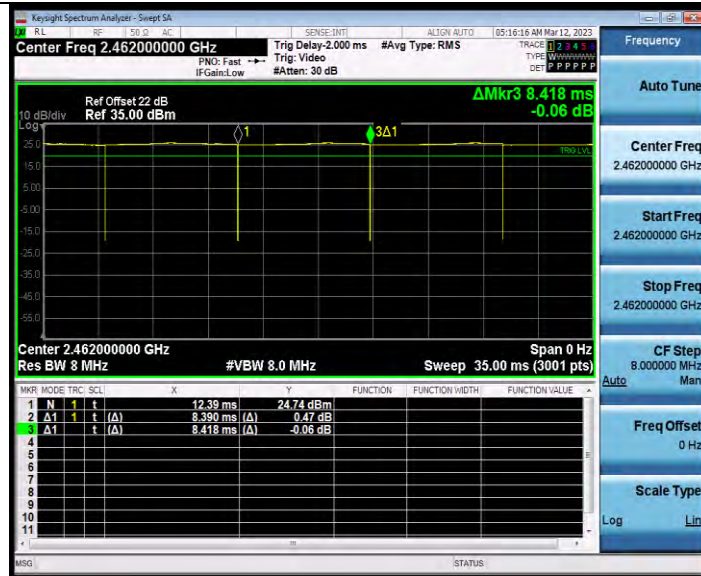

11G_Ant1_2412

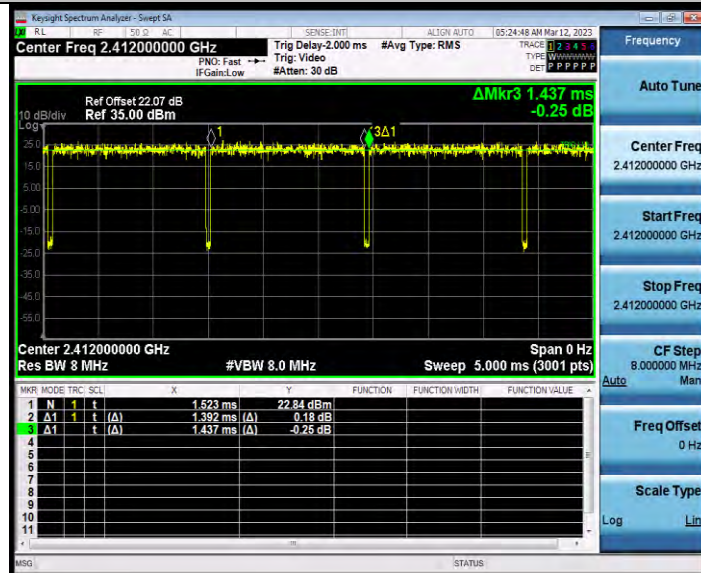

11G_Ant1_2437