

APPLICATION FOR CERTIFICATION

On Behalf of

Philips Lighting(China) Investment Co., Ltd.

LED Lamp

Model No. : 9290011998B

Brand : Philips

FCC ID : 2AGBW9290011998BX

Prepared for

Philips Lighting(China) Investment Co., Ltd.

Building 9, Lane 888, Tian Lin Road, Minhang district, Shanghai, China

Prepared by

Audix Technology (Wujiang) Co., Ltd. EMC Dept.

No. 1289 Jiangxing East Road, the Part of Wujiang Economic Development Zone
Jiangsu China 215200

Tel : +86-512-63403993

Fax :+86-512-63403339

Report Number : ACWE-F1703002

Date of Test : Feb.25~Mar.30, 2017

Date of Report : Apr.01, 2017

TABLE OF CONTENTS

Description	Page
TEST REPORT CERTIFICATION	4
1. SUMMARY OF MEASUREMENTS AND RESULTS	5
2. GENERAL INFORMATION.....	6
2.1. Description of Device (EUT).....	6
2.2. Description of Test Facility	7
2.3. Measurement Uncertainty.....	7
3. ANTENNA REQUIREMENTS.....	8
4. CONDUCTED EMISSION MEASUREMENT	9
4.1. Test Equipment.....	9
4.2. Block Diagram of Test Setup.....	9
4.3. Power line Conducted Emission Limit	9
4.4. Test Procedure	10
4.5. Conducted Emission Measurement Results.....	10
5. RADIATED EMISSION MEASUREMENT	17
5.1. Test Equipment.....	17
5.2. Block Diagram of Test Setup.....	17
5.3. Radiated Emission Limits.....	19
5.4. Test Procedure	19
5.5. Measurement Results	20
5.6. Restricted Bands Measurement Results (For Below 1GHz).....	21
5.7. Restricted Bands Measurement Results (For Above 1GHz)	27
5.8. Spurious Emission Measurement Results in Band Edge Emission (FCC Part 15, 15.205).....	33
6. 6 DB BANDWIDTH MEASUREMENT	45
6.1. Test Equipment.....	45
6.2. Block Diagram of Test Setup.....	45
6.3. Specification Limits (§15.247(a)(2))	45
6.4. Test Procedure	45
6.5. Test Results.....	45
7. OUTPUT POWER MEASUREMENT.....	48
7.1. Test Equipment.....	48
7.2. Block Diagram of Test Setup.....	48
7.3. Specification Limits (§15.247(b)(3)).....	48
7.4. Test Procedure	49
7.5. Test Results.....	49
8. BAND EDGES MEASUREMENT	50
8.1. Test Equipment.....	50
8.2. Block Diagram of Test Setup.....	50
8.3. Specification Limits (§15.247(d)).....	50
8.4. Test Procedure	50
8.5. Test Results.....	50
9. POWER SPECTRAL DENSITY MEASUREMENT	53
9.1. Test Equipment.....	53
9.2. Block Diagram of Test Setup.....	53
9.3. Specification Limits (§15.247(e)).....	53
9.4. Test Results.....	53

10. EMISSION LIMITATIONS MEASUREMENT	56
10.1. Test Equipment.....	56
10.2. Block Diagram of Test Setup.....	56
10.3. Specification Limits (§15.247(d)).....	56
10.4. Test Procedure.....	56
10.5. Test Results.....	57
11. DUTY CYCLE	79
11.1. Test Equipment.....	79
11.2. Test Results.....	79
12. DEVIATION TO TEST SPECIFICATIONS	80

TEST REPORT CERTIFICATION

Applicant : Philips Lighting(China) Investment Co., Ltd.
 Manufacturer : Philips Lighting(China) Investment Co., Ltd.
 EUT Description : LED Lamp
 FCC ID : 2AGBW9290011998BX
 (A) Model No. : 9290011998B
 (B) Brand : Philips
 (C) Power Supply : AC 110-130V, 50/60Hz
 (D) Test Voltage : AC 120V, 60Hz

Applicable Standards:

FCC RULES AND REGULATIONS PART 15 SUBPART C, Oct. 2015
ANSI C63.10: 2013

The device described above was tested by Audix Technology (Wujiang) Co., Ltd. EMC Dept. to determine the maximum emission levels emanating from the device. The maximum emission levels were compared to the FCC Part 15 subpart C section 15.207, 15.209&15.247 limits.

The measurement results are contained in this test report and Audix Technology (Wujiang) Co., Ltd. EMC Dept. is assumed full responsibility for the accuracy and completeness of these measurements. Also, this test report shows that the EUT to be technically compliant with the FCC limits.

This test report applies to above tested sample only. This test report shall not be reproduced in part without written approval of Audix Technology (Wujiang) Co., Ltd. EMC Dept.

Date of Test: Feb.25~Mar.30, 2017

Date of Report: Apr.01, 2017

Prepared by : Emma Hu
 (Emma Hu/Assistant Administrator)

Reviewer : Danny Sun
 (Danny Sun/ Deputy Manager)

Approved & Authorized Signer : Ken Lu
 (Ken Lu/Assistant General Manager)

1. SUMMARY OF MEASUREMENTS AND RESULTS

The EUT has been tested according to the applicable standards and test results are referred as below.

Description of Test Item	Standard	Results	Remark
CONDUCTED EMISSION	FCC 47 CFR Part 15 Subpart C/ Section 15.207 And ANSI C63.10:2013	PASS	Minimum passing margin is 2.77 dB at 0.16 MHz
RADIATED EMISSION	FCC 47 CFR Part 15 Subpart C/ Section 15.209& Section 15.205 And ANSI C63.10:2013	PASS	Minimum passing margin is 8.34 dB at 31.94 MHz
6 dB BANDWIDTH	FCC 47 CFR Part 15 Subpart C/ Section 15.247(a)(2) And ANSI C63.10:2013	PASS	> 500kHz
OUTPUT POWER	FCC 47 CFR Part 15 Subpart C/ Section 15.247(b)(3) And ANSI C63.10:2013	PASS	Minimum passing margin is 25.68 dB at CH 20
BAND EDGES	FCC 47 CFR Part 15 Subpart C/ Section 15.247(d) And ANSI C63.10:2013	PASS	---
POWER SPECTRAL DENSITY	FCC 47 CFR Part 15 Subpart C/ Section 15.247(e) And ANSI C63.10:2013	PASS	Minimum passing margin is 19.160 dB at CH 25
EMISSION LIMITATIONS	FCC 47 CFR Part 15 Subpart C/ Section 15.247(d) And ANSI C63.10:2013	PASS	---

2. GENERAL INFORMATION

2.1. Description of Device (EUT)

Description	:	LED Lamp
Model No.	:	9290011998B
FCC ID	:	2AGBW9290011998BX
Brand	:	Philips
Applicant	:	Philips Lighting(China) Investment Co., Ltd. Building 9, Lane 888, Tian Lin Road, Minhang district, Shanghai, China
Manufacturer	:	Philips Lighting(China) Investment Co., Ltd. Building 9, Lane 888, Tian Lin Road, Minhang district, Shanghai, China
Radio Technology	:	IEEE 802.15.4 (ZigBee®)
Antenna Gain	:	2.21dBi
Fundamental Range	:	2405 MHz -2480MHz
Tested Frequency	:	2405MHz (CH11) 2450MHz (CH20) 2475MHz (CH25) 2480MHz (CH26)
Channel Setting Method	:	Channel is changed via atmel production test application.
Highest Working Frequency	:	2.4GHz
Modulation type	:	O-QPSK
Date of Receipt of Sample	:	Jan.16, 2017
Date of Test	:	Feb.25~Mar.30, 2017

2.2. Description of Test Facility

Name of Firm : **Audix Technology (Wujiang) Co., Ltd. EMC Dept.**

Site Location : No. 1289 Jiangxing East Road, the Eastern Part of Wujiang Economic Development Zone Jiangsu China 215200

Test Facilities : **No.1 Conducted Shielding Enclosure**

No.1 3m Semi-anechoic Chamber
 Date of Validity: Mar.30, 2018
 FCC Registration No.: 897661
 IC Registration No.:5183D-2

RF Fully Chamber

NVLAP Lab Code : 200786-0
 Valid until on Sep.30, 2017
 (NVLAP is a signatory member of ILAC MRA)
 Remark: This report shall not be imply endorsement, certification or approval by NVLAP, NIST, or any agency of the U.S. Federal Government.

2.3. Measurement Uncertainty

Test Item	Range Frequency	Uncertainty
No.1 Conducted Disturbance Measurement	0.15MHz ~ 30MHz	± 2.65dB
Radiated Disturbance Measurement (At 3m Chamber)	30MHz ~ 300MHz	± 3.18dB
	300MHz ~ 1GHz	± 3.12dB
Radiated Disturbance Measurement (At 3m Chamber)	1GHz ~ 6GHz	± 4.56dB
	6GHz ~ 18GHz	± 5.03dB

Remark: Uncertainty = $ku_c(y)$

Test Item	Uncertainty
6 dB Bandwidth	± 0.16 MHz
Maximum Peak Output Power	± 0.12dB
Band Edges	± 0.38dB
Power Spectral Density	± 0.38dB
Emission Limitations	± 0.38dB

Remark: Uncertainty = $ku_c(y)$

3. ANTENNA REQUIREMENTS

According to FCC 47 CFR §15.203:

“ An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

* The antennas of this E.U.T are permanently attached.


*The E.U.T Complies with the requirement of §15.203

4. CONDUCTED EMISSION MEASUREMENT

4.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Test Receiver	R & S	ESCI	100351	2016-07-03	2017-07-02
2.	A.M.N	R&S	ESH2-Z5	100153	2016-05-15	2017-05-14
3.	Pulse Limiter	R&S	ESH3-Z2	100605	2017-01-05	2018-01-04
4.	RF Cable	Shengxuan	RG400	Cable 50/1+Switch	2017-01-05	2018-01-04
5.	Software	Audix/e3(6.7.0313)				

4.2. Block Diagram of Test Setup

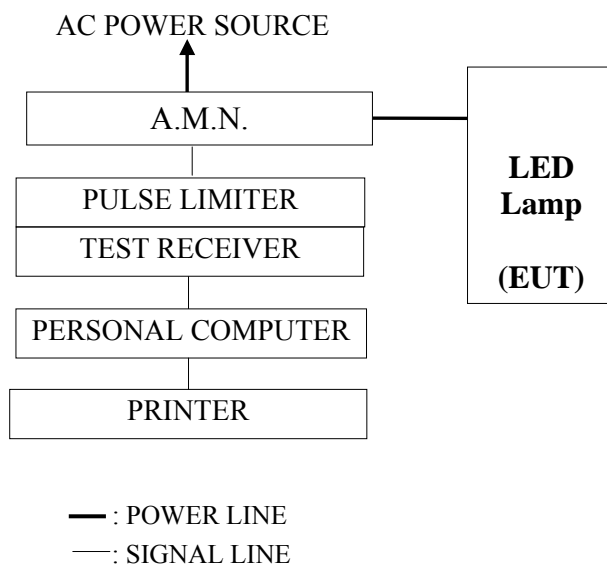

4.3. Power line Conducted Emission Limit

(FCC Part 15, Section 15.207, Class B)

Frequency	Maximum RF Line Voltage	
	Quasi-Peak Level	Average Level
150kHz ~ 500kHz	66 ~ 56 dB μ V	56 ~ 46 dB μ V
500kHz ~ 5MHz	56 dB μ V	46 dB μ V
5MHz ~ 30MHz	60 dB μ V	50 dB μ V

Remark1: If the average limit is met when using a Quasi-Peak detector, the EUT shall be deemed to meet both limits and measurement with the average detector is unnecessary.

2: The lower limit applies at the band edges.

4.4. Test Procedure

The measuring process is according to ANSI C63.10-2013 and laboratory internal procedure TKC-301-004. (For FCC Part15 Subpart C)

In the conducted emission measurement, the EUT and all peripheral devices were set up on a non-metallic table which was 0.8 meter height above the ground plane, and 0.4 meter far away from the vertical plane. The mains cable of the EUT connected to one Artificial Main Network(AMN). All other unit of the EUT and AE connected to a second Line Impedance Stabilization Network(L.I.S.N.). The telecommunication cable connected to the AE through a Impedance Stabilization Network(ISN) which terminated a 50Ω resistor. For the measurement, the A.M.N measuring port was terminated by a 50Ω measuring equipment and the second L.I.S.N measuring port was terminated by a 50Ω terminator. All measurements were done between the phase lead and the reference ground, and between the neutral lead and the reference ground. All cables or wires placement were verified to find out the maximum emission.

The bandwidth of measuring receiver was set at 9 kHz.

The required frequency band (0.15 MHz ~ 30 MHz) was pre-scanned with peak detector; the final measurement was measured with quasi-peak detector and average detector. (If the average limit is met when using a quasi-peak detector, the average detector is unnecessary).

The emission level is calculated automatically by the test system which uses the following equation:

$$\text{Emission level (dB}\mu\text{V)} = \text{Reading (dB}\mu\text{V)} + \text{A.M.N factor (dB)} + \text{Cable loss (dB)}.$$

(Cable loss includes pulse limiter loss)

4.5. Conducted Emission Measurement Results

For FCC Part15 Subpart C

PASSED.

EUT was performed during this section testing and all the test results are attached in next pages.

Test Date : Mar.30, 2017 Temperature : 23.3 Humidity : 58%

Mode	Test Condition	Reference Test Data No.	
		Neutral	Line
1	TX CH11 2405MHz	# 17	# 18
2	TX CH20 2450MHz	# 20	# 19
3	TX CH25 2475MHz	# 21	# 22


NOTE 1- ‘ 3 ’ means the worst test mode.

NOTE 2- The worst emission is detected at 0.16 MHz with emission level of 62.88 dB (μV) and with QP detector (Limit is 65.65 dB (μV)), when the Neutral of the EUT is connected to AMN.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,Eastern Part of WuJiang
 Economic Development Zone,JiangSu,China
 Tel:0512-63403993 Fax:0512-63403339

Data: 17 File: F:\2017Test Data\Report\1\C1W1701035.EM6 (22)

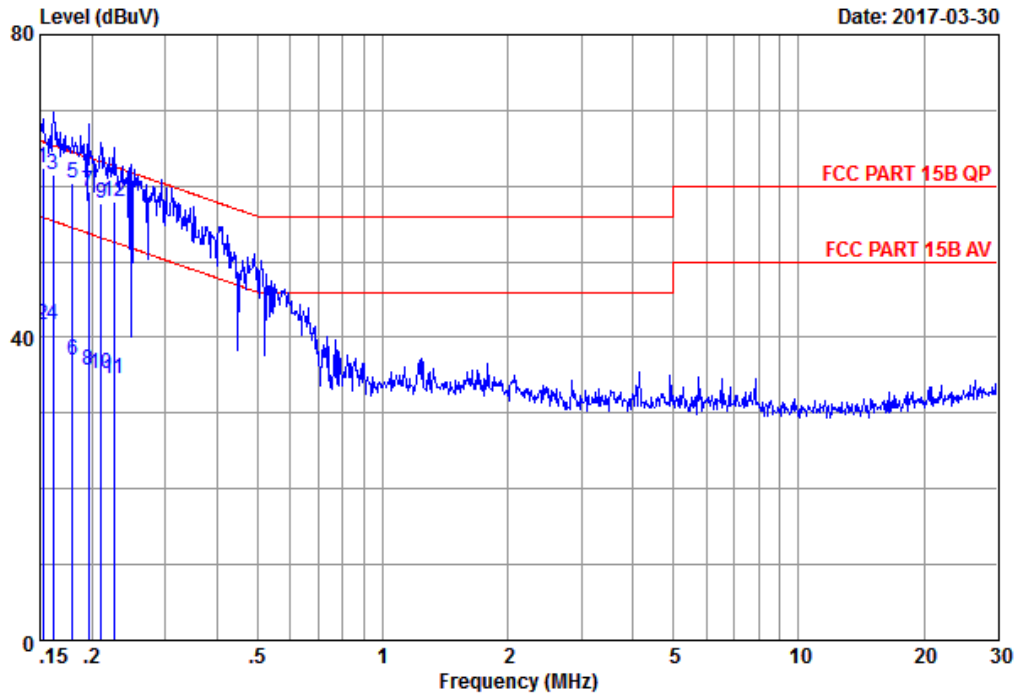

Site no. : No.1 Conducted shielding Enclosure Data no. : 17
 AMN/LISN : ESH2-Z5-1605 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3C&58%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290011998B
 Power Rating : 120Vac/60Hz
 Test mode : TX CH11 2405MHZ
 Test Port : LED board for APT
 memo :
 :
 :


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Aux (dB)	Emission Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.15	0.02	9.91	52.40	62.48	65.87	3.39	QP
2	0.15	0.15	0.02	9.91	31.70	41.78	55.87	14.09	Average
3	0.16	0.15	0.02	9.91	51.50	61.58	65.38	3.80	QP
4	0.16	0.15	0.02	9.91	31.70	41.78	55.38	13.60	Average
5	0.18	0.15	0.02	9.91	50.40	60.48	64.50	4.02	QP
6	0.18	0.15	0.02	9.91	26.80	36.88	54.50	17.62	Average
7	0.20	0.15	0.02	9.91	49.10	59.18	63.76	4.58	QP
8	0.20	0.15	0.02	9.91	25.50	35.58	53.76	18.18	Average
9	0.21	0.15	0.02	9.91	47.61	57.69	63.18	5.49	QP
10	0.21	0.15	0.02	9.91	25.20	35.28	53.18	17.90	Average
11	0.23	0.15	0.02	9.91	24.41	34.49	52.61	18.12	Average
12	0.23	0.15	0.02	9.91	47.80	57.88	62.61	4.73	QP

Remarks:
 1.Emission Level= AMN factor + Cable loss+ Pulse Att+ Reading .



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,Eastern Part of WuJiang
 Economic Development Zone,JiangSu,China
 Tel:0512-63403993 Fax:0512-63403339

Data: 18 File: F:\2017Test Data\Report\1\C1W1701035.EM6 (22)

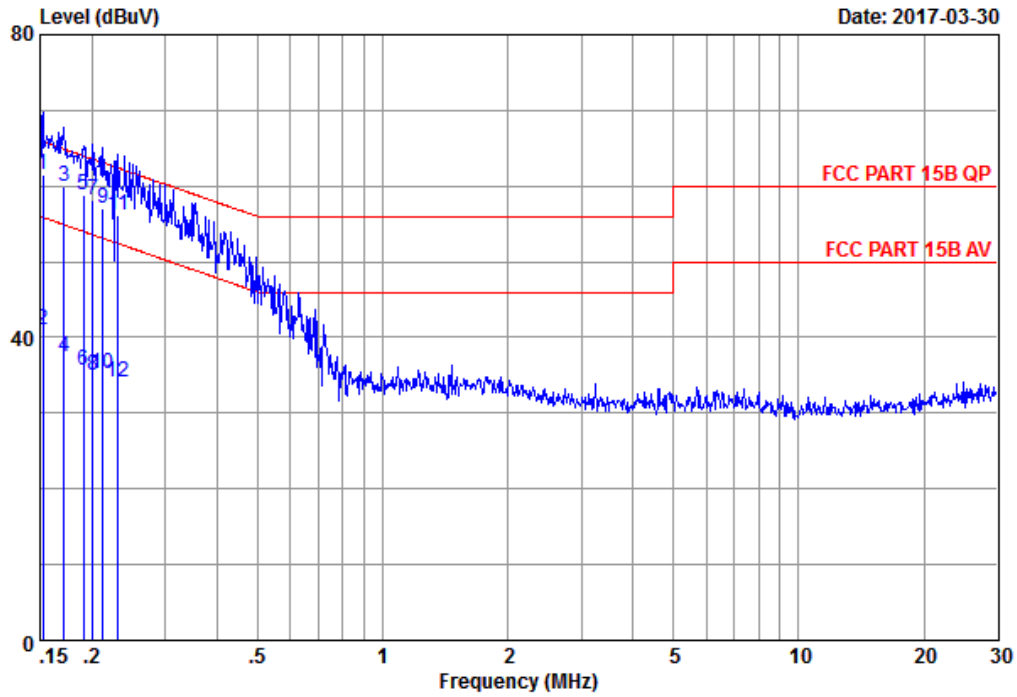

Site no. : No.1 Conducted shielding Enclosure Data no. : 18
 AMN/LISN : ESH2-Z5-1605 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3C&58%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290011998B
 Power Rating : 120Vac/60Hz
 Test mode : TX CH11 2405MHZ
 Test Port : LED board for APT
 memo :
 :
 :


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Aux (dB)	Emission Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.16	0.02	9.91	51.51	61.60	65.87	4.27	QP
2	0.15	0.16	0.02	9.91	30.81	40.90	55.87	14.97	Average
3	0.17	0.16	0.02	9.91	49.81	59.90	64.90	5.00	QP
4	0.17	0.16	0.02	9.91	27.31	37.40	54.90	17.50	Average
5	0.19	0.16	0.02	9.91	48.80	58.89	64.02	5.13	QP
6	0.19	0.16	0.02	9.91	25.50	35.59	54.02	18.43	Average
7	0.20	0.16	0.02	9.91	48.00	58.09	63.58	5.49	QP
8	0.20	0.16	0.02	9.91	24.80	34.89	53.58	18.69	Average
9	0.21	0.16	0.02	9.91	47.01	57.10	63.10	6.00	QP
10	0.21	0.16	0.02	9.91	25.10	35.19	53.10	17.91	Average
11	0.23	0.16	0.02	9.91	46.10	56.19	62.39	6.20	QP
12	0.23	0.16	0.02	9.91	24.10	34.19	52.39	18.20	Average

Remarks:
 1.Emission Level= AMN factor + Cable loss+ Pulse Att+ Reading .



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,Eastern Part of WuJiang
 Economic Development Zone,JiangSu,China
 Tel:0512-63403993 Fax:0512-63403339

Data: 20 File: F:\2017Test Data\Report\1\C1W1701035.EM6 (22)

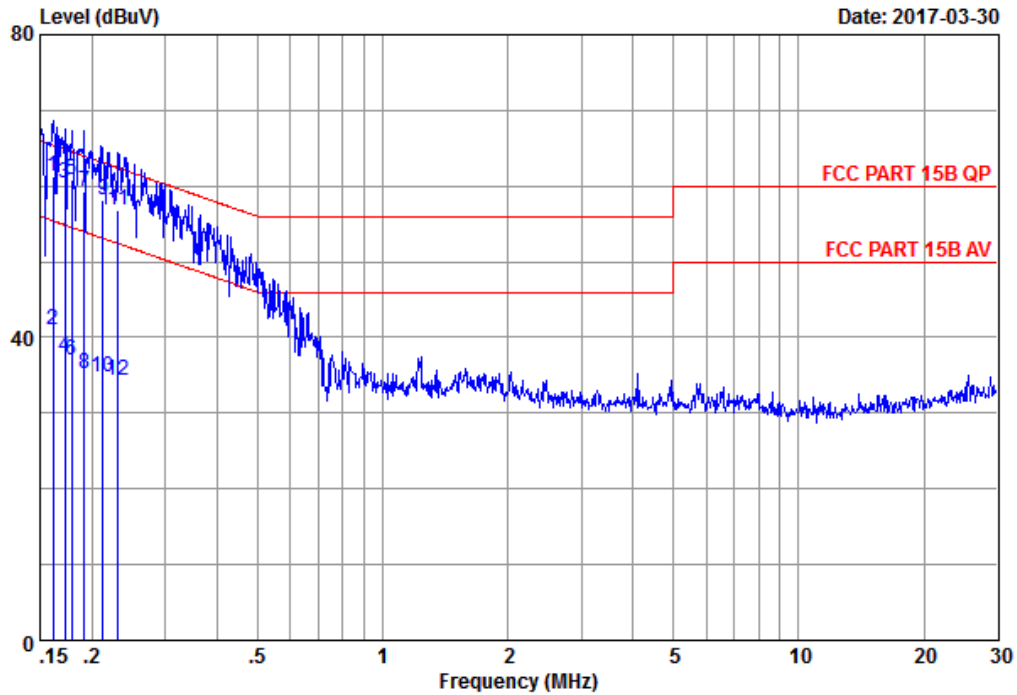

Site no. : No.1 Conducted shielding Enclosure Data no. : 20
 AMN/LISN : ESH2-Z5-1605 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3C&58%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290011998B
 Power Rating : 120Vac/60Hz
 Test mode : TX CH20 2450MHZ
 Test Port : LED board for APT
 memo :
 :
 :


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Aux (dB)	Emission Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	0.15	0.02	9.91	51.20	61.28	65.38	4.10	QP
2	0.16	0.15	0.02	9.91	31.00	41.08	55.38	14.30	Average
3	0.17	0.15	0.02	9.91	50.20	60.28	64.86	4.58	QP
4	0.17	0.15	0.02	9.91	27.30	37.38	54.86	17.48	Average
5	0.18	0.15	0.02	9.91	50.80	60.88	64.55	3.67	QP
6	0.18	0.15	0.02	9.91	26.80	36.88	54.55	17.67	Average
7	0.19	0.15	0.02	9.91	49.10	59.18	63.98	4.80	QP
8	0.19	0.15	0.02	9.91	25.20	35.28	53.98	18.70	Average
9	0.21	0.15	0.02	9.91	48.00	58.08	63.10	5.02	QP
10	0.21	0.15	0.02	9.91	24.61	34.69	53.10	18.41	Average
11	0.23	0.15	0.02	9.91	46.80	56.88	62.39	5.51	QP
12	0.23	0.15	0.02	9.91	24.30	34.38	52.39	18.01	Average

Remarks:
 1.Emission Level= AMN factor + Cable loss+ Pulse Att+ Reading .



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,Eastern Part of WuJiang
 Economic Development Zone,JiangSu,China
 Tel:0512-63403993 Fax:0512-63403339

Data: 19 File: F:\2017Test Data\Report\1\C1W1701035.EM6 (22)

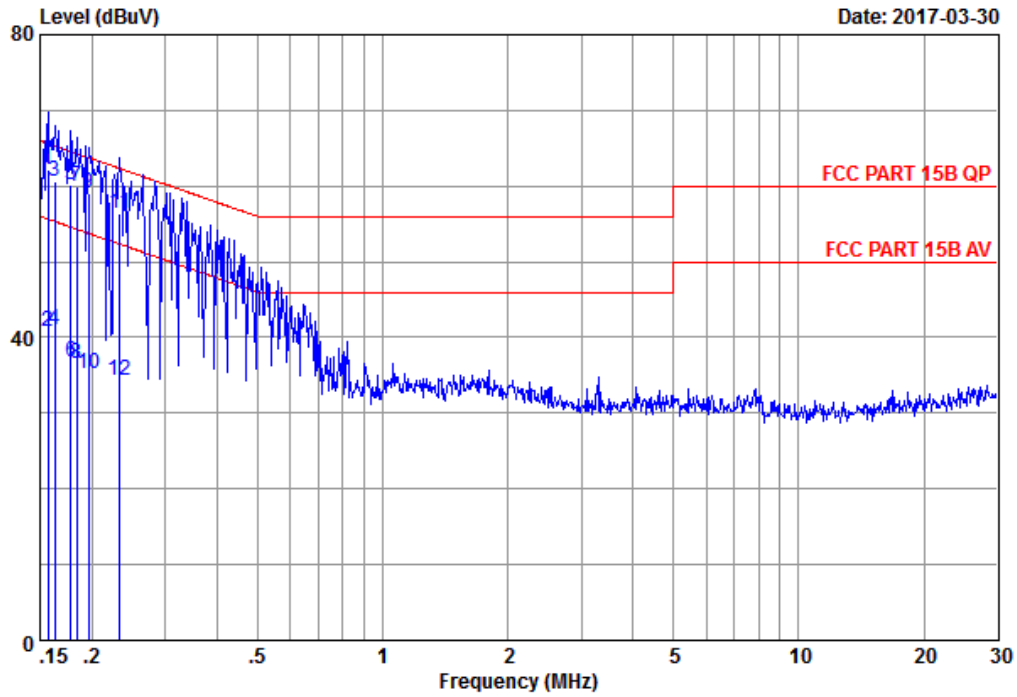

Site no. : No.1 Conducted shielding Enclosure Data no. : 19
 AMN/LISN : ESH2-Z5-1605 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3C&58%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290011998B
 Power Rating : 120Vac/60Hz
 Test mode : TX CH20 2450MHZ
 Test Port : LED board for APT
 memo :
 :
 :


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Aux (dB)	Emission Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	0.16	0.02	9.91	52.10	62.19	65.65	3.46	QP
2	0.16	0.16	0.02	9.91	30.70	40.79	55.65	14.86	Average
3	0.16	0.16	0.02	9.91	50.60	60.69	65.34	4.65	QP
4	0.16	0.16	0.02	9.91	30.90	40.99	55.34	14.35	Average
5	0.18	0.16	0.02	9.91	50.00	60.09	64.59	4.50	QP
6	0.18	0.16	0.02	9.91	26.70	36.79	54.59	17.80	Average
7	0.18	0.16	0.02	9.91	49.80	59.89	64.33	4.44	QP
8	0.18	0.16	0.02	9.91	26.40	36.49	54.33	17.84	Average
9	0.20	0.16	0.02	9.91	48.90	58.99	63.76	4.77	QP
10	0.20	0.16	0.02	9.91	25.10	35.19	53.76	18.57	Average
11	0.23	0.16	0.02	9.91	46.31	56.40	62.35	5.95	QP
12	0.23	0.16	0.02	9.91	24.31	34.40	52.35	17.95	Average

Remarks:
 1.Emission Level= AMN factor + Cable loss+ Pulse Att+ Reading .



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,Eastern Part of WuJiang
 Economic Development Zone,JiangSu,China
 Tel:0512-63403993 Fax:0512-63403339

Data: 21 File: F:\2017Test Data\Report\1\C1W1701035.EM6 (22)

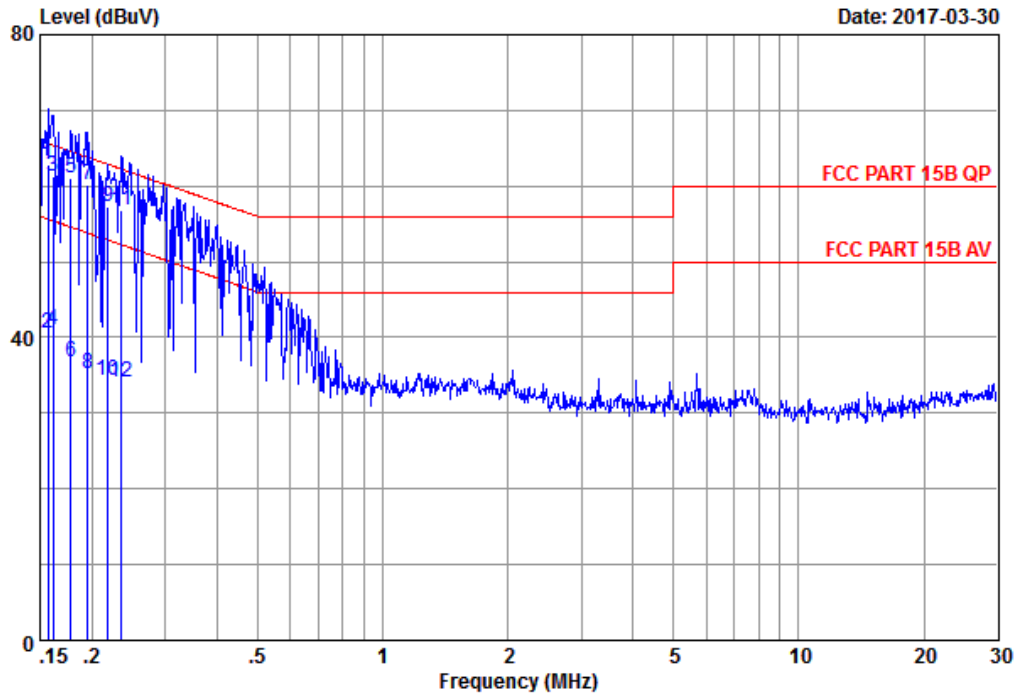

Site no. : No.1 Conducted shielding Enclosure Data no. : 21
 AMN/LISN : ESH2-Z5-1605 Phase : NEUTRAL
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3C&58%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290011998B
 Power Rating : 120Vac/60Hz
 Test mode : TX CH25 2475MHZ
 Test Port : LED board for APT
 memo :
 :
 :


	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Aux (dB)	Emission Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.16	0.15	0.02	9.91	52.80	62.88	65.65	2.77	QP
2	0.16	0.15	0.02	9.91	30.50	40.58	55.65	15.07	Average
3	0.16	0.15	0.02	9.91	51.30	61.38	65.38	4.00	QP
4	0.16	0.15	0.02	9.91	30.90	40.98	55.38	14.40	Average
5	0.18	0.15	0.02	9.91	51.00	61.08	64.59	3.51	QP
6	0.18	0.15	0.02	9.91	26.70	36.78	54.59	17.81	Average
7	0.20	0.15	0.02	9.91	50.00	60.08	63.80	3.72	QP
8	0.20	0.15	0.02	9.91	25.20	35.28	53.80	18.52	Average
9	0.22	0.15	0.02	9.91	47.11	57.19	62.88	5.69	QP
10	0.22	0.15	0.02	9.91	24.20	34.28	52.88	18.60	Average
11	0.24	0.15	0.03	9.91	46.70	56.79	62.26	5.47	QP
12	0.24	0.15	0.03	9.91	23.90	33.99	52.26	18.27	Average

Remarks:
 1.Emission Level= AMN factor + Cable loss+ Pulse Att+ Reading .



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,Eastern Part of WuJiang
 Economic Development Zone,JiangSu,China
 Tel:0512-63403993 Fax:0512-63403339

Data: 22 File: F:\2017Test Data\Report\1\C1W1701035.EM6 (22)

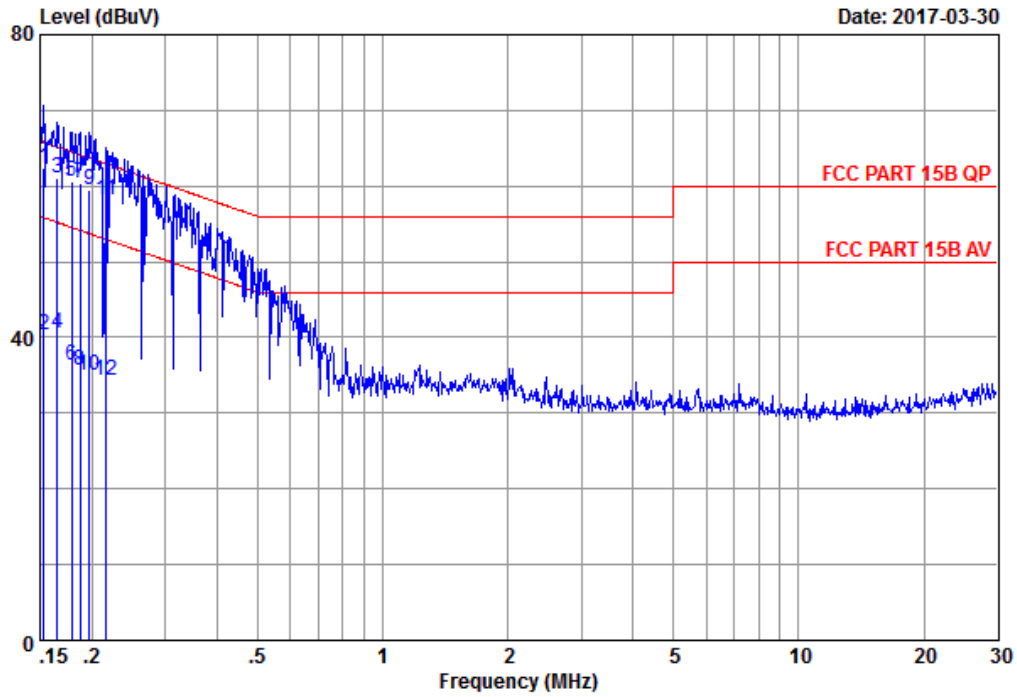

Site no. : No.1 Conducted shielding Enclosure Data no. : 22
 AMN/LISN : ESH2-Z5-1605 Phase : LINE
 Limit : FCC PART 15B QP
 Env. / Ins. : 23.3C&58%/ESCI Engineer : KM.Tong
 EUT : LED Lamp
 M/N : 9290011998B
 Power Rating : 120Vac/60Hz
 Test mode : TX CH25 2475MHZ
 Test Port : LED board for APT
 memo :
 :
 :

	Freq. (MHz)	AMN Factor (dB)	Cable Loss (dB)	Aux (dB)	Emission Reading (dBuV)	Level (dBuV)	Limits (dBuV)	Margin (dB)	Remark
1	0.15	0.16	0.02	9.91	52.40	62.49	65.82	3.33	QP
2	0.15	0.16	0.02	9.91	30.31	40.40	55.82	15.42	Average
3	0.17	0.16	0.02	9.91	51.01	61.10	65.21	4.11	QP
4	0.17	0.16	0.02	9.91	30.51	40.60	55.21	14.61	Average
5	0.18	0.16	0.02	9.91	50.60	60.69	64.55	3.86	QP
6	0.18	0.16	0.02	9.91	26.30	36.39	54.55	18.16	Average
7	0.19	0.16	0.02	9.91	50.30	60.39	64.15	3.76	QP
8	0.19	0.16	0.02	9.91	25.60	35.69	54.15	18.46	Average
9	0.20	0.16	0.02	9.91	49.40	59.49	63.71	4.22	QP
10	0.20	0.16	0.02	9.91	24.80	34.89	53.71	18.82	Average
11	0.22	0.16	0.02	9.91	48.01	58.10	62.96	4.86	QP
12	0.22	0.16	0.02	9.91	24.20	34.29	52.96	18.67	Average

Remarks:
 1.Emission Level= AMN factor + Cable loss+ Pulse Att+ Reading .

5. RADIATED EMISSION MEASUREMENT


5.1. Test Equipment

The following test equipment was used during the radiated emission measurement:
At 3m Semi-Anechoic Chamber


Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	Preamplifier	Chengyi dianzi	EMC9135	980374	2017-01-04	2018-01-03
2.	Preamplifier	Chengyi dianzi	EMC9135	980373	2017-01-04	2018-01-03
3.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2016-05-15	2017-05-14
4.	Test Receiver	R&S	ESCI	100361	2017-01-05	2018-01-04
5.	Bi-log Antenna	Seibersdorf	VULB 9168	705	2016-07-20	2017-07-19
6.	Horn Antenna	EMCO	3115	62959	2016-06-20	2017-06-19
7.	Horn Antenna	ETS	3116	62641	2016-09-30	2017-09-29
8.	RF Cable #1	Yuhang CSRH	cable-3m	001(0.5m)	2017-01-05	2018-01-04
9.	RF Cable #2	Yuhang CSRH	cable-3m	002(0.5m)	2017-01-05	2018-01-04
10.	RF Cable #3	Yuhang CSRH	cable-3m	003(3.0m)	2017-01-05	2018-01-04
11.	Software	Audix/e3(6.7.0313)				

5.2. Block Diagram of Test Setup


5.2.1. Block Diagram of Test Setup between EUT and simulators

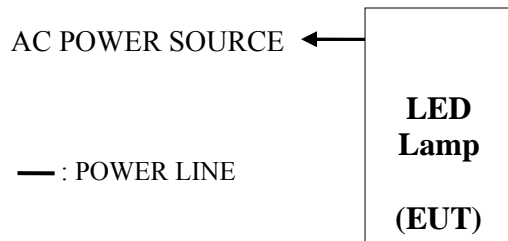

5.2.2. No. 1 3m Semi-Anechoic Chamber Setup Diagram (Test distance:3m) for 30-1000MHz

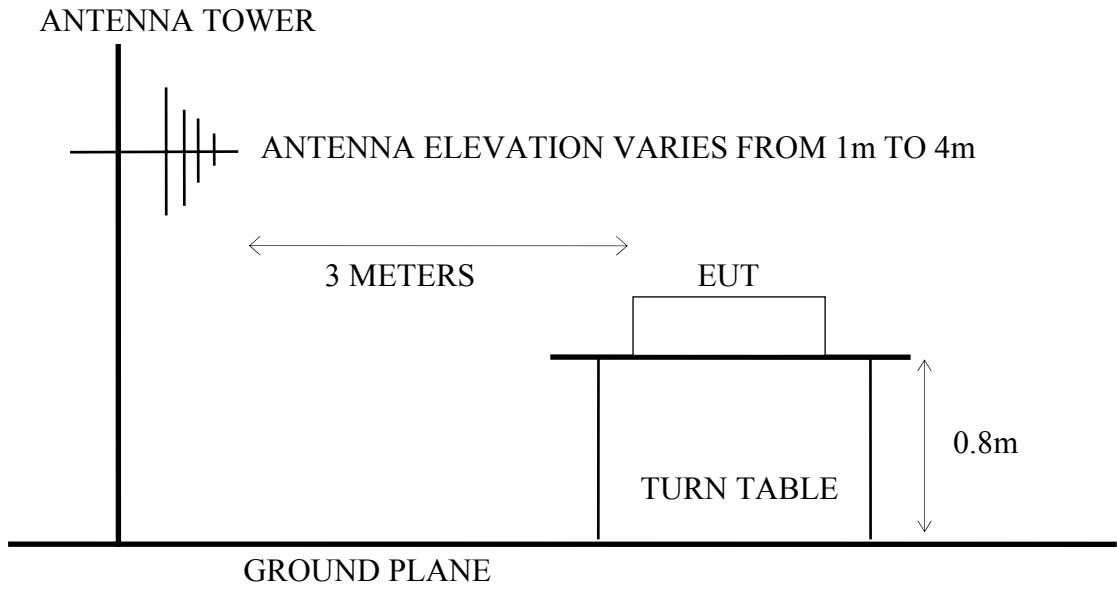

5.2.3. No. 1 3m Semi-Anechoic Chamber Setup Diagram (Test distance: 3m) for above 1GHz

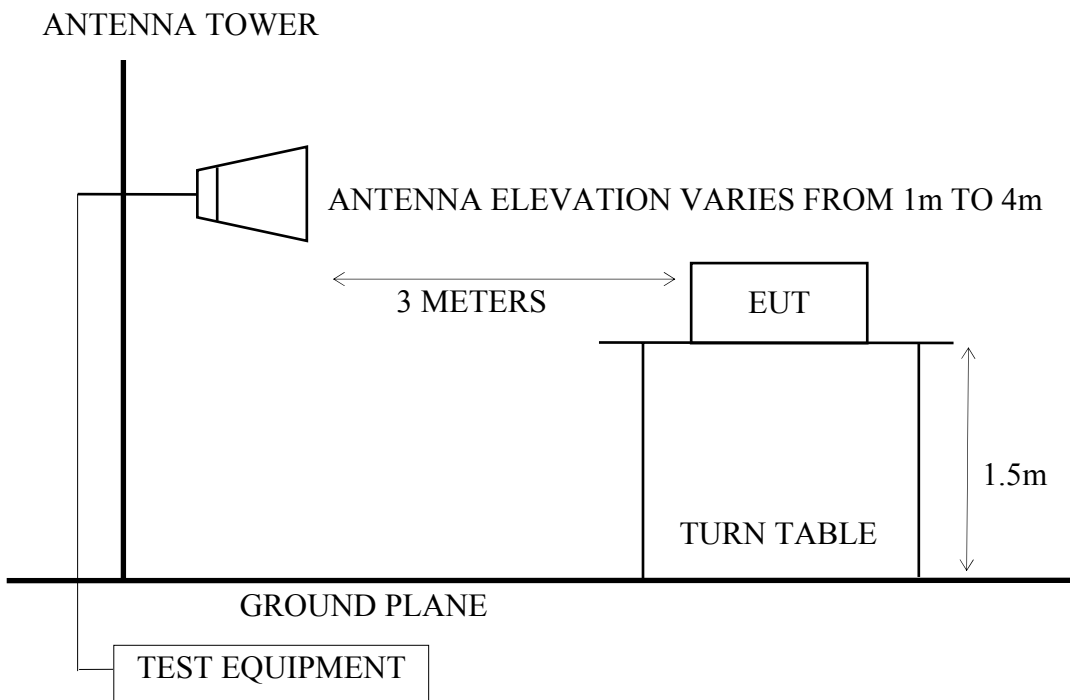

5.3. Radiated Emission Limits

Radiated Emission Limits (FCC Part15 C, section 15.209, CISPR22)

Frequency MHz	Distance Meters	Field Strengths Limits
		dB μ V/m
30 ~ 88	3	40
88 ~ 216	3	43.5
216 ~ 960	3	46
Above 960	3	54
Above 1000	3	74 (Peak) 54 (Average)

Remark : (1) Emission level (dB μ V/m) = 20 log Emission level (μ V/m)
 (2)The tighter limit applies at the edge between two frequency bands.

5.4. Test Procedure

The measuring process is according to ANSI C63.10-2013 and laboratory internal procedure TKC-301-001. (For FCC Part15 Subpart C)

In the radiated disturbance measurement, the EUT and all simulators were set up on a non-metallic turn table which was 0.8 meter above the ground plane. Measurement distance between EUT and receiving antennas was set at 3 meters at 30MHz~1GHz and 3 meters at 1GHz~6GHz. The measurement distance is the shortest horizontal distance between an imaginary circular periphery which consists of EUT periphery and cables and the reference point of the antenna. During the radiated measurement, the EUT was rotated 360° and receiving antennas were moved from 1 ~ 4 meters for finding maximum emission. Two receiving antennas were used for both horizontal and vertical polarization detection for 30MHz~1GHz, One receiving antennas was used for both horizontal and vertical polarization detection for 1GHz~6GHz (the absorbing material was added when testing of 1GHz~6GHz was done). All cables or wires placement were verified to find out the maximum emission.

The bandwidth of measuring receiver (or spectrum analyzer) was set to:

RBW (120 kHz), VBW (300 kHz) for QP detector below 1GHz
 RBW (1 MHz), VBW (1MHz) for Peak detector above 1GHz
 RBW (1 MHz), VBW (10Hz) for AV detector above 1GHz

The frequency range from 30MHz to 10th harmonic(25GHz) are checked, and no any emissions were found from 18GHz to 25GHz.

The emission level is calculated automatically by the test system which uses the following equation :

- For 30MHz-1GHz measurement:
 Emission Level (dB μ V/m) = Reading (dB μ V)+Antenna Factor (dB/m)+Cable Loss (dB)
- For Above 1GHz measurement:
 Emission Level (dB μ V/m) = Reading (dB μ V)+Antenna Factor (dB/m)+Cable Loss(dB)
 -Pre-amplifier factor (dB)

The three orthogonal planes have been all tested, and the data of the worst mode XZ plan(in Horizontal) & XY plan(in Vertical) is shown in the report.

5.5. Measurement Results

PASSED

5.5.1. For Restricted Bands:

The EUT was tested in restricted bands and all the test results are listed in section 5.7 & 5.8. (The restricted bands defined in part 15.205(a))

For Frequency range : below 1GHz

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2405MHz (Channel 11)	# 5	# 6
2.		2450MHz (Channel 20)	# 7	# 8
3.		2475MHz (Channel 25)	# 9	# 10

For Frequency range : above 1GHz

No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2405MHz (Channel 11)	# 11	# 12
2.		2450MHz (Channel 20)	# 13	# 14
3.		2475MHz (Channel 25)	# 15	# 16

5.5.2. For Band Edge Emission

The EUT was tested in restricted bands and all the test results are listed in section 5.9. The restricted bands defined in part 15.205(a)


No.	Test Mode and Frequency		Reference Test Data No.	
			Horizontal	Vertical
1.	Transmitting	2405MHz (Channel 11)	# 17, # 19	# 18, # 20
2.		2475MHz (Channel 25)	# 21, # 23	# 22, # 24
3.		2480MHz (Channel 26)	# 25, # 27	# 26, # 28

5.6. Restricted Bands Measurement Results (For Below 1GHz)



Audix Technology(Wujiang) Co., Ltd.
 No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
 Economic Development Zone, JiangSu, China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 5 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

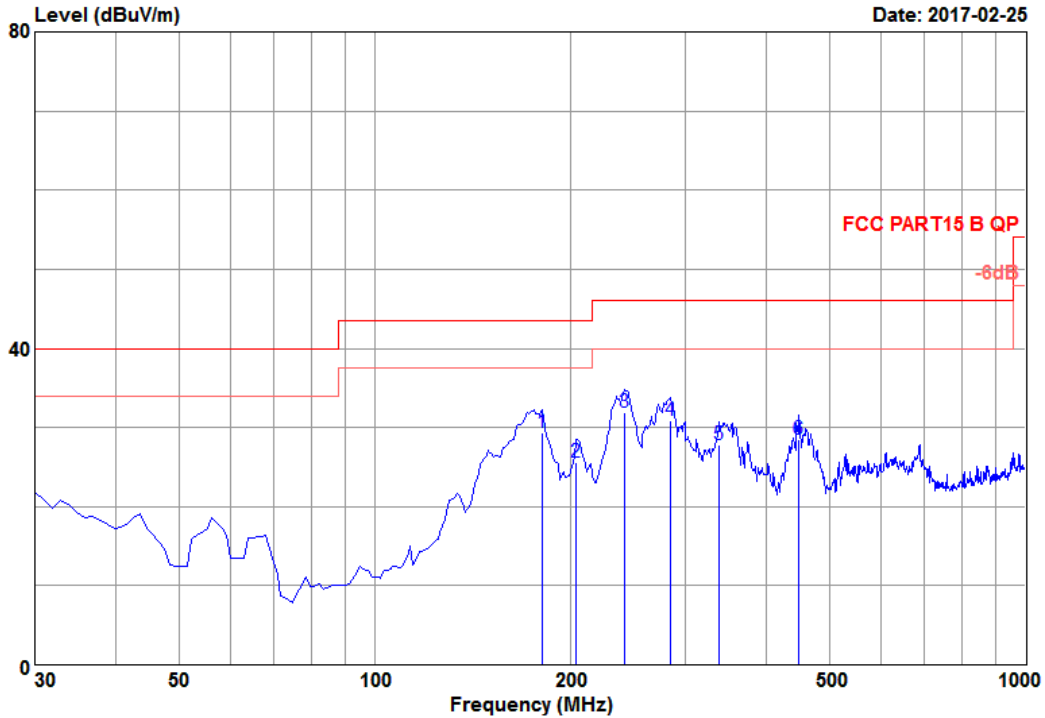

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 5
 Dis. / Ant. : 3m 6198(705)-160720 Ant. pol. : HORIZONTAL
 Limit : FCC PART15 B QP
 Env. / Ins. : 16.5°C&40%/ESCI Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	180.35	9.90	1.59	44.69	26.88	29.30	43.50	14.20	QP
2	203.63	10.36	1.72	40.27	26.79	25.56	43.50	17.94	QP
3	241.46	12.20	1.86	44.49	26.72	31.83	46.00	14.17	QP
4	284.14	13.58	2.04	41.82	26.63	30.81	46.00	15.19	QP
5	338.46	14.90	2.24	37.45	26.86	27.73	46.00	18.27	QP
6	448.07	17.10	2.61	36.37	27.59	28.49	46.00	17.51	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel:(0512)63403993 Fax:(0512)63403993

Data: 6 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

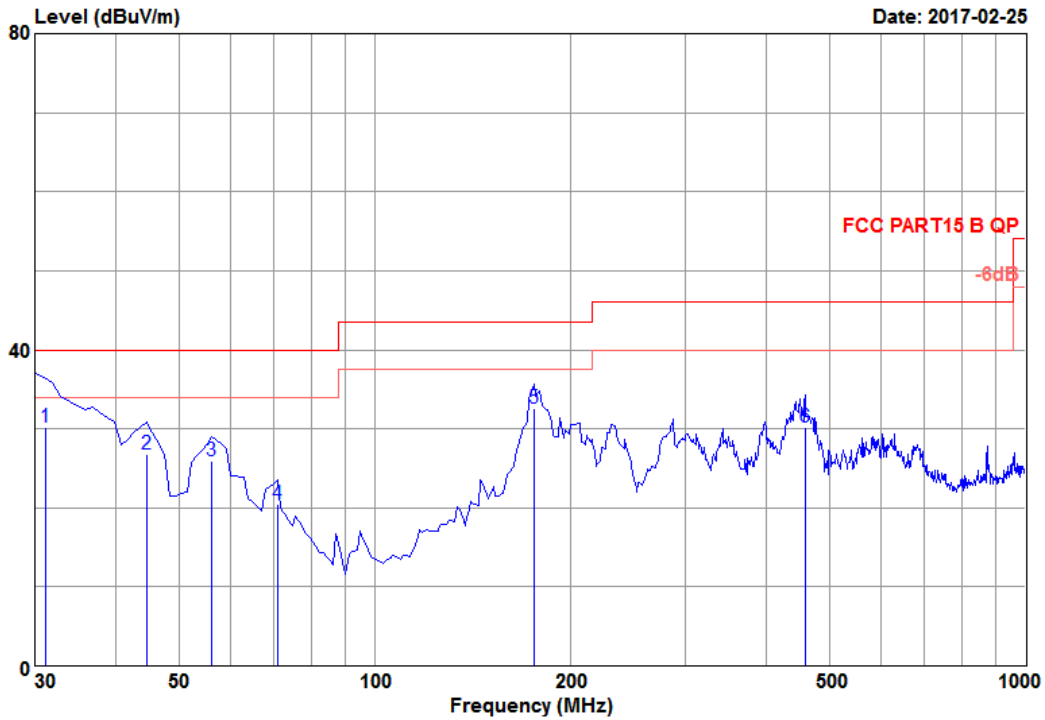

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 6198(705)-160720
 Limit : FCC PART15 B QP
 Env. / Ins. : 16.5*CS&40%/ESCI
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo : LED Board for APT
 Data NO. : 6
 Ant. pol. : VERTICAL
 Engineer : Mickey


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.22	18.83	0.64	38.01	27.35	30.13	40.00	9.87	QP
2	44.55	12.47	0.76	40.92	27.31	26.84	40.00	13.16	QP
3	56.19	7.32	0.86	45.10	27.29	25.99	40.00	14.01	QP
4	70.74	6.82	0.97	40.00	27.26	20.53	40.00	19.47	QP
5	175.50	10.08	1.57	47.92	26.90	32.67	43.50	10.83	QP
6	458.74	17.29	2.65	37.98	27.65	30.27	46.00	15.73	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 7 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

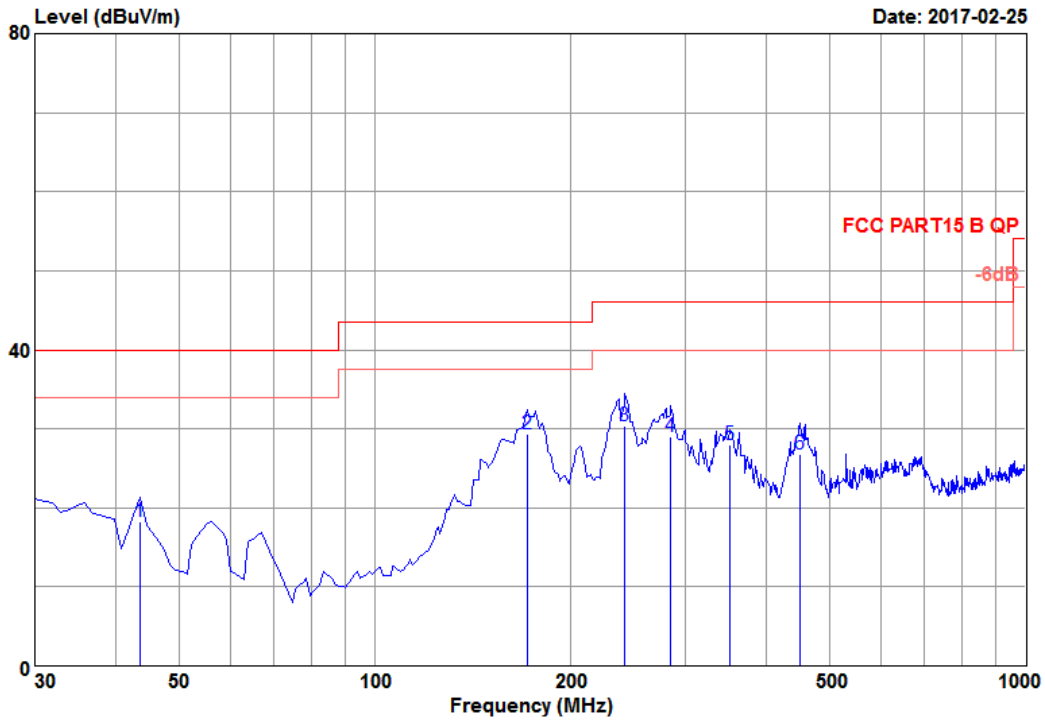

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 7
 Dis. / Ant. : 3m 6198(705)-160720 Ant. pol. : HORIZONTAL
 Limit : FCC PART15 B QP
 Env. / Ins. : 16.5*CS&40%/ESCI Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH20 2450MHz
 Memo : LED Board for APT

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	43.58	12.47	0.76	32.38	27.32	18.29	40.00	21.71	QP
2	171.62	10.26	1.55	44.51	26.91	29.41	43.50	14.09	QP
3	242.43	12.36	1.87	42.94	26.72	30.45	46.00	15.55	QP
4	285.11	13.58	2.04	40.01	26.63	29.00	46.00	17.00	QP
5	351.07	15.28	2.28	37.32	26.95	27.93	46.00	18.07	QP
6	450.98	17.14	2.62	34.55	27.60	26.71	46.00	19.29	QP


Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel:(0512)63403993 Fax:(0512)63403993

Data: 8 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

Date: 2017-02-25

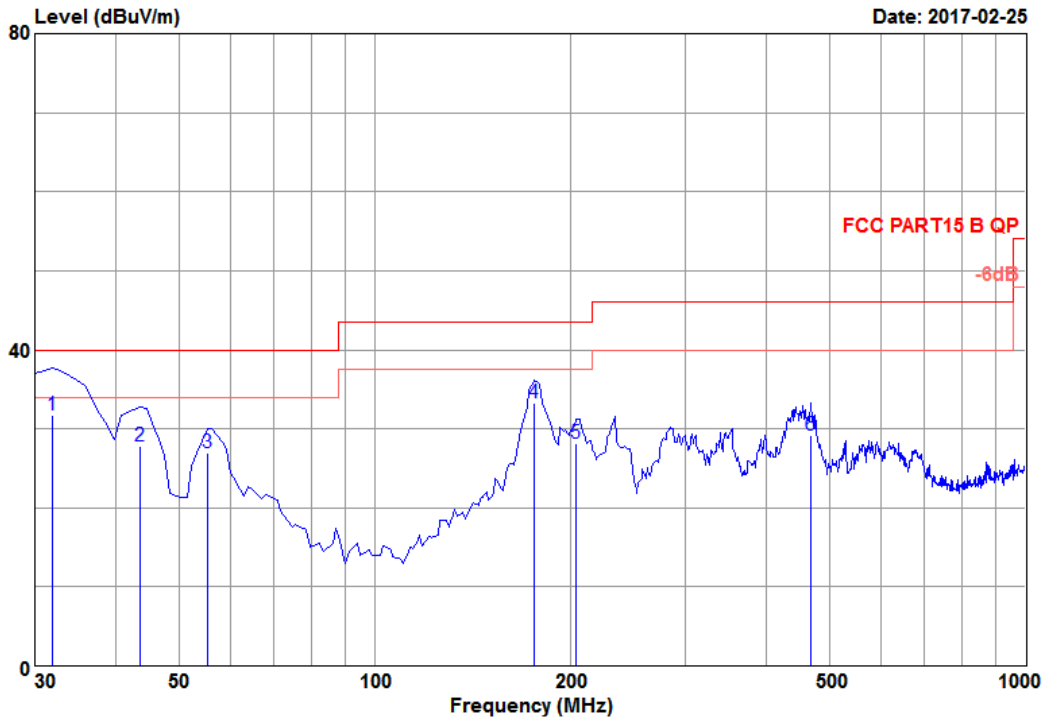

Site NO. : 3m Semi-Anechoic Chamber
 Dis. / Ant. : 3m 6198(705)-160720
 Limit : FCC PART15 B QP
 Env. / Ins. : 16.5*CS&40%/ESCI
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH20 2450MHz
 Memo : LED Board for APT

Data NO. : 8
 Ant. pol. : VERTICAL
 Engineer : Mickey


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.94	18.83	0.65	39.53	27.35	31.66	40.00	8.34	QP
2	43.58	12.47	0.76	41.86	27.32	27.77	40.00	12.23	QP
3	55.22	7.32	0.85	46.14	27.29	27.02	40.00	12.98	QP
4	175.50	10.08	1.57	48.44	26.90	33.19	43.50	10.31	QP
5	203.63	10.36	1.72	42.92	26.79	28.21	43.50	15.29	QP
6	467.47	17.45	2.67	36.83	27.71	29.24	46.00	16.76	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel:(0512)63403993 Fax:(0512)63403993

Data: 9 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

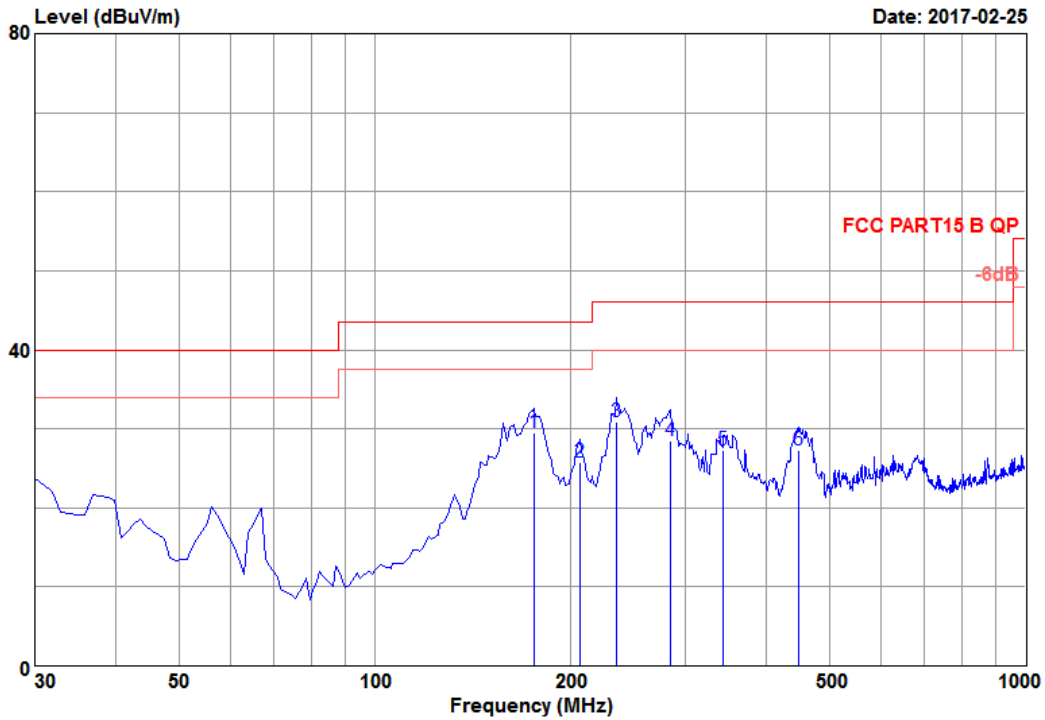

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 9
Dis. / Ant. : 3m 6198(705)-160720	Ant. pol. : HORIZONTAL
Limit : FCC PART15 B QP	
Env. / Ins. : 16.5*CS&40%/ESCI	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH25 2475MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	175.50	10.08	1.57	44.77	26.90	29.52	43.50	13.98	QP
2	206.54	10.42	1.73	40.34	26.79	25.70	43.50	17.80	QP
3	234.67	11.76	1.84	44.06	26.73	30.93	46.00	15.07	QP
4	284.14	13.58	2.04	39.46	26.63	28.45	46.00	17.55	QP
5	343.31	15.03	2.25	36.88	26.90	27.26	46.00	18.74	QP
6	447.10	17.10	2.61	35.13	27.58	27.26	46.00	18.74	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel:(0512)63403993 Fax:(0512)63403993

Data: 10 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

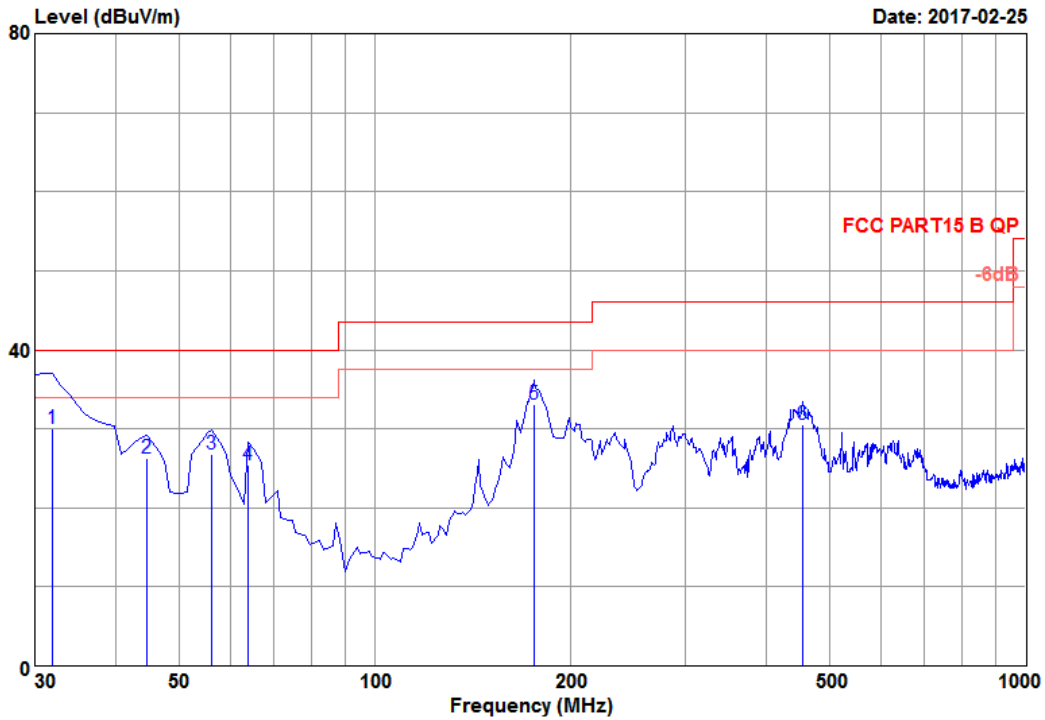

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 10
 Dis. / Ant. : 3m 6198(705)-160720 Ant. pol. : VERTICAL
 Limit : FCC PART15 B QP
 Env. / Ins. : 16.5*CS&40%/ESCI Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH25 2475MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	31.94	18.83	0.65	37.86	27.35	29.99	40.00	10.01	QP
2	44.55	12.47	0.76	40.31	27.31	26.23	40.00	13.77	QP
3	56.19	7.32	0.86	45.96	27.29	26.85	40.00	13.15	QP
4	63.95	6.32	0.92	45.41	27.27	25.38	40.00	14.62	QP
5	175.50	10.08	1.57	48.39	26.90	33.14	43.50	10.36	QP
6	454.86	17.22	2.64	38.23	27.63	30.46	46.00	15.54	QP

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

5.7. Restricted Bands Measurement Results (For Above 1GHz)



Audix Technology(Wujiang) Co., Ltd.
 No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
 Economic Development Zone, JiangSu, China
 Tel: (0512) 63403993 Fax: (0512) 63403993

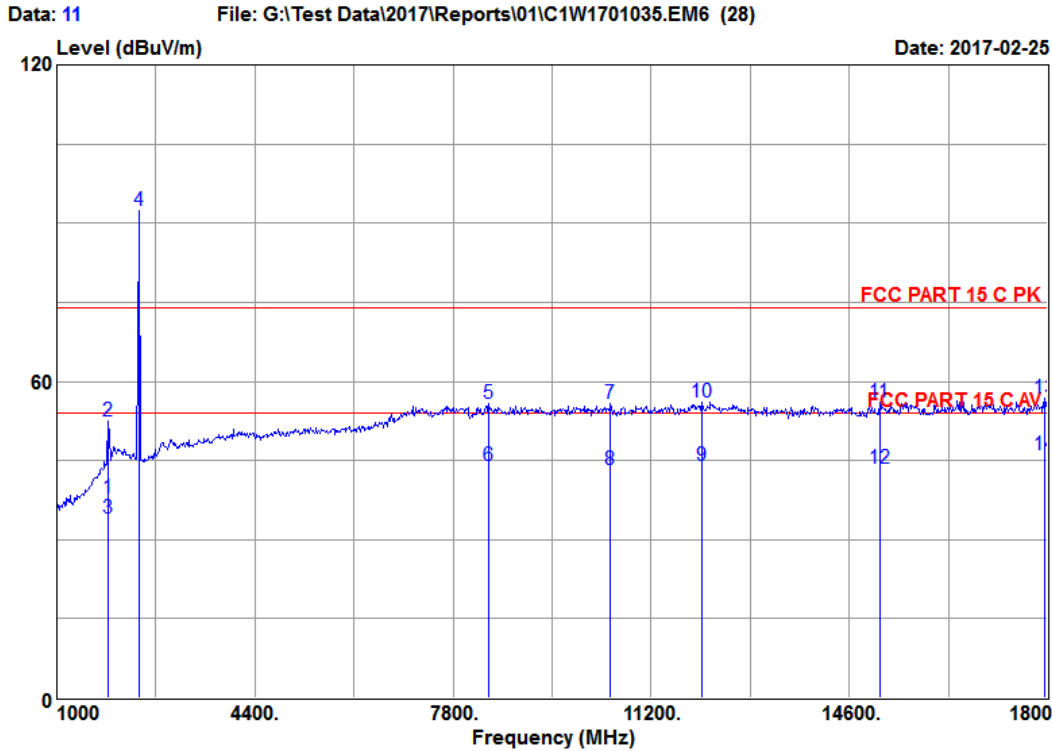

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 11
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*C&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1883.69	30.18	6.39	35.17	33.77	37.97	54.00	16.03	Average
2	1884.00	30.18	6.39	49.70	33.77	52.50	74.00	21.50	Peak
3	1886.34	30.18	6.39	31.14	33.77	33.94	54.00	20.06	Average
4	2411.00	29.05	7.45	89.23	33.38	92.35	74.00	-18.35	Peak
5	8412.00	38.96	12.39	37.81	33.32	55.84	74.00	18.16	Peak
6	8415.33	38.96	12.39	25.95	33.31	43.99	54.00	10.01	Average
7	10503.00	38.20	13.21	37.01	32.67	55.75	74.00	18.25	Peak
8	10505.27	38.20	13.21	24.46	32.67	43.20	54.00	10.80	Average
9	12063.94	41.57	13.85	21.48	32.92	43.98	54.00	10.02	Average
10	12067.00	41.57	13.85	33.50	32.92	56.00	74.00	18.00	Peak
11	15127.00	40.67	15.30	32.84	32.68	56.13	74.00	17.87	Peak
12	15129.36	40.67	15.30	20.15	32.68	43.44	54.00	10.56	Average
13	17949.00	46.18	16.56	26.95	32.98	56.71	74.00	17.29	Peak
14	17951.34	46.18	16.56	16.42	32.98	46.18	54.00	7.82	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 12 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

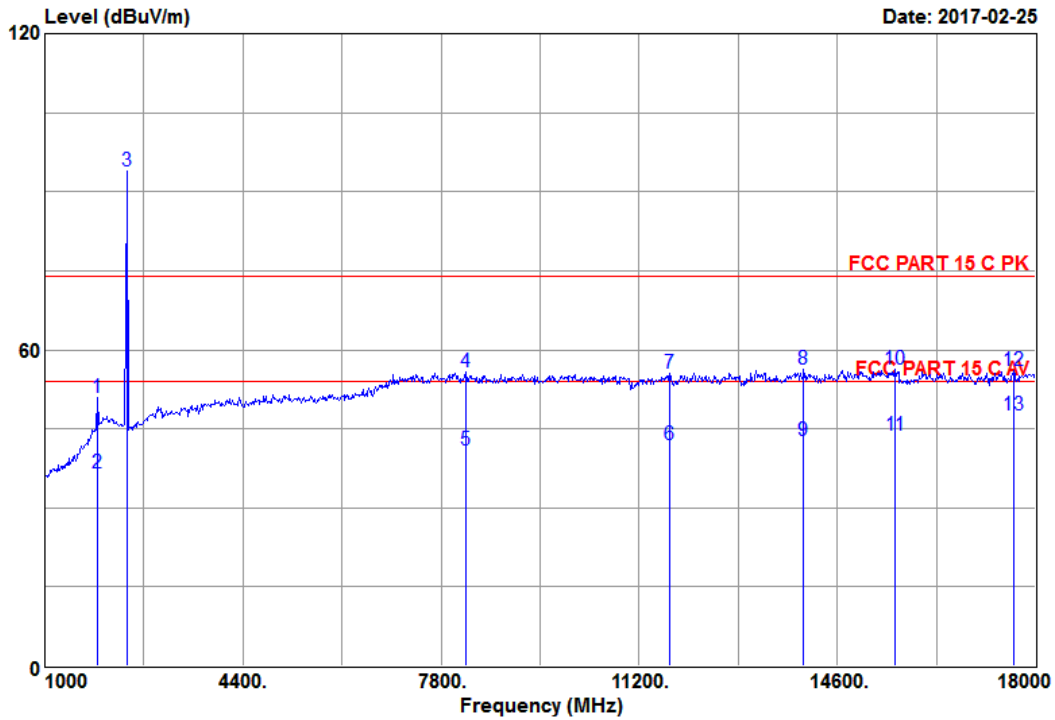

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 12
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1901.00	30.40	6.39	47.82	33.74	50.87	74.00	23.13	Peak
2	1903.72	30.40	6.39	33.54	33.74	36.59	54.00	17.41	Average
3	2411.00	29.05	7.45	90.76	33.38	93.88	74.00	-19.88	Peak
4	8225.00	38.20	12.28	38.63	33.40	55.71	74.00	18.29	Peak
5	8226.34	38.20	12.28	23.95	33.40	41.03	54.00	12.97	Average
6	11725.36	41.24	13.72	19.97	32.86	42.07	54.00	11.93	Average
7	11727.00	41.24	13.72	33.44	32.86	55.54	74.00	18.46	Peak
8	14022.00	42.53	14.87	32.14	33.29	56.25	74.00	17.75	Peak
9	14025.36	42.53	14.87	18.65	33.29	42.76	54.00	11.24	Average
10	15586.00	39.25	15.49	33.89	32.43	56.20	74.00	17.80	Peak
11	15591.75	39.25	15.49	21.56	32.42	43.88	54.00	10.12	Average
12	17626.00	44.81	16.46	27.51	32.85	55.93	74.00	18.07	Peak
13	17628.91	44.81	16.46	19.15	32.85	47.57	54.00	6.43	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 13 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

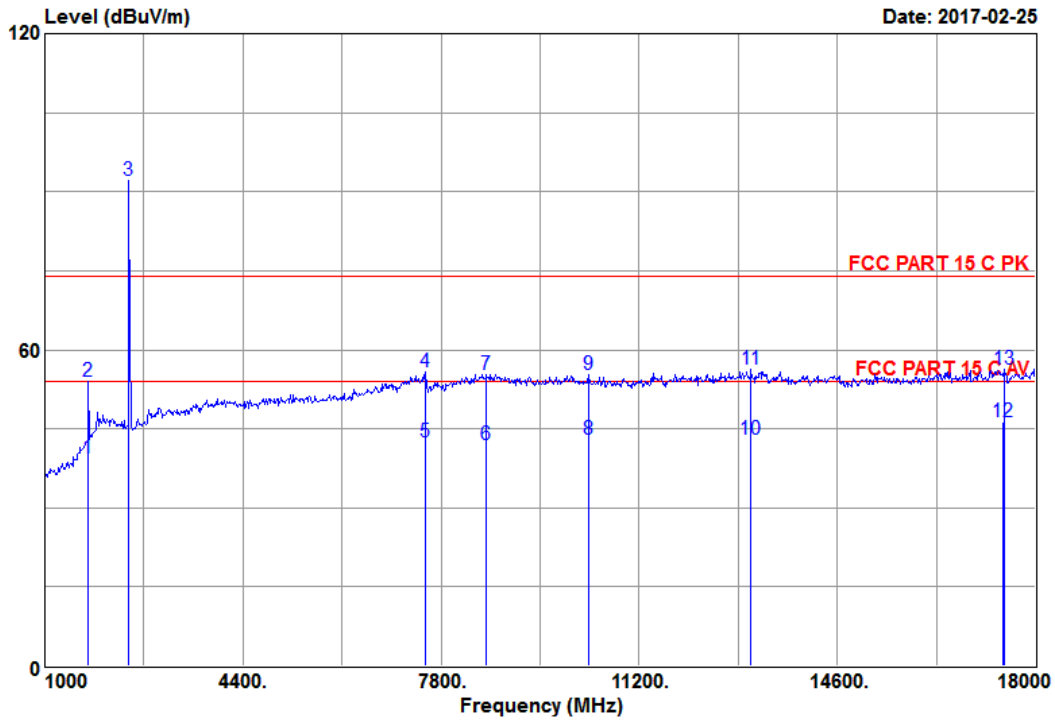

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 13
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH20 2450MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1746.18	28.45	6.00	38.89	33.95	39.39	54.00	14.61	Average
2	1748.00	28.45	6.00	53.56	33.95	54.06	74.00	19.94	Peak
3	2445.00	28.83	7.55	89.08	33.35	92.11	74.00	-18.11	Peak
4	7528.00	36.83	11.91	40.53	33.50	55.77	74.00	18.23	Peak
5	7534.08	36.83	11.91	27.15	33.50	42.39	54.00	11.61	Average
6	8574.56	39.18	12.47	23.50	33.24	41.91	54.00	12.09	Average
7	8582.00	39.18	12.47	36.94	33.24	55.35	74.00	18.65	Peak
8	10325.40	38.20	13.14	24.21	32.65	42.90	54.00	11.10	Average
9	10333.00	38.20	13.14	36.50	32.65	55.19	74.00	18.81	Peak
10	13118.66	40.49	14.12	21.41	33.12	42.90	54.00	11.10	Average
11	13121.00	40.49	14.12	34.77	33.12	56.26	74.00	17.74	Peak
12	17452.36	44.04	16.41	18.71	32.78	46.38	54.00	7.62	Average
13	17456.00	44.04	16.41	28.73	32.78	56.40	74.00	17.60	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 14 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

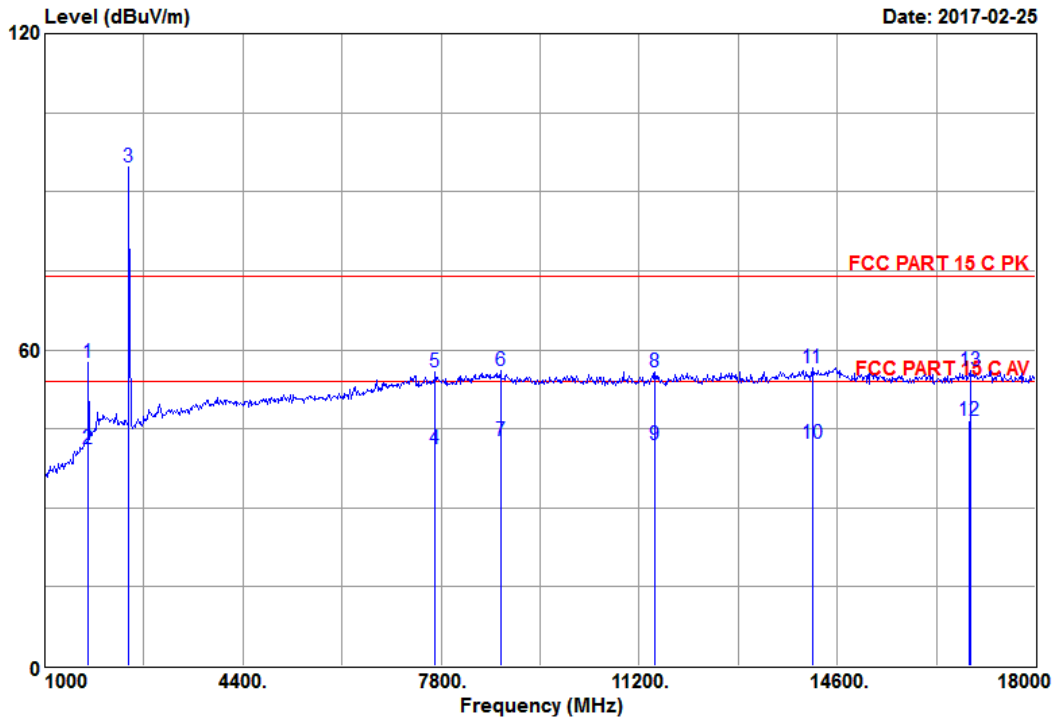

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 14
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*C&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH20 2450MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	1748.00	28.45	6.00	57.13	33.95	57.63	74.00	16.37	Peak
2	1748.46	28.45	6.00	40.78	33.95	41.28	54.00	12.72	Average
3	2445.00	28.83	7.55	91.55	33.35	94.58	74.00	-20.58	Peak
4	7691.42	37.00	12.00	25.75	33.50	41.25	54.00	12.75	Average
5	7698.00	37.00	12.01	40.29	33.50	55.80	74.00	18.20	Peak
6	8820.00	38.86	12.60	37.62	33.13	55.95	74.00	18.05	Peak
7	8821.14	38.86	12.60	24.49	33.13	42.82	54.00	11.18	Average
8	11472.00	40.56	13.61	34.40	32.82	55.75	74.00	18.25	Peak
9	11472.66	40.56	13.61	20.70	32.82	42.05	54.00	11.95	Average
10	14170.92	42.84	14.93	17.67	33.20	42.24	54.00	11.76	Average
11	14175.00	42.84	14.93	31.98	33.20	56.55	74.00	17.45	Peak
12	16869.84	41.34	16.19	21.54	32.55	46.52	54.00	7.48	Average
13	16878.00	41.34	16.21	31.00	32.55	56.00	74.00	18.00	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 15 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

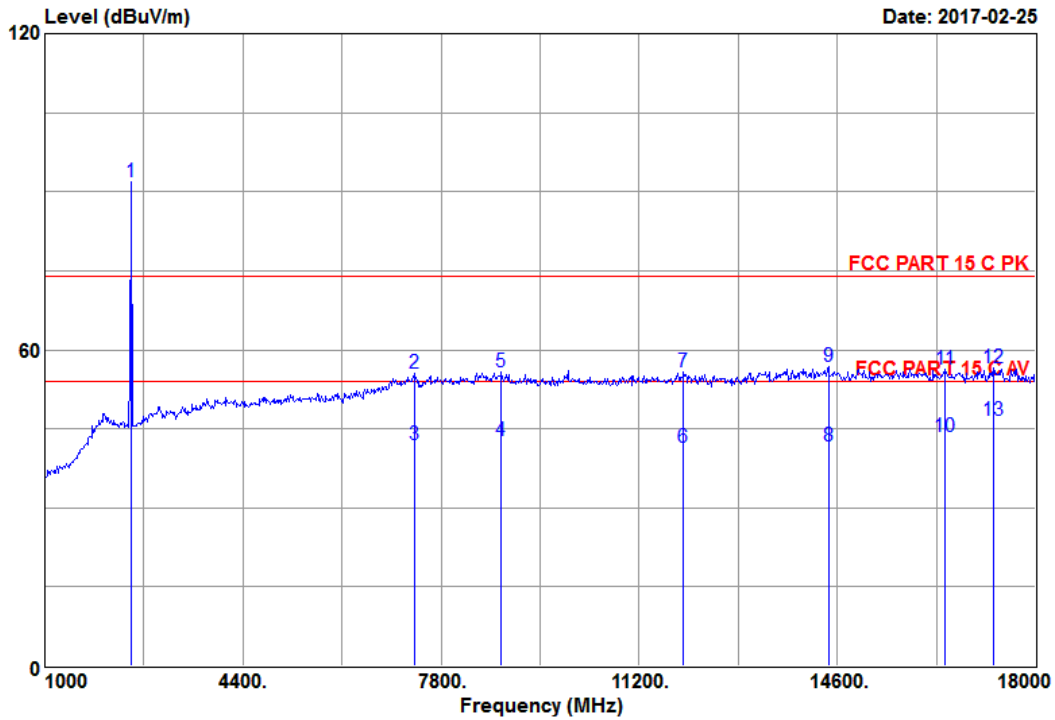

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 15
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH25 2475MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.00	28.61	7.60	88.87	33.34	91.74	74.00	-17.74	Peak
2	7341.00	36.40	11.82	40.86	33.50	55.58	74.00	18.42	Peak
3	7345.26	36.40	11.82	27.15	33.50	41.87	54.00	12.13	Average
4	8835.16	38.83	12.60	24.49	33.13	42.79	54.00	11.21	Average
5	8837.00	38.83	12.60	37.45	33.13	55.75	74.00	18.25	Peak
6	11962.35	41.82	13.83	18.75	32.89	41.51	54.00	12.49	Average
7	11965.00	41.82	13.83	33.04	32.90	55.79	74.00	18.21	Peak
8	14445.13	43.40	15.03	16.24	33.05	41.62	54.00	12.38	Average
9	14447.00	43.40	15.03	31.35	33.05	56.73	74.00	17.27	Peak
10	16450.28	40.08	15.94	19.98	32.38	43.62	54.00	10.38	Average
11	16453.00	40.08	15.94	32.77	32.38	56.41	74.00	17.59	Peak
12	17286.00	43.17	16.36	29.76	32.71	56.58	74.00	17.42	Peak
13	17286.34	43.17	16.36	19.72	32.71	46.54	54.00	7.46	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 16 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

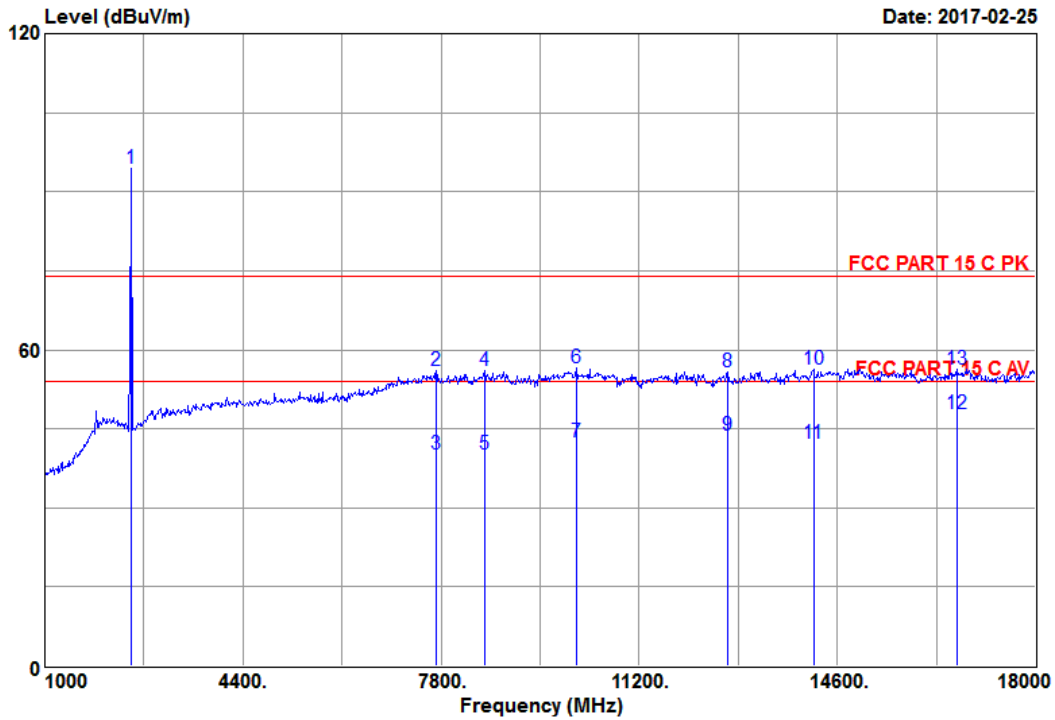

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 16
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH25 2475MHz
 Memo : LED Board for APT

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.00	28.61	7.60	91.68	33.34	94.55	74.00	-20.55	Peak
2	7715.00	37.02	12.01	40.45	33.50	55.98	74.00	18.02	Peak
3	7718.35	37.02	12.01	24.65	33.50	40.18	54.00	13.82	Average
4	8548.00	39.23	12.45	37.58	33.25	56.01	74.00	17.99	Peak
5	8550.19	39.23	12.45	21.75	33.25	40.18	54.00	13.82	Average
6	10129.00	38.20	13.07	37.89	32.62	56.54	74.00	17.46	Peak
7	10132.37	38.20	13.07	23.91	32.62	42.56	54.00	11.44	Average
8	12713.00	39.85	13.97	35.02	33.05	55.79	74.00	18.21	Peak
9	12715.33	39.85	13.97	22.95	33.05	43.72	54.00	10.28	Average
10	14192.00	42.88	14.93	31.62	33.19	56.24	74.00	17.76	Peak
11	14195.27	42.88	14.93	17.61	33.19	42.23	54.00	11.77	Average
12	16655.28	40.67	16.06	23.48	32.46	47.75	54.00	6.25	Average
13	16657.00	40.67	16.06	32.10	32.46	56.37	74.00	17.63	Peak


Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

5.8. Spurious Emission Measurement Results in Band Edge Emission (FCC Part 15, 15.205)



Audix Technology(Wujiang) Co., Ltd.
 No.1289, Jiang Xing East Road, The Eastern Part of Wu Jiang
 Economic Development Zone, JiangSu, China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 17 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28) Date: 2017-02-25

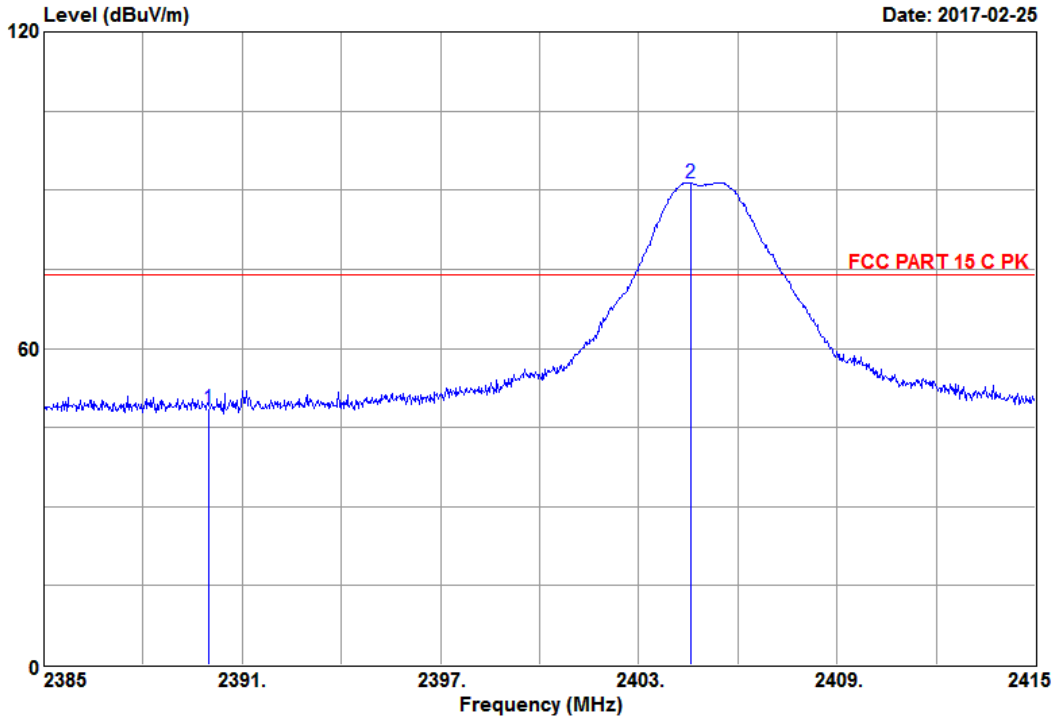

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 17
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : HORIZONTAL
 Limit : FCC PART 15 C PK
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	29.16	7.45	45.28	33.38	48.51	74.00	25.49	Peak
2	2404.56	29.05	7.45	88.30	33.38	91.42	74.00	-17.42	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 18 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

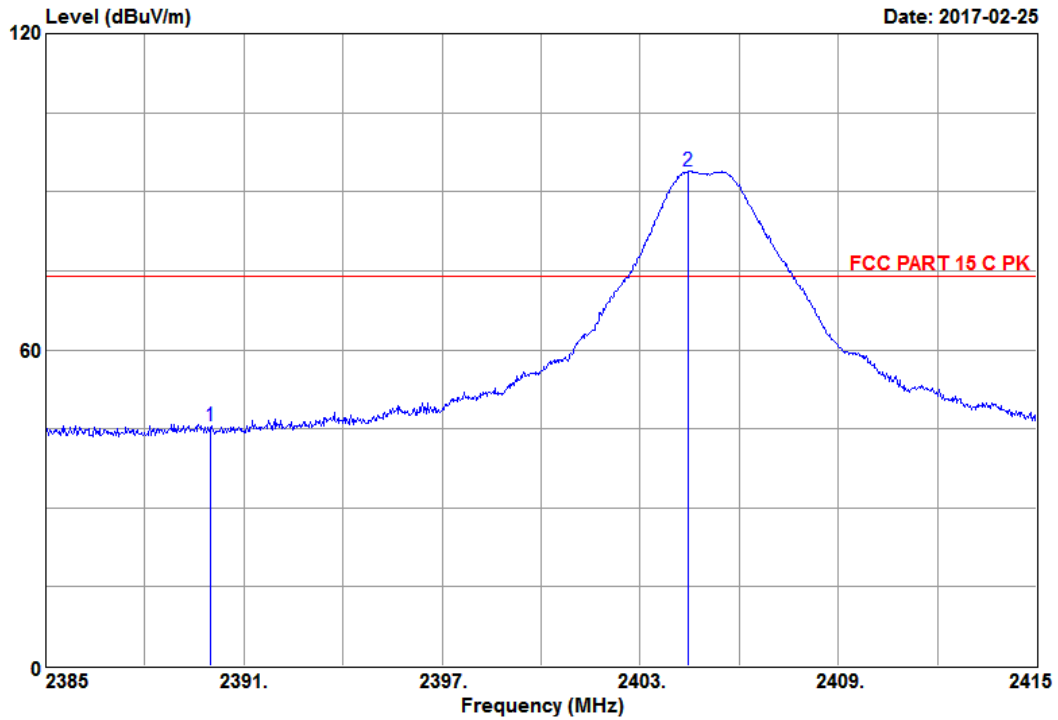

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 18
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK	
Env. / Ins. : 16.5*C&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH11 2405MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	29.16	7.45	42.39	33.38	45.62	74.00	28.38	Peak
2	2404.44	29.05	7.45	90.77	33.38	93.89	74.00	-19.89	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 19 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

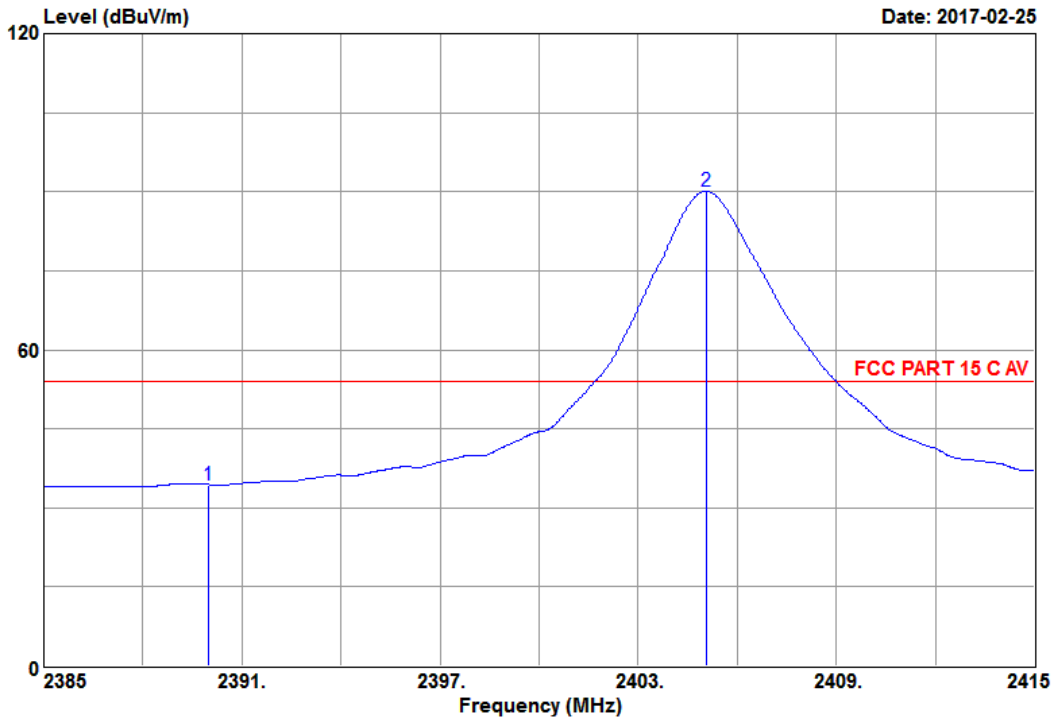

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 19
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C AV	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH11 2405MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	29.16	7.45	31.19	33.38	34.42	54.00	19.58	Average
2	2405.07	29.05	7.45	86.90	33.38	90.02	54.00	-36.02	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 20 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

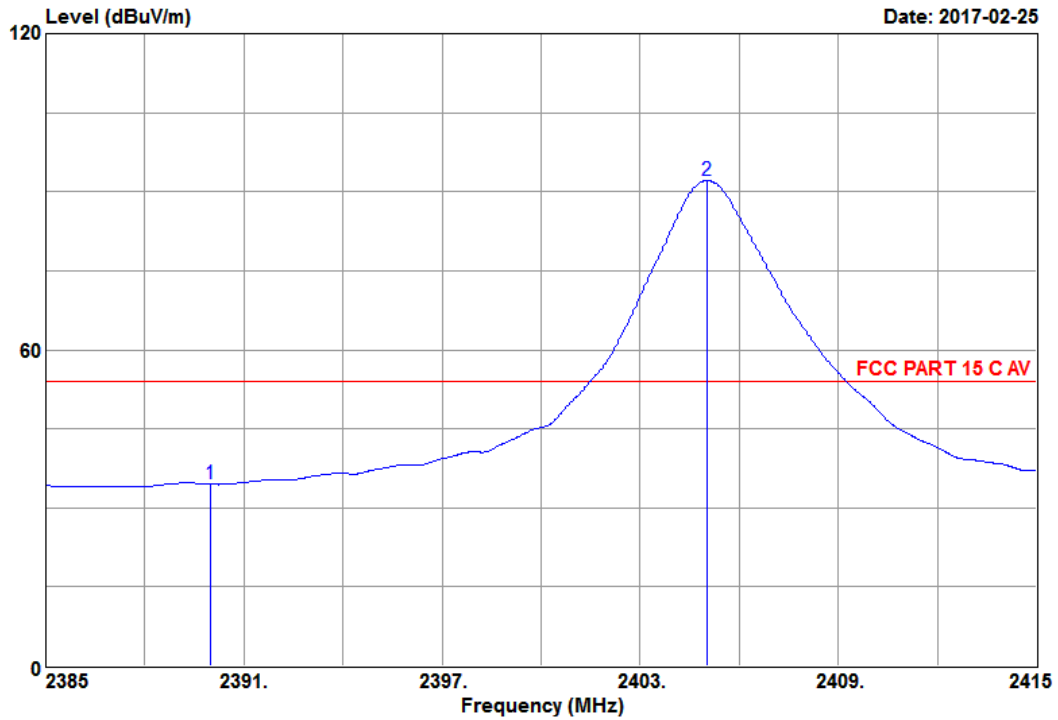

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 20
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C AV
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH11 2405MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2390.00	29.16	7.45	31.25	33.38	34.48	54.00	19.52	Average
2	2405.01	29.05	7.45	88.94	33.38	92.06	54.00	-38.06	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 21 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

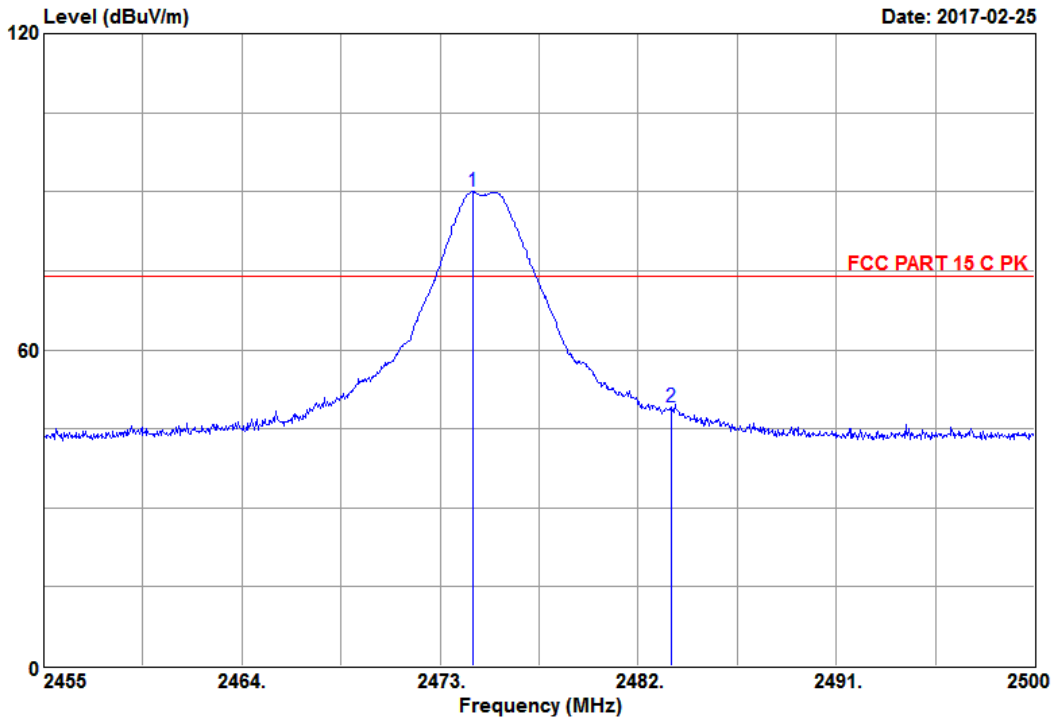

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 21
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH25 2475MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2474.49	28.61	7.60	87.09	33.34	89.96	74.00	-15.96	Peak
2	2483.50	28.61	7.60	46.25	33.34	49.12	74.00	24.88	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 22 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

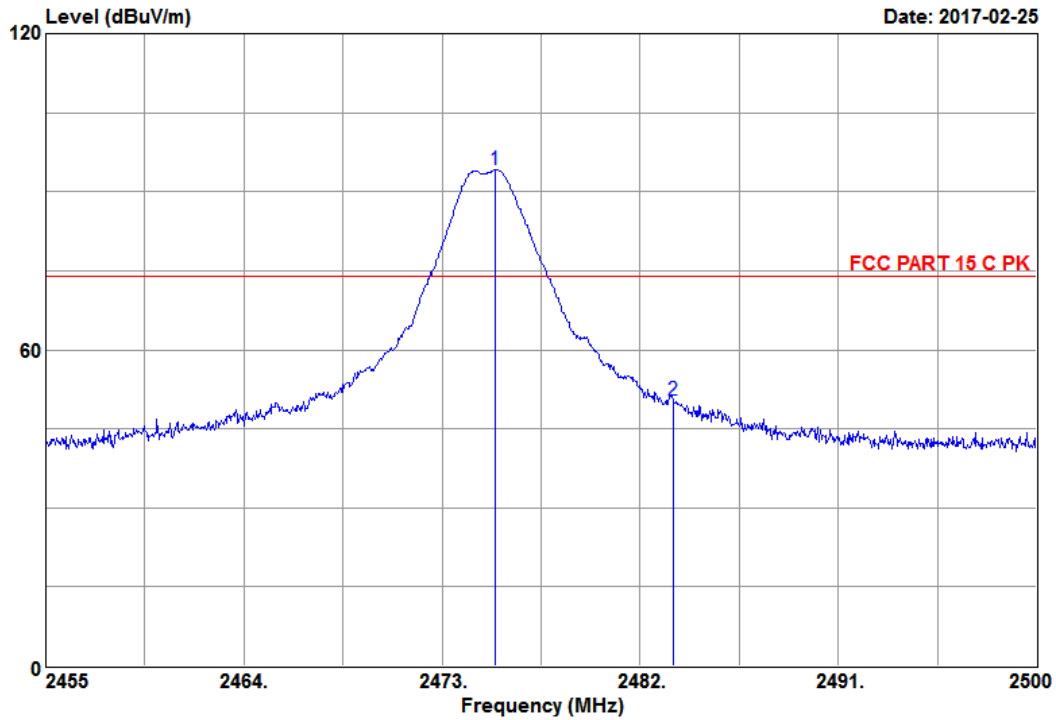

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 22
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH25 2475MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2475.43	28.61	7.60	91.33	33.34	94.20	74.00	-20.20	Peak
2	2483.50	28.61	7.60	47.61	33.34	50.48	74.00	23.52	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 23 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

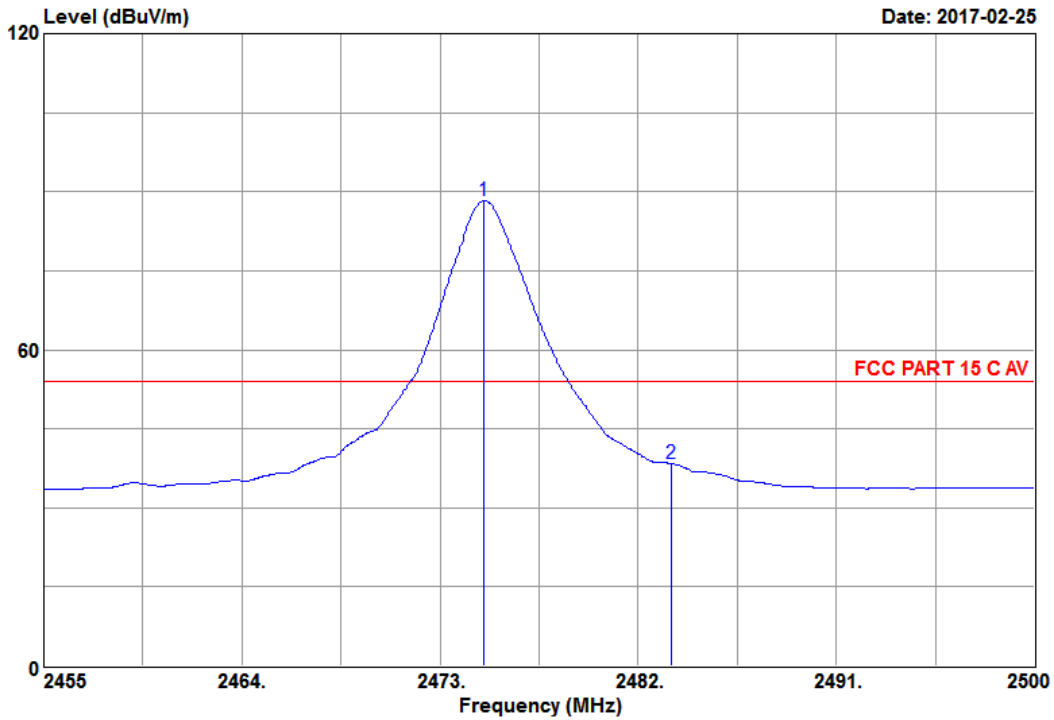

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 23
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C AV	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH25 2475MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2474.98	28.61	7.60	85.34	33.34	88.21	54.00	-34.21	Average
2	2483.50	28.61	7.60	35.52	33.34	38.39	54.00	15.61	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 24 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

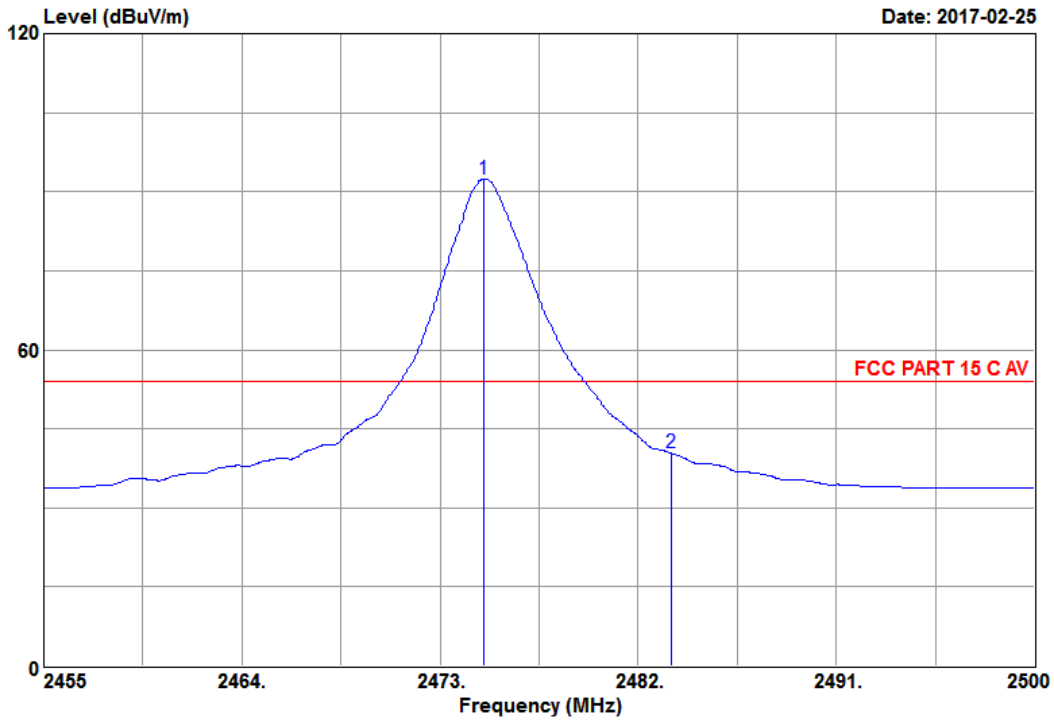

Site NO. : 3m Semi-Anechoic Chamber Data NO. : 24
 Dis. / Ant. : 3m 3115-62959-160620 Ant. pol. : VERTICAL
 Limit : FCC PART 15 C AV
 Env. / Ins. : 16.5*CS&40%/E4407B Engineer : Mickey
 EUT : LED lamp
 M/N : 9290011998B
 Power Rating: 120Vac/60Hz
 Test Mode : TX CH25 2475MHz
 Memo : LED Board for APT


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2474.98	28.61	7.60	89.54	33.34	92.41	54.00	-38.41	Average
2	2483.50	28.61	7.60	37.51	33.34	40.38	54.00	13.62	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 25 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

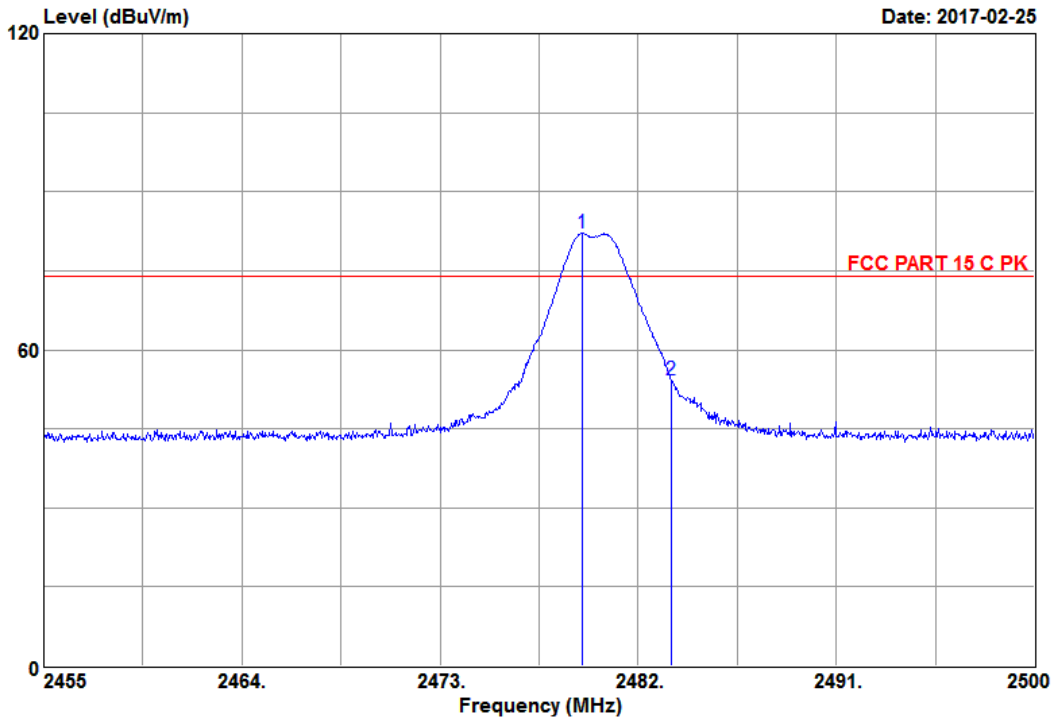

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 25
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C PK	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH26 2480MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.48	28.61	7.60	79.22	33.34	82.09	74.00	-8.09	Peak
2	2483.50	28.61	7.60	51.47	33.34	54.34	74.00	19.66	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 26 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

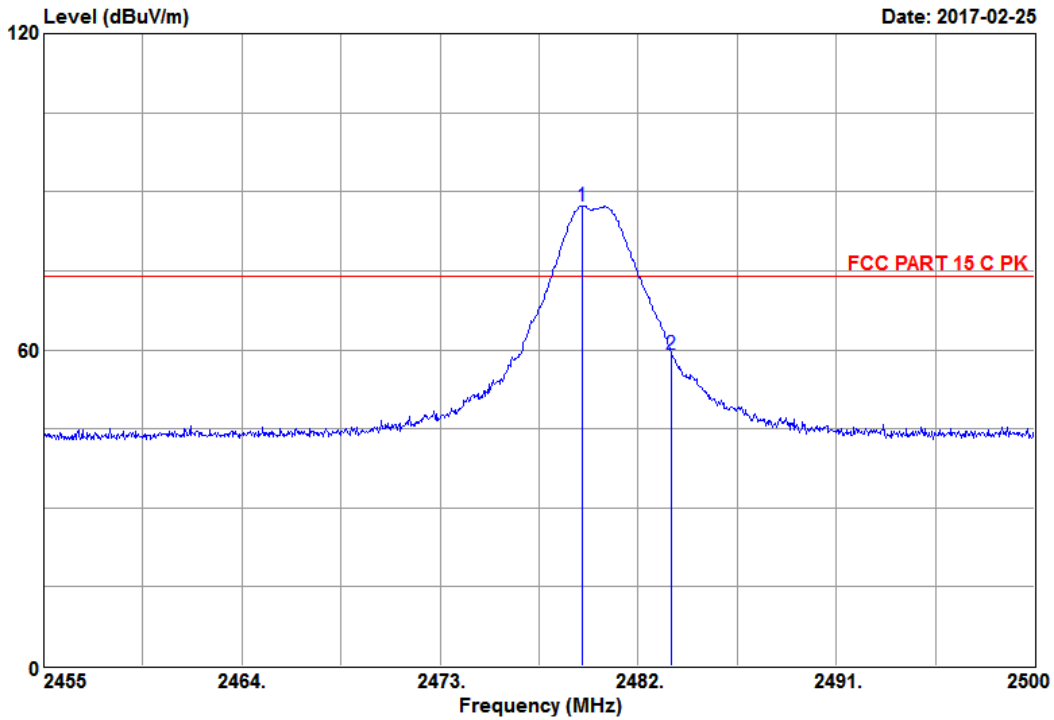

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 26
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : VERTICAL
Limit : FCC PART 15 C PK	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH26 2480MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.48	28.61	7.60	84.39	33.34	87.26	74.00	-13.26	Peak
2	2483.50	28.61	7.60	56.37	33.34	59.24	74.00	14.76	Peak

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 27 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

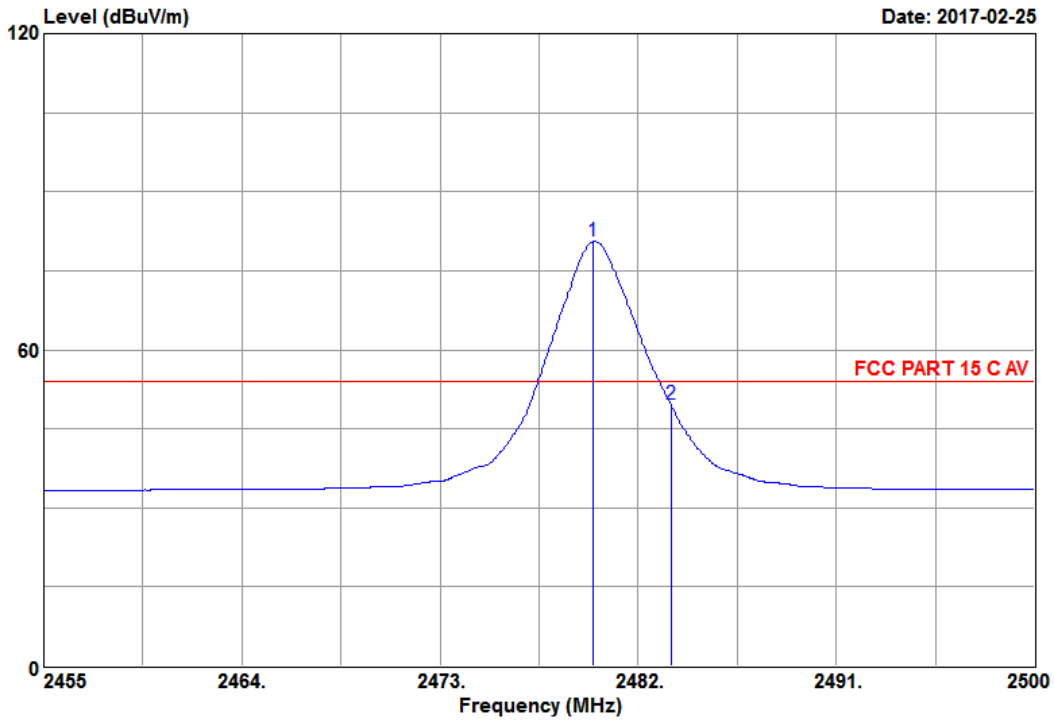

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 27
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : HORIZONTAL
Limit : FCC PART 15 C AV	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH26 2480MHz	
Memo : LED Board for APT	


	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2479.93	28.61	7.60	77.64	33.34	80.51	54.00	-26.51	Average
2	2483.50	28.61	7.60	46.74	33.34	49.61	54.00	4.39	Average

Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.



Audix Technology(Wujiang)Co.,Ltd.
 No.1289,Jiang Xing East Road,The Eastern Part of Wu Jiang
 Economic Development Zone,JiangSu,China
 Tel: (0512) 63403993 Fax: (0512) 63403993

Data: 28 File: G:\Test Data\2017\Reports\01\C1W1701035.EM6 (28)

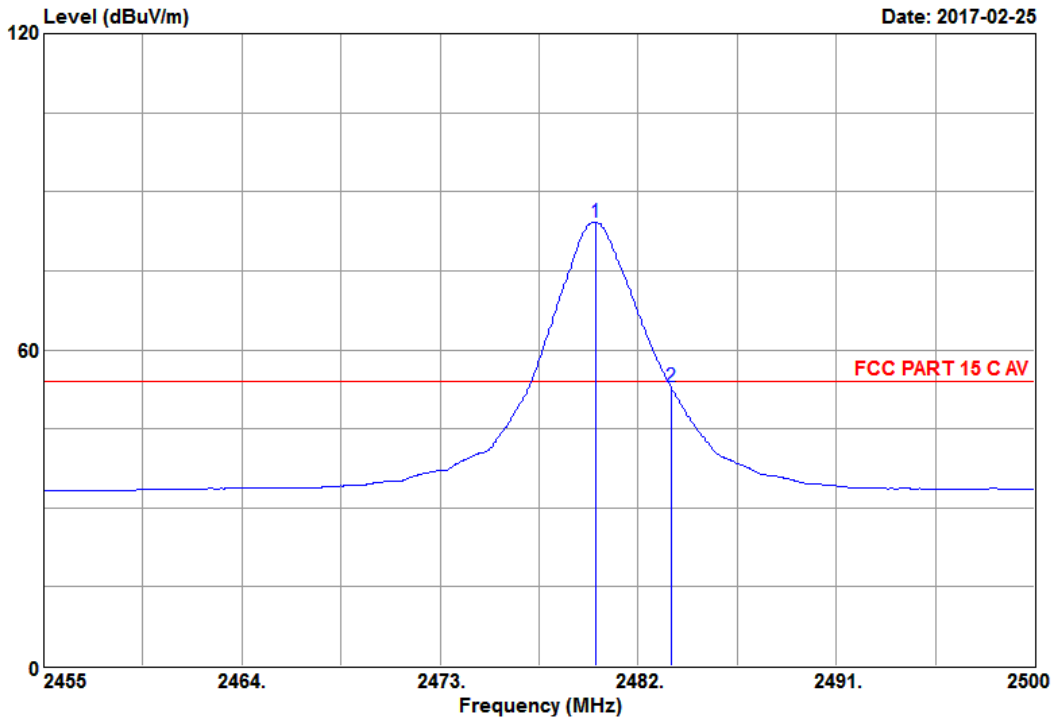

Site NO. : 3m Semi-Anechoic Chamber	Data NO. : 28
Dis. / Ant. : 3m 3115-62959-160620	Ant. pol. : VERTICAL
Limit : FCC PART 15 C AV	
Env. / Ins. : 16.5*CS&40%/E4407B	Engineer : Mickey
EUT : LED lamp	
M/N : 9290011998B	
Power Rating: 120Vac/60Hz	
Test Mode : TX CH26 2480MHz	
Memo : LED Board for APT	

	Freq. (MHz)	Ant. Factor (dB)	Cable Loss (dB)	Reading (dBuV)	Preamp Factor (dB)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Remark
1	2480.07	28.61	7.60	81.34	33.34	84.21	54.00	-30.21	Average
2	2483.50	28.61	7.60	50.12	33.34	52.99	54.00	1.01	Average


Remarks: 1. Emission Level= Ant.Factor + Cable Loss + Reading - Preamp.Factor.
 2. The emission levels that are 20dB below the official limit are not reported.

6. 6 dB BANDWIDTH MEASUREMENT

6.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2016-05-15	2017-05-14

6.2. Block Diagram of Test Setup

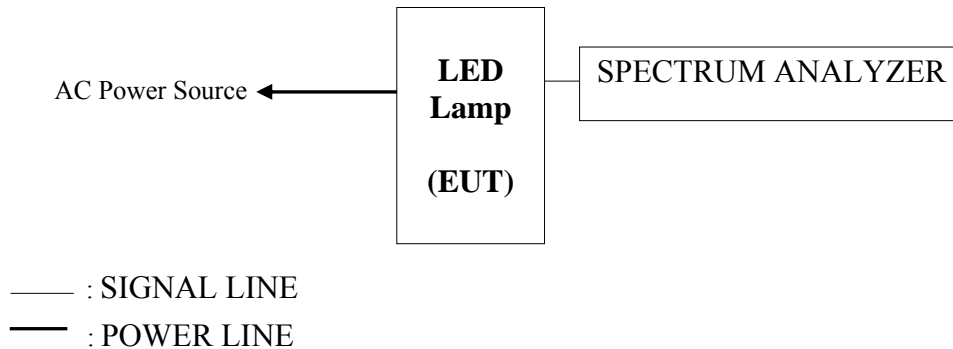

6.3. Specification Limits (§15.247(a)(2))

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500kHz.

6.4. Test Procedure

The steps for the first option are as bellow:


- a) Set RBW = 100 kHz.
- b) Set the VBW [3 × RBW].
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

6.5. Test Results


PASSED. All the test results are attached in next pages.

Channel	Center Frequency(MHz)	6 dB Bandwidth(MHz)
11	2405	1.433
20	2450	1.353
25	2475	1.368


CH 11

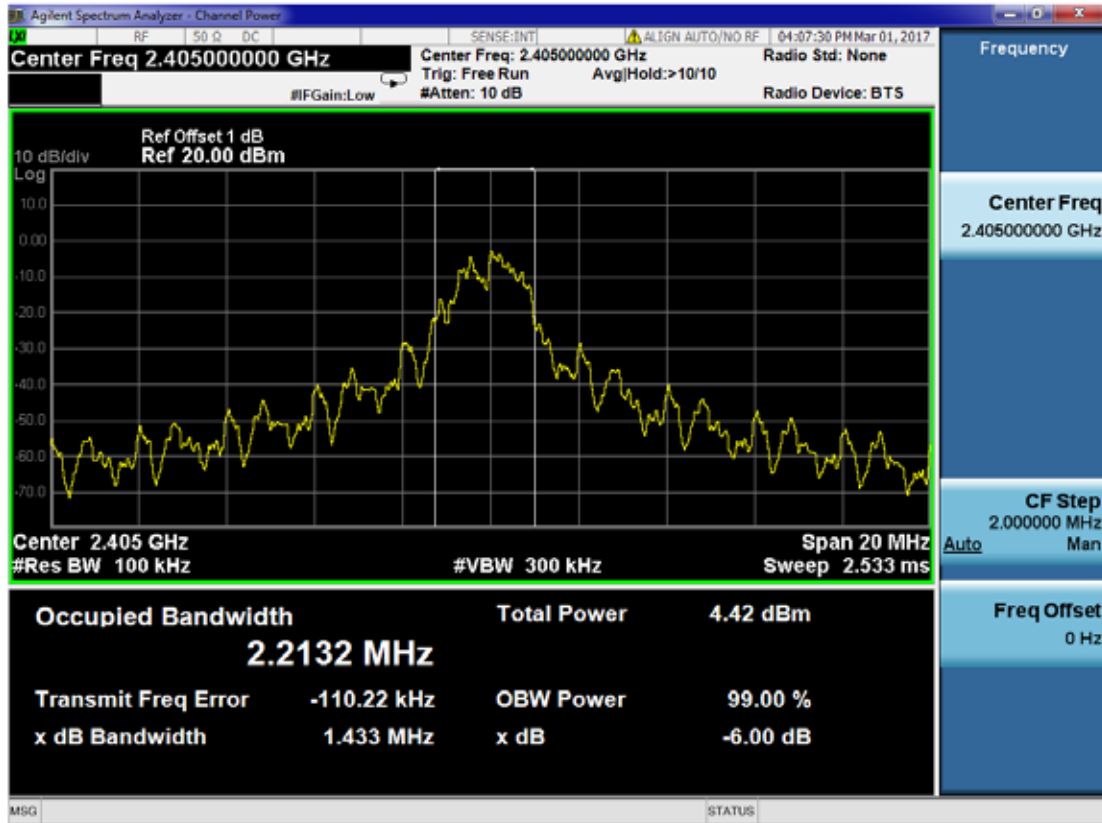

CH 20

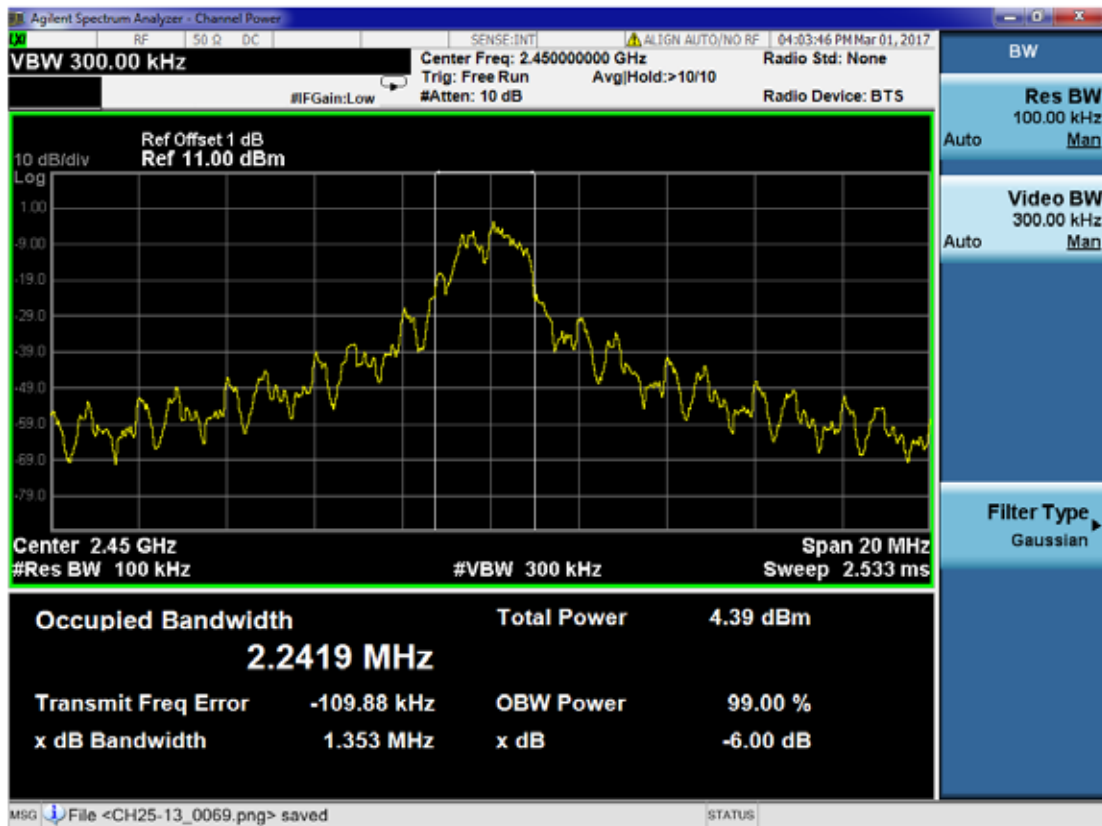

CH 25

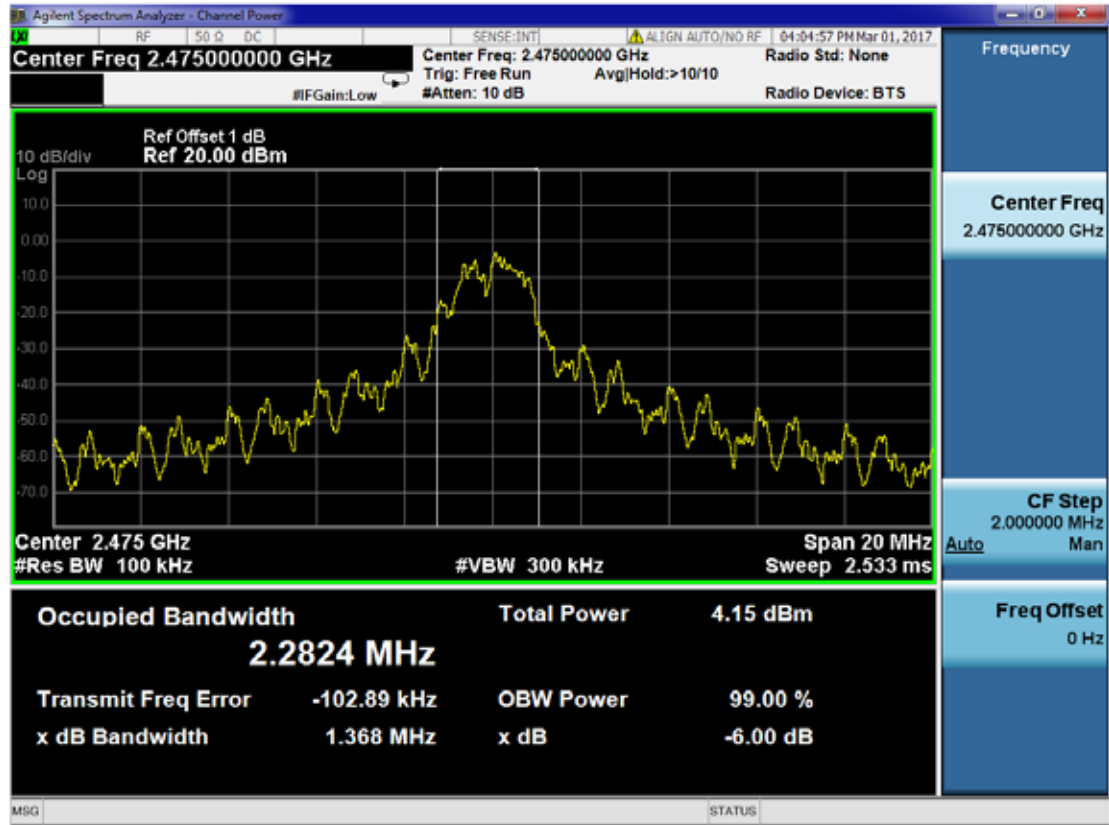


7. OUTPUT POWER MEASUREMENT

7.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2016-05-15	2017-05-14

7.2. Block Diagram of Test Setup

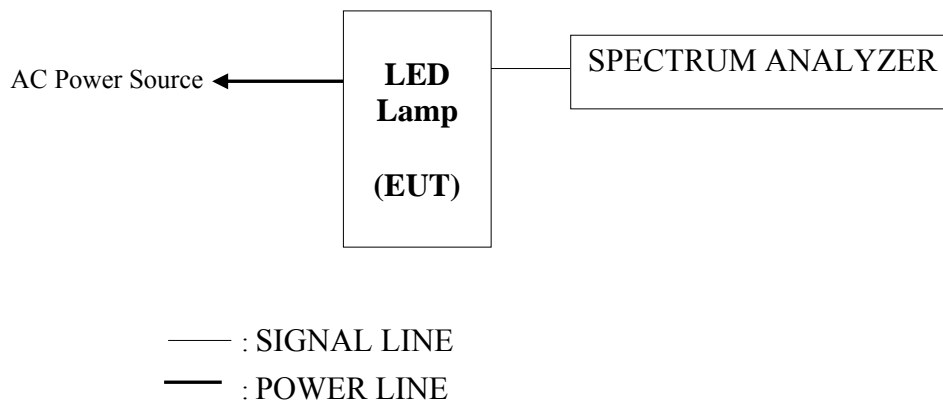

7.3. Specification Limits (§15.247(b)(3))

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

7.4. Test Procedure

- a) Set span to at least 1.5 times the OBW.
- b) Set RBW = 1-5% of the OBW, not to exceed 1 MHz.
- c) Set VBW $\geq 3 \times$ RBW.
- d) Number of points in sweep $\geq 2 \times$ span / RBW. (This gives bin-to-bin spacing \leq RBW/2, so that narrowband signals are not lost between frequency bins.)
- e) Sweep time = auto.
- f) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- g) If transmit duty cycle < 98 %, use a sweep trigger with the level set to enable triggering only on full power pulses. The transmitter shall operate at maximum power control level for the entire duration of every sweep. If the EUT transmits continuously (i.e., with no off intervals) or at duty cycle ≥ 98 %, and if each transmission is entirely at the maximum power control level, then the trigger shall be set to “free run”.
- h) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- i) Compute power by integrating the spectrum across the OBW of the signal using the instrument’s band power measurement function, with band limits set equal to the OBW band edges. If the instrument does not have a band power function, sum the spectrum levels (in power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

7.5. Test Results

PASSED. All the test results are attached in next pages.

Channel	Frequency	Power(dBm)	Limit(dBm)
11	2405	4.29	30
20	2450	4.32	30
25	2475	4.15	30
26	2480	-3.27	30

8. BAND EDGES MEASUREMENT

8.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2016-05-15	2017-05-14

8.2. Block Diagram of Test Setup

The same as section 5.2.

8.3. Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).


8.4. Test Procedure

The transmitter output was connected to the test receiver / spectrum analyzer. Set RBW of spectrum analyzer to 100kHz and VBW to 300kHz with suitable frequency span including 100kHz bandwidth from band edge.


8.5. Test Results

PASSED. The testing data was attached in the next pages.


CH11

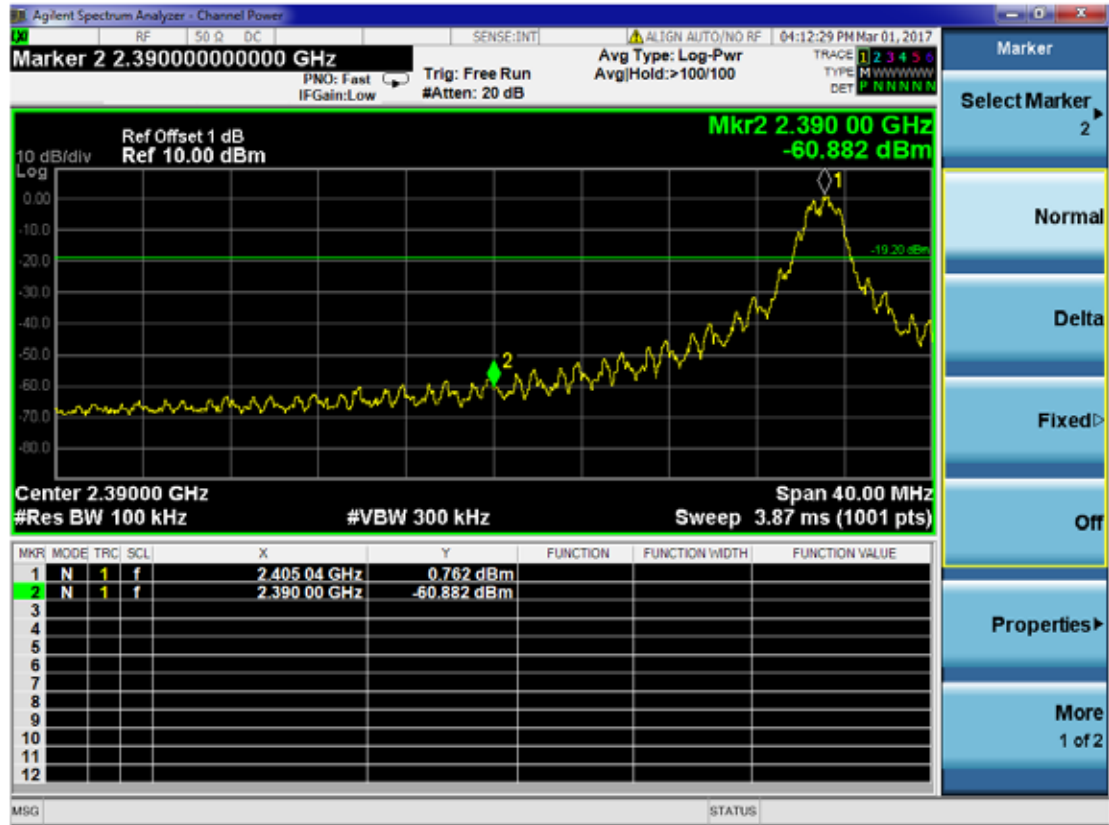

CH25

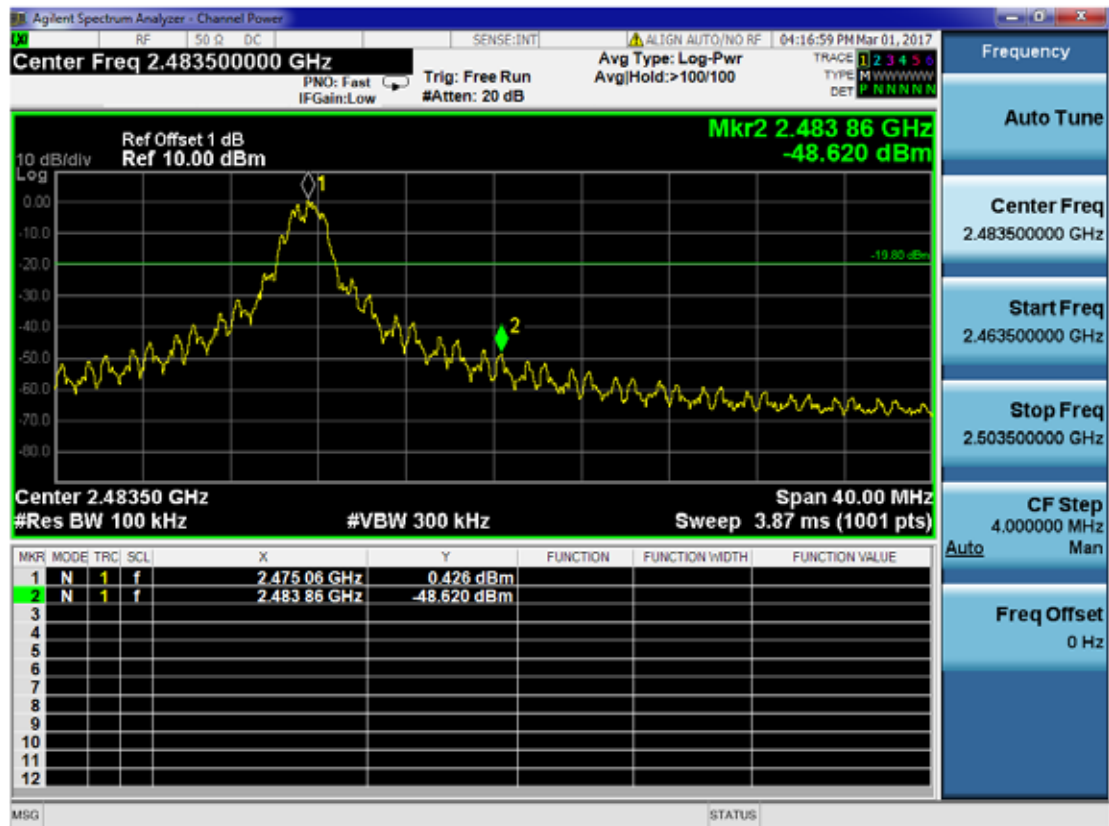

CH26

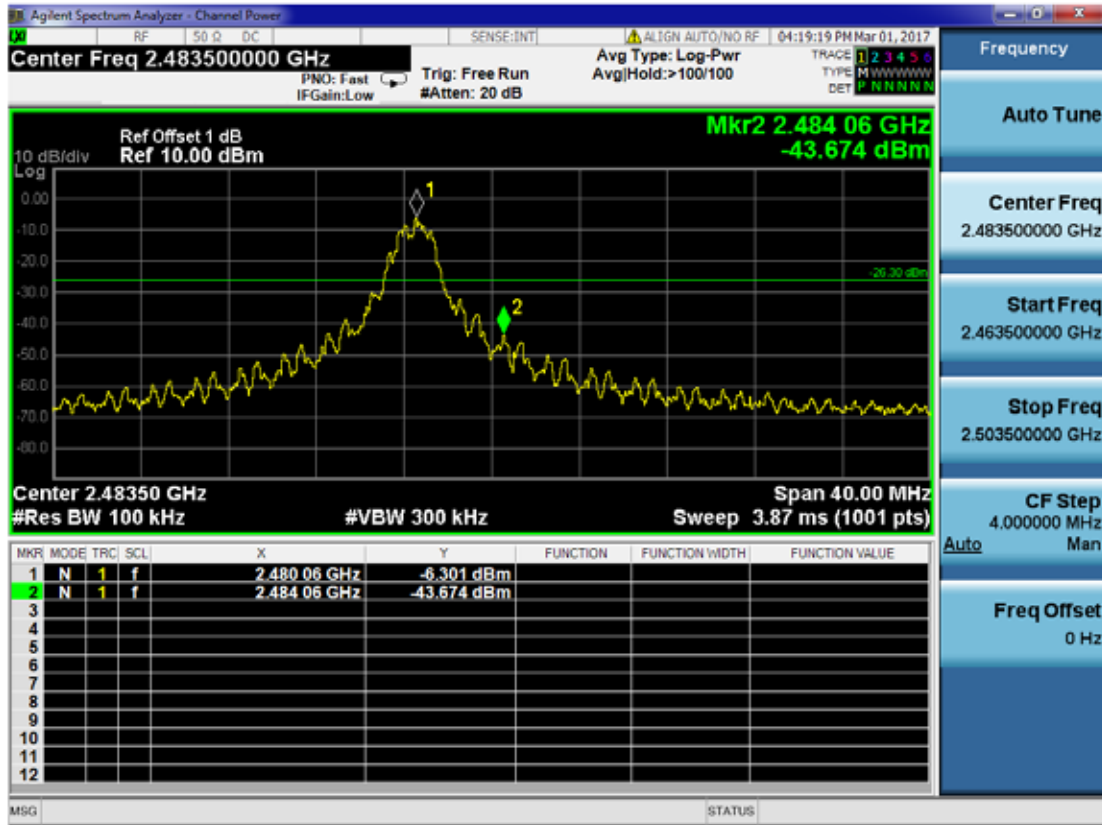

9. POWER SPECTRAL DENSITY MEASUREMENT

9.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2016-05-15	2017-05-14

9.2. Block Diagram of Test Setup

The same as section 5.2.

9.3. Specification Limits (§15.247(e))


For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

9.4. Test Results


PASSED. All the test results are attached in next page.

Channel	Frequency(GHz)	Value(dBm/3kHz)
11	2.405	-12.136
20	2.450	-12.489
25	2.475	-11.160


CH 11

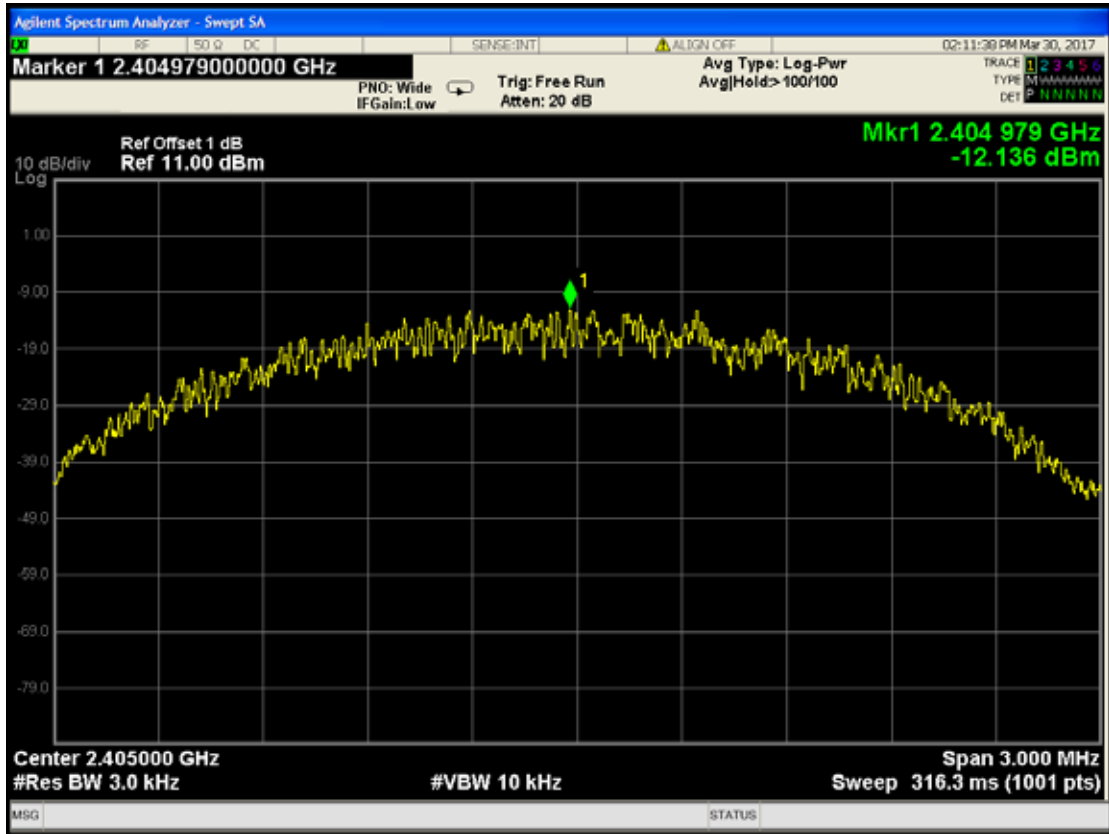

CH 20

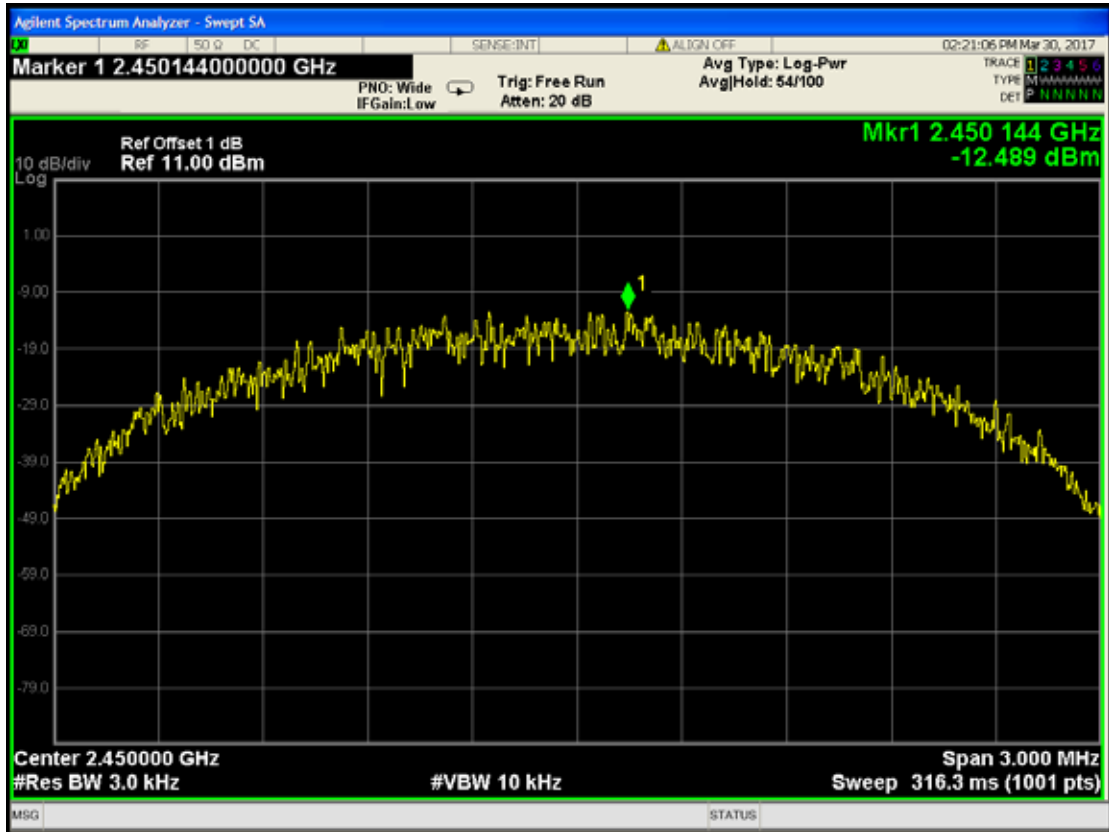

CH 25

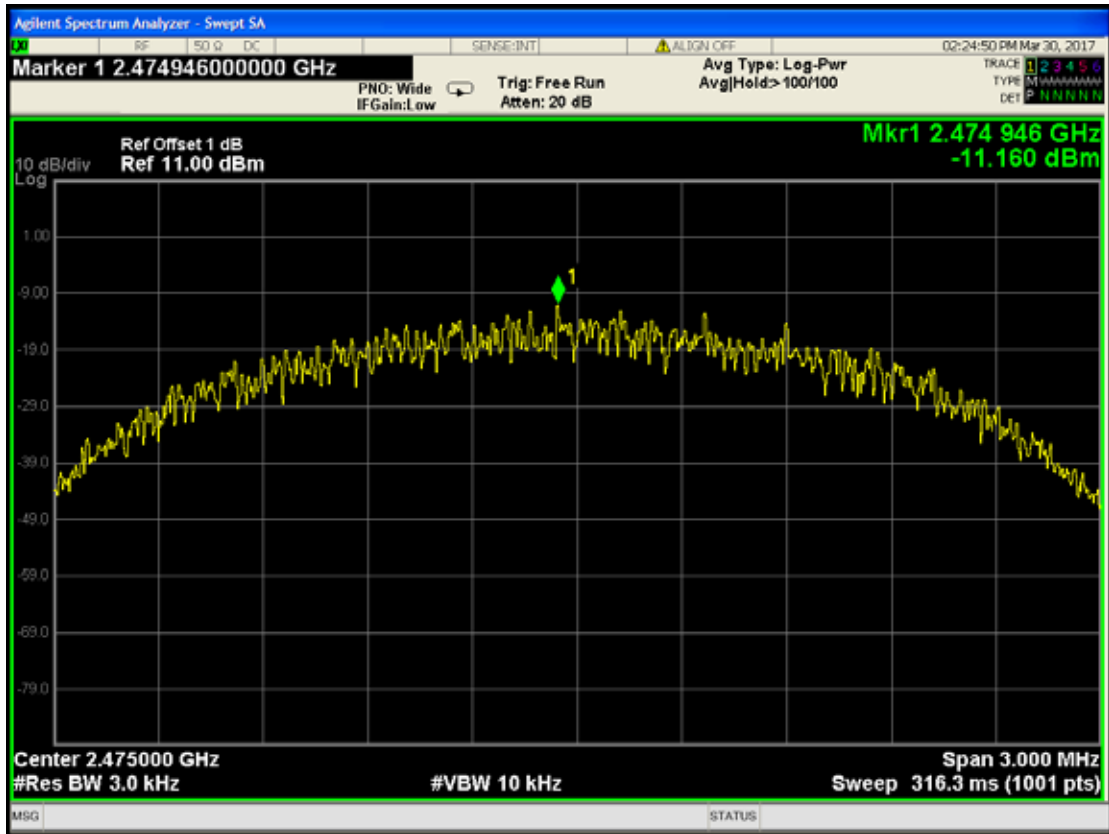

10.EMISSION LIMITATIONS MEASUREMENT

10.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2015-05-15	2017-05-14

10.2. Block Diagram of Test Setup

The same as section 5.2.

10.3. Specification Limits (§15.247(d))

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

10.4. Test Procedure

The transmitter output was connected to the spectrum analyzer. Set RBW = 100kHz, VBW \geq 300 kHz, scan up through 10th harmonic. All harmonics/spurs must be at least 30 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The measurement guideline was according to KDB558074 v03r05.



10.5. Test Results



PASSED. All the test results are attached in next pages.



Channel	Frequency(MHz)	Amplitude(dBm)
11	913.67	-69.344
	2406	0.675
	2054	-66.295
	4810	-57.608
	5064	-65.486
	7214	-63.862
	10538	-64.588
	11590	-65.459
	14456	-63.675
	15122	-64.838
	18970	-63.782
	19142	-62.170
	22442	-61.991
	23622	-61.369
20	900.09	-69.063
	2450	0.217
	2614	-56.977
	4900	-58.556
	5150	-64.354
	7348	-62.368
	10692	-64.560
	12252	-64.527
	13660	-64.203
	16108	-63.902
	18348	-63.577
	19894	-63.165
	22720	-62.178
	23860	-61.804
25	898.15	-68.926
	2476	-0.118
	2590	-61.762
	4950	-60.005



	5108	-64.708
	7424	-60.832
	10540	-64.212
	11132	-64.574
	14052	-64.215
	16074	-64.708
	18920	-63.418
	19360	-62.868
	22204	-62.361
	23650	-60.766



CH 11

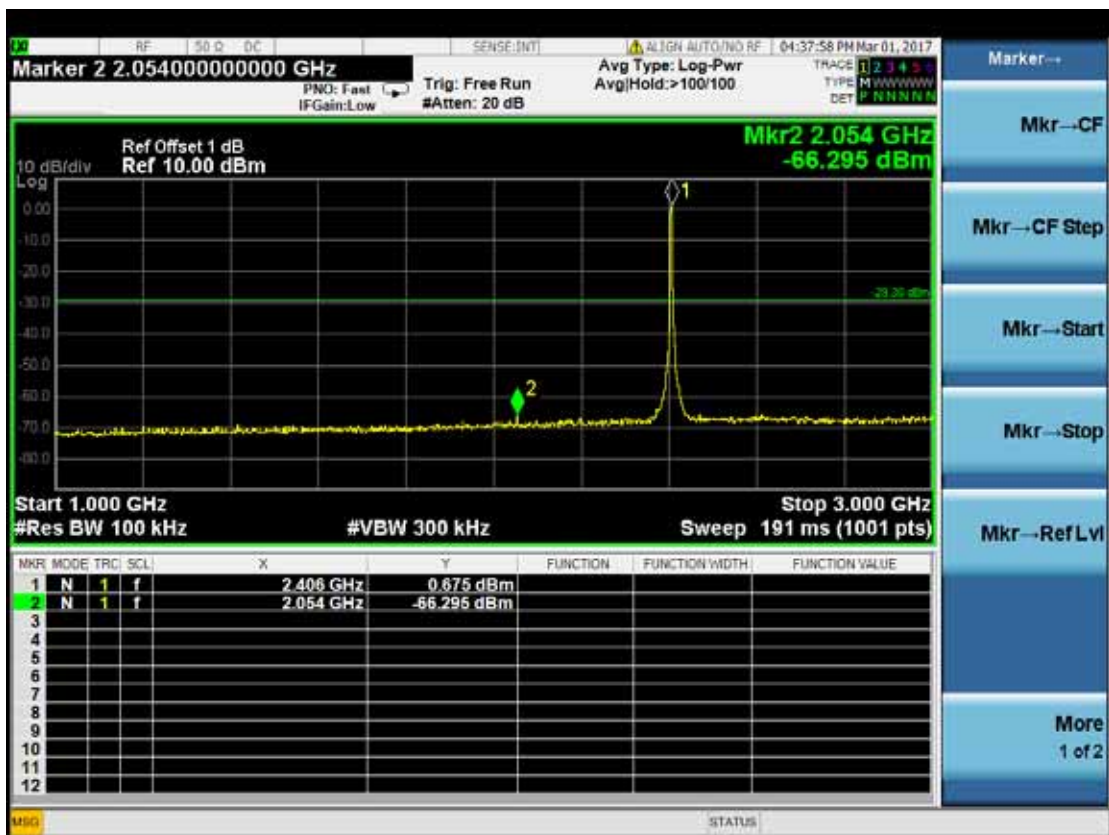
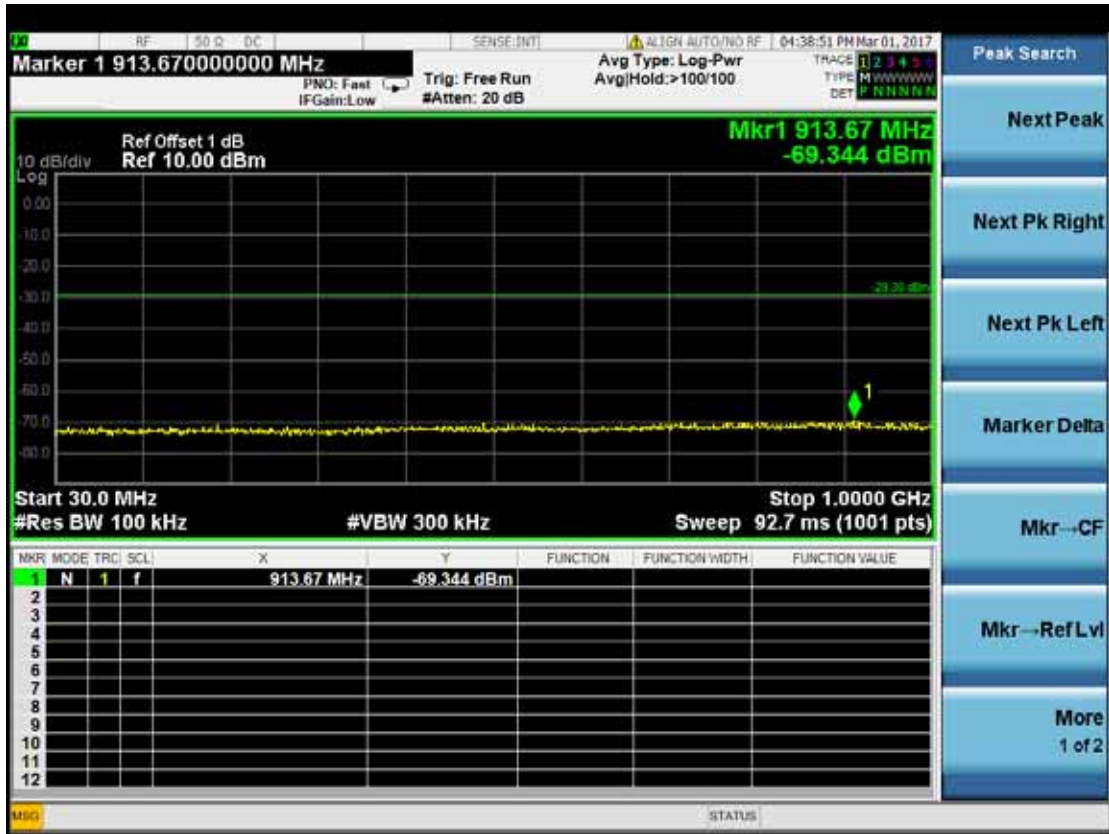


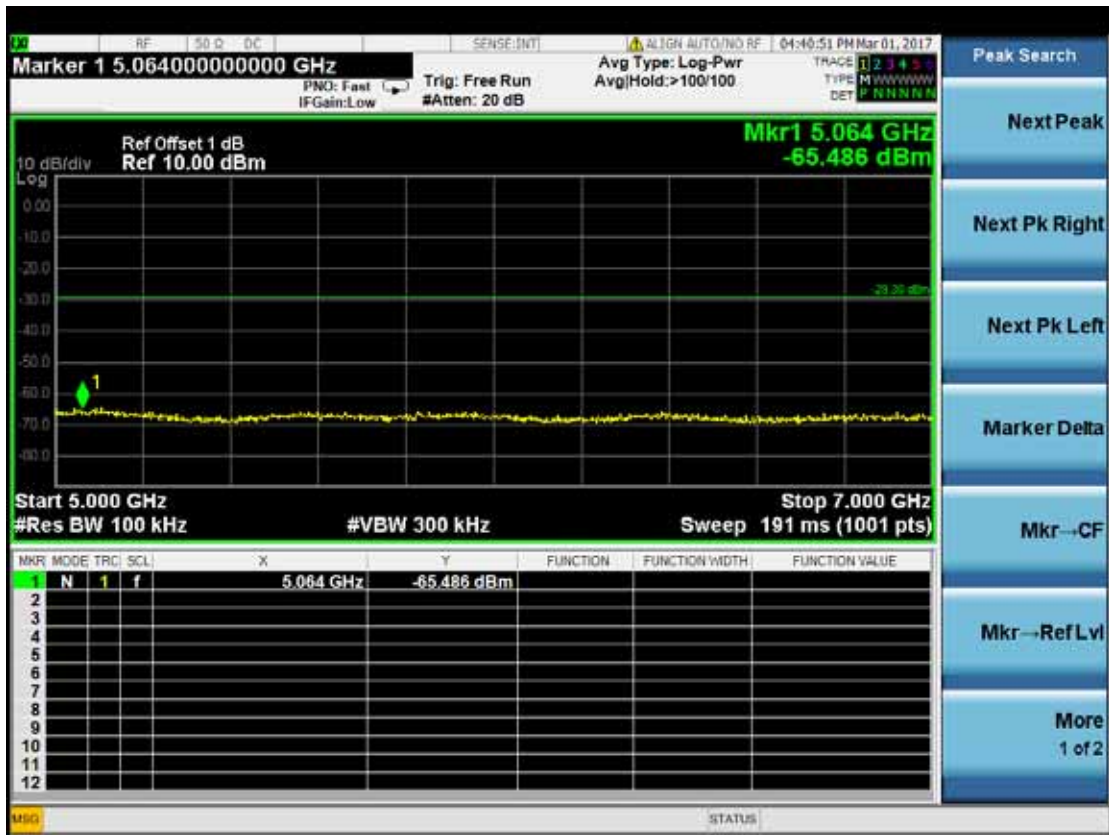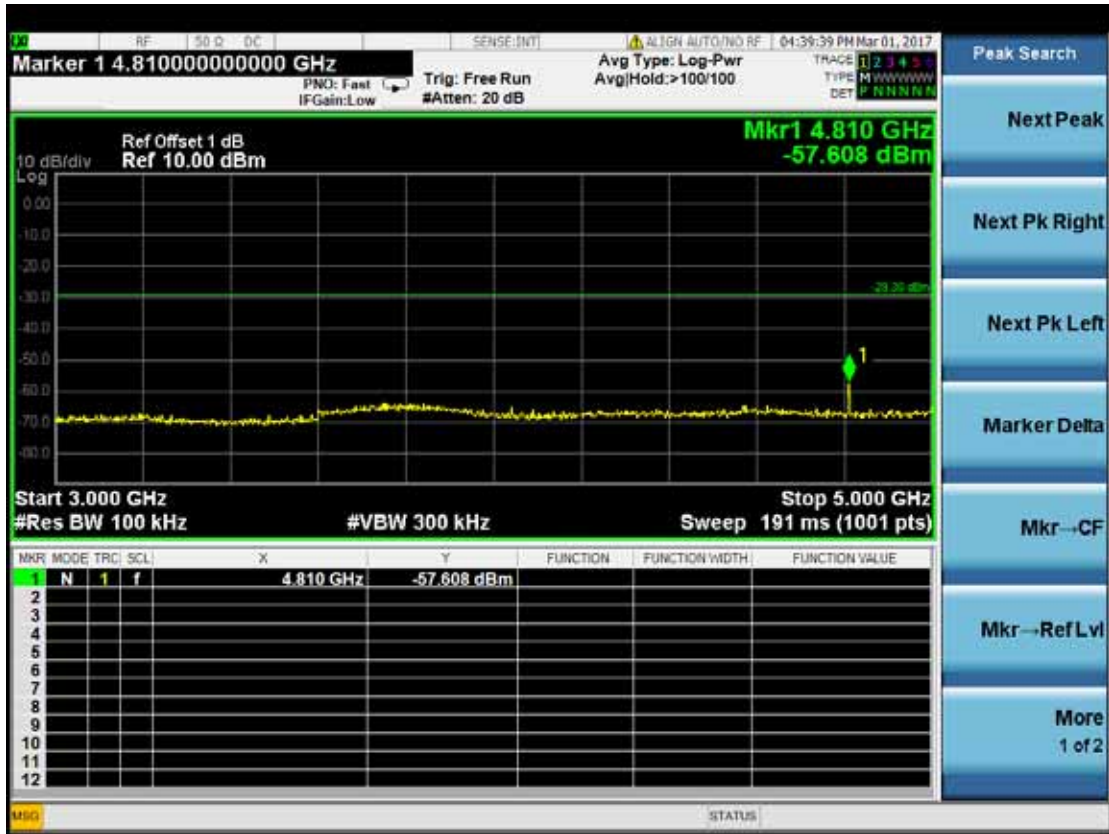


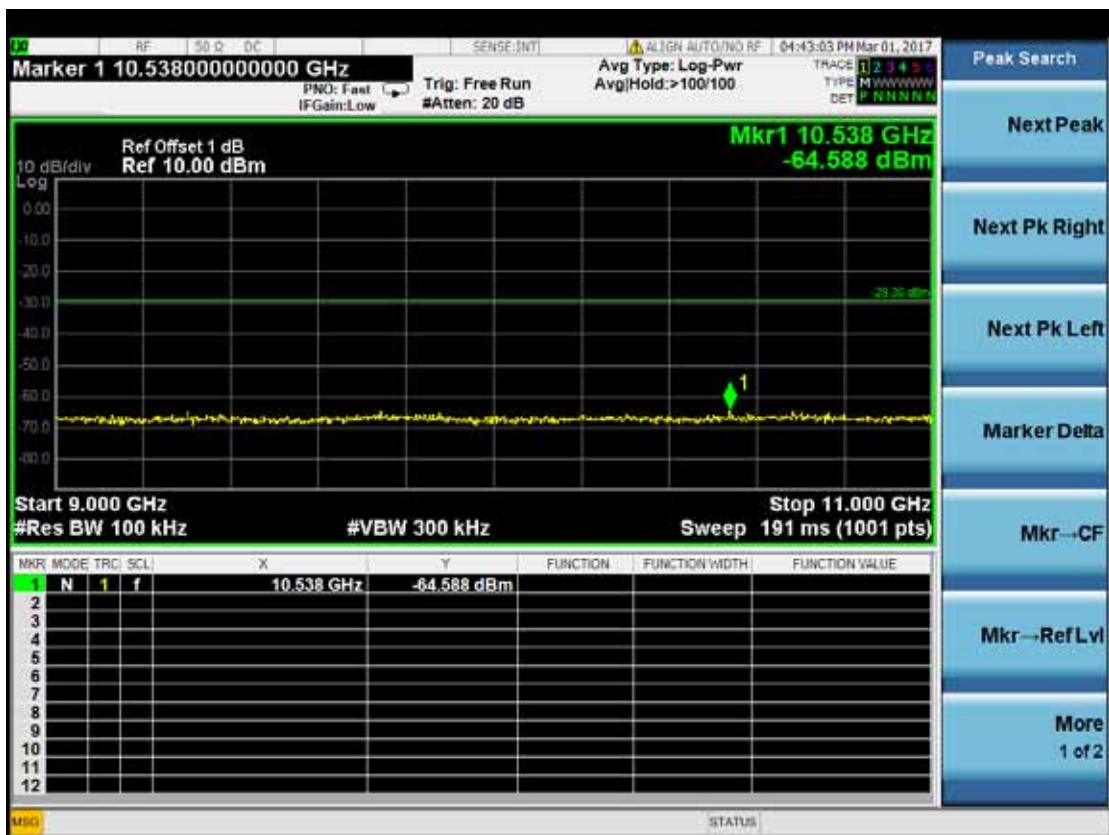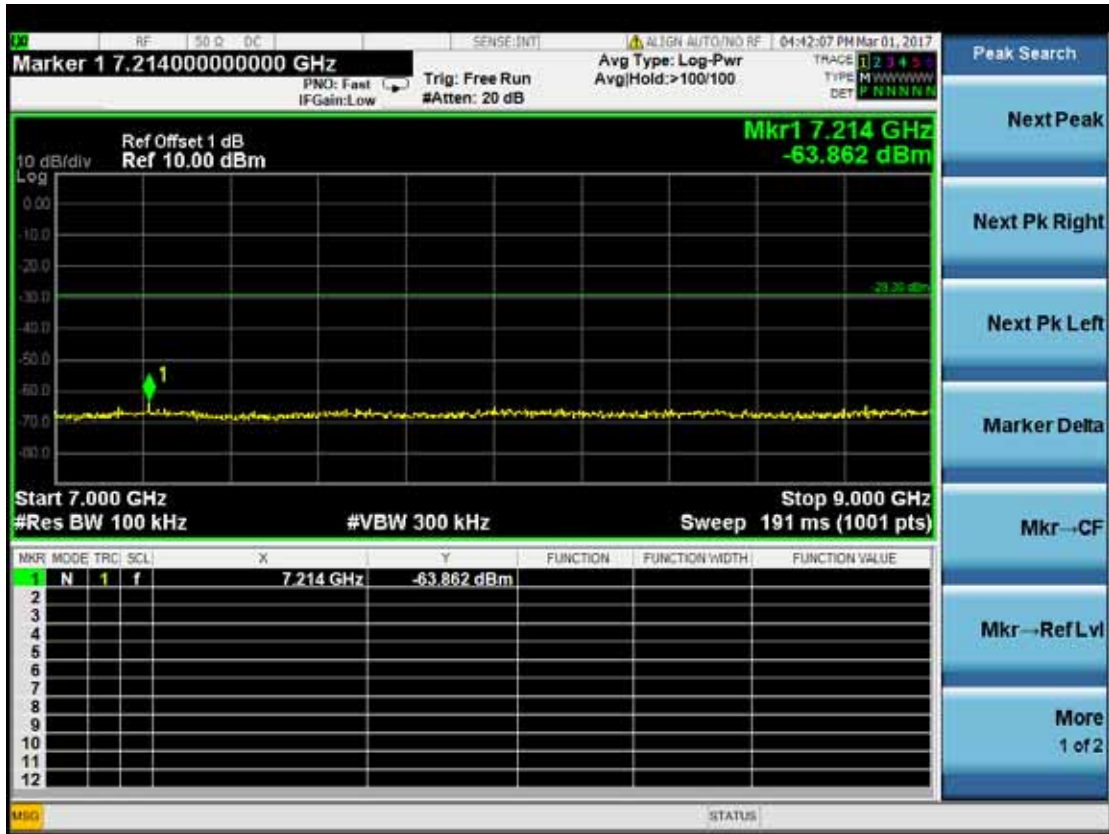

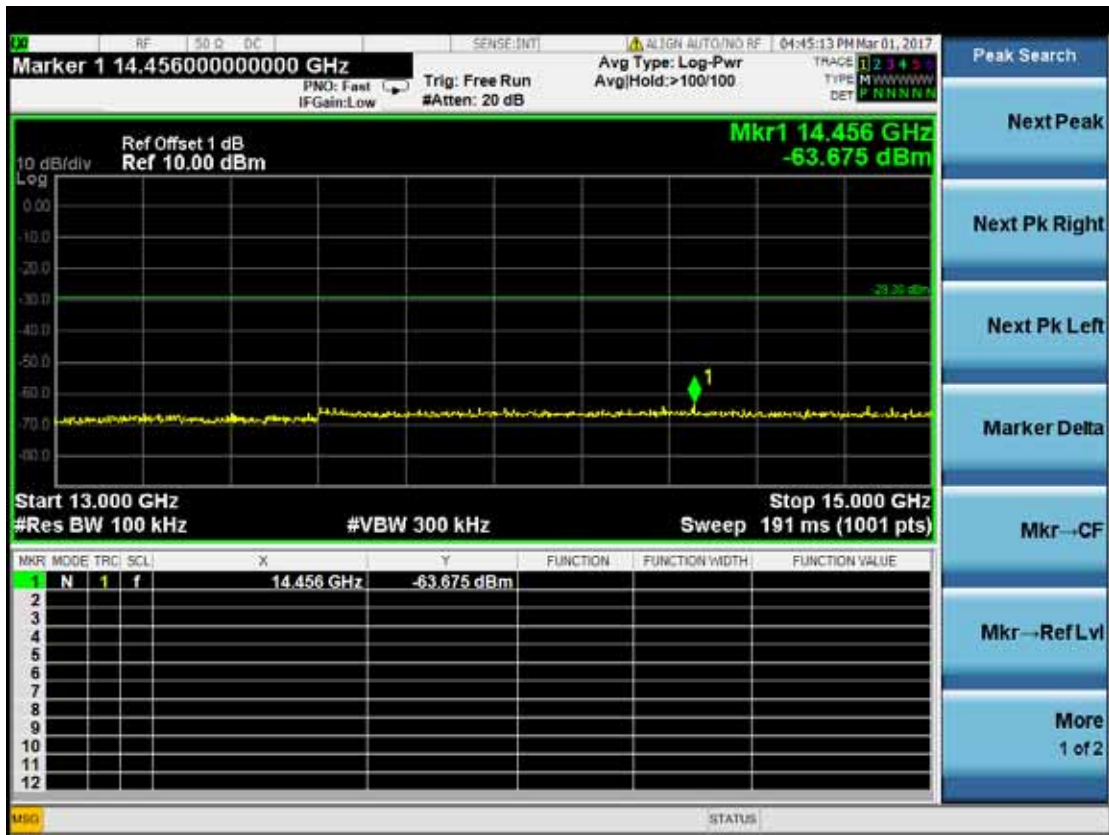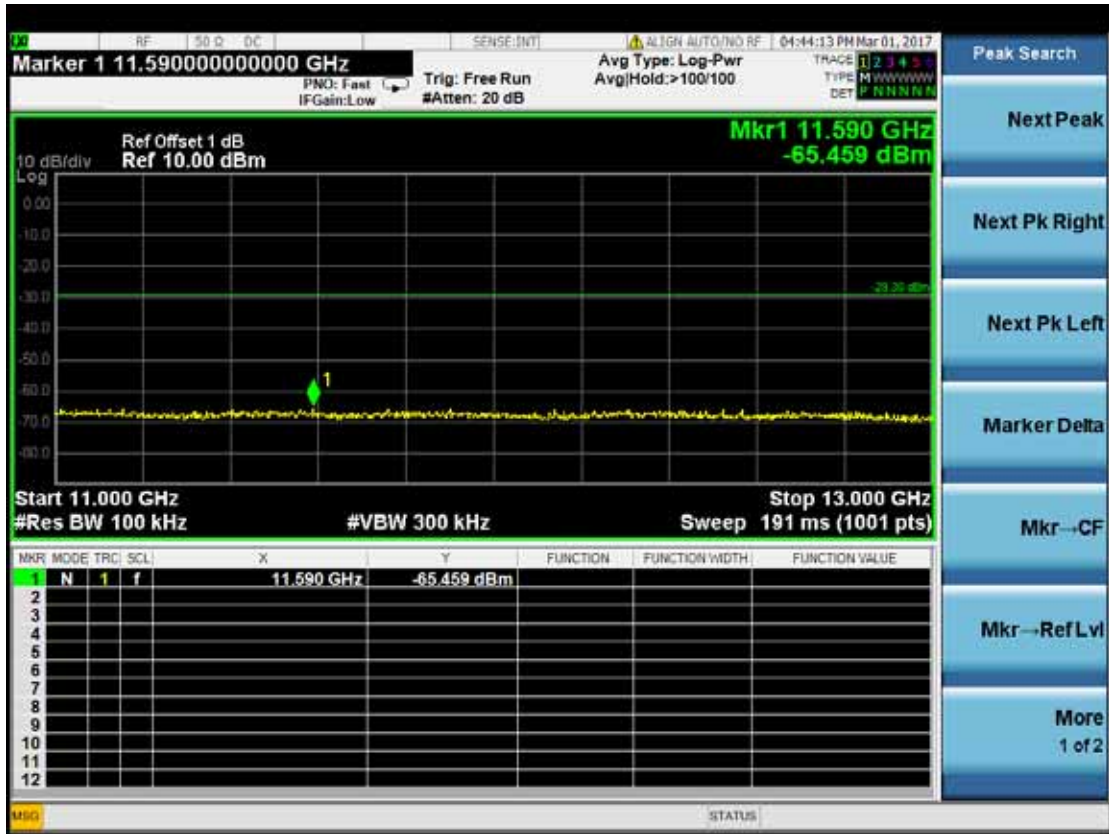


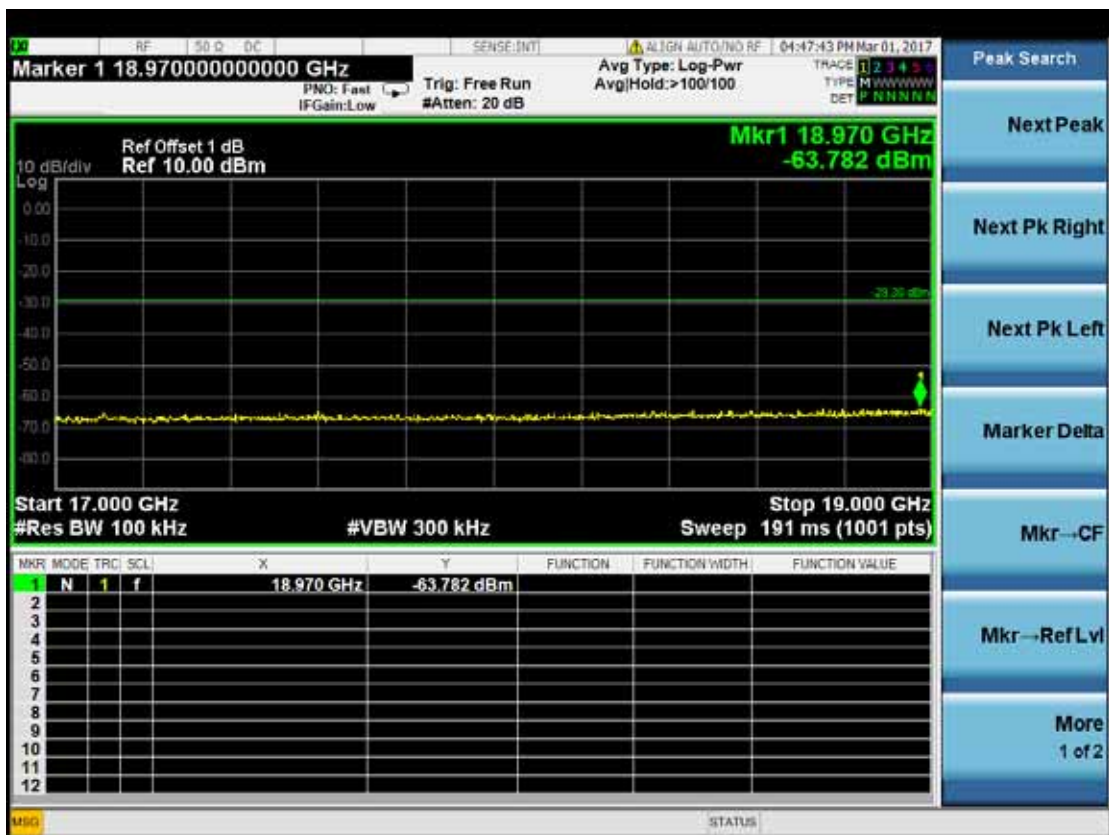
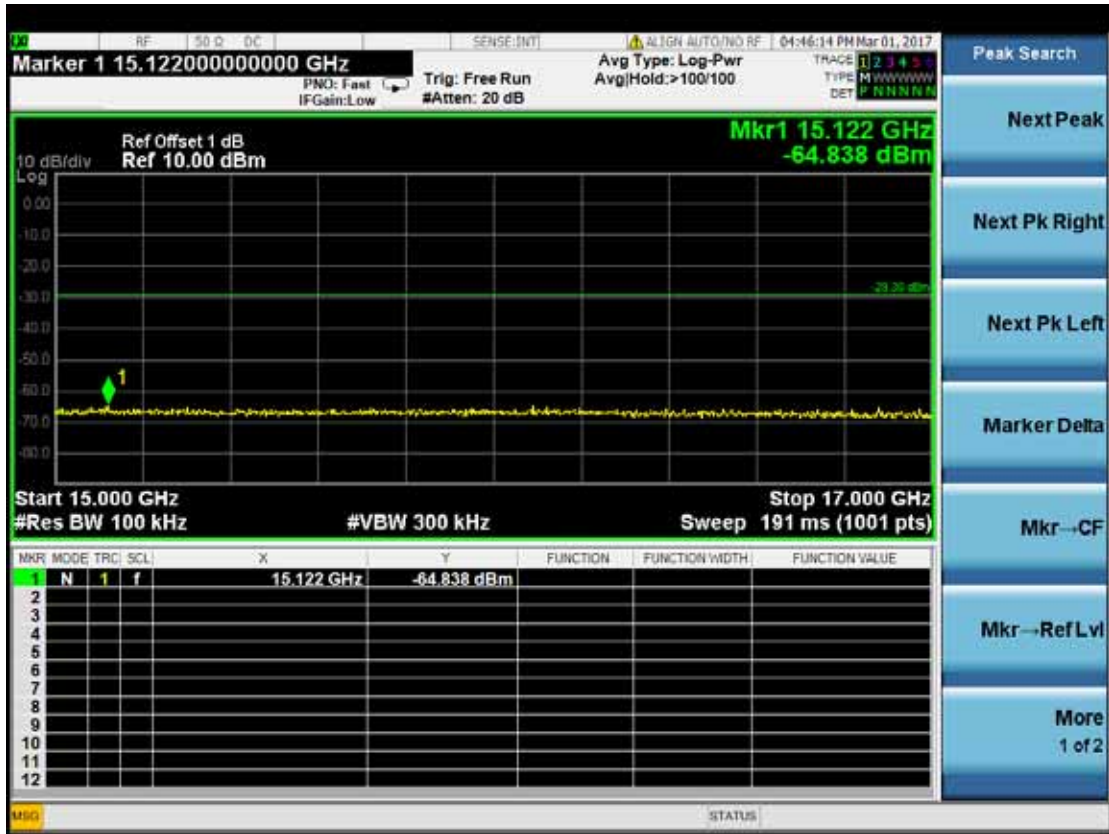


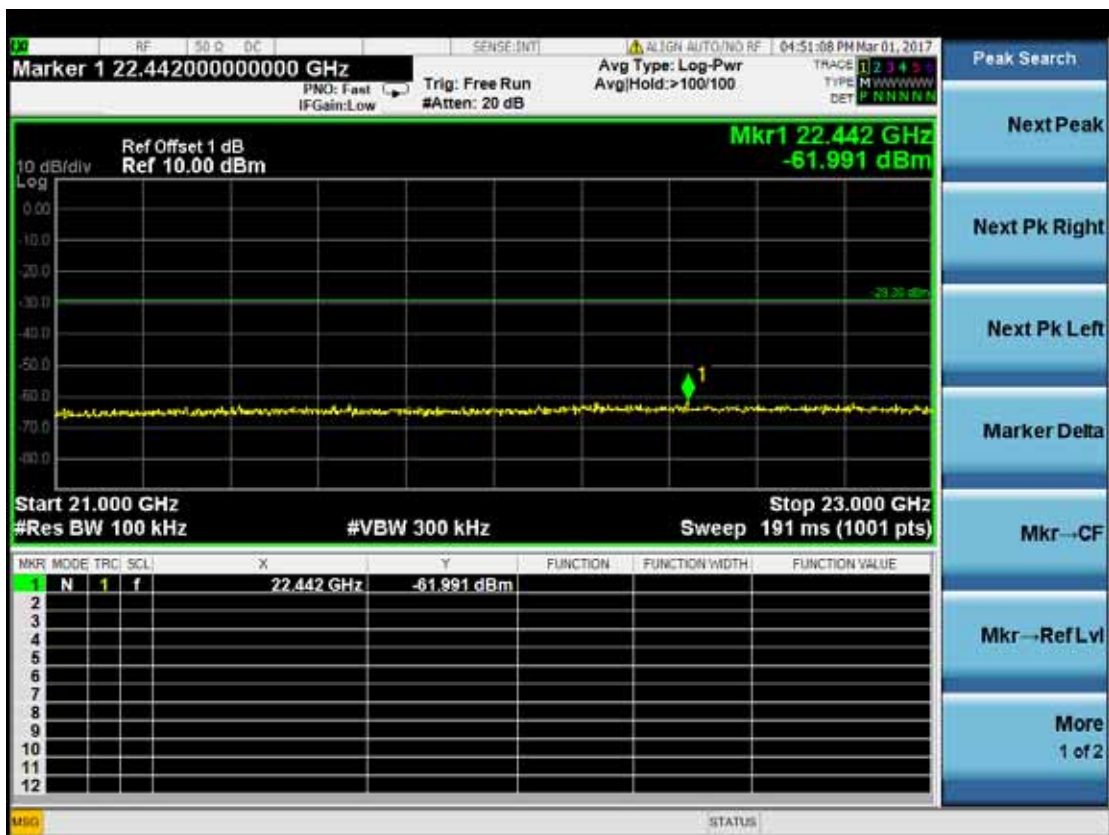
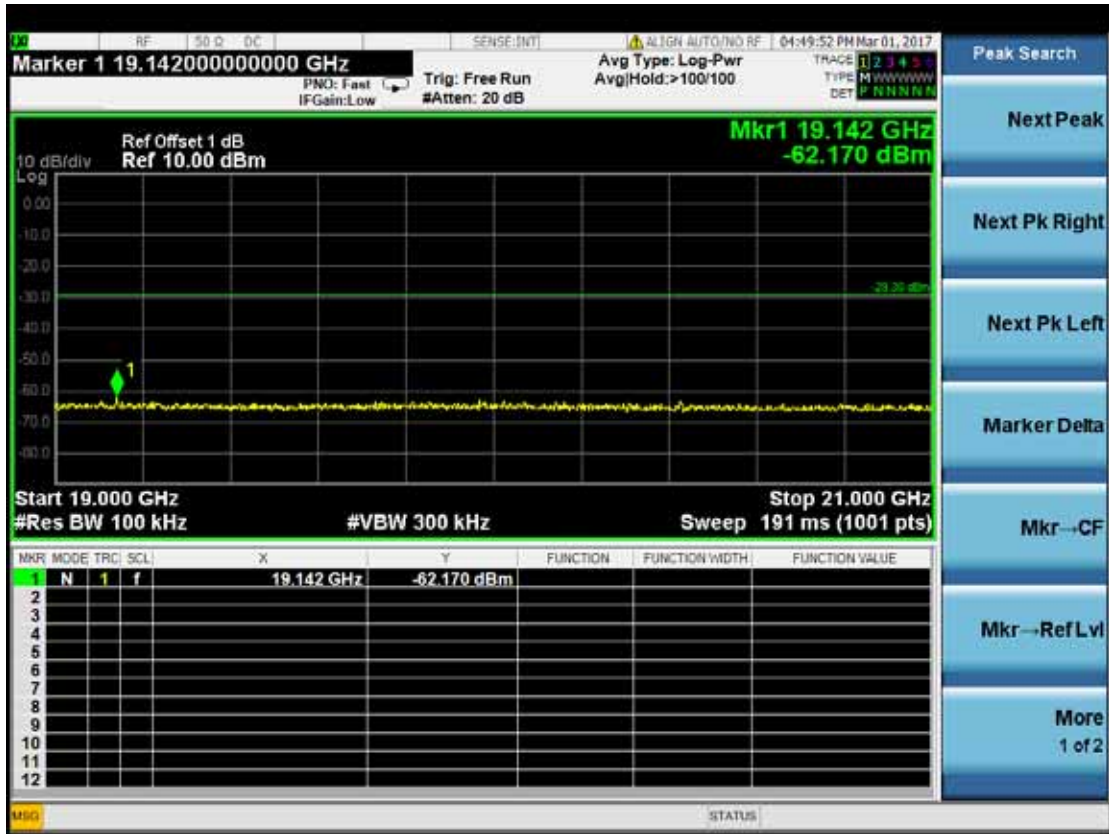



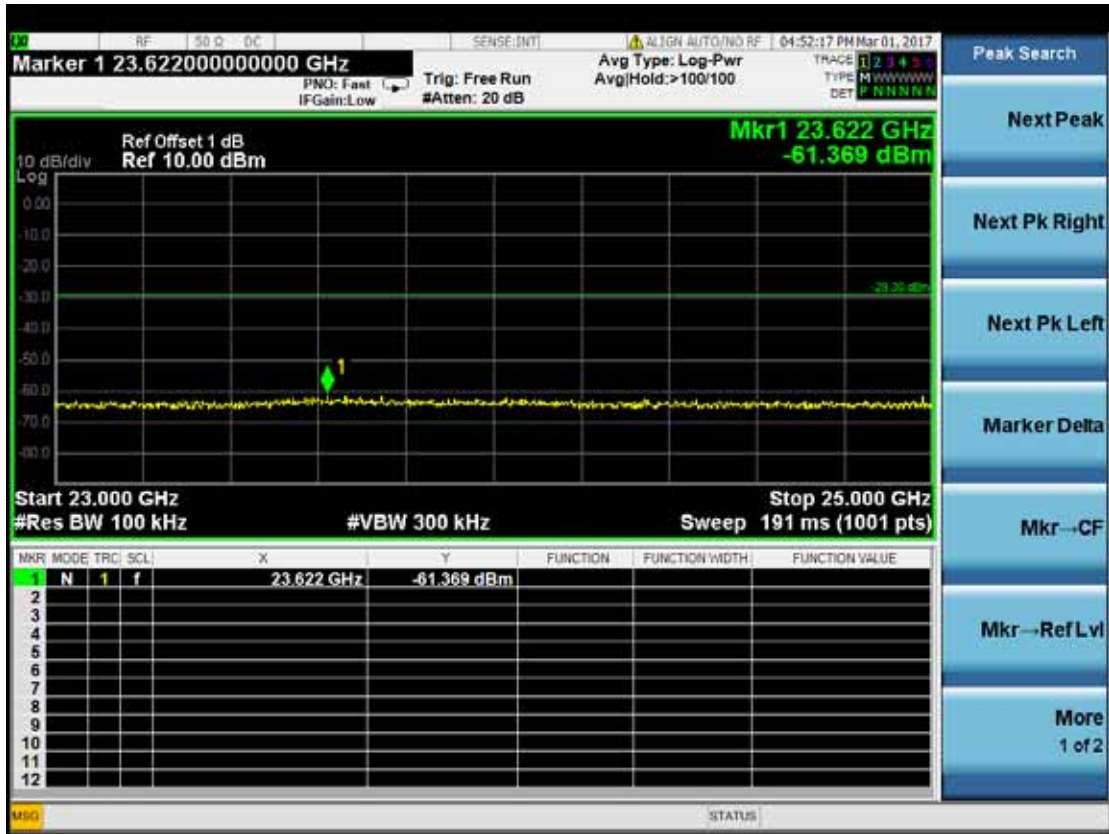




CH 20


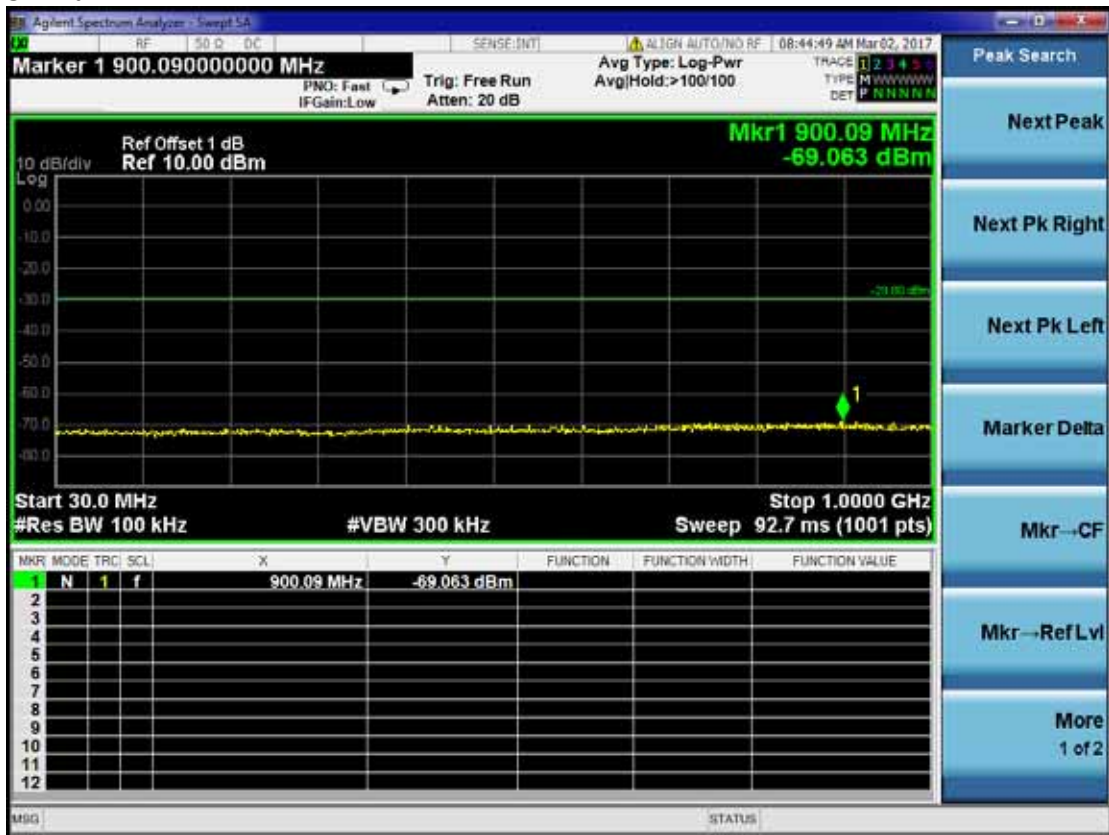


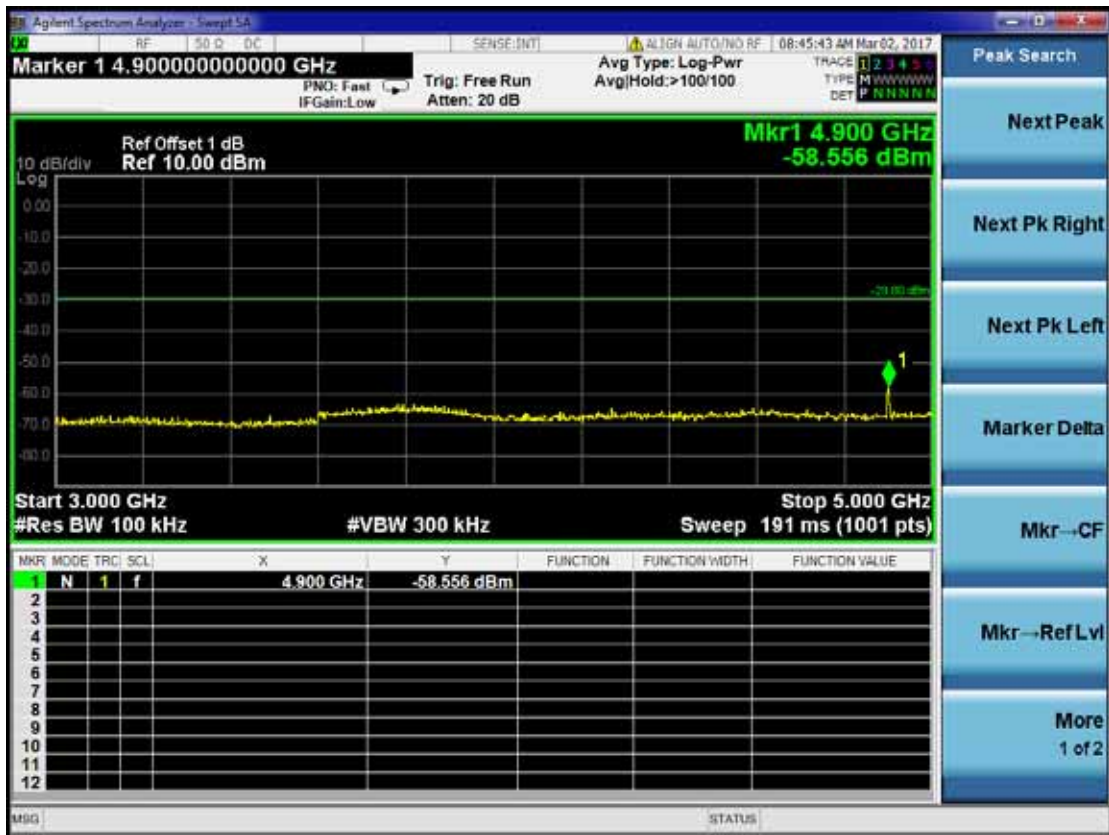
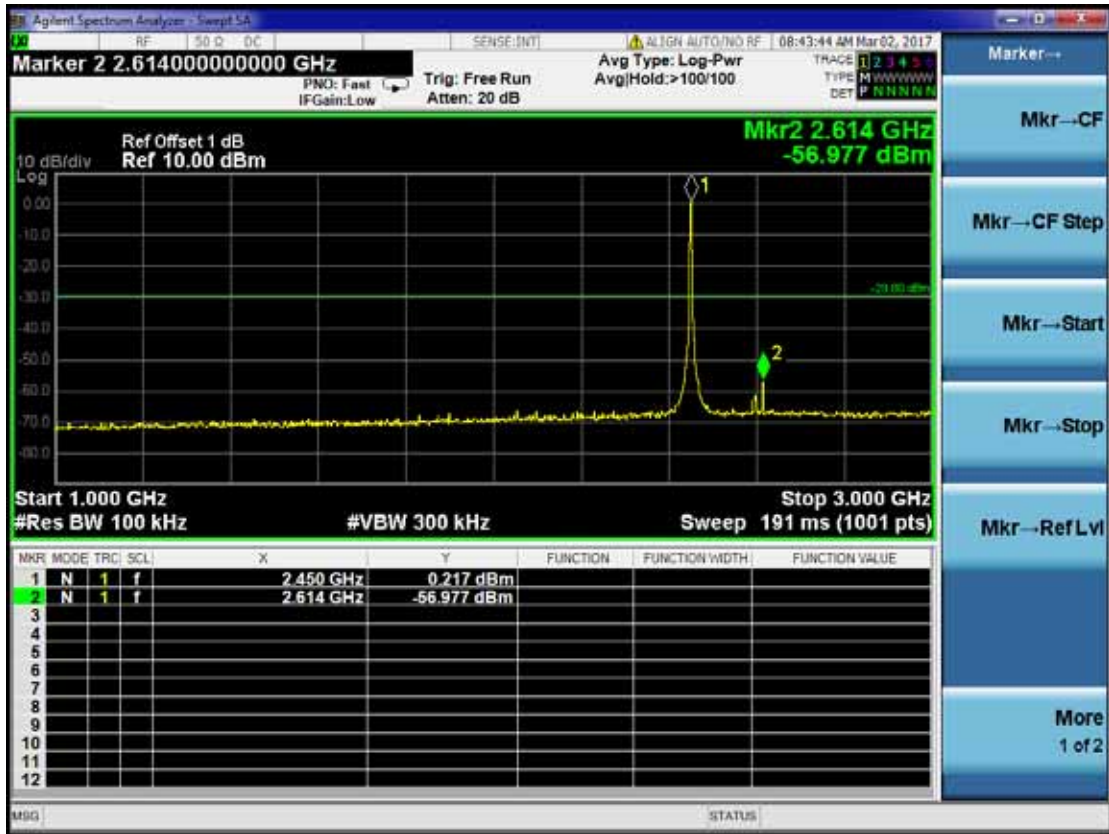


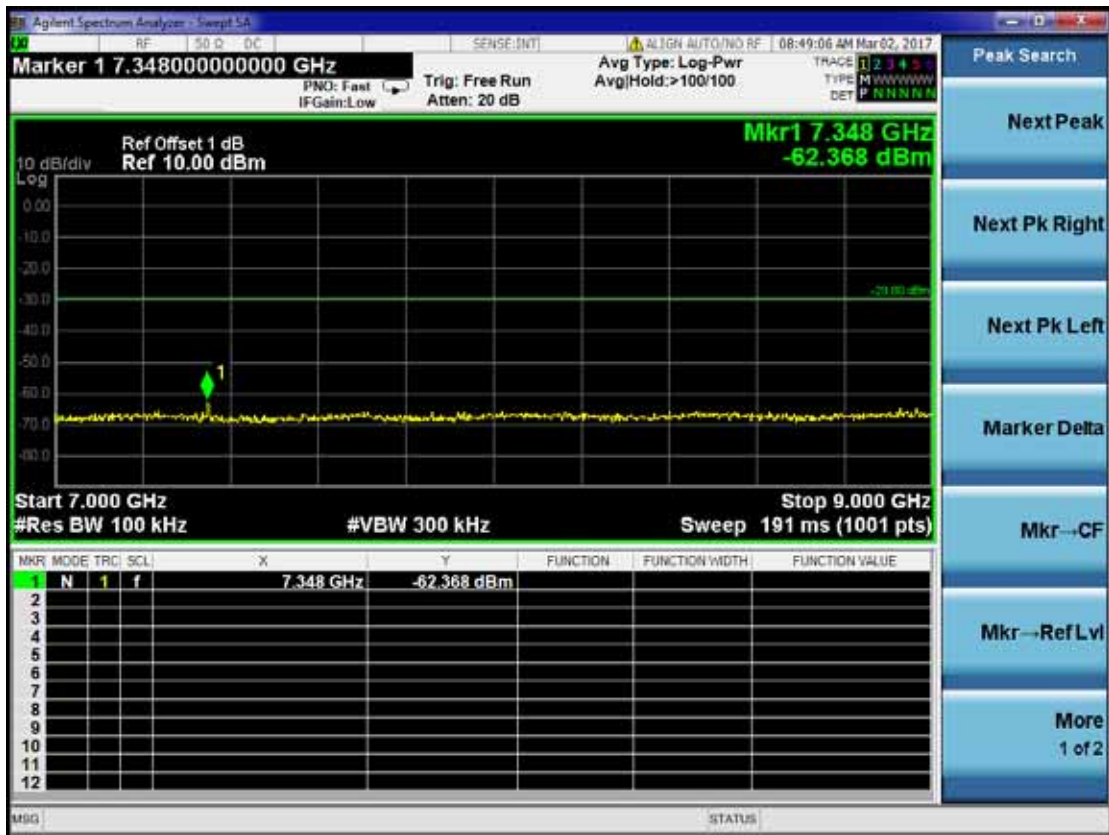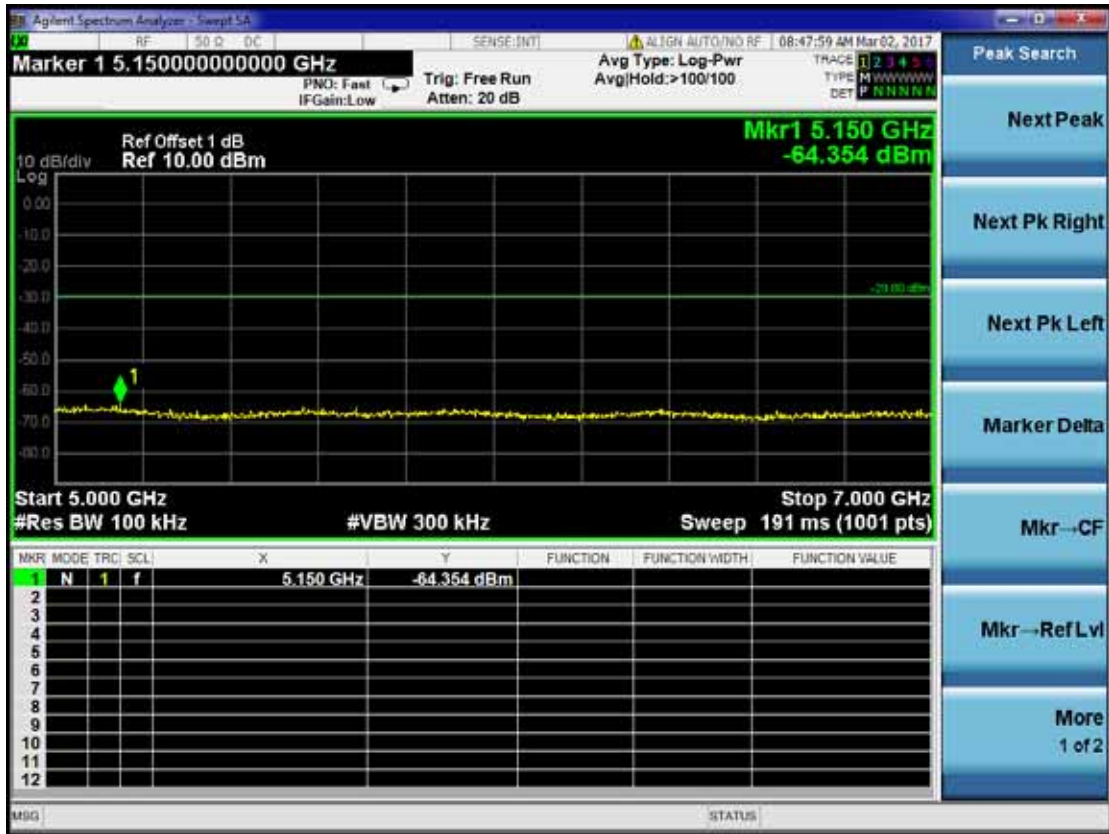

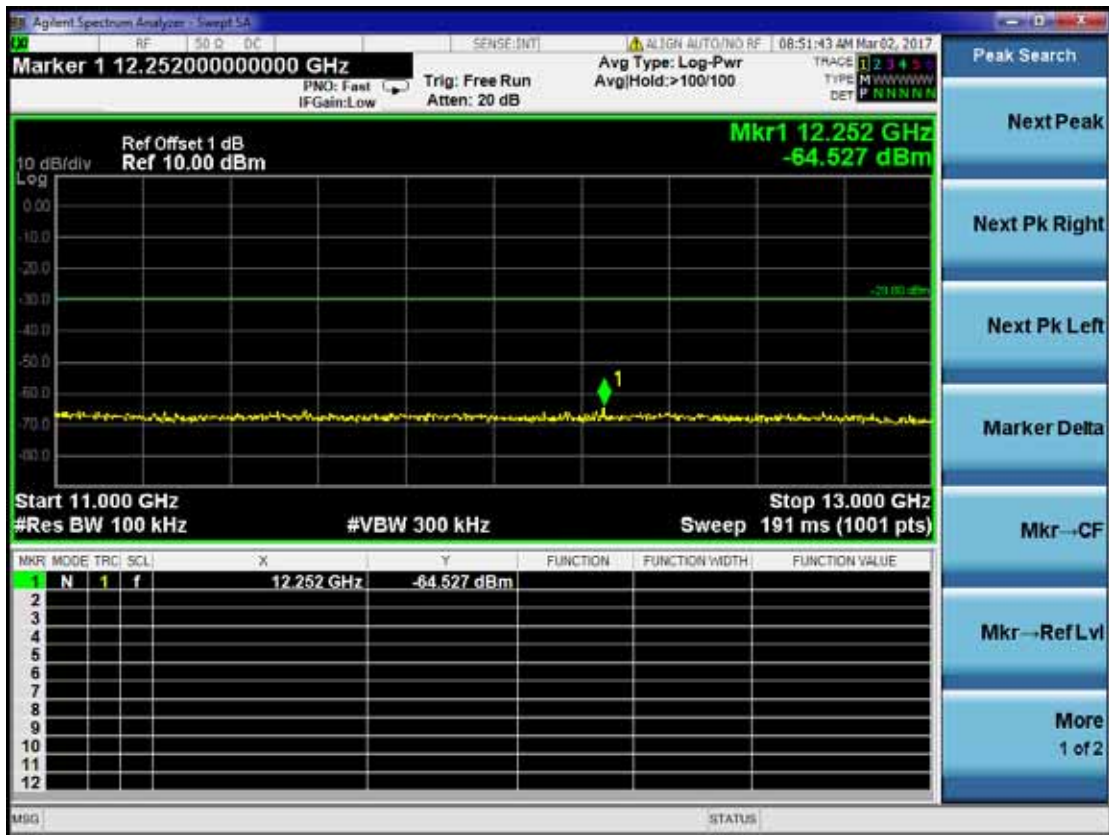
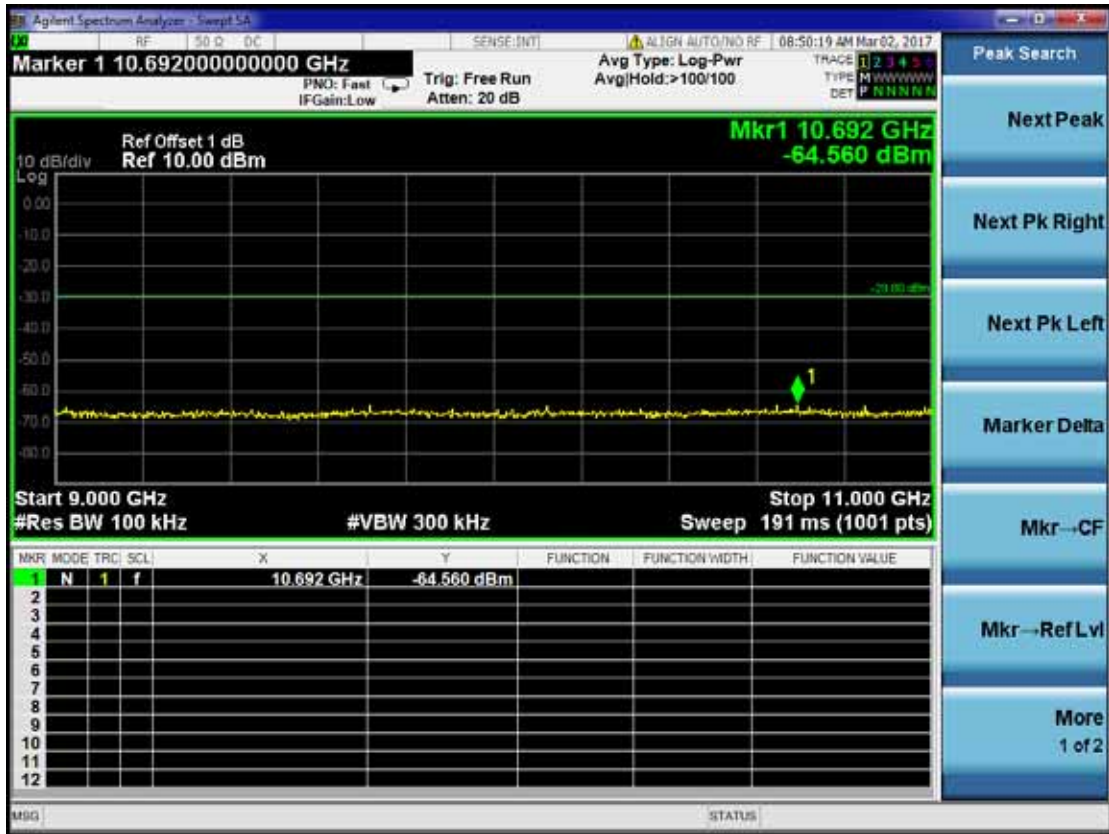


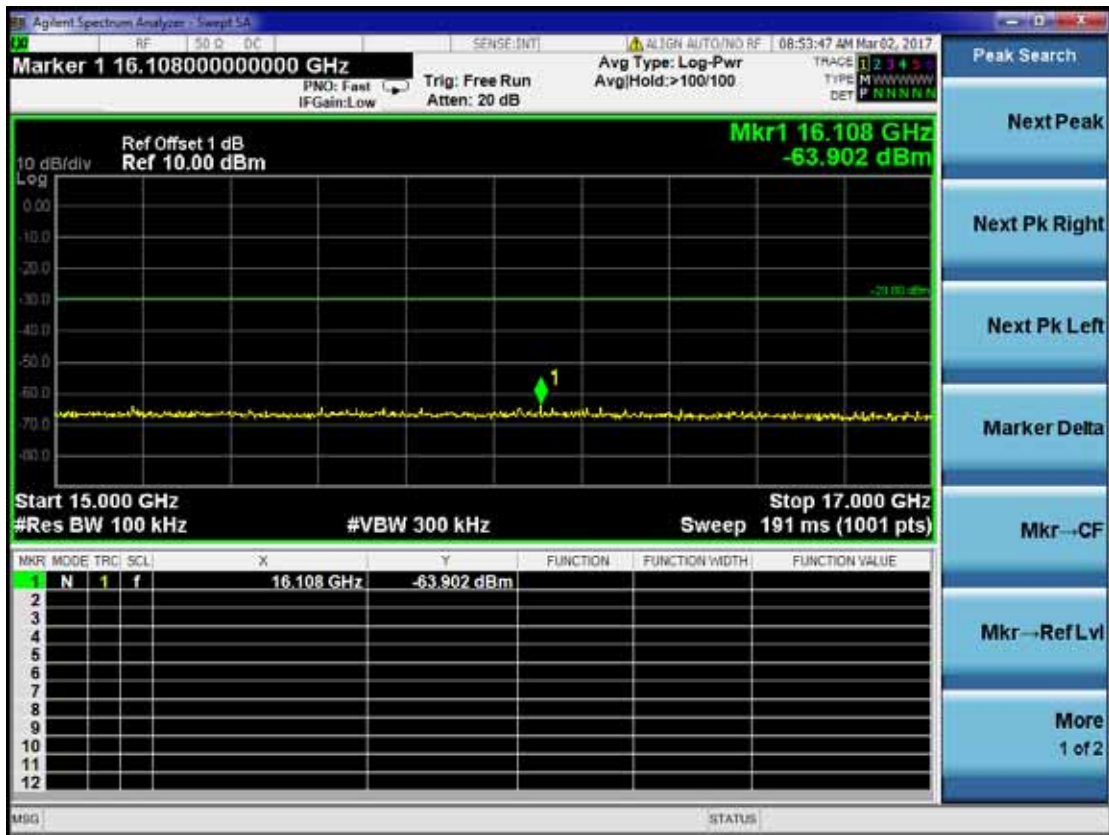
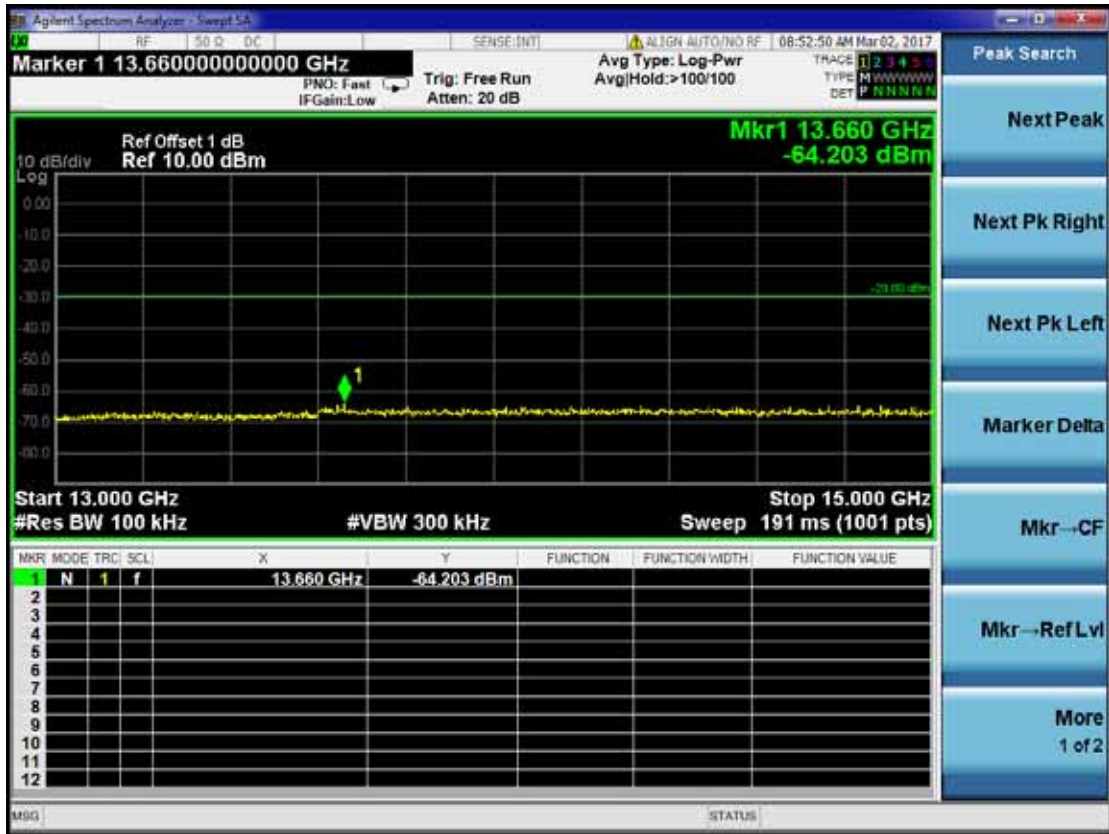


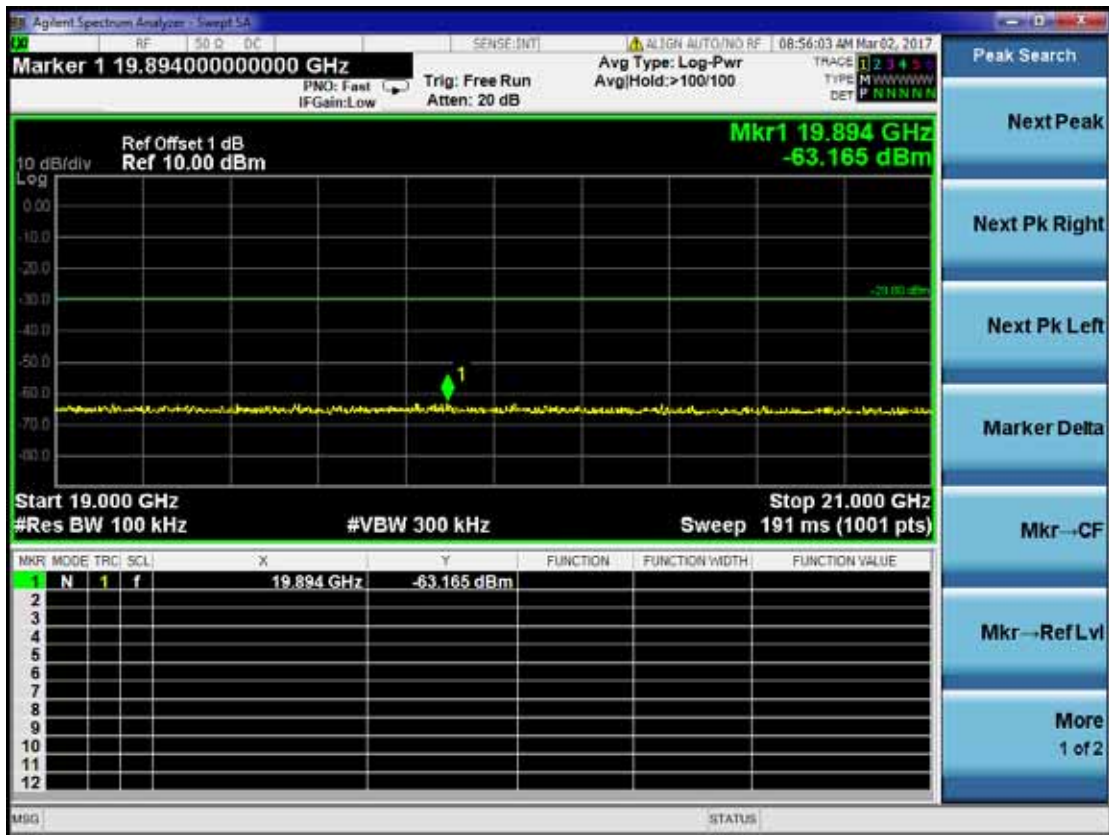
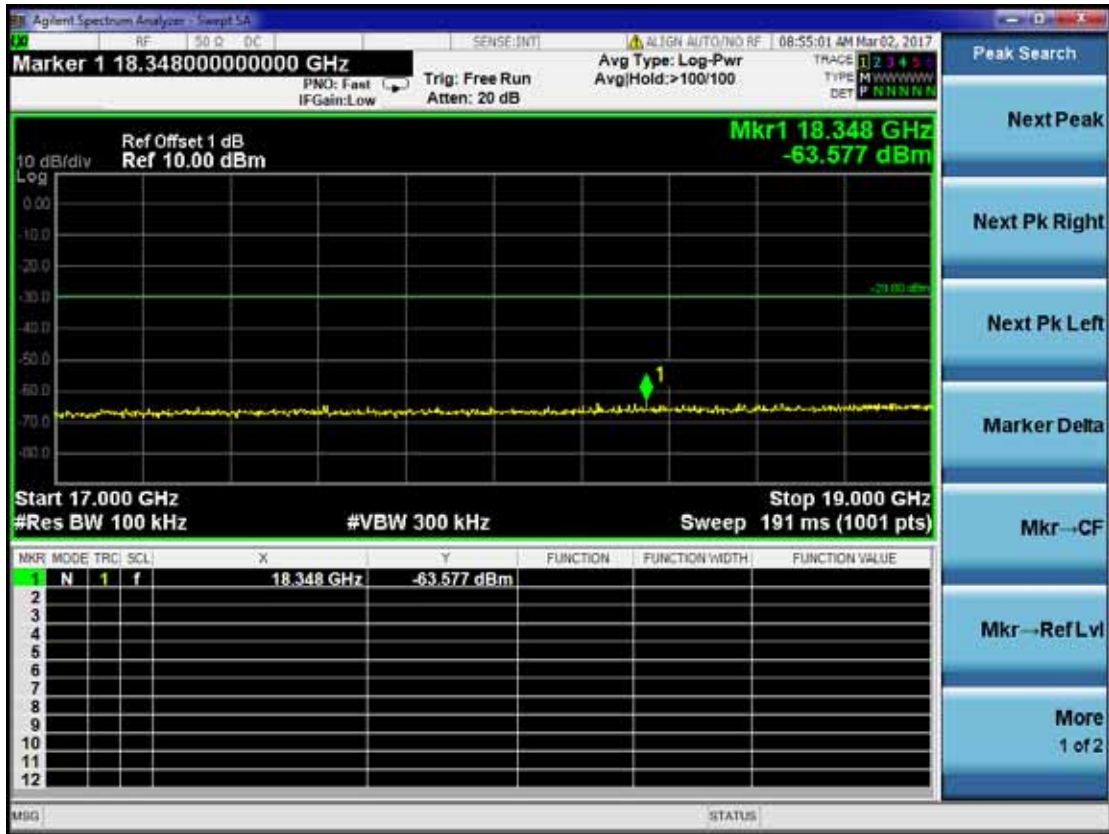


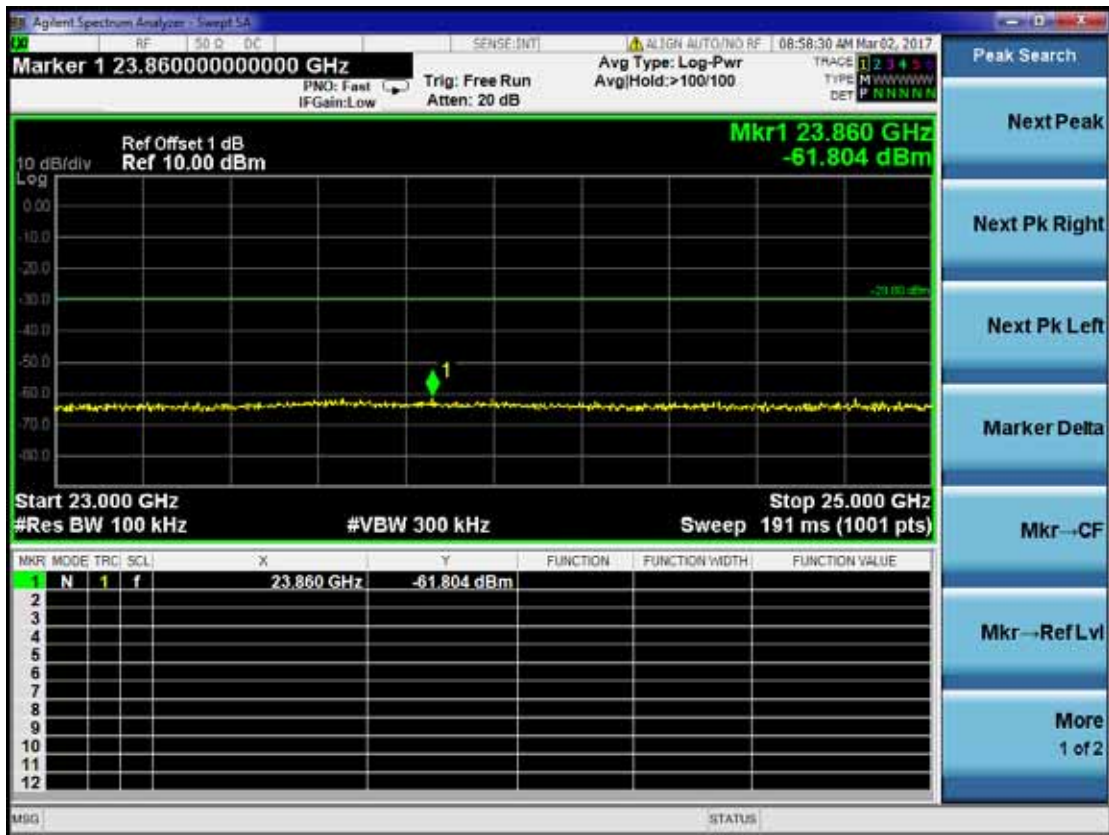
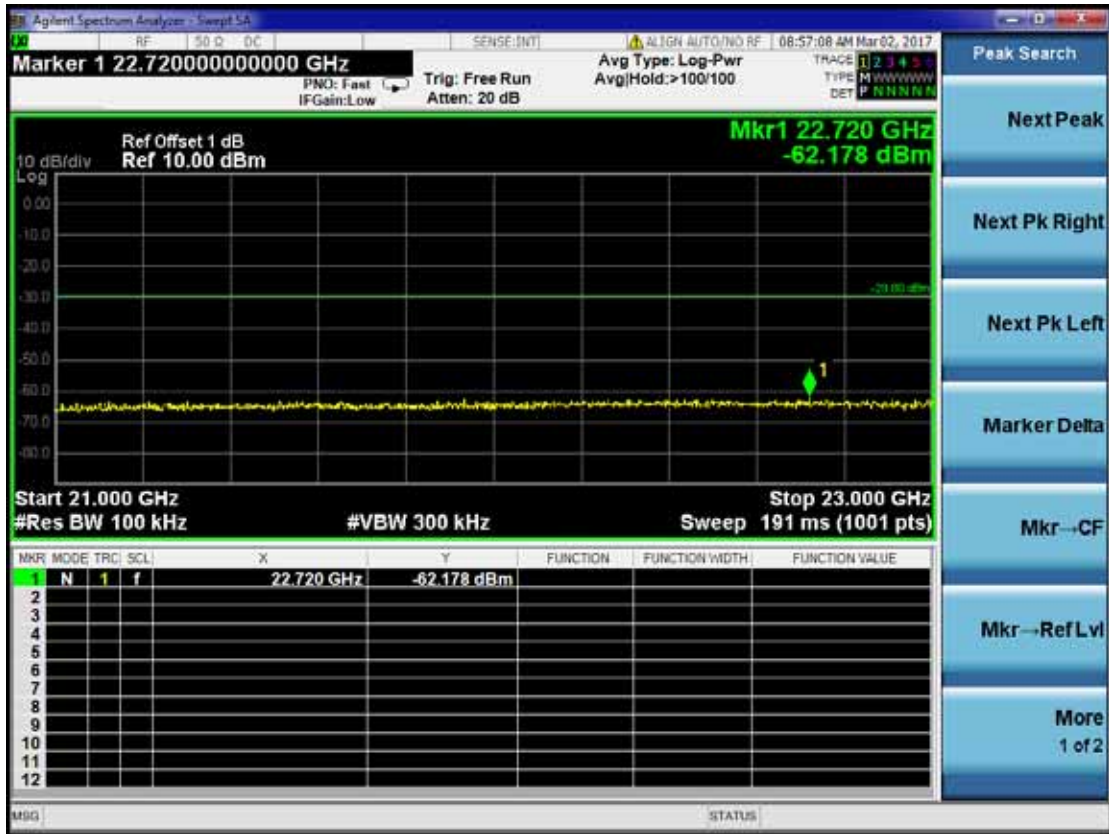




CH 25

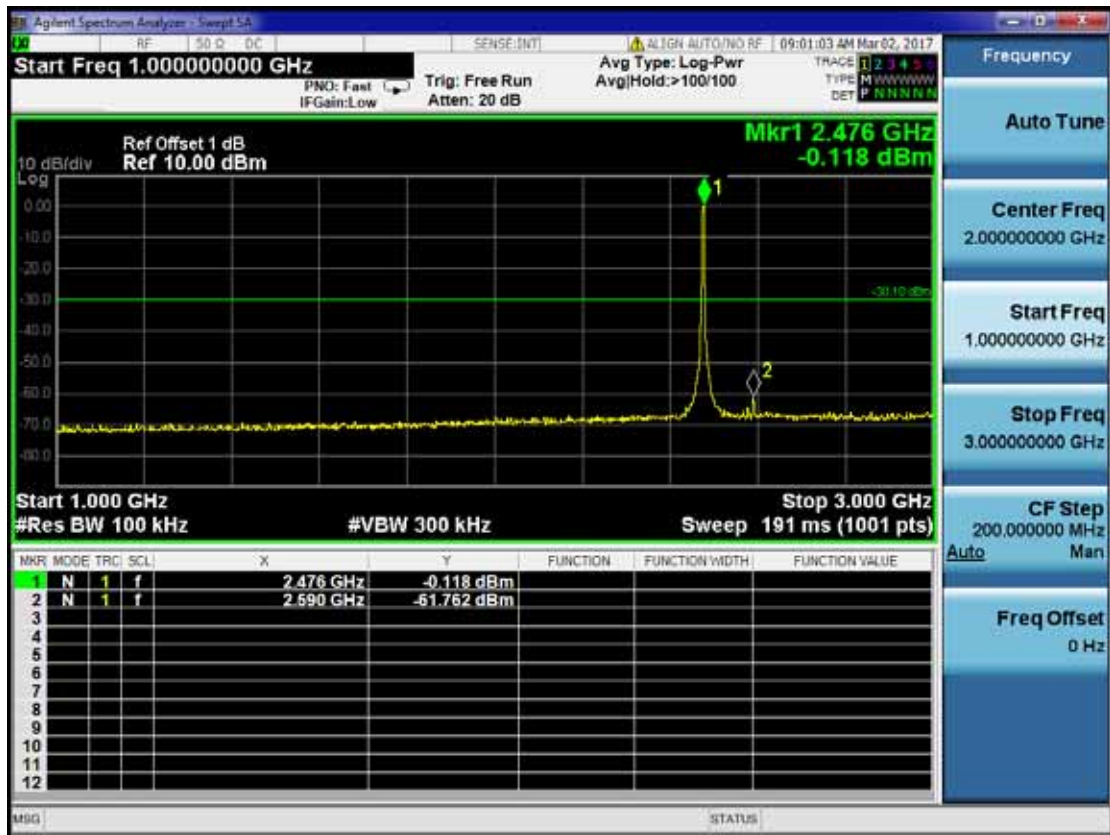
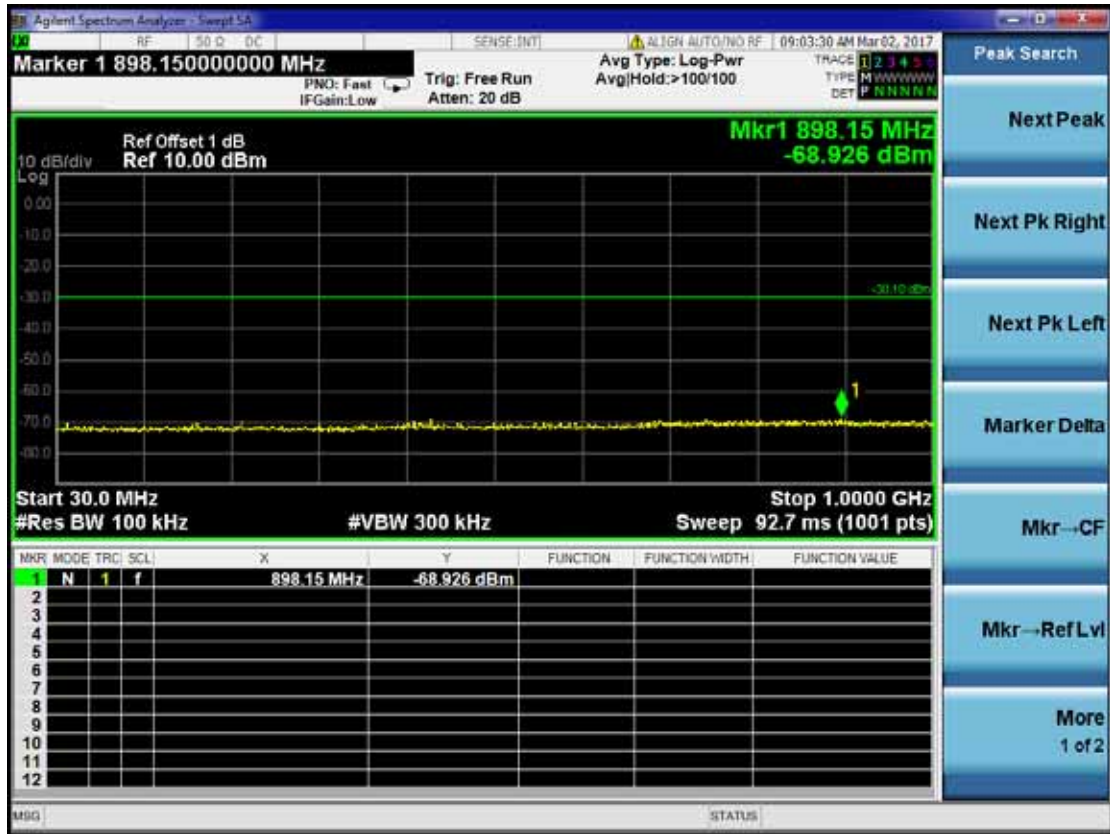


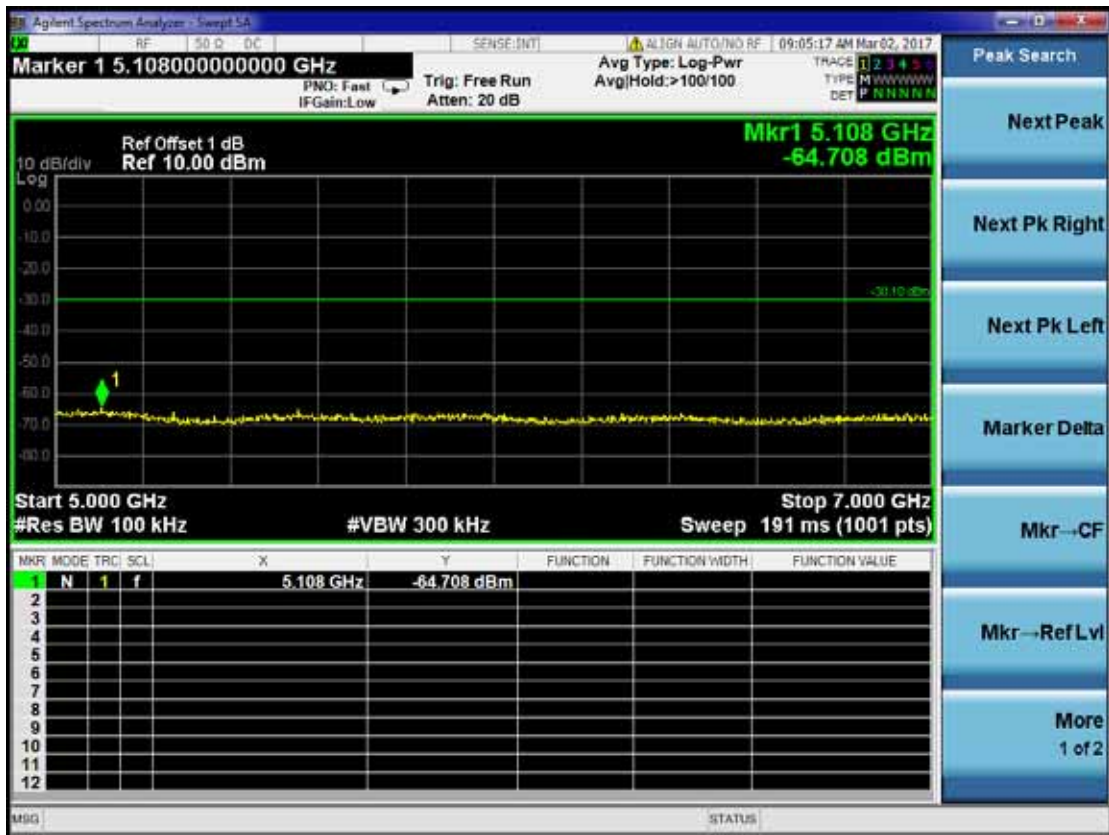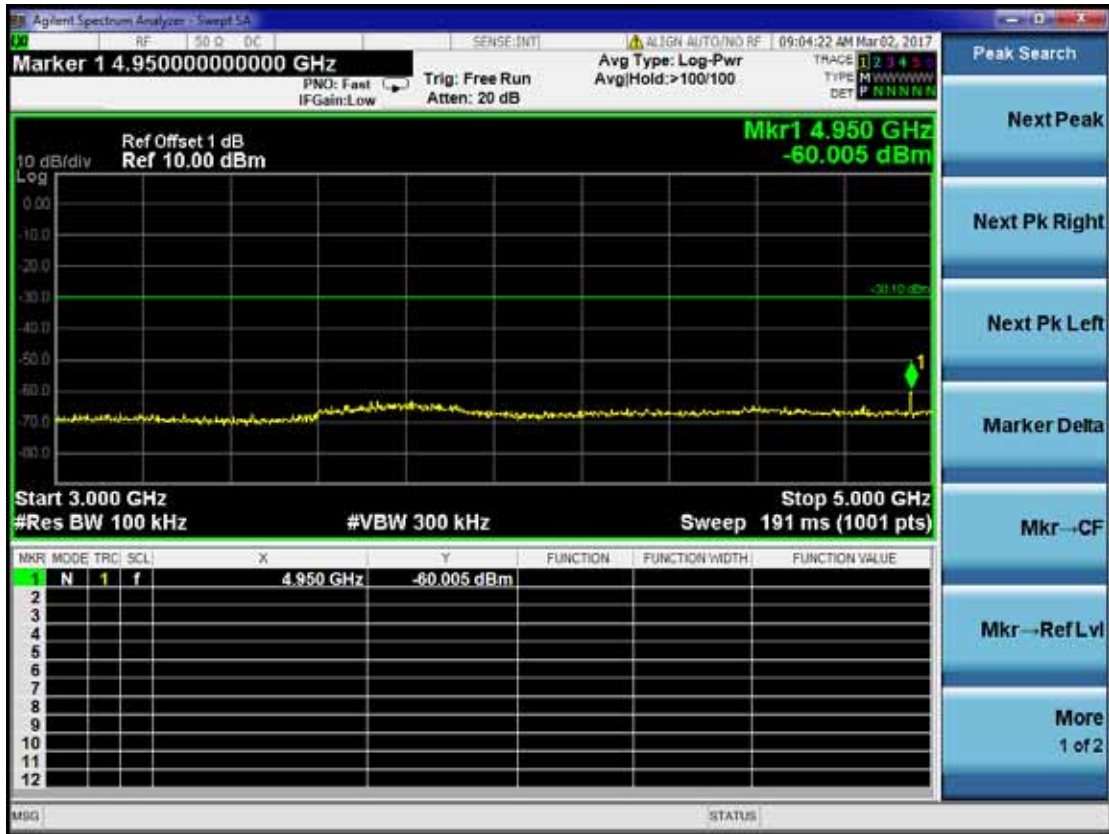


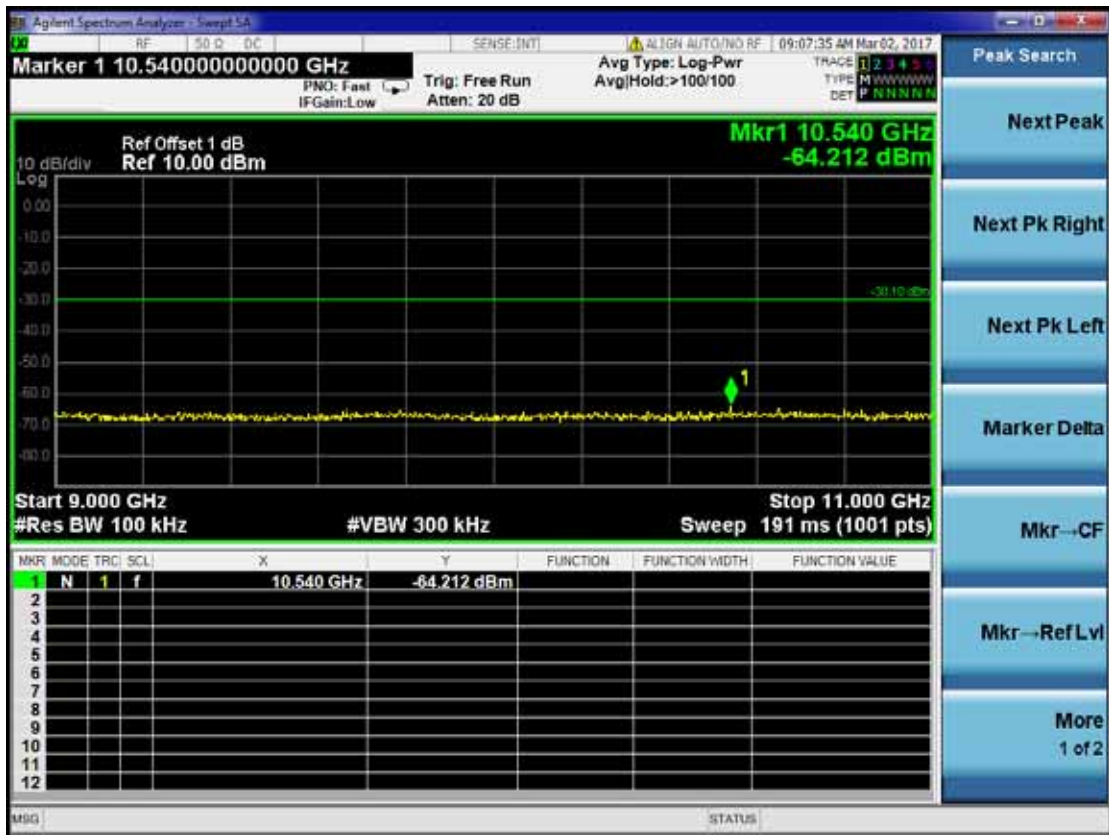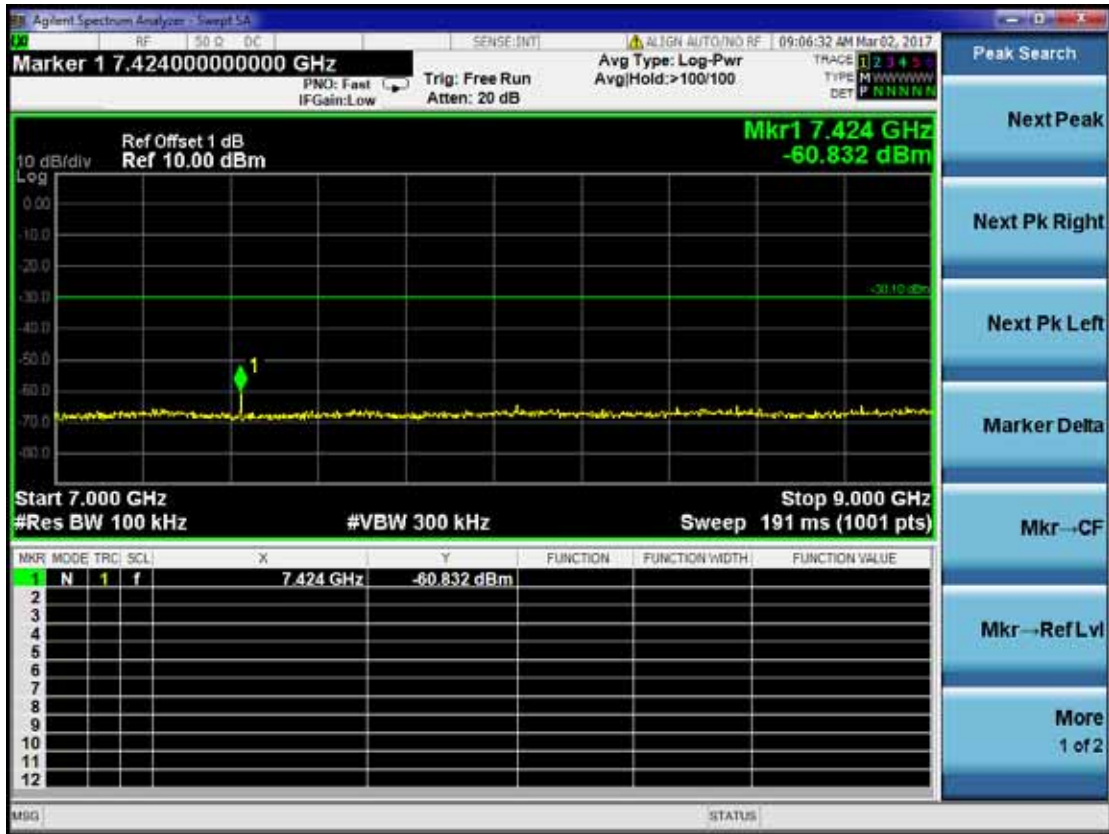

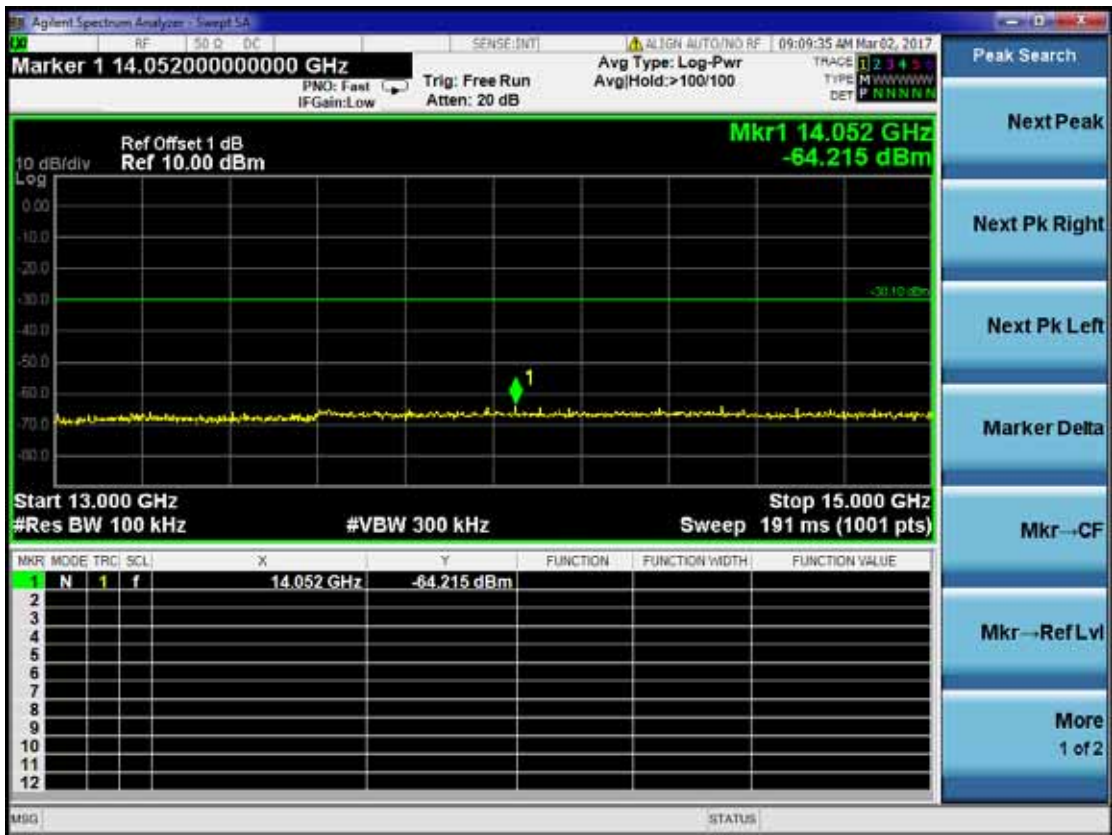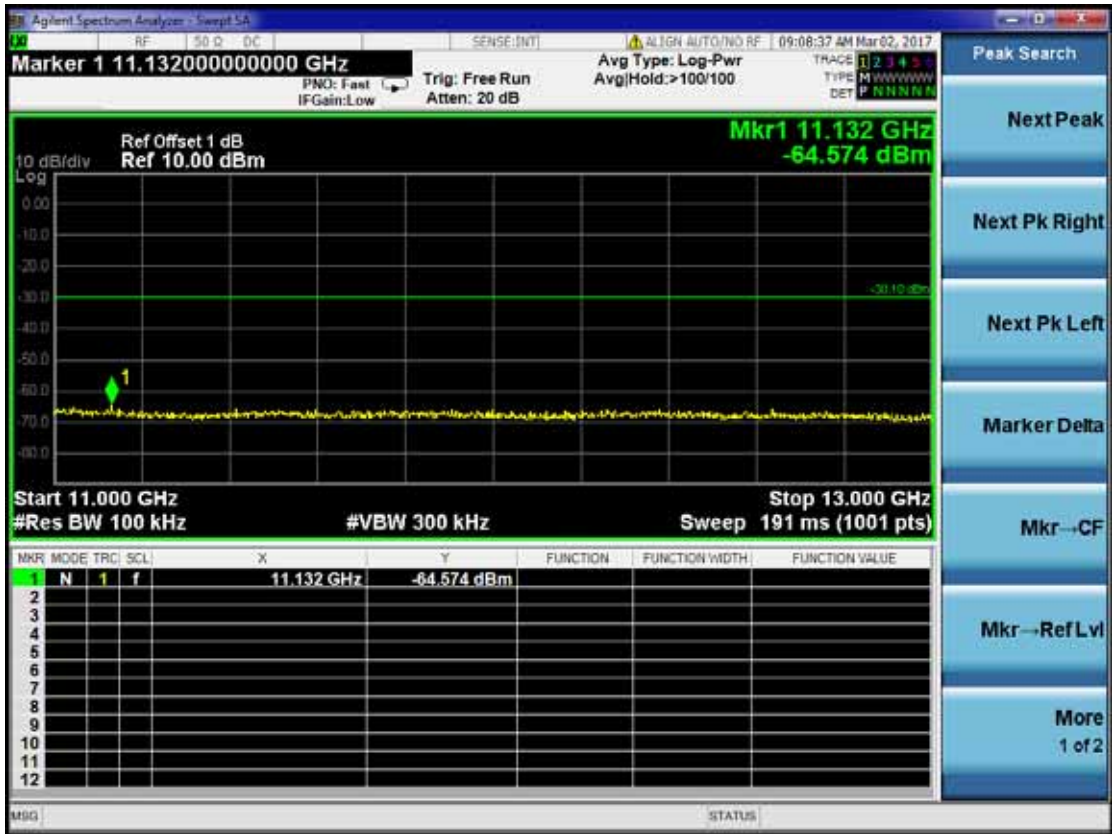

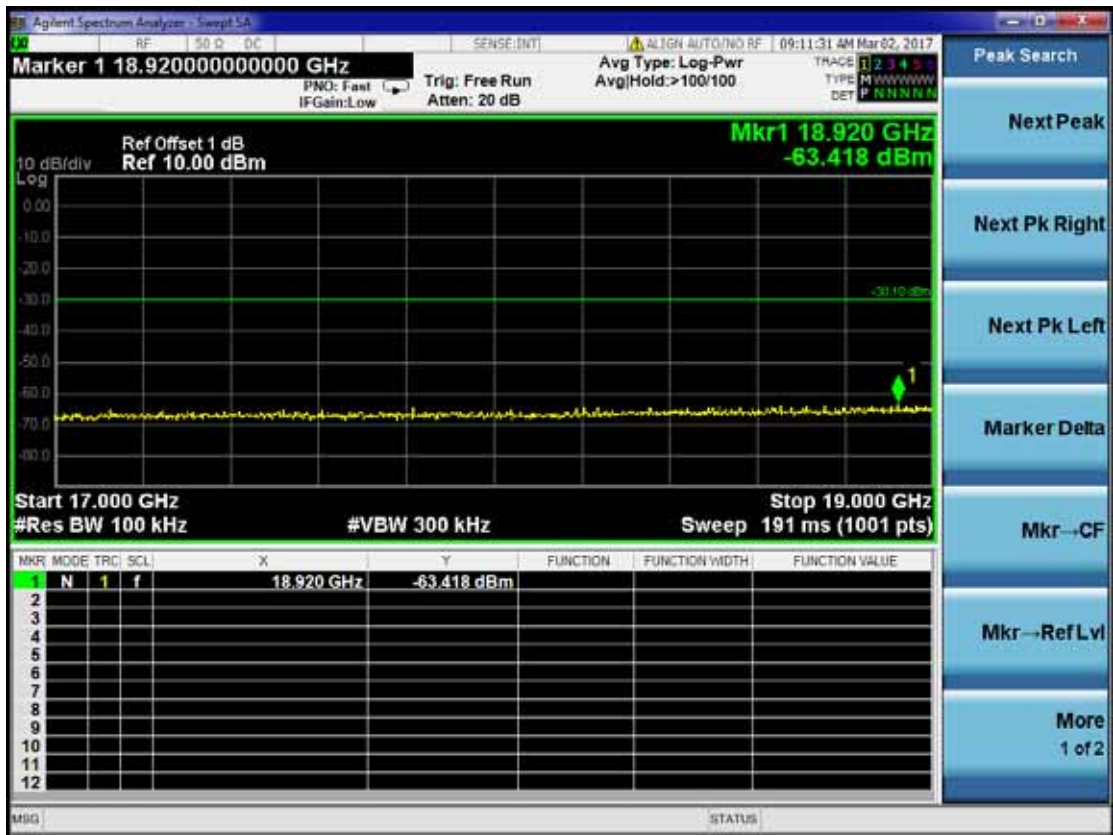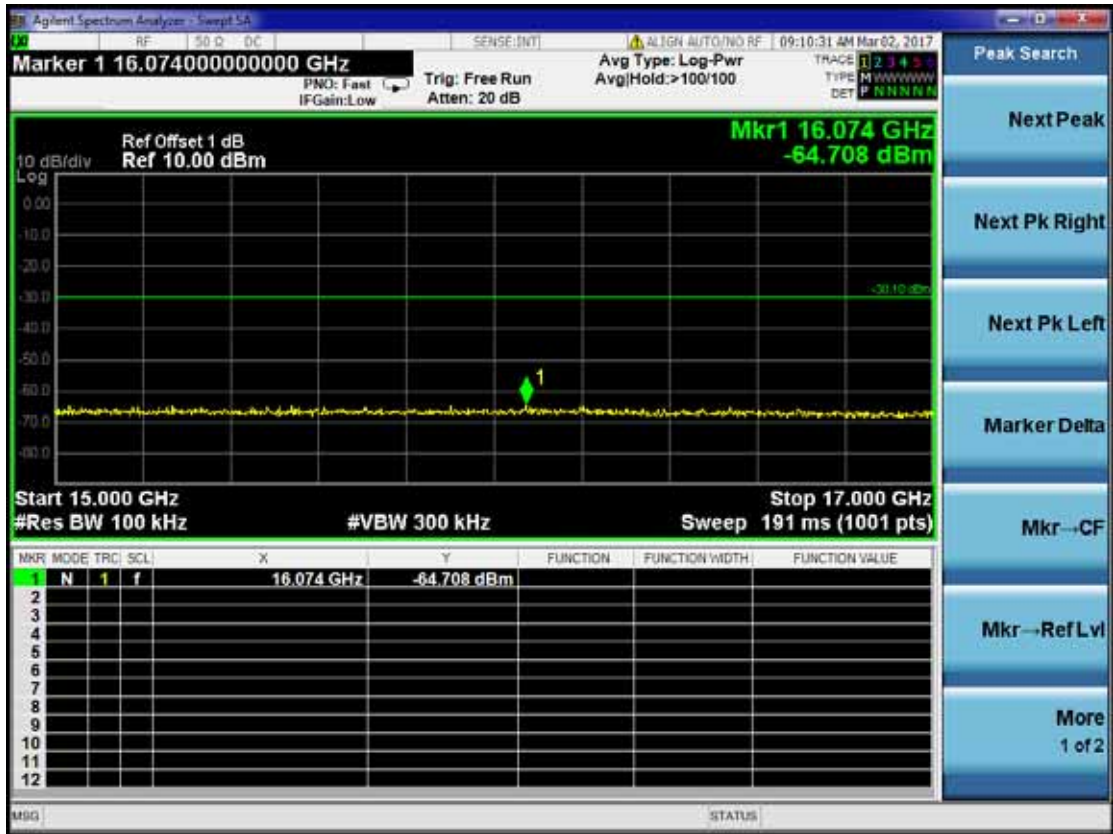

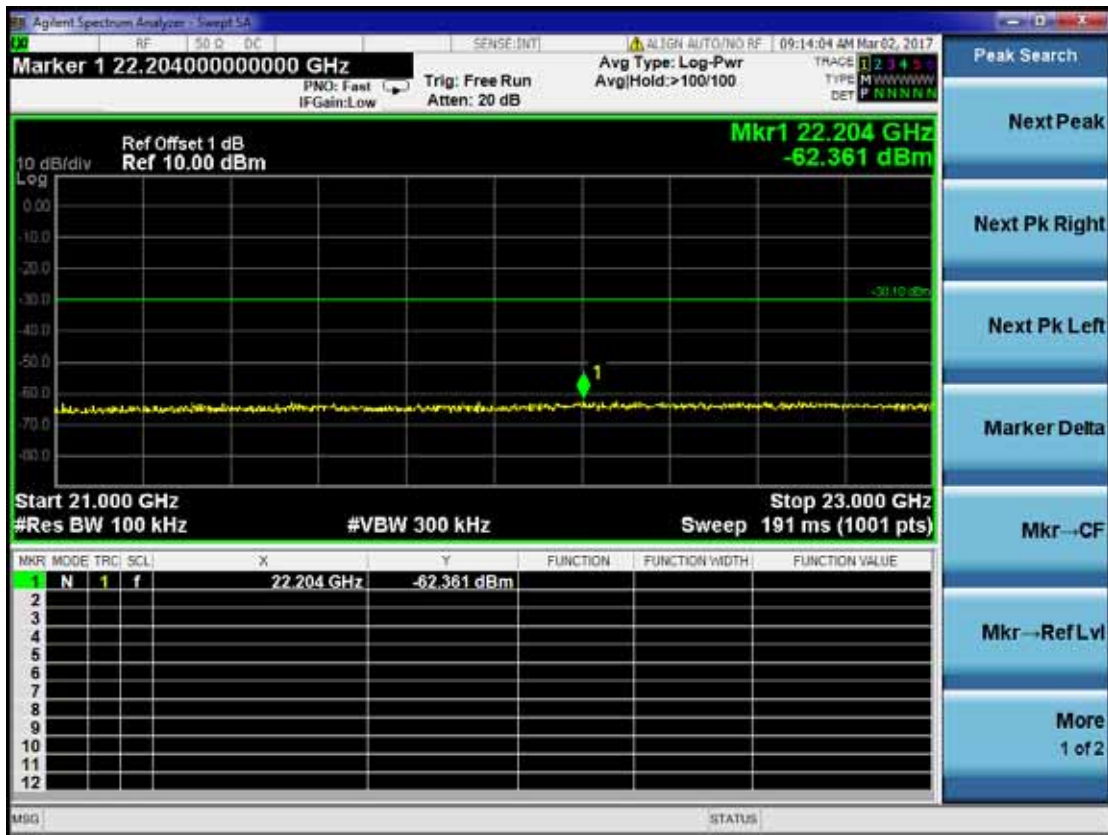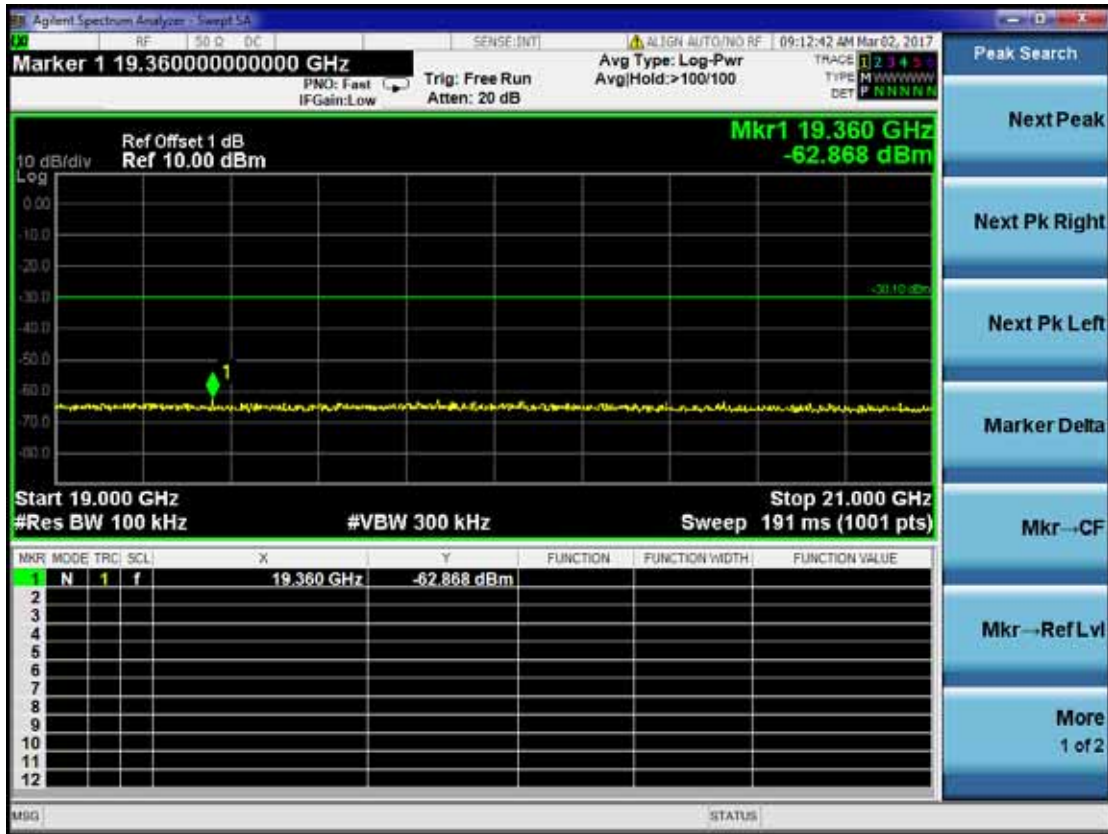

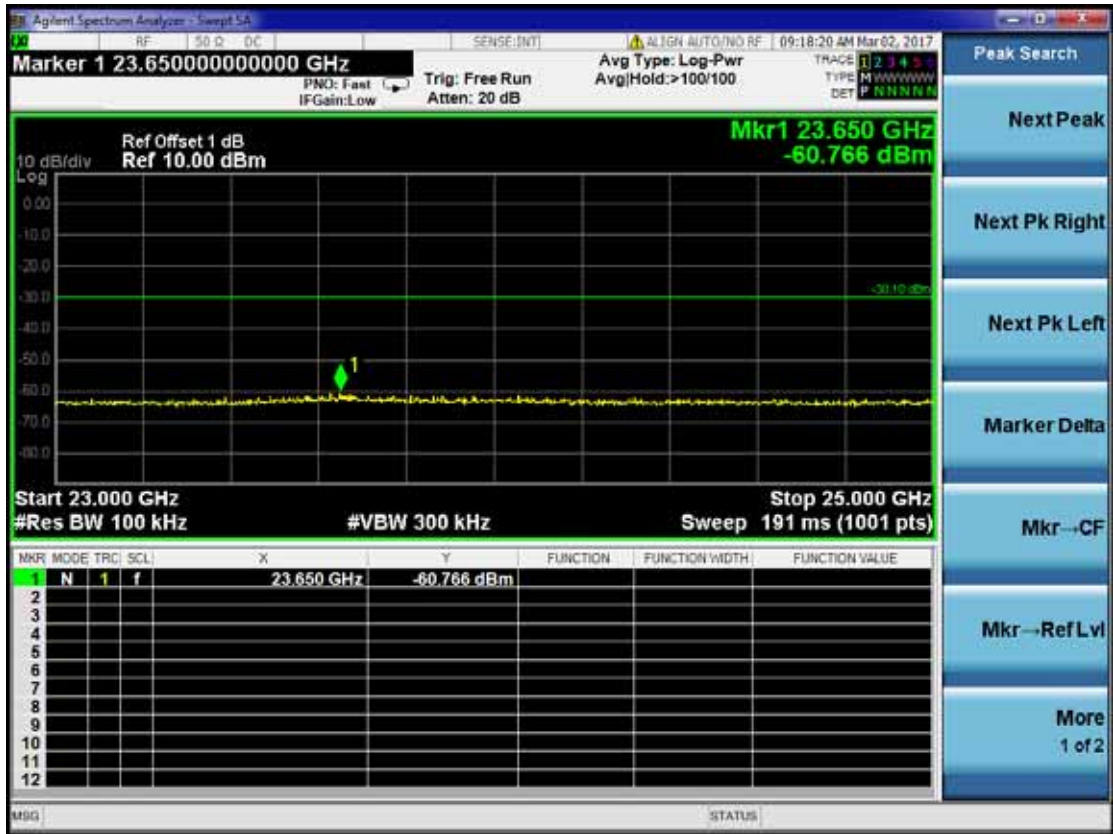

11.DUTY CYCLE

11.1. Test Equipment

Item	Type	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
1.	PXA Signal Analyzer	Agilent	N9030A	MY53120367	2016-05-15	2017-05-14

11.2. Test Results

The measurement of duty cycle is 100%.

CH 25



12.DEVIATION TO TEST SPECIFICATIONS

【NONE】