



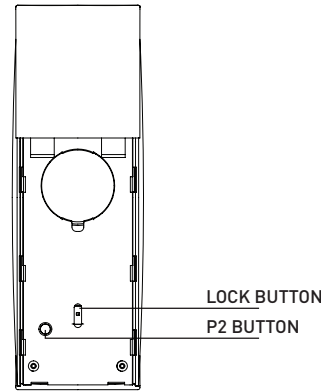


USER GUIDE

QUICK START GUIDE


BUTTON OVERVIEW

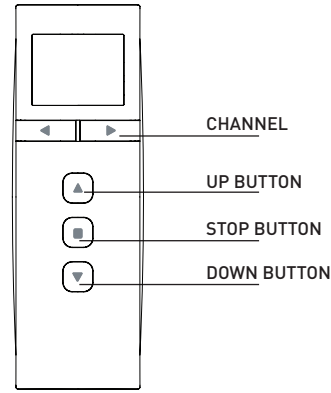

REPLACE BATTERY




Remove cover from remote press gently in and down to disengage cover.




Install battery CR2450 with positive (+) side facing up.

WALL MOUNTING



Use supplied fasteners and anchors to attach the base to wall.

HIDE SPARE CHANNELS



Press and hold both channel scroll buttons together until 15 appears on the screen.



scroll with the left arrow from ch 15 until you reach the last channel that you want to see (example 5) confirm by pressing stop Ch 1 -5 will only be visible

SELECTING A CHANNEL

STEP 1




Press left and right arrow; to scroll through channels as required.

STEP 2

READY FOR CONTROL


Now while the channel is active follow the control instructions.



if no button is pressed within 4 seconds, the channel selection will automatically be confirmed.


GROUP CONTROL

Channel "0" is pre-set to control ALL shades paired to your Multi-channel remote.

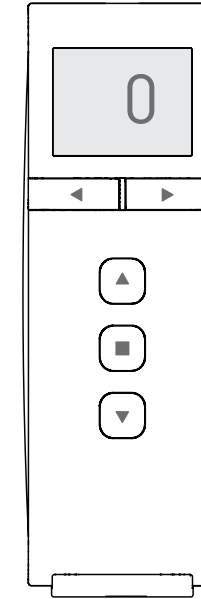

CONTROLLING A SHADE

CONTROL SHADE UP OR DOWN



While the channel is displayed press up or down to move shade accordingly

STOPPING THE SHADE





Press the stop button to stop shade at any point

USER GUIDE


ADVANCED PROGRAMMING

DISABLE LIMIT SETTING

This mode is intended to be used after all shade programming is completed. User Mode will prevent accidental or unintended changing of limits.



LCD displays "L" when locked




LCD displays "U" when unlocked


SET A FAVORITE POSITION

Repeating these steps after creating a favorite position will delete it.

Move shade to desired position by pressing **UP** or **DOWN** on the remote.



STEP 1. Press P2 on controller



MOTOR RESPONSE



STEP 2. Press STOP on controller



MOTOR RESPONSE



STEP 3. Press STOP on controller




MOTOR RESPONSE




CREATE CUSTOM GROUPS

It is possible to copy one channel to another channel to create custom groups



Select the channel you want to transfer


STEP 1. Press P2 on existing controller



MOTOR RESPONSE



STEP 2. Press P2 again on existing controller




MOTOR RESPONSE




Step 3 to be completed within 4 seconds of Step 2



STEP 3. Press P2 on new controller



Select the channel on the new controller



MOTOR RESPONSE

