



FCC TEST REPORT

**Test report
On Behalf of
Videostrong Technology Co.,Ltd
For
NOW
Model No.: KA2, KA1, KA1 PRO, KA2 PRO, KA3, KA3 PRO, KA5,
KA5 PRO, KA6**

FCC ID: 2AGKB-KA2

Prepared for : Videostrong Technology Co.,Ltd
604, Lushi industrial Building, 28 District Bao'an District Shenzhen, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,
Bao'an District, Shenzhen, China

Date of Test: Jan. 25, 2021 ~Apr. 09, 2021

Date of Report: Apr. 09, 2021

Report Number: HK2101250270-3E



TEST RESULT CERTIFICATION

Applicant's name : Videostrong Technology Co.,Ltd
Address..... : 604, Lushi industrial Building, 28 District Bao'an District
Shenzhen, China

Manufacture's Name : Videostrong Technology Co.,Ltd
Address..... : 604, Lushi industrial Building, 28 District Bao'an District
Shenzhen, China

Product description

Trade Mark: MECOOL
Product name.....: NOW
Model and/or type reference : KA2, KA1, KA1 PRO, KA2 PRO, KA3, KA3 PRO, KA5, KA5
PRO, KA6
Standards.....: FCC Rules and Regulations Part 15 Subpart E Section 15.407
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Date of Test:
Date (s) of performance of tests.....: Jan. 25, 2021 ~Apr. 09, 2021
Date of Issue: Apr. 09, 2021
Test Result.....: Pass

Testing Engineer : *Gary Qian*

(Gary Qian)

Technical Manager : *Eden Hu*

Authorized Signatory : 

(Jason Zhou)



TABLE OF CONTENTS

| | |
|--|------------|
| 1. TEST RESULT SUMMARY | 5 |
| 1.1. TEST PROCEDURES AND RESULTS..... | 5 |
| 1.2. TEST FACILITY | 5 |
| 1.3. MEASUREMENT UNCERTAINTY | 6 |
| 2. EUT DESCRIPTION | 7 |
| 2.1. GENERAL DESCRIPTION OF EUT | 7 |
| 2.2. OPERATION FREQUENCY EACH OF CHANNEL | 8 |
| 2.3. OPERATION OF EUT DURING TESTING..... | 8 |
| 2.4. DESCRIPTION OF TEST SETUP | 9 |
| 3. GENERA INFORMATION | 10 |
| 3.1. TEST ENVIRONMENT AND MODE | 10 |
| 3.2. DESCRIPTION OF SUPPORT UNITS | 11 |
| 4. TEST RESULTS AND MEASUREMENT DATA | 12 |
| 4.1. CONDUCTED EMISSION | 12 |
| 4.2. MAXIMUM CONDUCTED OUTPUT POWER..... | 16 |
| 4.3. 6DB EMISSION BANDWIDTH..... | 19 |
| 4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH | 32 |
| 4.5. POWER SPECTRAL DENSITY | 33 |
| 4.6. BAND EDGE | 47 |
| 4.7. SPURIOUS EMISSION | 84 |
| 4.8. FREQUENCY STABILITY MEASUREMENT | 102 |
| 4.9. ANTENNA REQUIREMENT | 104 |
| 5. PHOTOGRAPHS OF TEST SETUP..... | 105 |
| 6. PHOTOS OF THE EUT | 107 |



**** Modified History ****

| Revision | Description | Issued Data | Remark |
|-----------------|-----------------------------|--------------------|---------------|
| Revision 1.0 | Initial Test Report Release | Apr. 09, 2021 | Jason Zhou |
| | | | |
| | | | |



1. TEST RESULT SUMMARY

1.1. TEST PROCEDURES AND RESULTS

| Requirement | CFR 47 Section | Result |
|--|--------------------------|--------|
| Antenna requirement | §15.203 | PASS |
| AC Power Line Conducted Emission | §15.207 | PASS |
| Maximum Conducted Output Power | §15.407(a) | PASS |
| 6dB Emission Bandwidth | §15.407(e) | PASS |
| 26dB Emission Bandwidth & 99% Occupied Bandwidth | §15.407(a) | N/A |
| Power Spectral Density | §15.407(a) | PASS |
| Band edge | §15.407(b)/15.209/15.205 | PASS |
| Radiated Emission | §15.407(b)/15.209/15.205 | PASS |
| Frequency Stability | §15.407(g) | PASS |

Note:

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen, China



1.3. MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

| No. | Item | MU |
|-----|-------------------------------|-------------------------|
| 1 | Conducted Emission | $\pm 2.71\text{dB}$ |
| 2 | RF power, conducted | $\pm 0.37\text{dB}$ |
| 3 | Spurious emissions, conducted | $\pm 0.11\text{dB}$ |
| 4 | All emissions, radiated(<1G) | $\pm 3.90\text{dB}$ |
| 5 | All emissions, radiated(>1G) | $\pm 4.28\text{dB}$ |
| 6 | Temperature | $\pm 0.1^\circ\text{C}$ |
| 7 | Humidity | $\pm 1.0\%$ |



2. EUT DESCRIPTION

2.1. GENERAL DESCRIPTION OF EUT

| | |
|------------------------|--|
| Equipment | NOW |
| Model Name | KA2 |
| Serial No. | KA1, KA1 PRO, KA2 PRO, KA3, KA3 PRO, KA5, KA5 PRO, KA6 |
| Trade Mark | MECOOL |
| Model Difference | All model's the function, software and electric circuit are the same, only with a product color, appearance and model named different. Test sample model: KA2. |
| FCC ID | 2AGKB-KA2 |
| Operation Frequency: | IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz |
| Modulation Technology: | IEEE 802.11a/n/ac |
| Modulation Type | CCK/OFDM/DBPSK/DAPSK |
| Antenna Type | Internal Antenna |
| Antenna Gain | Antenna 1:3dBi Antenna 2:3dBi MIMO: 6.01dBi |
| Power Source | 5V, 2A From Adapter with AC100-240V, 50/60Hz, 0.35A |
| Power Supply: | 5V, 2A From Adapter with AC100-240V, 50/60Hz, 0.35A |
| Note: | The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2R), two transmit signals are completely correlated, then, Direction gain=GANT + Array Gain(Array Gain=10 log(2) dB for power spectral density; Array Gain =0 for power measurement). |



2.2. OPERATION FREQUENCY EACH OF CHANNEL

| 802.11a/802.11n(HT20) 802.11ac(HT20) | | 802.11n(HT40)/ 802.11ac(HT40) | | 802.11ac(HT80) | |
|---|-----------|----------------------------------|-----------|----------------|-----------|
| Channel | Frequency | Channel | Frequency | Channel | Frequency |
| 149 | 5745 | 151 | 5755 | 155 | 5775 |
| 153 | 5765 | 159 | 5790 | | |
| 157 | 5785 | | | | |
| 161 | 5805 | | | | |
| 165 | 5825 | | | | |

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

2.3. OPERATION OF EUT DURING TESTING

| Band IV (5725 - 5850 MHz) | | |
|-------------------------------|---------|-----------------|
| For 802.11a/n (HT20)/ac(HT20) | | |
| Channel Number | Channel | Frequency (MHz) |
| 149 | Low | 5745 |
| 157 | Mid | 5785 |
| 165 | High | 5825 |


| For 802.11n (HT40)/ ac(HT40) | | |
|------------------------------|---------|-----------------|
| Channel Number | Channel | Frequency (MHz) |
| 151 | Low | 5755 |
| 159 | High | 5795 |

| For 802.11ac(HT80) | | |
|--------------------|---------|-----------------|
| Channel Number | Channel | Frequency (MHz) |
| 155 | / | 5775 |




2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and radiation below 1GHz testing:

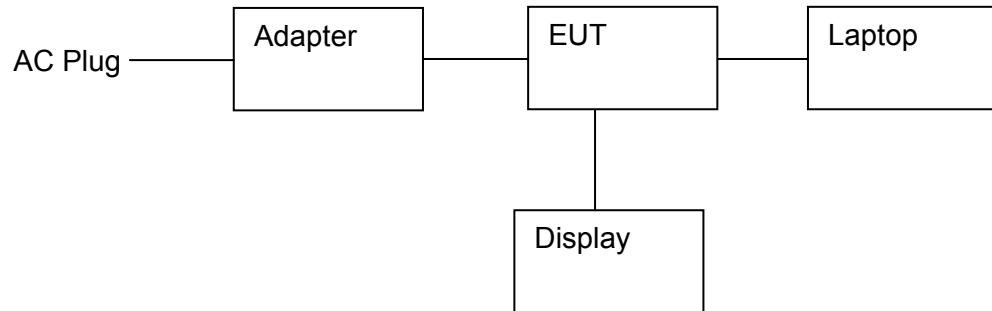

Operation of EUT during radiation above 1GHz testing:



Adapter information

Model: TEKA012-0502000UK

Input: 100-240V, 50-60Hz, 0.35A

Output: 5V, 2A

Laptop information

Model: ThinkPad X220i

Input: 20V, 3.25A/4.5A

Display information

Model: 280LM00004

The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. The worst case is X position.



3. GENERA INFORMATION

3.1. TEST ENVIRONMENT AND MODE

| Operating Environment: | |
|---|--|
| Temperature: | 25.0 °C |
| Humidity: | 56 % RH |
| Atmospheric Pressure: | 1010 mbar |
| Test Mode: | |
| Engineering mode: | Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%) |
| <p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p> | |

| <p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p> | |
|---|---|
| Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case. | |
| Mode | Data rate |
| 802.11a | 6 Mbps |
| 802.11n(HT20) | MCS0 |
| 802.11n(HT40) | MCS0 |
| 802.11ac(HT20)/ac(HT40)/ac(HT80) | MCS0 |
| Final Test Mode: | |
| Operation mode: | Keep the EUT in continuous transmitting with modulation |



3.2. DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Equipment | Model No. | Serial No. | FCC ID | Trade Name |
|-----------|-----------|------------|--------|------------|
| / | / | / | / | / |

Note:

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



4. TEST RESULTS AND MEASUREMENT DATA

4.1. CONDUCTED EMISSION

4.1.1. Test Specification

| Test Requirement: | FCC Part15 C Section 15.207 | | | | | | | | | | | | | | |
|--------------------------|---|-----------------------|--------------|--|------------|---------|----------|-----------|-----------|-------|----|----|------|----|----|
| Test Method: | ANSI C63.10:2013 | | | | | | | | | | | | | | |
| Frequency Range: | 150 kHz to 30 MHz | | | | | | | | | | | | | | |
| Receiver setup: | RBW=9 kHz, VBW=30 kHz, Sweep time=auto | | | | | | | | | | | | | | |
| Limits: | <table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> | Frequency range (MHz) | Limit (dBuV) | | Quasi-peak | Average | 0.15-0.5 | 66 to 56* | 56 to 46* | 0.5-5 | 56 | 46 | 5-30 | 60 | 50 |
| Frequency range (MHz) | Limit (dBuV) | | | | | | | | | | | | | | |
| | Quasi-peak | Average | | | | | | | | | | | | | |
| 0.15-0.5 | 66 to 56* | 56 to 46* | | | | | | | | | | | | | |
| 0.5-5 | 56 | 46 | | | | | | | | | | | | | |
| 5-30 | 60 | 50 | | | | | | | | | | | | | |
| Test Setup: | <p>The diagram illustrates the test setup. A horizontal line at the top represents the 'Reference Plane'. Below it, on the left, is a box labeled 'E.U.T' (Equipment Under Test) connected to 'AC power'. This setup is on a 'Test table/Insulation plane'. A vertical double-headed arrow indicates a distance of 40cm from the top of the E.U.T to the Reference Plane. To the right, another 'AC power' source is connected to a 'Filter', which is then connected to a 'LISN' (Line Impedance Stabilization Network). The LISN is connected to the E.U.T. A vertical line connects the LISN to an 'EMI Receiver'. A distance of 80cm is indicated between the LISN and the Reference Plane.</p> <p><i>Remark</i> E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</p> | | | | | | | | | | | | | | |
| Test Mode: | Tx Mode | | | | | | | | | | | | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment. 2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs). 3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement. | | | | | | | | | | | | | | |
| Test Result: | PASS | | | | | | | | | | | | | | |



4.1.2. Test Instruments

| Conducted Emission Shielding Room Test Site (843) | | | | | |
|---|--------------|--------------------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Receiver | R&S | ESCI 7 | HKE-010 | Jun. 18, 2020 | Jun. 17, 2021 |
| LISN | R&S | ENV216 | HKE-002 | Jun. 18, 2020 | Jun. 17, 2021 |
| Coax cable (9KHz-30MHz) | Times | 381806-002 | N/A | Jun. 18, 2020 | Jun. 17, 2021 |
| Conducted test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-081 | N/A | N/A |


Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.1.3. Test data

All the test modes completed for test. only the worst result was reported as below:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

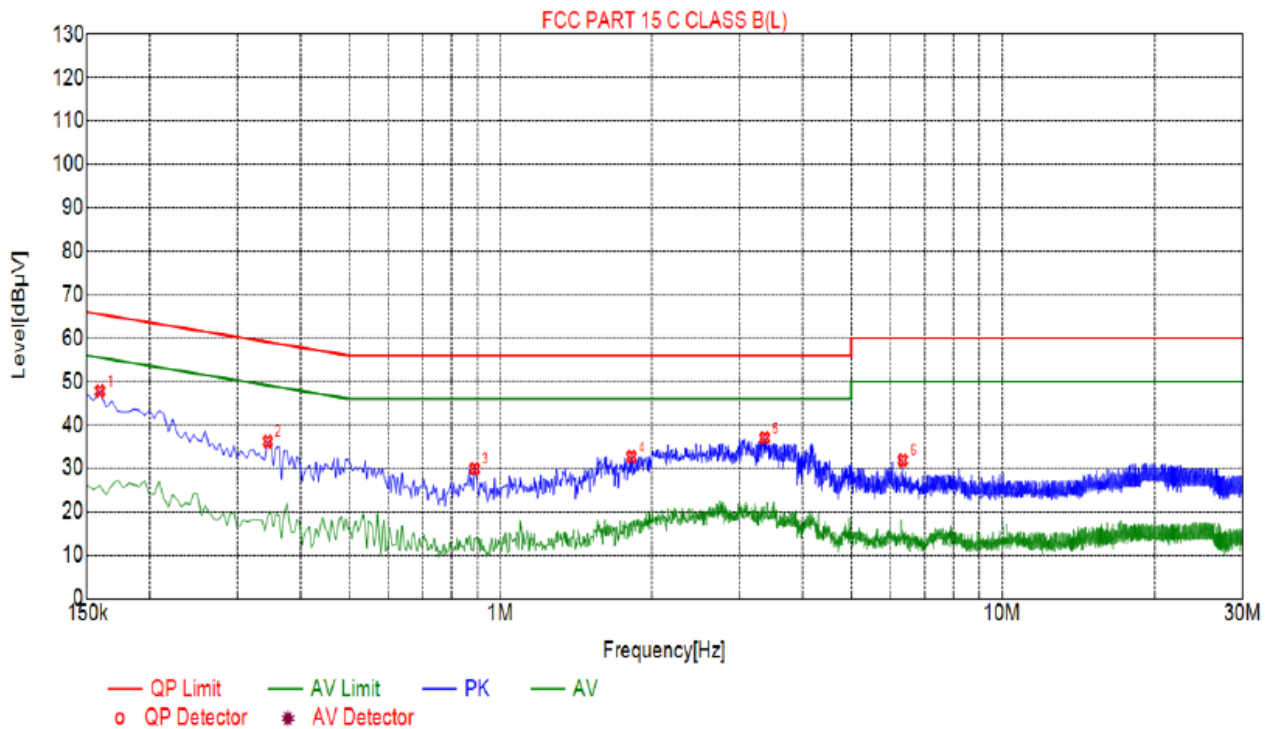


| Suspected List | | | | | | | | |
|----------------|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| NO. | Freq. [MHz] | Level [dBµV] | Factor [dB] | Limit [dBµV] | Margin [dB] | Reading [dBµV] | Detector | Type |
| 1 | 0.1590 | 47.81 | 20.01 | 65.52 | 17.71 | 27.80 | PK | L |
| 2 | 0.3435 | 36.17 | 20.03 | 59.12 | 22.95 | 16.14 | PK | L |
| 3 | 0.8880 | 29.84 | 20.06 | 56.00 | 26.16 | 9.78 | PK | L |
| 4 | 1.8240 | 32.65 | 20.14 | 56.00 | 23.35 | 12.51 | PK | L |
| 5 | 3.3630 | 36.97 | 20.24 | 56.00 | 19.03 | 16.73 | PK | L |
| 6 | 6.3465 | 31.85 | 20.22 | 60.00 | 28.15 | 11.63 | PK | L |

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

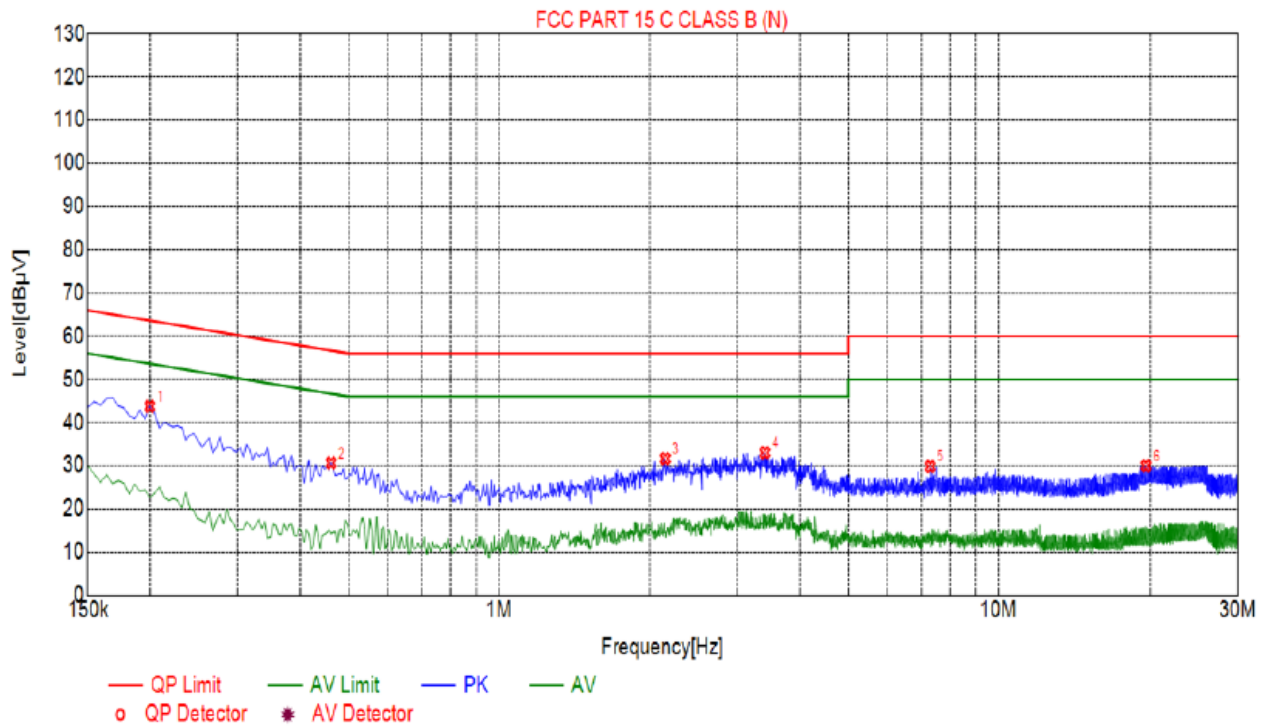

| Suspected List | | | | | | | | |
|----------------|-------------|--------------|-------------|--------------|-------------|----------------|----------|------|
| NO. | Freq. [MHz] | Level [dBµV] | Factor [dB] | Limit [dBµV] | Margin [dB] | Reading [dBµV] | Detector | Type |
| 1 | 0.1995 | 43.74 | 20.03 | 63.63 | 19.89 | 23.71 | PK | N |
| 2 | 0.4605 | 30.62 | 20.04 | 56.68 | 26.06 | 10.58 | PK | N |
| 3 | 2.1525 | 31.62 | 20.16 | 56.00 | 24.38 | 11.46 | PK | N |
| 4 | 3.4080 | 32.99 | 20.24 | 56.00 | 23.01 | 12.75 | PK | N |
| 5 | 7.3050 | 29.82 | 20.18 | 60.00 | 30.18 | 9.64 | PK | N |
| 6 | 19.6260 | 29.98 | 20.09 | 60.00 | 30.02 | 9.89 | PK | N |

Remark: Margin = Limit – Level
 Correction factor = Cable lose + LISN insertion loss
 Level=Test receiver reading + correction factor



4.2. MAXIMUM CONDUCTED OUTPUT POWER

4.2.1. Test Specification

| Test Requirement: | FCC Part15 E Section 15.407(a) | | | | |
|--------------------------|--|----------------------|-------|-----------|-----|
| Test Method: | KDB789033 D02 General UNII Test Procedures New Rules v02.r01 Section E | | | | |
| Limit: | <table border="1"> <thead> <tr> <th>Frequency Band (MHz)</th> <th>Limit</th> </tr> </thead> <tbody> <tr> <td>5725-5850</td> <td>1 W</td> </tr> </tbody> </table> | Frequency Band (MHz) | Limit | 5725-5850 | 1 W |
| | Frequency Band (MHz) | Limit | | | |
| 5725-5850 | 1 W | | | | |
| Test Setup: | <p>The diagram shows a green Power meter on the left, connected by a grey cable to a small white attenuator box in the middle, which is then connected by another grey cable to a yellow EUT on the right.</p> | | | | |
| Test Mode: | Transmitting mode with modulation | | | | |
| Test Procedure: | <ol style="list-style-type: none"> 1. The testing follows the Measurement Procedure of KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section E, 3, a. 2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement. 3. Set to the maximum power setting and enable the EUT transmit continuously. 5. Measure the conducted output power and record the results in the test report. | | | | |
| Test Result: | PASS | | | | |
| Remark: | <p>Conducted output power= measurement power +10log(1/x) X is duty cycle=1, so 10log(1/1)=0</p> <p>Conducted output power= measurement power</p> | | | | |



4.2.2. Test Instruments

| RF Test Room | | | | | |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| Power meter | Agilent | E4419B | HKE-085 | Jun. 18, 2020 | Jun. 17, 2021 |
| Power Sensor | Agilent | E9300A | HKE-086 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.2.3. Test Data

| Configuration Band IV (5725 - 5850 MHz) | | | | | |
|--|--------------|--------------------------------------|----------------|-----------------|--------|
| Mode | Test channel | Maximum Conducted Output Power (dBm) | | FCC Limit (dBm) | Result |
| | | Antenna port 1 | Antenna port 2 | | |
| 11a | CH149 | 11.37 | 10.23 | 30 | PASS |
| 11a | CH157 | 10.19 | 10.17 | 30 | PASS |
| 11a | CH165 | 10.52 | 11.42 | 30 | PASS |
| 11n(HT20) | CH149 | 10.28 | 10.08 | 30 | PASS |
| 11n(HT20) | CH157 | 10.19 | 9.96 | 30 | PASS |
| 11n(HT20) | CH165 | 9.35 | 10.35 | 30 | PASS |
| 11n(HT40) | CH151 | 9.37 | 9.42 | 30 | PASS |
| 11n(HT40) | CH159 | 8.05 | 10.17 | 30 | PASS |
| 11ac(HT20) | CH149 | 10.12 | 10.18 | 30 | PASS |
| 11ac(HT20) | CH157 | 9.89 | 9.97 | 30 | PASS |
| 11ac(HT20) | CH165 | 9.23 | 10.38 | 30 | PASS |
| 11ac(HT40) | CH151 | 8.41 | 8.39 | 30 | PASS |
| 11ac(HT40) | CH159 | 10.07 | 10.12 | 30 | PASS |
| 11ac(HT80) | CH155 | 9.75 | 10.25 | 30 | PASS |

| Configuration Band IV (5725 - 5850 MHz) | | | | |
|--|--------------|--------------------------------------|-----------------|--------|
| Mode | Test channel | Maximum Conducted Output Power (dBm) | FCC Limit (dBm) | Result |
| | | MIMO | | |
| 11n(HT20) | CH149 | 13.19 | 30 | PASS |
| 11n(HT20) | CH157 | 13.09 | 30 | PASS |
| 11n(HT20) | CH165 | 12.89 | 30 | PASS |
| 11n(HT40) | CH151 | 12.41 | 30 | PASS |
| 11n(HT40) | CH159 | 12.25 | 30 | PASS |
| 11ac(HT20) | CH149 | 13.16 | 30 | PASS |
| 11ac(HT20) | CH157 | 12.94 | 30 | PASS |
| 11ac(HT20) | CH165 | 12.85 | 30 | PASS |
| 11ac(HT40) | CH151 | 11.41 | 30 | PASS |
| 11ac(HT40) | CH159 | 13.11 | 30 | PASS |
| 11ac(HT80) | CH155 | 13.02 | 30 | PASS |



4.3.3. Test data

ANT 1

| Band IV (5725 - 5850 MHz) | | | | | |
|----------------------------|--------------|-----------------|----------------------|-------------|--------|
| Mode | Test channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit (MHz) | Result |
| 11a | CH149 | 5745 | 16.36 | 0.5 | PASS |
| 11a | CH157 | 5785 | 16.38 | 0.5 | PASS |
| 11a | CH165 | 5825 | 16.37 | 0.5 | PASS |
| 11n(HT20) | CH149 | 5745 | 17.56 | 0.5 | PASS |
| 11n(HT20) | CH157 | 5785 | 17.59 | 0.5 | PASS |
| 11n(HT20) | CH165 | 5825 | 17.57 | 0.5 | PASS |
| 11n(HT40) | CH151 | 5755 | 35.24 | 0.5 | PASS |
| 11n(HT40) | CH159 | 5795 | 35.16 | 0.5 | PASS |
| 11ac(HT20) | CH149 | 5745 | 17.59 | 0.5 | PASS |
| 11ac(HT20) | CH157 | 5785 | 17.08 | 0.5 | PASS |
| 11ac(HT20) | CH165 | 5825 | 17.04 | 0.5 | PASS |
| 11ac(HT40) | CH151 | 5755 | 35.21 | 0.5 | PASS |
| 11ac(HT40) | CH159 | 5795 | 33.85 | 0.5 | PASS |
| 11ac(HT80) | CH155 | 5775 | 75.09 | 0.5 | PASS |

Test plots as follows:



Band IV (5725 – 5850 MHz)

802.11a



Low



Mid



High




802.11n(HT20)



Low




Mid

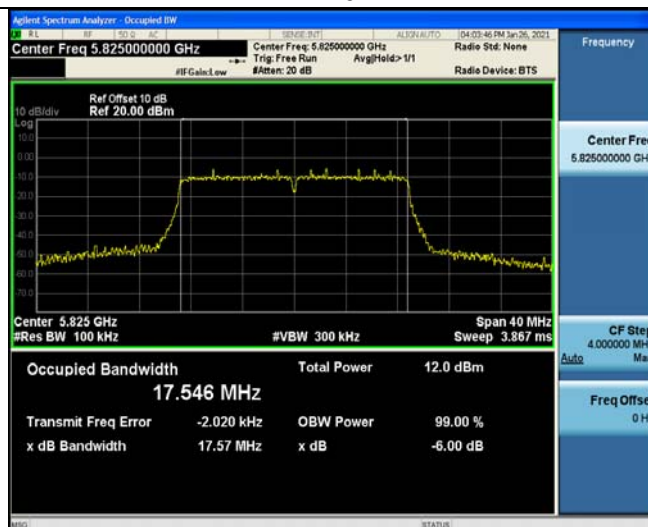

High



802.11n(HT40)

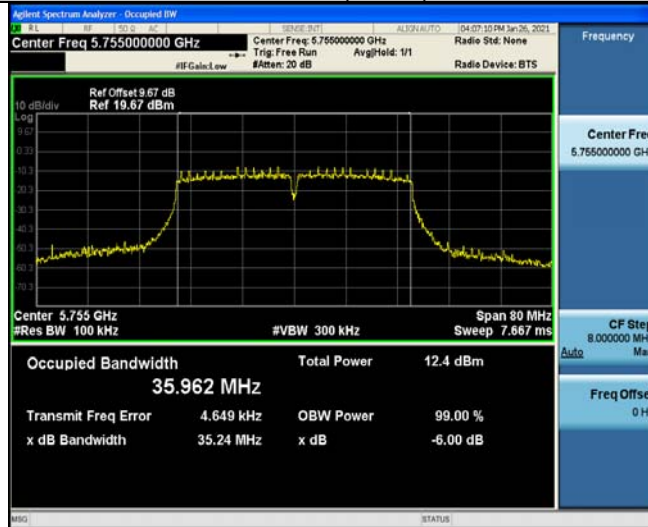


Low



High


802.11ac(HT20)

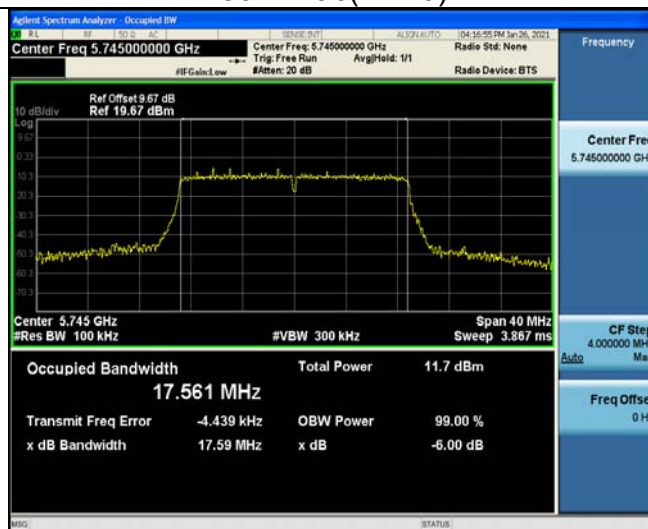

Low



Mid

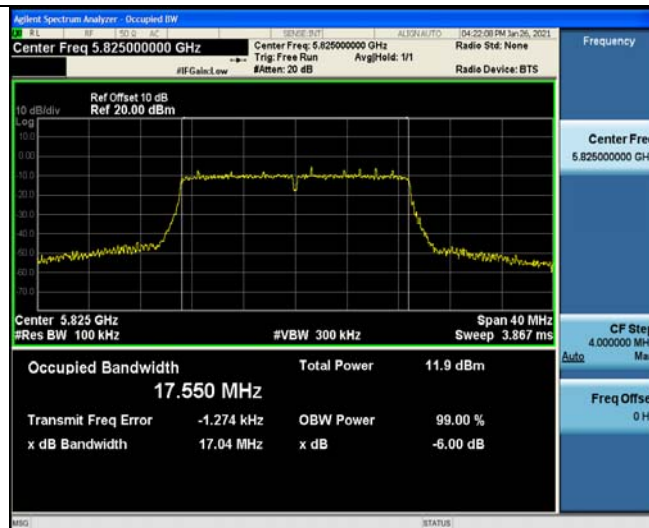

High

802.11ac(HT40)



Low



High



802.11ac(HT80)

**ANT 2**


| Band IV (5725 - 5850 MHz) | | | | | |
|-----------------------------------|--------------|-----------------|----------------------|-------------|--------|
| Mode | Test channel | Frequency (MHz) | 6 dB Bandwidth (MHz) | Limit (MHz) | Result |
| 11a | CH149 | 5745 | 16.35 | 0.5 | PASS |
| 11a | CH157 | 5785 | 16.35 | 0.5 | PASS |
| 11a | CH161 | 5825 | 16.37 | 0.5 | PASS |
| 11n(HT20) | CH149 | 5745 | 17.61 | 0.5 | PASS |
| 11n(HT20) | CH157 | 5785 | 17.32 | 0.5 | PASS |
| 11n(HT20) | CH161 | 5825 | 17.34 | 0.5 | PASS |
| 11n(HT40) | CH151 | 5755 | 35.24 | 0.5 | PASS |
| 11n(HT40) | CH159 | 5795 | 35.22 | 0.5 | PASS |
| 11ac(HT20) | CH149 | 5745 | 17.60 | 0.5 | PASS |
| 11ac(HT20) | CH157 | 5785 | 17.56 | 0.5 | PASS |
| 11ac(HT20) | CH165 | 5825 | 17.57 | 0.5 | PASS |
| 11ac(HT40) | CH151 | 5755 | 35.25 | 0.5 | PASS |
| 11ac(HT40) | CH159 | 5795 | 35.27 | 0.5 | PASS |
| 11ac(HT80) | CH155 | 5755 | 75.27 | 0.5 | PASS |

Test plots as follows:



Band IV (5725 – 5850 MHz)


802.11a

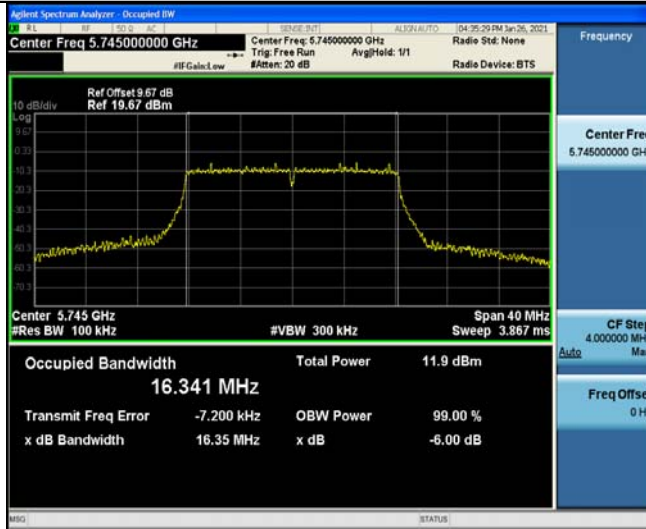

Low



Mid

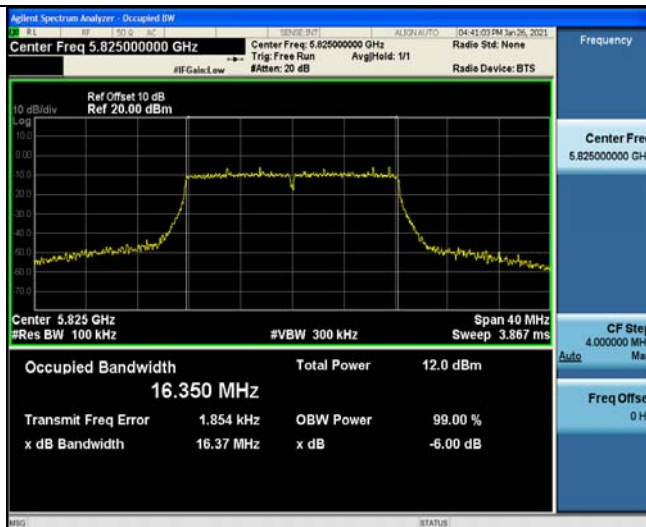

High




802.11n(HT20)



Low




Mid

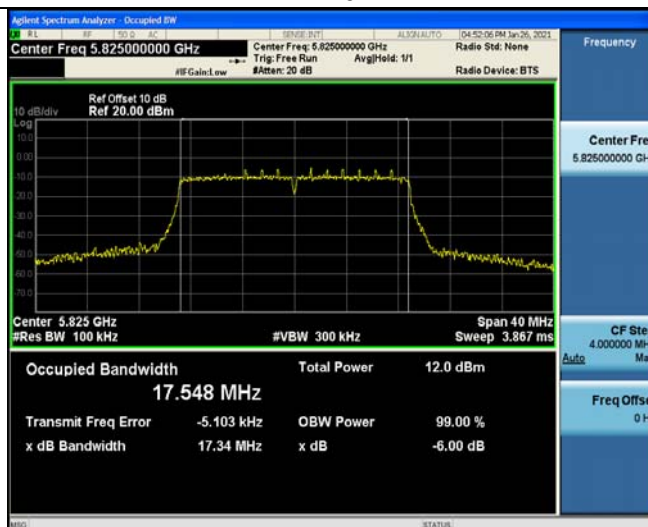

High



802.11n(HT40)

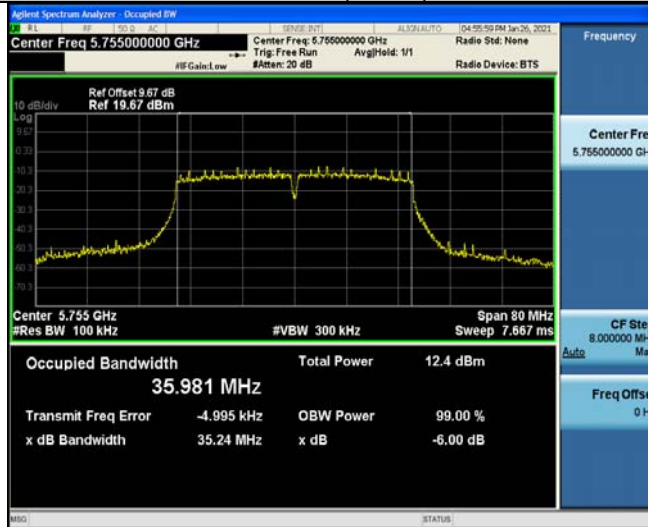


Low




High

802.11ac(HT20)

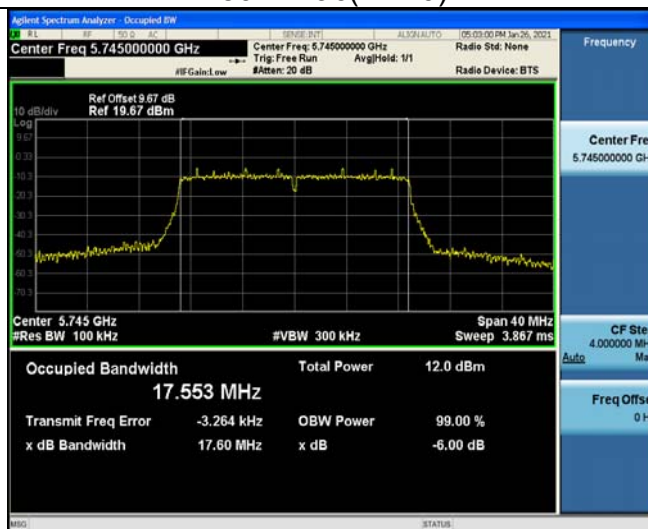

Low

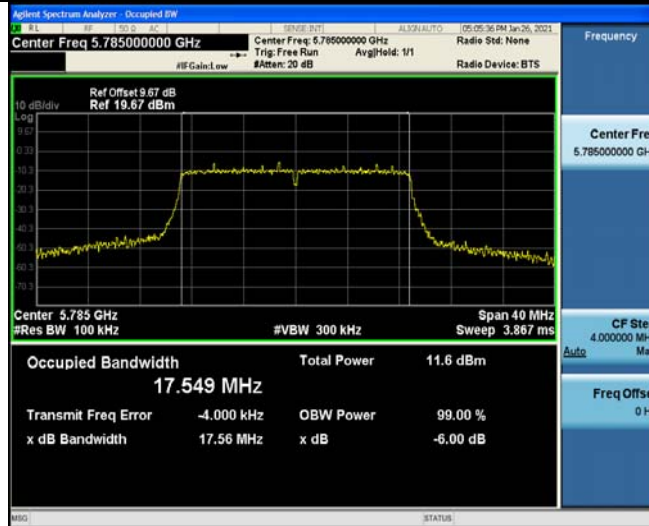

Mid




High


802.11ac(HT40)



Low

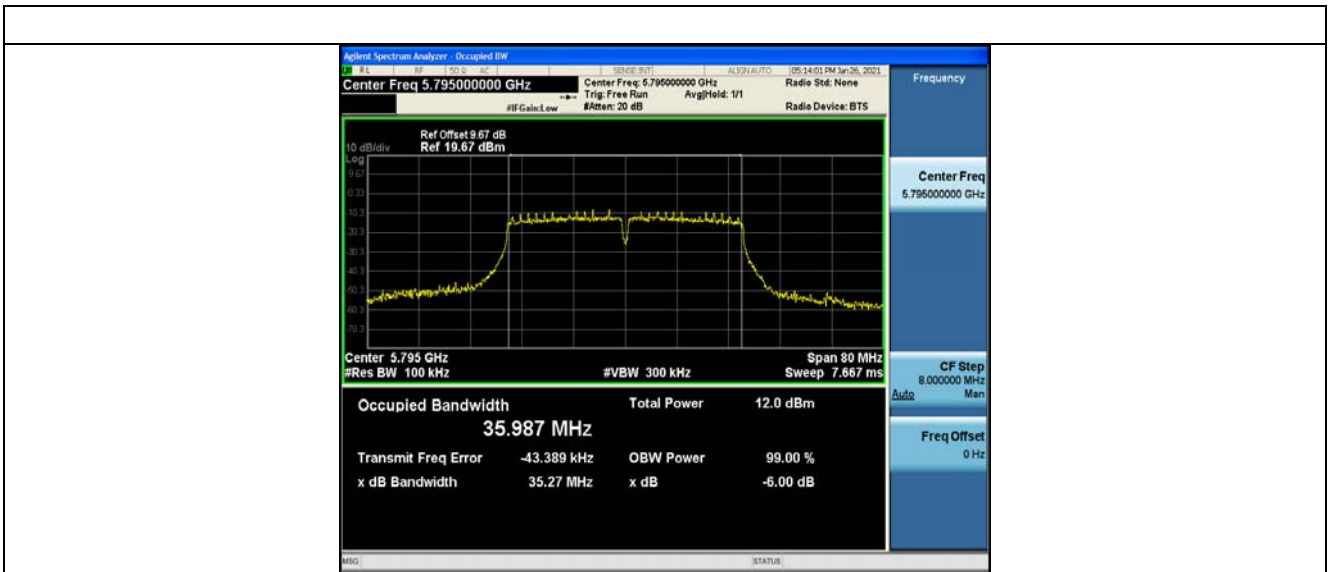


High
802.11ac(HT80)

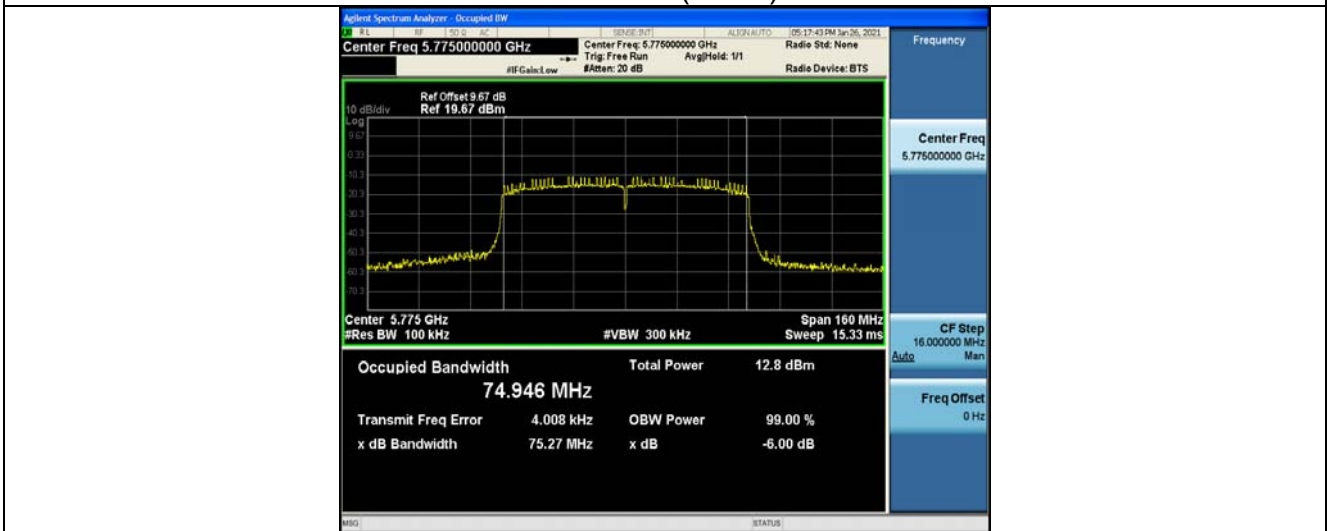



4.4. 26DB BANDWIDTH AND 99% OCCUPIED BANDWIDTH

4.4.1. Test Specification

| | |
|--------------------------|--|
| Test Requirement: | 47 CFR Part 15C Section 15.407 (a) |
| Test Method: | KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C |
| Limit: | No restriction limits |
| Test Setup: |  <p style="text-align: center;">Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section C. 2. Set to the maximum power setting and enable the EUT transmit continuously. 3. Make the measurement with the spectrum analyzer's resolution bandwidth $RBW = 1\% EBW$, $VBW \geq 3RBW$, In order to make an accurate measurement. 4. Measure and record the results in the test report. |
| Test Result: | N/A |

4.4.2. Test Instruments

| RF Test Room | | | | | |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).


4.4.3. Test Result

N/A



4.5. POWER SPECTRAL DENSITY

4.5.1. Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 E Section 15.407 (a) |
| Test Method: | KDB789033 D02 General UNII Test Procedures New Rules v02r01 Section F |
| Limit: | ≤30.00dBm/500KHz for Band IV 5725MHz-5850MHz |
| Test Setup: |  <p style="text-align: center;">Spectrum Analyzer EUT</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. Set the spectrum analyzer or EMI receiver span to view the entire emission bandwidth. 1. Set RBW = 510KHz, VBW ≥ 3*RBW, Sweep time = Auto, Detector = RMS. 2. Allow the sweeps to continue until the trace stabilizes. 3. Use the peak marker function to determine the maximum amplitude level. 4. The E.I.R.P spectral density used radiated test method. At a test site that has been validated using the procedures of ANSI C63.4 or the latest CISPR 16-1-4 for measurements above 1 GHz, so as to simulate a near free-space environment. |
| Test Result: | PASS |

4.5.2. Test Instruments

| RF Test Room | | | | | |
|---------------------------|--------------|----------|---------------|------------------|-----------------|
| Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF automatic control unit | Tonscend | JS0806-2 | HKE-060 | Jun. 18, 2020 | Jun. 17, 2021 |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.5.3. Test data

ANT 1

| Mode | Test channel | Level [dBm/510kHz] | $10\log(500/510)$ | Power Spectral Density(dBm/500kHz) | Limit (dBm/500kHz) | Result |
|------------|--------------|--------------------|-------------------|------------------------------------|--------------------|--------|
| 11a | CH149 | -2.59 | -0.086 | -2.676 | 30 | PASS |
| 11a | CH157 | -2.04 | -0.086 | -2.126 | 30 | PASS |
| 11a | CH161 | -1.79 | -0.086 | -1.876 | 30 | PASS |
| 11n(HT20) | CH149 | -2.61 | -0.086 | -2.696 | 30 | PASS |
| 11n(HT20) | CH157 | -2.87 | -0.086 | -2.956 | 30 | PASS |
| 11n(HT20) | CH161 | -2.47 | -0.086 | -2.556 | 30 | PASS |
| 11n(HT40) | CH151 | -4.89 | -0.086 | -4.976 | 30 | PASS |
| 11n(HT40) | CH159 | -6.04 | -0.086 | -6.126 | 30 | PASS |
| 11ac(HT20) | CH149 | -2.49 | -0.086 | -2.576 | 30 | PASS |
| 11ac(HT20) | CH157 | -2.80 | -0.086 | -2.886 | 30 | PASS |
| 11ac(HT20) | CH161 | -2.42 | -0.086 | -2.506 | 30 | PASS |
| 11ac(HT40) | CH151 | -5.41 | -0.086 | -5.496 | 30 | PASS |
| 11ac(HT40) | CH159 | -5.47 | -0.086 | -5.556 | 30 | PASS |
| 11ac(HT80) | CH155 | -8.08 | -0.086 | -8.166 | 30 | PASS |

Test plots as follows:



Band IV (5725 – 5850 MHz)

802.11a



Low



Mid



High



802.11n(HT20)



Low



Mid



High



802.11n(HT40)



Low



High

802.11ac(HT20)



Low



Mid



High

802.11ac(HT40)



Low



High
802.11ac(HT80)





ANT 2

| Configuration Band IV (5725 - 5850 MHz) | | | | | | |
|--|--------------|--------------------|-------------------|------------------------------------|--------------------|--------|
| Mode | Test channel | Level [dBm/510kHz] | $10\log(500/510)$ | Power Spectral Density(dBm/500kHz) | Limit (dBm/500kHz) | Result |
| 11a | CH149 | -1.99 | -0.086 | -2.076 | 30 | PASS |
| 11a | CH157 | -2.30 | -0.086 | -2.386 | 30 | PASS |
| 11a | CH161 | -1.95 | -0.086 | -2.036 | 30 | PASS |
| 11n(HT20) | CH149 | -1.57 | -0.086 | -1.656 | 30 | PASS |
| 11n(HT20) | CH157 | -2.66 | -0.086 | -2.746 | 30 | PASS |
| 11n(HT20) | CH161 | -1.93 | -0.086 | -2.016 | 30 | PASS |
| 11n(HT40) | CH151 | -4.92 | -0.086 | -5.006 | 30 | PASS |
| 11n(HT40) | CH159 | -5.19 | -0.086 | -5.276 | 30 | PASS |
| 11ac(HT20) | CH149 | -2.72 | -0.086 | -2.806 | 30 | PASS |
| 11ac(HT20) | CH157 | -1.81 | -0.086 | -1.896 | 30 | PASS |
| 11ac(HT20) | CH161 | -1.66 | -0.086 | -1.746 | 30 | PASS |
| 11ac(HT40) | CH151 | -5.00 | -0.086 | -5.086 | 30 | PASS |
| 11ac(HT40) | CH159 | -5.44 | -0.086 | -5.526 | 30 | PASS |
| 11ac(HT80) | CH155 | -7.52 | -0.086 | -7.606 | 30 | PASS |

Test plots as follows:



Band IV (5725 – 5850 MHz)

802.11a



Low



Mid



High



802.11n(HT20)



Low



Mid



High



802.11n(HT40)



Low



High

802.11ac(HT20)



Low



Mid



High

802.11ac(HT40)



Low



High
802.11ac(T80)





For MIMO antenna port 1+antenna port 2

| Configuration Band IV (5725 - 5850 MHz) | | | | |
|--|--------------|----------------------------|--------------------|--------|
| Mode | Test channel | Power Density (dBm/500KHz) | Limit (dBm/500KHz) | Result |
| 11n(HT20) | CH149 | 0.87 | 29.99 | PASS |
| 11n(HT20) | CH157 | 0.16 | 29.99 | PASS |
| 11n(HT20) | CH161 | 0.73 | 29.99 | PASS |
| 11n(HT40) | CH151 | -1.98 | 29.99 | PASS |
| 11n(HT40) | CH159 | -2.67 | 29.99 | PASS |
| 11ac(HT20) | CH149 | 0.32 | 29.99 | PASS |
| 11ac(HT20) | CH157 | 0.65 | 29.99 | PASS |
| 11ac(HT20) | CH161 | 0.90 | 29.99 | PASS |
| 11ac(HT40) | CH151 | -2.28 | 29.99 | PASS |
| 11ac(HT40) | CH159 | -2.53 | 29.99 | PASS |
| 11ac(HT80) | CH155 | -4.87 | 29.99 | PASS |

Note: 1 According to KDB 662911, Result power = $10\log(10^{(ant1/10)}+10^{(ant2/10)})$.
2 Result unit: W, The end result is converted to units of dBm.

Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n/ac for MIMO mode, not support 802.11 a for MIMO mode.



4.6. BAND EDGE

4.6.1. Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC CFR47 Part 15E Section 15.407 |
| Test Method: | ANSI C63.10 2013 |
| Limit: | <p>(1) For transmitters operating in the 5.725-5.85 GHz band: (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge. The limit of frequency below 1GHz and which fall in restricted bands should complies 15.209.</p> |
| Test Setup: | <p>The diagram illustrates the test setup. An EUT (Equipment Under Test) is placed on a turn table that is 1.5 meters high. The turn table is positioned 3 meters away from an antenna tower. The antenna tower is 1-4 meters high. The antenna is mounted on the tower, and its feed point is labeled. The antenna is connected to a receiver and an amplifier (Amp.) on the ground plane. The ground plane is indicated by a horizontal line at the bottom of the diagram.</p> |
| Test Mode: | Transmitting mode with modulation |
| Test Procedure: | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be |



| | |
|---------------------|---|
| | stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet. |
| Test Result: | PASS |



4.6.2. Test Instruments

| Radiated Emission Test Site (966) | | | | | |
|-----------------------------------|--------------|--------------------|---------------|------------------|-----------------|
| Name of Equipment | Manufacturer | Model | Serial Number | Calibration Date | Calibration Due |
| Receiver | R&S | ESRP3 | HKE-005 | Jun. 18, 2020 | Jun. 17, 2021 |
| Spectrum analyzer | Agilent | N9020A | HKE-048 | Jun. 18, 2020 | Jun. 17, 2021 |
| Preamplifier | EMCI | EMC051845S E | HKE-015 | Jun. 18, 2020 | Jun. 17, 2021 |
| Preamplifier | Agilent | 83051A | HKE-016 | Jun. 18, 2020 | Jun. 17, 2021 |
| Loop antenna | Schwarzbeck | FMZB 1519 B | HKE-014 | Jun. 18, 2020 | Jun. 17, 2021 |
| Broadband antenna | Schwarzbeck | VULB 9163 | HKE-012 | Jun. 18, 2020 | Jun. 17, 2021 |
| Horn antenna | Schwarzbeck | 9120D | HKE-013 | Jun. 18, 2020 | Jun. 17, 2021 |
| Antenna Mast | Keleto | CC-A-4M | N/A | N/A | N/A |
| Position controller | Taiwan MF | MF7802 | HKE-011 | Jun. 18, 2020 | Jun. 17, 2021 |
| Radiated test software | Tonscend | TS+ Rev 2.5.0.0 | HKE-082 | N/A | N/A |
| RF cable (9KHz-1GHz) | Times | 381806-001 | N/A | N/A | N/A |
| Hf antenna | Schwarzbeck | LB-180400-KF | HKE-031 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Tonscend | 1-18G | HKE-099 | Jun. 18, 2020 | Jun. 17, 2021 |
| RF cable | Times | 1-40G | HKE-034 | Jun. 18, 2020 | Jun. 17, 2021 |
| Horn Antenna | Schwarzbeck | BBHA 9170 | HKE-017 | Jun. 18, 2020 | Jun. 17, 2021 |
| Spectrum analyzer | R&S | FSP40 | HKE-025 | Jun. 18, 2020 | Jun. 17, 2021 |

Note: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



4.6.3. Test Data

ANT 1

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 55.95 | -2.06 | 53.89 | 68.2 | -14.31 | peak |
| 5700 | 87.86 | -1.96 | 85.9 | 105.2 | -19.3 | peak |
| 5720 | 91.47 | -2.87 | 88.6 | 110.8 | -22.2 | peak |
| 5725 | 100.43 | -2.14 | 98.29 | 122.2 | -23.91 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.53 | -2.06 | 55.47 | 68.2 | -12.73 | peak |
| 5700 | 89.86 | -1.96 | 87.9 | 105.2 | -17.3 | peak |
| 5720 | 91.61 | -2.87 | 88.74 | 110.8 | -22.06 | peak |
| 5725 | 100.44 | -2.14 | 98.3 | 122.2 | -23.9 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 99.69 | -1.97 | 97.72 | 122.2 | -24.48 | peak |
| 5855 | 91.91 | -2.13 | 89.78 | 110.8 | -21.02 | peak |
| 5875 | 84.73 | -2.65 | 82.08 | 105.2 | -23.12 | peak |
| 5925 | 50.36 | -2.28 | 48.08 | 68.2 | -20.12 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.79 | -1.97 | 93.82 | 122.2 | -28.38 | peak |
| 5855 | 93.48 | -2.13 | 91.35 | 110.8 | -19.45 | peak |
| 5875 | 83.65 | -2.65 | 81 | 105.2 | -24.2 | peak |
| 5925 | 53.21 | -2.28 | 50.93 | 68.2 | -17.27 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 56.76 | -2.06 | 54.7 | 68.2 | -13.5 | peak |
| 5700 | 87.64 | -1.96 | 85.68 | 105.2 | -19.52 | peak |
| 5720 | 94.06 | -2.87 | 91.19 | 110.8 | -19.61 | peak |
| 5725 | 97.98 | -2.14 | 95.84 | 122.2 | -26.36 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 59.68 | -2.06 | 57.62 | 68.2 | -10.58 | peak |
| 5700 | 95.92 | -1.96 | 93.96 | 105.2 | -11.24 | peak |
| 5720 | 95.12 | -2.87 | 92.25 | 110.8 | -18.55 | peak |
| 5725 | 96.04 | -2.14 | 93.9 | 122.2 | -28.3 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 96.62 | -1.97 | 94.65 | 122.2 | -27.55 | peak |
| 5855 | 93.75 | -2.13 | 91.62 | 110.8 | -19.18 | peak |
| 5875 | 88.89 | -2.65 | 86.24 | 105.2 | -18.96 | peak |
| 5925 | 52.74 | -2.28 | 50.46 | 68.2 | -17.74 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.35 | -1.97 | 93.38 | 122.2 | -28.82 | peak |
| 5855 | 93.15 | -2.13 | 91.02 | 110.8 | -19.78 | peak |
| 5875 | 86.35 | -2.65 | 83.7 | 105.2 | -21.5 | peak |
| 5925 | 55.32 | -2.28 | 53.04 | 68.2 | -15.16 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 55.71 | -2.06 | 53.65 | 68.2 | -14.55 | peak |
| 5700 | 91.42 | -1.96 | 89.46 | 105.2 | -15.74 | peak |
| 5720 | 91.74 | -2.87 | 88.87 | 110.8 | -21.93 | peak |
| 5725 | 98.43 | -2.14 | 96.29 | 122.2 | -25.91 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 59.42 | -2.06 | 57.36 | 68.2 | -10.84 | peak |
| 5700 | 93.05 | -1.96 | 91.09 | 105.2 | -14.11 | peak |
| 5720 | 87.63 | -2.87 | 84.76 | 110.8 | -26.04 | peak |
| 5725 | 96.33 | -2.14 | 94.19 | 122.2 | -28.01 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.18 | -1.97 | 95.21 | 122.2 | -26.99 | peak |
| 5855 | 93.97 | -2.13 | 91.84 | 110.8 | -18.96 | peak |
| 5875 | 84.61 | -2.65 | 81.96 | 105.2 | -23.24 | peak |
| 5925 | 53.69 | -2.28 | 51.41 | 68.2 | -16.79 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 99.22 | -1.97 | 97.25 | 122.2 | -24.95 | peak |
| 5855 | 89.56 | -2.13 | 87.43 | 110.8 | -23.37 | peak |
| 5875 | 85.15 | -2.65 | 82.5 | 105.2 | -22.7 | peak |
| 5925 | 53.11 | -2.28 | 50.83 | 68.2 | -17.37 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 55.38 | -2.06 | 53.32 | 68.2 | -14.88 | peak |
| 5700 | 85.45 | -1.96 | 83.49 | 105.2 | -21.71 | peak |
| 5720 | 90.89 | -2.87 | 88.02 | 110.8 | -22.78 | peak |
| 5725 | 98.49 | -2.14 | 96.35 | 122.2 | -25.85 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 55.48 | -2.06 | 53.42 | 68.2 | -14.78 | peak |
| 5700 | 91.44 | -1.96 | 89.48 | 105.2 | -15.72 | peak |
| 5720 | 92.28 | -2.87 | 89.41 | 110.8 | -21.39 | peak |
| 5725 | 96.95 | -2.14 | 94.81 | 122.2 | -27.39 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 99.82 | -1.97 | 97.85 | 122.2 | -24.35 | peak |
| 5855 | 92.69 | -2.13 | 90.56 | 110.8 | -20.24 | peak |
| 5875 | 87.36 | -2.65 | 84.71 | 105.2 | -20.49 | peak |
| 5925 | 52.13 | -2.28 | 49.85 | 68.2 | -18.35 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.32 | -1.97 | 93.35 | 122.2 | -28.85 | peak |
| 5855 | 89.25 | -2.13 | 87.12 | 110.8 | -23.68 | peak |
| 5875 | 81.79 | -2.65 | 79.14 | 105.2 | -26.06 | peak |
| 5925 | 56.69 | -2.28 | 54.41 | 68.2 | -13.79 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 56.77 | -2.06 | 54.71 | 68.2 | -13.49 | peak |
| 5700 | 87.91 | -1.96 | 85.95 | 105.2 | -19.25 | peak |
| 5720 | 94.36 | -2.87 | 91.49 | 110.8 | -19.31 | peak |
| 5725 | 96.23 | -2.14 | 94.09 | 122.2 | -28.11 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 56.77 | -2.06 | 54.71 | 68.2 | -13.49 | peak |
| 5700 | 86.28 | -1.96 | 84.32 | 105.2 | -20.88 | peak |
| 5720 | 91.55 | -2.87 | 88.68 | 110.8 | -22.12 | peak |
| 5725 | 97.02 | -2.14 | 94.88 | 122.2 | -27.32 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 93.87 | -1.97 | 91.9 | 122.2 | -30.3 | peak |
| 5855 | 90.73 | -2.13 | 88.6 | 110.8 | -22.2 | peak |
| 5875 | 86.26 | -2.65 | 83.61 | 105.2 | -21.59 | peak |
| 5925 | 53.19 | -2.28 | 50.91 | 68.2 | -17.29 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 96.24 | -1.97 | 94.27 | 122.2 | -27.93 | peak |
| 5855 | 88.16 | -2.13 | 86.03 | 110.8 | -24.77 | peak |
| 5875 | 86.73 | -2.65 | 84.08 | 105.2 | -21.12 | peak |
| 5925 | 53.95 | -2.28 | 51.67 | 68.2 | -16.53 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 54.57 | -2.06 | 52.51 | 68.2 | -15.69 | peak |
| 5700 | 85.85 | -1.96 | 83.89 | 105.2 | -21.31 | peak |
| 5720 | 92.94 | -2.87 | 90.07 | 110.8 | -20.73 | peak |
| 5725 | 94.85 | -2.14 | 92.71 | 122.2 | -29.49 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 55.12 | -2.06 | 53.06 | 68.2 | -15.14 | peak |
| 5700 | 89.29 | -1.96 | 87.33 | 105.2 | -17.87 | peak |
| 5720 | 92.69 | -2.87 | 89.82 | 110.8 | -20.98 | peak |
| 5725 | 97.06 | -2.14 | 94.92 | 122.2 | -27.28 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 98.34 | -1.97 | 96.37 | 122.2 | -25.83 | peak |
| 5855 | 89.49 | -2.13 | 87.36 | 110.8 | -23.44 | peak |
| 5875 | 85.03 | -2.65 | 82.38 | 105.2 | -22.82 | peak |
| 5925 | 52.73 | -2.28 | 50.45 | 68.2 | -17.75 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 94.58 | -1.97 | 92.61 | 122.2 | -29.59 | peak |
| 5855 | 92.81 | -2.13 | 90.68 | 110.8 | -20.12 | peak |
| 5875 | 79.92 | -2.65 | 77.27 | 105.2 | -27.93 | peak |
| 5925 | 56.12 | -2.28 | 53.84 | 68.2 | -14.36 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**ANT 2**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 54.85 | -2.06 | 52.79 | 68.2 | -15.41 | peak |
| 5700 | 90.91 | -1.96 | 88.95 | 105.2 | -16.25 | peak |
| 5720 | 94.27 | -2.87 | 91.4 | 110.8 | -19.4 | peak |
| 5725 | 95.73 | -2.14 | 93.59 | 122.2 | -28.61 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.18 | -2.06 | 55.12 | 68.2 | -13.08 | peak |
| 5700 | 90.14 | -1.96 | 88.18 | 105.2 | -17.02 | peak |
| 5720 | 95.56 | -2.87 | 92.69 | 110.8 | -18.11 | peak |
| 5725 | 96.53 | -2.14 | 94.39 | 122.2 | -27.81 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.98 | -1.97 | 96.01 | 122.2 | -26.19 | peak |
| 5855 | 93.61 | -2.13 | 91.48 | 110.8 | -19.32 | peak |
| 5875 | 83.96 | -2.65 | 81.31 | 105.2 | -23.89 | peak |
| 5925 | 54.37 | -2.28 | 52.09 | 68.2 | -16.11 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 98.94 | -1.97 | 96.97 | 122.2 | -25.23 | peak |
| 5855 | 91.25 | -2.13 | 89.12 | 110.8 | -21.68 | peak |
| 5875 | 85.03 | -2.65 | 82.38 | 105.2 | -22.82 | peak |
| 5925 | 54.74 | -2.28 | 52.46 | 68.2 | -15.74 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 58.43 | -2.06 | 56.37 | 68.2 | -11.83 | peak |
| 5700 | 88.24 | -1.96 | 86.28 | 105.2 | -18.92 | peak |
| 5720 | 90.56 | -2.87 | 87.69 | 110.8 | -23.11 | peak |
| 5725 | 96.88 | -2.14 | 94.74 | 122.2 | -27.46 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 56.98 | -2.06 | 54.92 | 68.2 | -13.28 | peak |
| 5700 | 95.27 | -1.96 | 93.31 | 105.2 | -11.89 | peak |
| 5720 | 90.71 | -2.87 | 87.84 | 110.8 | -22.96 | peak |
| 5725 | 95.46 | -2.14 | 93.32 | 122.2 | -28.88 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.96 | -1.97 | 93.99 | 122.2 | -28.21 | peak |
| 5855 | 91.89 | -2.13 | 89.76 | 110.8 | -21.04 | peak |
| 5875 | 84.75 | -2.65 | 82.1 | 105.2 | -23.1 | peak |
| 5925 | 50.62 | -2.28 | 48.34 | 68.2 | -19.86 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 96.72 | -1.97 | 94.75 | 122.2 | -27.45 | peak |
| 5855 | 90.93 | -2.13 | 88.8 | 110.8 | -22 | peak |
| 5875 | 84.14 | -2.65 | 81.49 | 105.2 | -23.71 | peak |
| 5925 | 56.76 | -2.28 | 54.48 | 68.2 | -13.72 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 54.26 | -2.06 | 52.2 | 68.2 | -16 | peak |
| 5700 | 91.16 | -1.96 | 89.2 | 105.2 | -16 | peak |
| 5720 | 89.38 | -2.87 | 86.51 | 110.8 | -24.29 | peak |
| 5725 | 97.26 | -2.14 | 95.12 | 122.2 | -27.08 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 60.28 | -2.06 | 58.22 | 68.2 | -9.98 | peak |
| 5700 | 95.32 | -1.96 | 93.36 | 105.2 | -11.84 | peak |
| 5720 | 88.55 | -2.87 | 85.68 | 110.8 | -25.12 | peak |
| 5725 | 98.97 | -2.14 | 96.83 | 122.2 | -25.37 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 98.42 | -1.97 | 96.45 | 122.2 | -25.75 | peak |
| 5855 | 93.19 | -2.13 | 91.06 | 110.8 | -19.74 | peak |
| 5875 | 88.51 | -2.65 | 85.86 | 105.2 | -19.34 | peak |
| 5925 | 51.22 | -2.28 | 48.94 | 68.2 | -19.26 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.52 | -1.97 | 93.55 | 122.2 | -28.65 | peak |
| 5855 | 93.88 | -2.13 | 91.75 | 110.8 | -19.05 | peak |
| 5875 | 85.25 | -2.65 | 82.6 | 105.2 | -22.6 | peak |
| 5925 | 51.48 | -2.28 | 49.2 | 68.2 | -19 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.68 | -2.06 | 55.62 | 68.2 | -12.58 | peak |
| 5700 | 90.71 | -1.96 | 88.75 | 105.2 | -16.45 | peak |
| 5720 | 92.83 | -2.87 | 89.96 | 110.8 | -20.84 | peak |
| 5725 | 98.63 | -2.14 | 96.49 | 122.2 | -25.71 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.65 | -2.06 | 55.59 | 68.2 | -12.61 | peak |
| 5700 | 88.42 | -1.96 | 86.46 | 105.2 | -18.74 | peak |
| 5720 | 95.52 | -2.87 | 92.65 | 110.8 | -18.15 | peak |
| 5725 | 97.19 | -2.14 | 95.05 | 122.2 | -27.15 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.13 | -1.97 | 95.16 | 122.2 | -27.04 | peak |
| 5855 | 92.79 | -2.13 | 90.66 | 110.8 | -20.14 | peak |
| 5875 | 85.47 | -2.65 | 82.82 | 105.2 | -22.38 | peak |
| 5925 | 53.25 | -2.28 | 50.97 | 68.2 | -17.23 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.53 | -1.97 | 93.56 | 122.2 | -28.64 | peak |
| 5855 | 91.57 | -2.13 | 89.44 | 110.8 | -21.36 | peak |
| 5875 | 82.98 | -2.65 | 80.33 | 105.2 | -24.87 | peak |
| 5925 | 52.49 | -2.28 | 50.21 | 68.2 | -17.99 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.41 | -2.06 | 55.35 | 68.2 | -12.85 | peak |
| 5700 | 85.08 | -1.96 | 83.12 | 105.2 | -22.08 | peak |
| 5720 | 89.69 | -2.87 | 86.82 | 110.8 | -23.98 | peak |
| 5725 | 95.95 | -2.14 | 93.81 | 122.2 | -28.39 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 56.01 | -2.06 | 53.95 | 68.2 | -14.25 | peak |
| 5700 | 91.69 | -1.96 | 89.73 | 105.2 | -15.47 | peak |
| 5720 | 96.37 | -2.87 | 93.5 | 110.8 | -17.3 | peak |
| 5725 | 94.89 | -2.14 | 92.75 | 122.2 | -29.45 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 98.99 | -1.97 | 97.02 | 122.2 | -25.18 | peak |
| 5855 | 93.62 | -2.13 | 91.49 | 110.8 | -19.31 | peak |
| 5875 | 84.48 | -2.65 | 81.83 | 105.2 | -23.37 | peak |
| 5925 | 54.33 | -2.28 | 52.05 | 68.2 | -16.15 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 98.22 | -1.97 | 96.25 | 122.2 | -25.95 | peak |
| 5855 | 91.07 | -2.13 | 88.94 | 110.8 | -21.86 | peak |
| 5875 | 84.39 | -2.65 | 81.74 | 105.2 | -23.46 | peak |
| 5925 | 54.19 | -2.28 | 51.91 | 68.2 | -16.29 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 55.95 | -2.06 | 53.89 | 68.2 | -14.31 | peak |
| 5700 | 91.13 | -1.96 | 89.17 | 105.2 | -16.03 | peak |
| 5720 | 89.83 | -2.87 | 86.96 | 110.8 | -23.84 | peak |
| 5725 | 97.51 | -2.14 | 95.37 | 122.2 | -26.83 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 56.92 | -2.06 | 54.86 | 68.2 | -13.34 | peak |
| 5700 | 89.41 | -1.96 | 87.45 | 105.2 | -17.75 | peak |
| 5720 | 93.31 | -2.87 | 90.44 | 110.8 | -20.36 | peak |
| 5725 | 96.44 | -2.14 | 94.3 | 122.2 | -27.9 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 96.52 | -1.97 | 94.55 | 122.2 | -27.65 | peak |
| 5855 | 91.86 | -2.13 | 89.73 | 110.8 | -21.07 | peak |
| 5875 | 83.63 | -2.65 | 80.98 | 105.2 | -24.22 | peak |
| 5925 | 51.87 | -2.28 | 49.59 | 68.2 | -18.61 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.84 | -1.97 | 95.87 | 122.2 | -26.33 | peak |
| 5855 | 92.75 | -2.13 | 90.62 | 110.8 | -20.18 | peak |
| 5875 | 84.58 | -2.65 | 81.93 | 105.2 | -23.27 | peak |
| 5925 | 57.27 | -2.28 | 54.99 | 68.2 | -13.21 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MIMO:

Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 59.11 | -2.06 | 57.05 | 68.2 | -11.15 | peak |
| 5700 | 90.08 | -1.96 | 88.12 | 105.2 | -17.08 | peak |
| 5720 | 96.56 | -2.87 | 93.69 | 110.8 | -17.11 | peak |
| 5725 | 100.89 | -2.14 | 98.75 | 122.2 | -23.45 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 61.92 | -2.06 | 59.86 | 68.2 | -8.34 | peak |
| 5700 | 95.37 | -1.96 | 93.41 | 105.2 | -11.79 | peak |
| 5720 | 93.61 | -2.87 | 90.74 | 110.8 | -20.06 | peak |
| 5725 | 98.47 | -2.14 | 96.33 | 122.2 | -25.87 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.07 | -1.97 | 95.1 | 122.2 | -27.1 | peak |
| 5855 | 97.32 | -2.13 | 95.19 | 110.8 | -15.61 | peak |
| 5875 | 87.72 | -2.65 | 85.07 | 105.2 | -20.13 | peak |
| 5925 | 54.15 | -2.28 | 51.87 | 68.2 | -16.33 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 98.21 | -1.97 | 96.24 | 122.2 | -25.96 | peak |
| 5855 | 94.52 | -2.13 | 92.39 | 110.8 | -18.41 | peak |
| 5875 | 85.61 | -2.65 | 82.96 | 105.2 | -22.24 | peak |
| 5925 | 56.42 | -2.28 | 54.14 | 68.2 | -14.06 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 57.56 | -2.06 | 55.5 | 68.2 | -12.7 | peak |
| 5700 | 93.66 | -1.96 | 91.7 | 105.2 | -13.5 | peak |
| 5720 | 92.72 | -2.87 | 89.85 | 110.8 | -20.95 | peak |
| 5725 | 97.33 | -2.14 | 95.19 | 122.2 | -27.01 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 5650 | 61.74 | -2.06 | 59.68 | 68.2 | -8.52 | peak |
| 5700 | 95.92 | -1.96 | 93.96 | 105.2 | -11.24 | peak |
| 5720 | 90.23 | -2.87 | 87.36 | 110.8 | -23.44 | peak |
| 5725 | 96.95 | -2.14 | 94.81 | 122.2 | -27.39 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 102.43 | -1.97 | 100.46 | 122.2 | -21.74 | peak |
| 5855 | 95.51 | -2.13 | 93.38 | 110.8 | -17.42 | peak |
| 5875 | 87.24 | -2.65 | 84.59 | 105.2 | -20.61 | peak |
| 5925 | 53.97 | -2.28 | 51.69 | 68.2 | -16.51 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 101.58 | -1.97 | 99.61 | 122.2 | -22.59 | peak |
| 5855 | 91.63 | -2.13 | 89.5 | 110.8 | -21.3 | peak |
| 5875 | 85.37 | -2.65 | 82.72 | 105.2 | -22.48 | peak |
| 5925 | 53.95 | -2.28 | 51.67 | 68.2 | -16.53 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.62 | -2.06 | 55.56 | 68.2 | -12.64 | peak |
| 5700 | 90.17 | -1.96 | 88.21 | 105.2 | -16.99 | peak |
| 5720 | 93.54 | -2.87 | 90.67 | 110.8 | -20.13 | peak |
| 5725 | 99.72 | -2.14 | 97.58 | 122.2 | -24.62 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.77 | -2.06 | 55.71 | 68.2 | -12.49 | peak |
| 5700 | 89.21 | -1.96 | 87.25 | 105.2 | -17.95 | peak |
| 5720 | 91.25 | -2.87 | 88.38 | 110.8 | -22.42 | peak |
| 5725 | 95.53 | -2.14 | 93.39 | 122.2 | -28.81 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 101.81 | -1.97 | 99.84 | 122.2 | -22.36 | peak |
| 5855 | 95.16 | -2.13 | 93.03 | 110.8 | -17.77 | peak |
| 5875 | 89.23 | -2.65 | 86.58 | 105.2 | -18.62 | peak |
| 5925 | 52.73 | -2.28 | 50.45 | 68.2 | -17.75 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.22 | -1.97 | 95.25 | 122.2 | -26.95 | peak |
| 5855 | 89.35 | -2.13 | 87.22 | 110.8 | -23.58 | peak |
| 5875 | 86.03 | -2.65 | 83.38 | 105.2 | -21.82 | peak |
| 5925 | 53.73 | -2.28 | 51.45 | 68.2 | -16.75 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.93 | -2.06 | 55.87 | 68.2 | -12.33 | peak |
| 5700 | 89.14 | -1.96 | 87.18 | 105.2 | -18.02 | peak |
| 5720 | 94.91 | -2.87 | 92.04 | 110.8 | -18.76 | peak |
| 5725 | 95.24 | -2.14 | 93.1 | 122.2 | -29.1 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 56.48 | -2.06 | 54.42 | 68.2 | -13.78 | peak |
| 5700 | 87.92 | -1.96 | 85.96 | 105.2 | -19.24 | peak |
| 5720 | 96.58 | -2.87 | 93.71 | 110.8 | -17.09 | peak |
| 5725 | 97.64 | -2.14 | 95.5 | 122.2 | -26.7 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.52 | -1.97 | 95.55 | 122.2 | -26.65 | peak |
| 5855 | 89.93 | -2.13 | 87.8 | 110.8 | -23 | peak |
| 5875 | 85.19 | -2.65 | 82.54 | 105.2 | -22.66 | peak |
| 5925 | 54.32 | -2.28 | 52.04 | 68.2 | -16.16 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 95.45 | -1.97 | 93.48 | 122.2 | -28.72 | peak |
| 5855 | 90.74 | -2.13 | 88.61 | 110.8 | -22.19 | peak |
| 5875 | 87.26 | -2.65 | 84.61 | 105.2 | -20.59 | peak |
| 5925 | 57.32 | -2.28 | 55.04 | 68.2 | -13.16 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 57.11 | -2.06 | 55.05 | 68.2 | -13.15 | peak |
| 5700 | 89.13 | -1.96 | 87.17 | 105.2 | -18.03 | peak |
| 5720 | 95.07 | -2.87 | 92.2 | 110.8 | -18.6 | peak |
| 5725 | 96.01 | -2.14 | 93.87 | 122.2 | -28.33 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5650 | 59.01 | -2.06 | 56.95 | 68.2 | -11.25 | peak |
| 5700 | 90.65 | -1.96 | 88.69 | 105.2 | -16.51 | peak |
| 5720 | 94.01 | -2.87 | 91.14 | 110.8 | -19.66 | peak |
| 5725 | 98.67 | -2.14 | 96.53 | 122.2 | -25.67 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 100.85 | -1.97 | 98.88 | 122.2 | -23.32 | peak |
| 5855 | 92.26 | -2.13 | 90.13 | 110.8 | -20.67 | peak |
| 5875 | 86.07 | -2.65 | 83.42 | 105.2 | -21.78 | peak |
| 5925 | 53.92 | -2.28 | 51.64 | 68.2 | -16.56 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 5850 | 97.68 | -1.97 | 95.71 | 122.2 | -26.49 | peak |
| 5855 | 94.97 | -2.13 | 92.84 | 110.8 | -17.96 | peak |
| 5875 | 83.16 | -2.65 | 80.51 | 105.2 | -24.69 | peak |
| 5925 | 56.22 | -2.28 | 53.94 | 68.2 | -14.26 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

4.7. SPURIOUS EMISSION

4.7.1. Test Specification

| Test Requirement: | FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------------|--|-----------|----------|------------------|-----|--------|--------------|------------|-------|------|------------------|---------------|------------|------|-------|------------------|------------|------------|--------|--------|------------------|------------|------|------|------|------------|------|------|------|---------------|
| Test Method: | KDB 789033 D02 v02r01 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Frequency Range: | 9kHz to 40GHz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Measurement Distance: | 3 m | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Antenna Polarization: | Horizontal & Vertical | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Operation mode: | Transmitting mode with modulation | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Receiver Setup: | <table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td> <td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table> | Frequency | Detector | RBW | VBW | Remark | 9kHz- 150kHz | Quasi-peak | 200Hz | 1kHz | Quasi-peak Value | 150kHz- 30MHz | Quasi-peak | 9kHz | 30kHz | Quasi-peak Value | 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value | Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | Peak | 1MHz | 10Hz | Average Value |
| Frequency | Detector | RBW | VBW | Remark | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 9kHz- 150kHz | Quasi-peak | 200Hz | 1kHz | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 150kHz- 30MHz | Quasi-peak | 9kHz | 30kHz | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 30MHz-1GHz | Quasi-peak | 120KHz | 300KHz | Quasi-peak Value | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Above 1GHz | Peak | 1MHz | 3MHz | Peak Value | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Peak | 1MHz | 10Hz | Average Value | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Limit: | <p>(1) For transmitters operating in the 5.725-5.85 GHz band:</p> <p>(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.</p> <p>The limit of frequency below 1GHz and which fall in restricted bands should comply 15.209.</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Test setup: | <p>For radiated emissions below 30MHz</p> <p>30MHz to 1GHz</p> | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

| | |
|-------------------------------|---|
| | <p>Above 1GHz</p> |
| <p>Test Procedure:</p> | <ol style="list-style-type: none"> 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet. |
| <p>Test results:</p> | <p>PASS</p> |




4.7.2. Test Data

test mode: TX 802.11a 5745MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

Below 1GHz

Horizontal

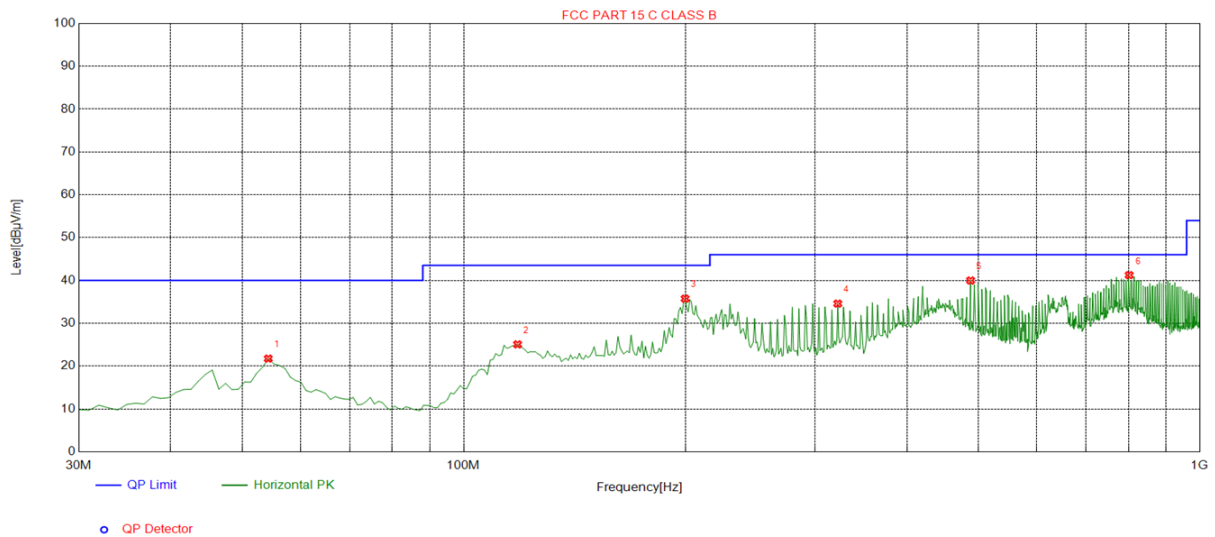


| Suspected List | | | | | | | | | |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|------------|
| NO. | Freq. [MHz] | Factor [dB] | Reading [dBμV/m] | Level [dBμV/m] | Limit [dBμV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity |
| 1 | 54.2743 | -14.30 | 36.05 | 21.75 | 40.00 | 18.25 | 100 | 231 | Horizontal |
| 2 | 118.3584 | -16.83 | 41.90 | 25.07 | 43.50 | 18.43 | 100 | 12 | Horizontal |
| 3 | 199.9199 | -15.07 | 50.82 | 35.75 | 43.50 | 7.75 | 100 | 25 | Horizontal |
| 4 | 322.2623 | -11.98 | 46.56 | 34.58 | 46.00 | 11.42 | 100 | 41 | Horizontal |
| 5 | 488.2983 | -8.53 | 48.51 | 39.98 | 46.00 | 6.02 | 100 | 51 | Horizontal |
| 6 | 801.9219 | -3.09 | 44.32 | 41.23 | 46.00 | 4.77 | 100 | 25 | Horizontal |

Remark: Factor = Cable loss + Antenna factor – Preamplifier; Level = Reading + Factor; Margin = Limit – Level



Vertical

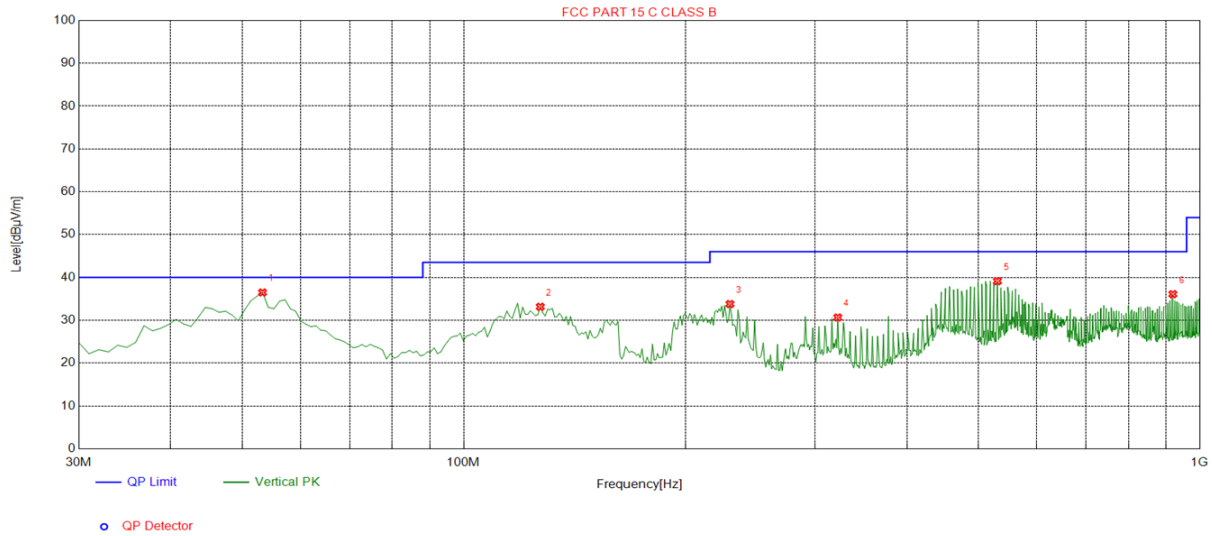

| Suspected List | | | | | | | | | | |
|----------------|-------------|-------------|------------------|----------------|----------------|-------------|-------------|-----------|----------|--|
| NO. | Freq. [MHz] | Factor [dB] | Reading [dBµV/m] | Level [dBµV/m] | Limit [dBµV/m] | Margin [dB] | Height [cm] | Angle [°] | Polarity | |
| 1 | 53.3033 | -14.15 | 50.63 | 36.48 | 40.00 | 3.52 | 100 | 52 | Vertical | |
| 2 | 127.0971 | -18.14 | 51.29 | 33.15 | 43.50 | 10.35 | 100 | 262 | Vertical | |
| 3 | 230.0200 | -14.32 | 48.11 | 33.79 | 46.00 | 12.21 | 100 | 4 | Vertical | |
| 4 | 322.2623 | -11.98 | 42.62 | 30.64 | 46.00 | 15.36 | 100 | 20 | Vertical | |
| 5 | 531.0210 | -7.42 | 46.55 | 39.13 | 46.00 | 6.87 | 100 | 81 | Vertical | |
| 6 | 919.4094 | -1.79 | 37.88 | 36.09 | 46.00 | 9.91 | 100 | 100 | Vertical | |

Remark: Factor = Cable loss + Antenna factor – Pre-amplifier; Level = Reading + Factor; Margin = Limit – Level

**Harmonics and Spurious Emissions
Frequency Range (9 kHz-30MHz)**

| Frequency (MHz) | Level@3m (dBµV/m) | Limit@3m (dBµV/m) |
|-----------------|-------------------|-------------------|
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |
| -- | -- | -- |

Note: 1. Emission Level=Reading+ Cable loss-Antenna factor-Amp factor.
2. The emission levels are 20 dB below the limit value, which are not reported. It is deemed to comply with the requirement.

**Above 1GHz**

5.8G 802.11 a Mode

All modes of operation were investigated and the worst-case of Antenna 1 are reported

LOW CH 149

Horizontal:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 3368 | 65.34 | -4.59 | 60.75 | 68.2 | -7.45 | peak |
| 11096 | 52.67 | 4.21 | 56.88 | 74 | -17.12 | peak |
| 11096 | 45.73 | 4.21 | 49.94 | 54 | -4.06 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency (MHz) | Meter Reading (dB μ V) | Factor (dB) | Emission Level (dB μ V/m) | Limits (dB μ V/m) | Margin (dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 3368 | 62.29 | -4.59 | 57.7 | 68.2 | -10.5 | peak |
| 11096 | 54.33 | 4.21 | 58.54 | 74 | -15.46 | peak |
| 11096 | 36.19 | 4.21 | 40.4 | 54 | -13.6 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH157

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 62.37 | -4.59 | 57.78 | 68.2 | -10.42 | peak |
| 10523 | 51.69 | 4.21 | 55.9 | 68.2 | -12.3 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 56.32 | -4.59 | 51.73 | 68.2 | -16.47 | peak |
| 10523 | 53.47 | 4.21 | 57.68 | 68.2 | -10.52 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH165

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2705 | 58.19 | -4.59 | 53.6 | 74 | -20.4 | peak |
| 2705 | 46.33 | -4.59 | 41.74 | 54 | -12.26 | AVG |
| 11717 | 55.73 | 4.84 | 60.57 | 74 | -13.43 | peak |
| 11717 | 36.62 | 4.84 | 41.46 | 54 | -12.54 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2705 | 57.36 | -4.59 | 52.77 | 74 | -21.23 | peak |
| 2705 | 45.57 | -4.59 | 40.98 | 54 | -13.02 | AVG |
| 11717 | 51.66 | 4.84 | 56.5 | 74 | -17.5 | peak |
| 11717 | 39.44 | 4.84 | 44.28 | 54 | -9.72 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11n20 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 61.62 | -4.59 | 57.03 | 68.2 | -11.17 | peak |
| 11096 | 55.77 | 4.21 | 59.98 | 74 | -14.02 | peak |
| 11096 | 45.39 | 4.21 | 49.6 | 54 | -4.4 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 63.49 | -4.59 | 58.9 | 68.2 | -9.3 | peak |
| 11096 | 55.67 | 4.21 | 59.88 | 74 | -14.12 | peak |
| 11096 | 38.43 | 4.21 | 42.64 | 54 | -11.36 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH157

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 64.25 | -4.59 | 59.66 | 68.2 | -8.54 | peak |
| 10523 | 54.67 | 4.21 | 58.88 | 68.2 | -9.32 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 58.43 | -4.59 | 53.84 | 68.2 | -14.36 | peak |
| 10523 | 57.66 | 4.21 | 61.87 | 68.2 | -6.33 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH165

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2705 | 58.14 | -4.59 | 53.55 | 74 | -20.45 | peak |
| 2705 | 48.52 | -4.59 | 43.93 | 54 | -10.07 | AVG |
| 11717 | 54.66 | 4.84 | 59.5 | 74 | -14.5 | peak |
| 11717 | 38.39 | 4.84 | 43.23 | 54 | -10.77 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2705 | 59.73 | -4.59 | 55.14 | 74 | -18.86 | peak |
| 2705 | 46.28 | -4.59 | 41.69 | 54 | -12.31 | AVG |
| 11717 | 53.41 | 4.84 | 58.25 | 74 | -15.75 | peak |
| 11717 | 39.65 | 4.84 | 44.49 | 54 | -9.51 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11n40 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 64.22 | -4.59 | 59.63 | 68.2 | -8.57 | peak |
| 11096 | 51.37 | 4.21 | 55.58 | 74 | -18.42 | peak |
| 11096 | 46.68 | 4.21 | 50.89 | 54 | -3.11 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 63.19 | -4.59 | 58.6 | 68.2 | -9.6 | peak |
| 11096 | 56.28 | 4.21 | 60.49 | 74 | -13.51 | peak |
| 11096 | 35.37 | 4.21 | 39.58 | 54 | -14.42 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH159

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 64.39 | -4.59 | 59.8 | 68.2 | -8.4 | peak |
| 10523 | 54.72 | 4.21 | 58.93 | 68.2 | -9.27 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 57.33 | -4.59 | 52.74 | 68.2 | -15.46 | peak |
| 10523 | 54.82 | 4.21 | 59.03 | 68.2 | -9.17 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ac20 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 149

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 68.42 | -4.59 | 63.83 | 68.2 | -4.37 | peak |
| 11096 | 52.39 | 4.21 | 56.6 | 74 | -17.4 | peak |
| 11096 | 48.77 | 4.21 | 52.98 | 54 | -1.02 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 64.38 | -4.59 | 59.79 | 68.2 | -8.41 | peak |
| 11096 | 55.67 | 4.21 | 59.88 | 74 | -14.12 | peak |
| 11096 | 38.49 | 4.21 | 42.7 | 54 | -11.3 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH157

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 63.32 | -4.59 | 58.73 | 68.2 | -9.47 | peak |
| 10523 | 54.78 | 4.21 | 58.99 | 68.2 | -9.21 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 58.42 | -4.59 | 53.83 | 68.2 | -14.37 | peak |
| 10523 | 56.15 | 4.21 | 60.36 | 68.2 | -7.84 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH165

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2705 | 60.23 | -4.59 | 55.64 | 74 | -18.36 | peak |
| 2705 | 48.47 | -4.59 | 43.88 | 54 | -10.12 | AVG |
| 11717 | 57.62 | 4.84 | 62.46 | 74 | -11.54 | peak |
| 11717 | 40.13 | 4.84 | 44.97 | 54 | -9.03 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 2705 | 58.77 | -4.59 | 54.18 | 74 | -19.82 | peak |
| 2705 | 46.58 | -4.59 | 41.99 | 54 | -12.01 | AVG |
| 11717 | 52.16 | 4.84 | 57 | 74 | -17 | peak |
| 11717 | 38.67 | 4.84 | 43.51 | 54 | -10.49 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ac40 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

LOW CH 151

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 65.22 | -4.59 | 60.63 | 68.2 | -7.57 | peak |
| 11096 | 50.49 | 4.21 | 54.7 | 74 | -19.3 | peak |
| 11096 | 43.66 | 4.21 | 47.87 | 54 | -6.13 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 63.57 | -4.59 | 58.98 | 68.2 | -9.22 | peak |
| 11096 | 54.62 | 4.21 | 58.83 | 74 | -15.17 | peak |
| 11096 | 39.28 | 4.21 | 43.49 | 54 | -10.51 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH159

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 63.29 | -4.59 | 58.7 | 68.2 | -9.5 | peak |
| 10523 | 54.77 | 4.21 | 58.98 | 68.2 | -9.22 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3172 | 59.15 | -4.59 | 54.56 | 68.2 | -13.64 | peak |
| 10523 | 53.67 | 4.21 | 57.88 | 68.2 | -10.32 | peak |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



5.8G 802.11ac80 Mode

All modes of operation were investigated and the worst-case of MIMO are reported.

CH 155

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 66.27 | -4.59 | 61.68 | 68.2 | -6.52 | peak |
| 11096 | 53.36 | 4.21 | 57.57 | 74 | -16.43 | peak |
| 11096 | 45.74 | 4.21 | 49.95 | 54 | -4.05 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz) | (dB μ V) | (dB) | (dB μ V/m) | (dB μ V/m) | (dB) | |
| 3368 | 62.37 | -4.59 | 57.78 | 68.2 | -10.42 | peak |
| 11096 | 56.82 | 4.21 | 61.03 | 74 | -12.97 | peak |
| 11096 | 38.51 | 4.21 | 42.72 | 54 | -11.28 | AVG |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) The emissions are attenuated more than 20dB below the permissible limits are not record in the report.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



4.8. FREQUENCY STABILITY MEASUREMENT

4.8.1. Test Specification

| | |
|--------------------------|--|
| Test Requirement: | FCC Part15 Section 15.407(g) |
| Test Method: | ANSI C63.10: 2013 |
| Limit: | The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. |
| Test Setup: | <pre> graph LR SA[Spectrum Analyzer] --- EUT[EUT] subgraph TC [Temperature Chamber] EUT end P[AC/DC Power supply] --- EUT </pre> |
| Test Procedure: | The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record. |
| Test Result: | PASS |
| Remark: | N/A |

**Test Result as follows:**

| Mode | Voltage (V) | FHL (5745MHz) | Deviation (KHz) | FHH (5825MHz) | Deviation (KHz) |
|-----------|-------------|---------------|-----------------|---------------|-----------------|
| 5.8G Band | 5V | 5744.973 | -27 | 5825.009 | 9 |
| | 5.75 V | 5745.025 | 25 | 5824.965 | -35 |
| | 4.25 V | 5744.976 | -24 | 5824.977 | -23 |

| Mode | Temperature (°C) | FHL (5745MHz) | Deviation (KHz) | FHH (5825MHz) | Deviation (KHz) |
|-----------|------------------|---------------|-----------------|---------------|-----------------|
| 5.8G Band | -30 | 5744.983 | -17 | 5824.959 | -41 |
| | -20 | 5745.021 | 21 | 5825.028 | 28 |
| | -10 | 5745.005 | 5 | 5824.975 | -25 |
| | 0 | 5745.022 | 22 | 5824.966 | -34 |
| | 10 | 5744.974 | -26 | 5824.975 | -25 |
| | 20 | 5744.962 | -38 | 5824.989 | -11 |
| | 30 | 5745.019 | 19 | 5824.978 | -22 |
| | 40 | 5744.972 | -28 | 5824.946 | -54 |
| | 50 | 5744.969 | -31 | 5825.027 | 27 |



4.9. ANTENNA REQUIREMENT

Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

Antenna Connected Construction


The antenna used in this product is a Internal Antenna need professional installation, It conforms to the standard requirements. The directional gains of antenna used for transmitting is 3dBi.

WIFI ANTENNA

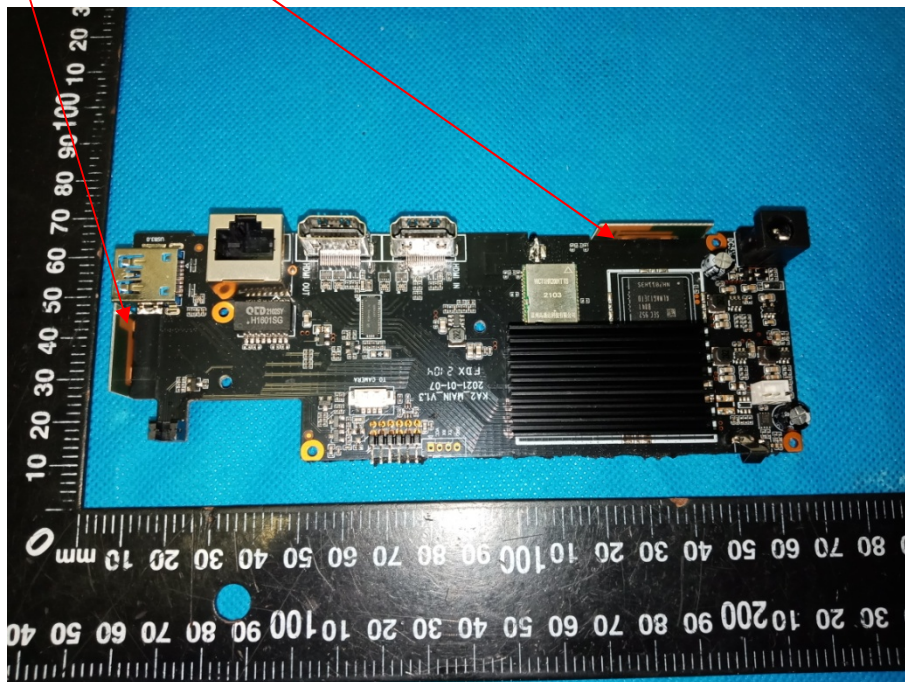

5. PHOTOGRAPHS OF TEST SETUP

Radiated Emission

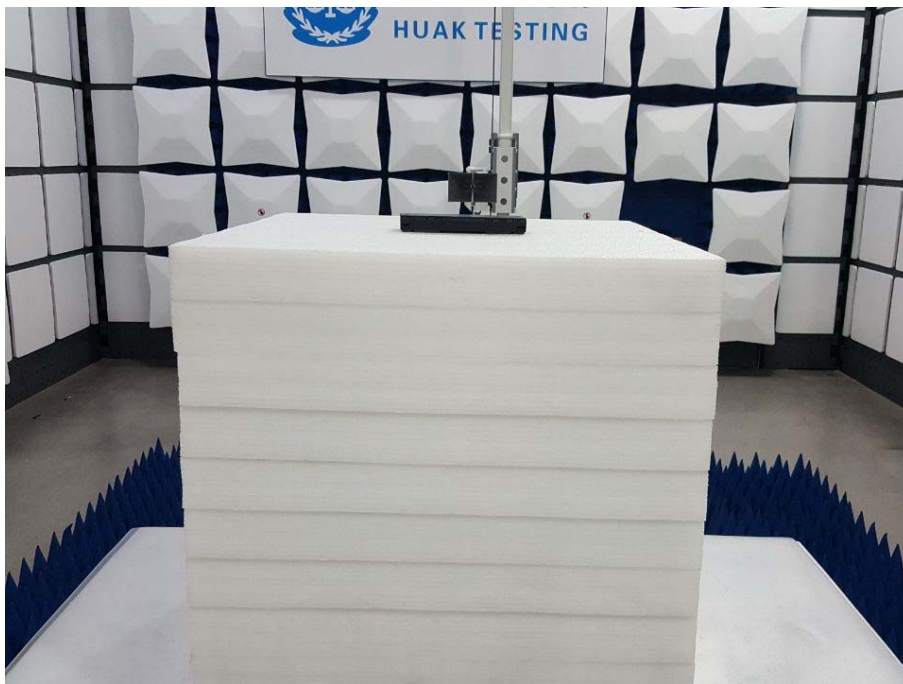



Conducted Emission





6. PHOTOS OF THE EUT

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos.

*****End of Report*****