



# FCC TEST REPORT

Test report

On Behalf of

Shenzhen Zidoo Technology Co., Ltd.

For

4K UHD Media Player

Model No.: Z1000, Z2000, Z3000, Z5000, Z6000, Z7000,  
Z8000, Z9000, UHD1000, UHD2000, UHD3000, UHD5000,  
UHD6000, UHD7000, UHD8000, UHD9000, Z1000 PRO,  
Z2000 PRO, Z3000 PRO, Z5000 PRO, Z6000 PRO,  
Z7000 PRO, Z8000 PRO, Z9000 PRO

FCC ID: 2AGN7-Z1000

Prepared for : Shenzhen Zidoo Technology Co., Ltd.  
Room 12 D, Block A, CENTRAL GREAT SEARCHINGS, Xixiang Avenue, BaoAn  
District, Shenzhen, China

Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China

Date of Test: Apr. 03, 2019 ~ Apr. 18, 2019

Date of Report: Apr. 18, 2019

Report Number: HK1904110796-3E



### TEST RESULT CERTIFICATION

**Applicant's name** .....: Shenzhen Zidoo Technology Co., Ltd.  
**Address** .....: Room 12 D, Block A, CENTRAL GREAT SEARCHINGS, Xixiang Avenue, BaoAn District, Shenzhen, China  
**Manufacturer's Name**.....: Shenzhen Zidoo Technology Co., Ltd.  
**Address** .....: Room 12 D, Block A, CENTRAL GREAT SEARCHINGS, Xixiang Avenue, BaoAn District, Shenzhen, China

**Product description**

**Trade Mark:** N/A  
**Product name**.....: 4K UHD Media Player  
**Model and/or type reference** : Z1000, Z2000, Z3000, Z5000, Z6000, Z7000, Z8000, Z9000, UHD1000, UHD2000, UHD3000, UHD5000, UHD6000, UHD7000, UHD8000, UHD9000, Z1000 PRO, Z2000 PRO, Z3000 PRO, Z5000 PRO, Z6000 PRO, Z7000 PRO, Z8000 PRO, Z9000 PRO  
**Standards** .....: FCC Rules and Regulations Part 15 Subpart C Section 15.407  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAKE Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAKE Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

**Date of Test** .....:  
**Date (s) of performance of tests** .....: Apr. 03, 2019 ~ Apr. 18, 2019  
**Date of Issue**.....: Apr. 18, 2019  
**Test Result**.....: Pass

Testing Engineer : Gary Qian  
(Gary Qian)

Technical Manager : Eden Hu  
(Eden Hu)

Authorized Signatory : Jason Zhou  
 Jason Zhou



## TABLE OF CONTENTS

<b>1. Test Result Summary .....</b>	<b>4</b>
1.1. TEST PROCEDURES AND RESULTS.....	4
1.2. TEST FACILITY .....	4
1.3. MEASUREMENT UNCERTAINTY .....	5
<b>2. EUT Description .....</b>	<b>6</b>
2.1. GENERAL DESCRIPTION OF EUT .....	6
2.2. OPERATION FREQUENCY EACH OF CHANNEL.....	7
2.3. OPERATION OF EUT DURING TESTING .....	7
2.4. DESCRIPTION OF TEST SETUP .....	8
<b>3. General Information .....</b>	<b>9</b>
3.1. TEST ENVIRONMENT AND MODE .....	9
3.2. DESCRIPTION OF SUPPORT UNITS .....	10
<b>4. Test Results and Measurement Data .....</b>	<b>11</b>
4.1. CONDUCTED EMISSION .....	11
4.2. MAXIMUM CONDUCTED OUTPUT POWER .....	15
4.3. 6dB EMISSION BANDWIDTH .....	18
4.4. 26dB BANDWIDTH AND 99% OCCUPIED BANDWIDTH.....	35
4.5. POWER SPECTRAL DENSITY .....	36
4.6. BAND EDGE.....	54
4.7. SPURIOUS EMISSION .....	81
4.8. FREQUENCY STABILITY MEASUREMENT.....	88
4.9. ANTENNA REQUIREMENT .....	90
4.10. PHOTOGRAPHS OF TEST SETUP .....	91
4.11. PHOTOS OF THE EUT .....	93



# 1. Test Result Summary

## 1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203	PASS
AC Power Line Conducted Emission	§15.207	PASS
Maximum Conducted Output Power	§15.407(a) §2.1046	PASS
6dB Emission Bandwidth	§15.407(e)	PASS
26dB Emission Bandwidth & 99% Occupied Bandwidth	§15.407(a) §2.1049	N/A
Power Spectral Density	§15.407(a)	PASS
Band edge	§15.407(a)	PASS
Radiated Emission	§15.407(a) §2.1053	PASS
Frequency Stability	§15.407(g) §2.1055	PASS

**Note:**

1. PASS: Test item meets the requirement.
2. Fail: Test item does not meet the requirement.
3. N/A: Test case does not apply to the test object.
4. The test result judgment is decided by the limit of test standard.

## 1.2. TEST FACILITY

Test Firm : Shenzhen HUAKE Testing Technology Co., Ltd.

Address : 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



## 2. EUT Description

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	4K UHD Media Player
Model Name	Z1000
Serial No.	Z2000, Z3000, Z5000, Z6000, Z7000, Z8000, Z9000, UHD1000, UHD2000, UHD3000, UHD5000, UHD6000, UHD7000, UHD8000, UHD9000, Z1000 PRO, Z2000 PRO, Z3000 PRO, Z5000 PRO, Z6000 PRO, Z7000 PRO, Z8000 PRO, Z9000 PRO
Trade Mark	N/A
Model Difference	All model's the function, software and electric circuit are the same, only with a product color and model named different. Test sample model: Z1000.
FCC ID	<b>2AGN7-Z1000</b>
Operation Frequency:	IEEE 802.11a/n/ac(HT20)5.745GHz-5.825GHz IEEE 802.11n/ac(HT40)5.755GHz-5.795GHz IEEE 802.11ac(HT80) 5.775GHz
Modulation Technology:	IEEE 802.11a/n/ac
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Antenna Type	PCB Antenna
Antenna Gain	Antenna 1:1dBi Antenna 2:1dBi MIMO: 4.010dBi
Power Source	AC 100-240V, 50/60Hz
Power Supply:	AC 100-240V, 50/60Hz
Note:	The EUT incorporates a MIMO function. Physically, it provides two completed transmitters and receivers(2T2R), two transmit signals are completely correlated, then, Direction gain= $G_{ANT}+10*\log(2)$ dBi.



## 2.2. Operation Frequency each of channel

802.11a/802.11n(HT20) 802.11ac(HT20)		802.11n(HT40)/ 802.11ac(HT40)		802.11ac(HT80)	
Channel	Frequency	Channel	Frequency	Channel	Frequency
149	5745	151	5755	155	5775
153	5765	159	5790		
157	5785				
161	5805				
165	5825				

**Note:**

*In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:*

## 2.3. Operation of EUT during testing

Band IV (5725 - 5850 MHz)		
For 802.11a/n (HT20)/ac(HT20)		
Channel Number	Channel	Frequency (MHz)
149	Low	5745
157	Mid	5785
165	High	5825

For 802.11n (HT40)/ ac(HT40)		
Channel Number	Channel	Frequency (MHz)
151	Low	5755
159	High	5795
For 802.11ac(HT80)		
Channel Number	Channel	Frequency (MHz)
155	/	5775




## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation testing:



Operation of EUT during Above1GHz Radiation testing:



- Display information  
Model: 24PFF3661/T3  
Input: AC120V/60Hz





### 3. Genera Information

#### 3.1. Test environment and mode

Operating Environment:	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
Test Mode:	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 100%)
<p>The sample was placed 0.8m/1.5m for blow/above 1GHz above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y &amp; Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages.</p>	

<p>We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:</p>	
<b>Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.</b>	
Mode	Data rate
802.11a	6 Mbps
802.11n(HT20)	MCS0
802.11n(HT40)	MCS0
802.11ac(HT20)/ac(HT40)/ac(HT80)	/
Final Test Mode:	
Operation mode:	Keep the EUT in continuous transmitting with modulation



### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
/	/	/	/	/

**Note:**

- 1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.*
- 2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.*
- 3. For conducted measurements (Output Power, Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.*



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### 4.1.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dBuV)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p>Reference Plane</p> <p>40cm</p> <p>80cm</p> <p>E.U.T</p> <p>AC power</p> <p>Test table/Insulation plane</p> <p>LISN</p> <p>Filter</p> <p>AC power</p> <p>EMI Receiver</p> <p><i>Remark:</i>  <i>E.U.T: Equipment Under Test</i>  <i>LISN: Line Impedance Stabilization Network</i>  <i>Test table height=0.8m</i></p>														
<b>Test Mode:</b>	Tx Mode														
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The E.U.T and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li> <li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li> <li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li> </ol>														
<b>Test Result:</b>	PASS														



#### 4.1.2. Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Dec. 27, 2019
LISN	R&S	ENV216	HKE-002	Dec. 27, 2019
Coax cable (9KHz-30MHz)	Times	381806-002	N/A	Dec. 27, 2019
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



### 4.1.3. Test data

All the test modes completed for test. only the worst result of AC240V/60Hz(802.11a at 5745MHz) was reported as below:

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

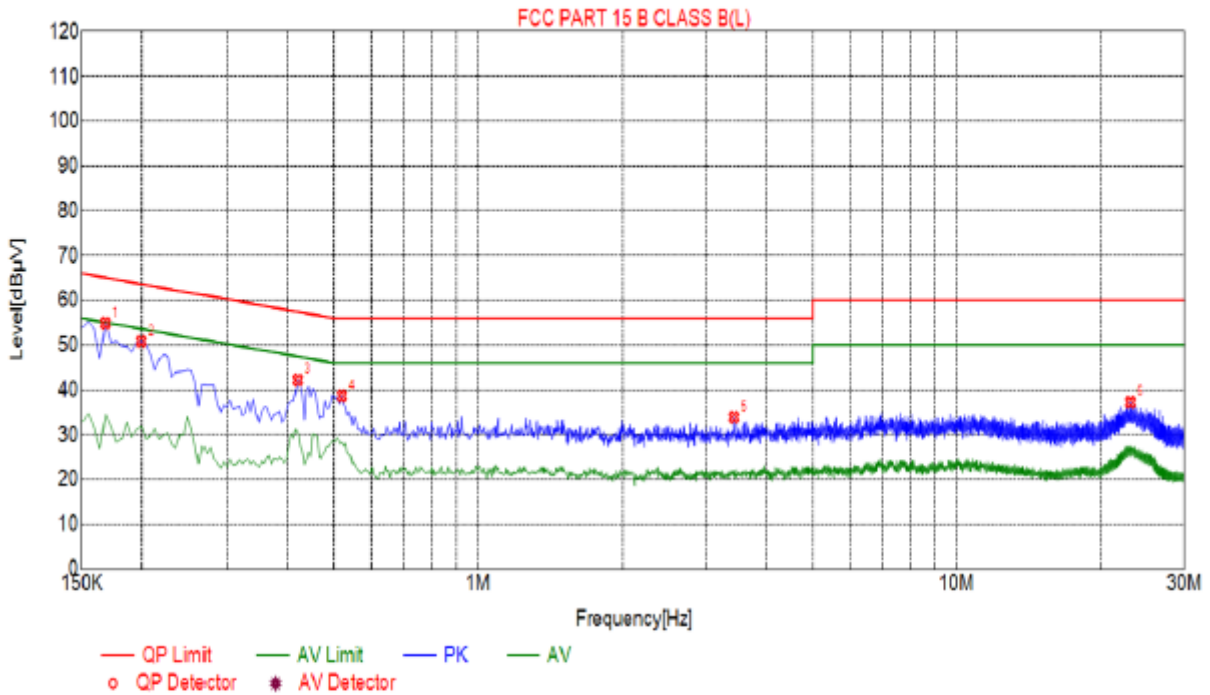


Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.1680	54.90	10.01	65.06	10.16	PK
2	0.1995	50.89	10.03	63.63	12.74	PK
3	0.4200	42.23	10.04	57.45	15.22	PK
4	0.5190	38.67	10.04	56.00	17.33	PK
5	3.4260	33.91	10.24	56.00	22.09	PK
6	23.0910	37.26	10.19	60.00	22.74	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)

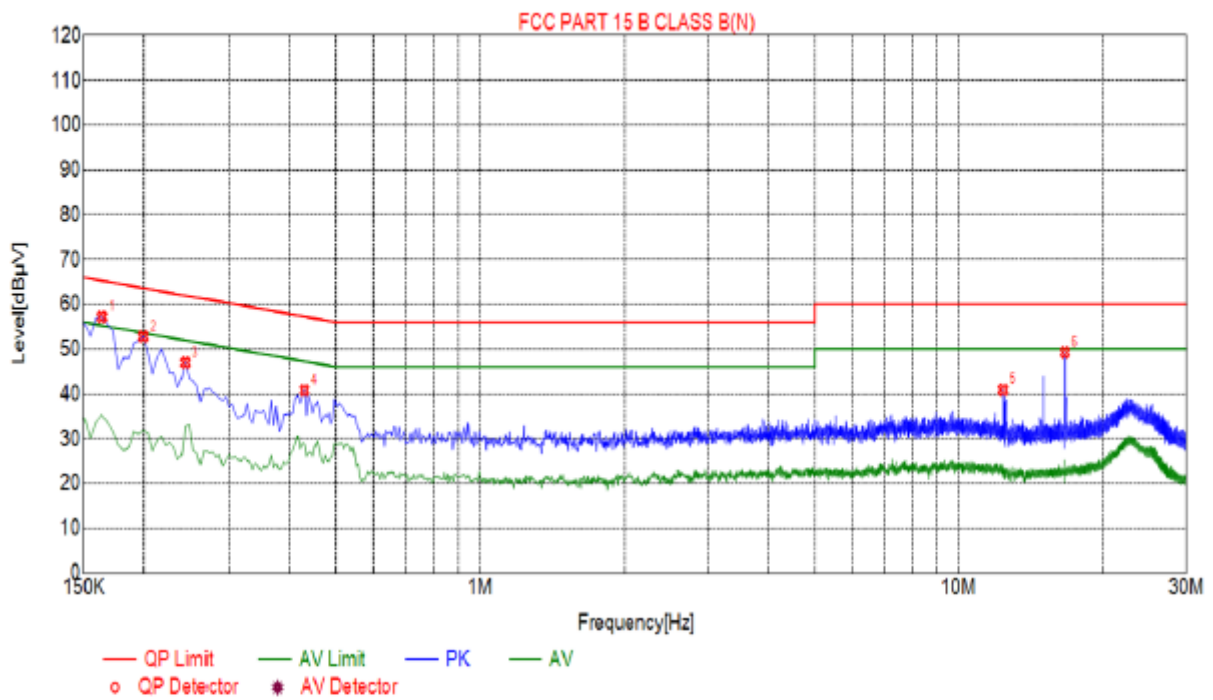

Suspected List						
NO.	Freq. [MHz]	Level [dBµV]	Factor [dB]	Limit [dBµV]	Margin [dB]	Detector
1	0.1635	57.18	9.98	65.28	8.10	PK
2	0.1995	52.79	10.03	63.63	10.84	PK
3	0.2445	46.96	10.03	61.94	14.98	PK
4	0.4290	40.84	10.05	57.27	16.43	PK
5	12.3945	40.92	9.98	60.00	19.08	PK
6	16.6740	49.30	9.99	60.00	10.70	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level





#### 4.2.2. Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Power meter	Agilent	E4419B	HKE-085	Dec. 27, 2019
Power Sensor	Agilent	E9300A	HKE-086	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Dec. 27, 2019

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



**Test Data**

<b>Configuration Band IV (5725 - 5850 MHz )</b>						
Mode	Test channel	Maximum Conducted Output Power (dBm)			FCC Limit (dBm)	Result
		Antenna port 1	Antenna port 2	MIMO		
11a	CH149	10.30	10.79	/	30	PASS
11a	CH157	10.05	9.96	/	30	PASS
11a	CH165	10.69	10.42	/	30	PASS
11n(HT20)	CH149	9.77	9.59	12.69	30	PASS
11n(HT20)	CH157	9.70	9.79	12.76	30	PASS
11n(HT20)	CH165	9.78	9.88	12.84	30	PASS
11n(HT40)	CH151	9.50	9.79	12.66	30	PASS
11n(HT40)	CH159	9.43	9.41	12.43	30	PASS
11ac(HT20)	CH149	9.74	9.84	12.80	30	PASS
11ac(HT20)	CH157	9.31	8.98	12.16	30	PASS
11ac(HT20)	CH165	9.32	8.49	11.94	30	PASS
11ac(HT40)	CH151	8.89	8.41	11.67	30	PASS
11ac(HT40)	CH159	8.74	8.58	11.67	30	PASS
11ac(HT80)	CH155	8.80	8.91	11.87	30	PASS




**4.3.3. Test data****ANT 1**



<b>Band IV (5725 - 5850 MHz )</b>					
<b>Mode</b>	<b>Test channel</b>	<b>Frequency (MHz)</b>	<b>6 dB Bandwidth (MHz)</b>	<b>Limit (MHz)</b>	<b>Result</b>
11a	CH149	5745	16.46	0.5	PASS
11a	CH157	5785	16.48	0.5	PASS
11a	CH165	5825	16.41	0.5	PASS
11n(HT20)	CH149	5745	17.66	0.5	PASS
11n(HT20)	CH157	5785	17.62	0.5	PASS
11n(HT20)	CH165	5825	17.66	0.5	PASS
11n(HT40)	CH151	5755	36.37	0.5	PASS
11n(HT40)	CH159	5795	36.37	0.5	PASS
11ac(HT20)	CH149	5745	17.63	0.5	PASS
11ac(HT20)	CH157	5785	17.67	0.5	PASS
11ac(HT20)	CH165	5825	17.64	0.5	PASS
11ac(HT40)	CH151	5755	36.36	0.5	PASS
11ac(HT40)	CH159	5795	36.32	0.5	PASS
11ac(HT80)	CH155	5775	75.25	0.5	PASS


Test plots as follows:




**Band IV (5725 – 5850 MHz)**

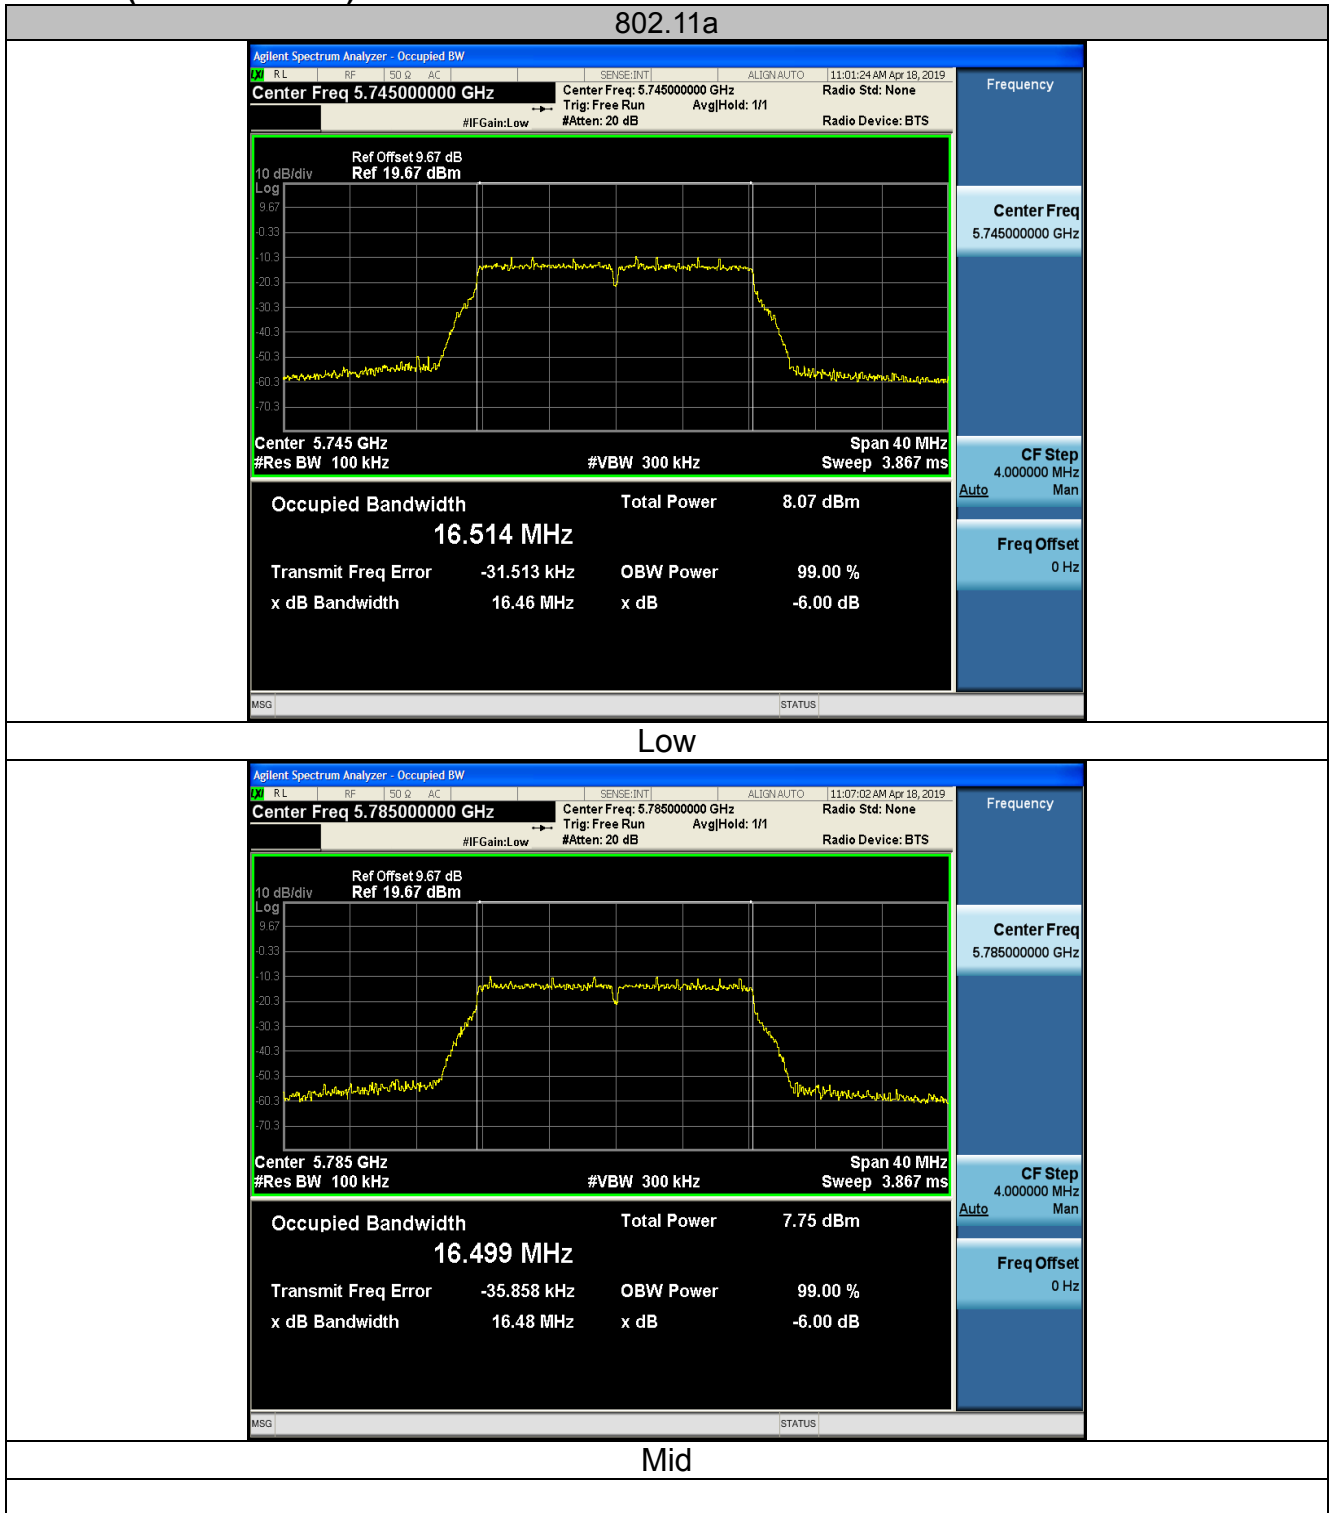

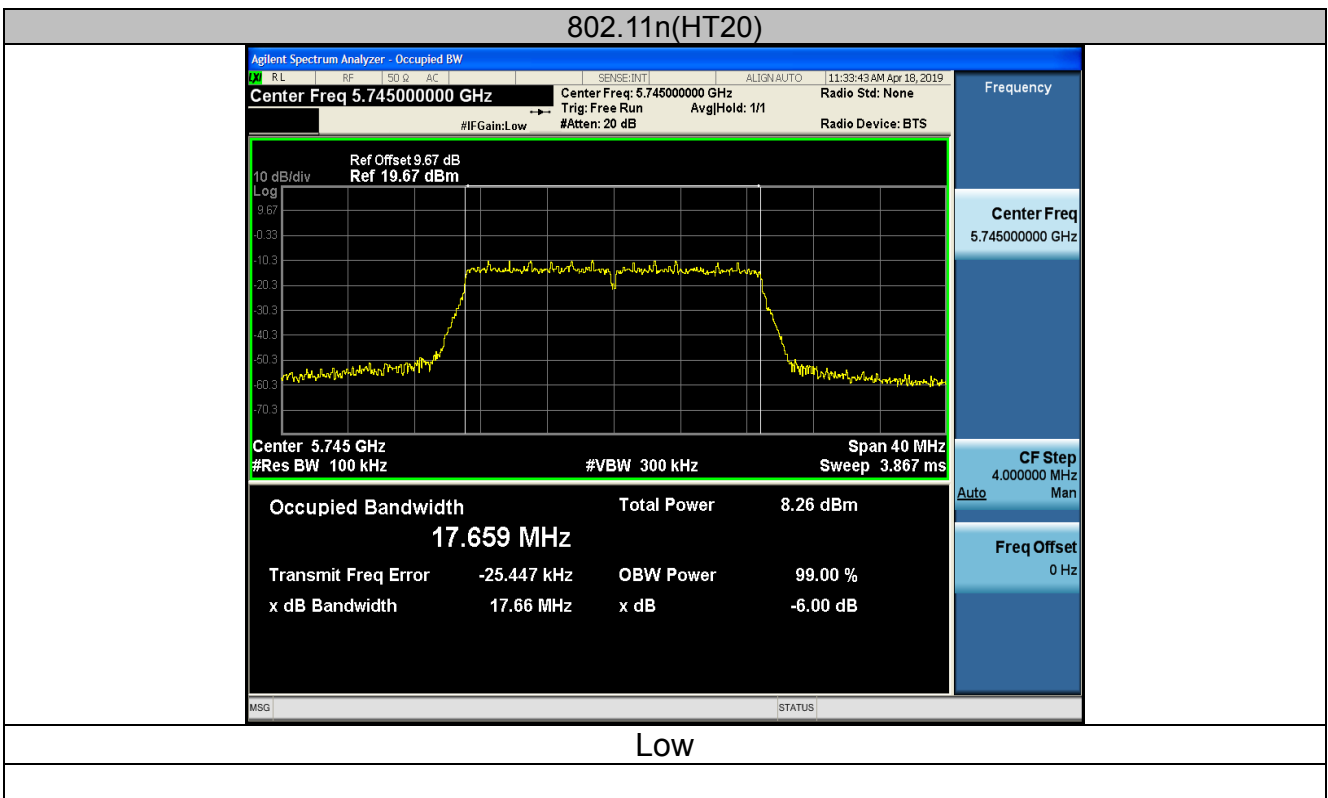
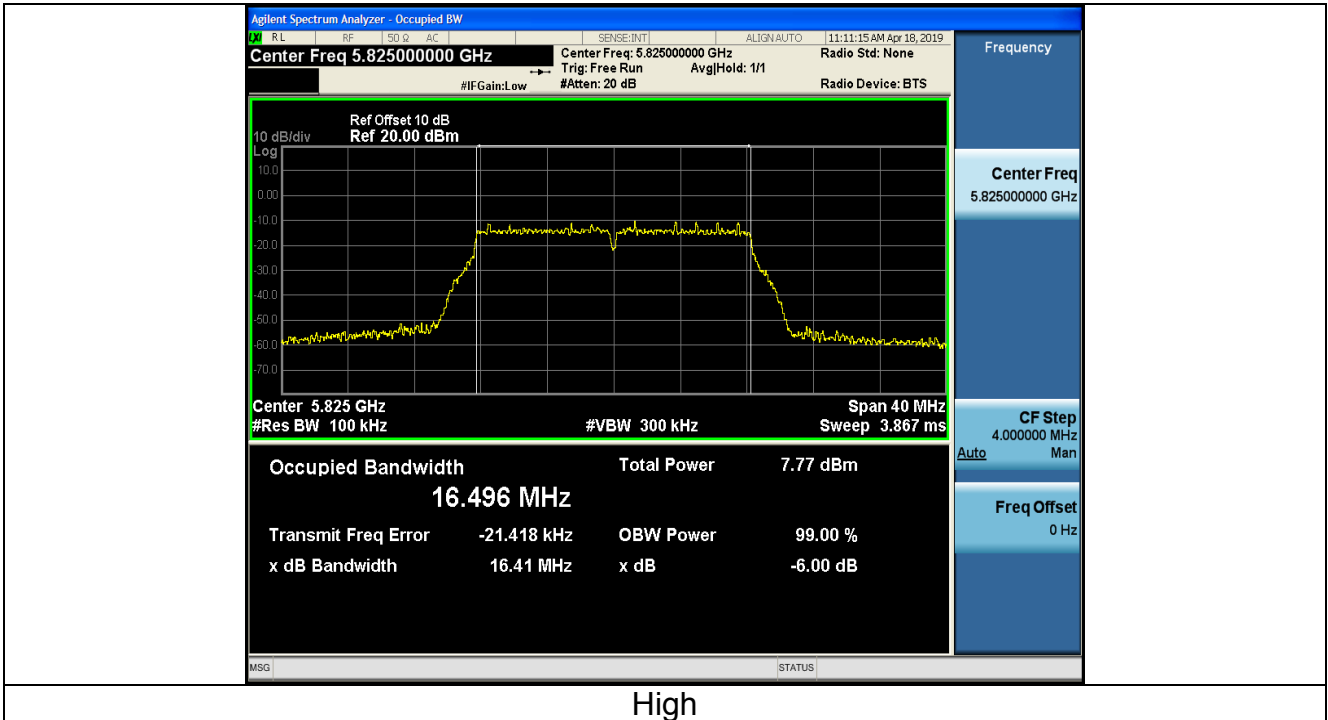


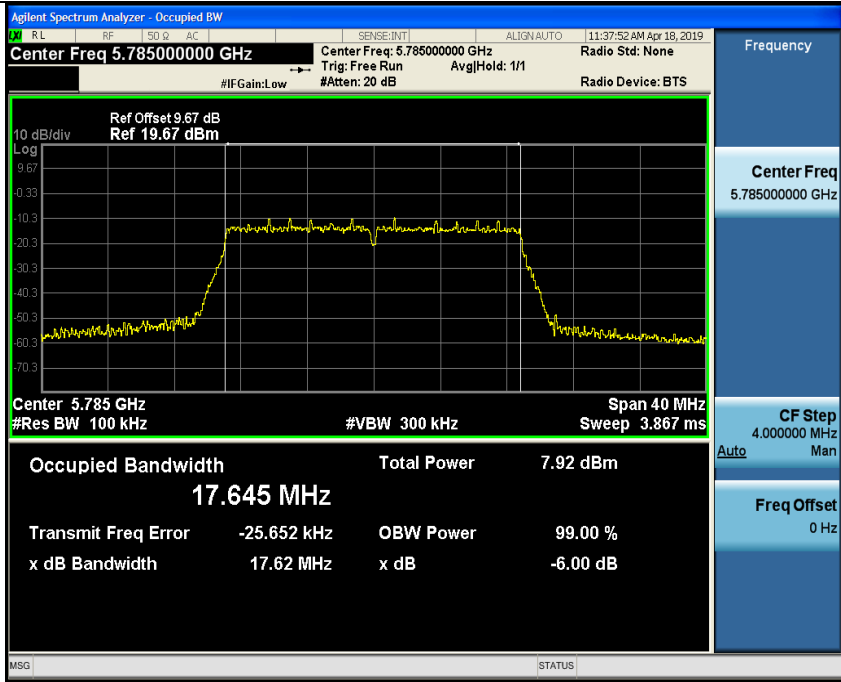


Mid

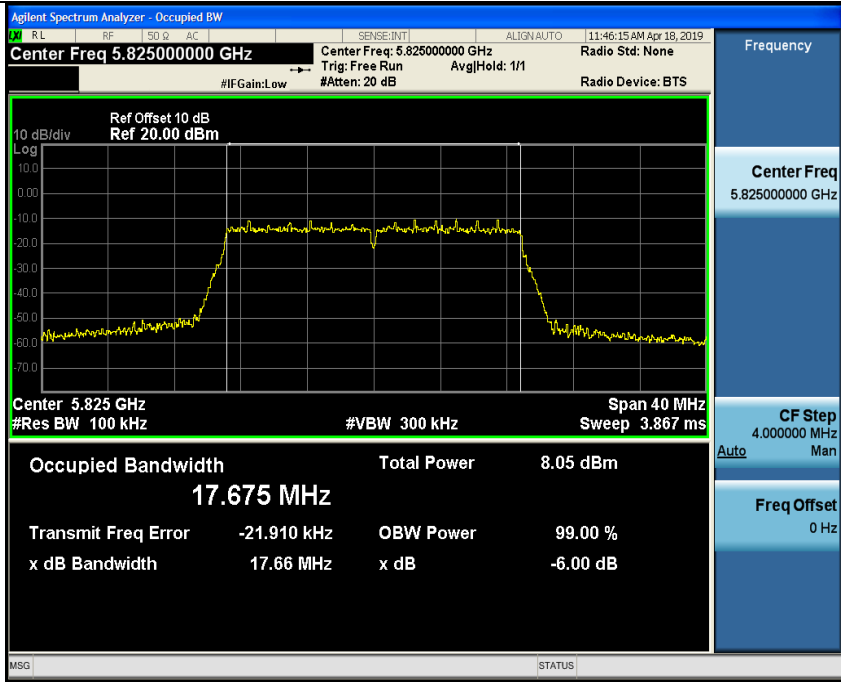


High

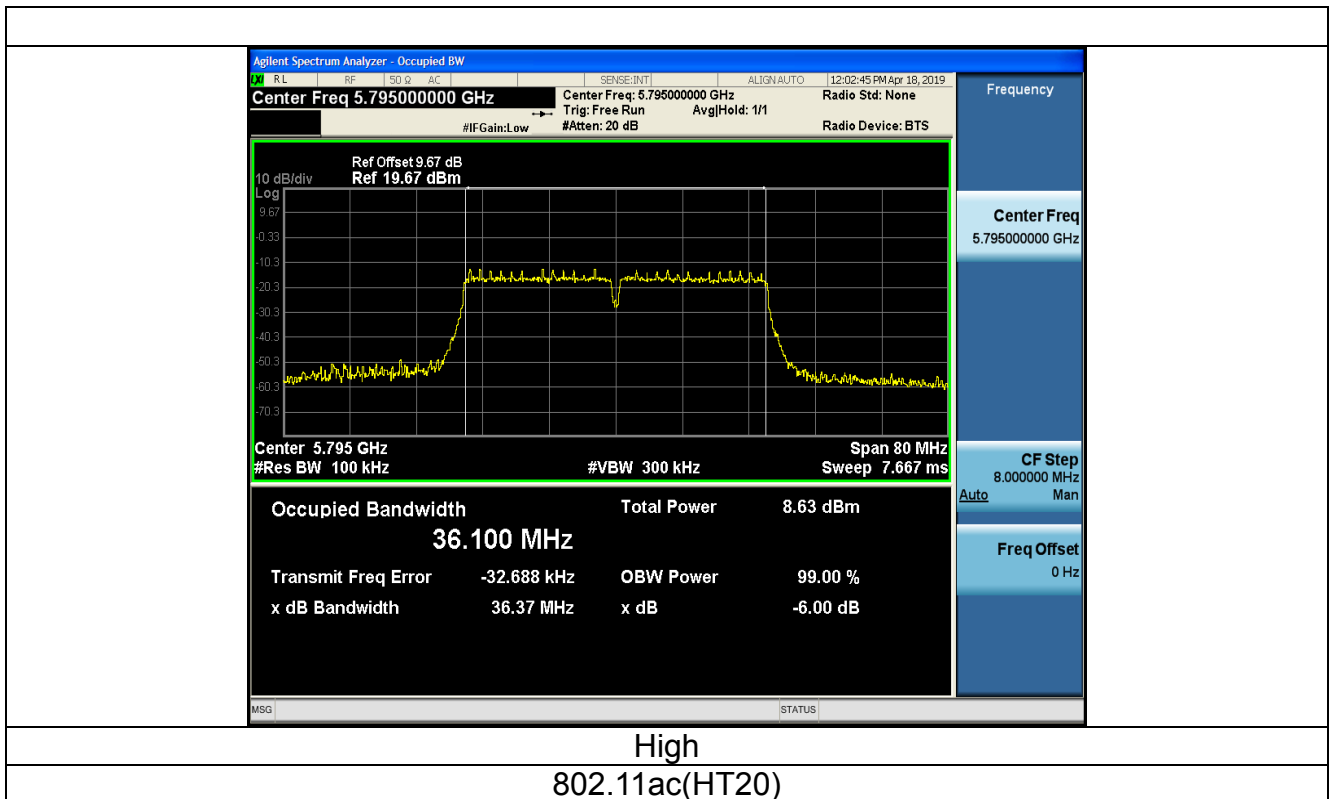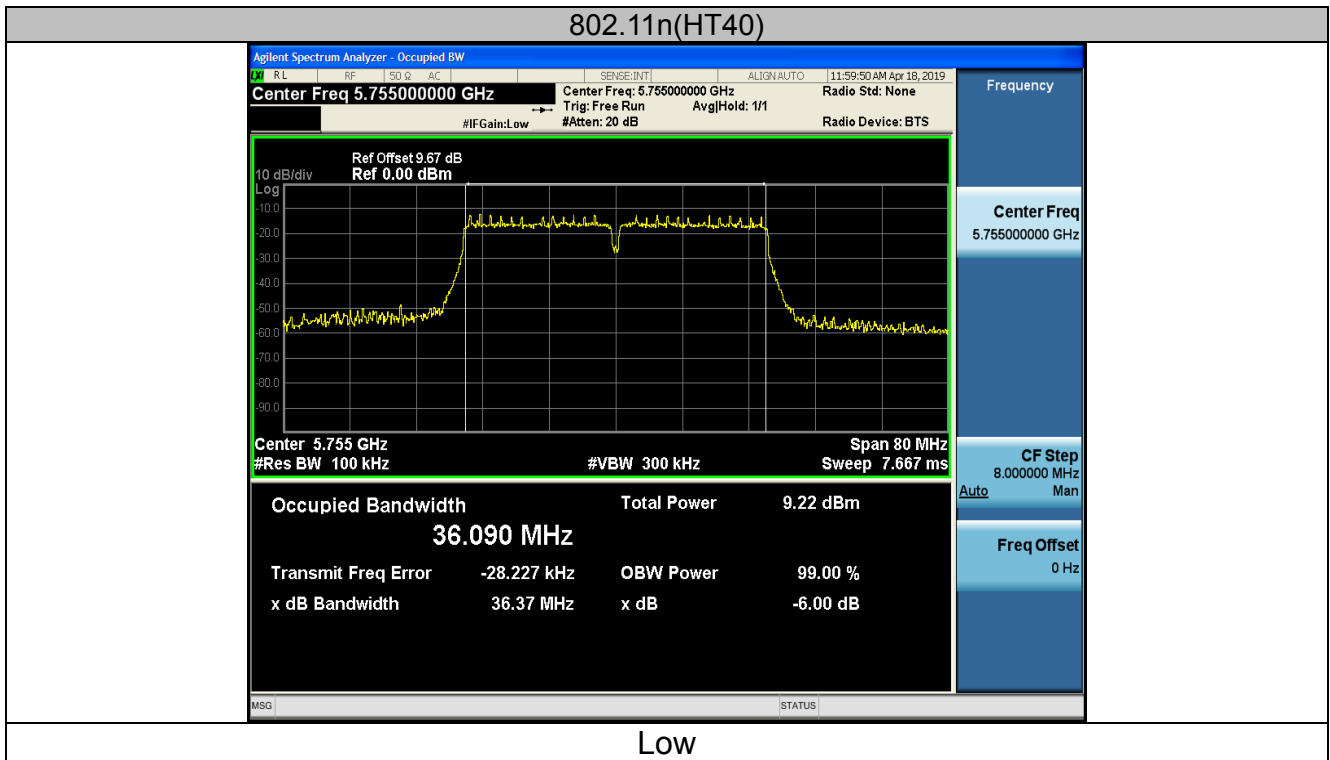


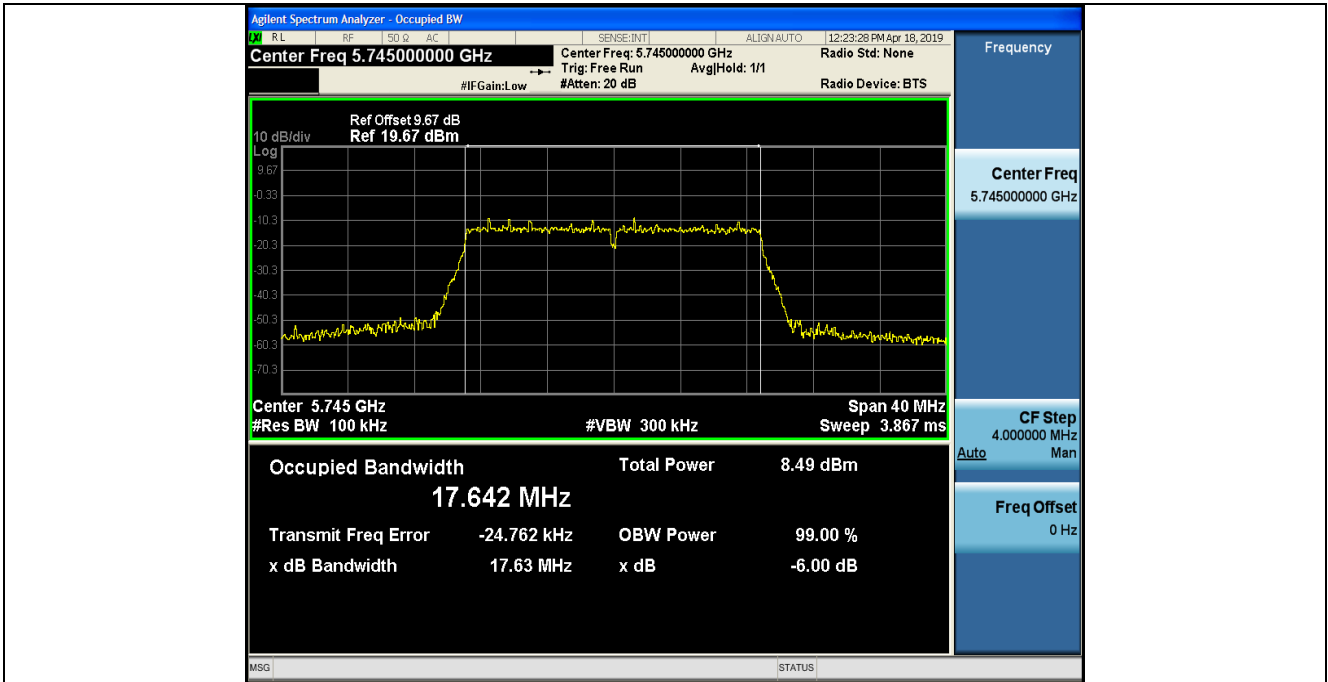



Low

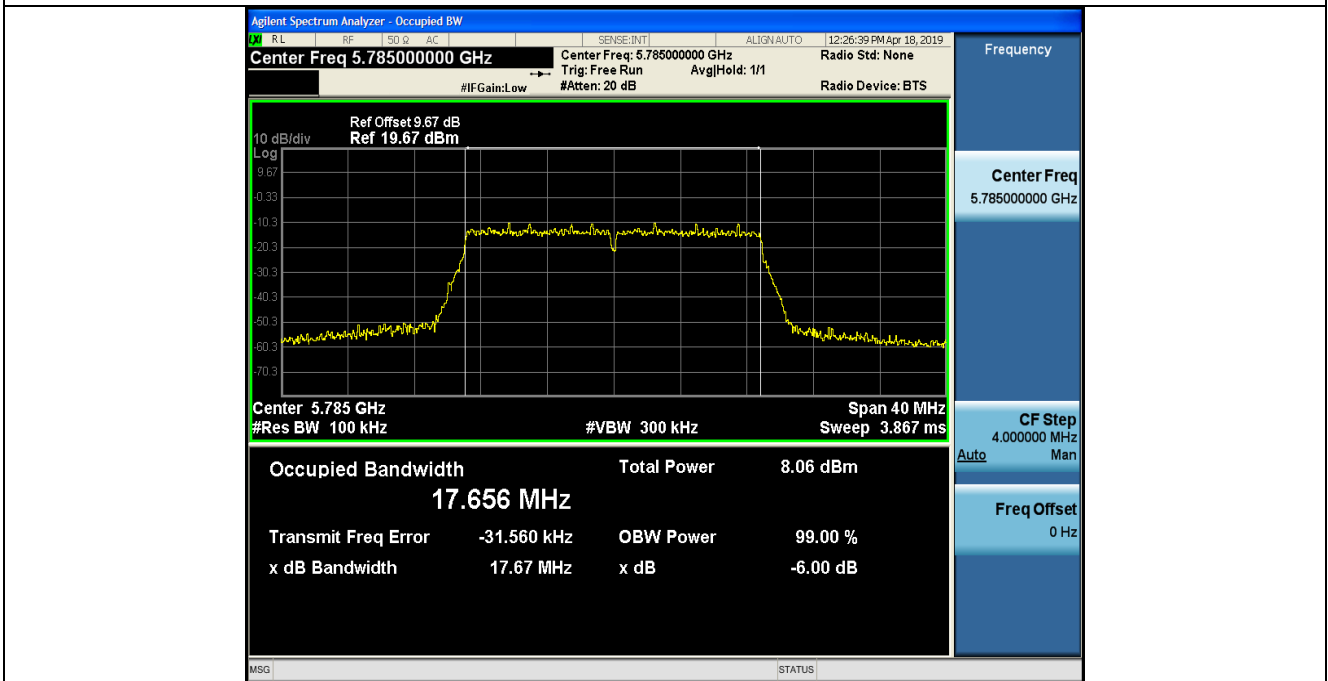

Mid




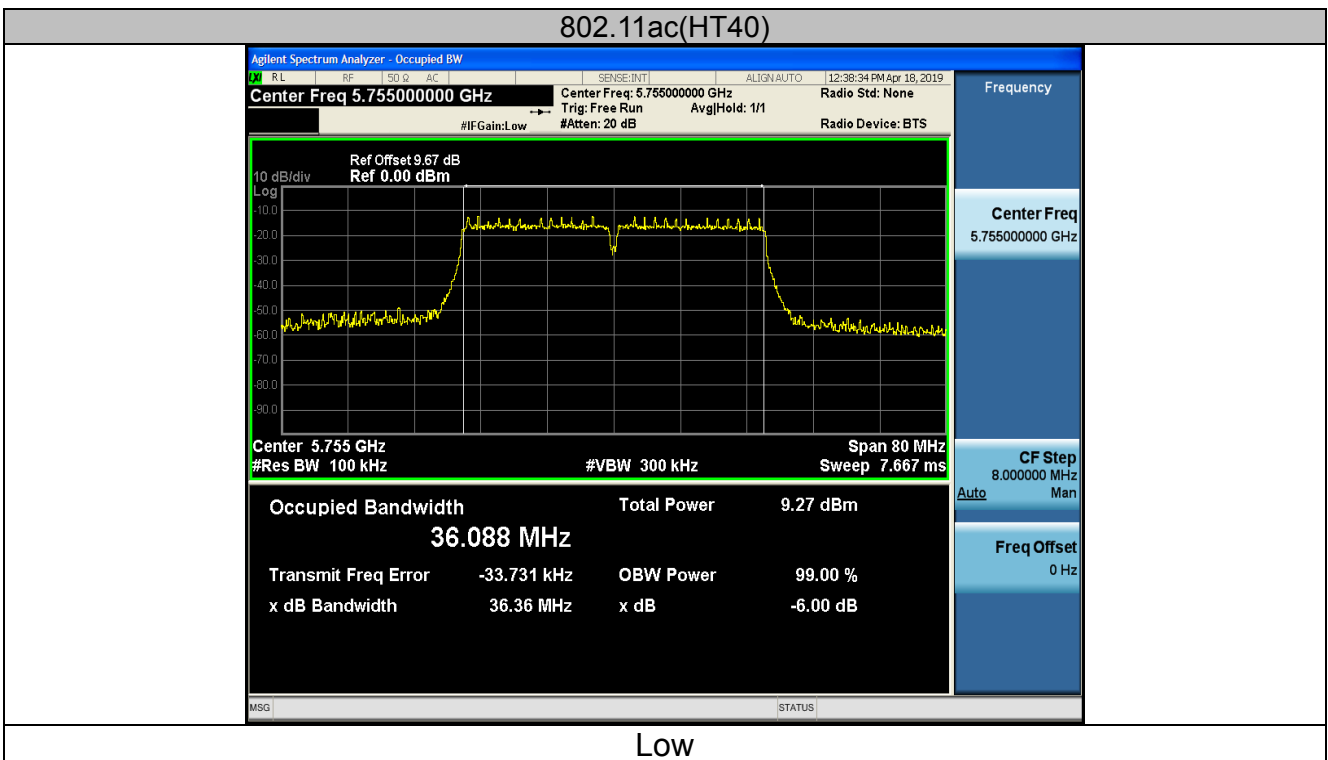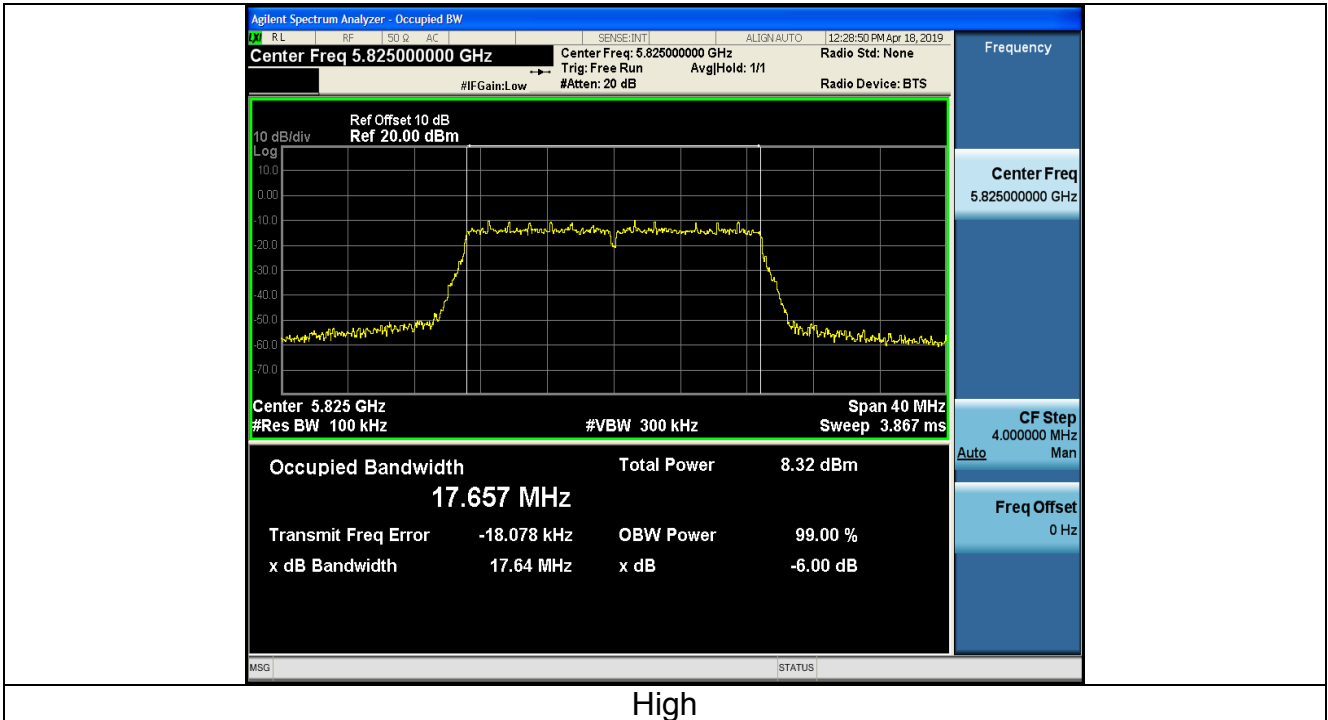

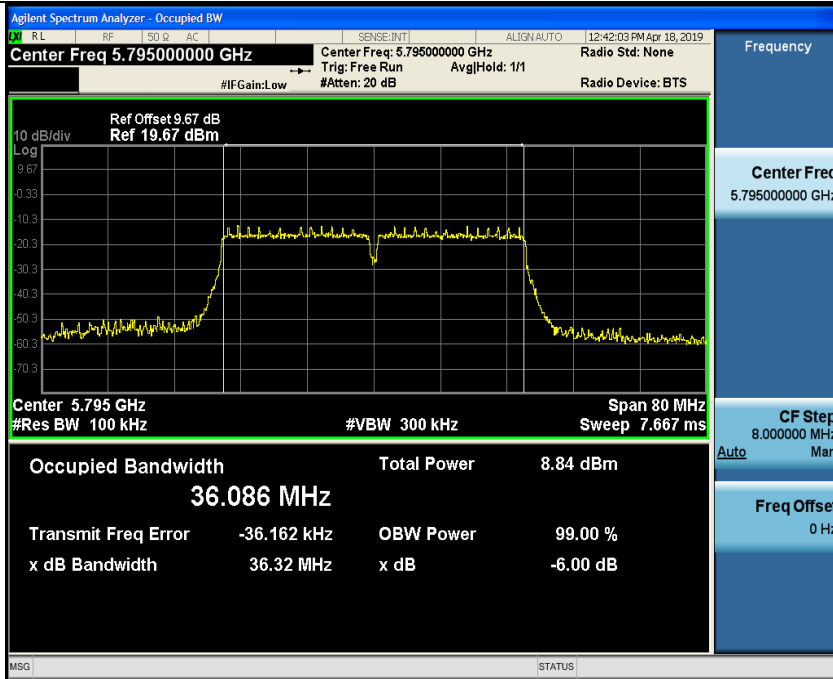

High

802.11ac(HT80)

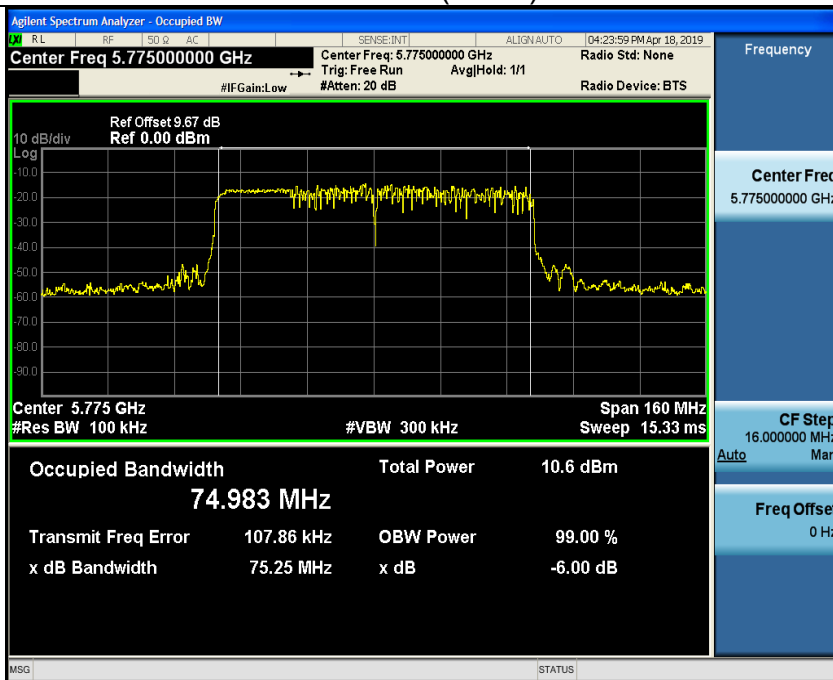

**ANT 2**


<b>Band IV (5725 - 5850 MHz )</b>					
Mode	Test channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Limit (MHz)	Result
11a	CH149	5745	16.42	0.5	PASS
11a	CH157	5785	16.42	0.5	PASS
11a	CH161	5825	16.44	0.5	PASS
11n(HT20)	CH149	5745	17.65	0.5	PASS
11n(HT20)	CH157	5785	17.63	0.5	PASS
11n(HT20)	CH161	5825	17.66	0.5	PASS
11n(HT40)	CH151	5755	36.32	0.5	PASS
11n(HT40)	CH159	5795	36.37	0.5	PASS
11ac(HT20)	CH149	5745	17.63	0.5	PASS
11ac(HT20)	CH157	5785	17.65	0.5	PASS
11ac(HT20)	CH165	5825	17.62	0.5	PASS
11ac(HT40)	CH151	5755	36.37	0.5	PASS
11ac(HT40)	CH159	5795	36.38	0.5	PASS
11ac(HT80)	CH155	5755	75.14	0.5	PASS

Test plots as follows:




**Band IV (5725 – 5850 MHz)**



802.11a

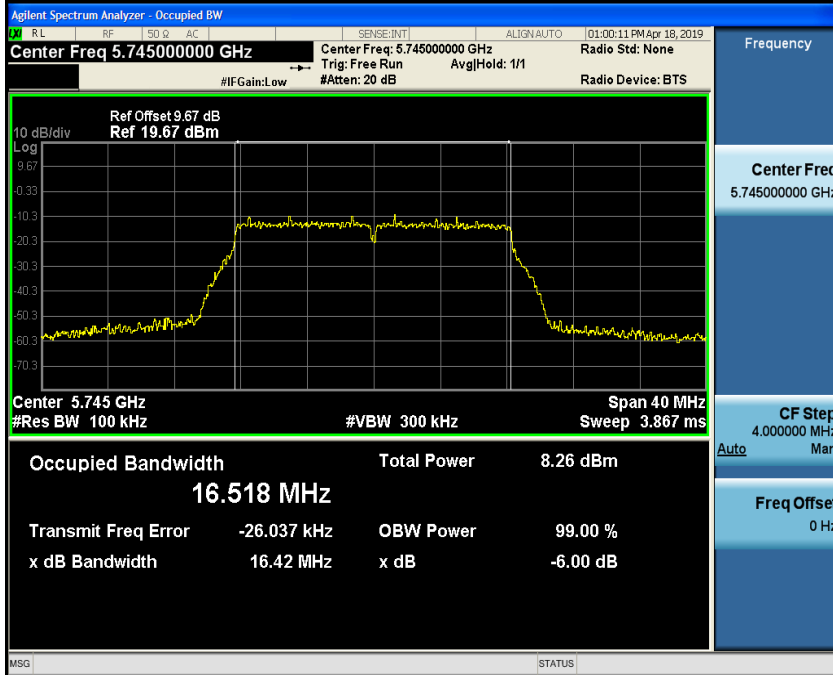


Low

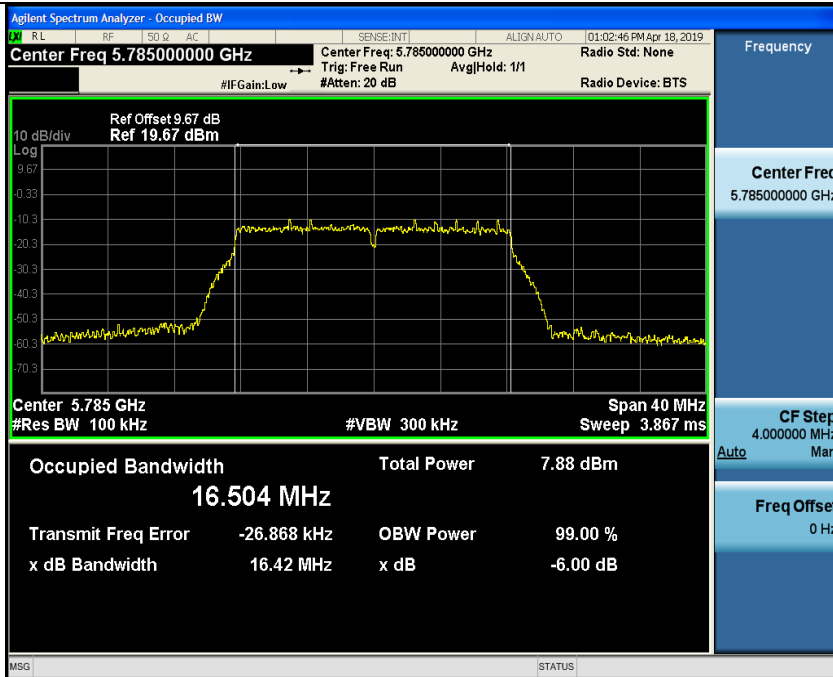


Mid

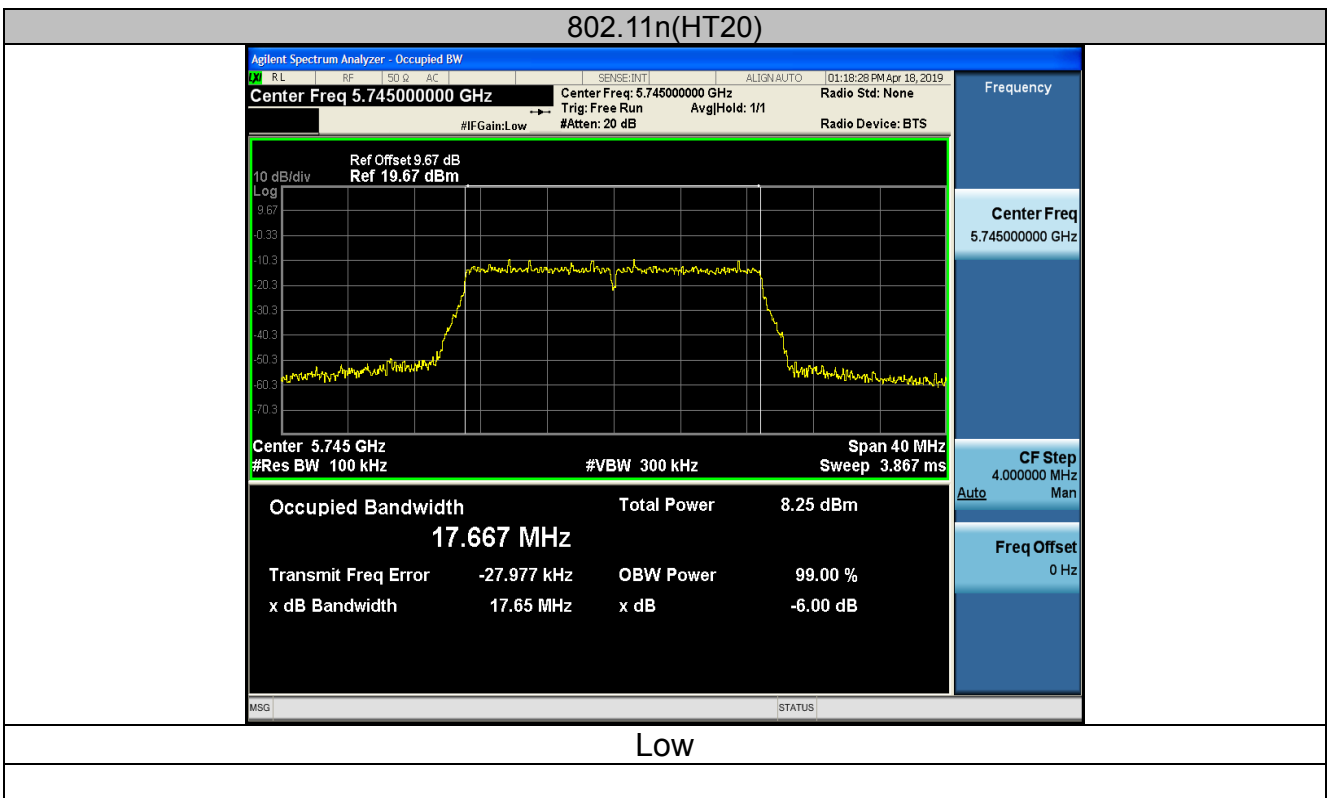
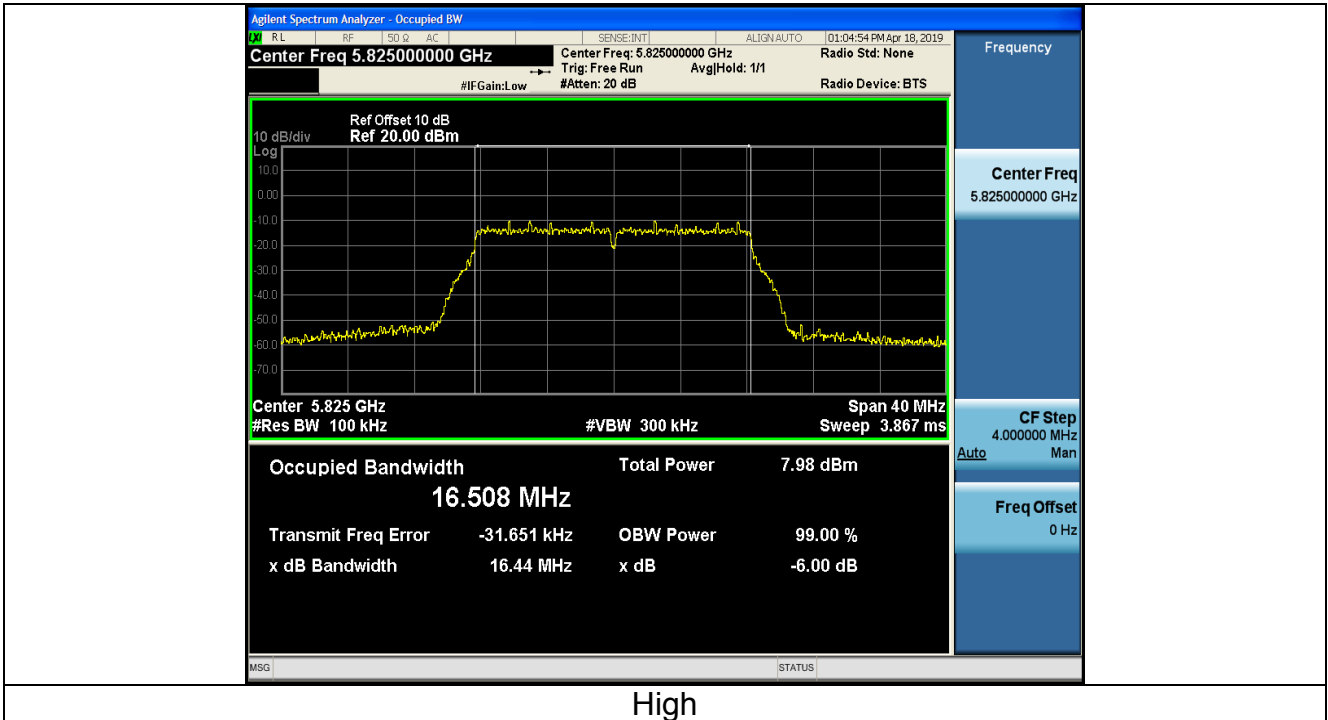


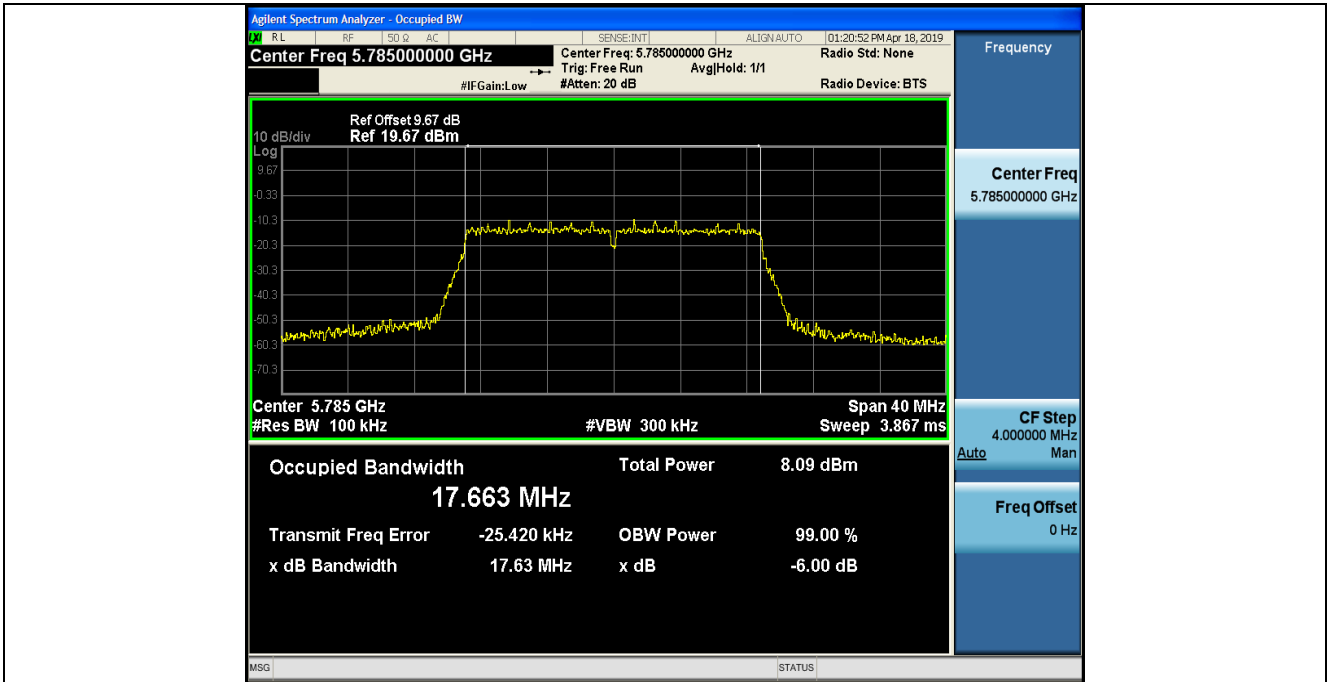


Mid

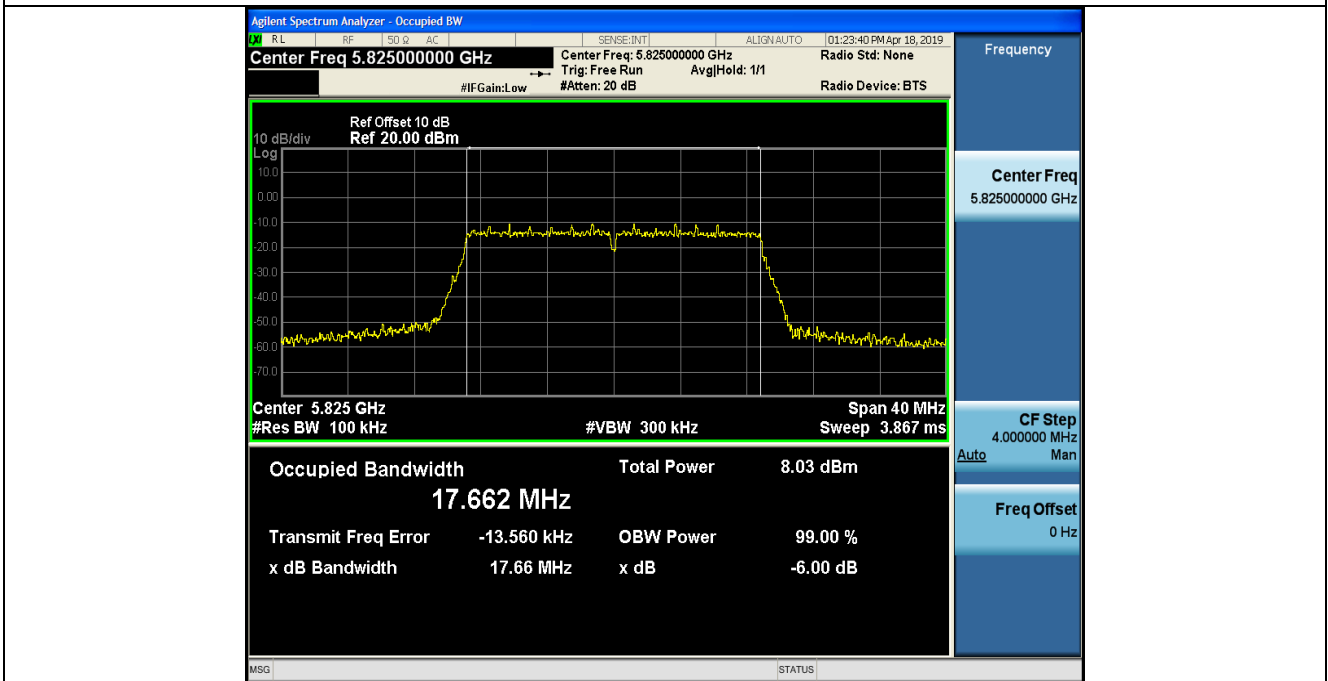


High

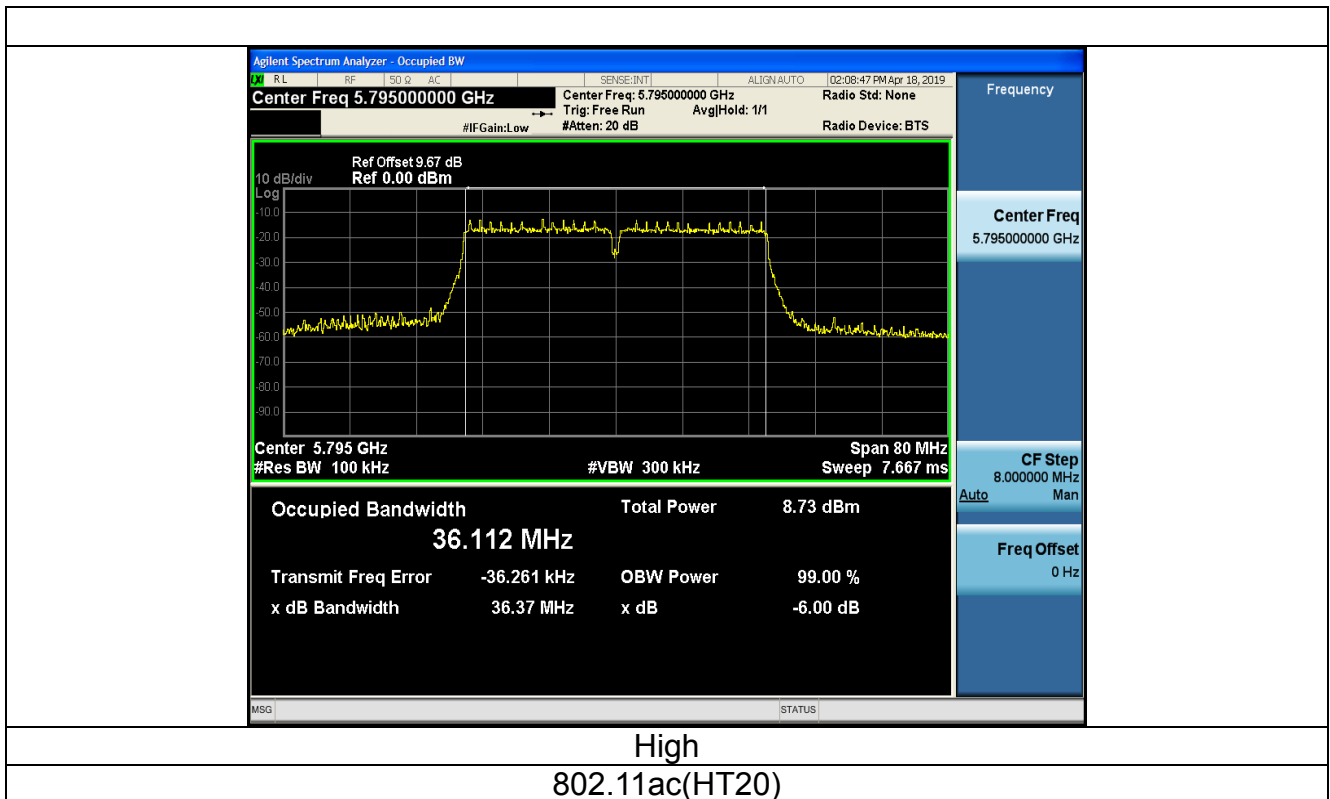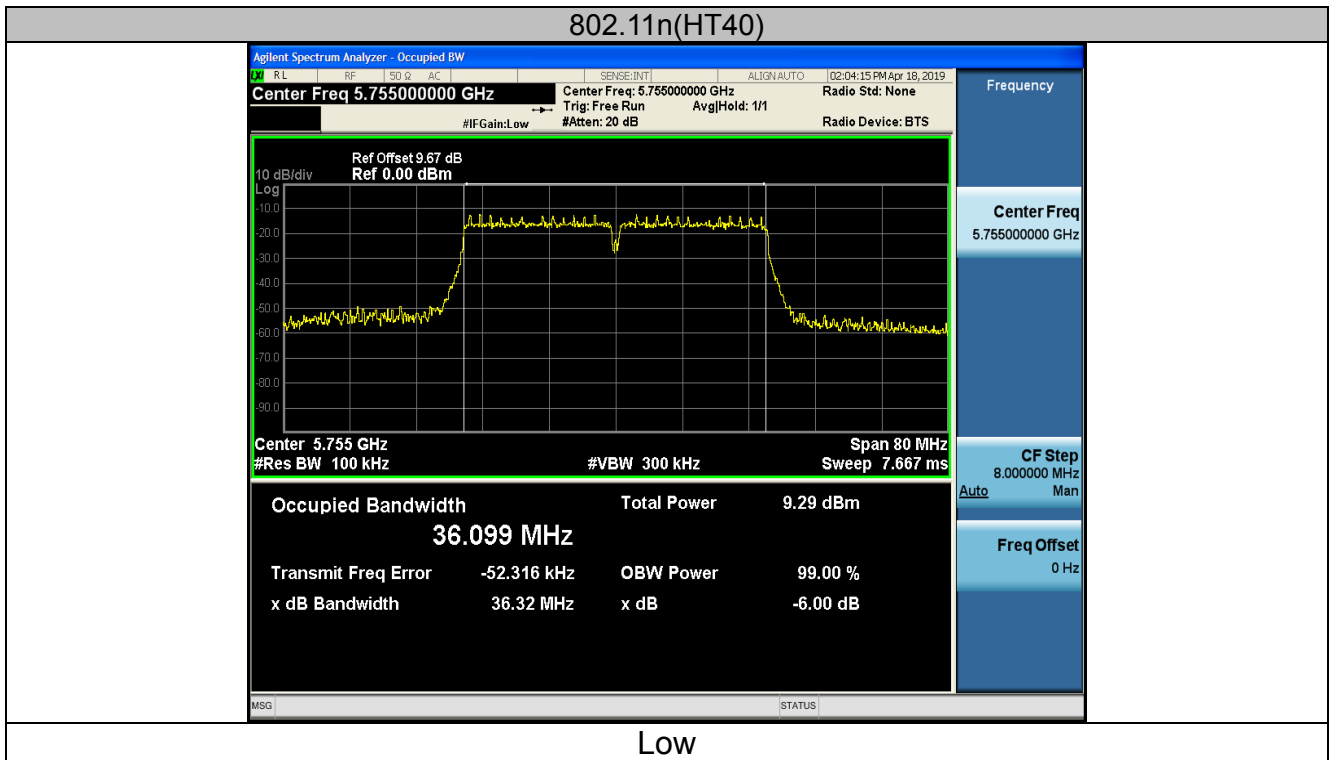


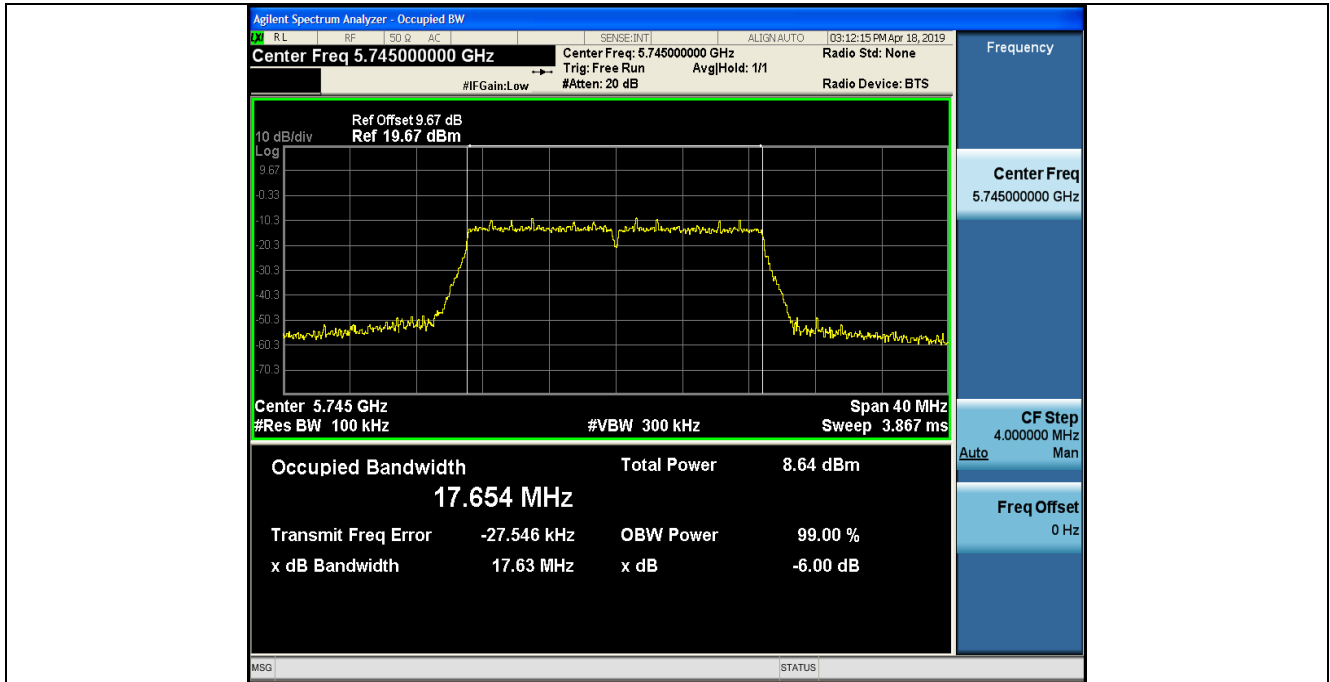



Low

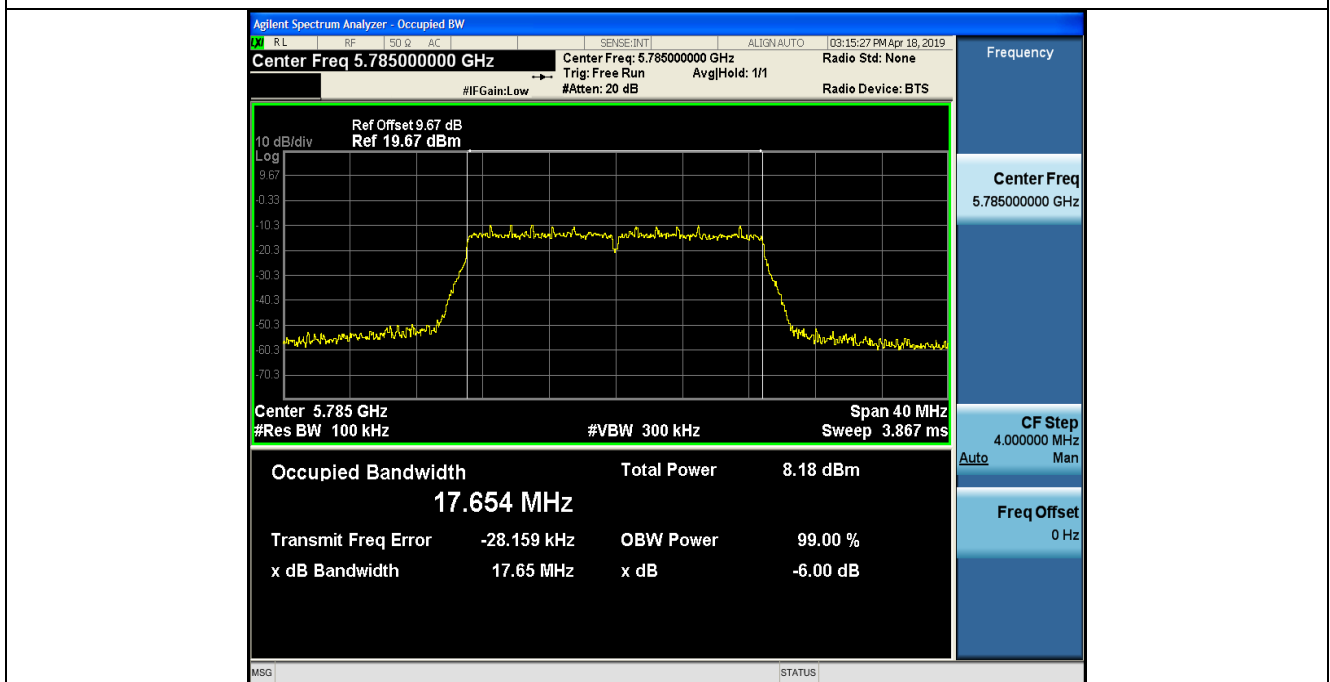

Mid




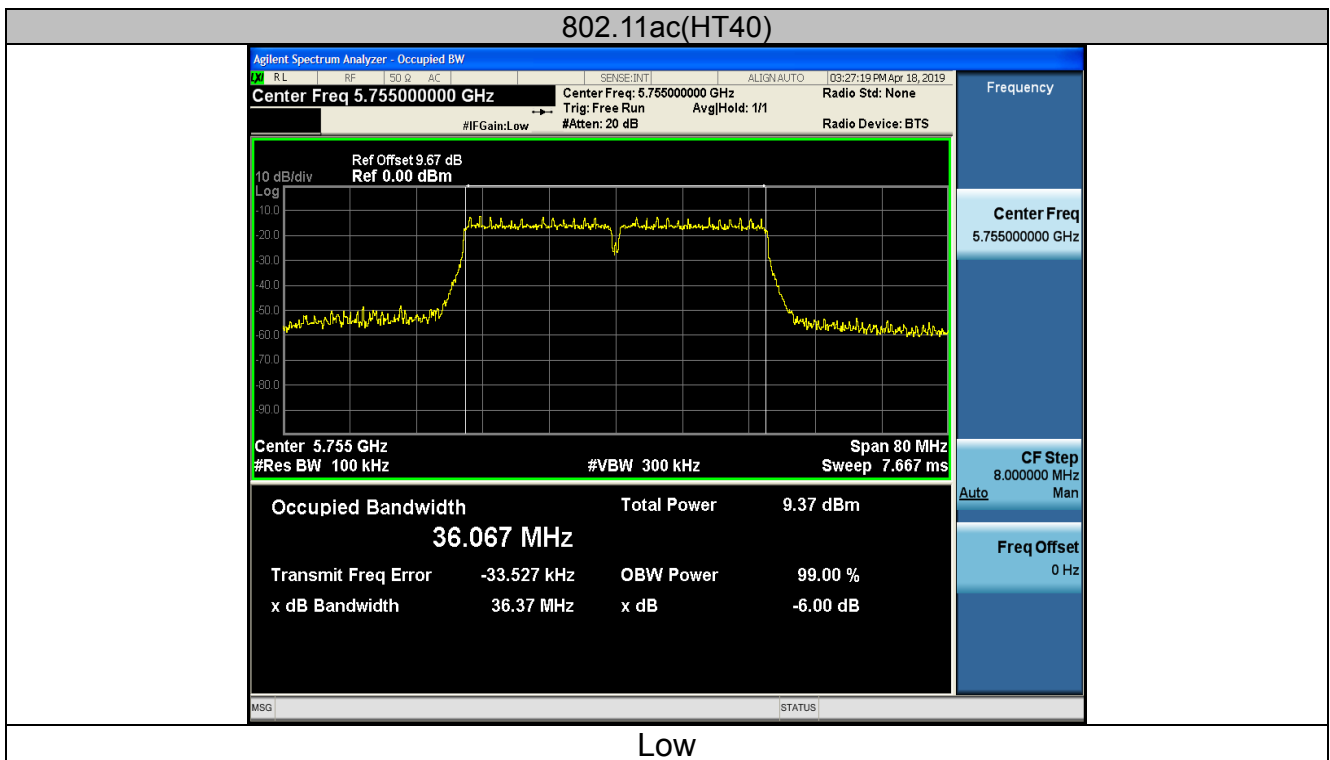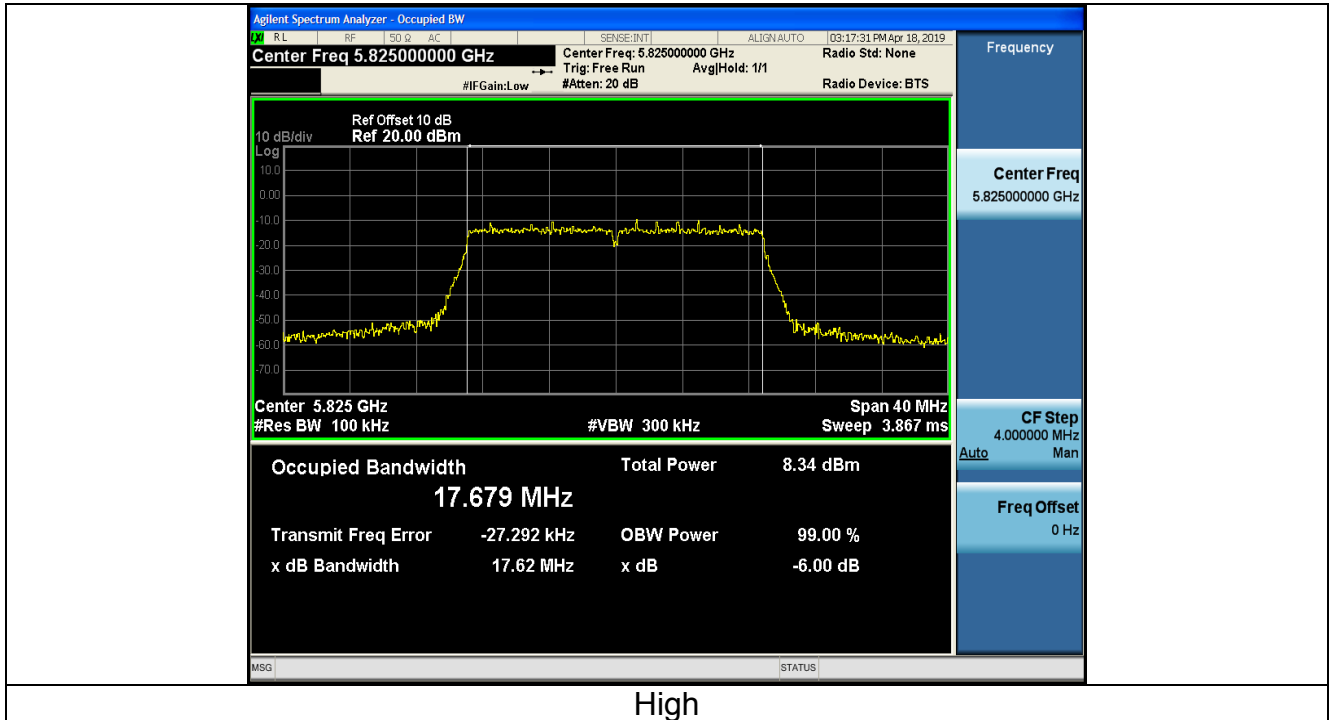

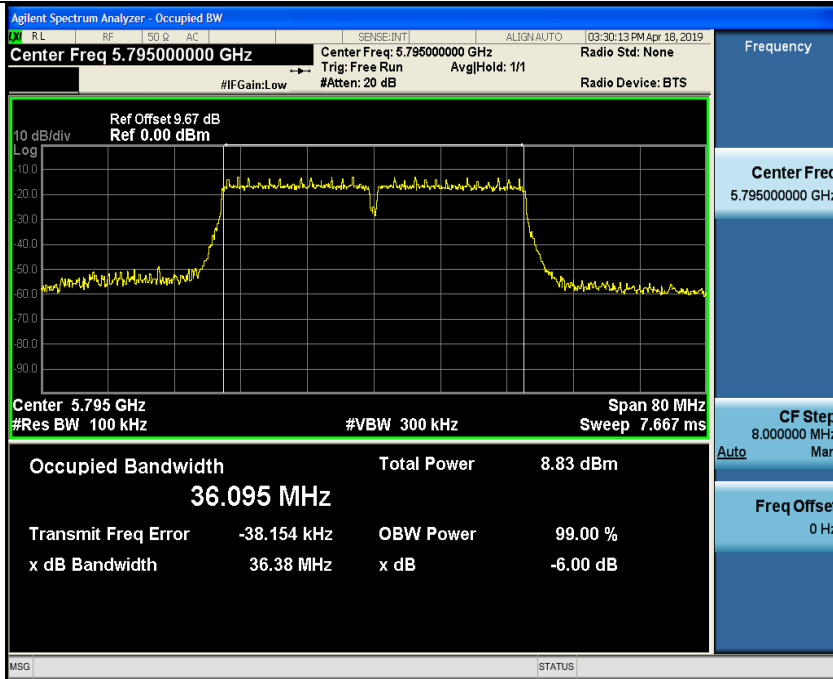

High

802.11ac(HT80)

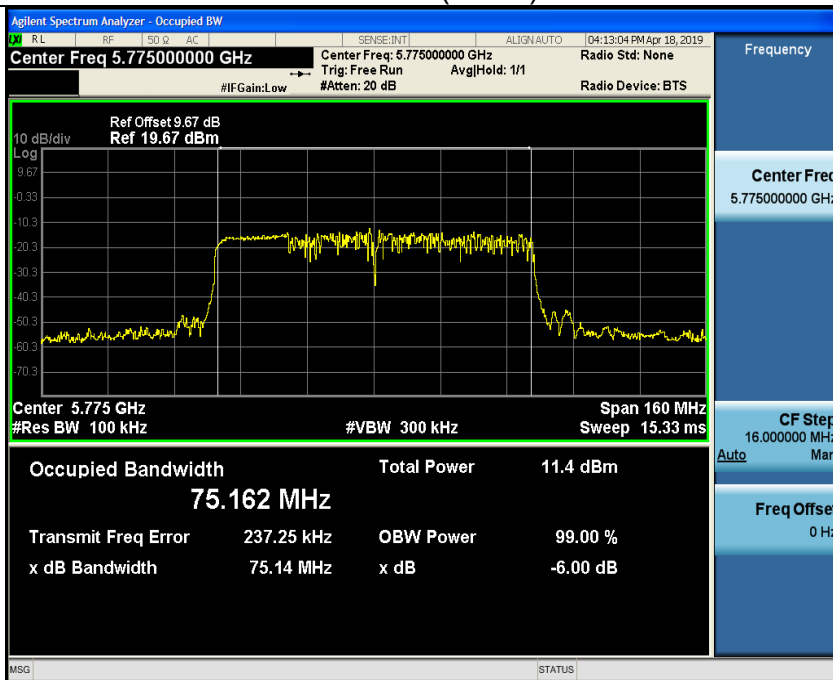







### 4.5.3. Test data

#### ANT 1

Configuration Band IV (5725 - 5850 MHz )						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	-6.28	0	-6.28	30	PASS
11a	CH157	-5.73	0	-5.73	30	PASS
11a	CH161	-5.82	0	-5.82	30	PASS
11n(HT20)	CH149	-6.14	0	-6.14	30	PASS
11n(HT20)	CH157	-6.63	0	-6.63	30	PASS
11n(HT20)	CH161	-6.36	0	-6.36	30	PASS
11n(HT40)	CH151	-8.34	0	-8.34	30	PASS
11n(HT40)	CH159	-8.75	0	-8.75	30	PASS
11ac(HT20)	CH149	-5.94	0	-5.94	30	PASS
11ac(HT20)	CH157	-6.50	0	-6.50	30	PASS
11ac(HT20)	CH161	-6.19	0	-6.19	30	PASS
11ac(HT40)	CH151	-8.43	0	-8.43	30	PASS
11ac(HT40)	CH159	-9.12	0	-9.12	30	PASS
11ac(HT80)	CH155	-4.45	0	-4.45	30	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)


802.11a



Low

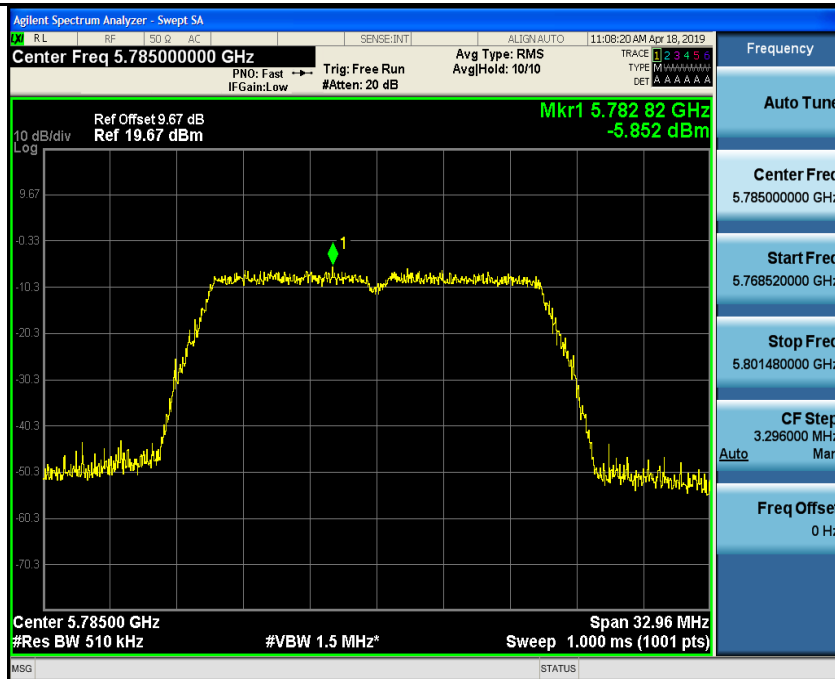


Mid

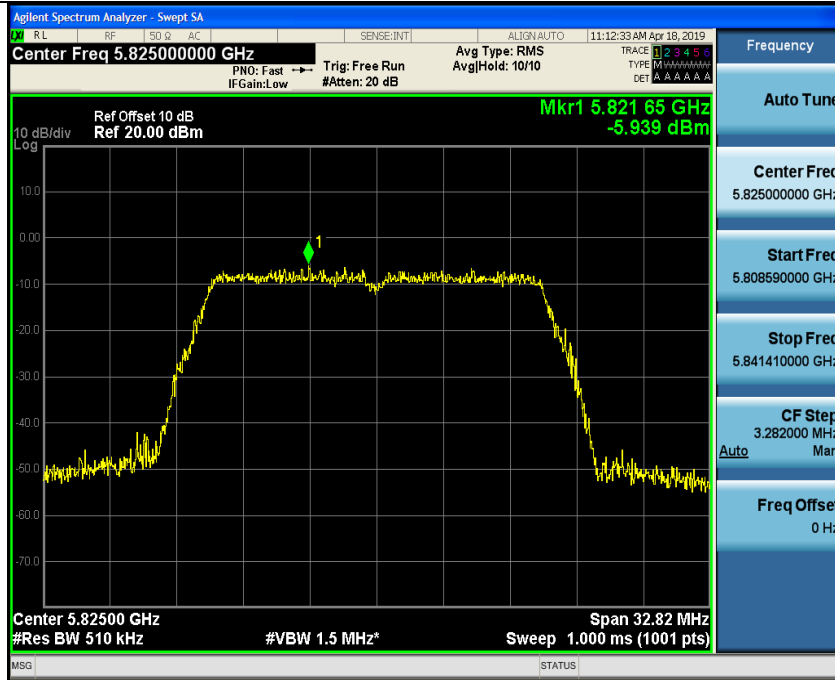


High

802.11n(HT20)

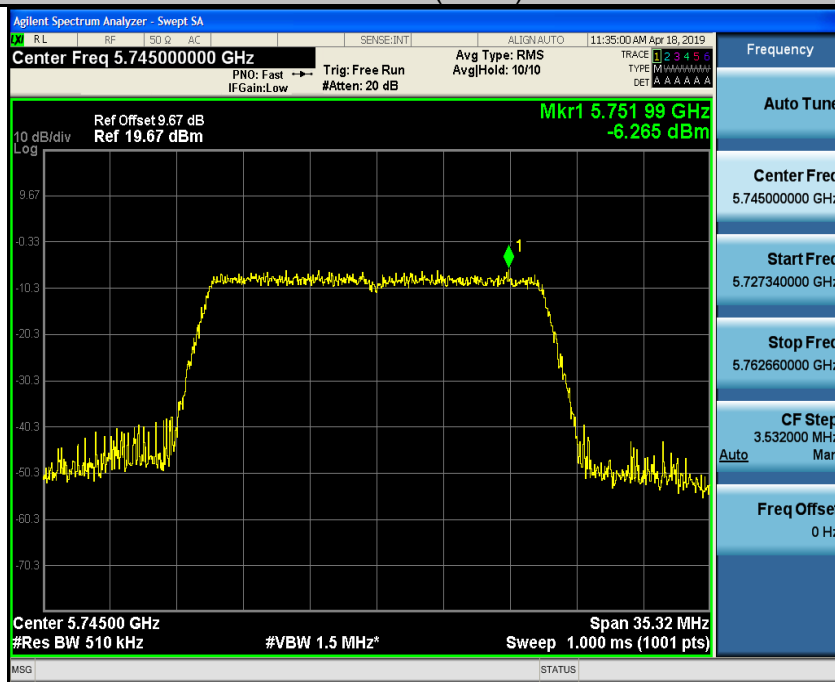

Low

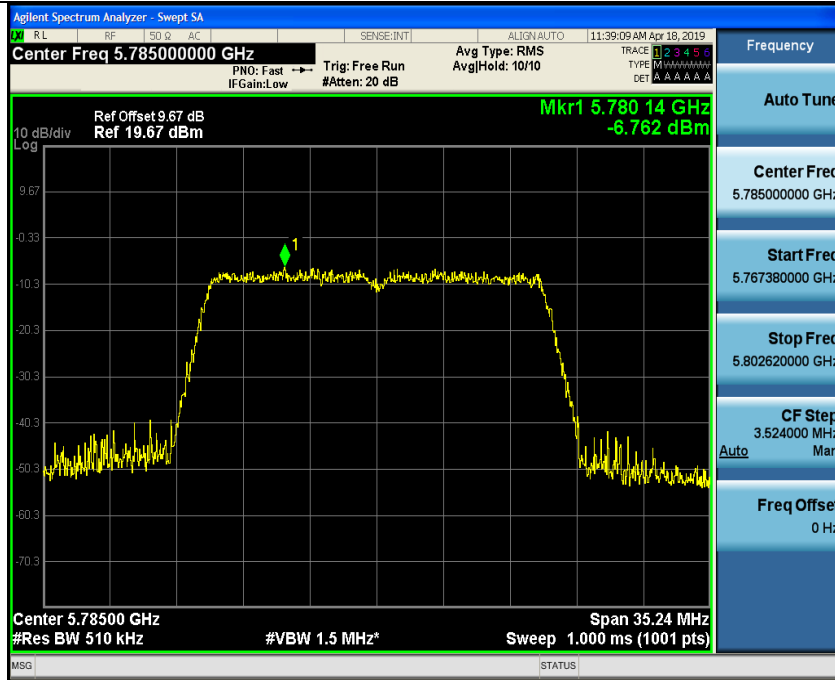

Mid




High






802.11n(HT40)

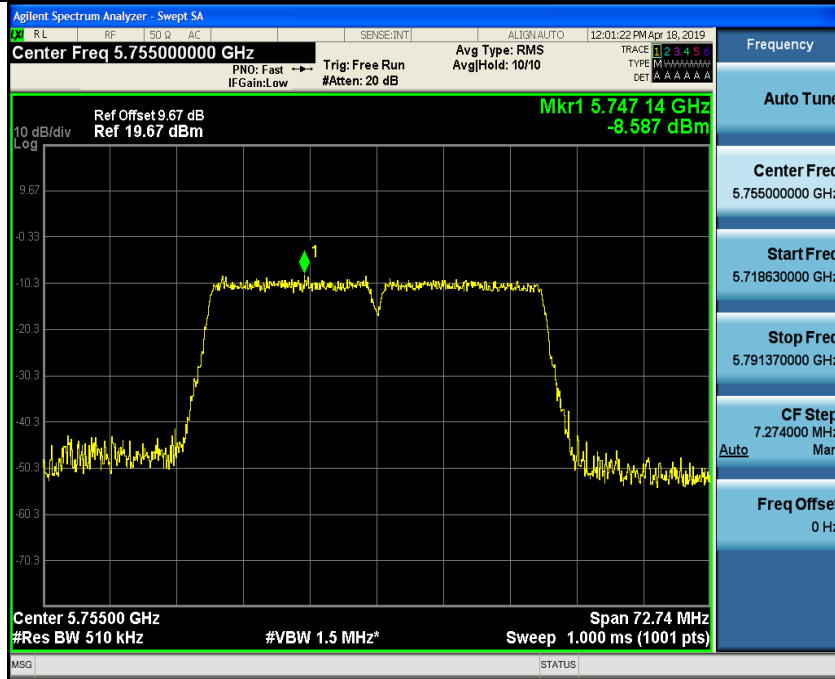


Low

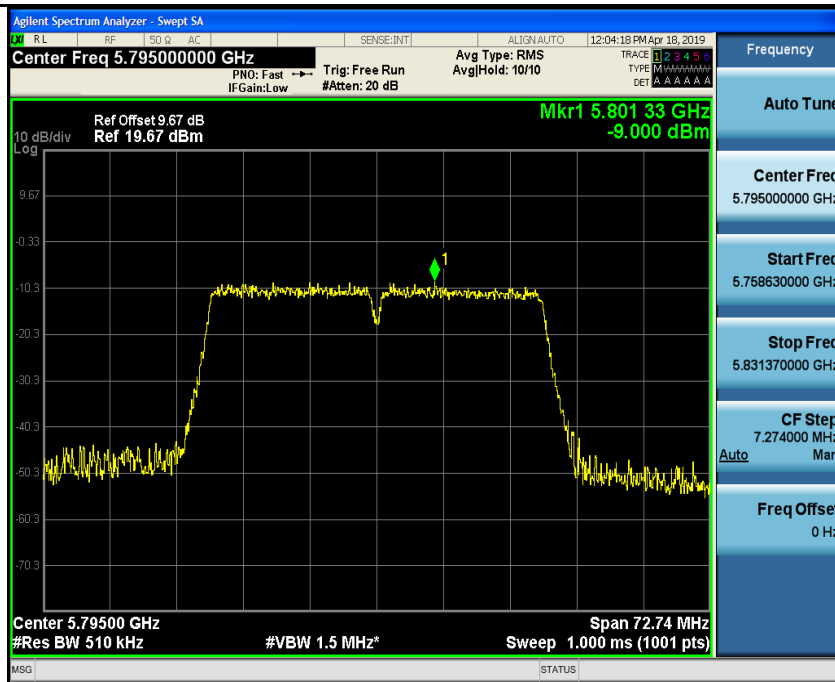


High


802.11ac(HT20)

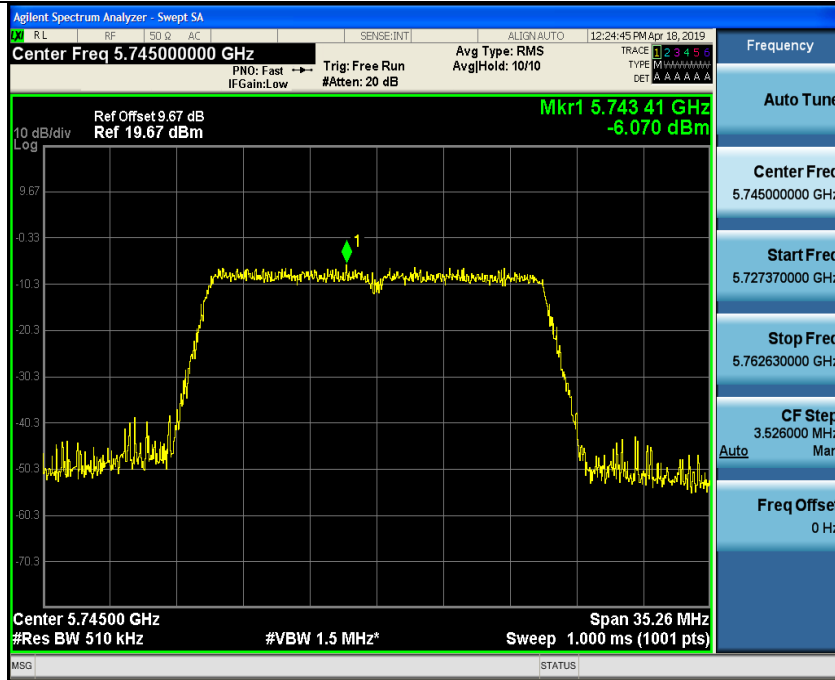

Low

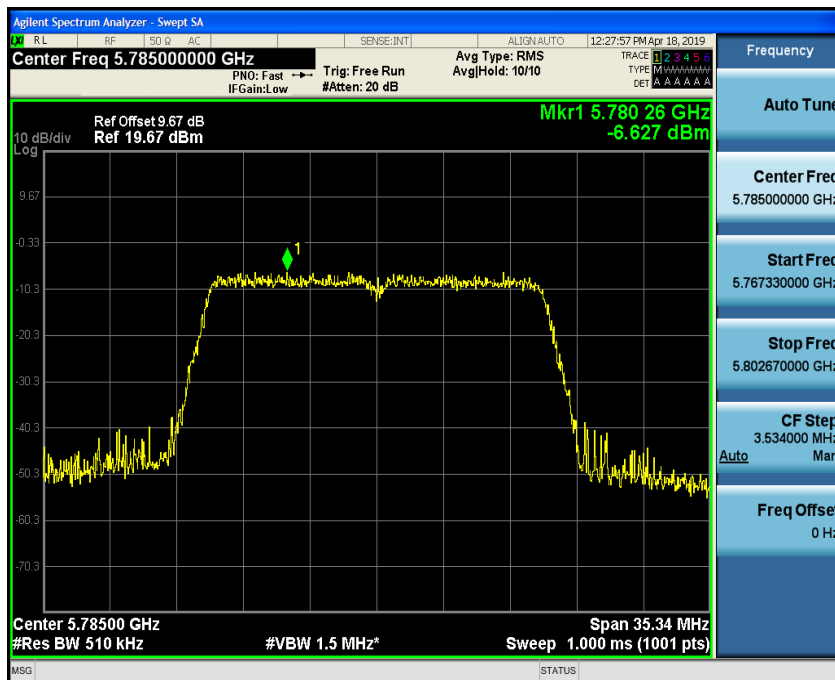


Mid

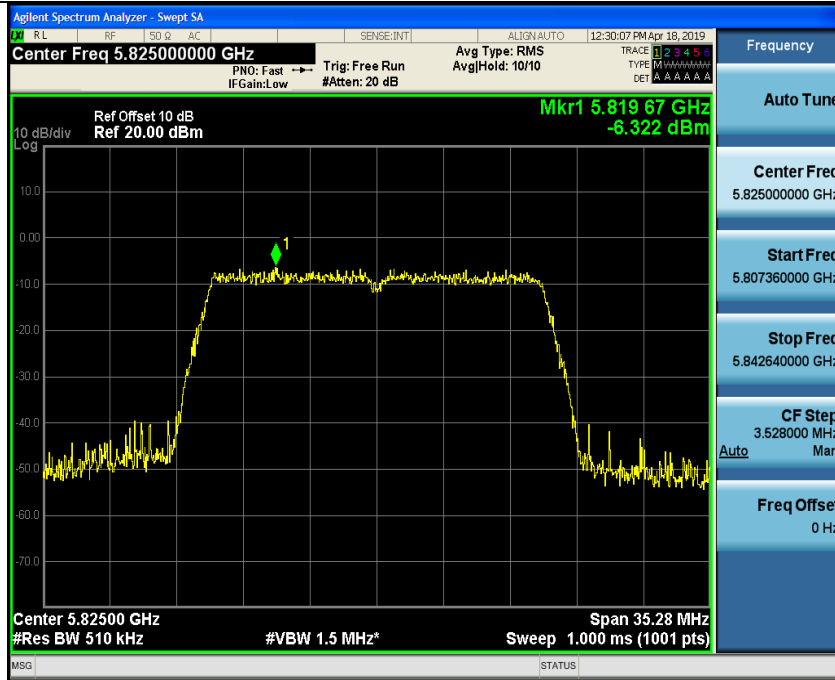


High


802.11ac(HT40)

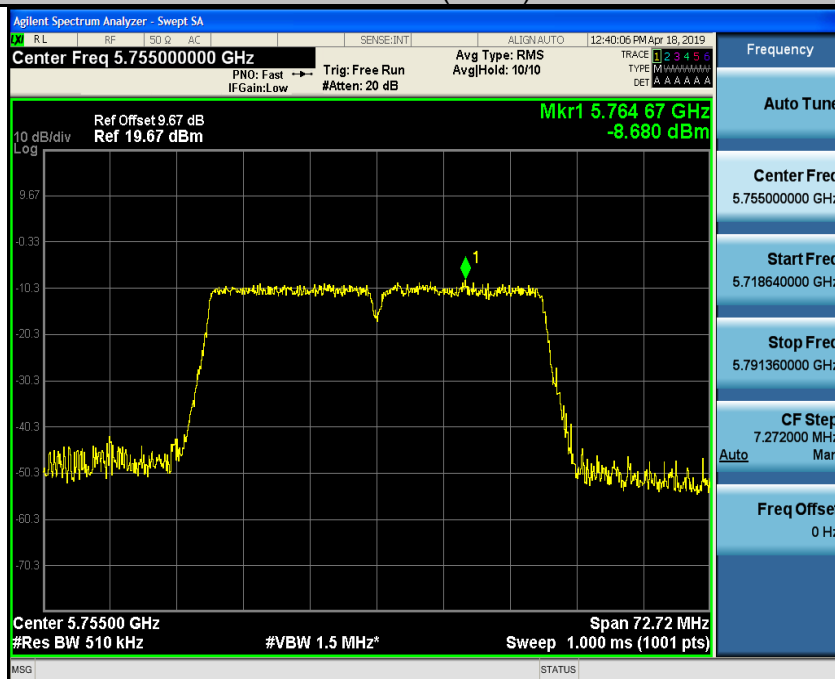

Low

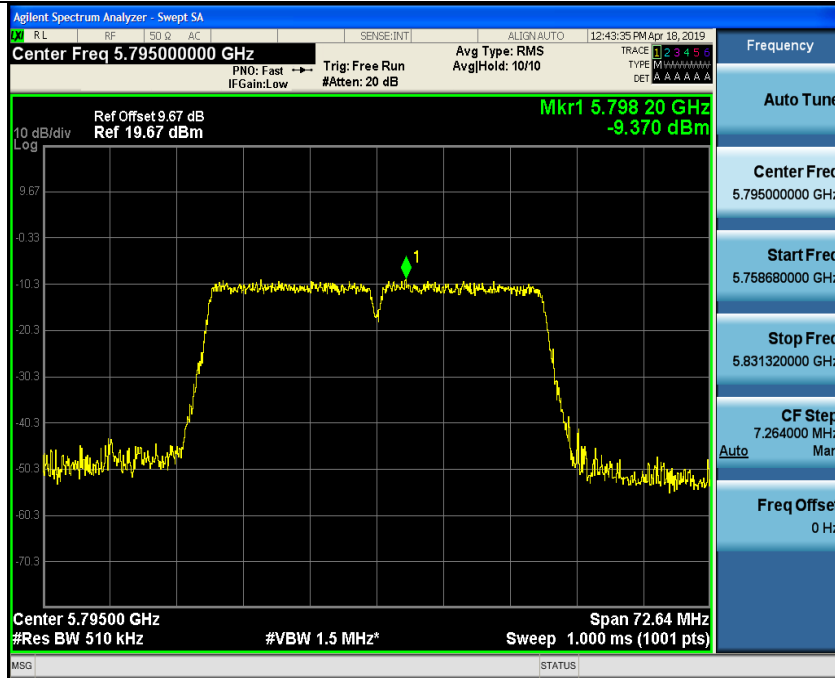

High  
802.11ac(HT80)

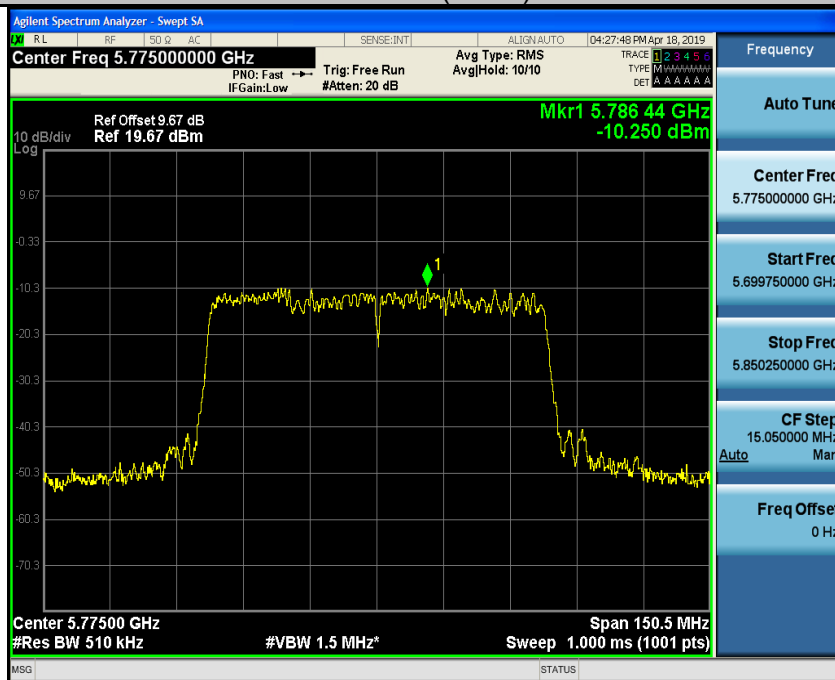

Low



## ANT 2


Configuration Band IV (5725 - 5850 MHz )						
Mode	Test channel	Level [dBm/500kHz]	10log(1/x) Factor[dB]	Power Spectral Density	Limit (dBm/500kHz)	Result
11a	CH149	-5.70	0	-5.70	30	PASS
11a	CH157	-5.72	0	-5.72	30	PASS
11a	CH161	-6.38	0	-6.38	30	PASS
11n(HT20)	CH149	-6.14	0	-6.14	30	PASS
11n(HT20)	CH157	-6.11	0	-6.11	30	PASS
11n(HT20)	CH161	-6.47	0	-6.47	30	PASS
11n(HT40)	CH151	-8.51	0	-8.51	30	PASS
11n(HT40)	CH159	-8.50	0	-8.50	30	PASS
11ac(HT20)	CH149	-6.01	0	-6.01	30	PASS
11ac(HT20)	CH157	-6.48	0	-6.48	30	PASS
11ac(HT20)	CH161	-5.36	0	-5.36	30	PASS
11ac(HT40)	CH151	-8.05	0	-8.05	30	PASS
11ac(HT40)	CH159	-8.49	0	-8.49	30	PASS
11ac(HT80)	CH155	-6.51	0	-6.51	30	PASS

Test plots as follows:




Band IV (5725 – 5850 MHz)

802.11a

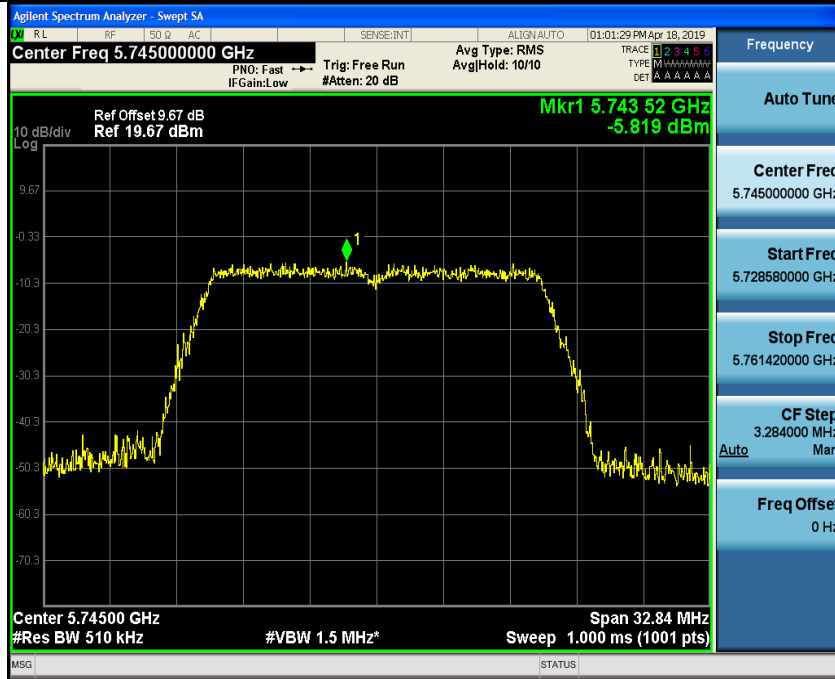

Low

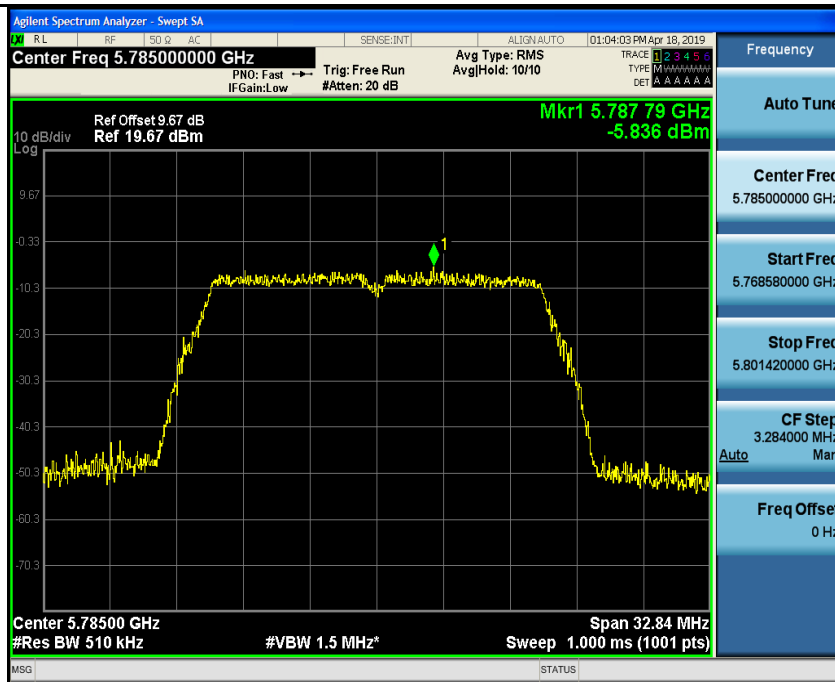


Mid




High


802.11n(HT20)

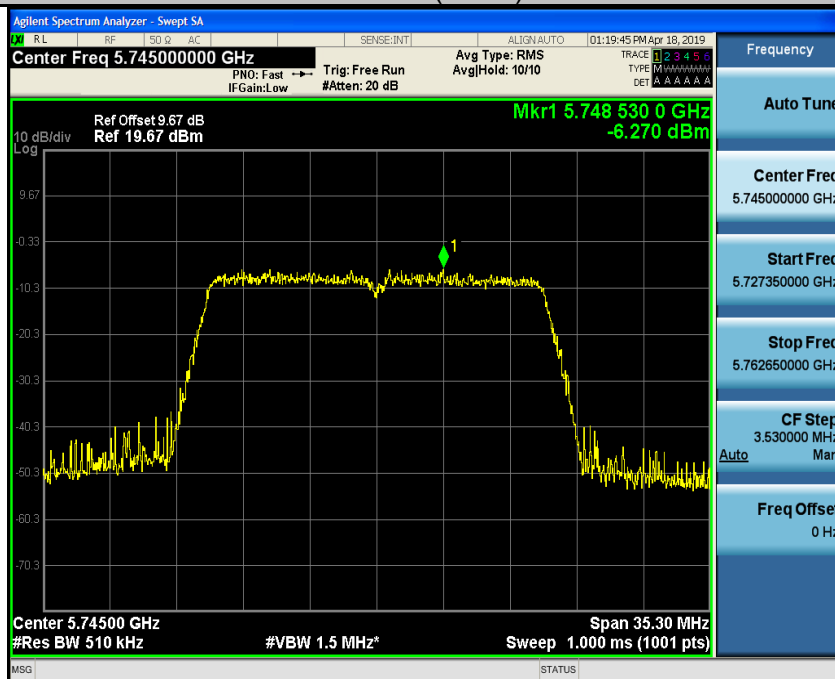

Low

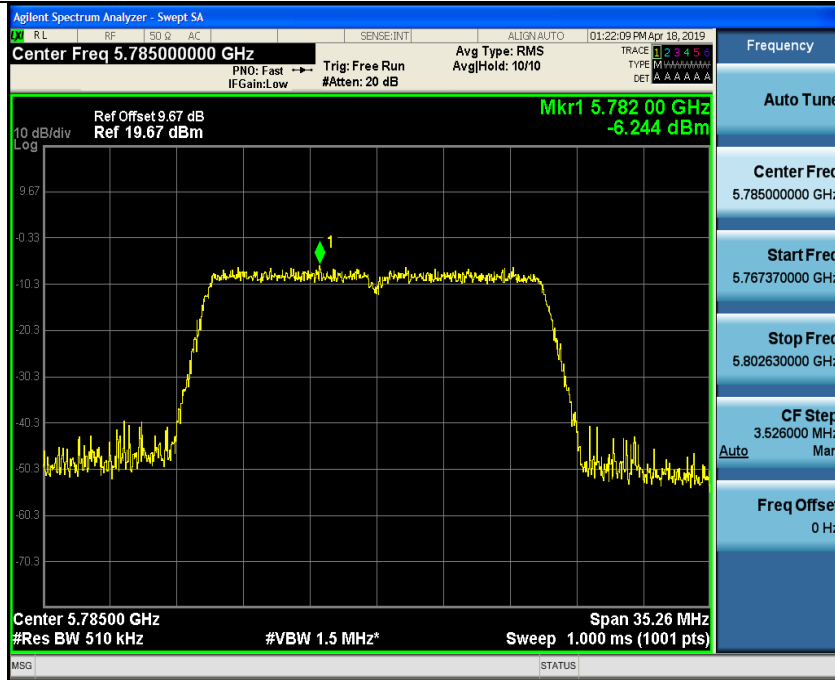

Mid

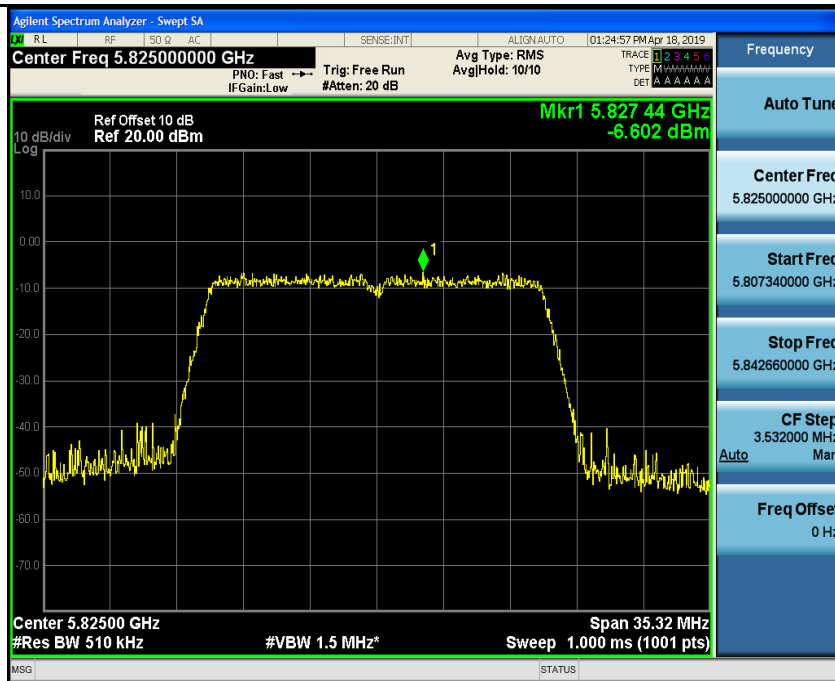


High






802.11n(HT40)

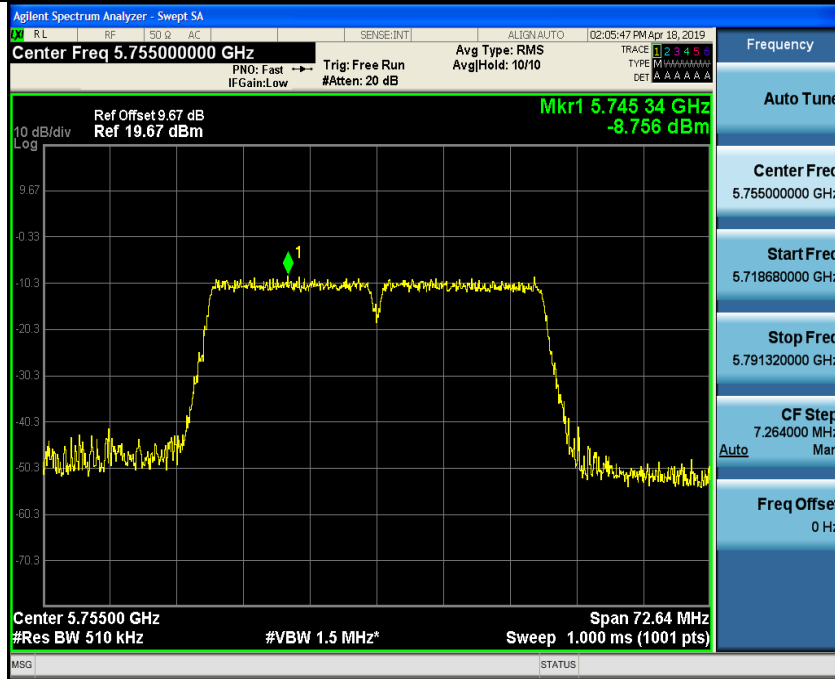


Low

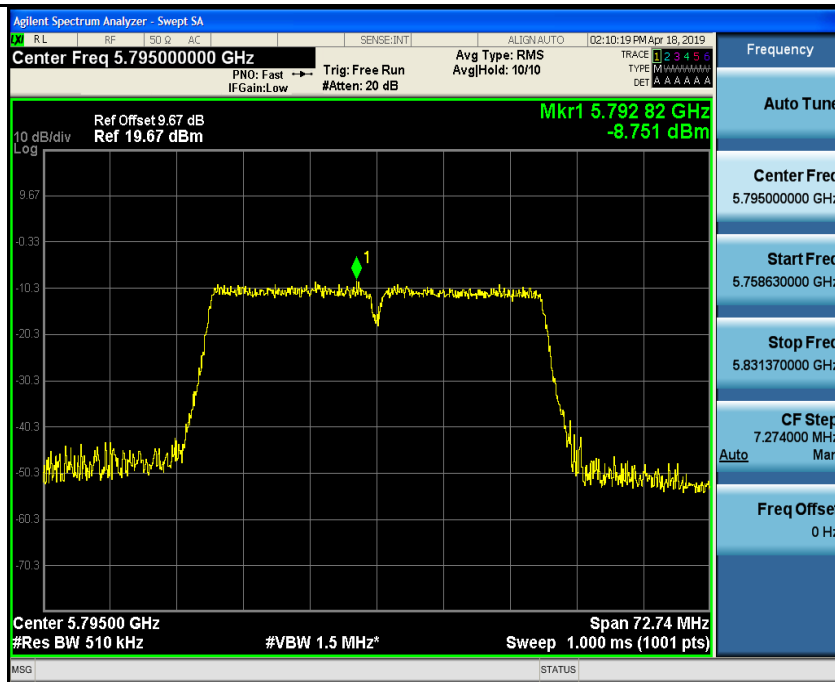


High


802.11ac(HT20)

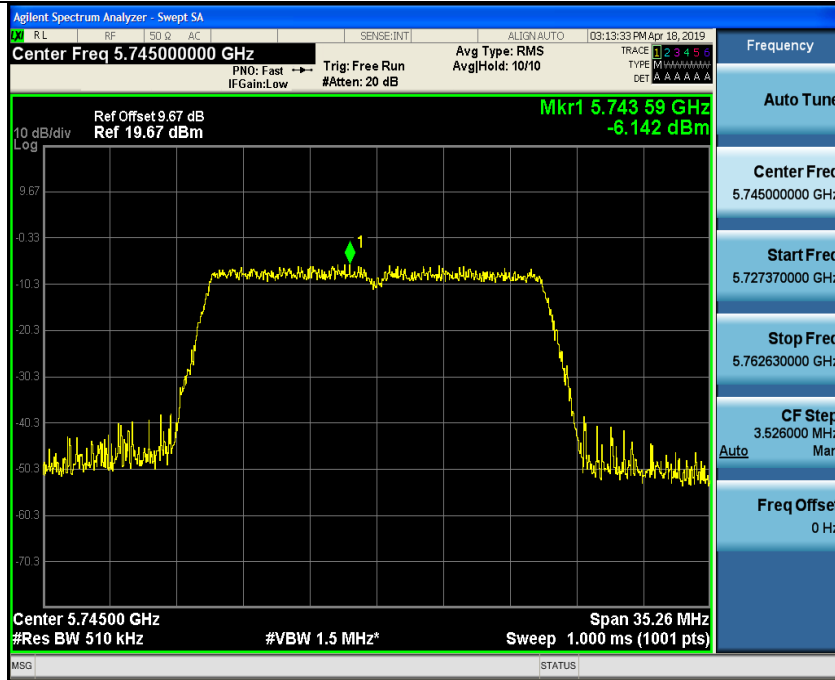

Low

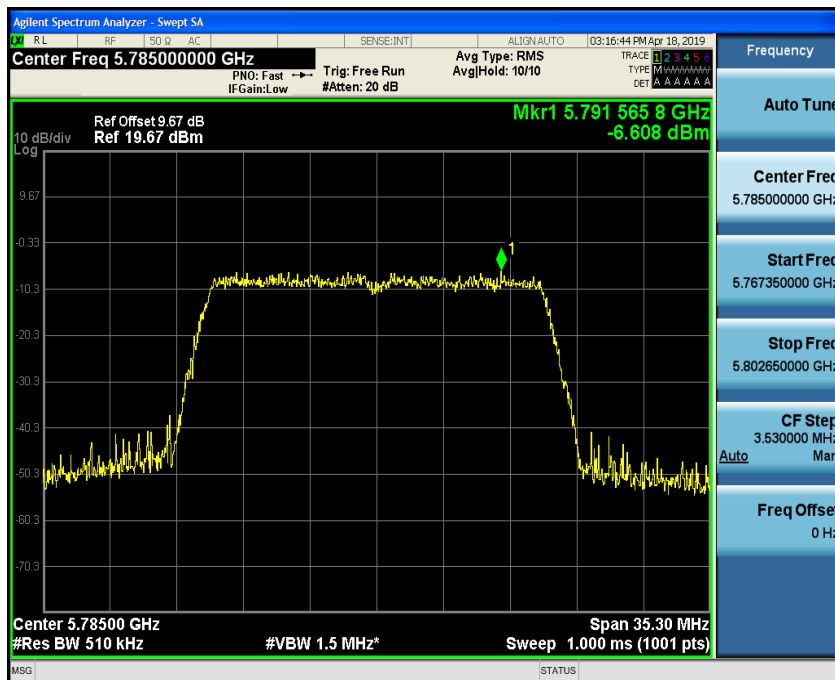


Mid

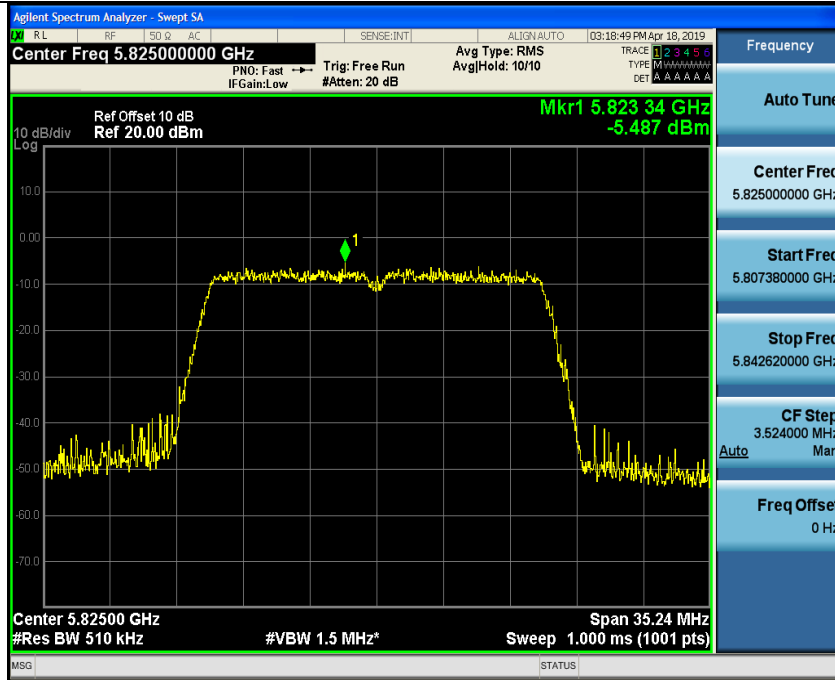


High

802.11ac(HT40)

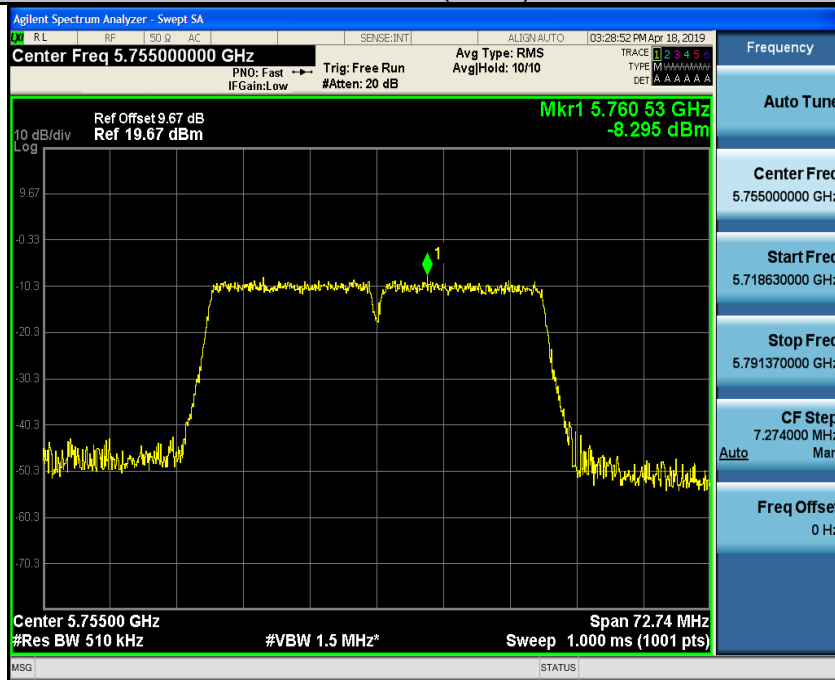

Low

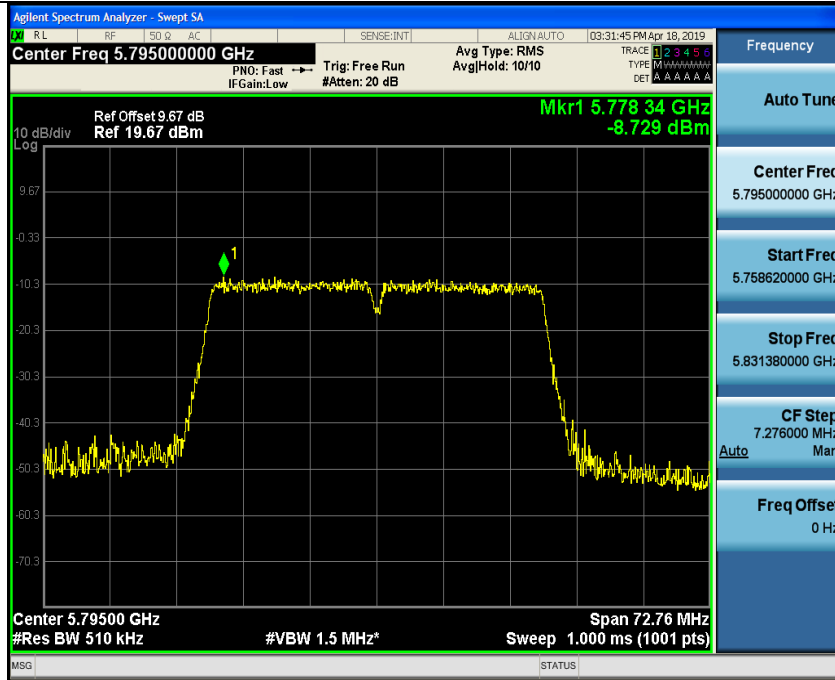

High  
802.11ac(HT80)



Low



**For MIMO antenna port 1+antenna port 2**  
**Configuration Band IV (5725 - 5850 MHz )**

Mode	Test channel	Power Density (dBm)	Limit (dBm)	Result
11a	CH149	/	30	/
11a	CH157	/	30	/
11a	CH161	/	30	/
11n(HT20)	CH149	-3.13	30	PASS
11n(HT20)	CH157	-3.35	30	PASS
11n(HT20)	CH161	-3.40	30	PASS
11n(HT40)	CH151	-5.41	30	PASS
11n(HT40)	CH159	-5.61	30	PASS
11ac(HT20)	CH149	-2.96	30	PASS
11ac(HT20)	CH157	-3.48	30	PASS
11ac(HT20)	CH161	-2.74	30	PASS
11ac(HT40)	CH151	-5.23	30	PASS
11ac(HT40)	CH159	-5.78	30	PASS
11ac(HT80)	CH155	-2.35	30	PASS
Note: 1 According to KDB 662911, Result power = $10\log(10^{\text{ant1}/10} + 10^{\text{ant2}/10})$ . 2 Result unit: W, The end result is converted to units of dBm.				

Note: This product supports antenna 1 and antenna 2 launch, but only support 802.11 n/ac for MIMO mode, not support 802.11 a for MIMO mode.



## 4.6. Band edge

### 4.6.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15E Section 15.407
<b>Test Method:</b>	ANSI C63.10 2013
<b>Limit:</b>	<p>For band I&amp;II&amp;III: <math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}</math>, for <math>\text{EIRP}(\text{dBm}) = -27\text{dBm}</math></p> <p>For transmitters operating in the 5.725-5.85 GHz band:</p> <p>All emissions shall be limited to a level of <math>-27 \text{ dBm}/\text{MHz}</math> at 75 MHz or more above or below the band edge increasing linearly to <math>10 \text{ dBm}/\text{MHz}</math> at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of <math>15.6 \text{ dBm}/\text{MHz}</math> at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of <math>27 \text{ dBm}/\text{MHz}</math> at the band edge.</p> <p>For band IV(5715-5725MHz&amp;5850-5860MHz): <math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 78.2 \text{ dB}\mu\text{V}/\text{m}</math>, for <math>\text{EIRP}(\text{dBm}) = -27\text{dBm}</math>;</p> <p>For band IV(other un-restricted band): <math>E[\text{dB}\mu\text{V}/\text{m}] = \text{EIRP}[\text{dBm}] + 95.2 = 68.2 \text{ dB}\mu\text{V}/\text{m}</math>, for <math>\text{EIRP}(\text{dBm}) = -27\text{dBm}</math></p>
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. An Equipment Under Test (EUT) is placed on a rotating turn table that is 1.5 meters high. The EUT is positioned 3 meters away from an antenna tower. The antenna tower has a height of 1-4 meters. The antenna is connected to a Receiver and an Amplifier (Amp.) which are placed on a Ground Plane.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was</li> </ol>



	<p>turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.</p>
<b>Test Result:</b>	PASS



#### 4.6.2. Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESRP3	HKE-005	Dec. 27, 2019
Spectrum analyzer	Agilent	N9020A	HKE-048	Dec. 27, 2019
Preamplifier	EMCI	EMC051845S E	HKE-015	Dec. 27, 2019
Preamplifier	Agilent	83051A	HKE-016	Dec. 27, 2019
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Sep. 26, 2019
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Sep. 26, 2019
Horn antenna	Schwarzbeck	9120D	HKE-013	Sep. 26, 2019
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Dec. 27, 2019
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
Hf antenna	Schwarzbeck	LB-180400-KF	HKE-031	Sep. 27, 2019
RF cable	Tonscend	1-18G	HKE-099	Dec. 27, 2019
RF cable	Times	1-40G	HKE-034	Dec. 27, 2019

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).





**4.6.3. Test Data**

**ANT 1**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.62	-2.06	54.56	68.2	-13.64	peak
5650	37.21	-2.06	35.15	48.2	-13.05	AVG
5700	89.91	-1.96	87.95	105.2	-17.25	peak
5700	69.54	-1.96	67.58	85.2	-17.62	AVG
5720	93.01	-2.87	90.14	110.8	-20.66	peak
5720	74.06	-2.87	71.19	90.8	-19.61	AVG
5725	111.95	-2.14	109.81	122.2	-12.39	peak
5725	87.39	-2.14	85.25	102.2	-16.95	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.04	-2.06	55.98	68.2	-12.22	peak
5650	35.75	-2.06	33.69	48.2	-14.51	AVG
5700	90.78	-1.96	88.82	105.2	-16.38	peak
5700	65.49	-1.96	63.53	85.2	-21.67	AVG
5720	94.3	-2.87	91.43	110.8	-19.37	peak
5720	77.68	-2.87	74.81	90.8	-15.99	AVG
5725	111.04	-2.14	108.9	122.2	-13.3	peak
5725	91.72	-2.14	89.58	102.2	-12.62	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	112.99	-1.97	111.02	122.2	-11.18	peak
5850	88.43	-1.97	86.46	102.2	-15.74	AVG
5855	95.06	-2.13	92.93	110.8	-17.87	peak
5855	73.74	-2.13	71.61	90.8	-19.19	AVG
5875	87.63	-2.65	84.98	105.2	-20.22	peak
5875	60.69	-2.65	58.04	85.2	-27.16	AVG
5925	54.4	-2.28	52.12	68.2	-16.08	peak
5925	37.41	-2.28	35.13	48.2	-13.07	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	112.04	-1.97	110.07	122.2	-12.13	peak
5850	86.09	-1.97	84.12	102.2	-18.08	AVG
5855	92.23	-2.13	90.1	110.8	-20.7	peak
5855	74.07	-2.13	71.94	90.8	-18.86	AVG
5875	85.24	-2.65	82.59	105.2	-22.61	peak
5875	66.46	-2.65	63.81	85.2	-21.39	AVG
5925	54.08	-2.28	51.8	68.2	-16.4	peak
5925	36.57	-2.28	34.29	48.2	-13.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.74	-2.06	54.68	68.2	-13.52	peak
5650	34.23	-2.06	32.17	48.2	-16.03	AVG
5700	91.02	-1.96	89.06	105.2	-16.14	peak
5700	67.38	-1.96	65.42	85.2	-19.78	AVG
5720	94.39	-2.87	91.52	110.8	-19.28	peak
5720	78	-2.87	75.13	90.8	-15.67	AVG
5725	114.67	-2.14	112.53	122.2	-9.67	peak
5725	90.07	-2.14	87.93	102.2	-14.27	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	60.42	-2.06	58.36	68.2	-9.84	peak
5650	37.93	-2.06	35.87	48.2	-12.33	AVG
5700	97.52	-1.96	95.56	105.2	-9.64	peak
5700	72.2	-1.96	70.24	85.2	-14.96	AVG
5720	93.22	-2.87	90.35	110.8	-20.45	peak
5720	78.36	-2.87	75.49	90.8	-15.31	AVG
5725	113.77	-2.14	111.63	122.2	-10.57	peak
5725	92.49	-2.14	90.35	102.2	-11.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	110.5	-1.97	108.53	122.2	-13.67	peak
5850	87.77	-1.97	85.8	102.2	-16.4	AVG
5855	93.53	-2.13	91.4	110.8	-19.4	peak
5855	71.33	-2.13	69.2	90.8	-21.6	AVG
5875	87.26	-2.65	84.61	105.2	-20.59	peak
5875	70.49	-2.65	67.84	85.2	-17.36	AVG
5925	52.87	-2.28	50.59	68.2	-17.61	peak
5925	39.2	-2.28	36.92	48.2	-11.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	110.59	-1.97	108.62	122.2	-13.58	peak
5850	92.96	-1.97	90.99	102.2	-11.21	AVG
5855	93.01	-2.13	90.88	110.8	-19.92	peak
5855	72.64	-2.13	70.51	90.8	-20.29	AVG
5875	87.12	-2.65	84.47	105.2	-20.73	peak
5875	67.04	-2.65	64.39	85.2	-20.81	AVG
5925	56.93	-2.28	54.65	68.2	-13.55	peak
5925	40.22	-2.28	37.94	48.2	-10.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	56.85	-2.06	54.79	68.2	-13.41	peak
5650	37.48	-2.06	35.42	48.2	-12.78	AVG
5700	92.41	-1.96	90.45	105.2	-14.75	peak
5700	70.93	-1.96	68.97	85.2	-16.23	AVG
5720	93.07	-2.87	90.2	110.8	-20.6	peak
5720	65.95	-2.87	63.08	90.8	-27.72	AVG
5725	113.46	-2.14	111.32	122.2	-10.88	peak
5725	91.63	-2.14	89.49	102.2	-12.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	60.64	-2.06	58.58	68.2	-9.62	peak
5650	37.37	-2.06	35.31	48.2	-12.89	AVG
5700	95.79	-1.96	93.83	105.2	-11.37	peak
5700	71.81	-1.96	69.85	85.2	-15.35	AVG
5720	91.01	-2.87	88.14	110.8	-22.66	peak
5720	76.69	-2.87	73.82	90.8	-16.98	AVG
5725	113.52	-2.14	111.38	122.2	-10.82	peak
5725	90.69	-2.14	88.55	102.2	-13.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	110.13	-1.97	108.16	122.2	-14.04	peak
5850	93.84	-1.97	91.87	102.2	-10.33	AVG
5855	95.04	-2.13	92.91	110.8	-17.89	peak
5855	78.58	-2.13	76.45	90.8	-14.35	AVG
5875	88.03	-2.65	85.38	105.2	-19.82	peak
5875	66.63	-2.65	63.98	85.2	-21.22	AVG
5925	53.43	-2.28	51.15	68.2	-17.05	peak
5925	38.03	-2.28	35.75	48.2	-12.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	109.91	-1.97	107.94	122.2	-14.26	peak
5850	92.24	-1.97	90.27	102.2	-11.93	AVG
5855	92.66	-2.13	90.53	110.8	-20.27	peak
5855	76.17	-2.13	74.04	90.8	-16.76	AVG
5875	86.56	-2.65	83.91	105.2	-21.29	peak
5875	64.64	-2.65	61.99	85.2	-23.21	AVG
5925	53.05	-2.28	50.77	68.2	-17.43	peak
5925	36.63	-2.28	34.35	48.2	-13.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	58.2	-2.06	56.14	68.2	-12.06	peak
5650	37.23	-2.06	35.17	48.2	-13.03	AVG
5700	89.28	-1.96	87.32	105.2	-17.88	peak
5700	67.69	-1.96	65.73	85.2	-19.47	AVG
5720	92.41	-2.87	89.54	110.8	-21.26	peak
5720	72.62	-2.87	69.75	90.8	-21.05	AVG
5725	112.57	-2.14	110.43	122.2	-11.77	peak
5725	89.96	-2.14	87.82	102.2	-14.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5650	59.22	-2.06	57.16	68.2	-11.04	peak
5650	39.03	-2.06	36.97	48.2	-11.23	AVG
5700	90.43	-1.96	88.47	105.2	-16.73	peak
5700	68.8	-1.96	66.84	85.2	-18.36	AVG
5720	94.57	-2.87	91.7	110.8	-19.1	peak
5720	76.09	-2.87	73.22	90.8	-17.58	AVG
5725	112.38	-2.14	110.24	122.2	-11.96	peak
5725	90.95	-2.14	88.81	102.2	-13.39	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	112.16	-1.97	110.19	122.2	-12.01	peak
5850	89.18	-1.97	87.21	102.2	-14.99	AVG
5855	94.69	-2.13	92.56	110.8	-18.24	peak
5855	78.53	-2.13	76.4	90.8	-14.4	AVG
5875	88.27	-2.65	85.62	105.2	-19.58	peak
5875	69.49	-2.65	66.84	85.2	-18.36	AVG
5925	53.04	-2.28	50.76	68.2	-17.44	peak
5925	38.65	-2.28	36.37	48.2	-11.83	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	111.87	-1.97	109.9	122.2	-12.3	peak
5850	86.89	-1.97	84.92	102.2	-17.28	AVG
5855	91.02	-2.13	88.89	110.8	-21.91	peak
5855	76.43	-2.13	74.3	90.8	-16.5	AVG
5875	85.78	-2.65	83.13	105.2	-22.07	peak
5875	72.53	-2.65	69.88	85.2	-15.32	AVG
5925	55.39	-2.28	53.11	68.2	-15.09	peak
5925	39.56	-2.28	37.28	48.2	-10.92	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.





Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	57.51	-2.06	55.45	68.2	-12.75	peak
5650	36.4	-2.06	34.34	48.2	-13.86	AVG
5700	89.32	-1.96	87.36	105.2	-17.84	peak
5700	68.95	-1.96	66.99	85.2	-18.21	AVG
5720	92.73	-2.87	89.86	110.8	-20.94	peak
5720	74.17	-2.87	71.3	90.8	-19.5	AVG
5725	111.61	-2.14	109.47	122.2	-12.73	peak
5725	91.81	-2.14	89.67	102.2	-12.53	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	58.35	-2.06	56.29	68.2	-11.91	peak
5650	36.62	-2.06	34.56	48.2	-13.64	AVG
5700	89.19	-1.96	87.23	105.2	-17.97	peak
5700	68.09	-1.96	66.13	85.2	-19.07	AVG
5720	95.15	-2.87	92.28	110.8	-18.52	peak
5720	73.41	-2.87	70.54	90.8	-20.26	AVG
5725	111.84	-2.14	109.7	122.2	-12.5	peak
5725	91.47	-2.14	89.33	102.2	-12.87	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	112.43	-1.97	110.46	122.2	-11.74	peak
5850	92.61	-1.97	90.64	102.2	-11.56	AVG
5855	93.78	-2.13	91.65	110.8	-19.15	peak
5855	74.98	-2.13	72.85	90.8	-17.95	AVG
5875	87.84	-2.65	85.19	105.2	-20.01	peak
5875	64.93	-2.65	62.28	85.2	-22.92	AVG
5925	53.5	-2.28	51.22	68.2	-16.98	peak
5925	38.19	-2.28	35.91	48.2	-12.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	113.13	-1.97	111.16	122.2	-11.04	peak
5850	90.2	-1.97	88.23	102.2	-13.97	AVG
5855	91.39	-2.13	89.26	110.8	-21.54	peak
5855	70.05	-2.13	67.92	90.8	-22.88	AVG
5875	86.2	-2.65	83.55	105.2	-21.65	peak
5875	64.07	-2.65	61.42	85.2	-23.78	AVG
5925	55.79	-2.28	53.51	68.2	-14.69	peak
5925	34.2	-2.28	31.92	48.2	-16.28	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	56.99	-2.06	54.93	68.2	-13.27	peak
5650	37.9	-2.06	35.84	48.2	-12.36	AVG
5700	89.52	-1.96	87.56	105.2	-17.64	peak
5700	67.24	-1.96	65.28	85.2	-19.92	AVG
5720	92.94	-2.87	90.07	110.8	-20.73	peak
5720	75.65	-2.87	72.78	90.8	-18.02	AVG
5725	111.04	-2.14	108.9	122.2	-13.3	peak
5725	90.02	-2.14	87.88	102.2	-14.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	58.95	-2.06	56.89	68.2	-11.31	peak
5650	35.61	-2.06	33.55	48.2	-14.65	AVG
5700	90.99	-1.96	89.03	105.2	-16.17	peak
5700	66.94	-1.96	64.98	85.2	-20.22	AVG
5720	95.06	-2.87	92.19	110.8	-18.61	peak
5720	71	-2.87	68.13	90.8	-22.67	AVG
5725	112.69	-2.14	110.55	122.2	-11.65	peak
5725	92.84	-2.14	90.7	102.2	-11.5	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	113.68	-1.97	111.71	122.2	-10.49	peak
5850	92.4	-1.97	90.43	102.2	-11.77	AVG
5855	94.08	-2.13	91.95	110.8	-18.85	peak
5855	78.44	-2.13	76.31	90.8	-14.49	AVG
5875	85.87	-2.65	83.22	105.2	-21.98	peak
5875	64.3	-2.65	61.65	85.2	-23.55	AVG
5925	52.51	-2.28	50.23	68.2	-17.97	peak
5925	39.45	-2.28	37.17	48.2	-11.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	111.41	-1.97	109.44	122.2	-12.76	peak
5850	91.49	-1.97	89.52	102.2	-12.68	AVG
5855	93.54	-2.13	91.41	110.8	-19.39	peak
5855	76.51	-2.13	74.38	90.8	-16.42	AVG
5875	84.86	-2.65	82.21	105.2	-22.99	peak
5875	64.46	-2.65	61.81	85.2	-23.39	AVG
5925	55.42	-2.28	53.14	68.2	-15.06	peak
5925	38.1	-2.28	35.82	48.2	-12.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

**ANT 2**

Operation Mode: 802.11a Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	57.23	-2.06	55.17	68.2	-13.03	peak
5650	35.56	-2.06	33.5	48.2	-14.7	AVG
5700	90.68	-1.96	88.72	105.2	-16.48	peak
5700	67.52	-1.96	65.56	85.2	-19.64	AVG
5720	92.32	-2.87	89.45	110.8	-21.35	peak
5720	73.78	-2.87	70.91	90.8	-19.89	AVG
5725	111.37	-2.14	109.23	122.2	-12.97	peak
5725	91.05	-2.14	88.91	102.2	-13.29	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	58.1	-2.06	56.04	68.2	-12.16	peak
5650	36.78	-2.06	34.72	48.2	-13.48	AVG
5700	90.89	-1.96	88.93	105.2	-16.27	peak
5700	65.8	-1.96	63.84	85.2	-21.36	AVG
5720	95.32	-2.87	92.45	110.8	-18.35	peak
5720	76.3	-2.87	73.43	90.8	-17.37	AVG
5725	111.06	-2.14	108.92	122.2	-13.28	peak
5725	90.24	-2.14	88.1	102.2	-14.1	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	113.09	-1.97	111.12	122.2	-11.08	peak
5850	89.23	-1.97	87.26	102.2	-14.94	AVG
5855	94.16	-2.13	92.03	110.8	-18.77	peak
5855	74.64	-2.13	72.51	90.8	-18.29	AVG
5875	87.35	-2.65	84.7	105.2	-20.5	peak
5875	63.32	-2.65	60.67	85.2	-24.53	AVG
5925	55.44	-2.28	53.16	68.2	-15.04	peak
5925	37.48	-2.28	35.2	48.2	-13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	111.95	-1.97	109.98	122.2	-12.22	peak
5850	90.18	-1.97	88.21	102.2	-13.99	AVG
5855	93.47	-2.13	91.34	110.8	-19.46	peak
5855	77.93	-2.13	75.8	90.8	-15	AVG
5875	86.61	-2.65	83.96	105.2	-21.24	peak
5875	66.08	-2.65	63.43	85.2	-21.77	AVG
5925	55.75	-2.28	53.47	68.2	-14.73	peak
5925	39.74	-2.28	37.46	48.2	-10.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11n20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	57.65	-2.06	55.59	68.2	-12.61	peak
5650	37.25	-2.06	35.19	48.2	-13.01	AVG
5700	91.12	-1.96	89.16	105.2	-16.04	peak
5700	68.96	-1.96	67	85.2	-18.2	AVG
5720	93.25	-2.87	90.38	110.8	-20.42	peak
5720	77.19	-2.87	74.32	90.8	-16.48	AVG
5725	113.77	-2.14	111.63	122.2	-10.57	peak
5725	94.94	-2.14	92.8	102.2	-9.4	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	60.4	-2.06	58.34	68.2	-9.86	peak
5650	39.78	-2.06	37.72	48.2	-10.48	AVG
5700	97.77	-1.96	95.81	105.2	-9.39	peak
5700	67.8	-1.96	65.84	85.2	-19.36	AVG
5720	93.16	-2.87	90.29	110.8	-20.51	peak
5720	76.39	-2.87	73.52	90.8	-17.28	AVG
5725	114.16	-2.14	112.02	122.2	-10.18	peak
5725	93.52	-2.14	91.38	102.2	-10.82	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	109.61	-1.97	107.64	122.2	-14.56	peak
5850	89.9	-1.97	87.93	102.2	-14.27	AVG
5855	93.72	-2.13	91.59	110.8	-19.21	peak
5855	78.88	-2.13	76.75	90.8	-14.05	AVG
5875	85.56	-2.65	82.91	105.2	-22.29	peak
5875	68.31	-2.65	65.66	85.2	-19.54	AVG
5925	51.9	-2.28	49.62	68.2	-18.58	peak
5925	37.64	-2.28	35.36	48.2	-12.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	110.62	-1.97	108.65	122.2	-13.55	peak
5850	91.57	-1.97	89.6	102.2	-12.6	AVG
5855	92.52	-2.13	90.39	110.8	-20.41	peak
5855	77.54	-2.13	75.41	90.8	-15.39	AVG
5875	87.43	-2.65	84.78	105.2	-20.42	peak
5875	69.88	-2.65	67.23	85.2	-17.97	AVG
5925	57.88	-2.28	55.6	68.2	-12.6	peak
5925	41.42	-2.28	39.14	48.2	-9.06	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.





Operation Mode: 802.11n40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	55.53	-2.06	53.47	68.2	-14.73	peak
5650	37.42	-2.06	35.36	48.2	-12.84	AVG
5700	92.25	-1.96	90.29	105.2	-14.91	peak
5700	65.73	-1.96	63.77	85.2	-21.43	AVG
5720	93.88	-2.87	91.01	110.8	-19.79	peak
5720	74.47	-2.87	71.6	90.8	-19.2	AVG
5725	113.54	-2.14	111.4	122.2	-10.8	peak
5725	90.94	-2.14	88.8	102.2	-13.4	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	60.41	-2.06	58.35	68.2	-9.85	peak
5650	36.39	-2.06	34.33	48.2	-13.87	AVG
5700	95.99	-1.96	94.03	105.2	-11.17	peak
5700	67.05	-1.96	65.09	85.2	-20.11	AVG
5720	91.51	-2.87	88.64	110.8	-22.16	peak
5720	73.83	-2.87	70.96	90.8	-19.84	AVG
5725	112.03	-2.14	109.89	122.2	-12.31	peak
5725	90.89	-2.14	88.75	102.2	-13.45	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G  
Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.93	-1.97	107.96	122.2	-14.24	peak
5850	89.51	-1.97	87.54	102.2	-14.66	AVG
5855	93.93	-2.13	91.8	110.8	-19	peak
5855	76.81	-2.13	74.68	90.8	-16.12	AVG
5875	88.44	-2.65	85.79	105.2	-19.41	peak
5875	65.08	-2.65	62.43	85.2	-22.77	AVG
5925	52.73	-2.28	50.45	68.2	-17.75	peak
5925	40.14	-2.28	37.86	48.2	-10.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
5850	109.61	-1.97	107.64	122.2	-14.56	peak
5850	91.59	-1.97	89.62	102.2	-12.58	AVG
5855	93.3	-2.13	91.17	110.8	-19.63	peak
5855	74.71	-2.13	72.58	90.8	-18.22	AVG
5875	87.49	-2.65	84.84	105.2	-20.36	peak
5875	65.23	-2.65	62.58	85.2	-22.62	AVG
5925	51.8	-2.28	49.52	68.2	-18.68	peak
5925	35.47	-2.28	33.19	48.2	-15.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac20 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	57.75	-2.06	55.69	68.2	-12.51	peak
5650	37.84	-2.06	35.78	48.2	-12.42	AVG
5700	90.06	-1.96	88.1	105.2	-17.1	peak
5700	66.72	-1.96	64.76	85.2	-20.44	AVG
5720	92.31	-2.87	89.44	110.8	-21.36	peak
5720	73.69	-2.87	70.82	90.8	-19.98	AVG
5725	112.73	-2.14	110.59	122.2	-11.61	peak
5725	92.83	-2.14	90.69	102.2	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	59.63	-2.06	57.57	68.2	-10.63	peak
5650	36.01	-2.06	33.95	48.2	-14.25	AVG
5700	90.97	-1.96	89.01	105.2	-16.19	peak
5700	67.29	-1.96	65.33	85.2	-19.87	AVG
5720	95.27	-2.87	92.4	110.8	-18.4	peak
5720	73.45	-2.87	70.58	90.8	-20.22	AVG
5725	113.87	-2.14	111.73	122.2	-10.47	peak
5725	92.92	-2.14	90.78	102.2	-11.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	111.96	-1.97	109.99	122.2	-12.21	peak
5850	91.49	-1.97	89.52	102.2	-12.68	AVG
5855	95.48	-2.13	93.35	110.8	-17.45	peak
5855	74.45	-2.13	72.32	90.8	-18.48	AVG
5875	86.19	-2.65	83.54	105.2	-21.66	peak
5875	68.15	-2.65	65.5	85.2	-19.7	AVG
5925	53.81	-2.28	51.53	68.2	-16.67	peak
5925	36.22	-2.28	33.94	48.2	-14.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	112.6	-1.97	110.63	122.2	-11.57	peak
5850	90.95	-1.97	88.98	102.2	-13.22	AVG
5855	92.42	-2.13	90.29	110.8	-20.51	peak
5855	75.54	-2.13	73.41	90.8	-17.39	AVG
5875	84.9	-2.65	82.25	105.2	-22.95	peak
5875	64.66	-2.65	62.01	85.2	-23.19	AVG
5925	54.55	-2.28	52.27	68.2	-15.93	peak
5925	36.14	-2.28	33.86	48.2	-14.34	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac40 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	58.03	-2.06	55.97	68.2	-12.23	peak
5650	36.14	-2.06	34.08	48.2	-14.12	AVG
5700	89.68	-1.96	87.72	105.2	-17.48	peak
5700	67.76	-1.96	65.8	85.2	-19.4	AVG
5720	91.37	-2.87	88.5	110.8	-22.3	peak
5720	74.25	-2.87	71.38	90.8	-19.42	AVG
5725	111.09	-2.14	108.95	122.2	-13.25	peak
5725	92.5	-2.14	90.36	102.2	-11.84	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	59.09	-2.06	57.03	68.2	-11.17	peak
5650	38.22	-2.06	36.16	48.2	-12.04	AVG
5700	91.13	-1.96	89.17	105.2	-16.03	peak
5700	67.09	-1.96	65.13	85.2	-20.07	AVG
5720	94.92	-2.87	92.05	110.8	-18.75	peak
5720	75.7	-2.87	72.83	90.8	-17.97	AVG
5725	113.19	-2.14	111.05	122.2	-11.15	peak
5725	94.6	-2.14	92.46	102.2	-9.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	112.12	-1.97	110.15	122.2	-12.05	peak
5850	91.74	-1.97	89.77	102.2	-12.43	AVG
5855	94.67	-2.13	92.54	110.8	-18.26	peak
5855	76.89	-2.13	74.76	90.8	-16.04	AVG
5875	86.12	-2.65	83.47	105.2	-21.73	peak
5875	68.09	-2.65	65.44	85.2	-19.76	AVG
5925	54.33	-2.28	52.05	68.2	-16.15	peak
5925	34.24	-2.28	31.96	48.2	-16.24	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	113.09	-1.97	111.12	122.2	-11.08	peak
5850	89.56	-1.97	87.59	102.2	-14.61	AVG
5855	92.39	-2.13	90.26	110.8	-20.54	peak
5855	78.94	-2.13	76.81	90.8	-13.99	AVG
5875	85.56	-2.65	82.91	105.2	-22.29	peak
5875	64.67	-2.65	62.02	85.2	-23.18	AVG
5925	55.87	-2.28	53.59	68.2	-14.61	peak
5925	38.74	-2.28	36.46	48.2	-11.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: 802.11ac80 Mode with 5.8G TX CH Low

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	57.18	-2.06	55.12	68.2	-13.08	peak
5650	35.95	-2.06	33.89	48.2	-14.31	AVG
5700	91.15	-1.96	89.19	105.2	-16.01	peak
5700	75.31	-1.96	73.35	85.2	-11.85	AVG
5720	91.04	-2.87	88.17	110.8	-22.63	peak
5720	65.52	-2.87	62.65	90.8	-28.15	AVG
5725	112.1	-2.14	109.96	122.2	-12.24	peak
5725	86.4	-2.14	84.26	102.2	-17.94	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5650	59.03	-2.06	56.97	68.2	-11.23	peak
5650	34.84	-2.06	32.78	48.2	-15.42	AVG
5700	90.1	-1.96	88.14	105.2	-17.06	peak
5700	68.11	-1.96	66.15	85.2	-19.05	AVG
5720	94.54	-2.87	91.67	110.8	-19.13	peak
5720	75.04	-2.87	72.17	90.8	-18.63	AVG
5725	114.2	-2.14	112.06	122.2	-10.14	peak
5725	93.12	-2.14	90.98	102.2	-11.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



Operation Mode: TX CH High with 5.8G

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	113.13	-1.97	111.16	122.2	-11.04	peak
5850	91.78	-1.97	89.81	102.2	-12.39	AVG
5855	93.29	-2.13	91.16	110.8	-19.64	peak
5855	80.55	-2.13	78.42	90.8	-12.38	AVG
5875	85.84	-2.65	83.19	105.2	-22.01	peak
5875	63.7	-2.65	61.05	85.2	-24.15	AVG
5925	51.95	-2.28	49.67	68.2	-18.53	peak
5925	37.07	-2.28	34.79	48.2	-13.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
5850	110.99	-1.97	109.02	122.2	-13.18	peak
5850	92.11	-1.97	90.14	102.2	-12.06	AVG
5855	93.44	-2.13	91.31	110.8	-19.49	peak
5855	77.53	-2.13	75.4	90.8	-15.4	AVG
5875	86.07	-2.65	83.42	105.2	-21.78	peak
5875	63.21	-2.65	60.56	85.2	-24.64	AVG
5925	55.42	-2.28	53.14	68.2	-15.06	peak
5925	39.01	-2.28	36.73	48.2	-11.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.





## 4.7. Spurious Emission

### 4.7.1.1. Test Specification

<b>Test Requirement:</b>	FCC CFR47 Part 15 Section 15.407 & 15.209 & 15.205				
<b>Test Method:</b>	KDB 789033 D02 v02r01				
<b>Frequency Range:</b>	9kHz to 40GHz				
<b>Measurement Distance:</b>	3 m				
<b>Antenna Polarization:</b>	Horizontal & Vertical				
<b>Operation mode:</b>	Transmitting mode with modulation				
<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value
	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		Peak	1MHz	10Hz	Average Value
<b>Limit:</b>	Unwanted spurious emissions fallen in restricted bands per FCC Part15.205 shall comply with the general field strength limits set forth in § 15.209 as below table,				
	Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		
	0.009-0.490	2400/F(KHz)	300		
	0.490-1.705	24000/F(KHz)	30		
	1.705-30	30	30		
	30-88	100	3		
	88-216	150	3		
	216-960	200	3		
	Above 960	500	3		
	Frequency	Limit (dBuV/m @3m)	Detector		
Above 1G	74.0	Peak			
	54.0	Average			
<b>Test setup:</b>	For radiated emissions below 30MHz				
	<p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Pre -Amplifier</p> <p>Receiver</p> <p>Computer</p>				
	30MHz to 1GHz				

<p><b>Test Procedure:</b></p>	<ol style="list-style-type: none"> <li>1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotating table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</li> </ol>
<p><b>Test results:</b></p>	<p>PASS</p>




### 4.7.2. Test Data

test mode: TX 802.11a 5745MHz

All the test modes completed for test. The worst case of Radiated Emission; the test data of this mode was reported.

#### Below 1GHz

#### Horizontal

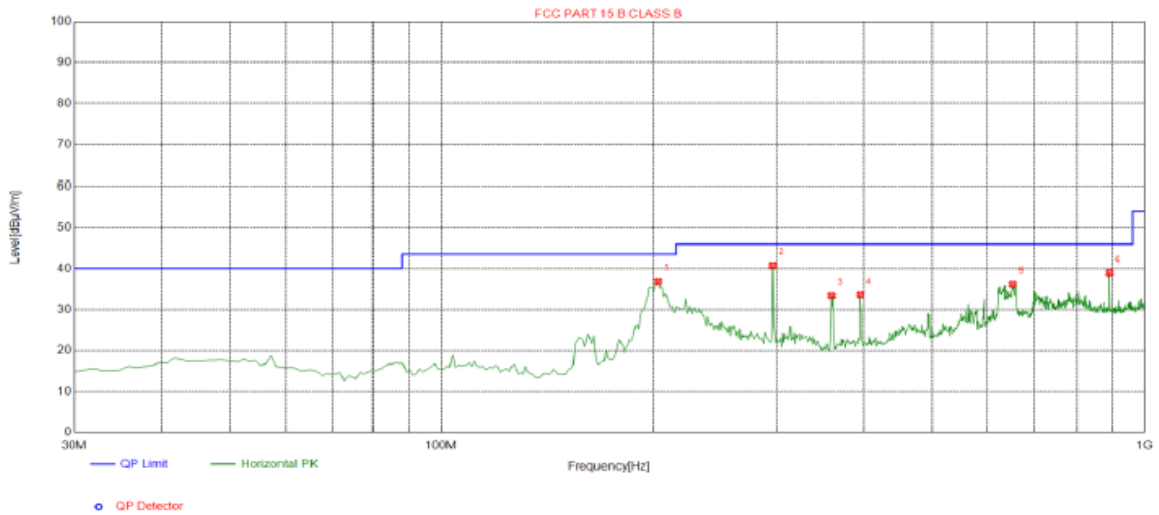


#### ected List

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	203.630	36.85	-14.97	43.50	6.65	100	70	Horizontal
2	296.750	40.73	-12.77	46.00	5.27	100	252	Horizontal
3	359.800	33.43	-11.35	46.00	12.57	100	51	Horizontal
4	395.690	33.67	-10.51	46.00	12.33	100	274	Horizontal
5	651.770	36.17	-5.71	46.00	9.83	100	18	Horizontal
6	891.360	39.00	-1.87	46.00	7.00	100	303	Horizontal



**Vertical**

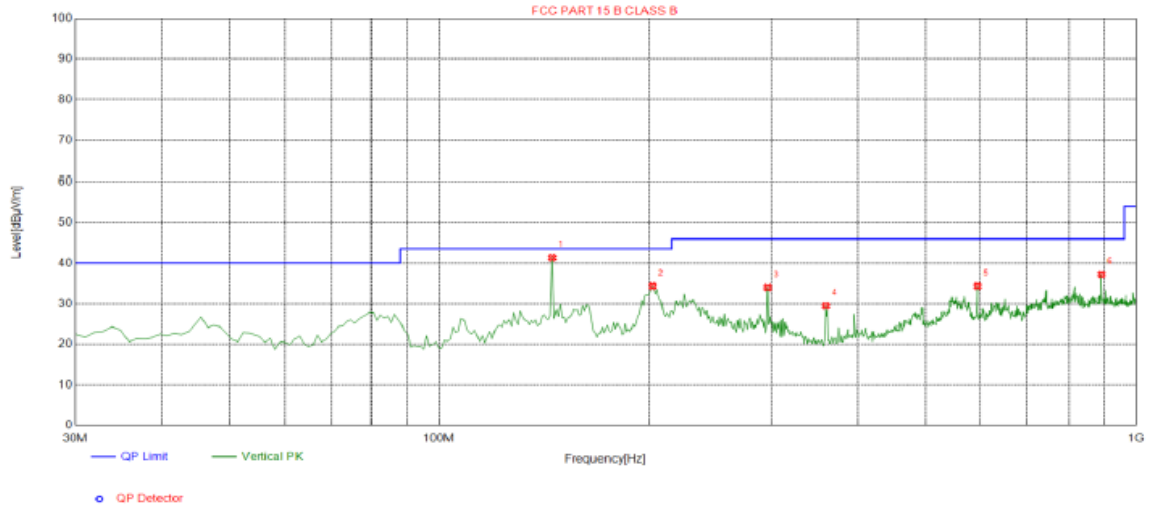

**Suspected List**

Suspected List								
NO.	Freq. [MHz]	Level [dBµV/m]	Factor [dB]	Limit [dBµV/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	145.430	41.41	-19.05	43.50	2.09	100	348	Vertical
2	202.660	34.34	-14.99	43.50	9.16	100	348	Vertical
3	296.750	34.03	-12.77	46.00	11.97	100	148	Vertical
4	359.800	29.49	-11.35	46.00	16.51	100	303	Vertical
5	594.540	34.33	-6.48	46.00	11.67	100	155	Vertical
6	891.360	37.24	-1.87	46.00	8.76	100	24	Vertical

**Above 1GHz**

LOW CH 149 (802.11 a Mode with 5.8G)/5745

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3647	62.8	-4.59	58.21	74	-15.79	peak
3647	44.64	-4.59	40.05	54	-13.95	AVG
11570	50.21	4.21	54.42	74	-19.58	peak
11570	38.78	4.21	42.99	54	-11.01	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3647	61.88	-4.59	57.29	74	-16.71	peak
3647	46.2	-4.59	41.61	54	-12.39	AVG
11570	52.27	4.21	56.48	74	-17.52	peak
11570	36.44	4.21	40.65	54	-13.35	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



MID CH157 (802.11 a Mode with 5.8G)/5785

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3647	62.52	-4.59	57.93	74	-16.07	peak
3647	45.73	-4.59	41.14	54	-12.86	AVG
11570	51.74	4.21	55.95	74	-18.05	peak
11570	40.66	4.21	44.87	54	-9.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3647	59.33	-4.59	54.74	74	-19.26	peak
3647	46.09	-4.59	41.5	54	-12.5	AVG
11570	52.18	4.21	56.39	74	-17.61	peak
11570	36.49	4.21	40.7	54	-13.3	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.



HIGH CH 165 (802.11a Mode with 5.8G)/5825

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3647	60.32	-4.59	55.73	74	-18.27	peak
3647	47.19	-4.59	42.6	54	-11.4	AVG
11650	52.81	4.84	57.65	74	-16.35	peak
11650	36.69	4.84	41.53	54	-12.47	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
3647	59.68	-4.59	55.09	74	-18.91	peak
3647	44.91	-4.59	40.32	54	-13.68	AVG
11650	50.89	4.84	55.73	74	-18.27	peak
11650	39.25	4.84	44.09	54	-9.91	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier.

Remark:

- (1) Measuring frequencies from 1 GHz to the 40 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



## 4.8. Frequency Stability Measurement

### 4.8.1. Test Specification

<b>Test Requirement:</b>	FCC Part15 Section 15.407(g) &Part2 J Section 2.1055
<b>Test Method:</b>	ANSI C63.10: 2013
<b>Limit:</b>	The frequency tolerance shall be maintained within the band of operation frequency over a temperature variation of 0 degrees to 35 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C.
<b>Test Setup:</b>	<pre> graph TD     SA[Spectrum Analyzer] --- EUT[EUT]     subgraph TC [Temperature Chamber]         EUT     end     P[AC/DC Power supply] --- EUT     </pre>
<b>Test Procedure:</b>	The EUT was placed inside the environmental test chamber and powered by nominal AC/DC voltage. b. Turn the EUT on and couple its output to a spectrum analyzer. c. Turn the EUT off and set the chamber to the highest temperature specified. d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize. e. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature. f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.
<b>Test Result:</b>	PASS
<b>Remark:</b>	N/A



**Test Result as follows:**

Mode	Voltage (V)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	132 V	5744.346	21	5823.923	18
	120 V	5745.195	18	5825.235	22
	108 V	5744.016	15	5823.557	15

Mode	Temperature (°C)	FHL (5745MHz)	Deviation (KHz)	FHH (5825MHz)	Deviation (KHz)
5.8G Band	-30	5745.362	29	5824.805	31
	-20	5744.348	23	5824.008	25
	-10	5744.674	26	5823.840	27
	0	5745.134	31	5824.517	19
	10	5744.841	27	5824.659	23
	20	5743.334	21	5824.497	16
	30	5744.648	33	5824.125	24
	40	5744.981	26	5823.819	20
	50	5743.875	19	5824.950	22



## 4.9. ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.249, if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction


The antenna used in this product is a PCB Antenna, and the best case gain of the antenna is Antenna port 1:1dBi and Antenna port 2:1dBi.

### WIFI ANTENNA

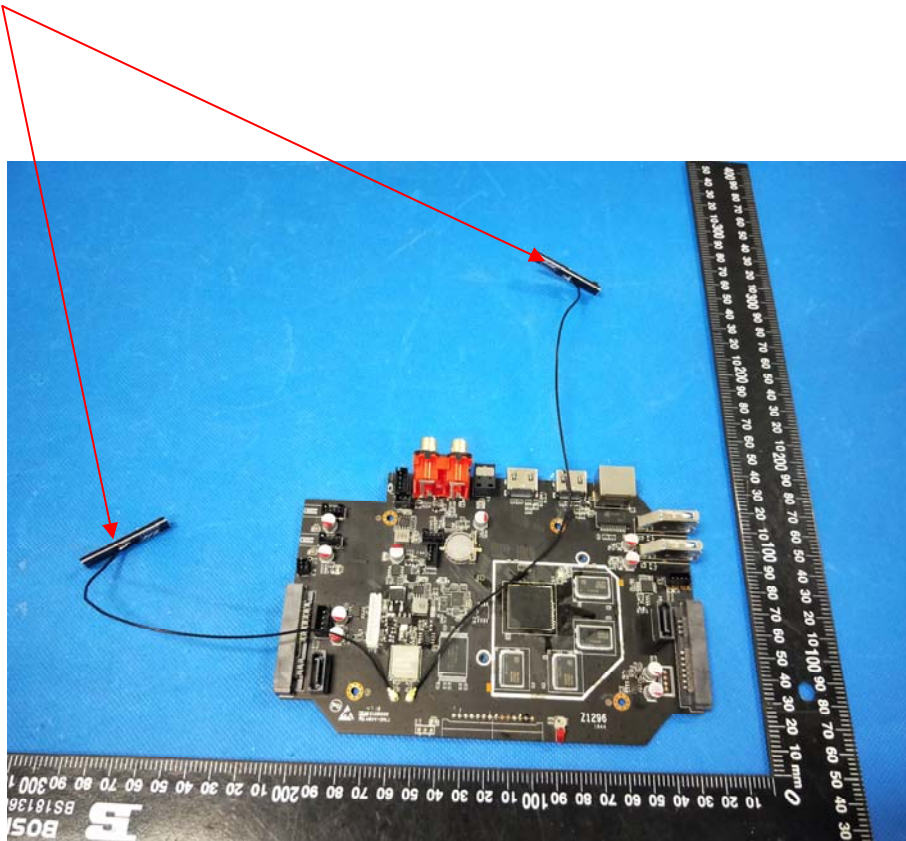



#### 4.10. Photographs of Test Setup

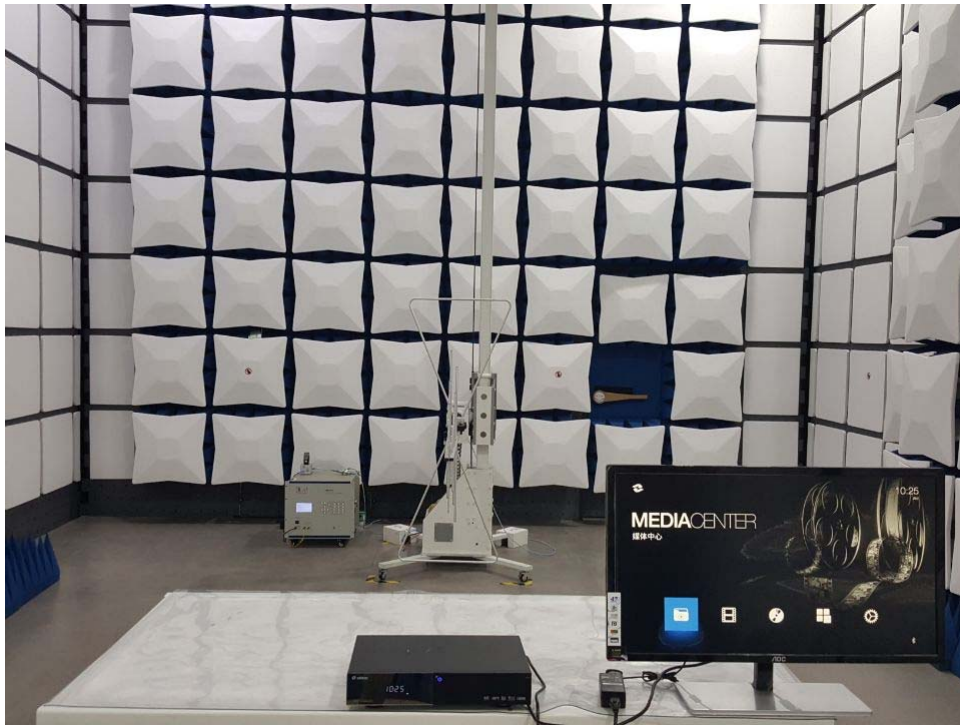





#### **4.11. PHOTOS OF THE EUT**

Reference to the reporter : ANNEX A of external photos and ANNEX B of internal photos