



# FCC RF Test Report

**APPLICANT** : Meta Platforms Technologies, LLC.  
**EQUIPMENT** : VR Headset  
**BRAND NAME** : META PLATFORMS TECHNOLOGIES, LLC  
**MODEL NAME** : DK94EC  
**FCC ID** : 2AGOZ-L31W  
**STANDARD** : FCC Part 15 Subpart E §15.407  
**CLASSIFICATION** : (NII) Unlicensed National Information Infrastructure  
**TEST DATE(S)** : Mar. 04, 2022 ~ Jun. 22, 2022

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia



Approved by: Jason Jia

**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION ..... 5**

    1.1 Applicant ..... 5

    1.2 Product Feature of Equipment Under Test..... 5

    1.3 Product Specification of Equipment Under Test..... 5

    1.4 Modification of EUT ..... 7

    1.5 Testing Location ..... 7

    1.6 Test Software..... 7

    1.7 Applicable Standards..... 7

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST ..... 8**

    2.1 Carrier Frequency and Channel ..... 8

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System..... 12

    2.4 Support Unit used in test configuration and system ..... 13

    2.5 EUT Operation Test Setup ..... 13

    2.6 Measurement Results Explanation Example..... 13

**3 TEST RESULT..... 14**

    3.1 26dB & 99% Occupied Bandwidth Measurement ..... 14

    3.2 Maximum Conducted Output Power Measurement ..... 15

    3.3 Power Spectral Density Measurement ..... 21

    3.4 Unwanted Emissions Measurement ..... 23

    3.5 AC Conducted Emission Measurement..... 28

    3.6 Antenna Requirements ..... 30

**4 LIST OF MEASURING EQUIPMENT ..... 31**

**5 UNCERTAINTY OF EVALUATION ..... 33**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**



### REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR222304-01E	Rev. 01	Initial issue of report	Jul. 09, 2022



### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	2.1049 & 15.403(i)	26dB & 99% Bandwidth	-	Report only	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 30 dBm for UNII-1	Pass	-
			≤ 24 dBm for UNII-2A/2C		
3.3	15.407(a)	Power Spectral Density	≤ 17 dBm for UNII-1	Pass	-
			≤ 11 dBm for UNII-2A/2C		
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	Pass	Under limit 3.04 dB at 5150.00 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 17.75 dB at 0.675 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	Pass	-

<b>Declaration of Conformity:</b>
The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.
<b>Comments and Explanations:</b>
The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Meta Platforms Technologies, LLC.  
1 Hacker Way, Menlo Park, CA 94025, USA

## 1.2 Product Feature of Equipment Under Test

Product Feature	
Equipment	VR Headset
Brand Name	META PLATFORMS TECHNOLOGIES, LLC
Model Name	DK94EC
FCC ID	2AGOZ-L31W
SW Version	28151810289300000
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

## 1.3 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz
Maximum Output Power to Antenna	<p>&lt;MIMO Ant.1+2&gt;            &lt;5180 MHz ~ 5240 MHz&gt;            802.11a : 19.51 dBm / 0.0893 W            802.11n HT20 : 19.22 dBm / 0.0836 W            802.11n HT40 : 19.05 dBm / 0.0804 W            802.11ac VHT20 : 19.47 dBm / 0.0885 W            802.11ac VHT40 : 19.13 dBm / 0.0818 W            802.11ac VHT80 : 11.62 dBm / 0.0145 W            802.11ac VHT160 : 11.65 dBm / 0.0146 W            802.11ax HE20 : 19.80 dBm / 0.0955 W            802.11ax HE40 : 19.25 dBm / 0.0841 W            802.11ax HE80 : 11.76 dBm / 0.0150 W            802.11ax HE160 : 11.78 dBm / 0.0151 W</p> <p>&lt;5260 MHz ~ 5320 MHz&gt;            802.11a : 19.38 dBm / 0.0867 W            802.11n HT20 : 19.38 dBm / 0.0867 W            802.11n HT40 : 19.14 dBm / 0.0820 W            802.11ac VHT20 : 19.21 dBm / 0.0834 W            802.11ac VHT40 : 19.04 dBm / 0.0802 W            802.11ac VHT80 : 13.41 dBm / 0.0219 W            802.11ax HE20 : 19.44 dBm / 0.0879 W            802.11ax HE40 : 19.27 dBm / 0.0845 W            802.11ax HE80 : 13.51 dBm / 0.0224 W</p> <p>&lt;5500 MHz ~ 5720 MHz &gt;            802.11a : 19.42 dBm / 0.0875 W            802.11n HT20 : 19.43 dBm / 0.0877 W</p>



	<p>802.11n HT40 : 19.19 dBm / 0.0830 W              802.11ac VHT20 : 19.35 dBm / 0.0861 W              802.11ac VHT40 : 19.15 dBm / 0.0822 W              802.11ac VHT80 : 18.87 dBm / 0.0771 W              802.11ac VHT160 : 12.60 dBm / 0.0182 W              802.11ax HE20 : 19.54 dBm / 0.0899 W              802.11ax HE40 : 19.32 dBm / 0.0855 W              802.11ax HE80 : 19.02 dBm / 0.0798 W              802.11ax HE160 : 12.75 dBm / 0.0188 W</p>						
99% Occupied Bandwidth	<p>&lt;MIMO Ant. 1+2&gt;              &lt;5180 MHz ~ 5240 MHz&gt;              802.11a : 17.782 MHz              802.11ax HE20 : 19.301 MHz              802.11ax HE40 : 37.882 MHz              802.11ax HE80 : 77.522 MHz              802.11ax HE160 : 157.922 MHz              &lt;5260 MHz ~ 5320 MHz&gt;              802.11a : 17.862 MHz              802.11ax HE20 : 19.381 MHz              802.11ax HE40 : 37.802 MHz              802.11ax HE80 : 77.522 MHz              &lt;5500 MHz ~ 5720 MHz &gt;              802.11a : 17.822 MHz              802.11ax HE20 : 19.341 MHz              802.11ax HE40 : 37.882 MHz              802.11ax HE80 : 77.682 MHz              802.11ax HE160 : 157.922 MHz</p>						
Antenna Type / Gain	<p>&lt;5180 MHz ~ 5240 MHz&gt;              &lt;Ant. 1&gt; : FPC Antenna with gain 4.40 dBi              &lt;Ant. 2&gt; : FPC Antenna with gain 3.50 dBi              &lt;5260 MHz ~ 5320 MHz&gt;              &lt;Ant. 1&gt; : FPC Antenna with gain 4.10 dBi              &lt;Ant. 2&gt; : FPC Antenna with gain 4.20 dBi              &lt;5500 MHz ~ 5720 MHz&gt;              &lt;Ant. 1&gt; : FPC Antenna with gain 4.70 dBi              &lt;Ant. 2&gt; : FPC Antenna with gain 4.50 dBi</p>						
Type of Modulation	<p>802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)              802.11ac/ax : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)</p>						
Antenna Function Description	<table border="1"> <thead> <tr> <th></th> <th>Ant. 1</th> <th>Ant. 2</th> </tr> </thead> <tbody> <tr> <td>802.11 a/n/ac/ax MIMO</td> <td>V</td> <td>V</td> </tr> </tbody> </table>		Ant. 1	Ant. 2	802.11 a/n/ac/ax MIMO	V	V
	Ant. 1	Ant. 2					
802.11 a/n/ac/ax MIMO	V	V					

**Note:**

1. For 802.11n/ac/ax mode, full test 802.11ax mode to cover 11n/ac mode by referring to their maximum output power.
2. The device does not support channel puncturing mode.
3. WIFI MIMO support CDD mode.
4. WIFI Ant. 1 / Ant. 2 corresponding to EUT Photo WIFI Right / Left Antenna.



### 1.4 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.5 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158 FAX : +86-512-57900958		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	CO01-KS 03CH07-KS 03CH06-KS TH01-KS	CN1257	314309

### 1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH07-KS	AUDIX	E3	6.2009-8-24al
2.	03CH06-KS	AUDIX	E3	6.2009-8-24al
3.	CO01-KS	AUDIX	E3	6.2009-8-24

### 1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 15 Subpart E
- FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

## 2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

### 2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 <sup>#</sup>	5210	50 <sup>##</sup>	5250
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 <sup>#</sup>	5290		
Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5500- 5720 MHz MHz U-NII-2C	100	5500	114 <sup>##</sup>	5570
	102*	5510	116	5580
	104	5520	132	5660
	106 <sup>#</sup>	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
	112	5560		





Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 <sup>#</sup>	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 <sup>#</sup>	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel in "\*" were 802.11n HT40/11ac VHT40/11ax HE40.
2. The above Frequency and Channel in "#" were 802.11ac VHT80/11axHE80.
3. The above Frequency and Channel in "##" were 802.11ac VHT160/11ax HE160.



## 2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

### MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0

### RSE Co-location

Bluetooth LE 2Mbps CH39 TX + WLAN 5GHz 802.11a CH36 TX + nRF CH38 TX
WLAN 2.4GHz 802.11ax HE20 CH11 TX + WLAN 5GHz 802.11a CH36 TX + nRF CH38 TX

### Test Cases

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5G) Link + USB Cable( Charging from Adaptor)
<b>Remark:</b> 1. For Radiated Test Cases, The tests were performance with Adaptor, USB Cable 2. RSE Co-location modes are combination from the worst WLAN TX mode and nRF TX mode.	



Ch. #		U-NII-1:5180-5240 MHz	U-NII-2A:5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		U-NII-1:5180-5240 MHz	U-NII-2A:5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		U-NII-1:5180-5240 MHz	U-NII-2A:5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142


Ch. #		U-NII-1:5180-5240 MHz	U-NII-2A:5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

Ch. #		U-NII-1:5180-5240 MHz	U-NII-2A:5260-5320 MHz	U-NII-2C:5500- 5720 MHz
		802.11ac VHT160		802.11ac VHT160
L	Low	-	-	-
M	Middle	50		114
H	High	-	-	-


Note: 802.11ax supports the same channel as 802.11ac.

## 2.3 Connection Diagram of Test System

For Radiated Emission

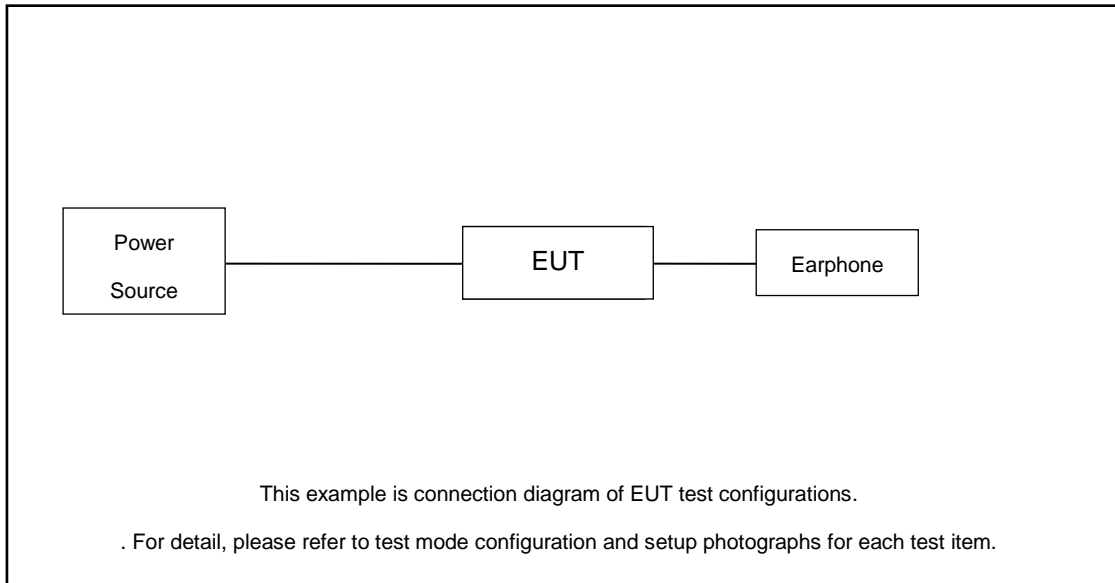

For AC Conducted Emission

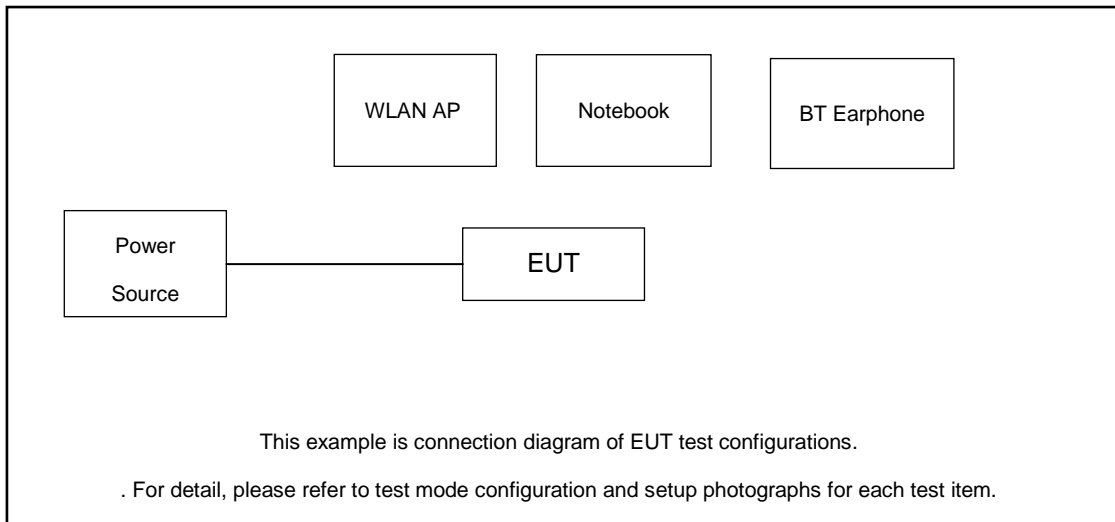



## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	WLAN AP	D-link	DIR-655	KA21R655B1	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Lenovo	LBH308	N/A	N/A	N/A
3.	Notebook	Lenovo	V130-15IKB005	N/A	N/A	AC I/P: Unshielded, 1.8 m DC O/P: Shielded, 1.8 m

## 2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 6.7 dB and 10dB attenuator.

$$\begin{aligned}
 \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\
 &= 6.7 + 10 = 16.7(\text{dB})
 \end{aligned}$$

### 3 Test Result

#### 3.1 26dB & 99% Occupied Bandwidth Measurement

##### 3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


##### 3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

##### 3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the OBW and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
8. Measure and record the results in the test report.

##### 3.1.4 Test Setup

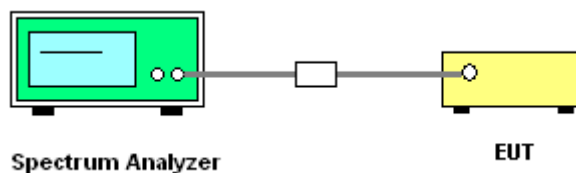

##### 3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



## 3.2 Maximum Conducted Output Power Measurement

### 3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm  $10 \log B$ , where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

### 3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

### 3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor,  $10 \log(1/x)$ , where  $x$  is the duty cycle.
4. For MIMO mode, the measure-and-sum technique should be used for measuring the in-band transmit power of a device.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

### 3.2.4 Test Setup

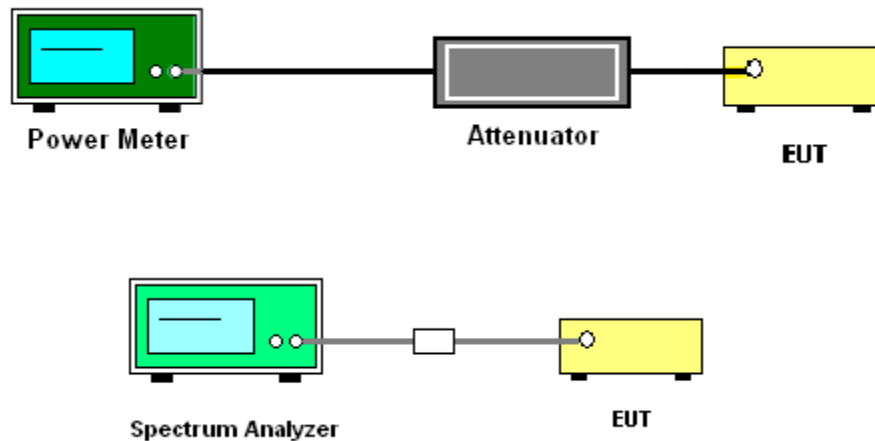





3.2.5 Test Result of Maximum Conducted Output Power

FCC U-NII-1 MIMO												
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	2	36	5180	16.73	16.26	19.51	30.00		4.40		Pass
11a	6Mbps	2	44	5220	16.59	16.15	19.39	30.00		4.40		Pass
11a	6Mbps	2	48	5240	16.67	16.23	19.47	30.00		4.40		Pass
HT20	MCS0	2	36	5180	14.34	13.83	17.10	30.00		4.40		Pass
HT20	MCS0	2	44	5220	16.38	16.04	19.22	30.00		4.40		Pass
HT20	MCS0	2	48	5240	16.22	16.07	19.16	30.00		4.40		Pass
HT40	MCS0	2	38	5190	9.40	9.44	12.43	30.00		4.40		Pass
HT40	MCS0	2	46	5230	16.19	15.88	19.05	30.00		4.40		Pass
VHT20	MCS0	2	36	5180	14.50	13.89	17.21	30.00		4.40		Pass
VHT20	MCS0	2	44	5220	16.59	16.33	19.47	30.00		4.40		Pass
VHT20	MCS0	2	48	5240	16.36	16.22	19.30	30.00		4.40		Pass
VHT40	MCS0	2	38	5190	9.47	9.46	12.47	30.00		4.40		Pass
VHT40	MCS0	2	46	5230	16.32	15.91	19.13	30.00		4.40		Pass
VHT80	MCS0	2	42	5210	8.52	8.69	11.62	30.00		4.40		Pass
VHT160	MCS0	2	50	5250	8.53	8.74	11.65	30.00		4.40		Pass

FCC U-NII-1 MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	2	36	5180	Full	14.57	14.04	17.32	30.00		4.40		Pass
HE20	MCS0	2	36	5180	26/0	10.82	9.98	13.43	30.00		4.40		Pass
HE20	MCS0	2	36	5180	52/37	13.58	12.76	16.20	30.00		4.40		Pass
HE20	MCS0	2	36	5180	106/53	16.83	16.08	19.48	30.00		4.40		Pass
HE20	MCS0	2	44	5220	Full	16.94	16.63	19.80	30.00		4.40		Pass
HE20	MCS0	2	44	5220	26/0	10.48	9.96	13.24	30.00		4.40		Pass
HE20	MCS0	2	44	5220	52/37	13.64	12.95	16.32	30.00		4.40		Pass
HE20	MCS0	2	44	5220	106/53	16.88	16.11	19.52	30.00		4.40		Pass
HE20	MCS0	2	48	5240	Full	16.76	16.68	19.73	30.00		4.40		Pass
HE20	MCS0	2	48	5240	26/8	8.61	8.57	11.60	30.00		4.40		Pass
HE20	MCS0	2	48	5240	52/40	12.76	11.91	15.36	30.00		4.40		Pass
HE20	MCS0	2	48	5240	106/54	15.92	15.08	18.53	30.00		4.40		Pass
HE40	MCS0	2	38	5190	Full	9.58	9.57	12.58	30.00		4.40		Pass
HE40	MCS0	2	46	5230	Full	16.50	15.98	19.25	30.00		4.40		Pass
HE80	MCS0	2	42	5210	Full	8.70	8.79	11.76	30.00		4.40		Pass
HE160	MCS0	2	50	5250	Full	8.58	8.95	11.78	30.00		4.40		Pass



FCC U-NII-2A MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	52	5260	16.68	16.04	19.38	23.98		4.20		26.99	Pass
11a	6Mbps	2	60	5300	16.52	16.06	19.31	23.98		4.20		26.99	Pass
11a	6Mbps	2	64	5320	15.51	15.05	18.30	23.98		4.20		26.99	Pass
HT20	MCS0	2	52	5260	16.47	16.15	19.32	23.98		4.20		26.99	Pass
HT20	MCS0	2	60	5300	16.57	16.16	19.38	23.98		4.20		26.99	Pass
HT20	MCS0	2	64	5320	13.96	14.79	17.40	23.98		4.20		26.99	Pass
HT40	MCS0	2	54	5270	16.27	15.99	19.14	23.98		4.20		26.99	Pass
HT40	MCS0	2	62	5310	11.69	11.44	14.58	23.98		4.20		26.99	Pass
VHT20	MCS0	2	52	5260	16.36	16.03	19.21	23.98		4.20		26.99	Pass
VHT20	MCS0	2	60	5300	16.38	16.01	19.21	23.98		4.20		26.99	Pass
VHT20	MCS0	2	64	5320	14.00	14.81	17.43	23.98		4.20		26.99	Pass
VHT40	MCS0	2	54	5270	16.09	15.96	19.04	23.98		4.20		26.99	Pass
VHT40	MCS0	2	62	5310	11.62	11.41	14.53	23.98		4.20		26.99	Pass
VHT80	MCS0	2	58	5290	10.53	10.26	13.41	23.98		4.20		26.99	Pass

FCC U-NII-2A MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	52	5260	Full	16.54	16.23	19.40	23.98		4.20		26.99	Pass
HE20	MCS0	2	52	5260	26/0	11.22	10.12	13.72	23.98		4.20		26.99	Pass
HE20	MCS0	2	52	5260	52/37	13.47	12.60	16.06	23.98		4.20		26.99	Pass
HE20	MCS0	2	52	5260	106/53	16.28	15.51	18.92	23.98		4.20		26.99	Pass
HE20	MCS0	2	60	5300	Full	16.60	16.25	19.44	23.98		4.20		26.99	Pass
HE20	MCS0	2	60	5300	26/0	11.17	10.01	13.64	23.98		4.20		26.99	Pass
HE20	MCS0	2	60	5300	52/37	13.52	12.66	16.12	23.98		4.20		26.99	Pass
HE20	MCS0	2	60	5300	106/53	16.27	15.49	18.91	23.98		4.20		26.99	Pass
HE20	MCS0	2	64	5320	Full	14.20	15.14	17.70	23.98		4.20		26.99	Pass
HE20	MCS0	2	64	5320	26/8	11.41	10.57	14.02	23.98		4.20		26.99	Pass
HE20	MCS0	2	64	5320	52/40	13.61	12.60	16.14	23.98		4.20		26.99	Pass
HE20	MCS0	2	64	5320	106/54	16.45	15.52	19.02	23.98		4.20		26.99	Pass
HE40	MCS0	2	54	5270	Full	16.41	16.12	19.27	23.98		4.20		26.99	Pass
HE40	MCS0	2	62	5310	Full	12.32	11.58	14.97	23.98		4.20		26.99	Pass
HE80	MCS0	2	58	5290	Full	10.64	10.35	13.51	23.98		4.20		26.99	Pass
HE160	MCS0	2	50	5250	Full	8.58	8.95	11.78	23.98		4.20		26.99	Pass



FCC U-NII-2C MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	100	5500	16.58	16.23	19.42	23.98		4.70		26.99	Pass
11a	6Mbps	2	116	5580	16.62	16.07	19.36	23.98		4.70		26.99	Pass
11a	6Mbps	2	140	5700	15.43	15.12	18.29	23.98		4.70		26.99	Pass
HT20	MCS0	2	100	5500	16.64	16.20	19.43	23.98		4.70		26.99	Pass
HT20	MCS0	2	116	5580	16.54	16.25	19.41	23.98		4.70		26.99	Pass
HT20	MCS0	2	140	5700	14.51	14.29	17.41	23.98		4.70		26.99	Pass
HT40	MCS0	2	102	5510	12.83	12.49	15.67	23.98		4.70		26.99	Pass
HT40	MCS0	2	110	5550	16.24	16.11	19.19	23.98		4.70		26.99	Pass
HT40	MCS0	2	134	5670	16.07	16.03	19.06	23.98		4.70		26.99	Pass
VHT20	MCS0	2	100	5500	16.37	16.19	19.29	23.98		4.70		26.99	Pass
VHT20	MCS0	2	116	5580	16.53	16.10	19.33	23.98		4.70		26.99	Pass
VHT20	MCS0	2	140	5700	14.52	14.21	17.38	23.98		4.70		26.99	Pass
VHT40	MCS0	2	102	5510	12.58	12.49	15.54	23.98		4.70		26.99	Pass
VHT40	MCS0	2	110	5550	16.16	16.04	19.11	23.98		4.70		26.99	Pass
VHT40	MCS0	2	134	5670	16.20	16.07	19.15	23.98		4.70		26.99	Pass
VHT80	MCS0	2	106	5530	9.61	8.89	12.28	23.98		4.70		26.99	Pass
VHT80	MCS0	2	122	5610	16.19	15.50	18.87	23.98		4.70		26.99	Pass
VHT160	MCS0	2	114	5570	9.77	9.39	12.60	23.98		4.70		26.99	Pass

FCC U-NII-2C straddle channel MIMO													
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	2	144	5720	16.58	16.12	19.37	23.98		4.70		26.99	Pass
HT20	MCS0	2	144	5720	16.45	16.17	19.32	23.98		4.70		26.99	Pass
HT40	MCS0	2	142	5710	16.14	15.96	19.06	23.98		4.70		26.99	Pass
VHT20	MCS0	2	144	5720	16.59	16.09	19.35	23.98		4.70		26.99	Pass
VHT40	MCS0	2	142	5710	16.17	16.12	19.15	23.98		4.70		26.99	Pass
VHT80	MCS0	2	138	5690	16.07	15.46	18.79	23.98		4.70		26.99	Pass



FCC U-NII-2C MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	100	5500	Full	16.68	16.37	19.54	23.98		4.70		26.99	Pass
HE20	MCS0	2	100	5500	26/0	9.62	8.62	12.16	23.98		4.70		26.99	Pass
HE20	MCS0	2	100	5500	52/37	13.41	12.50	15.99	23.98		4.70		26.99	Pass
HE20	MCS0	2	100	5500	106/53	15.83	15.12	18.50	23.98		4.70		26.99	Pass
HE20	MCS0	2	116	5580	Full	16.58	16.34	19.47	23.98		4.70		26.99	Pass
HE20	MCS0	2	116	5580	26/0	9.71	9.00	12.38	23.98		4.70		26.99	Pass
HE20	MCS0	2	116	5580	52/37	13.13	12.35	15.76	23.98		4.70		26.99	Pass
HE20	MCS0	2	116	5580	106/53	16.01	15.12	18.60	23.98		4.70		26.99	Pass
HE20	MCS0	2	140	5700	Full	14.74	14.40	17.58	23.98		4.70		26.99	Pass
HE20	MCS0	2	140	5700	26/8	9.65	8.67	12.20	23.98		4.70		26.99	Pass
HE20	MCS0	2	140	5700	52/40	13.31	12.51	15.94	23.98		4.70		26.99	Pass
HE20	MCS0	2	140	5700	106/54	15.90	15.33	18.63	23.98		4.70		26.99	Pass
HE40	MCS0	2	102	5510	Full	12.95	12.61	15.79	23.98		4.70		26.99	Pass
HE40	MCS0	2	110	5550	Full	16.26	16.17	19.22	23.98		4.70		26.99	Pass
HE40	MCS0	2	134	5670	Full	16.37	16.26	19.32	23.98		4.70		26.99	Pass
HE80	MCS0	2	106	5530	Full	9.71	8.89	12.33	23.98		4.70		26.99	Pass
HE80	MCS0	2	122	5610	Full	16.36	15.54	18.98	23.98		4.70		26.99	Pass
HE160	MCS0	2	114	5570	Full	9.91	9.57	12.75	23.98		4.70		26.99	Pass

FCC U-NII-2C straddle channel MIMO														
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	RU Config.	Average Conducted Power with duty factor (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	SUM	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	2	144	5720	Full	16.76	16.30	19.54	23.98		4.70		26.99	Pass
HE20	MCS0	2	144	5720	26/8	9.87	8.02	12.06	23.98		4.70		26.99	Pass
HE20	MCS0	2	144	5720	52/40	13.22	12.34	15.81	23.98		4.70		26.99	Pass
HE20	MCS0	2	144	5720	106/54	16.02	15.14	18.61	23.98		4.70		26.99	Pass
HE40	MCS0	2	142	5710	Full	16.34	16.19	19.27	23.98		4.70		26.99	Pass
HE80	MCS0	2	138	5690	Full	16.40	15.57	19.02	23.98		4.70		26.99	Pass



### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

**# Method SA-2 #**

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW  $\geq$  3 MHz.
- Number of points in sweep  $\geq$  2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add  $10 \log(1/x)$ , where x is the duty cycle, to the measured power in order to compute the

average power during the actual transmission times. For example, add  $10 \log(1/0.25) = 6$  dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is the bin-by-bin summation to obtain the combined spectrum. For the device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points, the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.


Method (b): Measure and sum spectral maxima across the outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The maximum value (peak) of each spectrum is determined. These maximum values are then summed mathematically in linear power units across the outputs.

Method (c): Measure and add  $10 \log(N_{\text{ANT}})$  dB, where  $N_{\text{ANT}}$  is the number of outputs.

The measurement on each individual output were performed with the same span and number on each individual output. The quantity  $10 \log(N_{\text{ANT}})$  dB is added to each spectrum value before comparing to the emission limit.

### 3.3.4 Test Setup

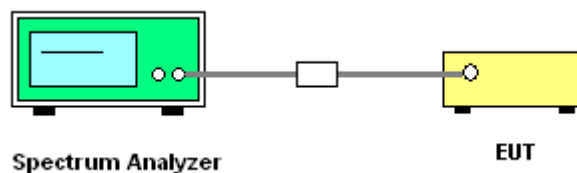

### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



### 3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

#### 3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5725 MHz band: all emissions outside of the 5470-5725 MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3



EIRP (dBm)	Field Strength at 3m (dBµV/m)
- 27	68.3

**Note:** The following formula is used to convert the EIRP to field strength.

$$EIRP = E_{Meas} + 20\log (d_{Meas}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

$E_{Meas}$  is the field strength of the emission at the measurement distance, in dBµV/m

$d_{Meas}$  is the measurement distance, in m

(3) ANSI C63.10-2013 clause 12.7.3 note 97

As specified by regulatory requirements, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit. However, an out-of-band emission that complies with both the average and peak general regulatory limits is not required to satisfy the peak emission limit.

### 3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.






### 3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.
  - (1) Procedure for Unwanted Emissions Measurements Below 1000MHz
    - RBW = 120 kHz
    - VBW = 300 kHz
    - Detector = Peak
    - Trace mode = max hold
  - (2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
    - RBW = 1 MHz
    - VBW  $\geq$  3 MHz
    - Detector = Peak
    - Sweep time = auto
    - Trace mode = max hold
  - (3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
    - RBW = 1 MHz
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq$  1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

### 3.4.4 Test Setup


For radiated emissions below 30MHz

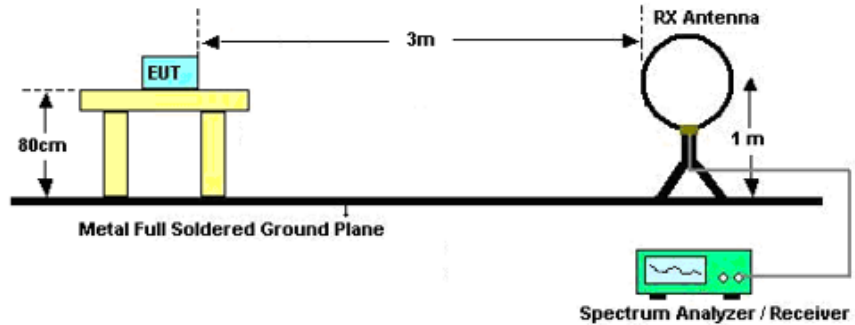

For radiated emissions from 30MHz to 1GHz

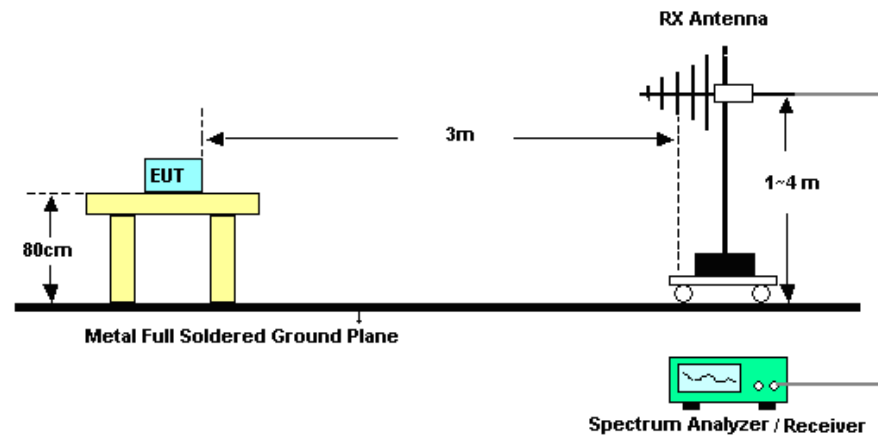

For radiated emissions above 1GHz

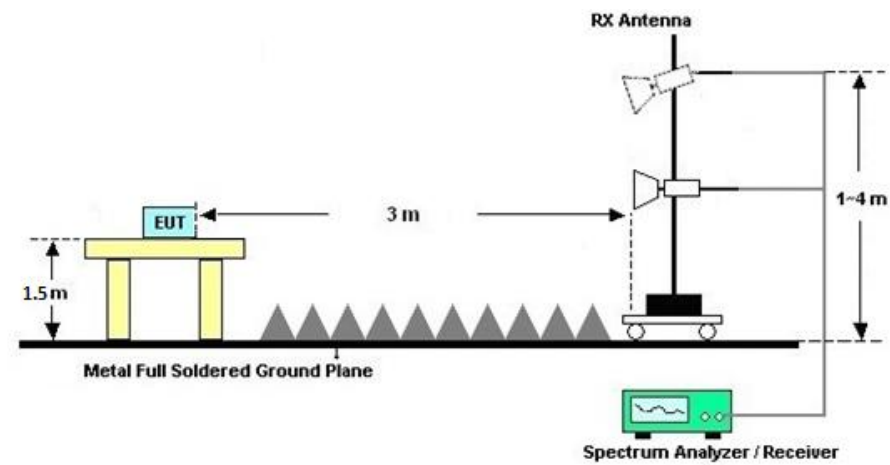



### **3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.4.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.4.7 Duty Cycle**

Please refer to Appendix D.

### **3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.5 AC Conducted Emission Measurement

#### 3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

#### 3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

### 3.5.4 Test Setup

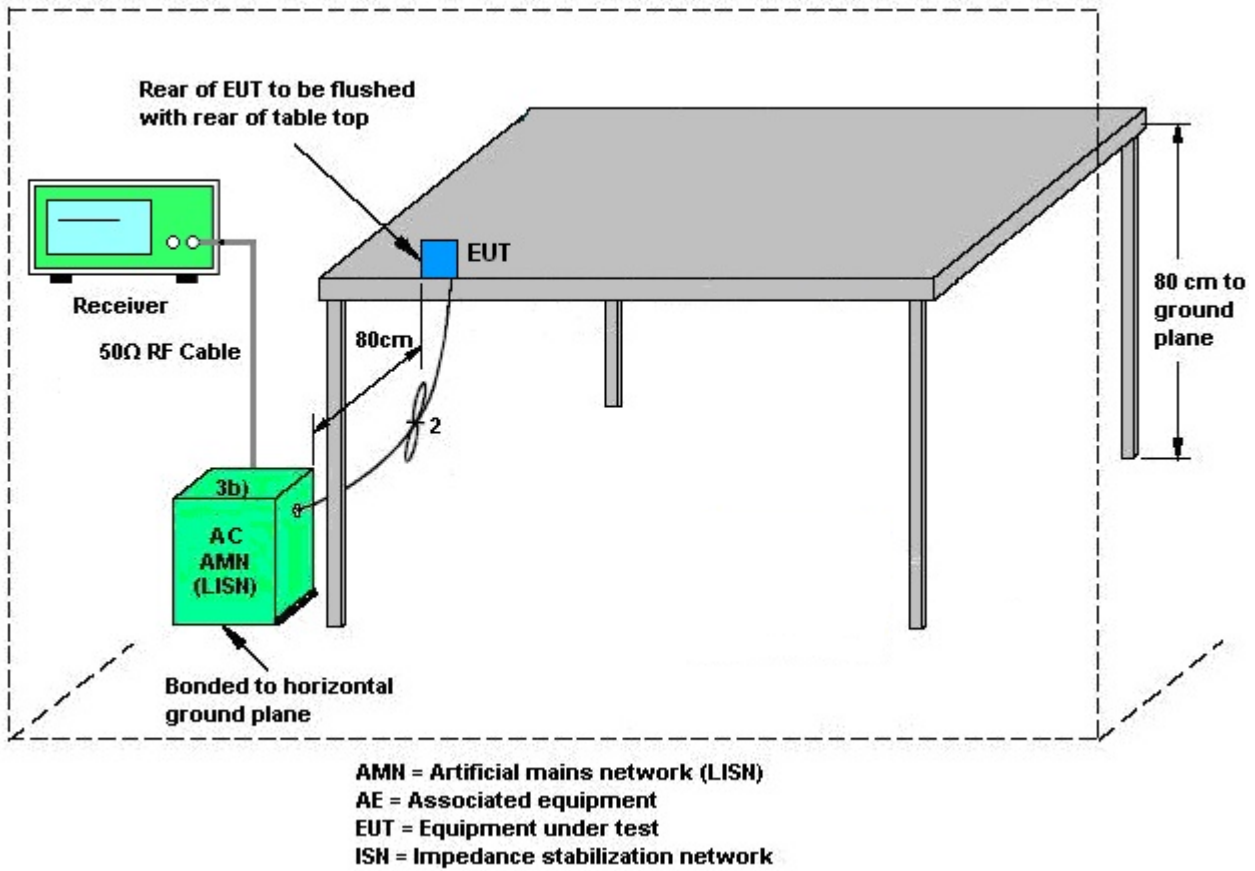

### 3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



### 3.6 Antenna Requirements

#### 3.6.1 Standard Applicable

If transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

#### 3.6.3 Antenna Gain

<CDD Modes >

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For CDD transmissions, directional gain is calculated as

Directional gain = GANT + Array Gain, where Array Gain is as follows.

For power spectral density (PSD) measurements on all devices,

Array Gain = 10 log(NANT/NSS=1) dB.

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4.

Directional gain may be calculated by using the formulas applicable to equal gain antennas with GANT set equal to the gain of the antenna having the highest gain;

The EUT supports CDD mode.

For power, the directional gain GANT is set equal to the antenna having the highest gain, i.e., F)2)f)i).

For PSD, the directional gain calculation is following F)2)f)ii) of KDB 662911 D01 v02r01.

The power and PSD limit should be modified if the directional gain of EUT is over 6 dBi,

The directional gain "DG" is calculated as following table.

<CDD Modes>						
	Ant. 1	Ant. 2	DG for Power	DG for PSD	Power Limit Reduction	PSD Limit Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	4.40	3.50	4.40	6.97	0.00	0.97
Band II	4.10	4.20	4.20	7.16	0.00	1.16
Band III	4.70	4.50	4.70	7.61	0.00	1.61



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 14, 2021	Mar. 04, 2022~ Jun. 22, 2022	Oct. 13, 2022	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 05, 2022	Mar. 04, 2022~ Jun. 22, 2022	Jan. 04, 2023	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 05, 2022	Mar. 04, 2022~ Jun. 22, 2022	Jan. 04, 2023	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz;Max 30dBm	Oct. 16, 2021	Jun. 16, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55370528	10Hz-44G,MAX 30dB	Oct. 16, 2021	Jun. 16, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 16, 2022	Oct. 29, 2022	Radiation (03CH07-KS)
Bilog Antenna	TeseQ	CBL6111D	44483	30MHz-1GHz	Dec. 22, 2021	Jun. 16, 2022	Dec. 21, 2022	Radiation (03CH07-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 30, 2021	Jun. 16, 2022	Oct. 29, 2022	Radiation (03CH07-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 16, 2022	Jul. 29, 2023	Radiation (03CH07-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	SONOMA	310N	413740	9KHz-1GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
Amplifier	Keysight	83017A	MY53270316	500MHz~26.5GHz	Oct. 16, 2021	Jun. 16, 2022	Oct. 15, 2022	Radiation (03CH07-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH07-KS)
AC Power Source	Chroma	61601	616010002 473	N/A	NCR	Jun. 16, 2022	NCR	Radiation (03CH07-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jun. 16, 2022	NCR	Radiation (03CH07-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jun. 16, 2022	NCR	Radiation (03CH07-KS)
EMI Test Receiver	Keysight	N9038A	MY56400004	3Hz~8.5GHz;Max 30dBm	Oct. 16, 2021	Jun. 16, 2022	Oct. 15, 2022	Radiation (03CH06-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY60242126	10Hz-44GHz	Oct. 26, 2021	Jun. 16, 2022	Oct. 25, 2022	Radiation (03CH06-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 30, 2021	Jun. 16, 2022	Oct. 29, 2022	Radiation (03CH06-KS)
Bilog Antenna	TeseQ	CBL6111D	49921	30MHz-1GHz	May 24, 2022	Jun. 16, 2022	May 23, 2023	Radiation (03CH06-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00240138	1GHz~18GHz	Jul. 19, 2021	Jun. 16, 2022	Jul. 18, 2022	Radiation (03CH06-KS)
SHF-EHF Horn	Com-power	AH-840	101093	18GHz~40GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
Amplifier	SONOMA	310N	380827	9KHz ~1GHZ	Jul. 30, 2021	Jun. 16, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	MITEQ	EM18G40GG A	060728	18~40GHz	Jan. 05, 2022	Jun. 16, 2022	Jan. 04, 2023	Radiation (03CH06-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	2025788	1Ghz-18Ghz	Jul. 30, 2021	Jun. 16, 2022	Jul. 29, 2022	Radiation (03CH06-KS)
Amplifier	Keysight	83017A	MY53270319	500MHz~26.5GHz	Oct. 14, 2021	Jun. 16, 2022	Oct. 13, 2022	Radiation (03CH06-KS)



AC Power Source	Chroma	61601	F1040900 04	N/A	NCR	Jun. 16, 2022	NCR	Radiation (03CH06-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Jun. 16, 2022	NCR	Radiation (03CH06-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Jun. 16, 2022	NCR	Radiation (03CH06-KS)
EMI Receiver	R&S	ESCI7	100768	9kHz~7GHz;	Apr. 20, 2022	Jun. 17, 2022	Apr. 19, 2023	Conduction (CO01-KS)
AC LISN (for auxiliary equipment)	MessTec	AN3016	060103	9kHz~30MHz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC LISN	R&S	ENV216	100334	9kHz~30MHz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)
AC Power Source	Chroma	61602	ABP00000 0811	AC 0V~300V, 45Hz~1000Hz	Oct. 14, 2021	Jun. 17, 2022	Oct. 13, 2022	Conduction (CO01-KS)

NCR: No Calibration Required





## 5 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	0.56 dB
Conducted Emissions	0.92 dB
Occupied Channel Bandwidth	0.03 MHz
Conducted Power Spectral Density	0.54 dB

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.94dB
---	--------

For 03CH07-KS

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------



For 03CH06-KS

**Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

**Uncertainty of Radiated Emission Measurement (1000 MHz ~ 18000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

**Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0dB
---	-------

----- THE END -----



### Appendix A. Conducted Test Results

Test Engineer :	Jiang Jun	Temperature :	21~25°C
		Relative Humidity :	51~54%

### 26DB Emission Bandwidth

#### Test Result

TestMode	Antenna	Frequency[MHz]	26db EBW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
11A-CDD	Ant1	5180	21.16	5169.36	5190.52	---	---
	Ant2	5180	21.20	5169.40	5190.60	---	---
	Ant1	5220	21.20	5209.36	5230.56	---	---
	Ant2	5220	21.04	5209.48	5230.52	---	---
	Ant1	5240	21.04	5229.52	5250.56	---	---
	Ant2	5240	21.04	5229.52	5250.56	---	---
	Ant1	5260	21.08	5249.40	5270.48	---	---
	Ant2	5260	21.08	5249.48	5270.56	---	---
	Ant1	5300	20.96	5289.52	5310.48	---	---
	Ant2	5300	21.16	5289.40	5310.56	---	---
	Ant1	5320	21.16	5309.44	5330.60	---	---
	Ant2	5320	21.32	5309.36	5330.68	---	---
	Ant1	5500	21.16	5489.32	5510.48	---	---
	Ant2	5500	21.00	5489.52	5510.52	---	---
	Ant1	5580	21.20	5569.36	5590.56	---	---
	Ant2	5580	21.16	5569.44	5590.60	---	---
	Ant1	5700	21.08	5689.40	5710.48	---	---
	Ant2	5700	21.04	5689.48	5710.52	---	---
	Ant1	5720	21.16	5709.32	5730.48	---	---
	Ant2	5720	21.16	5709.32	5730.48	---	---
Ant1	5720_UNII-2C	15.68	5709.32	5725	---	---	
Ant2	5720_UNII-2C	15.68	5709.32	5725	---	---	
11AX20MIMO	Ant1	5180	21.68	5169.16	5190.84	---	---
	Ant2	5180	21.32	5169.32	5190.64	---	---
	Ant1	5220	21.72	5209.12	5230.84	---	---
	Ant2	5220	21.32	5209.28	5230.60	---	---
	Ant1	5240	21.40	5229.28	5250.68	---	---
	Ant2	5240	21.32	5229.24	5250.56	---	---





	Ant1	5260	21.56	5249.20	5270.76	---	---
	Ant2	5260	21.36	5249.28	5270.64	---	---
	Ant1	5300	21.44	5289.24	5310.68	---	---
	Ant2	5300	21.32	5289.36	5310.68	---	---
	Ant1	5320	21.40	5309.28	5330.68	---	---
	Ant2	5320	21.44	5309.28	5330.72	---	---
	Ant1	5500	21.16	5489.32	5510.48	---	---
	Ant2	5500	21.20	5489.32	5510.52	---	---
	Ant1	5580	21.20	5569.40	5590.60	---	---
	Ant2	5580	21.32	5569.32	5590.64	---	---
	Ant1	5700	21.64	5689.08	5710.72	---	---
	Ant2	5700	21.40	5689.32	5710.72	---	---
	Ant1	5720	21.48	5709.20	5730.68	---	---
	Ant2	5720	21.36	5709.24	5730.60	---	---
	Ant1	5720_UNII-2C	15.8	5709.20	5725	---	---
	Ant2	5720_UNII-2C	15.76	5709.24	5725	---	---
11AX40MIMO	Ant1	5190	40.16	5169.92	5210.08	---	---
	Ant2	5190	40.24	5169.92	5210.16	---	---
	Ant1	5230	40.40	5209.76	5250.16	---	---
	Ant2	5230	40.40	5209.76	5250.16	---	---
	Ant1	5270	40.48	5249.76	5290.24	---	---
	Ant2	5270	40.24	5249.92	5290.16	---	---
	Ant1	5310	40.48	5289.76	5330.24	---	---
	Ant2	5310	40.40	5289.76	5330.16	---	---
	Ant1	5510	40.40	5489.76	5530.16	---	---
	Ant2	5510	40.24	5489.84	5530.08	---	---
	Ant1	5550	40.32	5529.84	5570.16	---	---
	Ant2	5550	40.08	5530.00	5570.08	---	---
	Ant1	5670	40.40	5649.68	5690.08	---	---
	Ant2	5670	40.16	5650.00	5690.16	---	---
	Ant1	5710	40.48	5689.76	5730.24	---	---
	Ant2	5710	40.24	5689.92	5730.16	---	---
Ant1	5710_UNII-2C	35.24	5689.76	5725	---	---	
Ant2	5710_UNII-2C	35.08	5689.92	5725	---	---	
11AX80MIMO	Ant1	5210	81.60	5169.36	5250.96	---	---
	Ant2	5210	81.28	5169.52	5250.80	---	---
	Ant1	5290	82.08	5249.04	5331.12	---	---
	Ant2	5290	81.76	5249.20	5330.96	---	---
	Ant1	5530	82.24	5488.88	5571.12	---	---
	Ant2	5530	81.28	5489.36	5570.64	---	---
	Ant1	5610	81.92	5569.04	5650.96	---	---





	Ant2	5610	81.44	5569.36	5650.80	---	---
	Ant1	5690	82.40	5648.56	5730.96	---	---
	Ant2	5690	81.76	5649.36	5731.12	---	---
	Ant1	5690_UNII-2C	76.44	5648.56	5725	---	---
	Ant2	5690_UNII-2C	75.64	5649.36	5725	---	---
11AX160MIMO	Ant1	5250	165.12	5167.76	5332.88	---	---
	Ant2	5250	165.12	5168.08	5333.20	---	---
	Ant1	5570	165.76	5487.12	5652.88	---	---
	Ant2	5570	165.12	5487.76	5652.88	---	---




Test Graphs

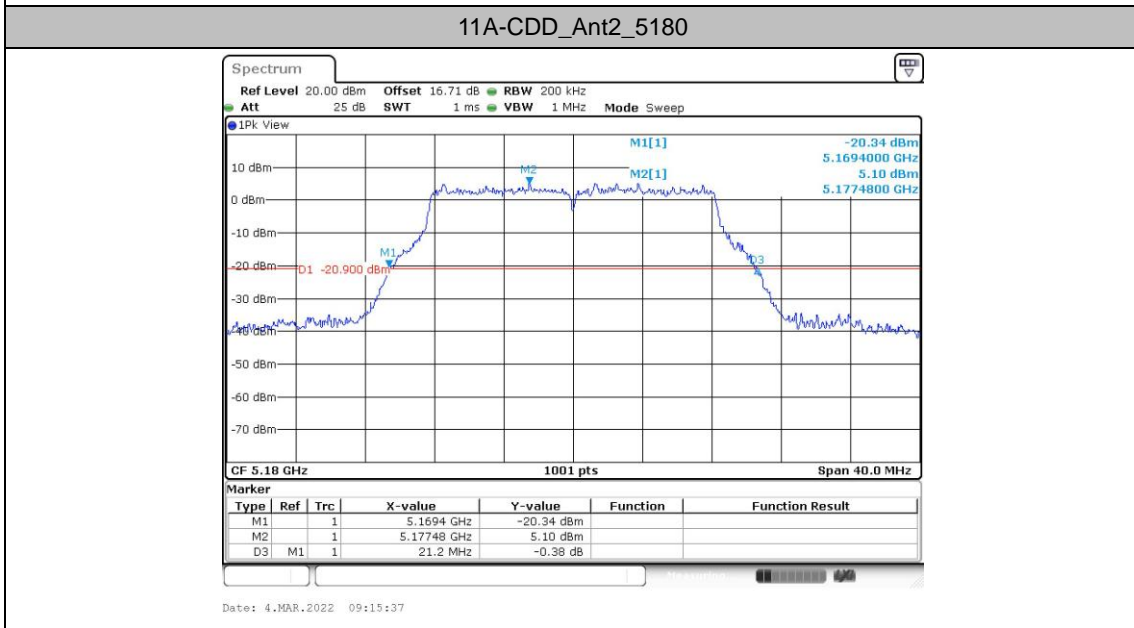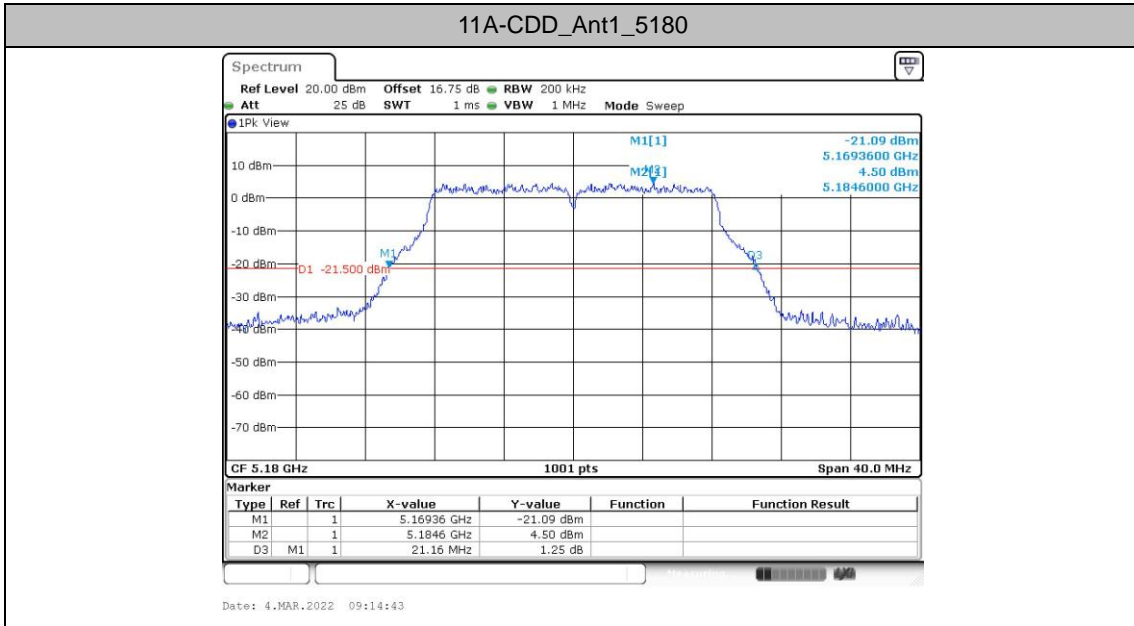


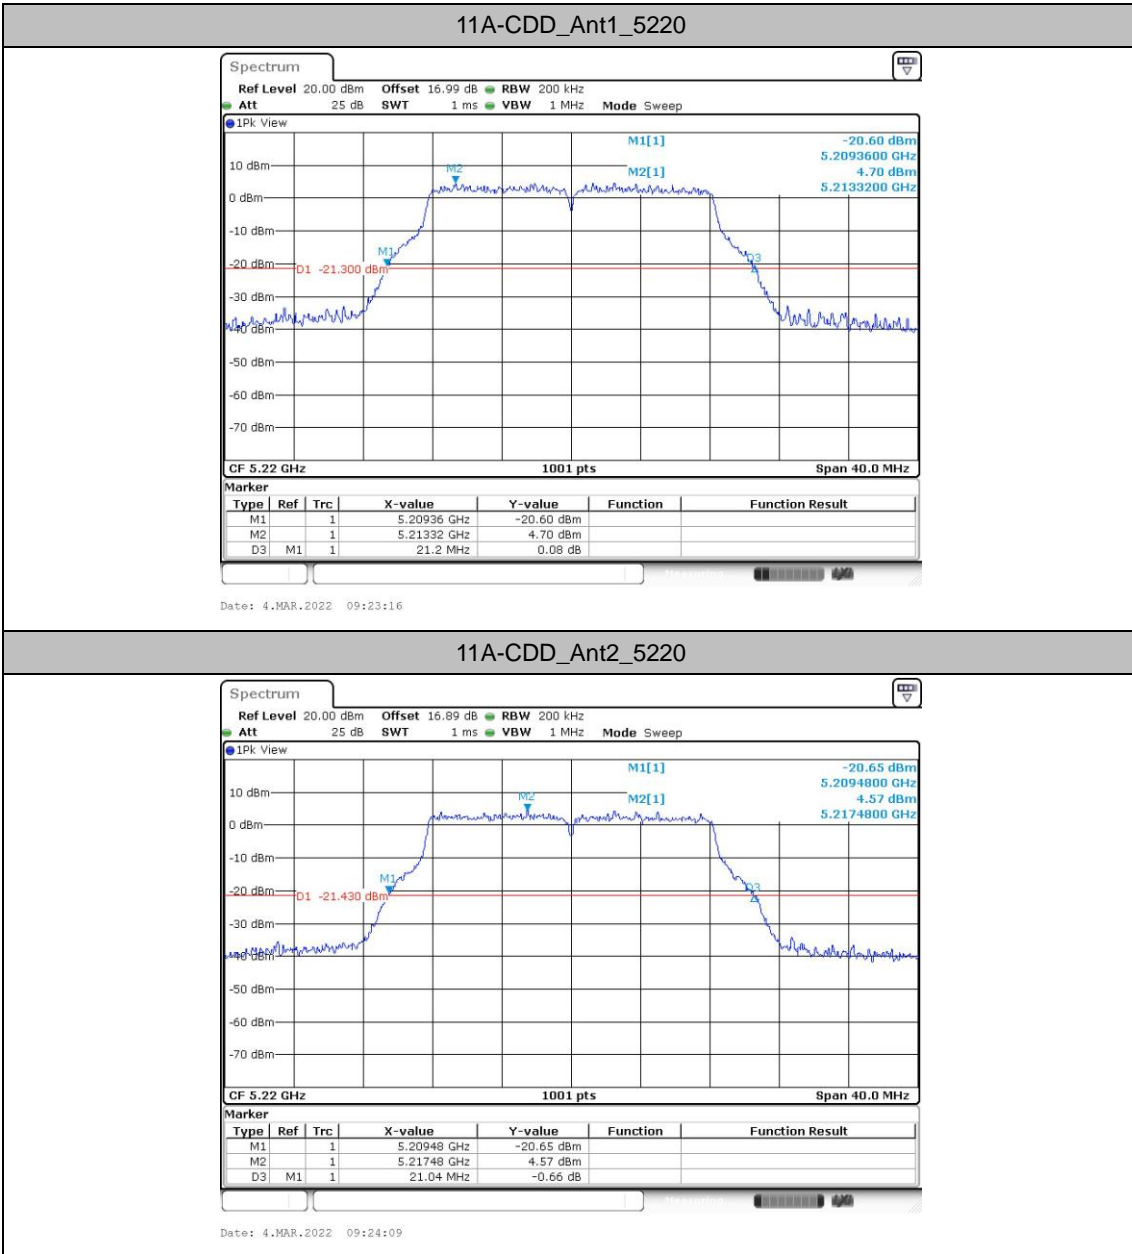


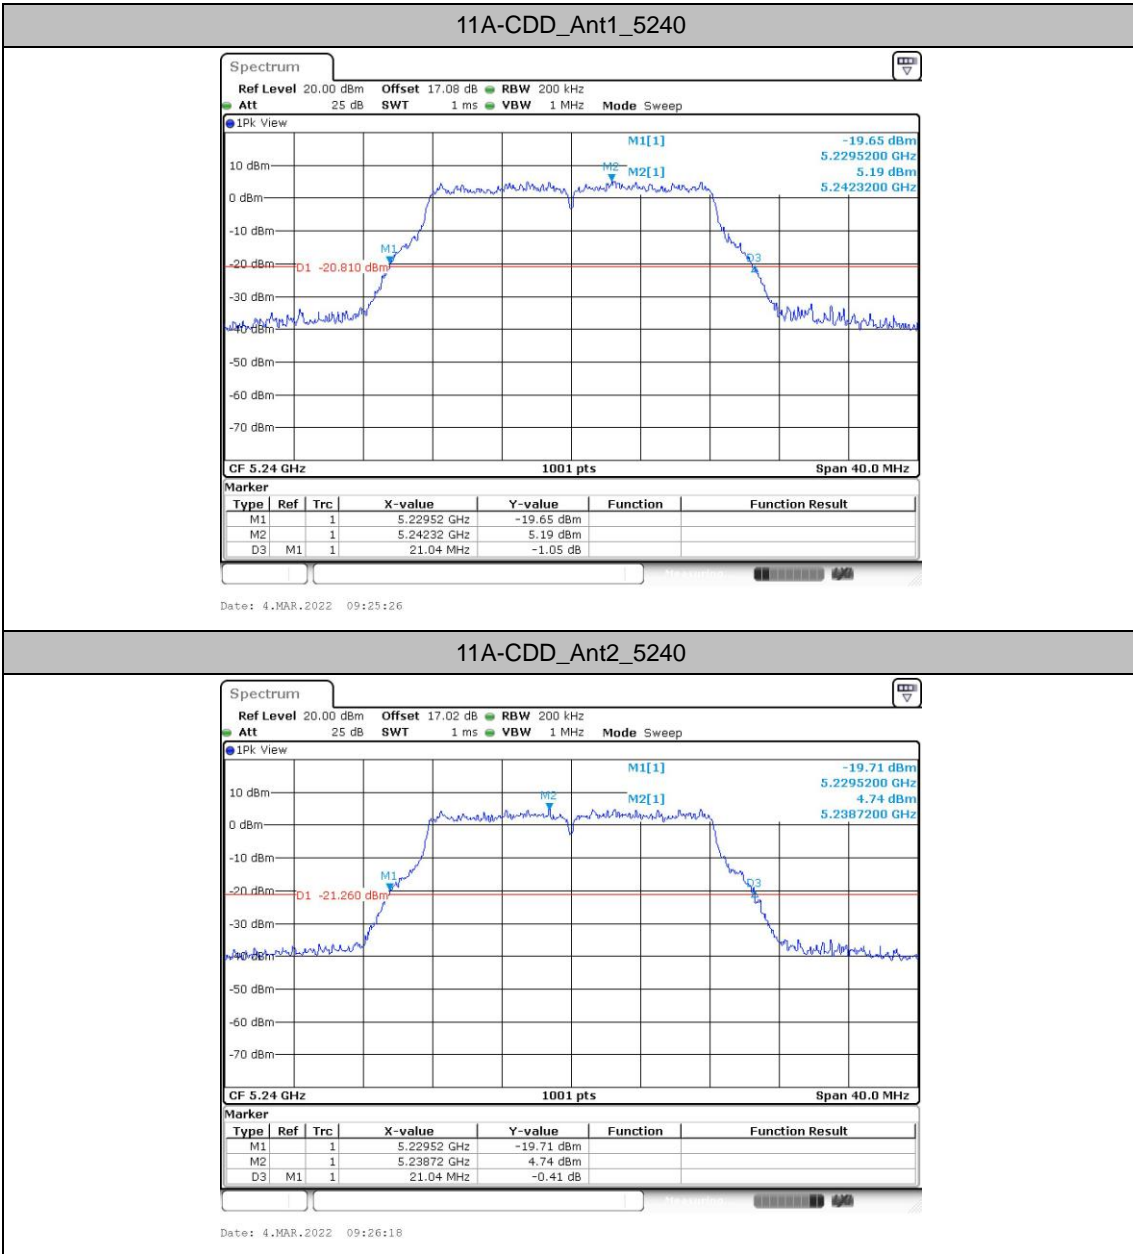


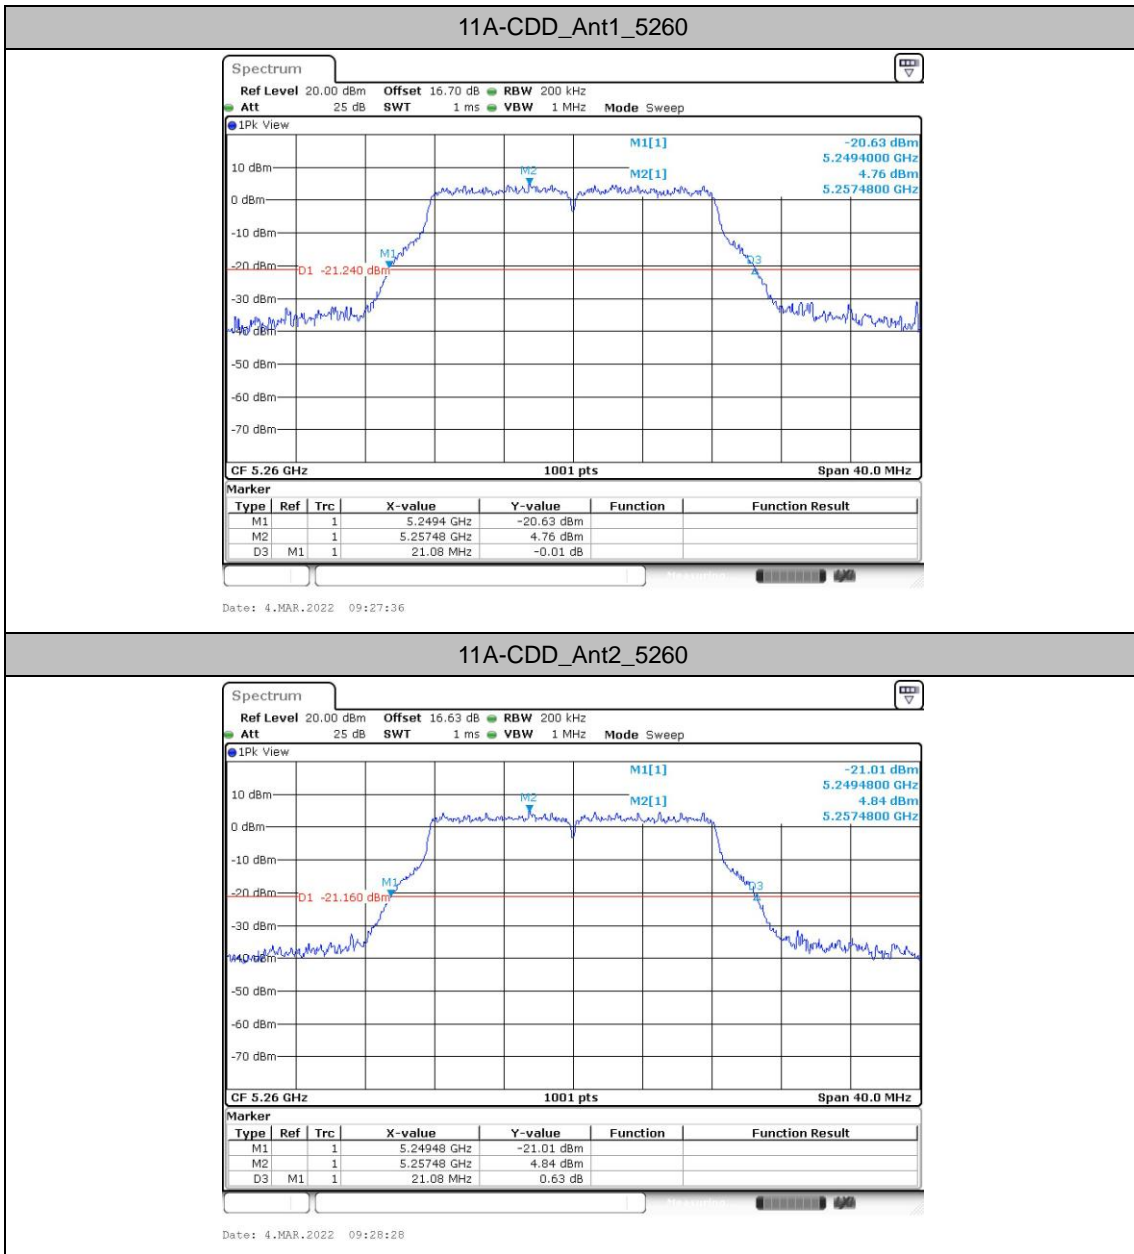




**11A-CDD\_Ant2\_5260**

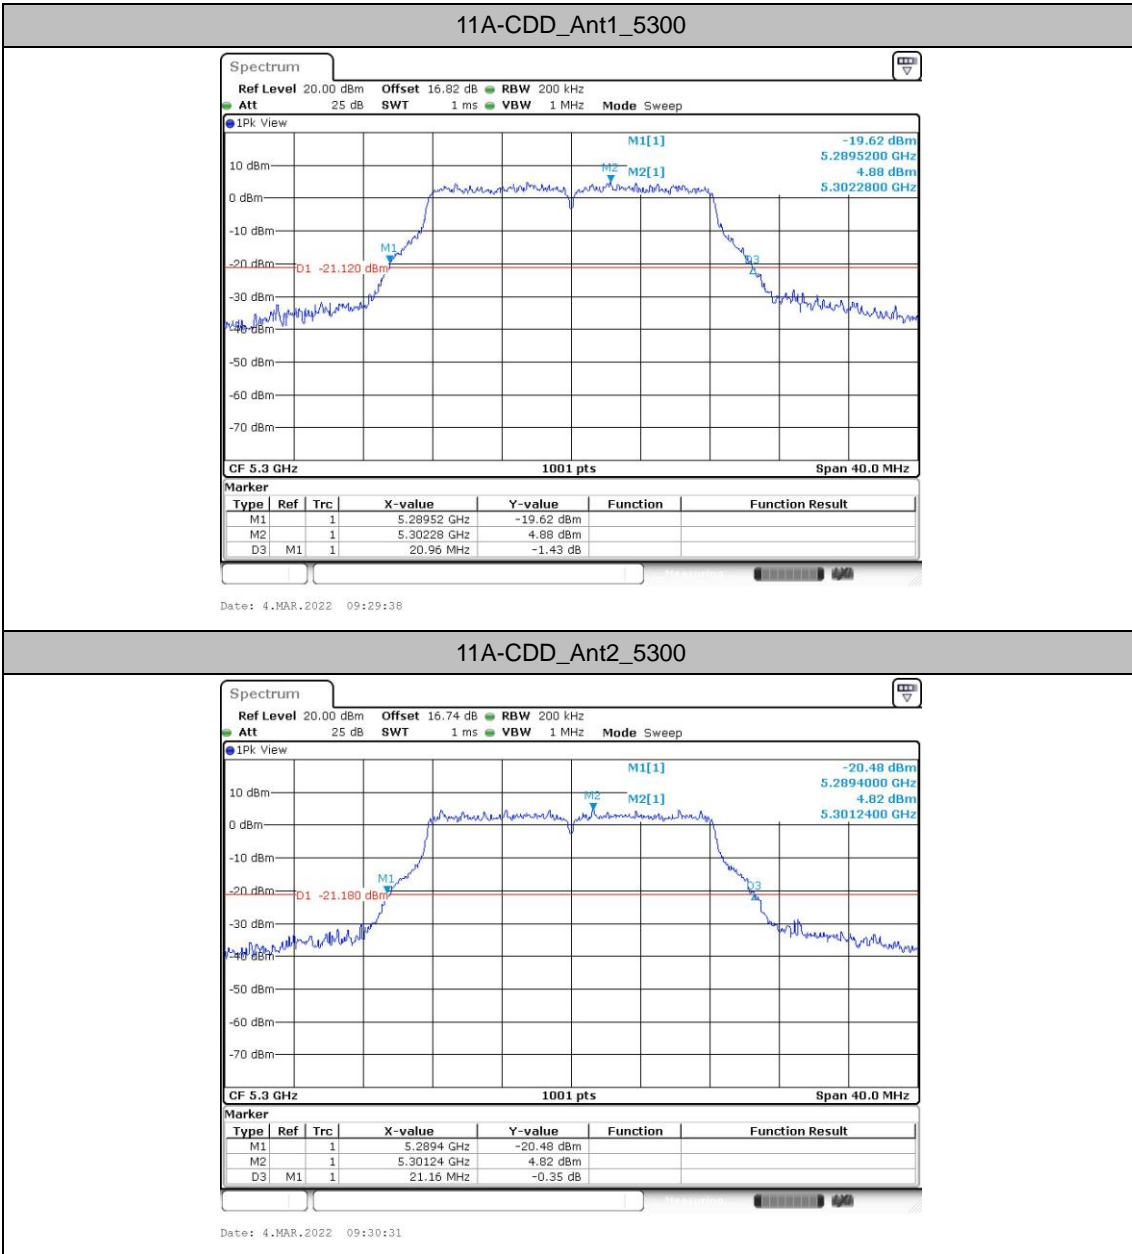


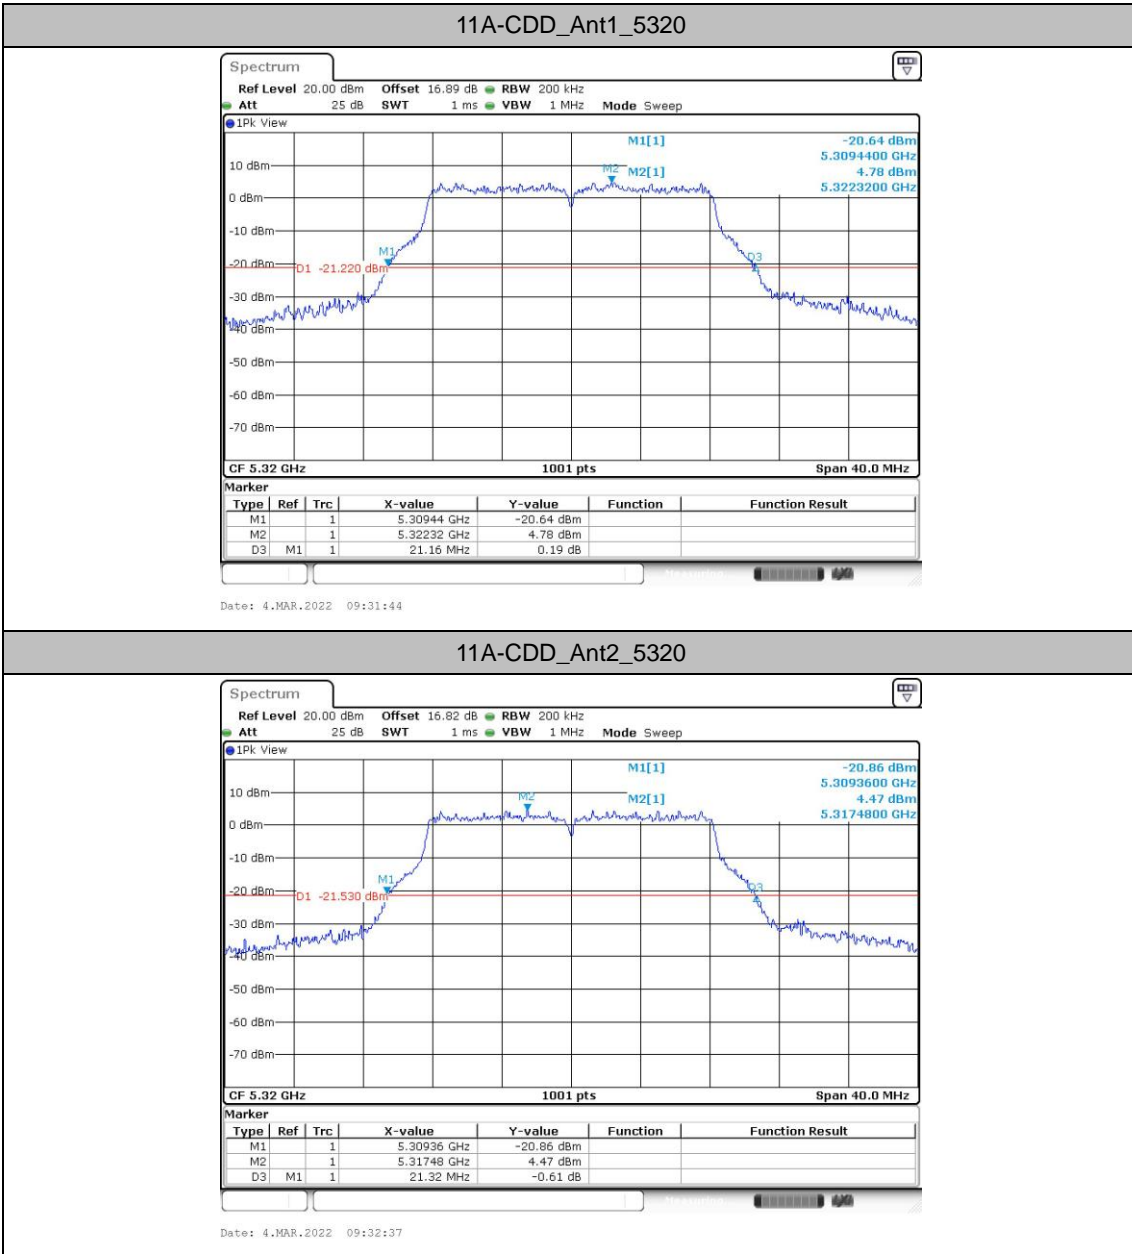

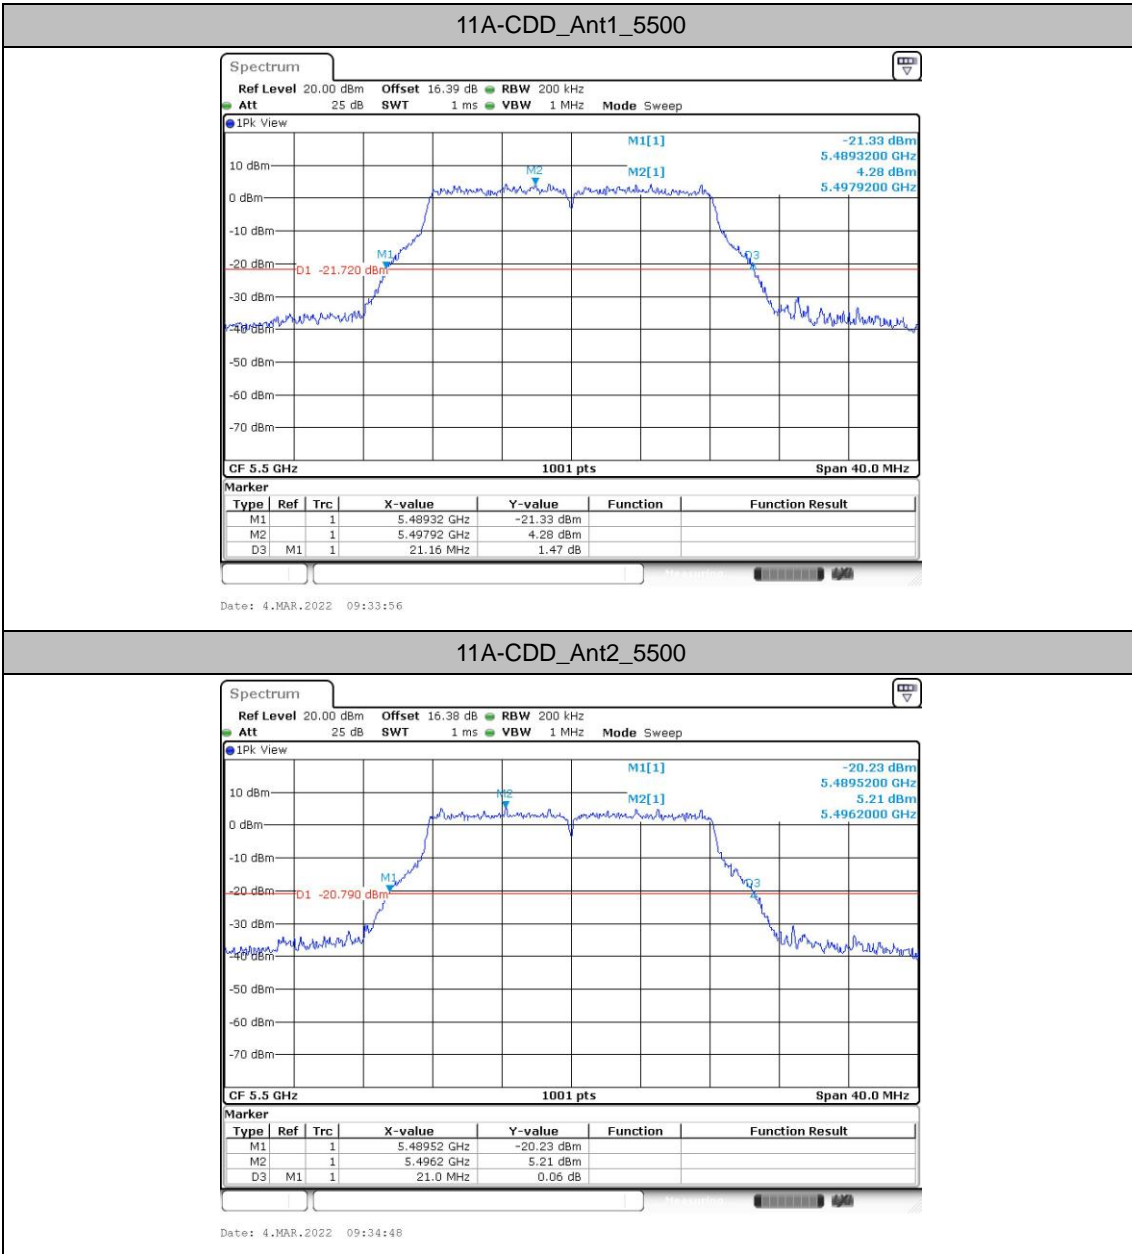

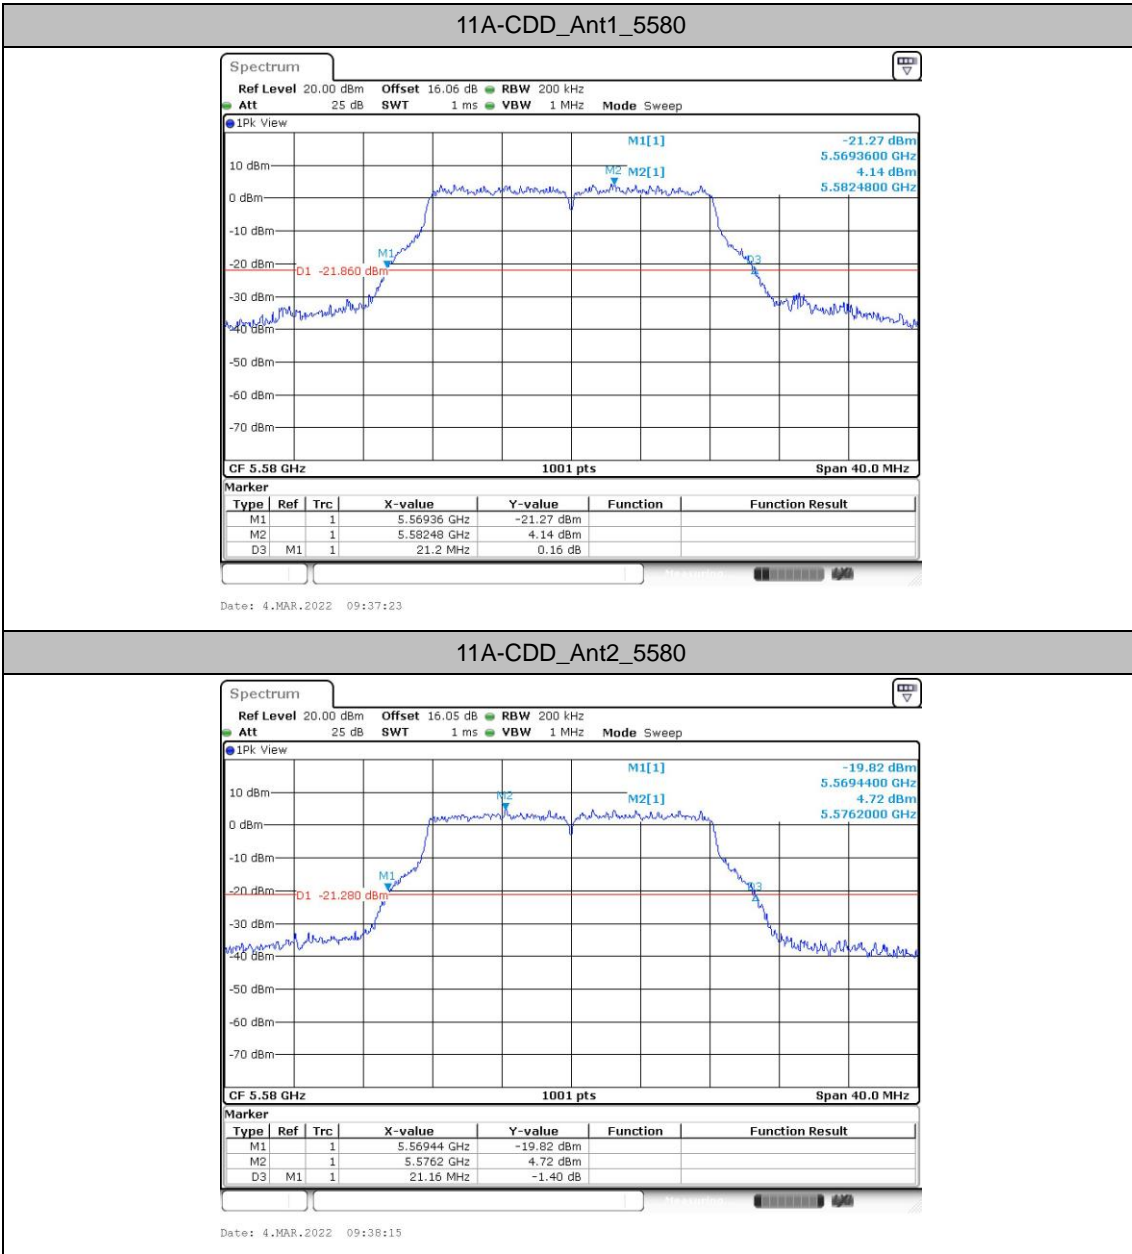


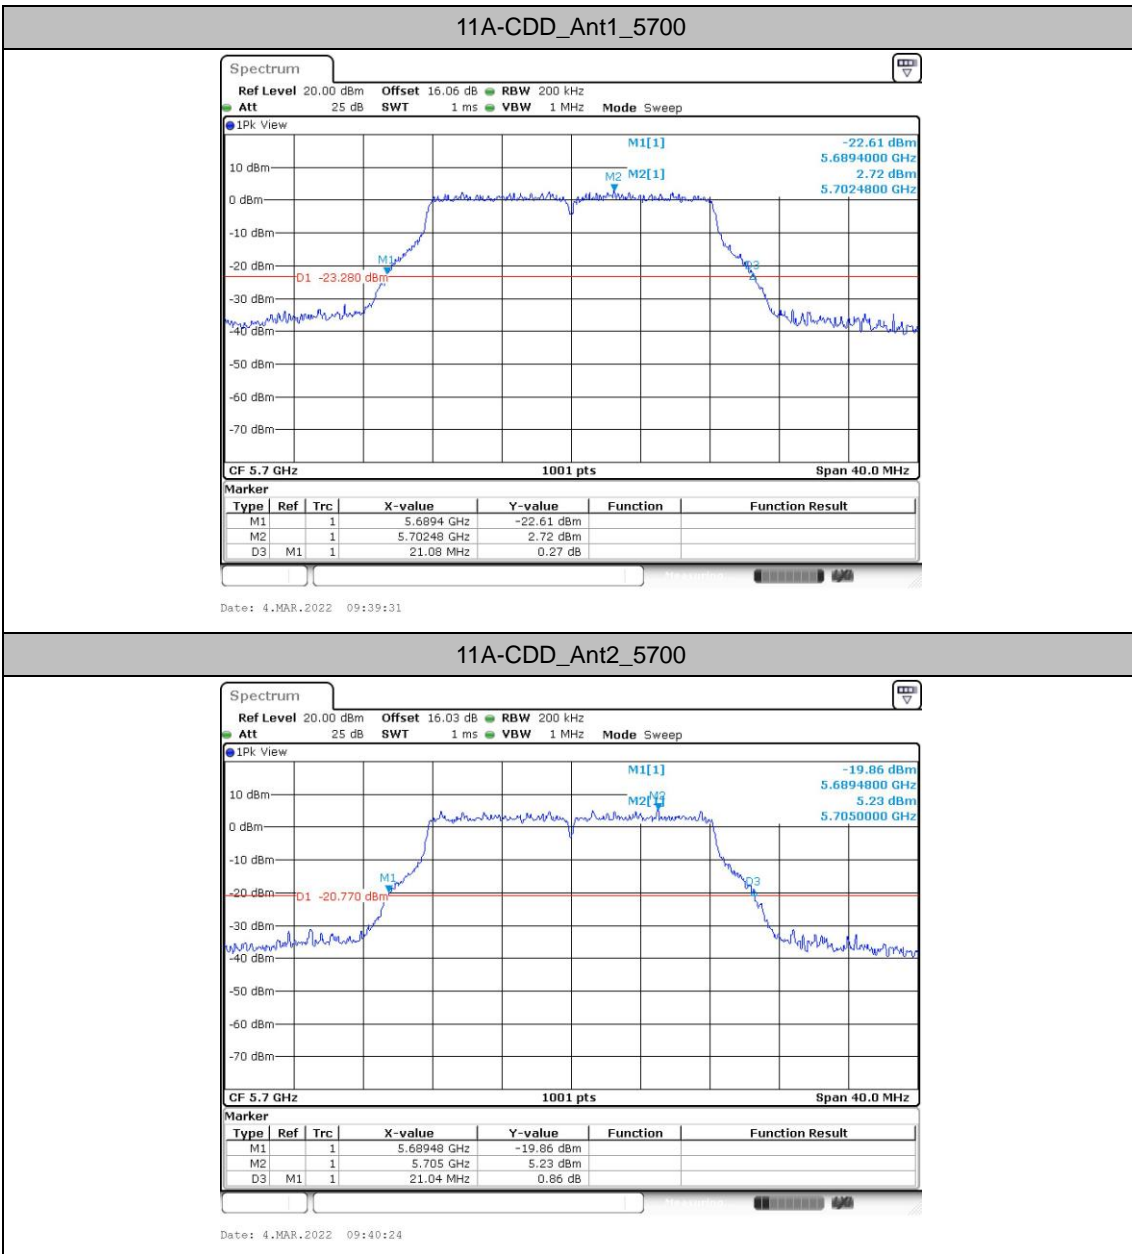

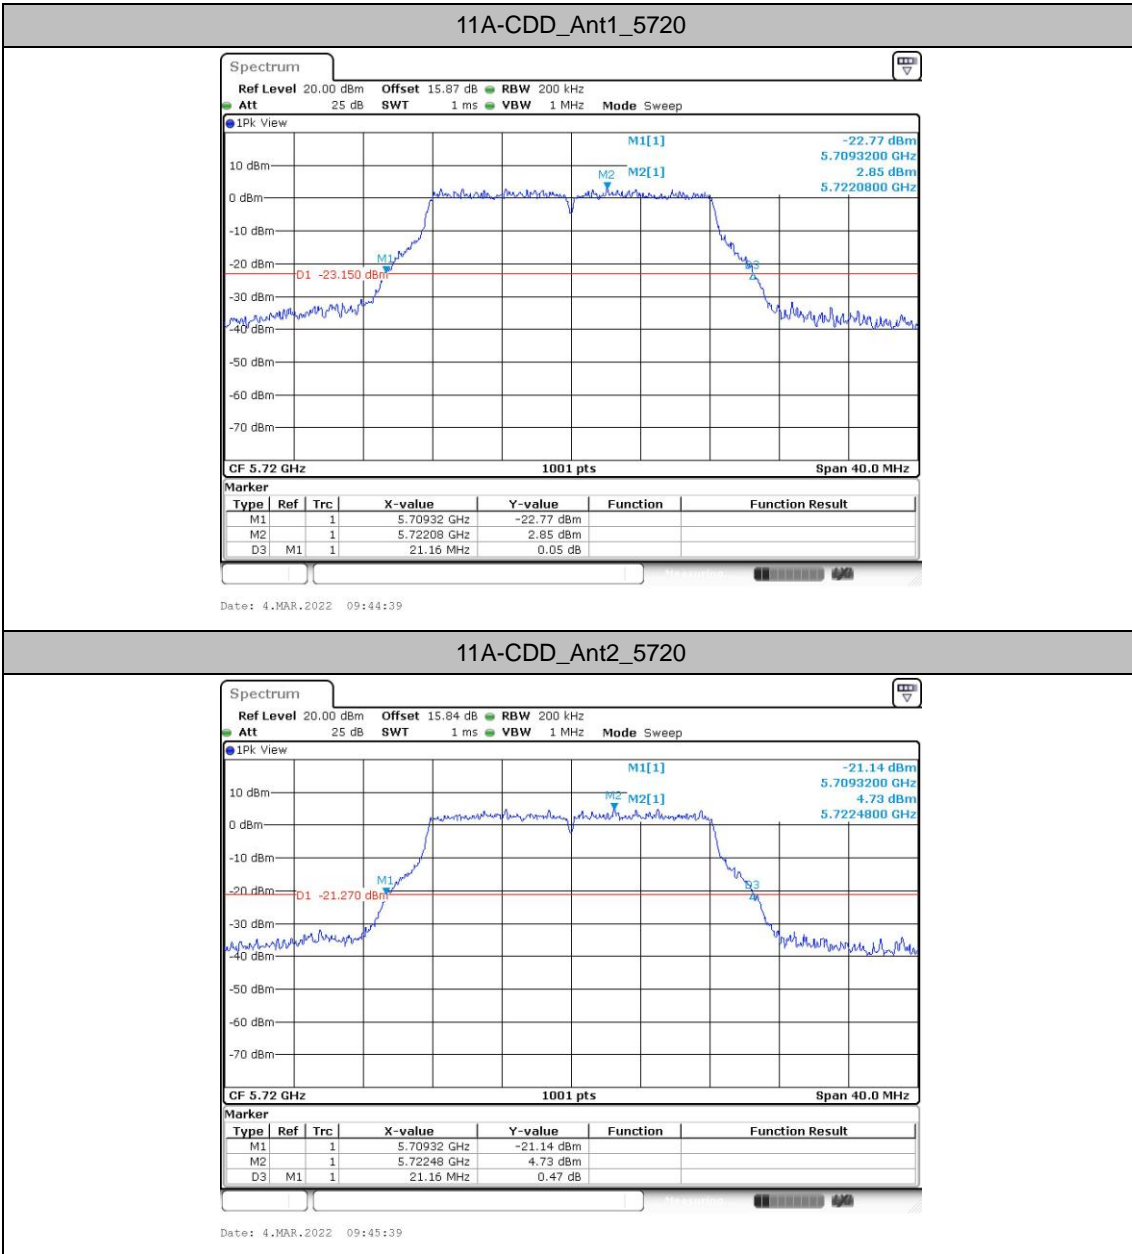





11AX20MIMO\_Ant1\_5180

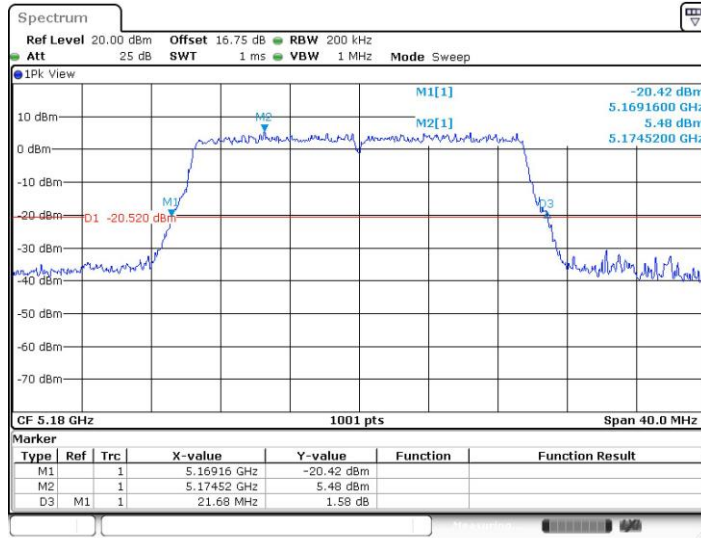



11AX20MIMO\_Ant2\_5180

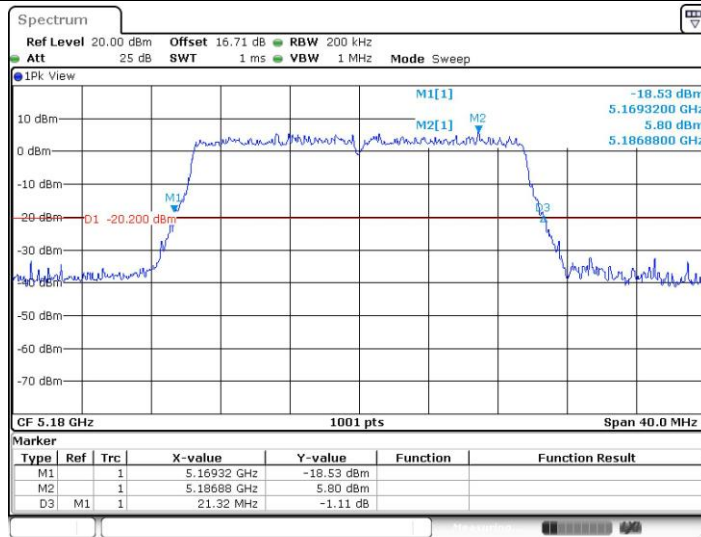





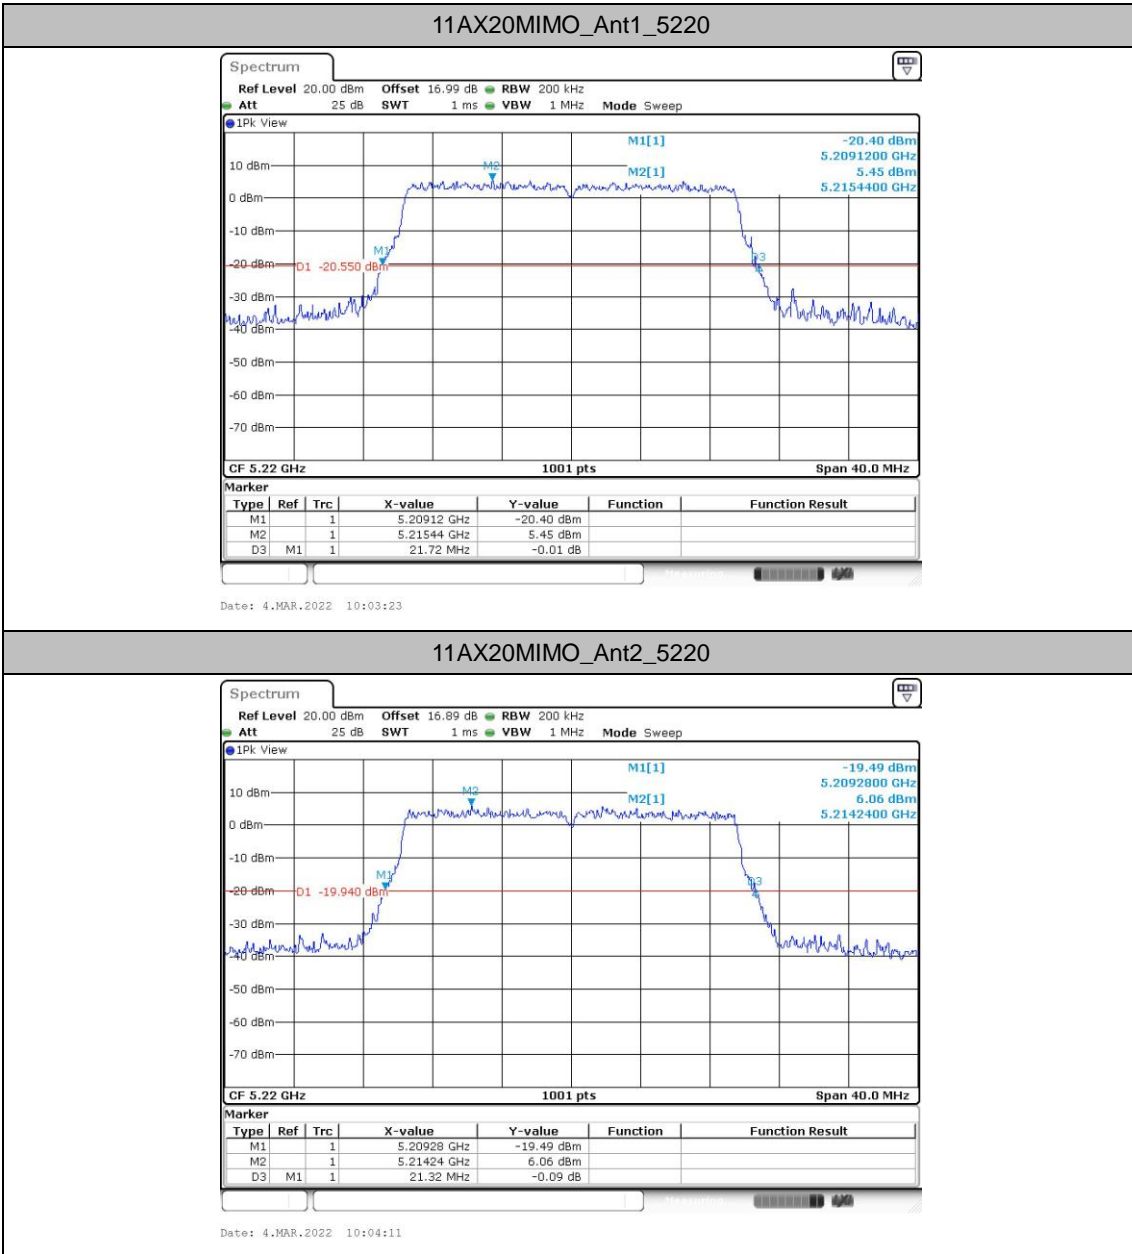


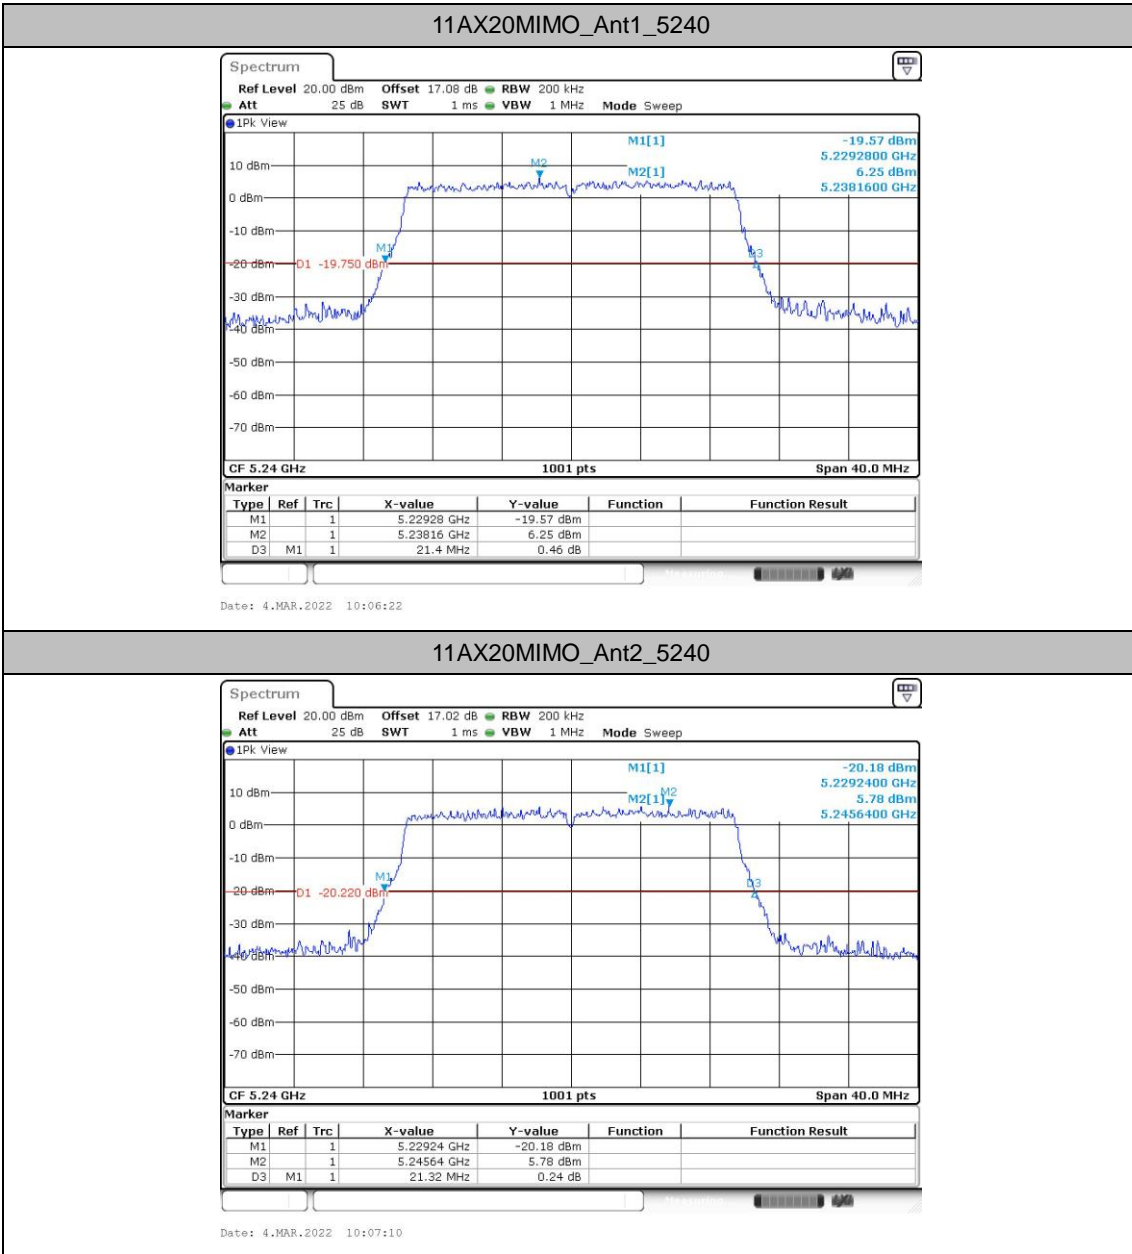


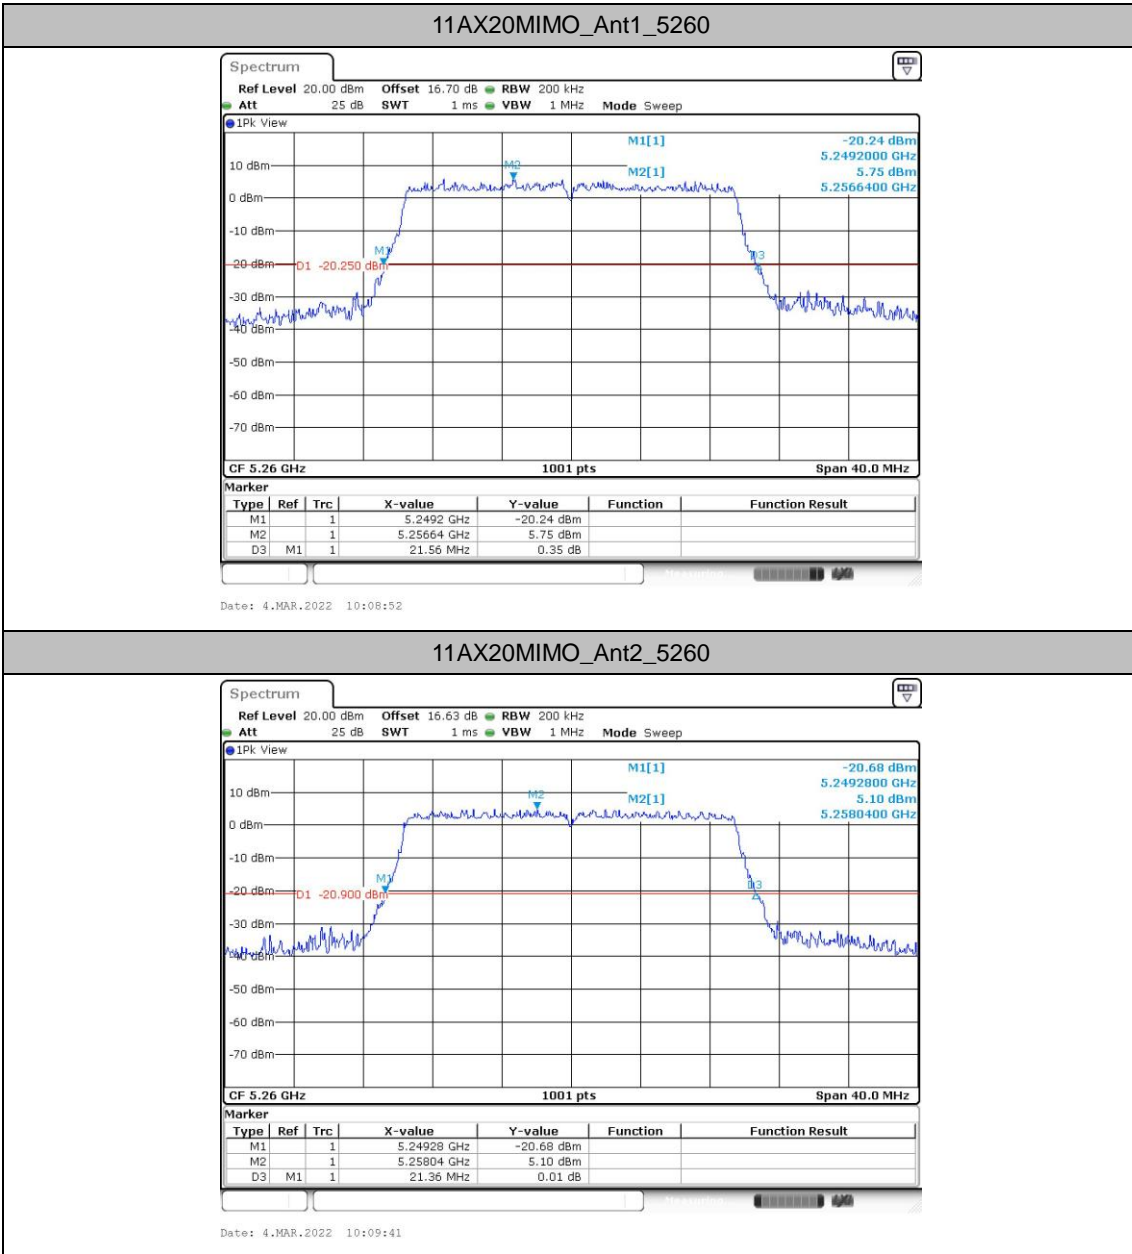


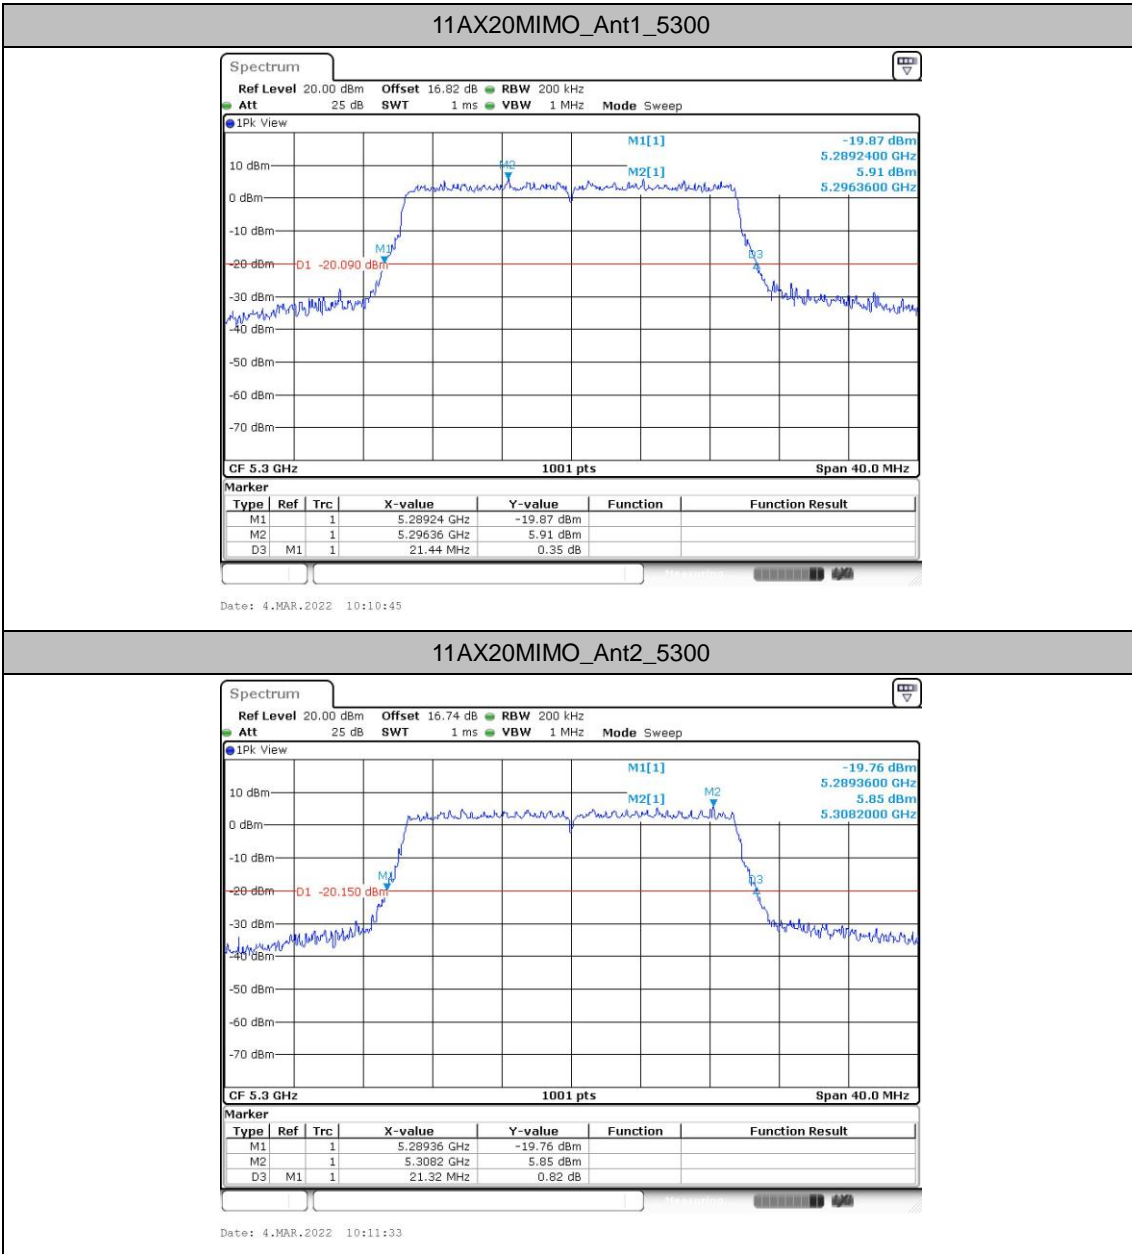

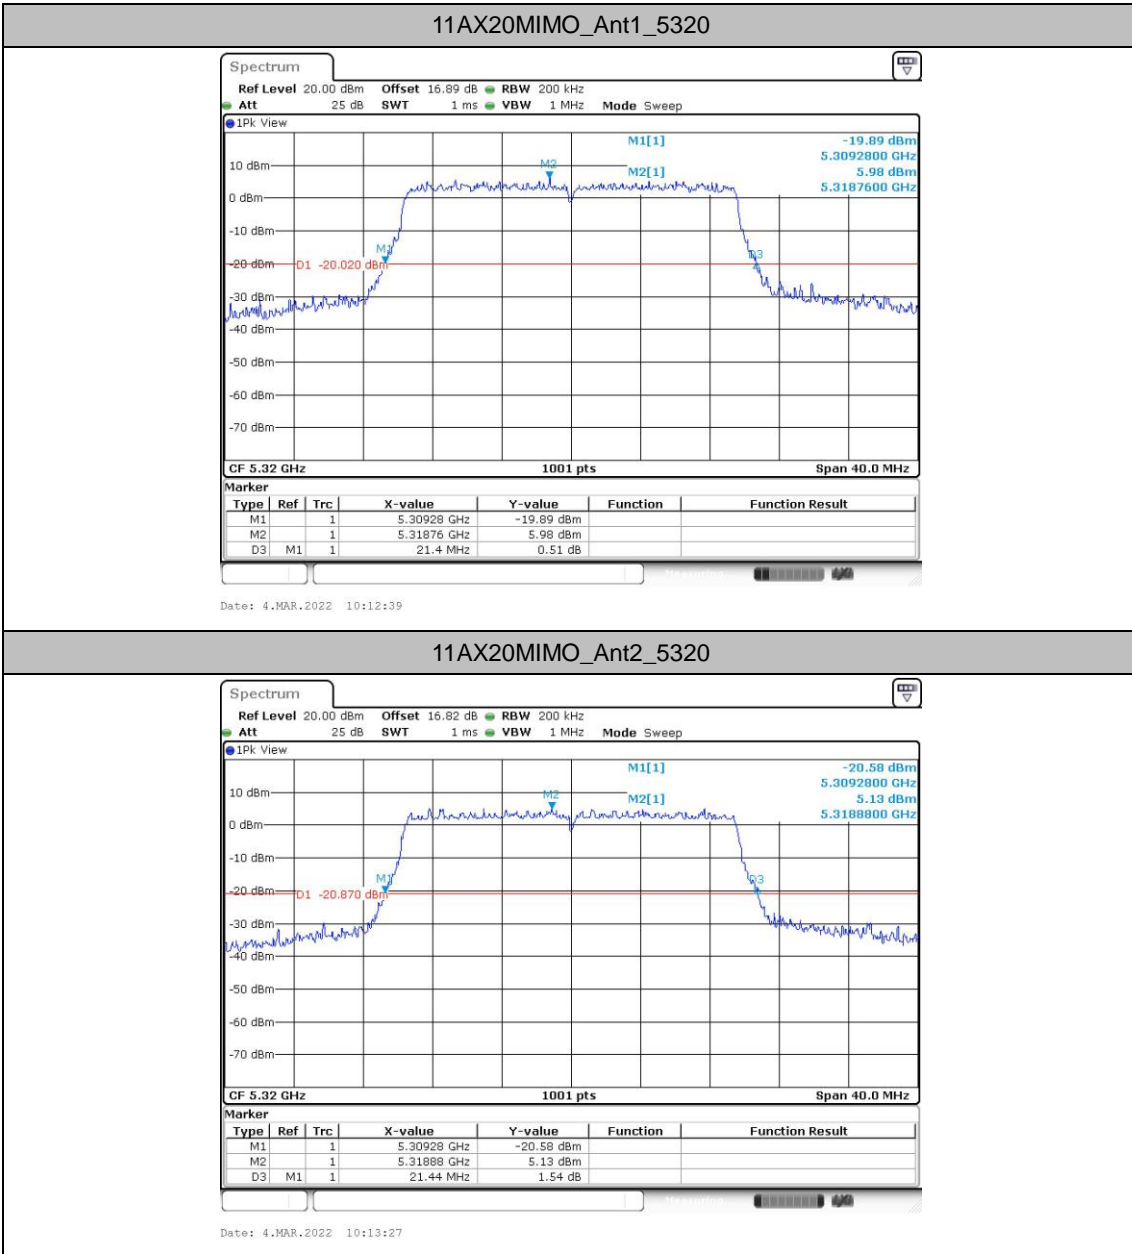


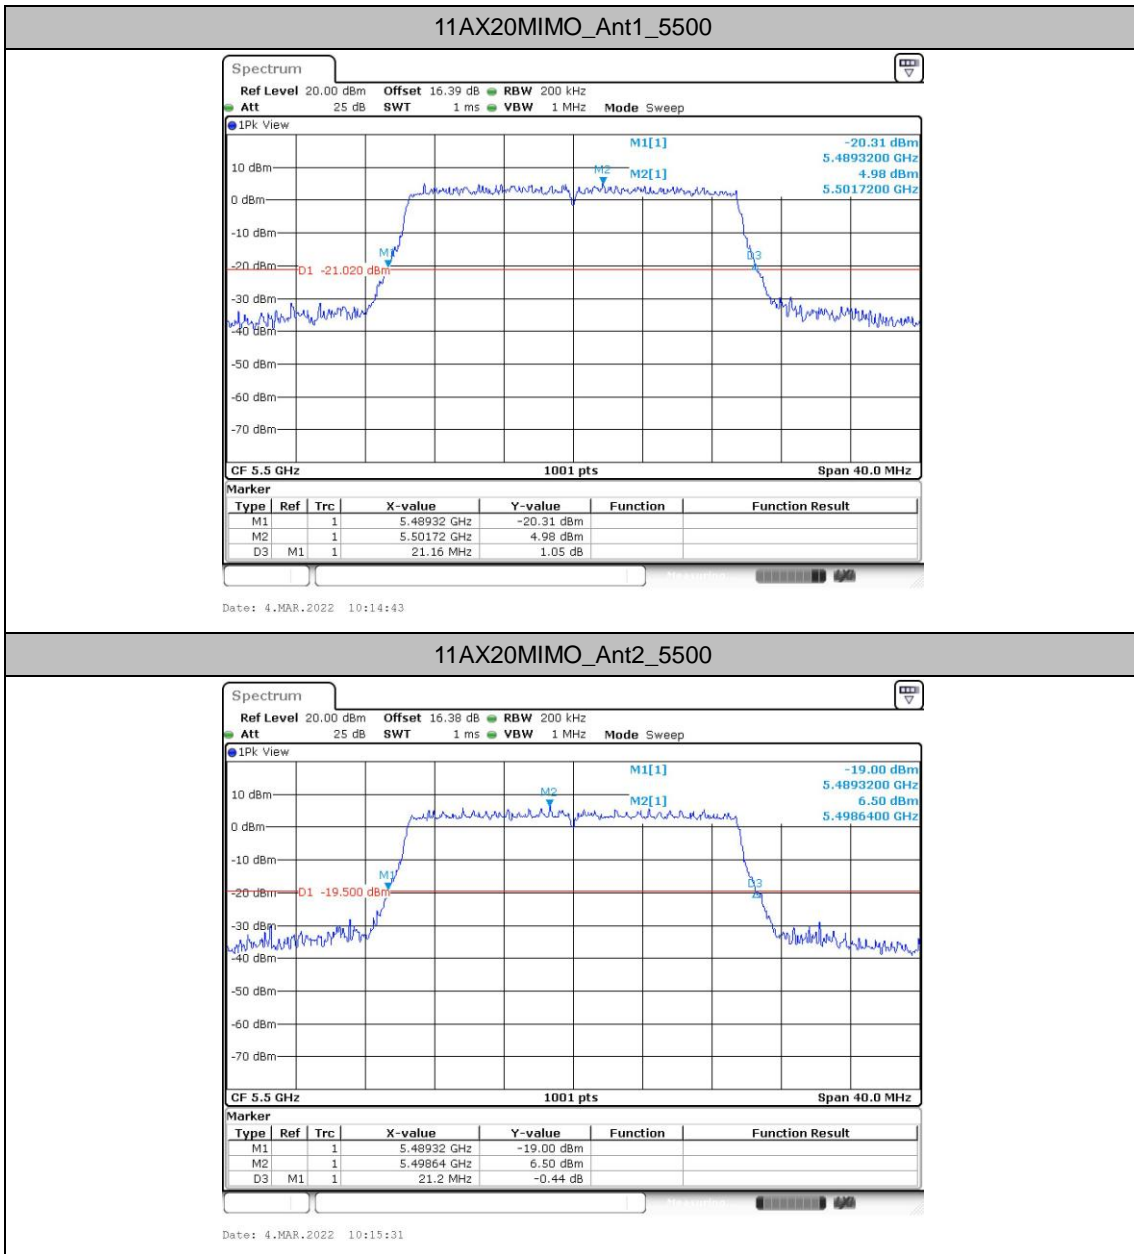


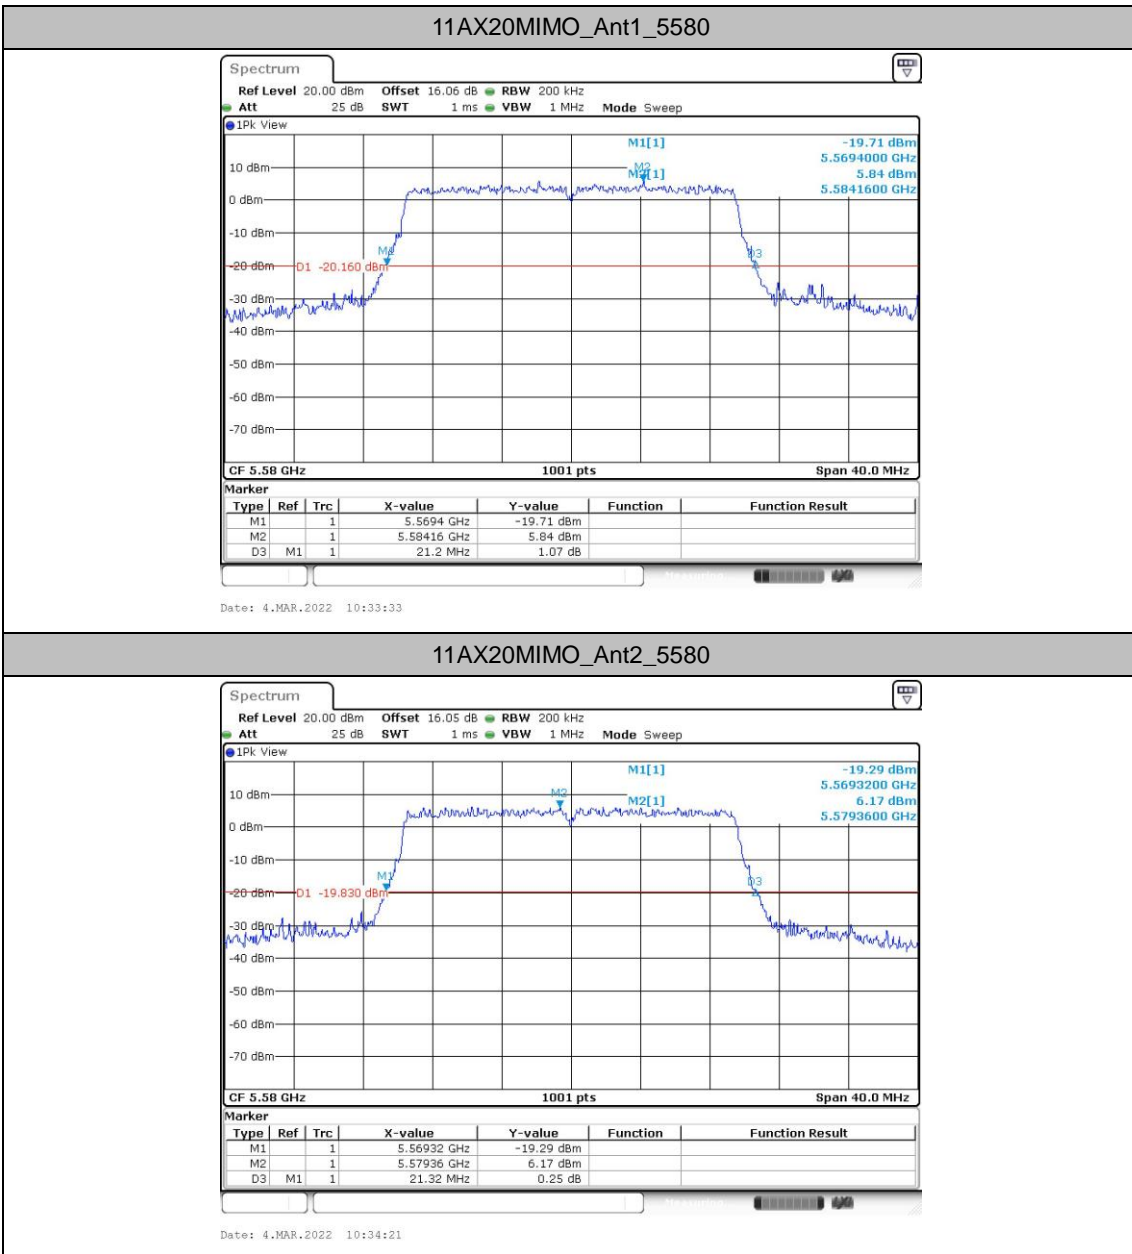


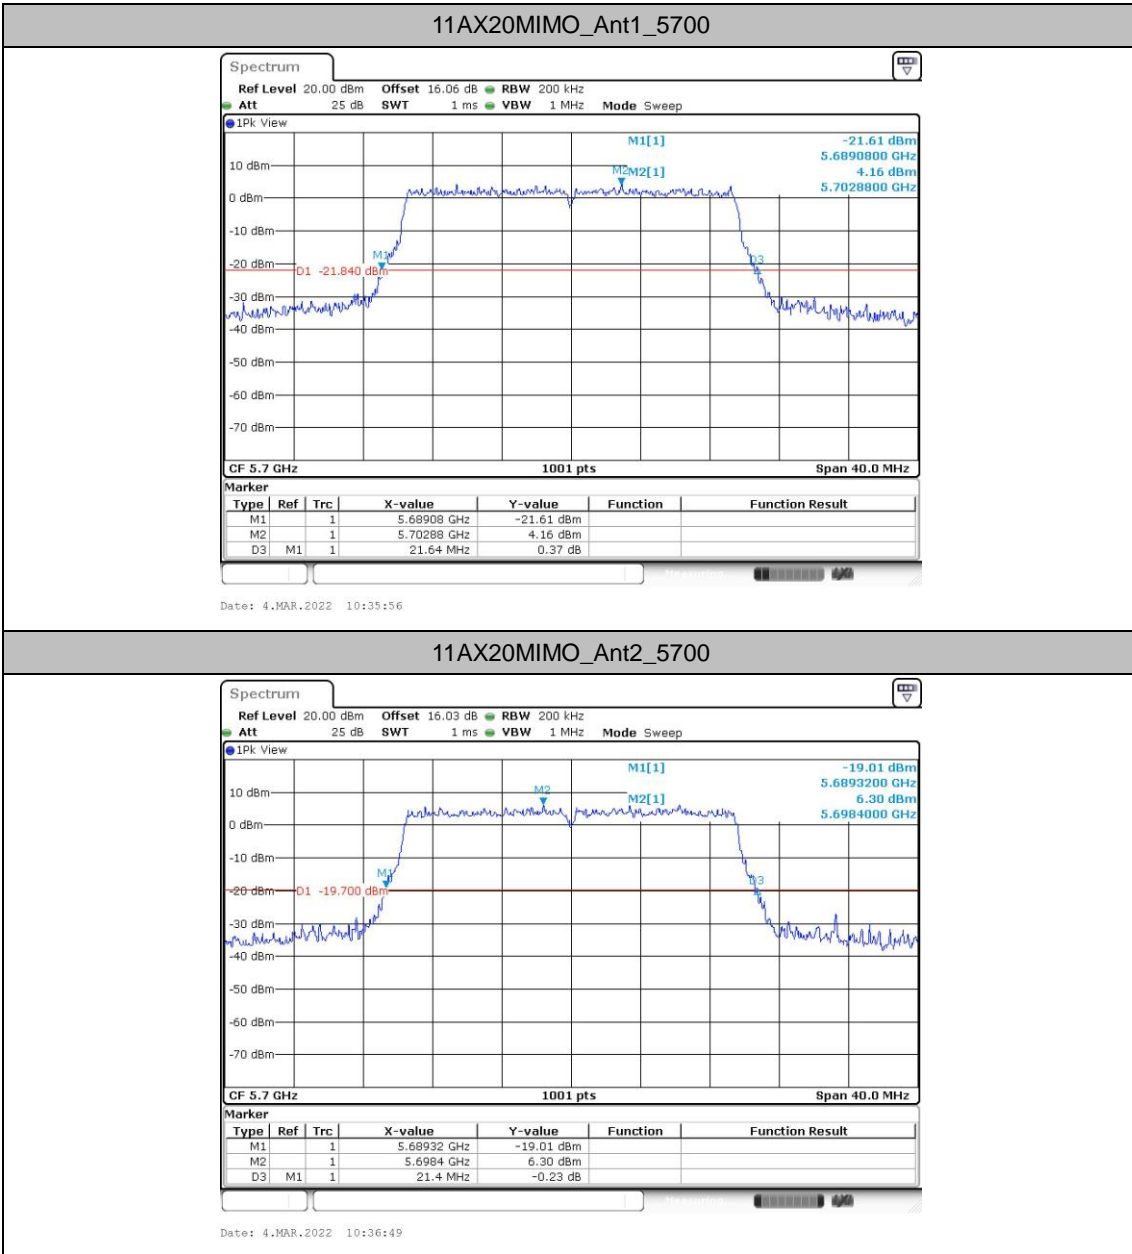





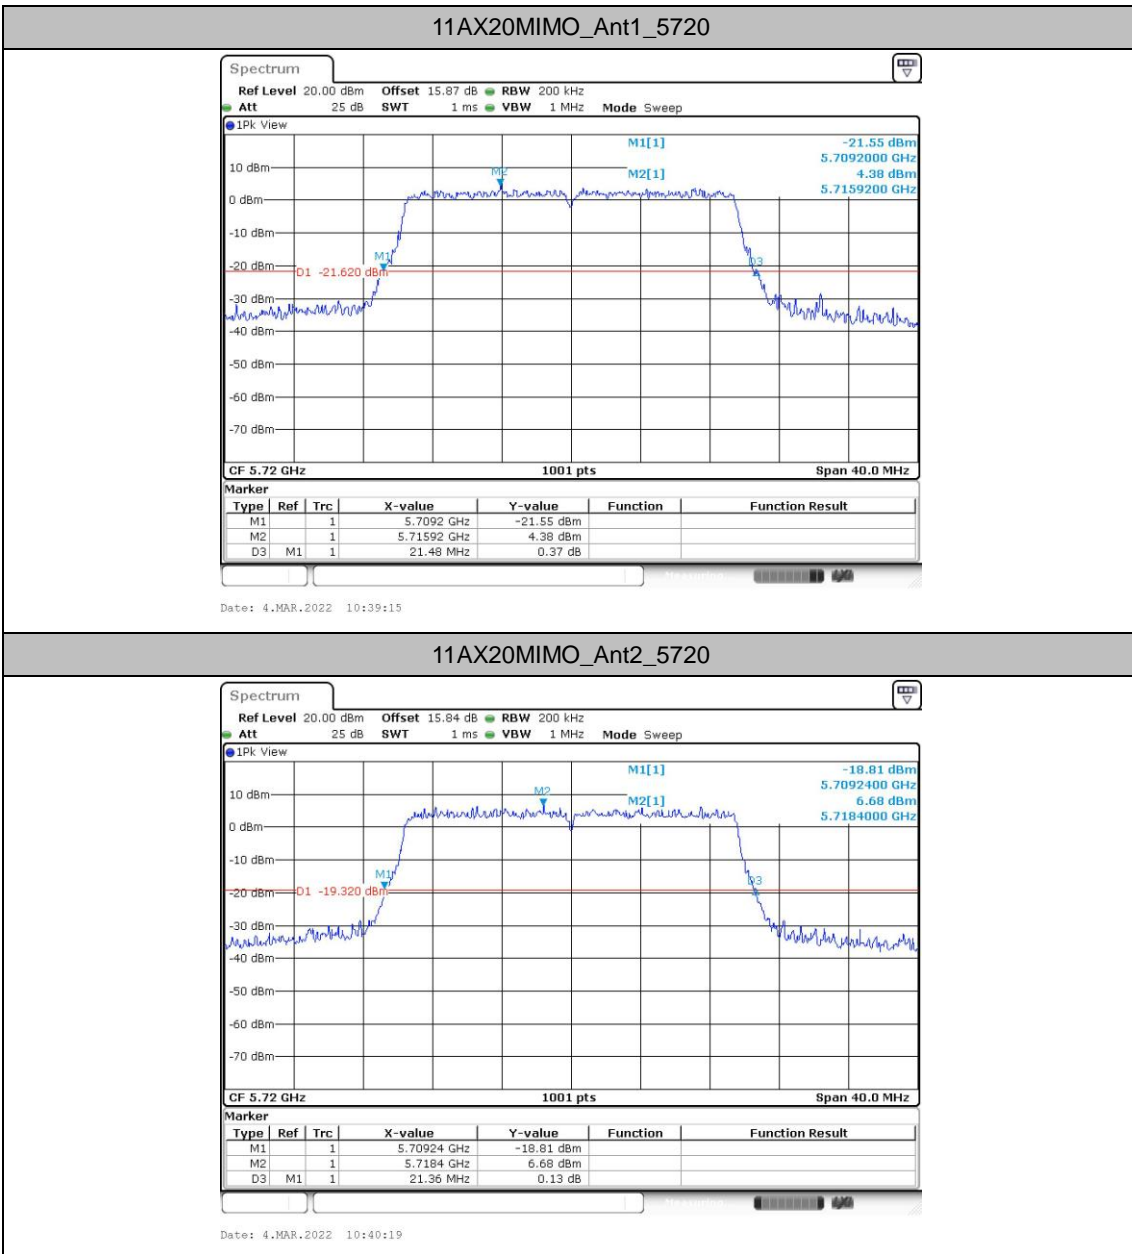


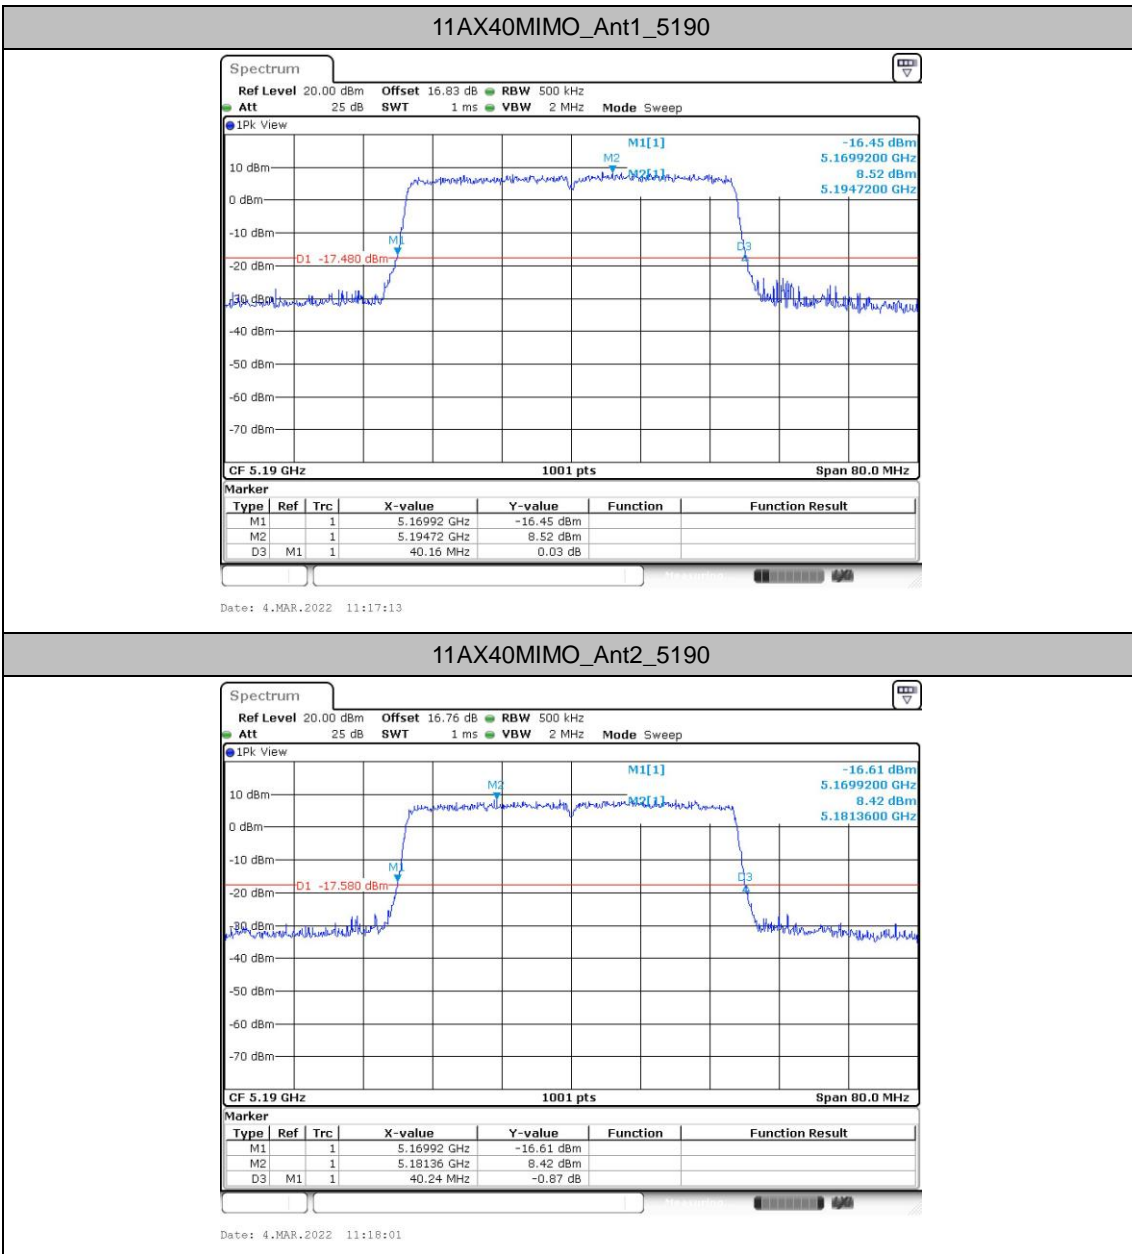

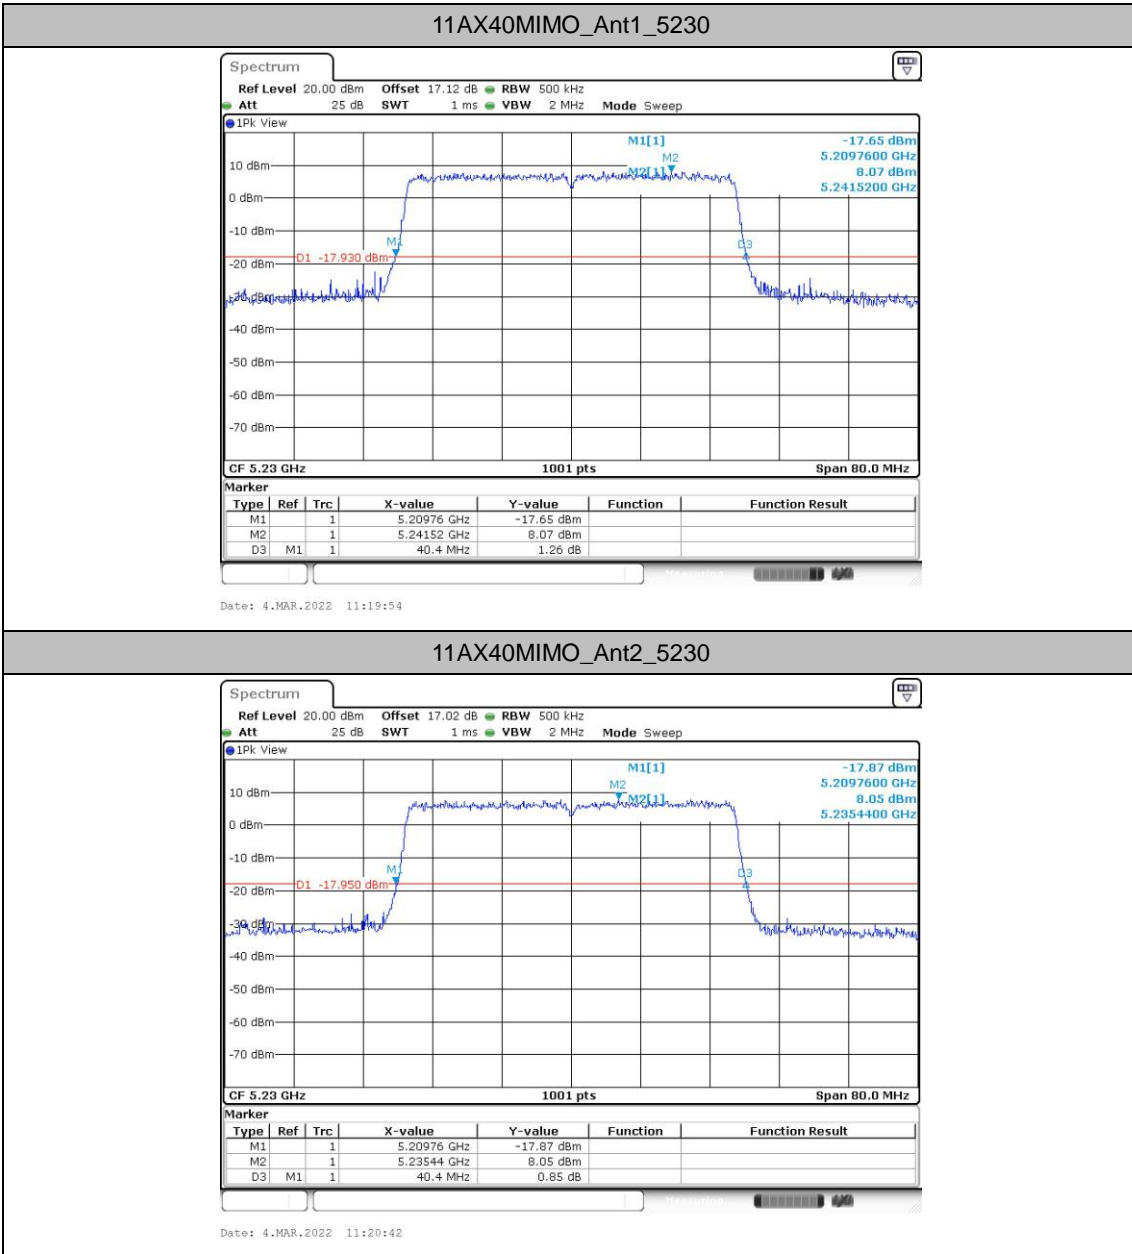

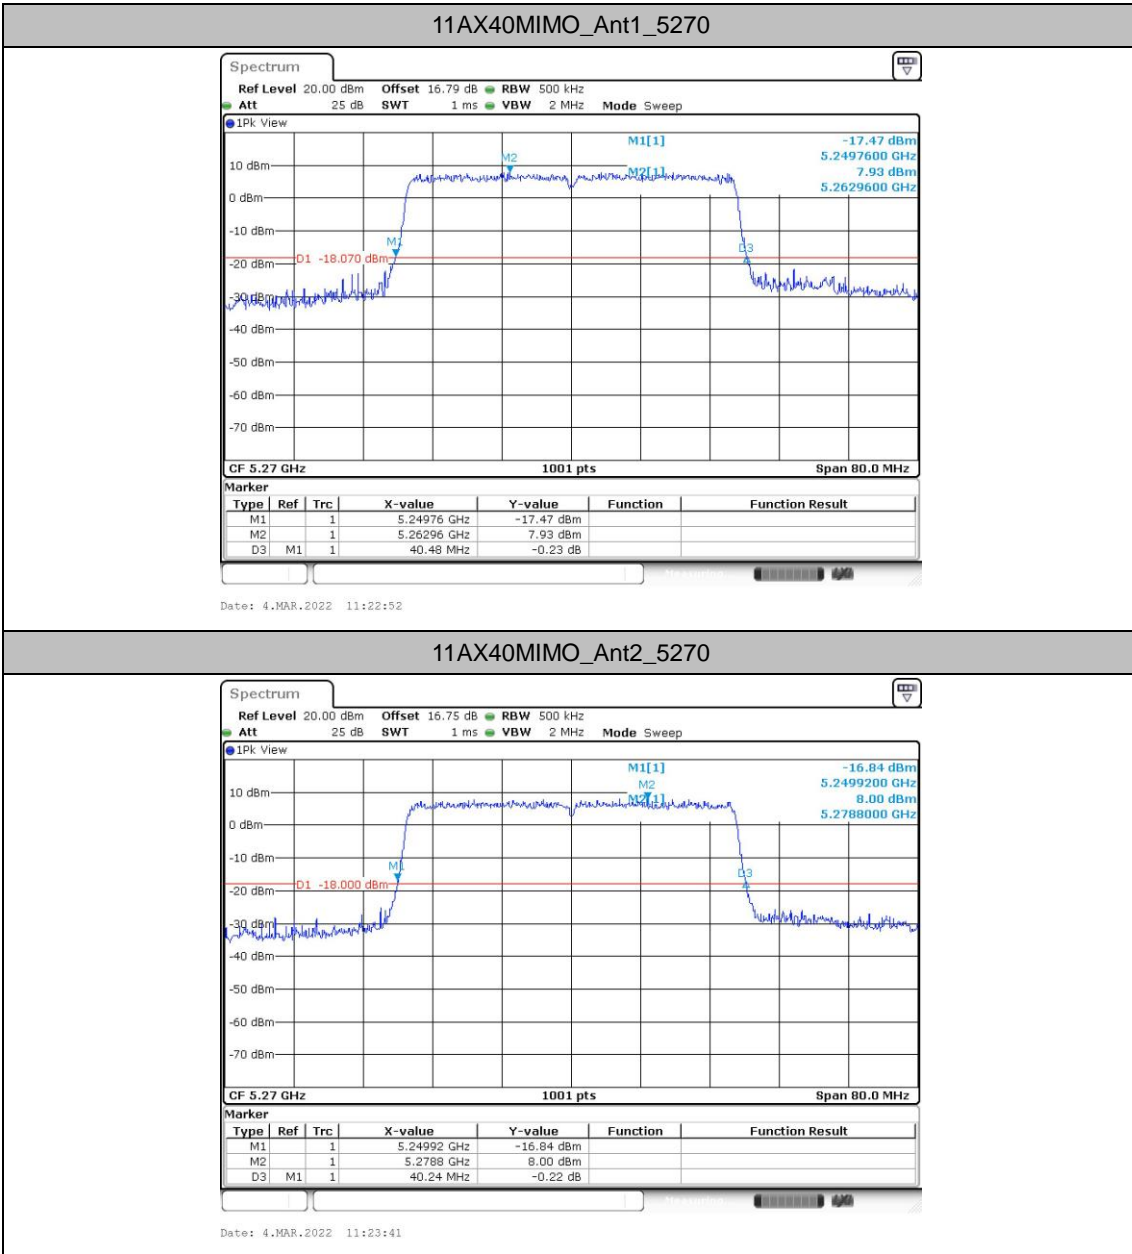


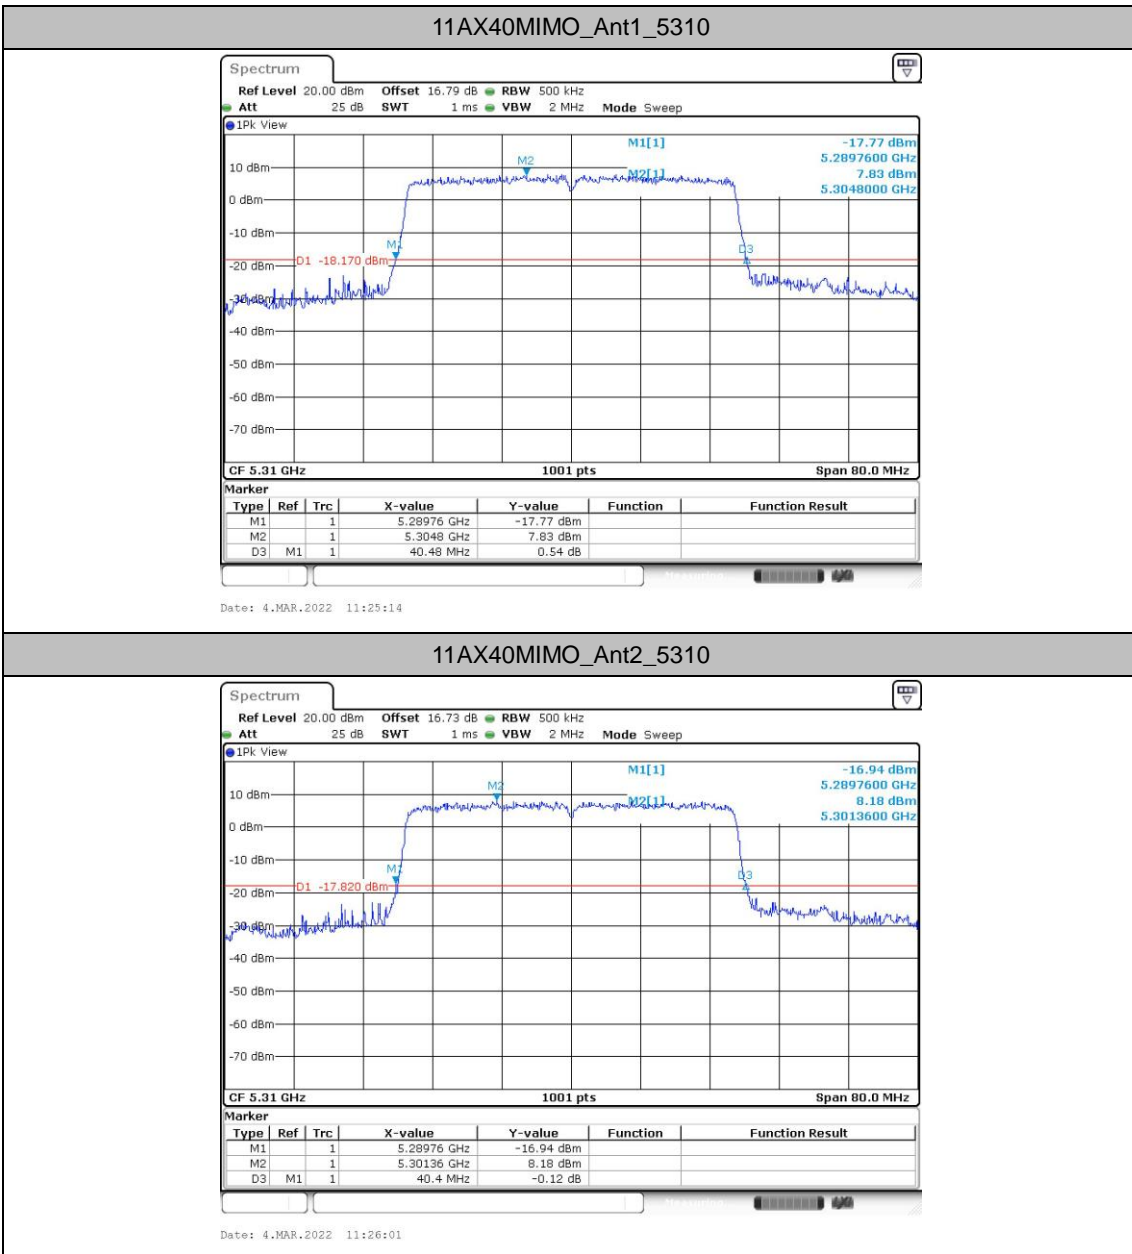

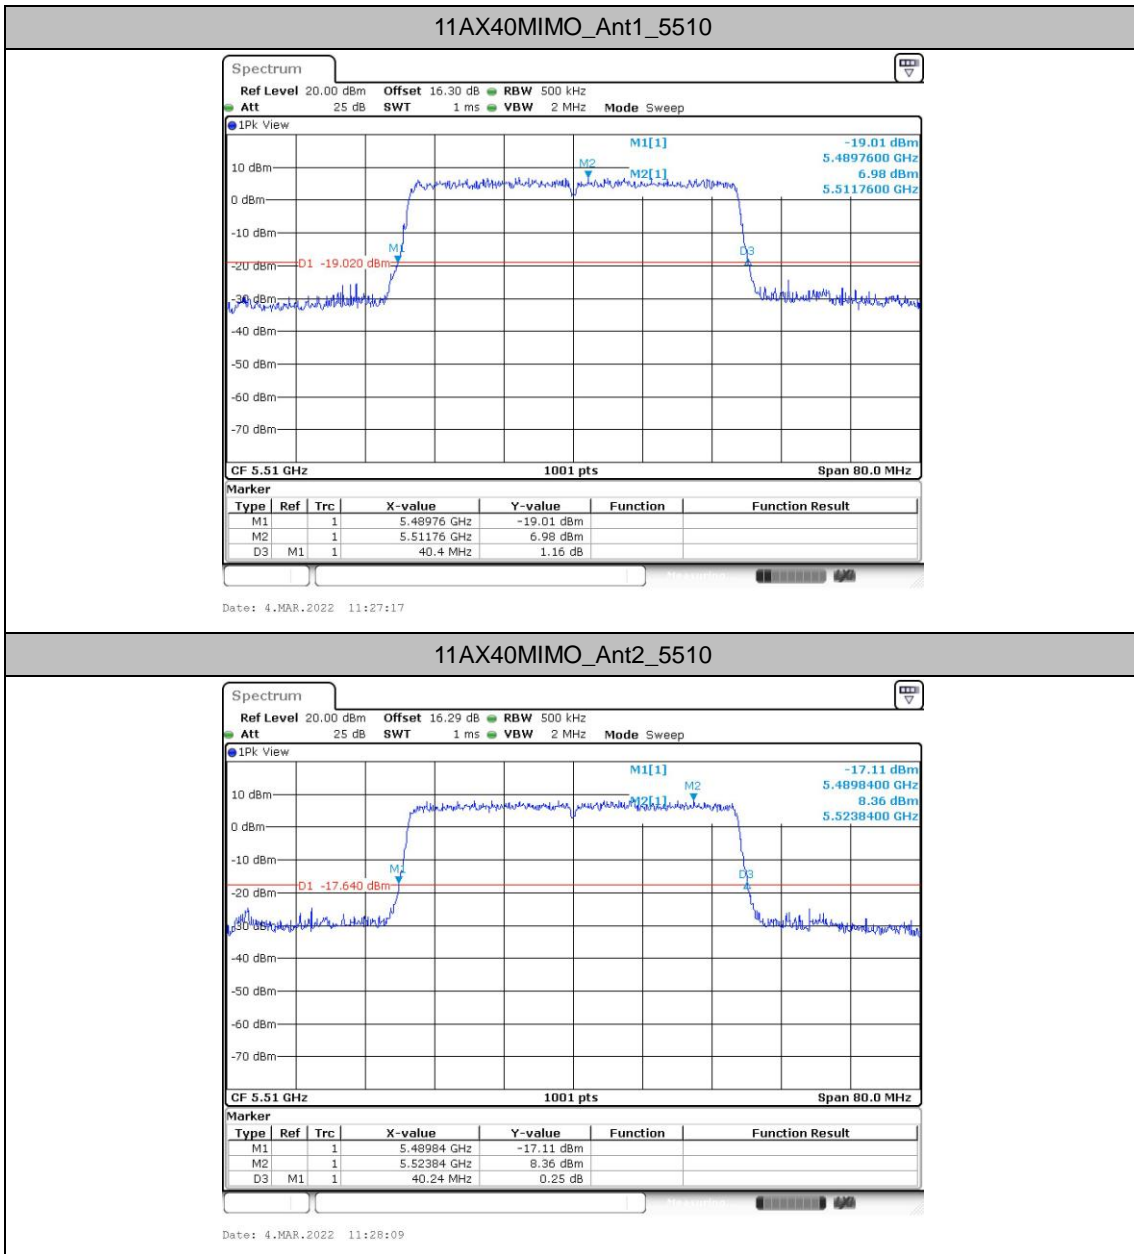





11AX40MIMO\_Ant1\_5550

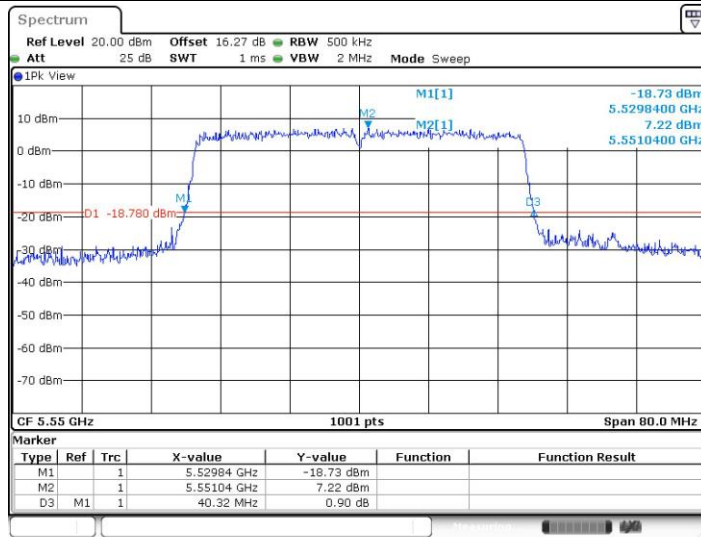


11AX40MIMO\_Ant2\_5550

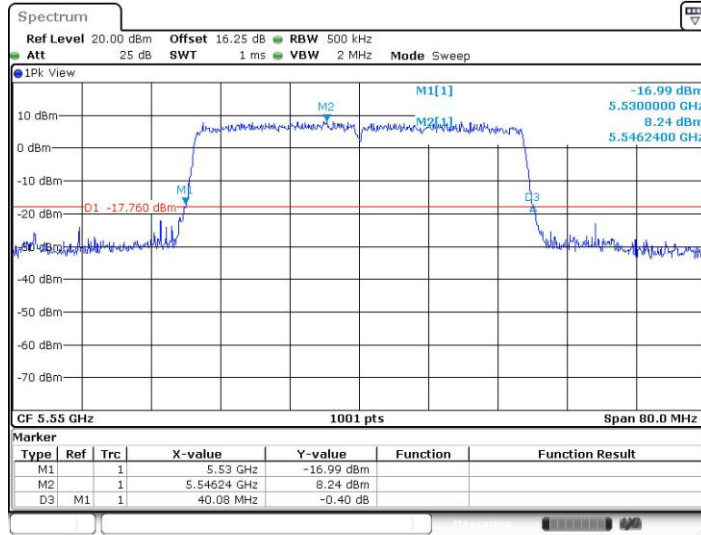

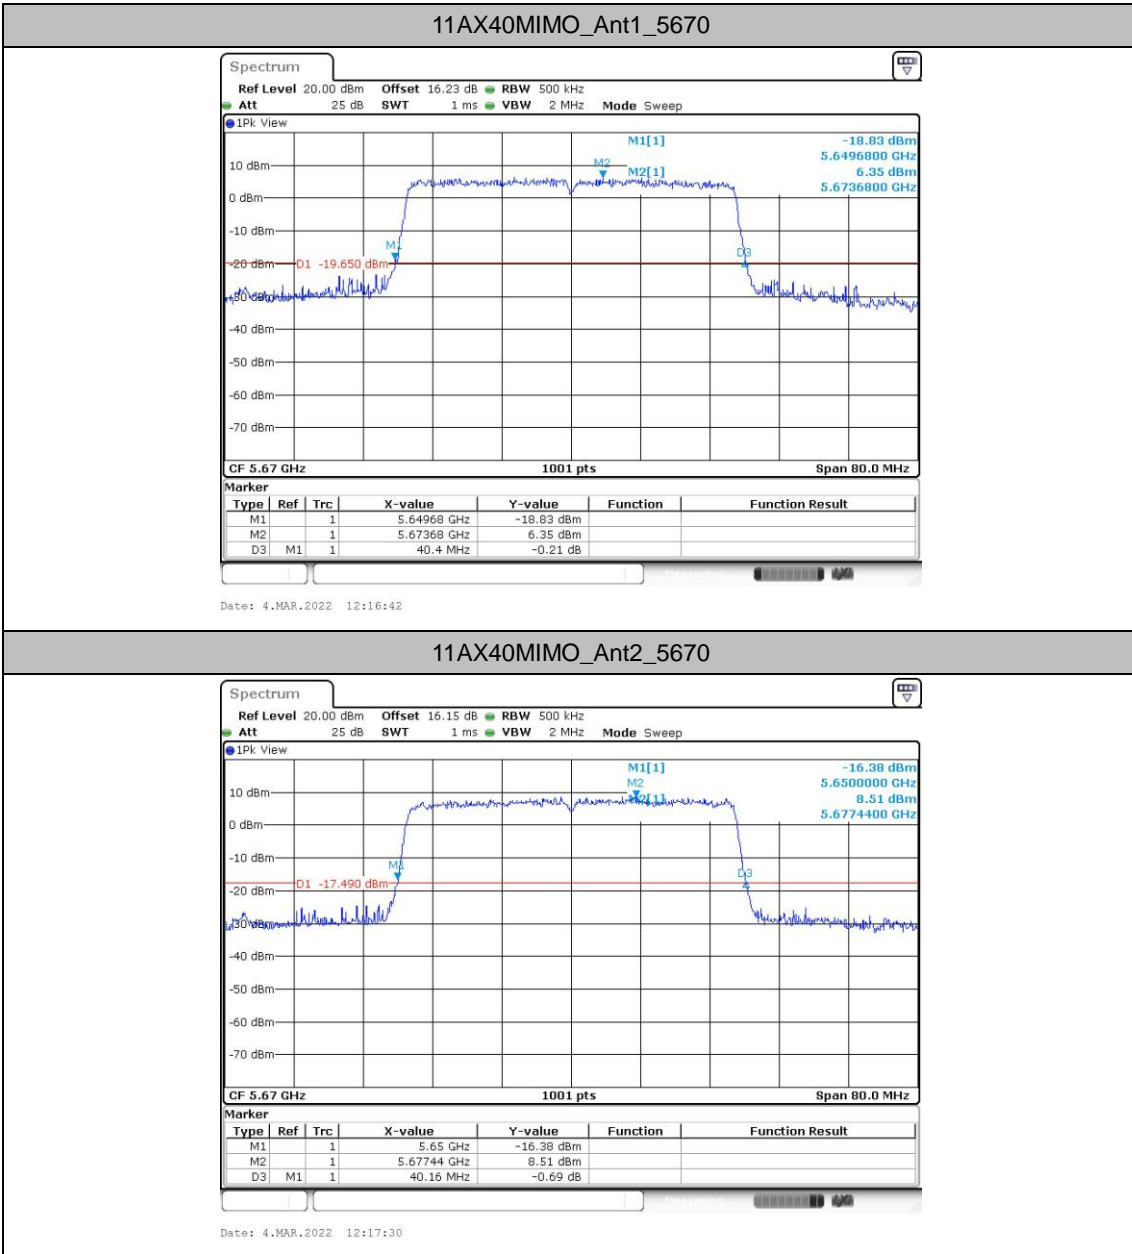




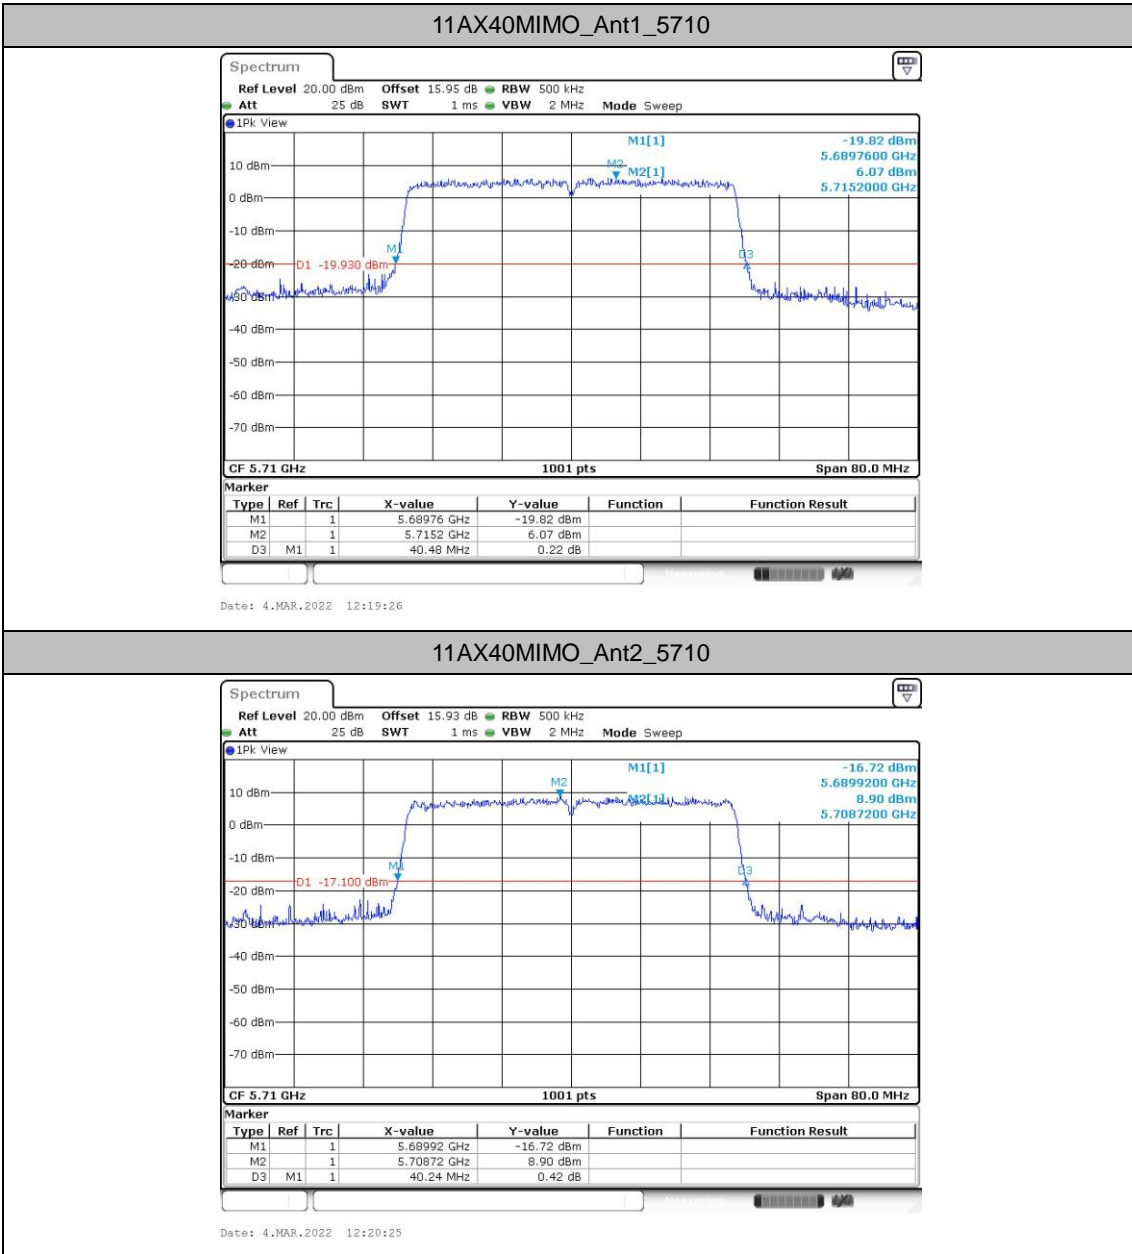




11AX80MIMO\_Ant1\_5210

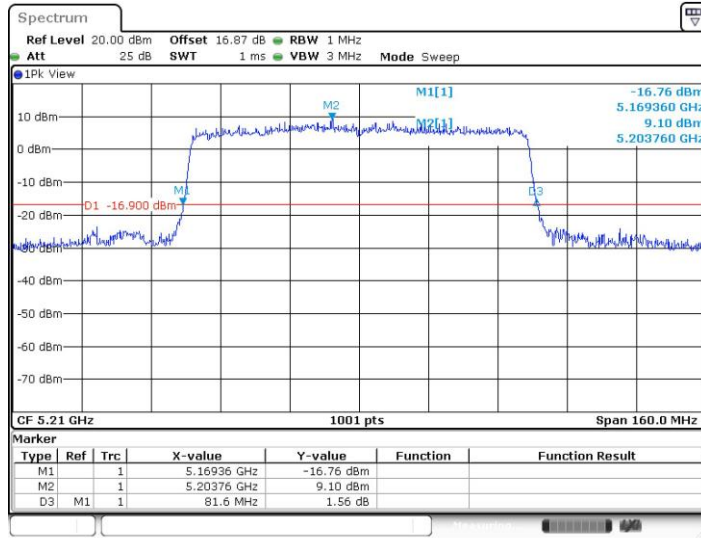

Date: 4.MAR.2022 11:46:38

11AX80MIMO\_Ant2\_5210

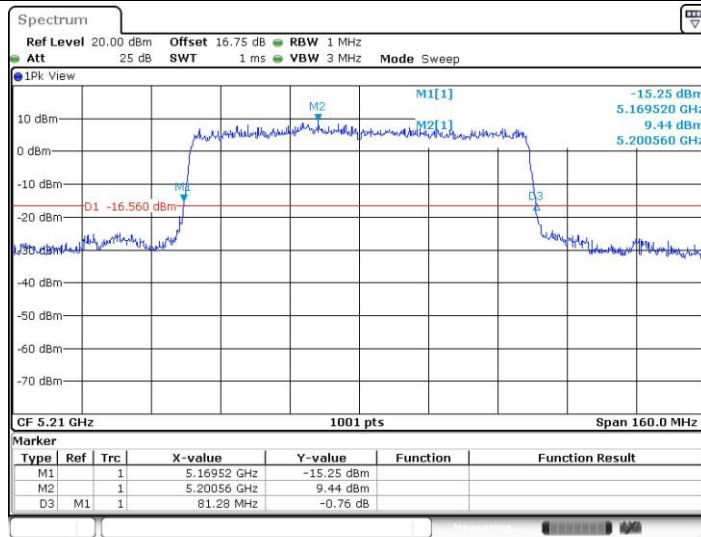

Date: 4.MAR.2022 11:47:26