




FCC RADIO TEST REPORT

FCC ID : 2AGOZ-P97
Equipment : VR Headset
Brand Name : 
Model Name : P97
Applicant : Meta Platforms Technologies, LLC.
1 Hacker Way, Menlo Park, CA 94025, USA
Manufacturer : Meta Platforms Technologies, LLC.
1 Hacker Way, Menlo Park, CA 94025, USA
Standard : FCC Part 15 Subpart E §15.407

The product was received on Apr. 03, 2024 and testing was performed from Apr. 09, 2024 to May 16, 2024. We, Sporton International Inc. EMC & Wireless Communications Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. EMC & Wireless Communications Laboratory, the test report shall not be reproduced except in full.



Approved by: Louis Wu

Sporton International Inc. EMC & Wireless Communications Laboratory
No. 52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	8
1.3 Testing Location	8
1.4 Applicable Standards.....	8
2 Test Configuration of Equipment Under Test	9
2.1 Carrier Frequency and Channel	9
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	14
2.4 Support Unit used in test configuration and system	15
2.5 EUT Operation Test Setup	16
2.6 Measurement Results Explanation Example.....	16
3 Test Result	17
3.1 26dB & 99% Occupied Bandwidth Measurement	17
3.2 Maximum Conducted Output Power Measurement	18
3.3 Power Spectral Density Measurement	20
3.4 Unwanted Emissions Measurement.....	22
3.5 AC Conducted Emission Measurement.....	27
3.6 Antenna Requirements.....	29
4 List of Measuring Equipment.....	30
5 Measurement Uncertainty	32
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission	
Appendix D. Radiated Spurious Emission Plots	
Appendix E. Duty Cycle Plots	
Appendix F. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR413013-01D	01	Initial issue of report	May 29, 2024



Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	1.25 dB under the limit at 5433.52 MHz
3.5	15.207	AC Conducted Emission	Pass	12.36 dB under the limit at 0.16 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Yun Huang
Report Producer: Michelle Chen



1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature	
General Specs	Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ac/ax, Wi-Fi 5GHz 802.11a/n/ac/ax, Wi-Fi 6GHz 802.11ax and nRF.
Sample 1	E2-C1
Sample 2	E2-C2
Sample 3	E2-C3
Sample 4	E2-C4
Antenna Type	Bluetooth: <Ant. 0>: Hybrid Slot Monopole Antenna <Ant. 1>: Hybrid Slot Monopole Antenna WLAN: <Ant. 0>: Hybrid Slot Monopole Antenna <Ant. 1>: Hybrid Slot Monopole Antenna nRF: Folded Dipole Antenna

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	Ant. 0: 4.7 Ant. 1: 5.2
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	Ant. 0: 3.8 Ant. 1: 4.3
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	Ant. 0: 5.4 Ant. 1: 4.0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.1.1 Antenna Directional Gain

<For CDD Mode>

Follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01 F)2)f)ii)

Directional gain = G_{ANT} + Array Gain, where Array Gain is as follows:

For power measurements on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$.

G_{ANT} is set equal to the gain of the antenna having the highest gain.

For PSD measurements, the directional gain calculation.

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

$$DirectionalGain = 10 \cdot \log \left[\frac{\sum_{j=1}^{N_{SS}} \left\{ \sum_{k=1}^{N_{ANT}} g_{j,k} \right\}^2}{N_{ANT}} \right]$$

where

Each antenna is driven by no more than one spatial stream;

N_{SS} = the number of independent spatial streams of data;

N_{ANT} = the total number of antennas

$g_{j,k} = 10^{G_k/20}$ if the k th antenna is being fed by spatial stream j , or zero if it is not;
 G_k is the gain in dBi of the k th antenna.

As minimum $N_{SS}=1$ is supported by EUT, the formula can be simplified as:

Directional gain = $10 \cdot \log[(10^{G_1/20} + 10^{G_2/20} + \dots + 10^{G_N/20})^2 / N_{ANT}]$ dBi

Where G_1, G_2, \dots, G_N denote single antenna gain.



The directional gain "DG" is calculated as following table.

			DG	DG	Power	PSD
			for	for	Limit	Limit
	Ant 0	Ant 1	Power	PSD	Reduction	Reduction
	(dBi)	(dBi)	(dBi)	(dBi)	(dB)	(dB)
Band I	4.70	5.20	5.20	7.96	0.00	1.96
Band II	3.80	4.30	4.30	7.06	0.00	1.06
Band III	5.40	4.00	5.40	7.74	0.00	1.74

Calculation example:

If a device has two antenna, $G_{ANT1}= 4.7\text{dBi}$; $G_{ANT2}=5.2\text{dBi}$

Directional gain of power measurement = $\max(4.7, 5.2) + 0 = 5.2 \text{ dBi}$

Directional gain of PSD derived from formula which is

$$10 \times \log \left\{ \left[10^{(4.7 \text{ dBi} / 20)} + 10^{(5.2 \text{ dBi} / 20)} \right]^2 \right\} / 2$$

= 7.96 dBi

Power limit reduction = Composite gain – 6dBi, (min = 0)

PSD limit reduction = Composite gain + PSD Array gain – 6dBi, (min = 0)

Power and PSD limit reduction = Composite gain – 6dBi, (min = 0)



1.2 Modification of EUT

No modifications made to the EUT during the testing.

1.3 Testing Location

Test Site	Sporton International Inc. EMC & Wireless Communications Laboratory
Test Site Location	No.52, Huaya 1st Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	Sporton Site No. TH02-HY, 03CH07-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No. CO07-HY (TAF Code: 3786)
Remark	The AC Conducted Emission test item subcontracted to Sporton International Inc. Wensan Laboratory.

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW1190 and TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ FCC KDB 662911 D01 Multiple Transmitter Output v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.
3. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42#	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58#	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106#	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Frequency Band	Channel	Freq. (MHz)
5150-5350 MHz	50@	5250
5470-5725 MHz	114@	5570



Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122#	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138#	5690	144	5720
	142*	5710		

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "#" are 802.11ac VHT80 and 802.11ax HE80.
3. The above Frequency and Channel with "@" are 802.11ac VHT160 and 802.11ax HE160.



2.2 Test Mode

This device support 26/52/106/242/484/996-tone RU but does not support 2x996-tone RU on 160MHz channel.

The PSD of partial RU is reduced to be smaller than full RU according to TCB workshop interim guidance Oct. 2022.

The 802.11ax mode is investigated among different tones, full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

The 242-tone RU is covered by 20MHz channel, 484-tone RU is covered by 40MHz channel and 996-tone RU is covered by 80MHz channel.

The SISO mode conducted power is covered by MIMO mode per chain, so only the MIMO mode is tested.

The power for 802.11n mode is smaller than 802.11ac mode, so all other conducted and radiated test is covered by 802.11ac mode.

The final test modes include the worst data rates for each modulation shown in the table below.

MIMO Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by VHT20)	MCS0
802.11n HT40 (Covered by VHT40)	MCS0
802.11ac VHT20	MCS0
802.11ac VHT40	MCS0
802.11ac VHT80	MCS0
802.11ac VHT160	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0
802.11ax HE160	MCS0



Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (5GHz) Link + nRF Link + USB Cable (Charging from AC Adapter) for Sample 1
	Mode 2 : Bluetooth Link + WLAN (5GHz) Link + nRF Link + USB Cable (Charging from AC Adapter) for Sample 2
	Mode 3 : Bluetooth Link + WLAN (5GHz) Link + nRF Link + USB Cable (Charging from AC Adapter) for Sample 3
Remark: The worst case of Conducted Emission is mode 1; only the test data of it was reported.	

<Sample 1>

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT20	802.11ac VHT20	802.11ac VHT20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT40	802.11ac VHT40	802.11ac VHT40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142



Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ac VHT80	802.11ac VHT80	802.11ac VHT80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

BW160	5150-5350 MHz	5470-5725MHz
	802.11ac VHT160	802.11ac VHT160
Ch. #	50	114

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140
Straddle		-	-	144

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134
Straddle		-	-	142

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	122
Straddle		-	-	138

BW160	5150-5350 MHz	5470-5725MHz
	802.11ax HE160	802.11ax HE160
Ch. #	50	114


<Sample 2~4>

BW160	5470-5725MHz
	802.11ax HE160
Ch. #	114


Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

<AC Conducted Emission Mode>

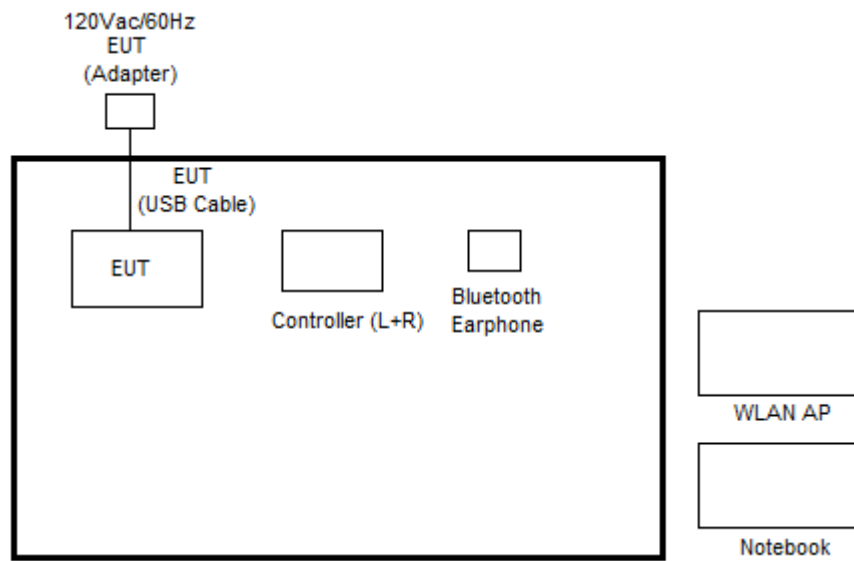

<WLAN Tx Mode>

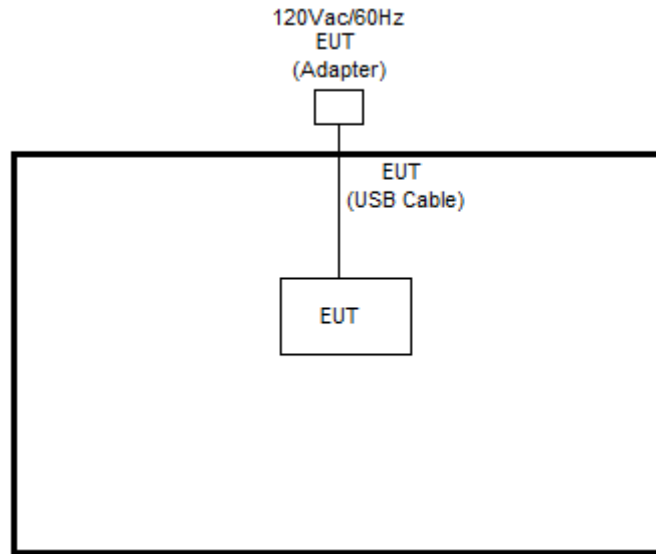

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony	SBH20	PY7-RD0010	N/A	N/A
2.	WLAN AP	Netgear	RAXE500	PY320300508	N/A	Unshielded, 1.8 m
3.	Controller	Meta	Rubby	N/A	N/A	N/A
4.	Notebook	Dell	Latitude 3420	N/A	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m



2.5 EUT Operation Test Setup

The RF test items, utility “QRCT Version 4.0.211.0” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

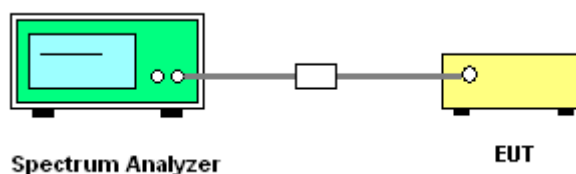

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm 10 log B, where B is the 26 dB emission bandwidth in megahertz.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.2.3 Test Procedures


The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.
5. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

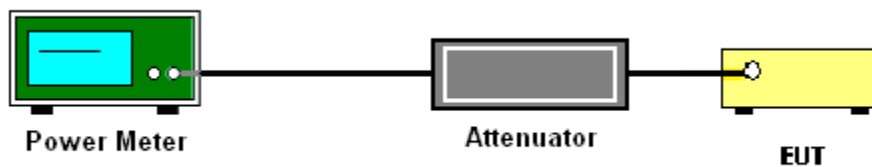

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

For Straddle Channel, according to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, if the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW \geq 3 MHz.
 - Number of points in sweep \geq 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.
 3. For MIMO mode, calculation method follows FCC KDB 662911 D01 Multiple Transmitter Output v02r01.

Method (a): Measure and sum the spectra across the outputs.

The total final Power Spectral Density is from a device with 2 transmitter outputs. The spectrum measurements of the individual outputs are all performed with the same span and number of points; the spectrum value in the first spectral bin of output 1 is summed with that in the first spectral bin of output 2 to obtain the value for the first frequency bin of the summed spectrum.

3.3.4 Test Setup



3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.



3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

(1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

(2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$



EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold


(2) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.

3.4.4 Test Setup


For radiated emissions below 30MHz

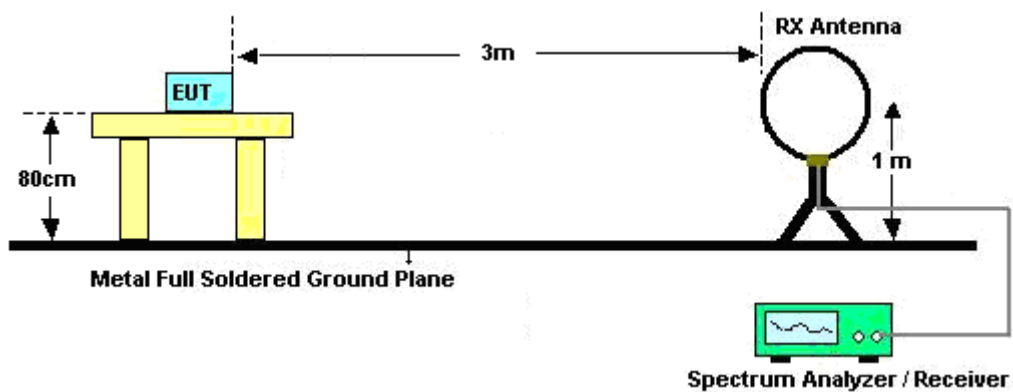


For radiated emissions from 30MHz to 1GHz

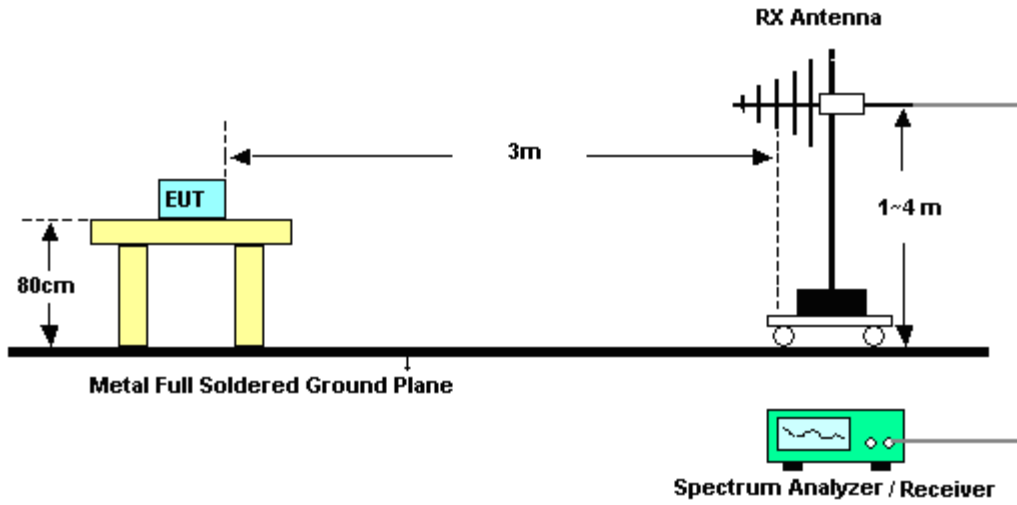

For radiated test from 1GHz to 18GHz

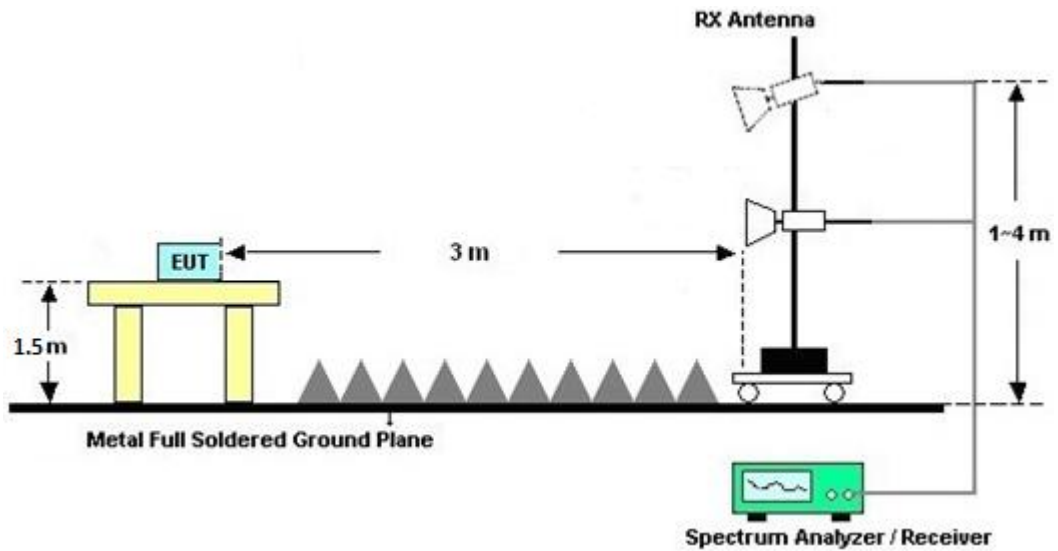

For radiated test above 18GHz

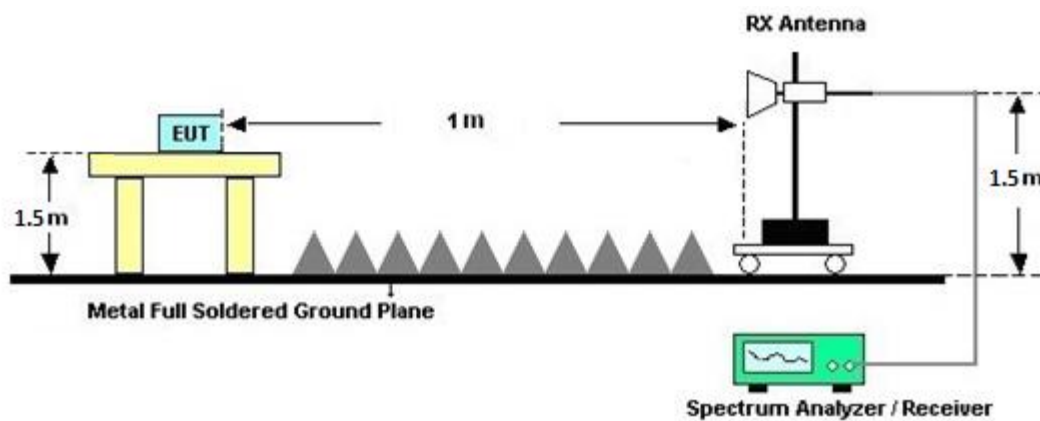



3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C and D.

3.4.7 Duty Cycle

Please refer to Appendix E.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C and D.



3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup



3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Double Ridge Horn Antenna	ETS-Lindgren	3117	00075962	1GHz ~ 18GHz	Nov. 27, 2023	Apr. 09, 2024~ May 01, 2024	Nov. 26, 2024	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 20, 2023	Apr. 09, 2024~ Apr. 18, 2024	Apr. 19, 2024	Radiation (03CH07-HY)
Preamplifier	MITEQ	AMF-7D-0010 1800-30-10P	1590075	1GHz~18GHz	Apr. 19, 2024	Apr. 19, 2024~ May 01, 2024	Apr. 18, 2025	Radiation (03CH07-HY)
Preamplifier	Agilent	8449B	3008A02362	1GHz~26.5GHz	Mar. 23, 2024	Apr. 09, 2024~ May 01, 2024	Mar. 22, 2025	Radiation (03CH07-HY)
Preamplifier	EMEC	EM18G40G	0600789	18-40GHz	Jul. 25, 2023	Apr. 09, 2024~ May 01, 2024	Jul. 24, 2024	Radiation (03CH07-HY)
Spectrum Analyzer	Agilent	N9030A	MY52350276	3Hz~44GHz	Mar. 26, 2024	Apr. 09, 2024~ May 01, 2024	Mar. 25, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4 MY15682/4	30MHz to 18GHz	Feb. 21, 2024	Apr. 09, 2024~ May 01, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 104	MY28655/4 MY24971/4	9kHz to 30MHz	Feb. 21, 2024	Apr. 09, 2024~ May 01, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 126	532078/126E	30MHz~18GHz	Sep. 15, 2023	Apr. 09, 2024~ May 01, 2024	Sep. 14, 2024	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	MY2858/2	18GHz~40GHz	Feb. 21, 2024	Apr. 09, 2024~ May 01, 2024	Feb. 20, 2025	Radiation (03CH07-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	520418/2	9KHz ~ 40GHz	Aug. 04, 2023	Apr. 09, 2024~ May 01, 2024	Aug. 03, 2024	Radiation (03CH07-HY)
Controller	EMEC	EM1000	N/A	Control Ant Mast	N/A	Apr. 09, 2024~ May 01, 2024	N/A	Radiation (03CH07-HY)
Controller	MF	MF-7802	N/A	Control Turn table	N/A	Apr. 09, 2024~ May 01, 2024	N/A	Radiation (03CH07-HY)
Antenna Mast	EMEC	AM-BS-4500E	N/A	Boresight mast 1M~4M	N/A	Apr. 09, 2024~ May 01, 2024	N/A	Radiation (03CH07-HY)
Turn Table	ChainTek	Chaintek 3000	N/A	0~360 Degree	N/A	Apr. 09, 2024~ May 01, 2024	N/A	Radiation (03CH07-HY)
Software	Audix	E3	N/A	N/A	N/A	Apr. 09, 2024~ May 01, 2024	N/A	Radiation (03CH07-HY)
USB Data Logger	TECPEL	TR-32	HE17XB2495	N/A	Mar. 01, 2024	Apr. 09, 2024~ May 01, 2024	Feb. 28, 2025	Radiation (03CH07-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	BBHA917025 1	18GHz~40GHz	Nov. 24, 2023	Apr. 09, 2024~ May 01, 2024	Nov. 23, 2024	Radiation (03CH07-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Apr. 09, 2024~ May 16, 2024	Nov. 06, 2024	Conducted (TH02-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 36 (NO:35_ 144)	10MHz~6GHz	Aug. 23, 2023	Apr. 09, 2024~ May 16, 2024	Aug. 22, 2024	Conducted (TH02-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101564	10Hz ~ 40GHz	Sep. 12, 2023	Apr. 09, 2024~ May 16, 2024	Sep. 11, 2024	Conducted (TH02-HY)



Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Apr. 25, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Apr. 25, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz-200MHz	Oct. 20, 2023	Apr. 25, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Apr. 25, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Apr. 25, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Apr. 25, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Apr. 25, 2024	Sep. 19, 2024	Conduction (CO07-HY)



5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.6 dB
---	--------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.3 dB
---	--------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.3 dB
---	--------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Hank Hsu	Temperature:	21~25	°C
Test Date:	2024/4/9~2024/5/16	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	36	5180	16.33	16.38	19.84	19.42	-	-	22.13	22.13	
11a	6Mbps	2	44	5220	16.33	16.33	19.42	19.34	-	-	22.13	22.13	
11a	6Mbps	2	48	5240	16.33	16.33	19.58	19.38	-	-	22.13	22.13	
VHT20	MCS0	2	36	5180	17.58	17.53	20.56	21.71	-	-	22.44	22.44	
VHT20	MCS0	2	44	5220	17.58	17.53	20.67	20.70	-	-	22.44	22.44	
VHT20	MCS0	2	48	5240	17.58	17.53	21.46	21.34	-	-	22.44	22.44	
VHT40	MCS0	2	38	5190	36.16	36.06	41.14	40.67	-	-	23.01	23.01	
VHT40	MCS0	2	46	5230	36.26	36.26	42.11	41.42	-	-	23.01	23.01	
VHT80	MCS0	2	42	5210	75.04	75.16	81.79	81.44	-	-	23.01	23.01	
VHT160	MCS0	2	50	5250	153.69	153.69	164.88	163.54	-	-	23.01	23.01	

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail	
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	36	5180	0.05	0.04	12.60	12.90	15.76	24.00	24.00	5.20	5.20	-	Pass
11a	6Mbps	2	44	5220	0.05	0.04	13.20	13.50	16.36	24.00	24.00	5.20	5.20		Pass
11a	6Mbps	2	48	5240	0.05	0.04	13.30	13.40	16.36	24.00	24.00	5.20	5.20		Pass
HT20	MCS0	2	36	5180	0.00	0.00	13.10	13.00	16.06	24.00	24.00	5.20	5.20		Pass
HT20	MCS0	2	44	5220	0.00	0.00	13.20	13.30	16.26	24.00	24.00	5.20	5.20		Pass
HT20	MCS0	2	48	5240	0.00	0.00	13.20	13.20	16.21	24.00	24.00	5.20	5.20		Pass
HT40	MCS0	2	38	5190	0.05	0.04	11.70	11.80	14.76	24.00	24.00	5.20	5.20		Pass
HT40	MCS0	2	46	5230	0.05	0.04	16.00	15.90	18.96	24.00	24.00	5.20	5.20		Pass
VHT20	MCS0	2	36	5180	0.00	0.00	13.20	13.10	16.16	24.00	24.00	5.20	5.20		Pass
VHT20	MCS0	2	44	5220	0.00	0.00	13.30	13.40	16.36	24.00	24.00	5.20	5.20		Pass
VHT20	MCS0	2	48	5240	0.00	0.00	13.30	13.30	16.31	24.00	24.00	5.20	5.20		Pass
VHT40	MCS0	2	38	5190	0.00	0.00	11.80	11.90	14.86	24.00	24.00	5.20	5.20		Pass
VHT40	MCS0	2	46	5230	0.00	0.00	16.10	16.00	19.06	24.00	24.00	5.20	5.20		Pass
VHT80	MCS0	2	42	5210	0.04	0.04	10.60	10.50	13.56	24.00	24.00	5.20	5.20		Pass
VHT160	MCS0	2	50	5250	0.03	0.03	9.80	9.50	12.66	24.00	24.00	5.20	5.20		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail			
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1				
11a	6Mbps	2	36	5180	0.05	0.04	-		-					Pass			
11a	6Mbps	2	44	5220	0.05	0.04								5.84	9.04	7.96	Pass
11a	6Mbps	2	48	5240	0.05	0.04								6.16	9.04	7.96	Pass
VHT20	MCS0	2	36	5180	0.00	0.00								6.20	9.04	7.96	Pass
VHT20	MCS0	2	44	5220	0.00	0.00								5.44	9.04	7.96	Pass
VHT20	MCS0	2	48	5240	0.00	0.00								5.83	9.04	7.96	Pass
VHT40	MCS0	2	38	5190	0.00	0.00								5.85	9.04	7.96	Pass
VHT40	MCS0	2	46	5230	0.00	0.00								1.65	9.04	7.96	Pass
VHT40	MCS0	2	42	5210	0.04	0.04								6.06	9.04	7.96	Pass
VHT80	MCS0	2	50	5250	0.03	0.03								-2.27	9.04	7.96	Pass
VHT160	MCS0	2	50	5250	0.03	0.03	-5.94	9.04	7.96	Pass							

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
11a	6Mbps	2	52	5260	16.33	16.33	19.86	19.47	23.13		29.13		23.89	-	
11a	6Mbps	2	60	5300	16.33	16.33	19.46	19.63	23.13		29.13		23.89		
11a	6Mbps	2	64	5320	16.33	16.33	19.50	19.44	23.13		29.13		23.89		
VHT20	MCS0	2	52	5260	17.53	17.58	20.98	21.39	23.44		29.44		23.98		
VHT20	MCS0	2	60	5300	17.53	17.53	21.18	20.40	23.44		29.44		23.98		
VHT20	MCS0	2	64	5320	17.53	17.58	21.00	21.37	23.44		29.44		23.98		
VHT40	MCS0	2	54	5270	36.16	36.36	49.07	47.47	23.98		30.00		23.98		
VHT40	MCS0	2	62	5310	35.96	36.16	40.67	40.64	23.98		30.00		23.98		
VHT80	MCS0	2	58	5290	75.04	75.04	81.95	81.57	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	52	5260	0.05	0.04	13.90	14.00	16.96	23.89		4.30	26.99	Pass	
11a	6Mbps	2	60	5300	0.05	0.04	13.70	13.90	16.81	23.89		4.30	26.99	Pass	
11a	6Mbps	2	64	5320	0.05	0.04	13.90	14.20	17.06	23.89		4.30	26.99	Pass	
HT20	MCS0	2	52	5260	0.00	0.00	13.80	13.80	16.81	23.98		4.30	26.99	Pass	
HT20	MCS0	2	60	5300	0.00	0.00	13.70	13.80	16.76	23.98		4.30	26.99	Pass	
HT20	MCS0	2	64	5320	0.00	0.00	13.90	14.00	16.96	23.98		4.30	26.99	Pass	
HT40	MCS0	2	54	5270	0.05	0.04	16.10	16.00	19.06	23.98		4.30	26.99	Pass	
HT40	MCS0	2	62	5310	0.05	0.04	12.00	11.90	14.96	23.98		4.30	26.99	Pass	
VHT20	MCS0	2	52	5260	0.00	0.00	13.90	13.90	16.91	23.98		4.30	26.99	Pass	
VHT20	MCS0	2	60	5300	0.00	0.00	13.80	13.90	16.86	23.98		4.30	26.99	Pass	
VHT20	MCS0	2	64	5320	0.00	0.00	14.00	14.10	17.06	23.98		4.30	26.99	Pass	
VHT40	MCS0	2	54	5270	0.00	0.00	16.20	16.10	19.16	23.98		4.30	26.99	Pass	
VHT40	MCS0	2	62	5310	0.00	0.00	12.10	12.00	15.06	23.98		4.30	26.99	Pass	
VHT80	MCS0	2	58	5290	0.04	0.04	11.90	11.50	14.71	23.98		4.30	26.99	Pass	

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail			
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1				
11a	6Mbps	2	52	5260	0.05	0.04	-		6.82	9.94	7.06		-	Pass			
11a	6Mbps	2	60	5300	0.05	0.04								6.60	9.94	7.06	Pass
11a	6Mbps	2	64	5320	0.05	0.04								6.82	9.94	7.06	Pass
VHT20	MCS0	2	52	5260	0.00	0.00								6.42	9.94	7.06	Pass
VHT20	MCS0	2	60	5300	0.00	0.00								6.35	9.94	7.06	Pass
VHT20	MCS0	2	64	5320	0.00	0.00								6.52	9.94	7.06	Pass
VHT40	MCS0	2	54	5270	0.00	0.00								6.20	9.94	7.06	Pass
VHT40	MCS0	2	62	5310	0.00	0.00								1.91	9.94	7.06	Pass
VHT80	MCS0	2	58	5290	0.04	0.04								-1.09	9.94	7.06	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	2	100	5500	16.33	16.33	19.65	19.44	23.13		29.13		23.89		----	----
11a	6Mbps	2	116	5580	16.33	16.33	19.62	19.86	23.13		29.13		23.93		----	----
11a	6Mbps	2	140	5700	16.38	16.38	19.55	19.78	23.14		29.14		23.91		----	----
VHT20	MCS0	2	100	5500	17.58	17.58	20.99	21.45	23.45		29.45		23.98		----	----
VHT20	MCS0	2	116	5580	17.58	17.63	21.01	21.15	23.45		29.45		23.98		----	----
VHT20	MCS0	2	140	5700	17.63	17.58	20.66	21.01	23.45		29.45		23.98		----	----
VHT40	MCS0	2	102	5510	36.06	36.06	40.96	40.91	23.98		30.00		23.98		----	----
VHT40	MCS0	2	110	5550	36.16	36.26	41.58	41.50	23.98		30.00		23.98		----	----
VHT40	MCS0	2	134	5670	36.06	36.26	41.49	41.09	23.98		30.00		23.98		----	----
VHT80	MCS0	2	106	5530	75.04	74.93	81.31	80.74	23.98		30.00		23.98		----	----
VHT80	MCS0	2	122	5610	74.93	75.04	80.93	81.47	23.98		30.00		23.98		----	----
VHT160	MCS0	2	114	5570	153.45	153.93	164.40	164.54	23.98		30.00		23.98		----	----

U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
11a	6Mbps	2	144	5720	13.24	13.19	14.90	14.82	22.20		28.20		22.71		2.52	2.485
VHT20	MCS0	2	144	5720	13.84	13.84	15.72	15.45	22.41		28.41		22.89		2.505	2.52
VHT40	MCS0	2	142	5710	33.28	33.18	35.75	35.18	23.98		30.00		23.98		2.505	2.514
VHT80	MCS0	2	138	5690	72.62	72.64	76.12	75.83	23.98		30.00		23.98		----	----

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	100	5500	0.05	0.04	13.90	14.10	17.01	23.89	5.40	26.99	Pass		
11a	6Mbps	2	116	5580	0.05	0.04	14.30	14.70	17.51	23.93	5.40	26.99	Pass		
11a	6Mbps	2	140	5700	0.05	0.04	13.50	13.20	16.36	23.91	5.40	26.99	Pass		
HT20	MCS0	2	100	5500	0.00	0.00	13.50	13.50	16.51	23.98	5.40	26.99	Pass		
HT20	MCS0	2	116	5580	0.00	0.00	13.80	14.10	16.96	23.98	5.40	26.99	Pass		
HT20	MCS0	2	140	5700	0.00	0.00	12.10	11.60	14.87	23.98	5.40	26.99	Pass		
HT40	MCS0	2	102	5510	0.05	0.04	11.30	11.70	14.51	23.98	5.40	26.99	Pass		
HT40	MCS0	2	110	5550	0.05	0.04	15.90	15.30	18.62	23.98	5.40	26.99	Pass		
HT40	MCS0	2	134	5670	0.05	0.04	15.60	15.20	18.41	23.98	5.40	26.99	Pass		
VHT20	MCS0	2	100	5500	0.00	0.00	13.60	13.60	16.61	23.98	5.40	26.99	Pass		
VHT20	MCS0	2	116	5580	0.00	0.00	13.90	14.20	17.06	23.98	5.40	26.99	Pass		
VHT20	MCS0	2	140	5700	0.00	0.00	12.20	11.70	14.97	23.98	5.40	26.99	Pass		
VHT40	MCS0	2	102	5510	0.00	0.00	11.40	11.80	14.61	23.98	5.40	26.99	Pass		
VHT40	MCS0	2	110	5550	0.00	0.00	16.00	15.40	18.72	23.98	5.40	26.99	Pass		
VHT40	MCS0	2	134	5670	0.00	0.00	15.70	15.30	18.51	23.98	5.40	26.99	Pass		
VHT80	MCS0	2	106	5530	0.04	0.04	10.30	10.40	13.36	23.98	5.40	26.99	Pass		
VHT80	MCS0	2	122	5610	0.04	0.04	14.60	14.10	17.37	23.98	5.40	26.99	Pass		
VHT160	MCS0	2	114	5570	0.03	0.03	10.80	10.60	13.71	23.98	5.40	26.99	Pass		

FCC U-NII-2C straddle channel MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
11a	6Mbps	2	144	5720	0.05	0.04	13.20	13.80	16.52	22.71	5.40	26.99	Pass		
HT20	MCS0	2	144	5720	0.00	0.00	12.80	13.20	16.01	23.98	5.40	26.99	Pass		
HT40	MCS0	2	142	5710	0.05	0.04	15.40	15.20	18.31	23.98	5.40	26.99	Pass		
VHT20	MCS0	2	144	5720	0.00	0.00	12.90	13.30	16.11	22.89	5.40	26.99	Pass		
VHT40	MCS0	2	142	5710	0.00	0.00	15.50	15.30	18.41	23.98	5.40	26.99	Pass		
VHT80	MCS0	2	138	5690	0.04	0.04	15.30	14.60	17.97	23.98	5.40	26.99	Pass		

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail			
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1				
11a	6Mbps	2	100	5500	0.05	0.04	-							Pass			
11a	6Mbps	2	116	5580	0.05	0.04									6.56	9.26	7.74
11a	6Mbps	2	140	5700	0.05	0.04									7.11	9.26	7.74
VHT20	MCS0	2	100	5500	0.00	0.00									5.76	9.26	7.74
VHT20	MCS0	2	116	5580	0.00	0.00									5.83	9.26	7.74
VHT20	MCS0	2	140	5700	0.00	0.00									6.33	9.26	7.74
VHT40	MCS0	2	102	5510	0.00	0.00									4.05	9.26	7.74
VHT40	MCS0	2	110	5550	0.00	0.00									1.34	9.26	7.74
VHT40	MCS0	2	134	5670	0.00	0.00									5.35	9.26	7.74
VHT40	MCS0	2	134	5670	0.00	0.00									5.20	9.26	7.74
VHT80	MCS0	2	106	5530	0.04	0.04									-2.57	9.26	7.74
VHT80	MCS0	2	122	5610	0.04	0.04									1.36	9.26	7.74
VHT160	MCS0	2	114	5570	0.03	0.03	-5.20	9.26	7.74								

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail			
					Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1				
11a	6Mbps	2	144	5720	0.05	0.04	-							Pass			
VHT20	MCS0	2	144	5720	0.00	0.00									5.98	9.26	7.74
VHT40	MCS0	2	142	5710	0.00	0.00									5.15	9.26	7.74
VHT80	MCS0	2	138	5690	0.04	0.04									4.91	9.26	7.74
														Pass			
														Pass			

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 MIMO														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		Note
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	36	5180	Full	18.88	18.88	20.91	20.85	-	-	22.76	-	-
HE20	MCS0	2	44	5220	Full	18.88	18.83	21.39	20.85	-	-	22.75	-	-
HE20	MCS0	2	48	5240	Full	18.83	18.83	20.89	20.88	-	-	22.75	-	-
HE40	MCS0	2	38	5190	Full	37.86	37.86	41.15	41.23	-	-	23.01	-	-
HE40	MCS0	2	46	5230	Full	37.86	37.66	40.99	41.17	-	-	23.01	-	-
HE80	MCS0	2	42	5210	Full	76.84	76.84	81.92	81.63	-	-	23.01	-	-
HE160	MCS0	2	50	5250	Full	155.36	155.12	164.40	164.74	-	-	23.01	-	-

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	36	5180	Full	0.00	0.00	13.50	13.50	16.51	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	36	5180	26/0	0.00	0.00	4.10	4.00	7.06	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	36	5180	52/37	0.00	0.00	7.20	6.50	9.87	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	36	5180	106/53	0.00	0.00	10.40	10.40	13.41	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	44	5220	Full	0.00	0.00	13.40	13.40	16.41	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	44	5220	26/4	0.00	0.00	8.00	7.90	10.96	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	44	5220	52/38	0.00	0.00	8.40	9.10	11.77	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	44	5220	106/53	0.00	0.00	10.40	10.60	13.51	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	48	5240	Full	0.00	0.00	13.40	13.50	16.46	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	48	5240	26/8	0.00	0.00	3.80	3.60	6.71	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	48	5240	52/40	0.00	0.00	6.60	6.90	9.76	24.00	24.00	5.20	5.20	Pass
HE20	MCS0	2	48	5240	106/54	0.00	0.00	10.40	10.30	13.36	24.00	24.00	5.20	5.20	Pass
HE40	MCS0	2	38	5190	Full	0.00	0.00	11.40	11.40	14.41	24.00	24.00	5.20	5.20	Pass
HE40	MCS0	2	38	5190	242/61	0.00	0.00	14.10	14.00	17.06	24.00	24.00	5.20	5.20	Pass
HE40	MCS0	2	46	5230	Full	0.00	0.00	15.70	15.60	18.66	24.00	24.00	5.20	5.20	Pass
HE40	MCS0	2	46	5230	242/62	0.00	0.00	14.20	13.80	17.01	24.00	24.00	5.20	5.20	Pass
HE80	MCS0	2	42	5210	Full	0.04	0.04	10.60	10.50	13.56	24.00	24.00	5.20	5.20	Pass
HE160	MCS0	2	50	5250	Full	0.05	0.03	9.80	9.60	12.71	24.00	24.00	5.20	5.20	Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 MIMO															
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	36	5180	Full	0.00	0.00			5.31	9.04	7.96		Pass	
HE20	MCS0	2	36	5180	26/0	0.00	0.00			3.48	9.04	7.96		Pass	
HE20	MCS0	2	36	5180	52/37	0.00	0.00			3.52	9.04	7.96		Pass	
HE20	MCS0	2	36	5180	106/53	0.00	0.00			5.75	9.04	7.96		Pass	
HE20	MCS0	2	44	5220	Full	0.00	0.00			5.64	9.04	7.96		Pass	
HE20	MCS0	2	44	5220	26/4	0.00	0.00			6.80	9.04	7.96		Pass	
HE20	MCS0	2	44	5220	52/38	0.00	0.00			6.66	9.04	7.96		Pass	
HE20	MCS0	2	44	5220	106/53	0.00	0.00			6.05	9.04	7.96		Pass	
HE20	MCS0	2	48	5240	Full	0.00	0.00			5.70	9.04	7.96		Pass	
HE20	MCS0	2	48	5240	26/8	0.00	0.00			4.02	9.04	7.96		Pass	
HE20	MCS0	2	48	5240	52/40	0.00	0.00			4.07	9.04	7.96		Pass	
HE20	MCS0	2	48	5240	106/54	0.00	0.00			5.92	9.04	7.96		Pass	
HE40	MCS0	2	38	5190	Full	0.00	0.00			0.88	9.04	7.96		Pass	
HE40	MCS0	2	38	5190	242/61	0.00	0.00			6.44	9.04	7.96		Pass	
HE40	MCS0	2	46	5230	Full	0.00	0.00			5.32	9.04	7.96		Pass	
HE40	MCS0	2	46	5230	242/62	0.00	0.00			6.89	9.04	7.96		Pass	
HE80	MCS0	2	42	5210	Full	0.04	0.04			-2.33	9.04	7.96		Pass	
HE160	MCS0	2	50	5250	Full	0.05	0.03			-5.70	9.04	7.96		Pass	

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	52	5260	Full	18.88	18.88	21.18	21.01	23.76		29.76		23.98		
HE20	MCS0	2	60	5300	Full	18.88	18.83	20.94	20.99	23.75		29.75		23.98		
HE20	MCS0	2	64	5320	Full	18.83	18.83	20.90	21.16	23.75		29.75		23.98		
HE40	MCS0	2	54	5270	Full	37.76	37.76	41.18	41.54	23.98		30.00		23.98		
HE40	MCS0	2	62	5310	Full	37.76	37.76	41.57	41.23	23.98		30.00		23.98		
HE80	MCS0	2	58	5290	Full	76.96	76.96	81.79	81.66	23.98		30.00		23.98		

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	52	5260	Full	0.00	0.00	13.90	14.00	16.96	23.98	4.30	26.99	Pass		
HE20	MCS0	2	52	5260	26/0	0.00	0.00	5.40	4.80	8.12	23.98	4.30	26.99	Pass		
HE20	MCS0	2	52	5260	52/37	0.00	0.00	8.40	7.90	11.17	23.98	4.30	26.99	Pass		
HE20	MCS0	2	52	5260	106/53	0.00	0.00	11.70	11.90	14.81	23.98	4.30	26.99	Pass		
HE20	MCS0	2	60	5300	Full	0.00	0.00	13.90	14.00	16.96	23.98	4.30	26.99	Pass		
HE20	MCS0	2	60	5300	26/4	0.00	0.00	8.90	8.80	11.86	23.57	4.30	26.99	Pass		
HE20	MCS0	2	60	5300	52/38	0.00	0.00	9.50	10.10	12.82	23.61	4.30	26.99	Pass		
HE20	MCS0	2	60	5300	106/53	0.00	0.00	11.50	11.70	14.61	23.97	4.30	26.99	Pass		
HE20	MCS0	2	64	5320	Full	0.00	0.00	14.00	14.30	17.16	23.98	4.30	26.99	Pass		
HE20	MCS0	2	64	5320	26/8	0.00	0.00	4.90	5.00	7.96	23.97	4.30	26.99	Pass		
HE20	MCS0	2	64	5320	52/40	0.00	0.00	7.90	8.20	11.06	23.98	4.30	26.99	Pass		
HE20	MCS0	2	64	5320	106/54	0.00	0.00	11.50	11.70	14.61	23.95	4.30	26.99	Pass		
HE40	MCS0	2	54	5270	Full	0.00	0.00	15.70	15.60	18.66	23.98	4.30	26.99	Pass		
HE40	MCS0	2	54	5270	242/61	0.00	0.00	14.40	14.30	17.36	23.98	4.30	26.99	Pass		
HE40	MCS0	2	62	5310	Full	0.00	0.00	11.60	11.50	14.56	23.98	4.30	26.99	Pass		
HE40	MCS0	2	62	5310	242/62	0.00	0.00	14.20	13.90	17.06	23.98	4.30	26.99	Pass		
HE80	MCS0	2	58	5290	Full	0.04	0.04	11.80	11.60	14.71	23.98	4.30	26.99	Pass		

TEST RESULTS DATA
Power Spectral Density

U-NII-2A MIMO															
Mod.	Data Rate	N _{rx}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	52	5260	Full	0.00	0.00	-	-	6.29	9.94	7.06	-	-	Pass
HE20	MCS0	2	52	5260	26/0	0.00	0.00	-	-	5.27	9.94	7.06	-	-	Pass
HE20	MCS0	2	52	5260	52/37	0.00	0.00	-	-	5.39	9.94	7.06	-	-	Pass
HE20	MCS0	2	52	5260	106/53	0.00	0.00	-	-	7.30	9.94	7.06	-	-	Pass
HE20	MCS0	2	60	5300	Full	0.00	0.00	-	-	6.11	9.94	7.06	-	-	Pass
HE20	MCS0	2	60	5300	26/4	0.00	0.00	-	-	7.54	9.94	7.06	-	-	Pass
HE20	MCS0	2	60	5300	52/38	0.00	0.00	-	-	7.70	9.94	7.06	-	-	Pass
HE20	MCS0	2	60	5300	106/53	0.00	0.00	-	-	7.10	9.94	7.06	-	-	Pass
HE20	MCS0	2	64	5320	Full	0.00	0.00	-	-	6.36	9.94	7.06	-	-	Pass
HE20	MCS0	2	64	5320	26/8	0.00	0.00	-	-	5.22	9.94	7.06	-	-	Pass
HE20	MCS0	2	64	5320	52/40	0.00	0.00	-	-	5.50	9.94	7.06	-	-	Pass
HE20	MCS0	2	64	5320	106/54	0.00	0.00	-	-	7.21	9.94	7.06	-	-	Pass
HE40	MCS0	2	54	5270	Full	0.00	0.00	-	-	5.41	9.94	7.06	-	-	Pass
HE40	MCS0	2	54	5270	242/61	0.00	0.00	-	-	7.05	9.94	7.06	-	-	Pass
HE40	MCS0	2	62	5310	Full	0.00	0.00	-	-	1.22	9.94	7.06	-	-	Pass
HE40	MCS0	2	62	5310	242/62	0.00	0.00	-	-	6.85	9.94	7.06	-	-	Pass
HE80	MCS0	2	58	5290	Full	0.04	0.04	-	-	-1.12	9.94	7.06	-	-	Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
HE20	MCS0	2	100	5500	Full	18.83	18.83	20.85	21.18	23.75	29.75	23.98	---	---			
HE20	MCS0	2	116	5580	Full	18.88	18.88	21.02	21.04	23.76	29.76	23.98	---	---			
HE20	MCS0	2	140	5700	Full	18.88	18.88	21.51	20.98	23.76	29.76	23.98	---	---			
HE40	MCS0	2	102	5510	Full	37.86	37.86	41.23	41.18	23.98	30.00	23.98	---	---			
HE40	MCS0	2	110	5550	Full	37.76	37.86	41.44	41.18	23.98	30.00	23.98	---	---			
HE40	MCS0	2	134	5670	Full	37.76	37.66	41.31	41.30	23.98	30.00	23.98	---	---			
HE80	MCS0	2	106	5530	Full	76.84	76.84	81.09	81.89	23.98	30.00	23.98	---	---			
HE80	MCS0	2	122	5610	Full	76.72	76.72	81.63	81.66	23.98	30.00	23.98	---	---			
HE160	MCS0	2	114	5570	Full	155.12	155.84	165.46	164.50	23.98	30.00	23.98	---	---			

U-NII-2C straddle channel MIMO																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1	Ant 0	Ant 1
HE20	MCS0	2	144	5720	Full	14.49	14.49	15.70	15.78	22.61	28.61	22.96	2.105	2.675			
HE40	MCS0	2	142	5710	Full	34.08	33.88	35.45	35.66	23.98	30.00	23.98	2.487	2.523			
HE80	MCS0	2	138	5690	Full	73.48	73.60	75.96	76.18	23.98	30.00	23.98	---	---			

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	100	5500	Full	0.00	0.00	13.60	13.70	16.66	23.98	5.40	26.99	Pass		
HE20	MCS0	2	100	5500	26/0	0.00	0.00	4.10	3.60	6.87	23.98	5.40	26.99	Pass		
HE20	MCS0	2	100	5500	52/37	0.00	0.00	7.00	7.00	10.01	23.98	5.40	26.99	Pass		
HE20	MCS0	2	100	5500	106/53	0.00	0.00	10.90	11.30	14.11	23.98	5.40	26.99	Pass		
HE20	MCS0	2	116	5580	Full	0.00	0.00	14.00	14.30	17.16	23.98	5.40	26.99	Pass		
HE20	MCS0	2	116	5580	26/4	0.00	0.00	7.70	7.80	10.76	23.56	5.40	26.99	Pass		
HE20	MCS0	2	116	5580	52/38	0.00	0.00	9.30	9.90	12.62	23.59	5.40	26.99	Pass		
HE20	MCS0	2	116	5580	106/53	0.00	0.00	11.40	11.80	14.61	23.98	5.40	26.99	Pass		
HE20	MCS0	2	140	5700	Full	0.00	0.00	12.30	11.80	15.07	23.98	5.40	26.99	Pass		
HE20	MCS0	2	140	5700	26/8	0.00	0.00	3.30	3.10	6.21	23.98	5.40	26.99	Pass		
HE20	MCS0	2	140	5700	52/40	0.00	0.00	6.00	6.30	9.16	23.98	5.40	26.99	Pass		
HE20	MCS0	2	140	5700	106/54	0.00	0.00	10.60	10.20	13.41	23.96	5.40	26.99	Pass		
HE40	MCS0	2	102	5510	Full	0.00	0.00	11.00	11.30	14.16	23.98	5.40	26.99	Pass		
HE40	MCS0	2	102	5510	242/61	0.00	0.00	14.60	14.60	17.61	23.98	5.40	26.99	Pass		
HE40	MCS0	2	110	5550	Full	0.00	0.00	15.50	15.00	18.27	23.98	5.40	26.99	Pass		
HE40	MCS0	2	110	5550	242/61	0.00	0.00	14.50	14.10	17.31	23.98	5.40	26.99	Pass		
HE40	MCS0	2	134	5670	Full	0.00	0.00	15.30	14.90	18.11	23.98	5.40	26.99	Pass		
HE40	MCS0	2	134	5670	242/62	0.00	0.00	14.80	14.10	17.47	23.98	5.40	26.99	Pass		
HE80	MCS0	2	106	5530	Full	0.04	0.04	10.20	10.40	13.31	23.98	5.40	26.99	Pass		
HE80	MCS0	2	122	5610	Full	0.04	0.04	14.50	14.20	17.36	23.98	5.40	26.99	Pass		
HE160	MCS0	2	114	5570	Full	0.05	0.03	10.90	10.80	13.86	23.98	5.40	26.99	Pass		

FCC U-NII-2C straddle channel MIMO																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Conducted Power (dBm)			FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1		
HE20	MCS0	2	144	5720	Full	0.00	0.00	13.00	13.40	16.21	22.96	5.40	26.99	Pass		
HE20	MCS0	2	144	5720	26/8	0.00	0.00	3.10	3.80	6.47	22.50	5.40	26.99	Pass		
HE20	MCS0	2	144	5720	52/40	0.00	0.00	6.20	6.80	9.52	22.55	5.40	26.99	Pass		
HE20	MCS0	2	144	5720	106/54	0.00	0.00	10.40	10.80	13.61	22.55	5.40	26.99	Pass		
HE40	MCS0	2	142	5710	Full	0.00	0.00	15.10	14.90	18.01	23.98	5.40	26.99	Pass		
HE40	MCS0	2	142	5710	242/62	0.00	0.00	12.00	11.60	14.81	23.98	5.40	26.99	Pass		
HE80	MCS0	2	138	5690	Full	0.05	0.03	15.30	14.80	18.07	23.98	5.40	26.99	Pass		

TEST RESULTS DATA
Power Spectral Density

U-NII-2C MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	100	5500	Full	0.00	0.00	-	-	5.62	9.26	7.74	-	Pass	
HE20	MCS0	2	100	5500	26/0	0.00	0.00	-	-	4.09	9.26	7.74	-	Pass	
HE20	MCS0	2	100	5500	52/37	0.00	0.00	-	-	4.30	9.26	7.74	-	Pass	
HE20	MCS0	2	100	5500	106/53	0.00	0.00	-	-	6.54	9.26	7.74	-	Pass	
HE20	MCS0	2	116	5580	Full	0.00	0.00	-	-	6.12	9.26	7.74	-	Pass	
HE20	MCS0	2	116	5580	26/4	0.00	0.00	-	-	6.74	9.26	7.74	-	Pass	
HE20	MCS0	2	116	5580	52/38	0.00	0.00	-	-	6.98	9.26	7.74	-	Pass	
HE20	MCS0	2	116	5580	106/53	0.00	0.00	-	-	6.92	9.26	7.74	-	Pass	
HE20	MCS0	2	140	5700	Full	0.00	0.00	-	-	3.90	9.26	7.74	-	Pass	
HE20	MCS0	2	140	5700	26/8	0.00	0.00	-	-	3.23	9.26	7.74	-	Pass	
HE20	MCS0	2	140	5700	52/40	0.00	0.00	-	-	3.23	9.26	7.74	-	Pass	
HE20	MCS0	2	140	5700	106/54	0.00	0.00	-	-	5.50	9.26	7.74	-	Pass	
HE40	MCS0	2	102	5510	Full	0.00	0.00	-	-	0.41	9.26	7.74	-	Pass	
HE40	MCS0	2	102	5510	242/61	0.00	0.00	-	-	7.06	9.26	7.74	-	Pass	
HE40	MCS0	2	110	5550	Full	0.00	0.00	-	-	4.60	9.26	7.74	-	Pass	
HE40	MCS0	2	110	5550	242/61	0.00	0.00	-	-	6.71	9.26	7.74	-	Pass	
HE40	MCS0	2	134	5670	Full	0.00	0.00	-	-	4.31	9.26	7.74	-	Pass	
HE40	MCS0	2	134	5670	242/62	0.00	0.00	-	-	6.69	9.26	7.74	-	Pass	
HE80	MCS0	2	106	5530	Full	0.04	0.04	-	-	-2.61	9.26	7.74	-	Pass	
HE80	MCS0	2	122	5610	Full	0.04	0.04	-	-	1.45	9.26	7.74	-	Pass	
HE160	MCS0	2	114	5570	Full	0.05	0.03	-	-	-5.18	9.26	7.74	-	Pass	


U-NII-2C straddle channel MIMO															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density (dBm/MHz)			Average PSD Limit (dBm/MHz)		DG (dBi)		Pass /Fail
						Ant 0	Ant 1	Ant 0	Ant 1	SUM	Ant 0	Ant 1	Ant 0	Ant 1	
HE20	MCS0	2	144	5720	Full	0.00	0.00	-	-	5.01	9.26	7.74	-	Pass	
HE20	MCS0	2	144	5720	26/8	0.00	0.00	-	-	3.56	9.26	7.74	-	Pass	
HE20	MCS0	2	144	5720	52/40	0.00	0.00	-	-	3.63	9.26	7.74	-	Pass	
HE20	MCS0	2	144	5720	106/54	0.00	0.00	-	-	5.80	9.26	7.74	-	Pass	
HE40	MCS0	2	142	5710	Full	0.00	0.00	-	-	4.41	9.26	7.74	-	Pass	
HE40	MCS0	2	142	5710	242/62	0.00	0.00	-	-	4.36	9.26	7.74	-	Pass	
HE80	MCS0	2	138	5690	Full	0.04	0.04	-	-	2.11	9.26	7.74	-	Pass	



Test Result of 26dB & 99% Occupied Bandwidth


MIMO <Ant. 0+1>

<802.11a>

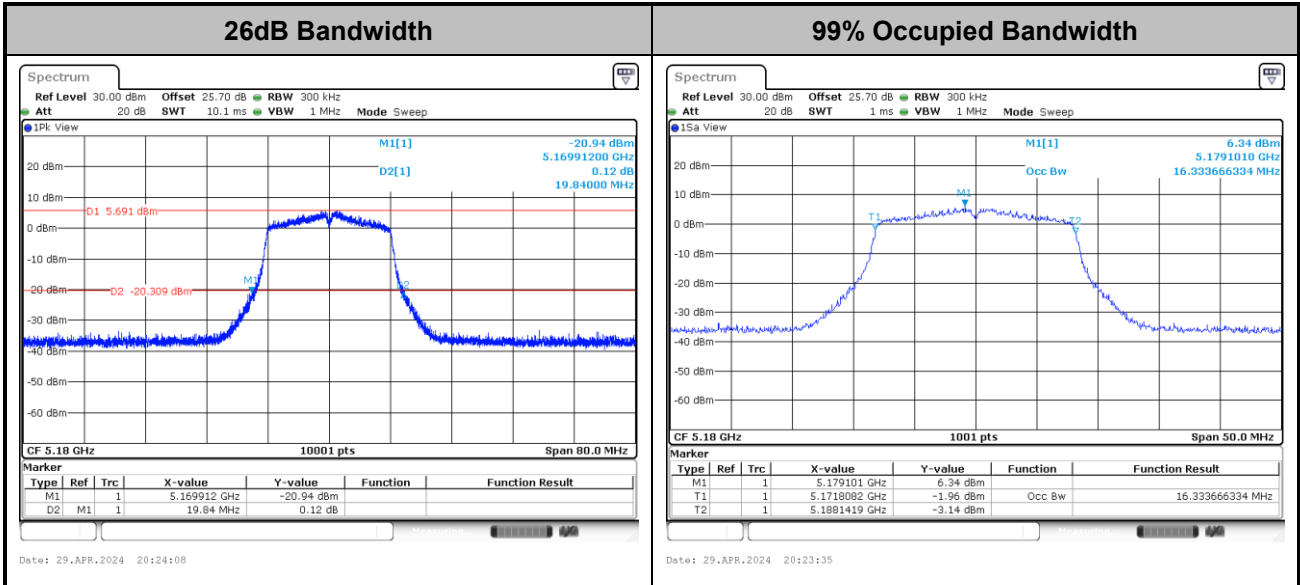

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT20>

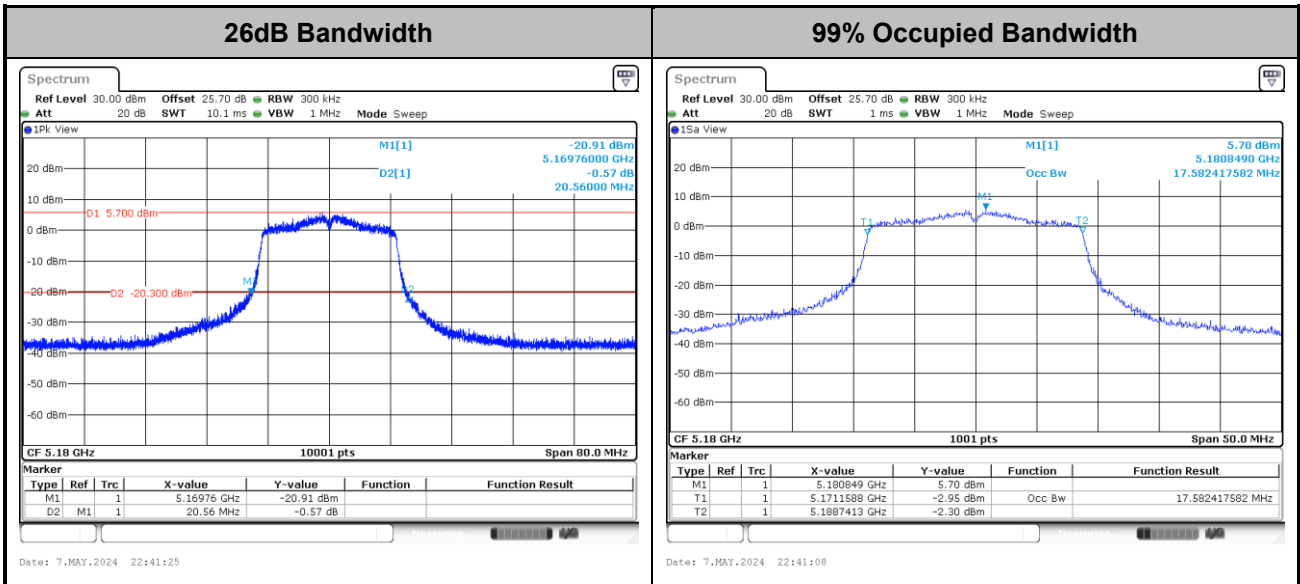

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT40>

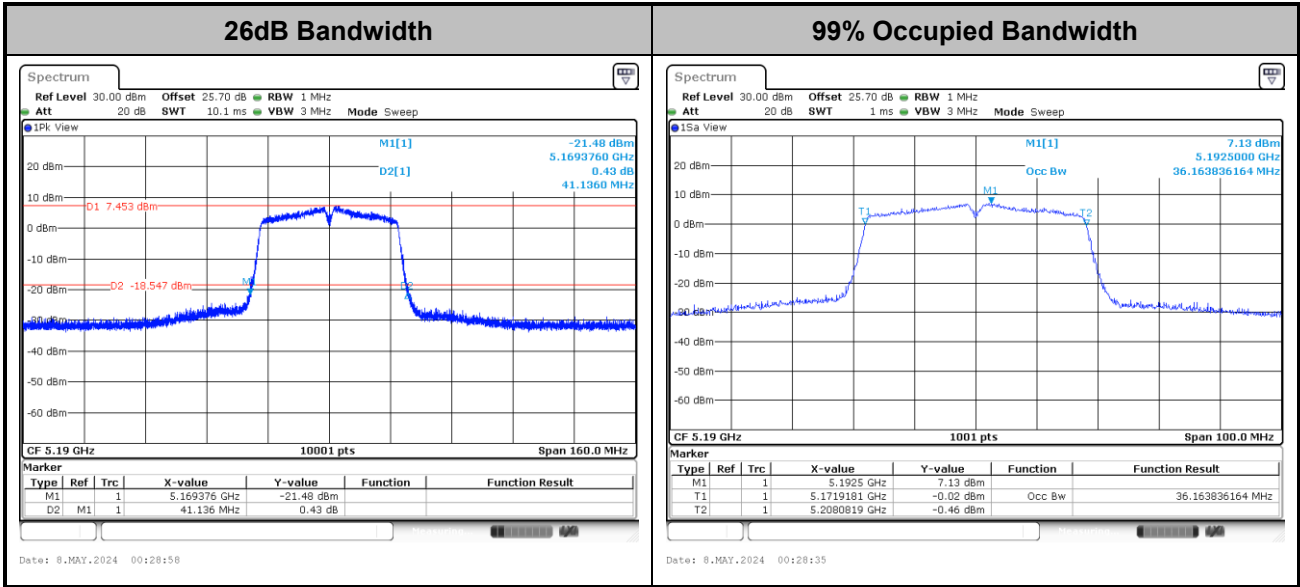

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ac VHT80>

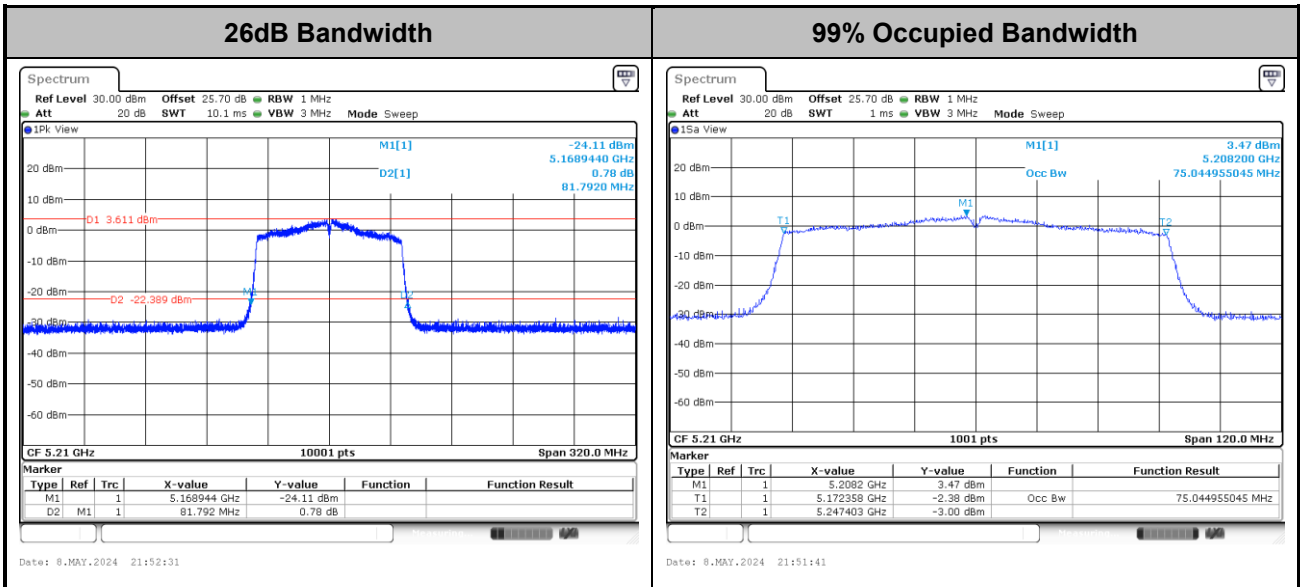

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ac VHT160>

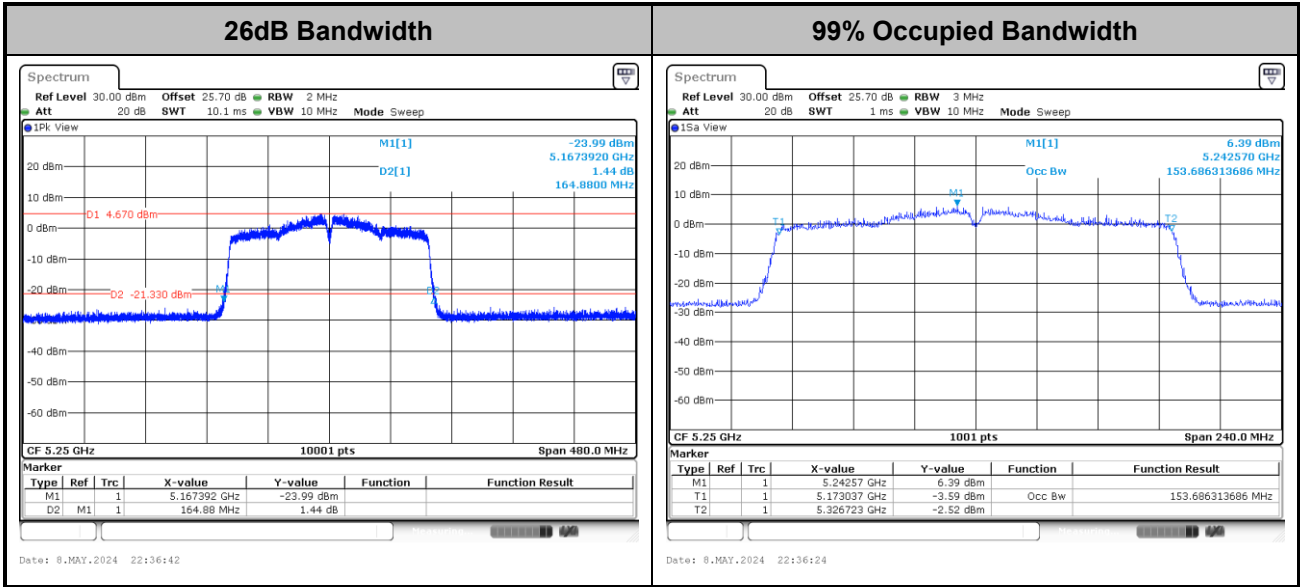

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE20>

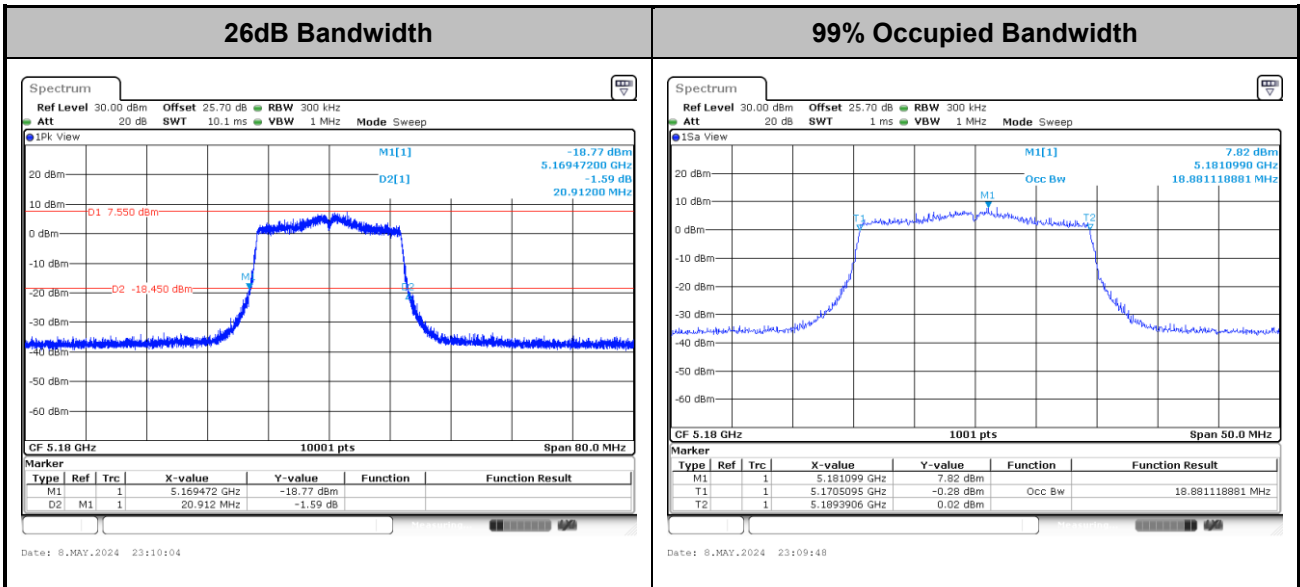

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




<802.11ax HE40>

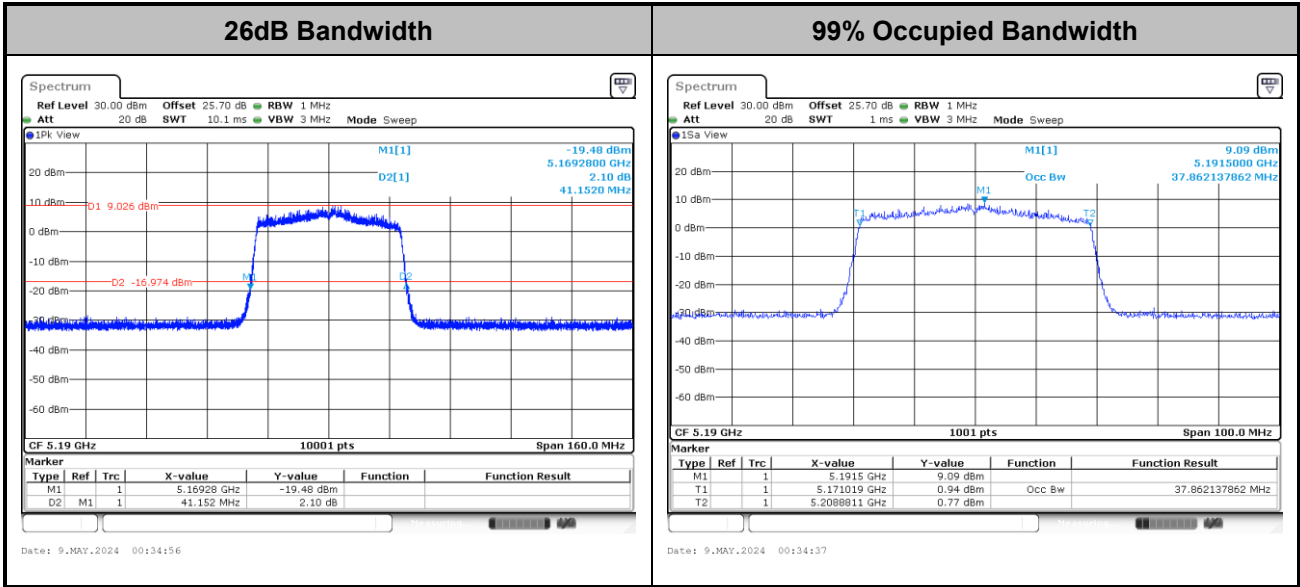

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE80>

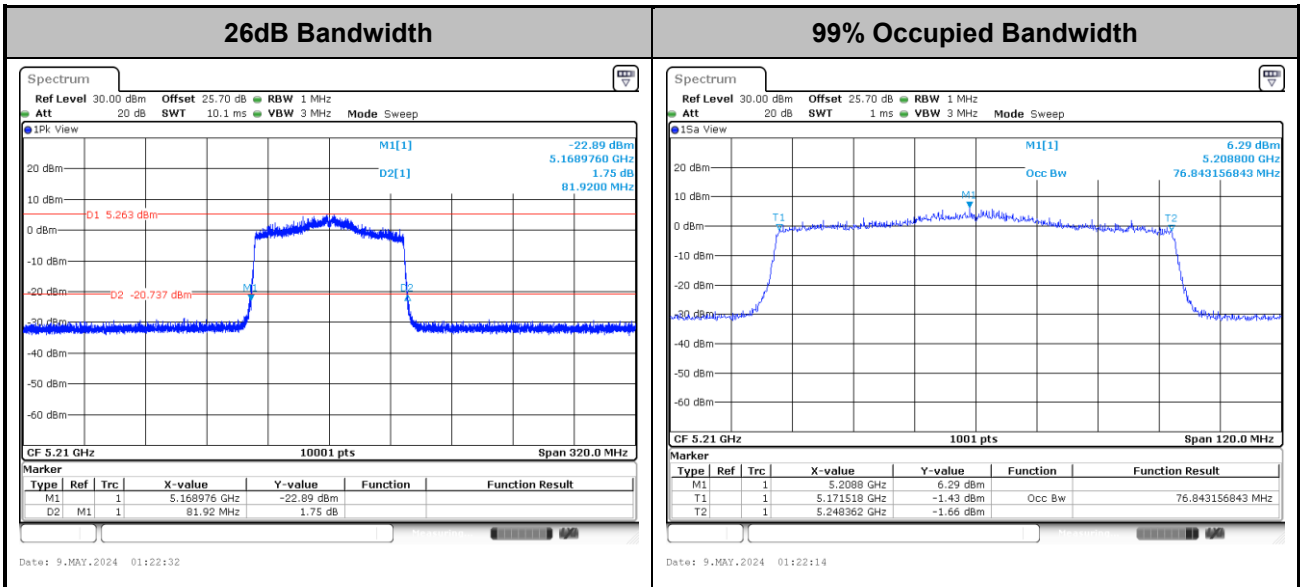

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE160>

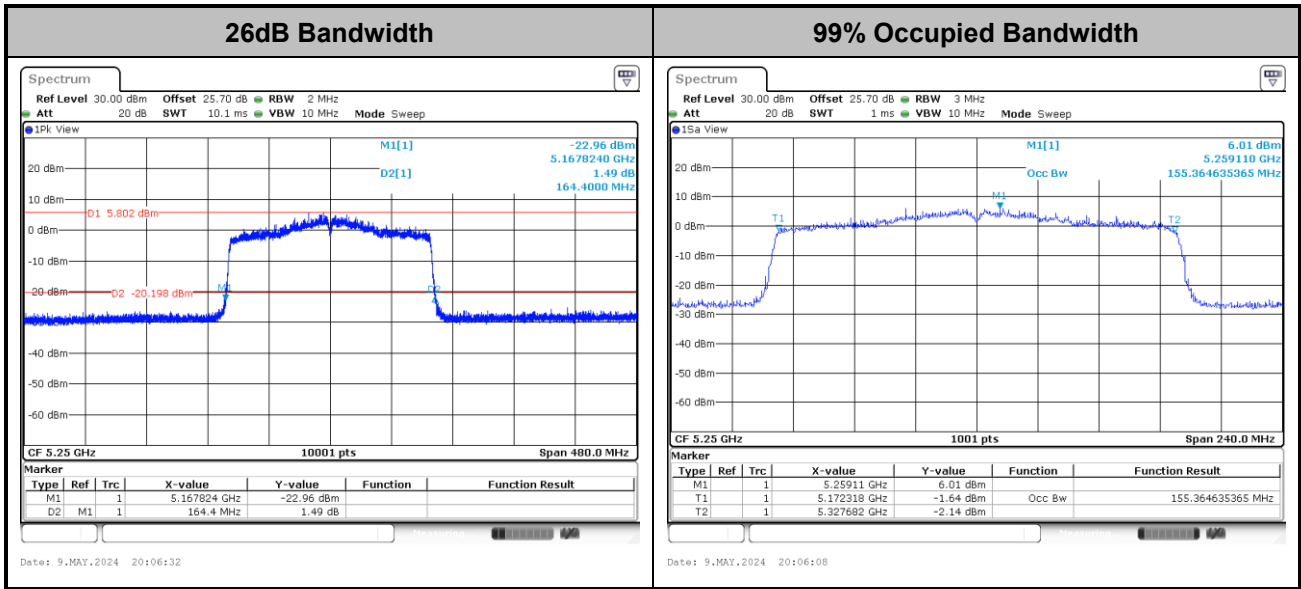


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.




Test Result of Power Spectral Density

<802.11a>

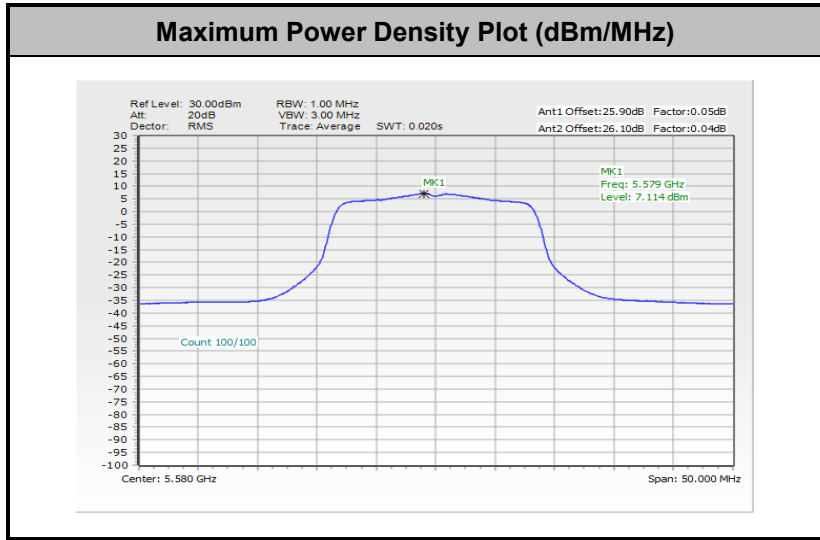


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

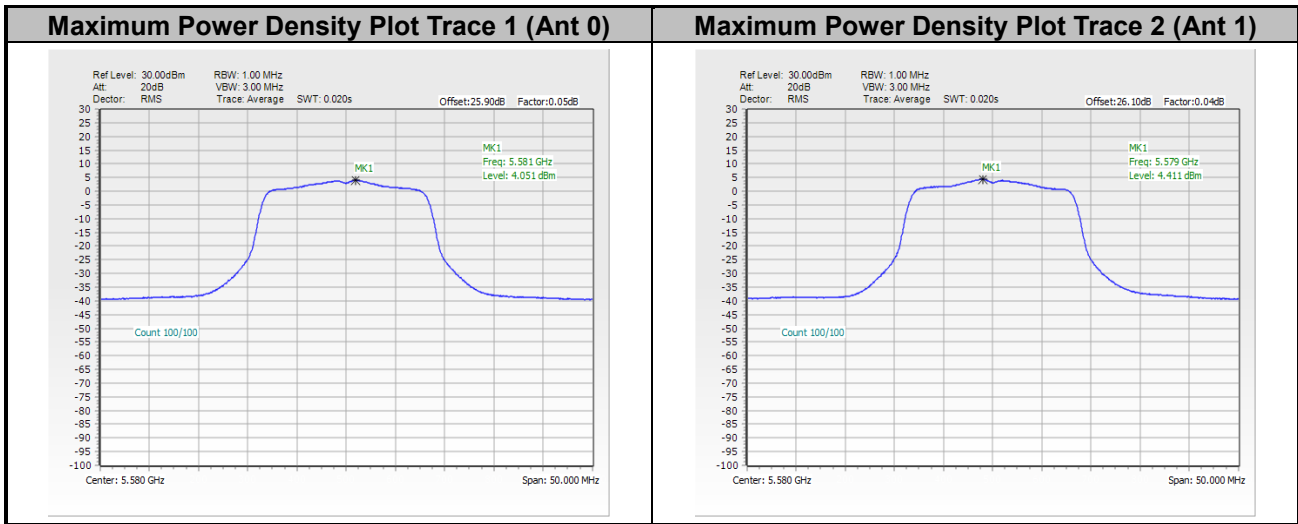




<802.11ac VHT20>

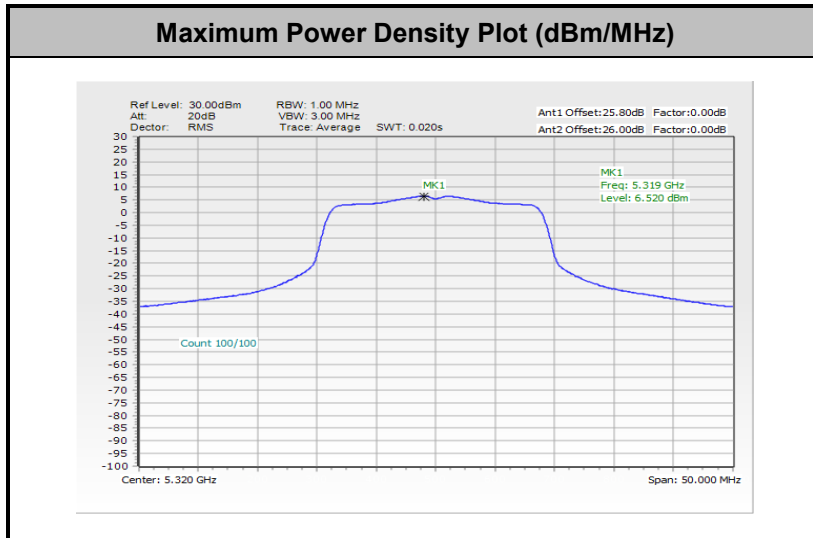


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

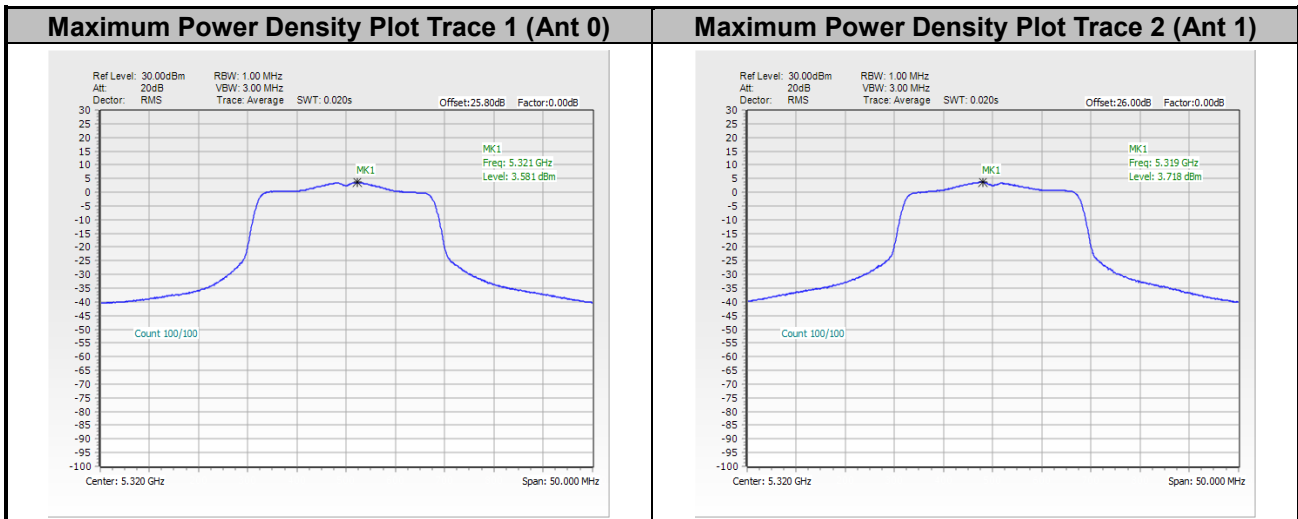




<802.11ac VHT40>

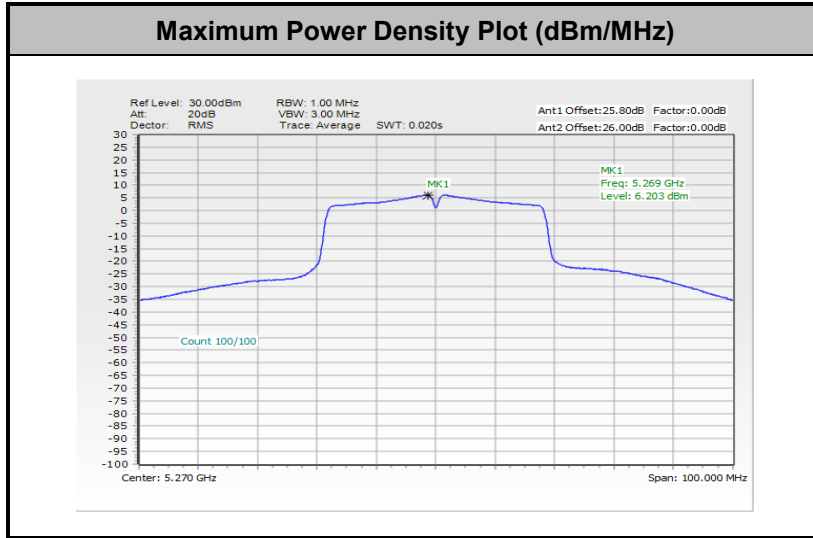


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

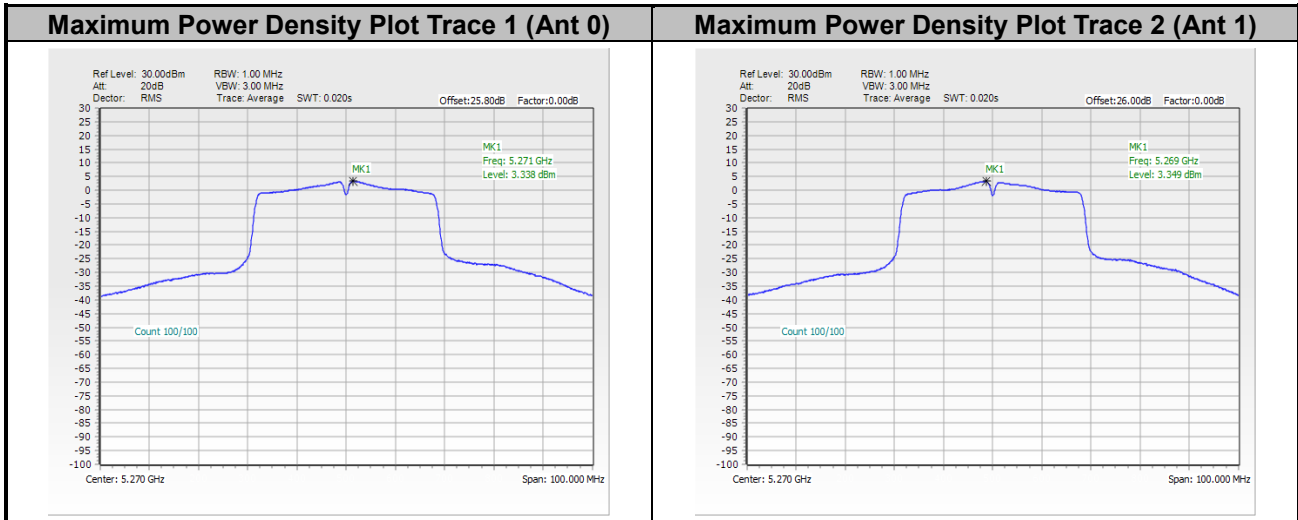




<802.11ac VHT80>

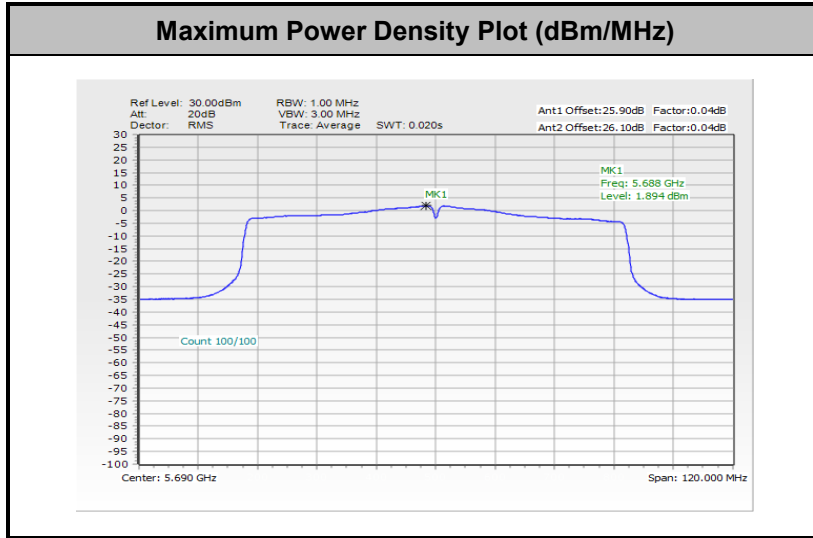


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

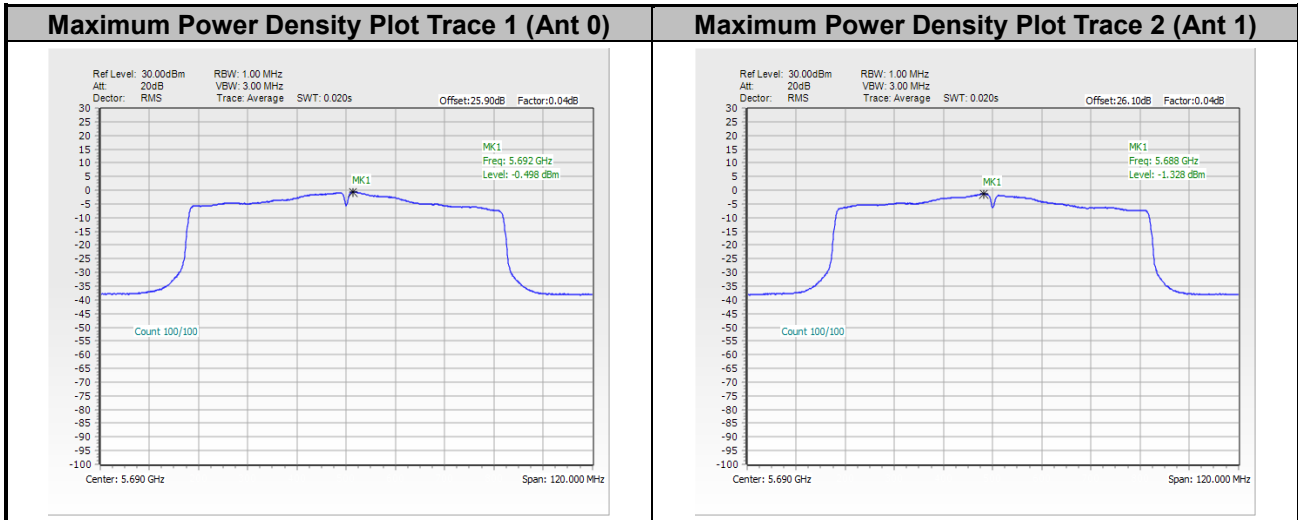




<802.11ac VHT160>

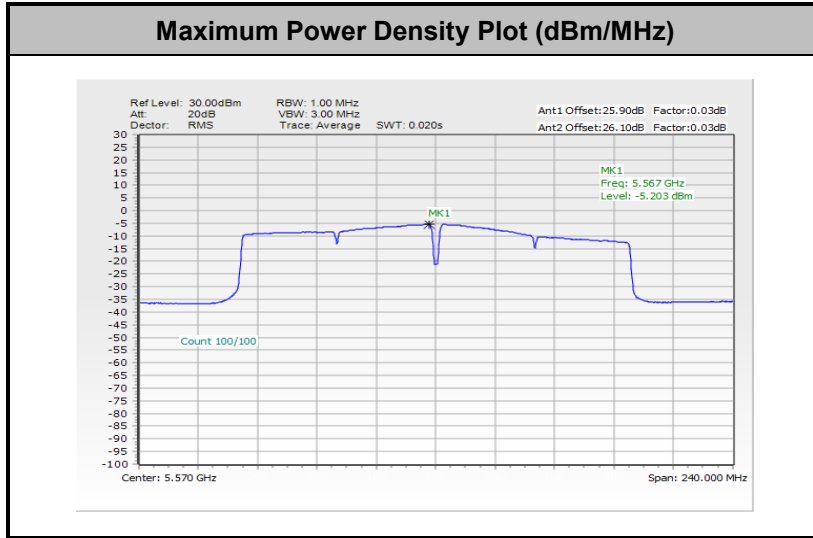


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

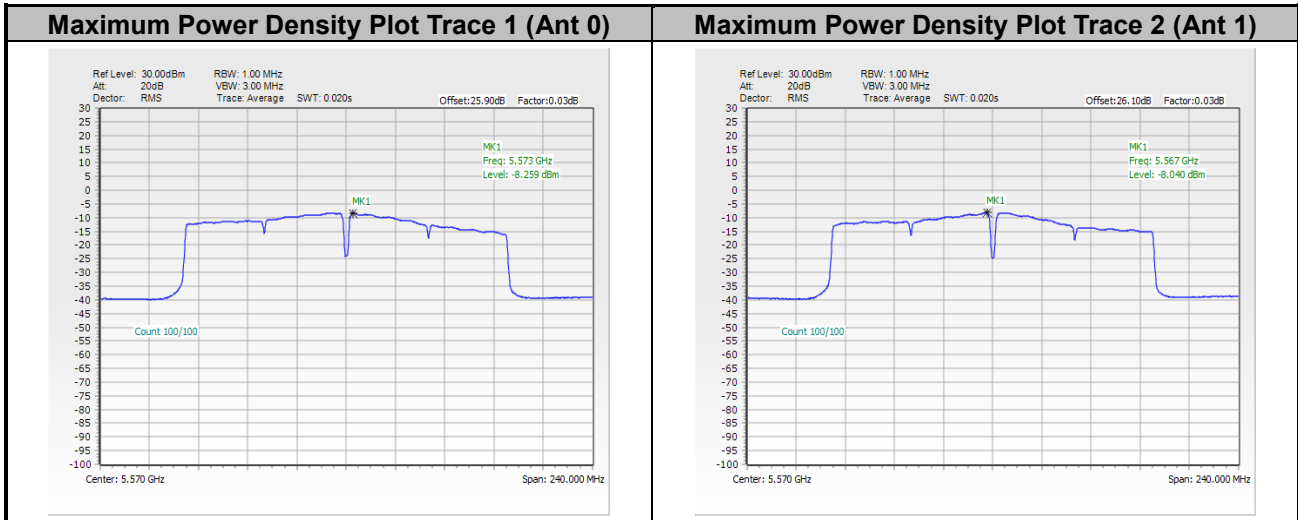




<802.11ax HE20>

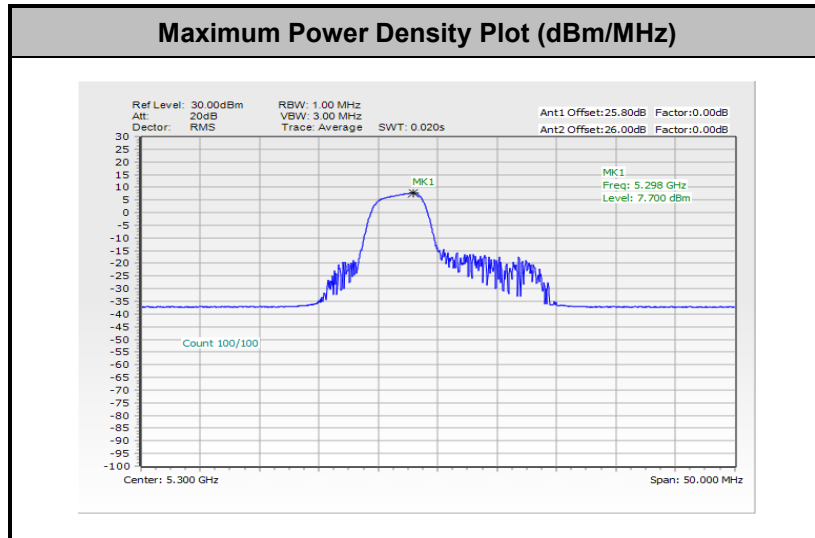


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

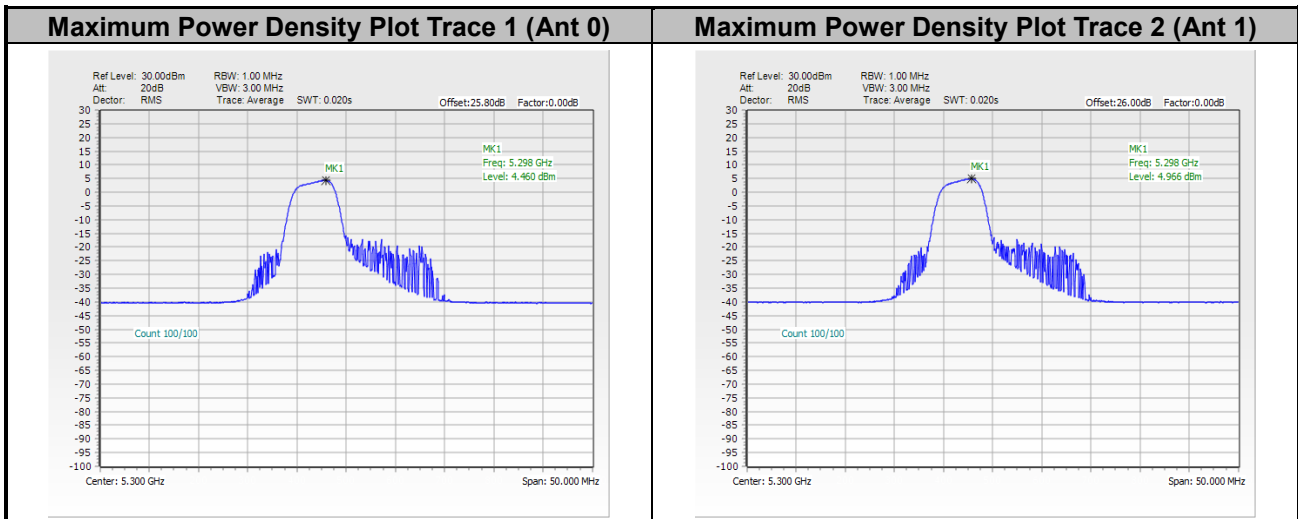




<802.11ax HE40>

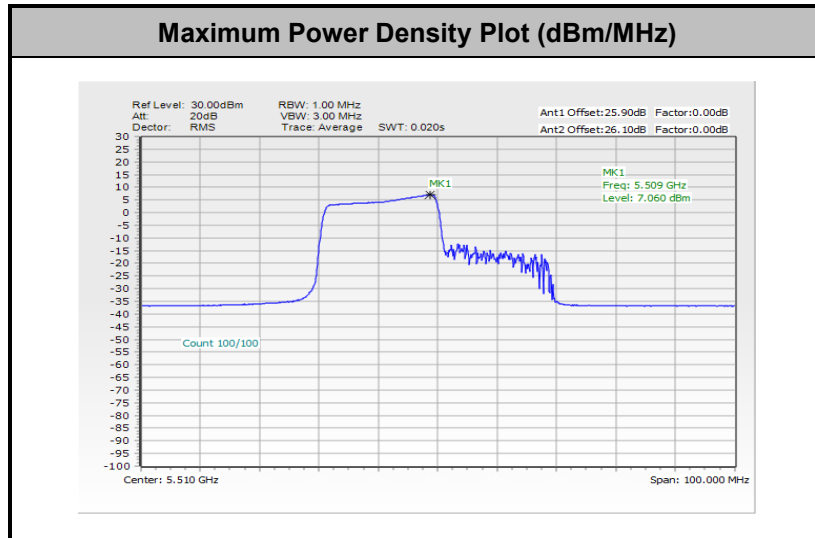


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

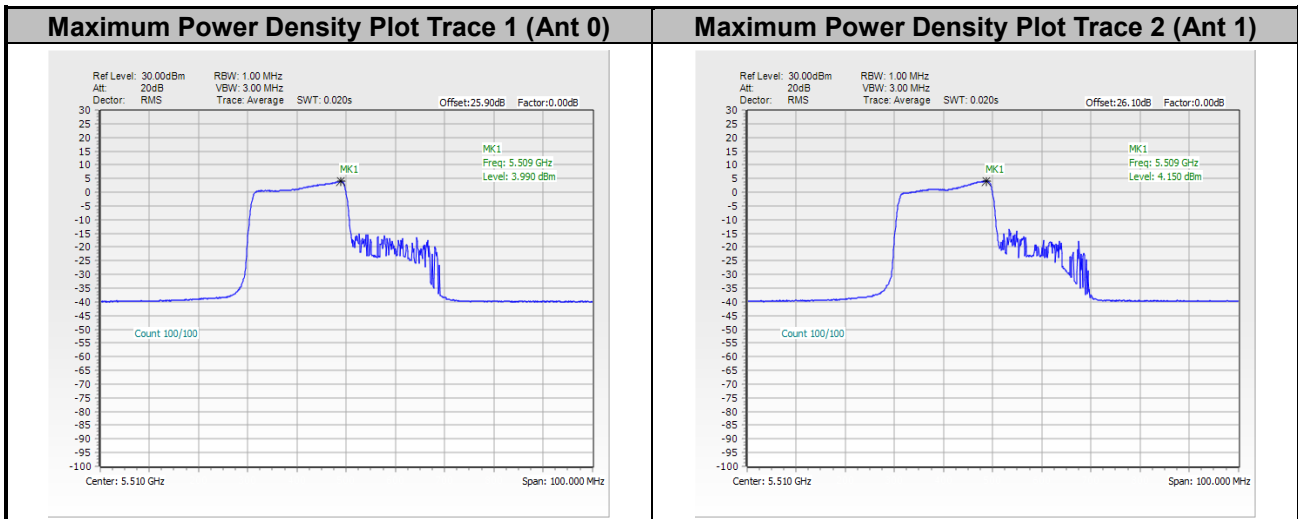




<802.11ax HE80>

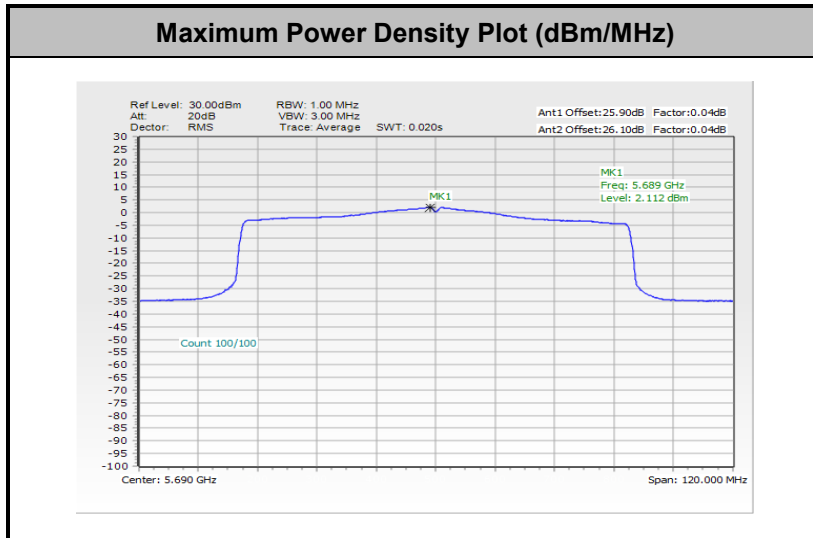


Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

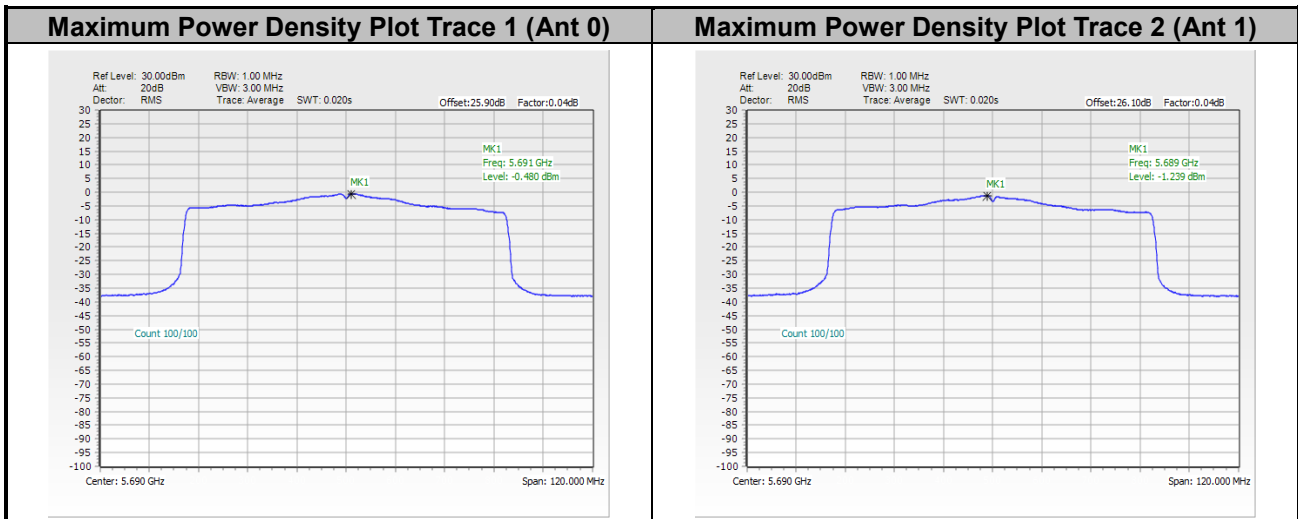




<802.11ax HE160>

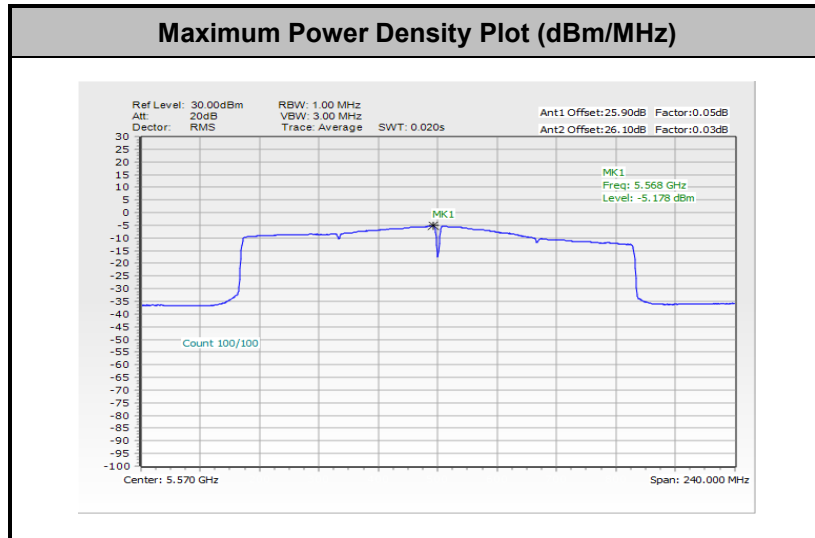

Remark: The test plot is showing a bin by bin combined result mathematically adds two traces.

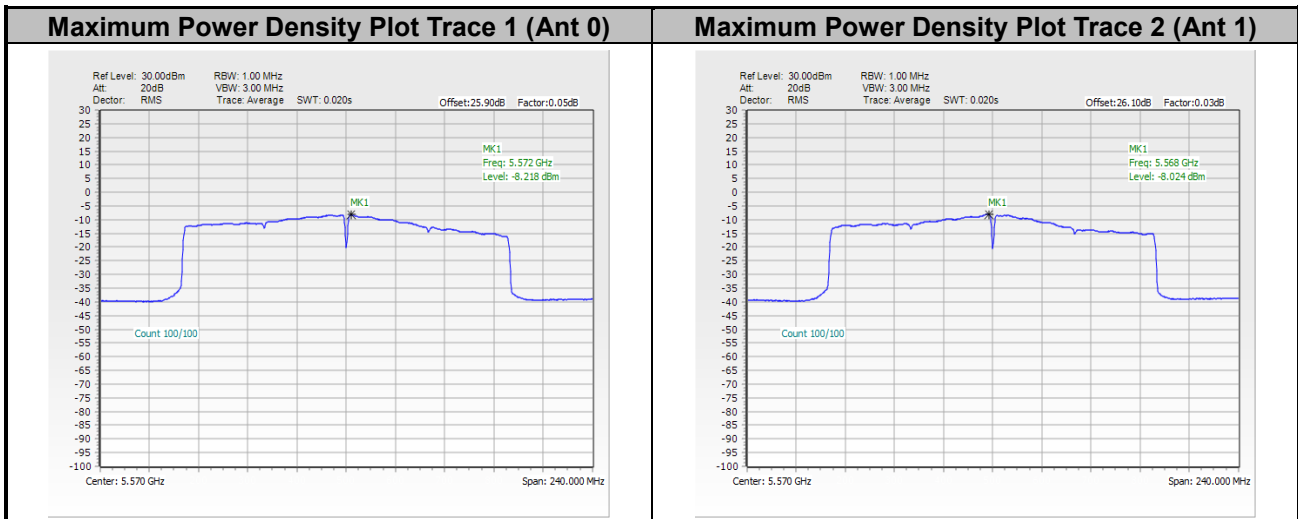




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	23.4~24.6°C
		Relative Humidity :	48.3~55.7%

EUT Information

Report NO : 413013-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Line

Full Spectrum

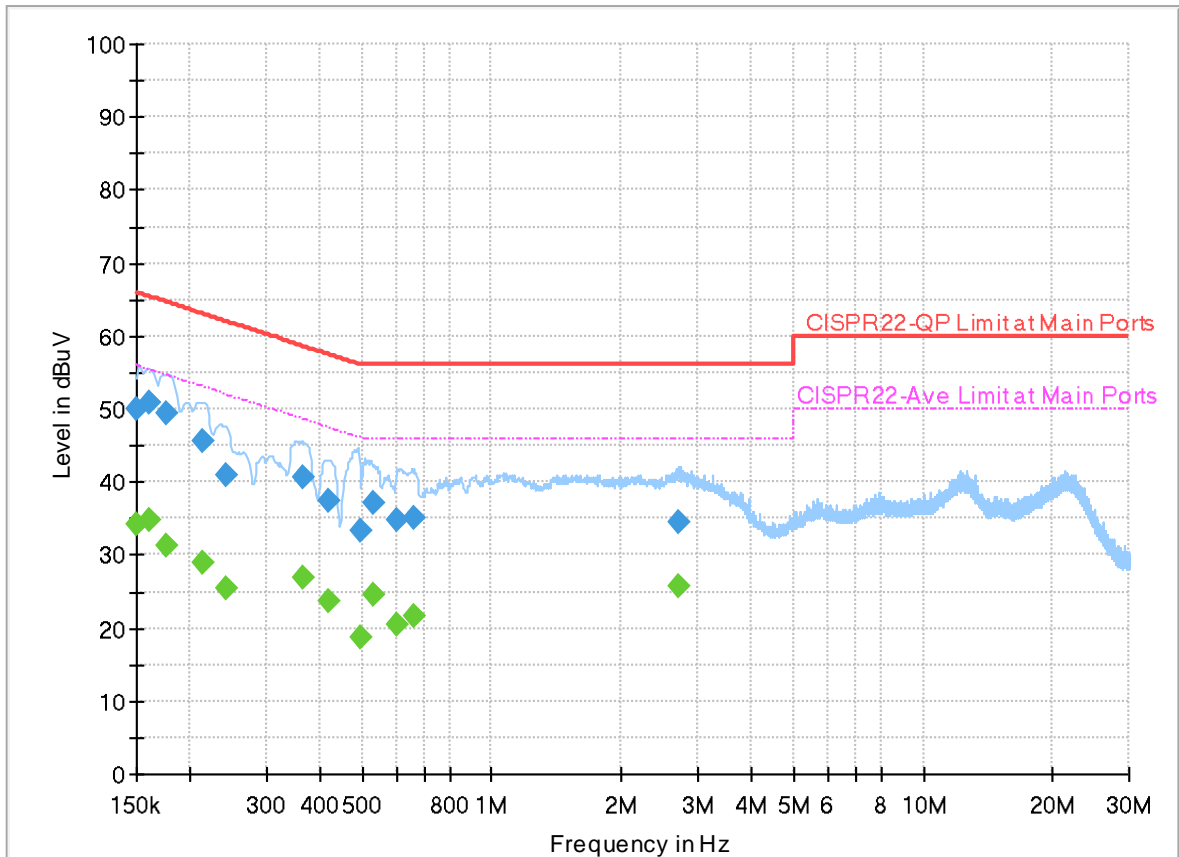

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.150000	---	34.26	56.00	21.74	L1	OFF	19.9
0.150000	50.12	---	66.00	15.88	L1	OFF	19.9
0.160800	---	34.80	55.42	20.62	L1	OFF	19.9
0.160800	50.99	---	65.42	14.43	L1	OFF	19.9
0.176820	---	31.30	54.63	23.33	L1	OFF	19.9
0.176820	49.45	---	64.63	15.18	L1	OFF	19.9
0.214350	---	28.96	53.04	24.08	L1	OFF	19.9
0.214350	45.54	---	63.04	17.50	L1	OFF	19.9
0.241440	---	25.41	52.05	26.64	L1	OFF	19.9
0.241440	40.80	---	62.05	21.25	L1	OFF	19.9
0.363390	---	26.89	48.65	21.76	L1	OFF	19.9
0.363390	40.76	---	58.65	17.89	L1	OFF	19.9
0.417750	---	23.75	47.49	23.74	L1	OFF	19.9
0.417750	37.35	---	57.49	20.14	L1	OFF	19.9
0.494250	---	18.69	46.10	27.41	L1	OFF	19.9
0.494250	33.42	---	56.10	22.68	L1	OFF	19.9
0.531510	---	24.59	46.00	21.41	L1	OFF	19.9
0.531510	37.02	---	56.00	18.98	L1	OFF	19.9
0.604140	---	20.55	46.00	25.45	L1	OFF	19.9

0.604140	34.91	---	56.00	21.09	L1	OFF	19.9
0.661380	---	21.60	46.00	24.40	L1	OFF	19.9
0.661380	35.04	---	56.00	20.96	L1	OFF	19.9
2.715000	---	25.72	46.00	20.28	L1	OFF	20.0
2.715000	34.65	---	56.00	21.35	L1	OFF	20.0

EUT Information

Report NO : 413013-01
 Test Mode : Mode 1
 Test Voltage : 120Vac/60Hz
 Phase : Neutral

Full Spectrum

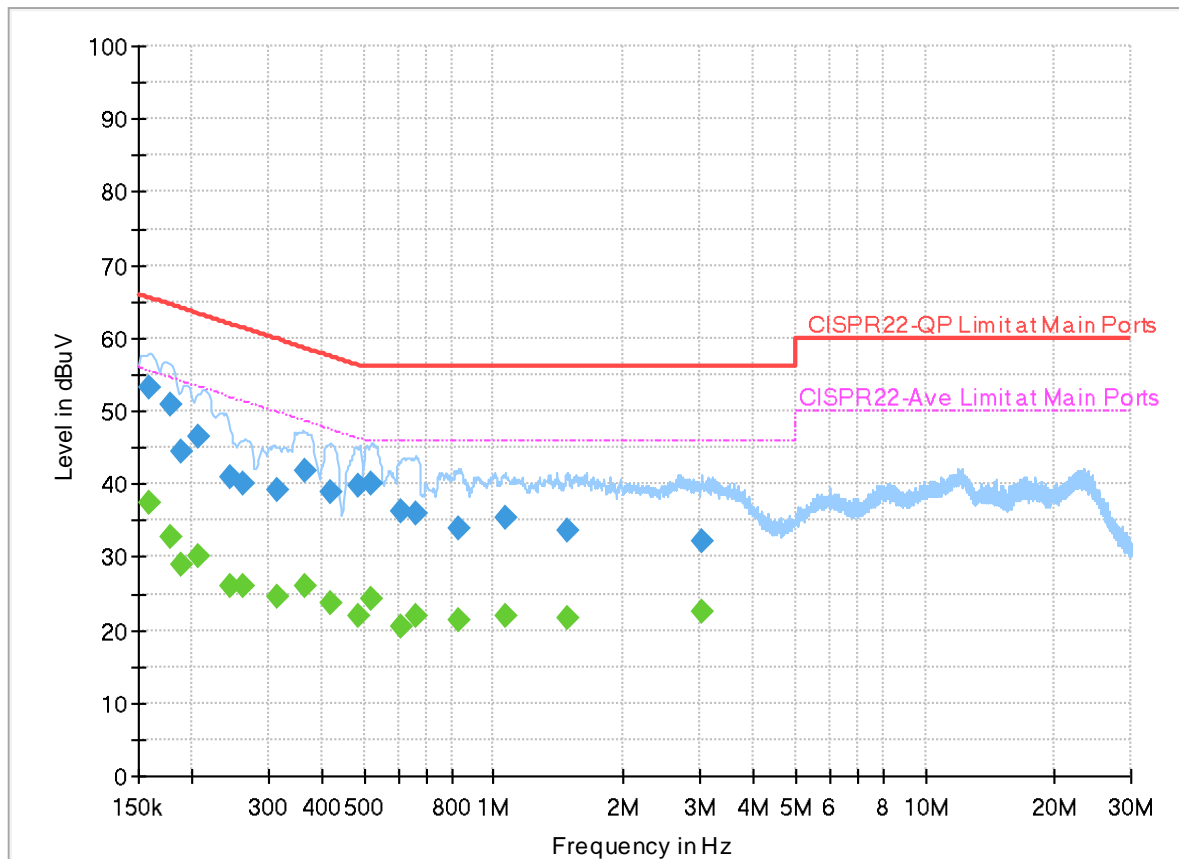

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.158280	---	37.34	55.55	18.21	N	OFF	19.9
0.158280	53.19	---	65.55	12.36	N	OFF	19.9
0.177180	---	32.72	54.62	21.90	N	OFF	19.9
0.177180	51.02	---	64.62	13.60	N	OFF	19.9
0.188250	---	28.91	54.11	25.20	N	OFF	19.9
0.188250	44.53	---	64.11	19.58	N	OFF	19.9
0.206250	---	30.26	53.36	23.10	N	OFF	19.9
0.206250	46.36	---	63.36	17.00	N	OFF	19.9
0.244500	---	26.01	51.94	25.93	N	OFF	19.9
0.244500	41.00	---	61.94	20.94	N	OFF	19.9
0.261420	---	26.01	51.39	25.38	N	OFF	19.9
0.261420	40.16	---	61.39	21.23	N	OFF	19.9
0.313260	---	24.70	49.88	25.18	N	OFF	19.9
0.313260	39.30	---	59.88	20.58	N	OFF	19.9
0.365910	---	26.04	48.59	22.55	N	OFF	19.9
0.365910	41.94	---	58.59	16.65	N	OFF	19.9
0.417750	---	23.77	47.49	23.72	N	OFF	19.9
0.417750	38.86	---	57.49	18.63	N	OFF	19.9
0.485250	---	21.90	46.25	24.35	N	OFF	19.9

0.485250	39.84	---	56.25	16.41	N	OFF	19.9
0.518370	---	24.39	46.00	21.61	N	OFF	19.9
0.518370	39.97	---	56.00	16.03	N	OFF	19.9
0.609000	---	20.35	46.00	25.65	N	OFF	19.9
0.609000	36.40	---	56.00	19.60	N	OFF	19.9
0.661290	---	21.80	46.00	24.20	N	OFF	19.9
0.661290	36.11	---	56.00	19.89	N	OFF	19.9
0.831660	---	21.27	46.00	24.73	N	OFF	19.9
0.831660	34.00	---	56.00	22.00	N	OFF	19.9
1.061250	---	21.93	46.00	24.07	N	OFF	19.9
1.061250	35.41	---	56.00	20.59	N	OFF	19.9
1.479750	---	21.57	46.00	24.43	N	OFF	19.9
1.479750	33.50	---	56.00	22.50	N	OFF	19.9
3.036840	---	22.58	46.00	23.42	N	OFF	20.0
3.036840	32.27	---	56.00	23.73	N	OFF	20.0



Appendix C. Radiated Spurious Emission

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	22.5~25.8°C
		Relative Humidity :	53.3~68.5%



<Sample 1>

Band 1 - 5150~5250MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant.	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11a CH 36 5180MHz		5119.08	51.28	-22.72	74	39.58	34.11	12.28	34.69	252	188	P	H	
		5149.76	42.65	-11.35	54	30.7	34.3	12.33	34.68	252	188	A	H	
	*	5180	107.44	-	-	95.31	34.42	12.39	34.68	252	188	P	H	
	*	5180	101.85	-	-	89.72	34.42	12.39	34.68	252	188	A	H	
													H	
														H
			5148.2	52.83	-21.17	74	40.89	34.29	12.33	34.68	216	179	P	V
			5148.98	44.75	-9.25	54	32.81	34.29	12.33	34.68	216	179	A	V
	*		5180	113.56	-	-	101.43	34.42	12.39	34.68	216	179	P	V
	*		5180	107.31	-	-	95.18	34.42	12.39	34.68	216	179	A	V
														V
														V
802.11a CH 44 5220MHz		5134.16	51.51	-22.49	74	39.69	34.2	12.31	34.69	245	184	P	H	
		5150	41.38	-12.62	54	29.42	34.3	12.34	34.68	245	184	A	H	
	*	5220	108.44	-	-	96.1	34.58	12.43	34.67	245	184	P	H	
	*	5220	103.21	-	-	90.87	34.58	12.43	34.67	245	184	A	H	
			5411.28	48.98	-25.02	74	36.33	34.72	12.57	34.64	245	184	P	H
			5458.88	40.35	-13.65	54	27.56	34.8	12.62	34.63	245	184	A	H
			5106.34	52.39	-21.61	74	40.78	34.04	12.26	34.69	135	181	P	V
			5150	42.42	-11.58	54	30.46	34.3	12.34	34.68	135	181	A	V
	*		5220	111.59	-	-	99.25	34.58	12.43	34.67	135	181	P	V
	*		5220	107.06	-	-	94.72	34.58	12.43	34.67	135	181	A	V
			5421.64	49.62	-24.38	74	36.93	34.74	12.58	34.63	135	181	P	V
			5459.44	40.43	-13.57	54	27.63	34.8	12.63	34.63	135	181	A	V



802.11a CH 48 5240MHz		5030.68	50.29	-23.71	74	38.71	34.15	12.13	34.7	261	185	P	H
		5149.76	40.98	-13.02	54	29.03	34.3	12.33	34.68	261	185	A	H
	*	5240	108.44	-	-	96	34.66	12.45	34.67	261	185	P	H
	*	5240	103.21	-	-	90.77	34.66	12.45	34.67	261	185	A	H
		5433.68	49.68	-24.32	74	36.94	34.77	12.6	34.63	261	185	P	H
		5459.44	40.39	-13.61	54	27.59	34.8	12.63	34.63	261	185	A	H
		5130	50.23	-23.77	74	38.44	34.18	12.3	34.69	301	180	P	V
		5149.24	41.27	-12.73	54	29.32	34.3	12.33	34.68	301	180	A	V
	*	5240	114.78	-	-	102.34	34.66	12.45	34.67	301	180	P	V
	*	5240	108.2	-	-	95.76	34.66	12.45	34.67	301	180	A	V
		5447.96	48.85	-25.15	74	36.07	34.8	12.61	34.63	301	180	P	V
		5350	40.41	-13.59	54	27.73	34.8	12.53	34.65	301	180	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 36 5180MHz		10360	44.63	-23.57	68.2	47.44	37.48	18.66	58.95	-	-	P	H
		15540	47.15	-26.85	74	40.5	40.18	22.73	56.26	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10360	44.43	-23.77	68.2	47.24	37.48	18.66	58.95	-	-	P
		15540	47.17	-26.83	74	40.52	40.18	22.73	56.26	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 44 5220MHz		10440	45.1	-23.1	68.2	47.85	37.4	18.71	58.86	-	-	P	H
		15660	47.88	-26.12	74	40.77	40.58	22.84	56.31	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10440	44.91	-23.29	68.2	47.66	37.4	18.71	58.86	-	-	P
		15660	47.48	-26.52	74	40.37	40.58	22.84	56.31	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 48 5240MHz		10480	44.96	-23.24	68.2	47.58	37.46	18.74	58.82	-	-	P	H
		15720	48.46	-25.54	74	40.97	40.94	22.88	56.33	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10480	45.05	-23.15	68.2	47.67	37.46	18.74	58.82	-	-	P
		15720	49.03	-24.97	74	41.54	40.94	22.88	56.33	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 36 5180MHz		5049.66	50.69	-23.31	74	39.23	34	12.16	34.7	269	184	P	H	
		5150	42.74	-11.26	54	30.78	34.3	12.34	34.68	269	184	A	H	
	*	5180	109.29	-	-	97.16	34.42	12.39	34.68	269	184	P	H	
	*	5180	103.43	-	-	91.3	34.42	12.39	34.68	269	184	A	H	
													H	
													H	
			5149.24	53	-21	74	41.05	34.3	12.33	34.68	262	180	P	V
			5148.2	45.4	-8.6	54	33.46	34.29	12.33	34.68	262	180	A	V
		*	5180	114.2	-	-	102.07	34.42	12.39	34.68	262	180	P	V
		*	5180	107.81	-	-	95.68	34.42	12.39	34.68	262	180	A	V
													V	
													V	
802.11ac VHT20 CH 44 5220MHz		5109.2	49.95	-24.05	74	38.31	34.06	12.27	34.69	245	185	P	H	
		5149.76	41.41	-12.59	54	29.46	34.3	12.33	34.68	245	185	A	H	
		*	5220	108.16	-	-	95.82	34.58	12.43	34.67	245	185	P	H
		*	5220	103.63	-	-	91.29	34.58	12.43	34.67	245	185	A	H
			5433.68	50.36	-23.64	74	37.62	34.77	12.6	34.63	245	185	P	H
			5459.72	40.4	-13.6	54	27.6	34.8	12.63	34.63	245	185	A	H
			5119.6	51.47	-22.53	74	39.76	34.12	12.28	34.69	256	178	P	V
			5150	42.23	-11.77	54	30.27	34.3	12.34	34.68	256	178	A	V
		*	5220	113.67	-	-	101.33	34.58	12.43	34.67	256	178	P	V
		*	5220	108.33	-	-	95.99	34.58	12.43	34.67	256	178	A	V
		5354.16	51.11	-22.89	74	38.44	34.79	12.53	34.65	256	178	P	V	
		5458.32	40.46	-13.54	54	27.67	34.8	12.62	34.63	256	178	A	V	



802.11ac VHT20 CH 48 5240MHz		5102.7	51.47	-22.53	74	39.89	34.02	12.25	34.69	243	187	P	H
		5149.76	41.09	-12.91	54	29.14	34.3	12.33	34.68	243	187	A	H
	*	5240	110.63	-	-	98.19	34.66	12.45	34.67	243	187	P	H
	*	5240	103.3	-	-	90.86	34.66	12.45	34.67	243	187	A	H
		5398.4	49.24	-24.76	74	36.62	34.7	12.56	34.64	243	187	P	H
		5458.32	40.4	-13.6	54	27.61	34.8	12.62	34.63	243	187	A	H
		5103.74	50.39	-23.61	74	38.8	34.02	12.26	34.69	303	179	P	V
		5149.76	41.32	-12.68	54	29.37	34.3	12.33	34.68	303	179	A	V
	*	5240	115.89	-	-	103.45	34.66	12.45	34.67	303	179	P	V
	*	5240	108.48	-	-	96.04	34.66	12.45	34.67	303	179	A	V
		5458.32	48.98	-25.02	74	36.19	34.8	12.62	34.63	303	179	P	V
		5458.32	40.42	-13.58	54	27.63	34.8	12.62	34.63	303	179	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 36 5180MHz		10360	44.77	-23.43	68.2	47.58	37.48	18.66	58.95	-	-	P	H	
		15540	47.55	-26.45	74	40.9	40.18	22.73	56.26	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10360	44.48	-23.72	68.2	47.29	37.48	18.66	58.95	-	-	P	V
			15540	47.32	-26.68	74	40.67	40.18	22.73	56.26	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 44 5220MHz		10440	46.73	-21.47	68.2	49.48	37.4	18.71	58.86	-	-	P	H	
		15660	48.17	-25.83	74	41.06	40.58	22.84	56.31	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10440	44.95	-23.25	68.2	47.7	37.4	18.71	58.86	-	-	P	V
			15660	48.34	-25.66	74	41.23	40.58	22.84	56.31	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 48 5240MHz		10480	45.46	-22.74	68.2	48.08	37.46	18.74	58.82	-	-	P	H
		15720	49.65	-24.35	74	42.16	40.94	22.88	56.33	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	5240MHz		10480	45.34	-22.86	68.2	47.96	37.46	18.74	58.82	-	-	P
		15720	49.74	-24.26	74	42.25	40.94	22.88	56.33	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 38 5190MHz		5148.2	53.5	-20.5	74	41.56	34.29	12.33	34.68	253	193	P	H
		5148.46	44.29	-9.71	54	32.35	34.29	12.33	34.68	253	193	A	H
	*	5190	104.52	-	-	92.34	34.46	12.4	34.68	253	193	P	H
	*	5190	97.92	-	-	85.74	34.46	12.4	34.68	253	193	A	H
		5417.16	49.92	-24.08	74	37.24	34.73	12.58	34.63	253	193	P	H
		5455.52	40.81	-13.19	54	28.02	34.8	12.62	34.63	253	193	A	H
		5147.42	56.96	-17.04	74	45.03	34.28	12.33	34.68	100	184	P	V
		5146.9	47.89	-6.11	54	35.96	34.28	12.33	34.68	100	184	A	V
	*	5190	109.48	-	-	97.3	34.46	12.4	34.68	100	184	P	V
	*	5190	102.73	-	-	90.55	34.46	12.4	34.68	100	184	A	V
		5373.48	49.03	-24.97	74	36.38	34.75	12.54	34.64	100	184	P	V
		5350.52	40.62	-13.38	54	27.94	34.8	12.53	34.65	100	184	A	V
802.11ac VHT40 CH 46 5230MHz		5142.74	51.67	-22.33	74	39.77	34.26	12.32	34.68	221	186	P	H
		5150	43.62	-10.38	54	31.66	34.3	12.34	34.68	221	186	A	H
	*	5230	110.94	-	-	98.55	34.62	12.44	34.67	221	186	P	H
	*	5230	103.37	-	-	90.98	34.62	12.44	34.67	221	186	A	H
		5409.88	50.19	-23.81	74	37.54	34.72	12.57	34.64	221	186	P	H
		5351.36	41.71	-12.29	54	29.03	34.8	12.53	34.65	221	186	A	H
		5148.2	53.91	-20.09	74	41.97	34.29	12.33	34.68	303	182	P	V
		5148.2	44.54	-9.46	54	32.6	34.29	12.33	34.68	303	182	A	V
	*	5230	114.05	-	-	101.66	34.62	12.44	34.67	303	182	P	V
	*	5230	108.3	-	-	95.91	34.62	12.44	34.67	303	182	A	V
	5438.16	51.29	-22.71	74	38.54	34.78	12.6	34.63	303	182	P	V	
	5350	42.4	-11.6	54	29.72	34.8	12.53	34.65	303	182	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 38 5190MHz		10380	45.79	-22.41	68.2	48.61	37.44	18.67	58.93	-	-	P	H	
		15570	48.72	-25.28	74	41.95	40.28	22.76	56.27	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10380	43.94	-24.26	68.2	46.76	37.44	18.67	58.93	-	-	P	V
			15570	48.24	-25.76	74	41.47	40.28	22.76	56.27	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 46 5230MHz		10460	45.25	-22.95	68.2	47.94	37.42	18.73	58.84	-	-	P	H
		15690	49.12	-24.88	74	41.76	40.82	22.86	56.32	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10460	46.03	-22.17	68.2	48.72	37.42	18.73	58.84	-	-	P
		15690	48.07	-25.93	74	40.71	40.82	22.86	56.32	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 42 5210MHz		5131.04	51.2	-22.8	74	39.4	34.19	12.3	34.69	272	193	P	H
		5148.98	42.61	-11.39	54	30.67	34.29	12.33	34.68	272	193	A	H
	*	5210	100.35	-	-	88.05	34.54	12.43	34.67	272	193	P	H
	*	5210	93.74	-	-	81.44	34.54	12.43	34.67	272	193	A	H
		5358.64	50.19	-23.81	74	37.53	34.78	12.53	34.65	272	193	P	H
		5456.92	40.32	-13.68	54	27.53	34.8	12.62	34.63	272	193	A	H
		5139.62	54.56	-19.44	74	42.68	34.24	12.32	34.68	157	182	P	V
		5147.94	46	-8	54	34.06	34.29	12.33	34.68	157	182	A	V
	*	5210	105.02	-	-	92.72	34.54	12.43	34.67	157	182	P	V
	*	5210	98.84	-	-	86.54	34.54	12.43	34.67	157	182	A	V
		5422.76	50.24	-23.76	74	37.53	34.75	12.59	34.63	157	182	P	V
	5350	40.83	-13.17	54	28.15	34.8	12.53	34.65	157	182	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 42 5210MHz		10420	45.29	-22.91	68.2	48.07	37.4	18.7	58.88	-	-	P	H	
		15630	47.72	-26.28	74	40.75	40.46	22.8	56.29	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10420	44.78	-23.42	68.2	47.56	37.4	18.7	58.88	-	-	P	V
			15630	48.12	-25.88	74	41.15	40.46	22.8	56.29	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



**Band 1 5150~5250MHz
WIFI 802.11ac VHT160 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT160 CH 50 5250MHz		5134.05	52.12	-21.88	74	40.3	34.2	12.31	34.69	266	192	P	H
		5128.45	42.23	-11.77	54	30.45	34.17	12.3	34.69	266	192	A	H
	*	5250	98.2	-	-	85.72	34.7	12.45	34.67	266	192	P	H
	*	5250	90.91	-	-	78.43	34.7	12.45	34.67	266	192	A	H
		5378.88	55.64	-18.36	74	42.99	34.74	12.55	34.64	266	192	P	H
		5378.64	45.93	-8.07	54	33.28	34.74	12.55	34.64	266	192	A	H
		5092.4	53.47	-20.53	74	41.92	34	12.24	34.69	100	192	P	V
		5122.5	44.41	-9.59	54	32.68	34.13	12.29	34.69	100	192	A	V
	*	5250	99.61	-	-	87.13	34.7	12.45	34.67	100	192	P	V
	*	5250	92.82	-	-	80.34	34.7	12.45	34.67	100	192	A	V
		5393.04	56.78	-17.22	74	44.15	34.71	12.56	34.64	100	192	P	V
		5373.36	47.61	-6.39	54	34.96	34.75	12.54	34.64	100	192	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ac VHT160 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT160 CH 50 5250MHz		10500	45.52	-22.68	68.2	48.07	37.5	18.75	58.8	-	-	P	H	
		15750	48.62	-25.38	74	41.07	41	22.9	56.35	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10500	44.94	-23.26	68.2	47.49	37.5	18.75	58.8	-	-	P	V
			15750	49.13	-24.87	74	41.58	41	22.9	56.35	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 1 - 5150~5250MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 36 5180MHz		5117.26	52	-22	74	40.31	34.1	12.28	34.69	266	186	P	H	
		5150	43.18	-10.82	54	31.22	34.3	12.34	34.68	266	186	A	H	
	*	5180	109.83	-	-	97.7	34.42	12.39	34.68	266	186	P	H	
	*	5180	103.26	-	-	91.13	34.42	12.39	34.68	266	186	A	H	
													H	
														H
			5149.24	53.57	-20.43	74	41.62	34.3	12.33	34.68	258	179	P	V
			5148.46	45.13	-8.87	54	33.19	34.29	12.33	34.68	258	179	A	V
		*	5180	113.79	-	-	101.66	34.42	12.39	34.68	258	179	P	V
		*	5180	107.62	-	-	95.49	34.42	12.39	34.68	258	179	A	V
													V	
													V	
802.11ax HE20 Full CH 44 5220MHz		5079.82	50.29	-23.71	74	38.77	34	12.22	34.7	263	184	P	H	
		5150	41.05	-12.95	54	29.09	34.3	12.34	34.68	263	184	A	H	
		*	5220	109.22	-	-	96.88	34.58	12.43	34.67	263	184	P	H
		*	5220	103.43	-	-	91.09	34.58	12.43	34.67	263	184	A	H
			5445.16	49.36	-24.64	74	36.59	34.79	12.61	34.63	263	184	P	H
			5460	40.31	-13.69	54	27.51	34.8	12.63	34.63	263	184	A	H
			5149.5	50.15	-23.85	74	38.2	34.3	12.33	34.68	256	179	P	V
			5150	41.98	-12.02	54	30.02	34.3	12.34	34.68	256	179	A	V
		*	5220	115.53	-	-	103.19	34.58	12.43	34.67	256	179	P	V
		*	5220	107.82	-	-	95.48	34.58	12.43	34.67	256	179	A	V
		5423.88	48.54	-25.46	74	35.83	34.75	12.59	34.63	256	179	P	V	
		5459.72	40.4	-13.6	54	27.6	34.8	12.63	34.63	256	179	A	V	



802.11ax HE20 Full CH 48 5240MHz		5125.06	49.93	-24.07	74	38.18	34.15	12.29	34.69	262	184	P	H
		5148.72	40.87	-13.13	54	28.93	34.29	12.33	34.68	262	184	A	H
	*	5240	110.31	-	-	97.87	34.66	12.45	34.67	262	184	P	H
	*	5240	103.69	-	-	91.25	34.66	12.45	34.67	262	184	A	H
		5369	48.96	-25.04	74	36.3	34.76	12.54	34.64	262	184	P	H
		5459.44	40.29	-13.71	54	27.49	34.8	12.63	34.63	262	184	A	H
		5106.34	50.94	-23.06	74	39.33	34.04	12.26	34.69	255	179	P	V
		5149.76	41.36	-12.64	54	29.41	34.3	12.33	34.68	255	179	A	V
	*	5240	115.06	-	-	102.62	34.66	12.45	34.67	255	179	P	V
	*	5240	107.88	-	-	95.44	34.66	12.45	34.67	255	179	A	V
		5459.16	50.21	-23.79	74	37.41	34.8	12.63	34.63	255	179	P	V
		5350	40.41	-13.59	54	27.73	34.8	12.53	34.65	255	179	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 36 5180MHz		10360	44.21	-23.99	68.2	47.02	37.48	18.66	58.95	-	-	P	H
		15540	47.64	-26.36	74	40.99	40.18	22.73	56.26	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10360	45.58	-22.62	68.2	48.39	37.48	18.66	58.95	-	-	P
		15540	47.46	-26.54	74	40.81	40.18	22.73	56.26	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 44 5220MHz		10440	44.71	-23.49	68.2	47.46	37.4	18.71	58.86	-	-	P	H	
		15660	48.84	-25.16	74	41.73	40.58	22.84	56.31	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10440	45.16	-23.04	68.2	47.91	37.4	18.71	58.86	-	-	P	V
			15660	47.94	-26.06	74	40.83	40.58	22.84	56.31	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 48 5240MHz		10480	45.19	-23.01	68.2	47.81	37.46	18.74	58.82	-	-	P	H
		15720	49.24	-24.76	74	41.75	40.94	22.88	56.33	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	CH 48 5240MHz		10480	44.64	-23.56	68.2	47.26	37.46	18.74	58.82	-	-	P
		15720	49.38	-24.62	74	41.89	40.94	22.88	56.33	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



**Band 1 5150~5250MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/0 CH 36 5180MHz		5091.26	50.04	-23.96	74	38.49	34	12.24	34.69	223	183	P	H	
		5138.06	41.29	-12.71	54	29.44	34.23	12.31	34.69	223	183	A	H	
	*	5180	106.51	-	-	94.38	34.42	12.39	34.68	223	183	P	H	
	*	5180	100.78	-	-	88.65	34.42	12.39	34.68	223	183	A	H	
													H	
														H
			5138.06	52.38	-21.62	74	40.53	34.23	12.31	34.69	310	172	P	V
			5137.8	42.56	-11.44	54	30.71	34.23	12.31	34.69	310	172	A	V
	*		5180	108.7	-	-	96.57	34.42	12.39	34.68	310	172	P	V
	*		5180	103.62	-	-	91.49	34.42	12.39	34.68	310	172	A	V
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 1 5150~5250MHz

WIFI 802.11ax HE20 Partial 26 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/0 CH 36 5180MHz		10360	43.83	-24.37	68.2	46.58	37.48	18.66	58.89	-	-	P	H	
		15540	46.68	-27.32	74	40.34	40.18	22.73	56.57	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10360	43.2	-25	68.2	45.95	37.48	18.66	58.89	-	-	P	V
			15540	47.04	-26.96	74	40.7	40.18	22.73	56.57	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/4 CH 48 5220MHz		10480	43.86	-24.34	68.2	46.34	37.46	18.74	58.68	-	-	P	H	
		15720	46.66	-27.34	74	39.21	40.94	22.88	56.37	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10480	44.81	-23.39	68.2	47.29	37.46	18.74	58.68	-	-	P	V
			15720	46.03	-27.97	74	38.58	40.94	22.88	56.37	-	-	P	V
														V
														V
														V
														V
														V
														V
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 1 5150~5250MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 52/37 CH 36 5180MHz		5087.88	50.54	-23.46	74	39	34	12.23	34.69	223	181	P	H	
		5148.2	41.75	-12.25	54	29.81	34.29	12.33	34.68	223	181	A	H	
	*	5180	107.26	-	-	95.13	34.42	12.39	34.68	223	181	P	H	
	*	5180	100.95	-	-	88.82	34.42	12.39	34.68	223	181	A	H	
													H	
														H
			5141.7	52.01	-21.99	74	40.12	34.25	12.32	34.68	241	189	P	V
			5143.52	42.72	-11.28	54	30.82	34.26	12.32	34.68	241	189	A	V
	*		5180	109.9	-	-	97.77	34.42	12.39	34.68	241	189	P	V
	*		5180	104.55	-	-	92.42	34.42	12.39	34.68	241	189	A	V
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 1 5150~5250MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 106/53 CH 36 5180MHz		5138.84	50.5	-23.5	74	38.64	34.23	12.32	34.69	108	173	P	H	
		5147.94	41.63	-12.37	54	29.69	34.29	12.33	34.68	108	173	A	H	
	*	5180	108.95	-	-	96.82	34.42	12.39	34.68	108	173	P	H	
	*	5180	80.62	-	-	68.49	34.42	12.39	34.68	108	173	A	H	
													H	
														H
			5125.58	52.4	-21.6	74	40.65	34.15	12.29	34.69	100	180	P	V
			5149.76	43.16	-10.84	54	31.21	34.3	12.33	34.68	100	180	A	V
	*		5180	114.32	-	-	102.19	34.42	12.39	34.68	100	180	P	V
	*		5180	107.89	-	-	95.76	34.42	12.39	34.68	100	180	A	V
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 1 5150~5250MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 38 5190MHz		5150	52.02	-21.98	74	40.06	34.3	12.34	34.68	252	187	P	H
		5150	43.97	-10.03	54	32.01	34.3	12.34	34.68	252	187	A	H
	*	5190	104.2	-	-	92.02	34.46	12.4	34.68	252	187	P	H
	*	5190	97.63	-	-	85.45	34.46	12.4	34.68	252	187	A	H
		5395.04	49.22	-24.78	74	36.59	34.71	12.56	34.64	252	187	P	H
		5457.48	40.27	-13.73	54	27.48	34.8	12.62	34.63	252	187	A	H
		5149.76	54.06	-19.94	74	42.11	34.3	12.33	34.68	262	174	P	V
		5150	46.38	-7.62	54	34.42	34.3	12.34	34.68	262	174	A	V
	*	5190	108.6	-	-	96.42	34.46	12.4	34.68	262	174	P	V
	*	5190	102.25	-	-	90.07	34.46	12.4	34.68	262	174	A	V
		5451.6	49.3	-24.7	74	36.51	34.8	12.62	34.63	262	174	P	V
		5460	40.36	-13.64	54	27.56	34.8	12.63	34.63	262	174	A	V
802.11ax HE40 Full CH 46 5230MHz		5149.76	52.8	-21.2	74	40.85	34.3	12.33	34.68	244	186	P	H
		5150	43.56	-10.44	54	31.6	34.3	12.34	34.68	244	186	A	H
	*	5230	110.85	-	-	98.46	34.62	12.44	34.67	244	186	P	H
	*	5230	102.87	-	-	90.48	34.62	12.44	34.67	244	186	A	H
		5354.44	49.67	-24.33	74	37	34.79	12.53	34.65	244	186	P	H
		5350.8	41.68	-12.32	54	29	34.8	12.53	34.65	244	186	A	H
		5148.46	54.84	-19.16	74	42.9	34.29	12.33	34.68	256	179	P	V
		5149.24	45.92	-8.08	54	33.97	34.3	12.33	34.68	256	179	A	V
	*	5230	114.85	-	-	102.46	34.62	12.44	34.67	256	179	P	V
	*	5230	107.42	-	-	95.03	34.62	12.44	34.67	256	179	A	V
	5376.56	50.93	-23.07	74	38.28	34.75	12.54	34.64	256	179	P	V	
	5350	43.36	-10.64	54	30.68	34.8	12.53	34.65	256	179	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 38 5190MHz		10380	45.23	-22.97	68.2	48.05	37.44	18.67	58.93	-	-	P	H	
		15570	48.54	-25.46	74	41.77	40.28	22.76	56.27	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10380	44.26	-23.94	68.2	47.08	37.44	18.67	58.93	-	-	P	V
			15570	47.95	-26.05	74	41.18	40.28	22.76	56.27	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 46 5230MHz		10460	45.4	-22.8	68.2	48.09	37.42	18.73	58.84	-	-	P	H
		15690	47.76	-26.24	74	40.4	40.82	22.86	56.32	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	CH 46 5230MHz		10460	45.5	-22.7	68.2	48.19	37.42	18.73	58.84	-	-	P
		15690	48.83	-25.17	74	41.47	40.82	22.86	56.32	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 1 5150~5250MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 38 5190MHz		5145.08	51.23	-22.77	74	39.31	34.27	12.33	34.68	267	190	P	H
		5148.46	44.74	-9.26	54	32.8	34.29	12.33	34.68	267	190	A	H
	*	5190	111.09	-	-	98.91	34.46	12.4	34.68	267	190	P	H
	*	5190	103.45	-	-	91.27	34.46	12.4	34.68	267	190	A	H
		5377.12	49.06	-24.94	74	36.41	34.75	12.54	34.64	267	190	P	H
		5459.72	40.41	-13.59	54	27.61	34.8	12.63	34.63	267	190	A	H
		5148.98	57.2	-16.8	74	45.26	34.29	12.33	34.68	134	179	P	V
		5148.46	48.59	-5.41	54	36.65	34.29	12.33	34.68	134	179	A	V
	*	5190	115.65	-	-	103.47	34.46	12.4	34.68	134	179	P	V
	*	5190	108.94	-	-	96.76	34.46	12.4	34.68	134	179	A	V
		5356.96	49.81	-24.19	74	37.14	34.79	12.53	34.65	134	179	P	V
	5350.24	40.89	-13.11	54	28.21	34.8	12.53	34.65	134	179	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ax HE40 Partial 242 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Partial 242/61 CH 38 5190MHz		10380	44.81	-23.39	68.2	47.55	37.44	18.67	58.85	-	-	P	H	
		15570	47.65	-26.35	74	41.14	40.28	22.76	56.53	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10380	44.74	-23.46	68.2	47.48	37.44	18.67	58.85	-	-	P	V
			15570	47.42	-26.58	74	40.91	40.28	22.76	56.53	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 1 5150~5250MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 42 5210MHz		5146.9	50.34	-23.66	74	38.41	34.28	12.33	34.68	244	184	P	H
		5142.74	42.76	-11.24	54	30.86	34.26	12.32	34.68	244	184	A	H
	*	5210	102.65	-	-	90.35	34.54	12.43	34.67	244	184	P	H
	*	5210	95.57	-	-	83.27	34.54	12.43	34.67	244	184	A	H
		5382.16	49.54	-24.46	74	36.89	34.74	12.55	34.64	244	184	P	H
		5350.52	40.33	-13.67	54	27.65	34.8	12.53	34.65	244	184	A	H
		5139.88	55.16	-18.84	74	43.28	34.24	12.32	34.68	195	180	P	V
		5148.46	46.27	-7.73	54	34.33	34.29	12.33	34.68	195	180	A	V
	*	5210	106.3	-	-	94	34.54	12.43	34.67	195	180	P	V
	*	5210	98.85	-	-	86.55	34.54	12.43	34.67	195	180	A	V
		5365.64	49.28	-24.72	74	36.61	34.77	12.54	34.64	195	180	P	V
		5350	40.88	-13.12	54	28.2	34.8	12.53	34.65	195	180	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 42 5210MHz		10420	46.67	-21.53	68.2	49.45	37.4	18.7	58.88	-	-	P	H
		15630	47.94	-26.06	74	40.97	40.46	22.8	56.29	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10420	44.8	-23.4	68.2	47.58	37.4	18.7	58.88	-	-	P
		15630	48.19	-25.81	74	41.22	40.46	22.8	56.29	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Band 1 5150~5250MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 50 5250MHz		5132.3	52.79	-21.21	74	40.99	34.19	12.3	34.69	263	183	P	H
		5122.15	43	-11	54	31.27	34.13	12.29	34.69	263	183	A	H
	*	5250	100.65	-	-	88.17	34.7	12.45	34.67	263	183	P	H
	*	5250	91.99	-	-	79.51	34.7	12.45	34.67	263	183	A	H
		5373.6	54.36	-19.64	74	41.71	34.75	12.54	34.64	263	183	P	H
		5372.4	45.9	-8.1	54	33.24	34.76	12.54	34.64	263	183	A	H
		5098.7	55.47	-18.53	74	43.91	34	12.25	34.69	211	179	P	V
		5107.45	46.25	-7.75	54	34.64	34.04	12.26	34.69	211	179	A	V
	*	5250	102.93	-	-	90.45	34.7	12.45	34.67	211	179	P	V
	*	5250	95.96	-	-	83.48	34.7	12.45	34.67	211	179	A	V
		5375.04	58.85	-15.15	74	46.2	34.75	12.54	34.64	211	179	P	V
		5378.88	49.3	-4.7	54	36.65	34.74	12.55	34.64	211	179	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 1 5150~5250MHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE160 Full CH 50 5250MHz		10500	45.02	-23.18	68.2	47.57	37.5	18.75	58.8	-	-	P	H	
		15750	49.16	-24.84	74	41.61	41	22.9	56.35	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10500	44.55	-23.65	68.2	47.1	37.5	18.75	58.8	-	-	P	V
			15750	50.2	-23.8	74	42.65	41	22.9	56.35	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 2 - 5250~5350MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 52 5260MHz		5114.1	50.97	-23.03	74	39.31	34.08	12.27	34.69	244	173	P	H
		5149.8	40.77	-13.23	54	28.82	34.3	12.33	34.68	244	173	A	H
	*	5260	109.55	-	-	97.07	34.68	12.46	34.66	244	173	P	H
	*	5260	102.07	-	-	89.59	34.68	12.46	34.66	244	173	A	H
		5365.2	50.19	-23.81	74	37.52	34.77	12.54	34.64	244	173	P	H
		5350.8	40.35	-13.65	54	27.67	34.8	12.53	34.65	244	173	A	H
		5037.1	50.48	-23.52	74	38.94	34.1	12.14	34.7	302	181	P	V
		5142.8	40.91	-13.09	54	29.01	34.26	12.32	34.68	302	181	A	V
	*	5260	115.51	-	-	103.03	34.68	12.46	34.66	302	181	P	V
	*	5260	108.43	-	-	95.95	34.68	12.46	34.66	302	181	A	V
		5449.68	51.39	-22.61	74	38.61	34.8	12.61	34.63	302	181	P	V
		5350.08	40.71	-13.29	54	28.03	34.8	12.53	34.65	302	181	A	V
802.11a CH 60 5300MHz		5129.5	51.16	-22.84	74	39.37	34.18	12.3	34.69	259	175	P	H
		5144.2	40.7	-13.3	54	28.78	34.27	12.33	34.68	259	175	A	H
	*	5300	109.15	-	-	96.72	34.6	12.49	34.66	259	175	P	H
	*	5300	101.73	-	-	89.3	34.6	12.49	34.66	259	175	A	H
		5395.2	50.6	-23.4	74	37.97	34.71	12.56	34.64	259	175	P	H
		5351.52	41.07	-12.93	54	28.39	34.8	12.53	34.65	259	175	A	H
		5071.75	50.49	-23.51	74	38.99	34	12.2	34.7	295	181	P	V
		5145.25	40.83	-13.17	54	28.91	34.27	12.33	34.68	295	181	A	V
	*	5300	115.09	-	-	102.66	34.6	12.49	34.66	295	181	P	V
	*	5300	108.33	-	-	95.9	34.6	12.49	34.66	295	181	A	V
		5362.08	52.8	-21.2	74	40.13	34.78	12.53	34.64	295	181	P	V
		5350.08	43.21	-10.79	54	30.53	34.8	12.53	34.65	295	181	A	V



802.11a CH 64 5320MHz	*	5320	107.4	-	-	94.87	34.68	12.5	34.65	238	174	P	H
	*	5320	101.93	-	-	89.4	34.68	12.5	34.65	238	174	A	H
		5371.04	50.06	-23.94	74	37.4	34.76	12.54	34.64	238	174	P	H
		5352.16	41.62	-12.38	54	28.94	34.8	12.53	34.65	238	174	A	H
													H
													H
	*	5320	115.2	-	-	102.67	34.68	12.5	34.65	346	182	P	V
	*	5320	108.32	-	-	95.79	34.68	12.5	34.65	346	182	A	V
		5350.24	52.16	-21.84	74	39.48	34.8	12.53	34.65	346	182	P	V
		5352.64	44.05	-9.95	54	31.38	34.79	12.53	34.65	346	182	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 52 5260MHz		10520	45.64	-22.56	68.2	48.14	37.5	18.77	58.77	-	-	P	H	
		15780	48.76	-25.24	74	41.38	40.82	22.92	56.36	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10520	45.92	-22.28	68.2	48.42	37.5	18.77	58.77	-	-	P	V
			15780	48.9	-25.1	74	41.52	40.82	22.92	56.36	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
i802.11a CH 60 5300MHz		10600	44.61	-29.39	74	46.84	37.6	18.83	58.66	-	-	P	H
		15900	48.5	-25.5	74	40.89	41	23.02	56.41	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10600	44.99	-29.01	74	47.22	37.6	18.83	58.66	-	-	P
		15900	48.44	-25.56	74	40.83	41	23.02	56.41	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 64 5320MHz		10641	44.22	-29.78	74	46.33	37.6	18.86	58.57	-	-	P	H
		15960	47.26	-26.74	74	39.3	41	23.07	56.11	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10640	44.11	-29.89	74	46.22	37.6	18.86	58.57	-	-	P
		15960	47.12	-26.88	74	39.16	41	23.07	56.11	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 2 5250~5350MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 52 5260MHz		5118.3	51.86	-22.14	74	40.16	34.11	12.28	34.69	244	173	P	H
		5148.75	40.84	-13.16	54	28.9	34.29	12.33	34.68	244	173	A	H
	*	5260	107.85	-	-	95.37	34.68	12.46	34.66	244	173	P	H
	*	5260	101.37	-	-	88.89	34.68	12.46	34.66	244	173	A	H
		5351.04	49.82	-24.18	74	37.14	34.8	12.53	34.65	244	173	P	H
		5350.08	40.39	-13.61	54	27.71	34.8	12.53	34.65	244	173	A	H
		5144.2	50.19	-23.81	74	38.27	34.27	12.33	34.68	355	180	P	V
		5147.7	40.84	-13.16	54	28.9	34.29	12.33	34.68	355	180	A	V
	*	5260	115.91	-	-	103.43	34.68	12.46	34.66	355	180	P	V
	*	5260	108.47	-	-	95.99	34.68	12.46	34.66	355	180	A	V
		5420.64	49.74	-24.26	74	37.05	34.74	12.58	34.63	355	180	P	V
		5459.76	40.36	-13.64	54	27.56	34.8	12.63	34.63	355	180	A	V
802.11ac VHT20 CH 60 5300MHz		5093.45	50.67	-23.33	74	39.12	34	12.24	34.69	259	175	P	H
		5145.25	40.69	-13.31	54	28.77	34.27	12.33	34.68	259	175	A	H
	*	5300	108.44	-	-	96.01	34.6	12.49	34.66	259	175	P	H
	*	5300	100.67	-	-	88.24	34.6	12.49	34.66	259	175	A	H
		5386.8	50.96	-23.04	74	38.32	34.73	12.55	34.64	259	175	P	H
		5355.6	41.08	-12.92	54	28.41	34.79	12.53	34.65	259	175	A	H
		5126.35	50.24	-23.76	74	38.48	34.16	12.29	34.69	295	181	P	V
		5145.25	40.8	-13.2	54	28.88	34.27	12.33	34.68	295	181	A	V
	*	5300	116.06	-	-	103.63	34.6	12.49	34.66	295	181	P	V
	*	5300	108.13	-	-	95.7	34.6	12.49	34.66	295	181	A	V
	5365.44	52.37	-21.63	74	39.7	34.77	12.54	34.64	295	181	P	V	
	5350.08	43.16	-10.84	54	30.48	34.8	12.53	34.65	295	181	A	V	



802.11ac VHT20 CH 64 5320MHz	*	5320	107.33	-	-	94.8	34.68	12.5	34.65	238	174	P	H
	*	5320	101.22	-	-	88.69	34.68	12.5	34.65	238	174	A	H
		5367.2	50.57	-23.43	74	37.9	34.77	12.54	34.64	238	174	P	H
		5352.8	41.7	-12.3	54	29.03	34.79	12.53	34.65	238	174	A	H
													H
													H
	*	5320	115.57	-	-	103.04	34.68	12.5	34.65	346	182	P	V
	*	5320	108.3	-	-	95.77	34.68	12.5	34.65	346	182	A	V
		5353.76	52.53	-21.47	74	39.86	34.79	12.53	34.65	346	182	P	V
		5350.08	44.28	-9.72	54	31.6	34.8	12.53	34.65	346	182	A	V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 52 5260MHz		10520	45.52	-22.68	68.2	48.02	37.5	18.77	58.77	-	-	P	H	
		15780	48.53	-25.47	74	41.15	40.82	22.92	56.36	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10520	45.12	-23.08	68.2	47.62	37.5	18.77	58.77	-	-	P	V
			15780	48.83	-25.17	74	41.45	40.82	22.92	56.36	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 60 5300MHz		10600	45.09	-28.91	74	47.32	37.6	18.83	58.66	-	-	P	H	
		15900	49.19	-24.81	74	41.58	41	23.02	56.41	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10600	46.8	-27.2	74	49.03	37.6	18.83	58.66	-	-	P	V
			15900	48.73	-25.27	74	41.12	41	23.02	56.41	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 64 5320MHz		10640	45.83	-28.17	74	47.97	37.6	18.86	58.6	-	-	P	H
		15960	47.76	-26.24	74	40.12	41	23.07	56.43	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10640	46.16	-27.84	74	48.3	37.6	18.86	58.6	-	-	P
		15960	46.79	-27.21	74	39.15	41	23.07	56.43	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 2 5250~5350MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 54 5270MHz		5139.3	50.97	-23.03	74	39.09	34.24	12.32	34.68	262	184	P	H
		5150	41.9	-12.1	54	29.94	34.3	12.34	34.68	262	184	A	H
	*	5270	110.26	-	-	97.79	34.66	12.47	34.66	262	184	P	H
	*	5270	103.21	-	-	90.74	34.66	12.47	34.66	262	184	A	H
		5359.44	52.09	-21.91	74	39.43	34.78	12.53	34.65	262	184	P	H
		5350.56	43.49	-10.51	54	30.81	34.8	12.53	34.65	262	184	A	H
		5130.55	52.54	-21.46	74	40.75	34.18	12.3	34.69	299	181	P	V
		5147.7	42.88	-11.12	54	30.94	34.29	12.33	34.68	299	181	A	V
	*	5270	115.83	-	-	103.36	34.66	12.47	34.66	299	181	P	V
	*	5270	108.28	-	-	95.81	34.66	12.47	34.66	299	181	A	V
		5360.4	54.23	-19.77	74	41.57	34.78	12.53	34.65	299	181	P	V
		5350.08	45.23	-8.77	54	32.55	34.8	12.53	34.65	299	181	A	V
802.11ac VHT40 CH 62 5310MHz		5019.6	50.57	-23.43	74	38.93	34.24	12.11	34.71	238	171	P	H
		5146.65	40.78	-13.22	54	28.85	34.28	12.33	34.68	238	171	A	H
	*	5310	105.7	-	-	93.21	34.64	12.5	34.65	238	171	P	H
	*	5310	97.84	-	-	85.35	34.64	12.5	34.65	238	171	A	H
		5350.56	52.46	-21.54	74	39.78	34.8	12.53	34.65	238	171	P	H
		5350.08	43.33	-10.67	54	30.65	34.8	12.53	34.65	238	171	A	H
		5114.45	50.65	-23.35	74	38.98	34.09	12.27	34.69	294	182	P	V
		5148.05	41.02	-12.98	54	29.08	34.29	12.33	34.68	294	182	A	V
	*	5310	110.68	-	-	98.19	34.64	12.5	34.65	294	182	P	V
	*	5310	103.53	-	-	91.04	34.64	12.5	34.65	294	182	A	V
	5350.56	59.07	-14.93	74	46.39	34.8	12.53	34.65	294	182	P	V	
	5350.08	48.26	-5.74	54	35.58	34.8	12.53	34.65	294	182	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 54 5270MHz		10540	46.01	-22.19	68.2	48.47	37.5	18.78	58.74	-	-	P	H
		15810	47.74	-26.26	74	40.46	40.7	22.95	56.37	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10540	45.4	-22.8	68.2	47.86	37.5	18.78	58.74	-	-	P
		15810	47.75	-26.25	74	40.47	40.7	22.95	56.37	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 62 5310MHz		10620	46.04	-27.96	74	48.22	37.6	18.85	58.63	-	-	P	H
		15930	48.69	-25.31	74	41.06	41	23.05	56.42	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10620	45.61	-28.39	74	47.79	37.6	18.85	58.63	-	-	P
		15930	48.74	-25.26	74	41.11	41	23.05	56.42	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



**Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 58 5290MHz		5107.8	50.72	-23.28	74	39.1	34.05	12.26	34.69	241	174	P	H
		5144.9	41.27	-12.73	54	29.35	34.27	12.33	34.68	241	174	A	H
	*	5290	102.57	-	-	90.13	34.62	12.48	34.66	241	174	P	H
	*	5290	95.31	-	-	82.87	34.62	12.48	34.66	241	174	A	H
		5358.24	53.74	-20.26	74	41.08	34.78	12.53	34.65	241	174	P	H
		5357.28	45.99	-8.01	54	33.32	34.79	12.53	34.65	241	174	A	H
		5113.75	50.56	-23.44	74	38.9	34.08	12.27	34.69	297	182	P	V
		5147	41.69	-12.31	54	29.76	34.28	12.33	34.68	297	182	A	V
	*	5290	109.44	-	-	97	34.62	12.48	34.66	297	182	P	V
	*	5290	101.58	-	-	89.14	34.62	12.48	34.66	297	182	A	V
		5358.48	57.2	-16.8	74	44.54	34.78	12.53	34.65	297	182	P	V
		5350.08	49.17	-4.83	54	36.49	34.8	12.53	34.65	297	182	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 58 5290MHz		10580	44.88	-23.32	68.2	47.19	37.56	18.82	58.69	-	-	P	H	
		15870	48.18	-25.82	74	40.76	40.82	23	56.4	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10580	45.26	-22.94	68.2	47.57	37.56	18.82	58.69	-	-	P	V
			15870	49.06	-24.94	74	41.64	40.82	23	56.4	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 2 5250~5350MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 52 5260MHz		5148.4	50.58	-23.42	74	38.64	34.29	12.33	34.68	244	173	P	H
		5148.05	40.89	-13.11	54	28.95	34.29	12.33	34.68	244	173	A	H
	*	5260	109.03	-	-	96.55	34.68	12.46	34.66	244	173	P	H
	*	5260	101.21	-	-	88.73	34.68	12.46	34.66	244	173	A	H
		5366.64	49.83	-24.17	74	37.16	34.77	12.54	34.64	244	173	P	H
		5350.08	40.62	-13.38	54	27.94	34.8	12.53	34.65	244	173	A	H
		5133.7	50.37	-23.63	74	38.55	34.2	12.31	34.69	355	180	P	V
		5149.45	40.93	-13.07	54	28.98	34.3	12.33	34.68	355	180	A	V
	*	5260	115.52	-	-	103.04	34.68	12.46	34.66	355	180	P	V
	*	5260	108.35	-	-	95.87	34.68	12.46	34.66	355	180	A	V
		5425.68	49.69	-24.31	74	36.98	34.75	12.59	34.63	355	180	P	V
		5460	40.4	-13.6	54	27.6	34.8	12.63	34.63	355	180	A	V
	802.11ax HE20 Full CH 60 5300MHz		5115.15	50.21	-23.79	74	38.53	34.09	12.28	34.69	259	175	P
		5147.35	40.66	-13.34	54	28.73	34.28	12.33	34.68	259	175	A	H
*		5300	107.95	-	-	95.52	34.6	12.49	34.66	259	175	P	H
*		5300	100.54	-	-	88.11	34.6	12.49	34.66	259	175	A	H
		5380.08	51.14	-22.86	74	38.49	34.74	12.55	34.64	259	175	P	H
		5354.88	41.1	-12.9	54	28.43	34.79	12.53	34.65	259	175	A	H
		5075.95	50.28	-23.72	74	38.77	34	12.21	34.7	295	181	P	V
		5148.4	40.75	-13.25	54	28.81	34.29	12.33	34.68	295	181	A	V
*		5300	115.65	-	-	103.22	34.6	12.49	34.66	295	181	P	V
*		5300	108.1	-	-	95.67	34.6	12.49	34.66	295	181	A	V
	5352	53.67	-20.33	74	40.99	34.8	12.53	34.65	295	181	P	V	
	5350.08	43.19	-10.81	54	30.51	34.8	12.53	34.65	295	181	A	V	



802.11ax HE20 Full CH 64 5320MHz	*	5320	107.13	-	-	94.6	34.68	12.5	34.65	238	174	P	H
	*	5320	101.16	-	-	88.63	34.68	12.5	34.65	238	174	A	H
		5358.4	50.69	-23.31	74	38.03	34.78	12.53	34.65	238	174	P	H
		5355.36	42	-12	54	29.33	34.79	12.53	34.65	238	174	A	H
													H
													H
	*	5320	116.03	-	-	103.5	34.68	12.5	34.65	346	182	P	V
	*	5320	108.16	-	-	95.63	34.68	12.5	34.65	346	182	A	V
		5350.88	53.25	-20.75	74	40.57	34.8	12.53	34.65	346	182	P	V
		5350.08	44.69	-9.31	54	32.01	34.8	12.53	34.65	346	182	A	V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 52 5260MHz		10520	44.95	-23.25	68.2	47.45	37.5	18.77	58.77	-	-	P	H	
		15780	48.42	-25.58	74	41.04	40.82	22.92	56.36	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10520	44.85	-23.35	68.2	47.35	37.5	18.77	58.77	-	-	P	V
			15780	49.1	-24.9	74	41.72	40.82	22.92	56.36	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 60 5300MHz		10600	44.25	-29.75	74	46.48	37.6	18.83	58.66	-	-	P	H
		15900	48.62	-25.38	74	41.01	41	23.02	56.41	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10600	44.48	-29.52	74	46.71	37.6	18.83	58.66	-	-	P
		15900	48.46	-25.54	74	40.85	41	23.02	56.41	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 64 5320MHz		10640	46.19	-27.81	74	48.33	37.6	18.86	58.6	-	-	P	H
		15960	47.79	-26.21	74	40.15	41	23.07	56.43	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	802.11ax HE20 Full CH 64 5320MHz		10640	45.36	-28.64	74	47.5	37.6	18.86	58.6	-	-	P
		15960	47.57	-26.43	74	39.93	41	23.07	56.43	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 2 5250~5350MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/8 CH 64 5320MHz	*	5320	107.1	-	-	94.57	34.68	12.5	34.65	105	172	P	H	
	*	5320	101.87	-	-	89.34	34.68	12.5	34.65	105	172	A	H	
		5352.64	49.93	-24.07	74	37.26	34.79	12.53	34.65	105	172	P	H	
		5362.72	40.99	-13.01	54	28.33	34.77	12.53	34.64	105	172	A	H	
													H	
														H
	*	5320	110.47	-	-	97.94	34.68	12.5	34.65	210	179	P	V	
	*	5320	105.54	-	-	93.01	34.68	12.5	34.65	210	179	A	V	
		5354.72	51.94	-22.06	74	39.27	34.79	12.53	34.65	210	179	P	V	
		5363.36	42.16	-11.84	54	29.5	34.77	12.53	34.64	210	179	A	V	
														V
														V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 2 5250~5350MHz

WIFI 802.11ax HE20 Partial 26 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/4 CH 52 5260MHz		10520	44.85	-23.35	68.2	47.22	37.5	18.77	58.64	-	-	P	H	
		15780	48.65	-25.35	74	41.22	40.82	22.92	56.31	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10520	44.6	-23.6	68.2	46.97	37.5	18.77	58.64	-	-	P	V
			15780	48.88	-25.12	74	41.45	40.82	22.92	56.31	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/8 CH 64 5320MHz		10640	44.25	-29.75	74	46.36	37.6	18.86	58.57	-	-	P	H	
		15960	46.86	-27.14	74	38.9	41	23.07	56.11	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10640	45.62	-28.38	74	47.73	37.6	18.86	58.57	-	-	P	V
			15960	47.28	-26.72	74	39.32	41	23.07	56.11	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 2 5250~5350MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 52/40 CH 64 5320MHz	*	5320	108.21	-	-	95.68	34.68	12.5	34.65	105	174	P	H	
	*	5320	102.56	-	-	90.03	34.68	12.5	34.65	105	174	A	H	
		5352.96	50.84	-23.16	74	38.17	34.79	12.53	34.65	105	174	P	H	
		5356.32	41.63	-12.37	54	28.96	34.79	12.53	34.65	105	174	A	H	
													H	
														H
	*	5320	113.13	-	-	100.6	34.68	12.5	34.65	232	183	P	V	
	*	5320	106.34	-	-	93.81	34.68	12.5	34.65	232	183	A	V	
		5356.32	52.39	-21.61	74	39.72	34.79	12.53	34.65	232	183	P	V	
		5357.6	43.62	-10.38	54	30.96	34.78	12.53	34.65	232	183	A	V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 2 5250~5350MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/54 CH 64 5320MHz	*	5320	109.93	-	-	97.4	34.68	12.5	34.65	209	184	P	H
	*	5320	102.79	-	-	90.26	34.68	12.5	34.65	209	184	A	H
		5370.72	49.96	-24.04	74	37.3	34.76	12.54	34.64	209	184	P	H
		5352.16	41.33	-12.67	54	28.65	34.8	12.53	34.65	209	184	A	H
													H
													H
	*	5320	112.46	-	-	99.93	34.68	12.5	34.65	299	174	P	V
	*	5320	104.27	-	-	91.74	34.68	12.5	34.65	299	174	A	V
		5368.64	50.59	-23.41	74	37.93	34.76	12.54	34.64	299	174	P	V
		5350.4	43.08	-10.92	54	30.4	34.8	12.53	34.65	299	174	A	V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 54 5270MHz		5119.35	51.51	-22.49	74	39.8	34.12	12.28	34.69	244	173	P	H
		5148.75	41.93	-12.07	54	29.99	34.29	12.33	34.68	244	173	A	H
	*	5270	108.46	-	-	95.99	34.66	12.47	34.66	244	173	P	H
	*	5270	101.35	-	-	88.88	34.66	12.47	34.66	244	173	A	H
		5354.64	52.71	-21.29	74	40.04	34.79	12.53	34.65	244	173	P	H
		5356.32	42.94	-11.06	54	30.27	34.79	12.53	34.65	244	173	A	H
		5148.05	52.9	-21.1	74	40.96	34.29	12.33	34.68	299	180	P	V
		5147.7	42.79	-11.21	54	30.85	34.29	12.33	34.68	299	180	A	V
	*	5270	115.59	-	-	103.12	34.66	12.47	34.66	299	180	P	V
	*	5270	107.67	-	-	95.2	34.66	12.47	34.66	299	180	A	V
		5358	54.95	-19.05	74	42.29	34.78	12.53	34.65	299	180	P	V
		5350.08	45.05	-8.95	54	32.37	34.8	12.53	34.65	299	180	A	V
802.11ax HE40 Full CH 62 5310MHz		5135.45	51.31	-22.69	74	39.48	34.21	12.31	34.69	257	187	P	H
		5149.1	40.75	-13.25	54	28.81	34.29	12.33	34.68	257	187	A	H
	*	5310	105.48	-	-	92.99	34.64	12.5	34.65	257	187	P	H
	*	5310	97.69	-	-	85.2	34.64	12.5	34.65	257	187	A	H
		5351.76	53.12	-20.88	74	40.44	34.8	12.53	34.65	257	187	P	H
		5350.56	43.66	-10.34	54	30.98	34.8	12.53	34.65	257	187	A	H
		5052.5	50.36	-23.64	74	38.89	34	12.17	34.7	250	175	P	V
		5149.8	40.96	-13.04	54	29.01	34.3	12.33	34.68	250	175	A	V
	*	5310	111.21	-	-	98.72	34.64	12.5	34.65	250	175	P	V
	*	5310	101.66	-	-	89.17	34.64	12.5	34.65	250	175	A	V
	5350.32	54.87	-19.13	74	42.19	34.8	12.53	34.65	250	175	P	V	
	5350.32	47.44	-6.56	54	34.76	34.8	12.53	34.65	250	175	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 54 5270MHz		10540	44.17	-24.03	68.2	46.63	37.5	18.78	58.74	-	-	P	H
		15810	47.86	-26.14	74	40.58	40.7	22.95	56.37	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			10540	44.28	-23.92	68.2	46.74	37.5	18.78	58.74	-	-	P
		15810	47.38	-26.62	74	40.1	40.7	22.95	56.37	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 62 5310MHz		10620	45.81	-28.19	74	47.99	37.6	18.85	58.63	-	-	P	H	
		15930	48.14	-25.86	74	40.51	41	23.05	56.42	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10620	45.07	-28.93	74	47.25	37.6	18.85	58.63	-	-	P	V
			15930	48.75	-25.25	74	41.12	41	23.05	56.42	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 2 5250~5350MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 58 5290MHz		5112	51.56	-22.44	74	39.91	34.07	12.27	34.69	254	177	P	H
		5144.2	41.3	-12.7	54	29.38	34.27	12.33	34.68	254	177	A	H
	*	5290	103.22	-	-	90.78	34.62	12.48	34.66	254	177	P	H
	*	5290	94.73	-	-	82.29	34.62	12.48	34.66	254	177	A	H
		5365.44	54.56	-19.44	74	41.89	34.77	12.54	34.64	254	177	P	H
		5366.16	45.28	-8.72	54	32.61	34.77	12.54	34.64	254	177	A	H
		5137.9	51.8	-22.2	74	39.95	34.23	12.31	34.69	292	185	P	V
		5145.25	42.03	-11.97	54	30.11	34.27	12.33	34.68	292	185	A	V
	*	5290	108.13	-	-	95.69	34.62	12.48	34.66	292	185	P	V
	*	5290	98.51	-	-	86.07	34.62	12.48	34.66	292	185	A	V
		5359.44	57.84	-16.16	74	45.18	34.78	12.53	34.65	292	185	P	V
	5358	49.82	-4.18	54	37.16	34.78	12.53	34.65	292	185	A	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 2 5250~5350MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE80 Full CH 58 5290MHz		10580	44.86	-23.34	68.2	47.17	37.56	18.82	58.69	-	-	P	H	
		15870	48.63	-25.37	74	41.21	40.82	23	56.4	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			10580	44.73	-23.47	68.2	47.04	37.56	18.82	58.69	-	-	P	V
			15870	47.78	-26.22	74	40.36	40.82	23	56.4	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 - 5470~5725MHz
WIFI 802.11a (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 100 5500MHz		5444.72	51.5	-22.5	74	38.73	34.79	12.61	34.63	248	172	P	H	
		5464.4	52.71	-15.49	68.2	39.91	34.8	12.63	34.63	248	172	P	H	
		5459.92	42.08	-11.92	54	29.28	34.8	12.63	34.63	248	172	A	H	
	*	5500	108.39	-	-	95.54	34.8	12.67	34.62	248	172	P	H	
	*	5500	101.48	-	-	88.63	34.8	12.67	34.62	248	172	A	H	
														H
			5458.96	54.45	-19.55	74	41.66	34.8	12.62	34.63	259	184	P	V
			5468.4	54.21	-13.99	68.2	41.4	34.8	12.64	34.63	259	184	P	V
			5459.28	44.32	-9.68	54	31.52	34.8	12.63	34.63	259	184	A	V
	*		5500	112.78	-	-	99.93	34.8	12.67	34.62	259	184	P	V
	*		5500	107.49	-	-	94.64	34.8	12.67	34.62	259	184	A	V
														V
802.11a CH 116 5580MHz		5411.68	49.71	-24.29	74	37.06	34.72	12.57	34.64	398	193	P	H	
		5461.84	49.02	-19.18	68.2	36.22	34.8	12.63	34.63	398	193	P	H	
		5458.96	40.44	-13.56	54	27.65	34.8	12.62	34.63	398	193	A	H	
	*	5580	106.34	-	-	93.54	34.7	12.76	34.66	398	193	P	H	
	*	5580	101.13	-	-	88.33	34.7	12.76	34.66	398	193	A	H	
			5742.95	50.62	-17.58	68.2	37.19	35.2	12.99	34.76	398	193	P	H
			5392.24	48.93	-25.07	74	36.3	34.72	12.55	34.64	298	184	P	V
			5466.4	48.82	-19.38	68.2	36.02	34.8	12.63	34.63	298	184	P	V
			5459.2	40.92	-13.08	54	28.12	34.8	12.63	34.63	298	184	A	V
	*		5580	112.62	-	-	99.82	34.7	12.76	34.66	298	184	P	V
	*		5580	107.49	-	-	94.69	34.7	12.76	34.66	298	184	A	V
			5736.02	49.92	-18.28	68.2	36.49	35.2	12.98	34.75	298	184	P	V



802.11a CH 140 5700MHz	*	5700	107.02	-	-	93.63	35.2	12.92	34.73	100	229	P	H
	*	5700	101.13	-	-	87.74	35.2	12.92	34.73	100	229	A	H
		5744.44	52.18	-16.02	68.2	38.75	35.2	12.99	34.76	100	229	P	H
													H
													H
													H
	*	5700	110.14	-	-	96.75	35.2	12.92	34.73	100	192	P	V
	*	5700	105.77	-	-	92.38	35.2	12.92	34.73	100	192	A	V
		5731	53.24	-14.96	68.2	39.82	35.2	12.97	34.75	100	192	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 100 5500MHz		11000	45.6	-28.4	74	46.78	37.8	19.11	58.09	-	-	P	H
		16500	50.73	-17.47	68.2	41.52	42.1	23.44	56.33	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11000	46.35	-27.65	74	47.53	37.8	19.11	58.09	-	-	P
		16500	49.77	-18.43	68.2	40.56	42.1	23.44	56.33	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11a CH 116 5580MHz		11160	44.97	-29.03	74	45.68	37.82	19.23	57.76	-	-	P	H
		16740	50.21	-17.99	68.2	40.33	42.28	23.59	55.99	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11160	45.05	-28.95	74	45.76	37.82	19.23	57.76	-	-	P
		16740	50.07	-18.13	68.2	40.19	42.28	23.59	55.99	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 140 5700MHz		11400	45.76	-28.24	74	45.41	38.2	19.41	57.26	-	-	P	H	
		17100	50.09	-18.11	68.2	40.09	41.8	23.83	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11400	46.16	-27.84	74	45.81	38.2	19.41	57.26	-	-	P	V
			17100	49.93	-18.27	68.2	39.93	41.8	23.83	55.63	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 100 5500MHz		5449.52	51.29	-22.71	74	38.51	34.8	12.61	34.63	296	190	P	H	
		5460.72	50.85	-17.35	68.2	38.05	34.8	12.63	34.63	296	190	P	H	
		5459.92	41.8	-12.2	54	29	34.8	12.63	34.63	296	190	A	H	
	*	5500	106.58	-	-	93.73	34.8	12.67	34.62	296	190	P	H	
	*	5500	100.56	-	-	87.71	34.8	12.67	34.62	296	190	A	H	
														H
			5451.12	53.35	-20.65	74	40.56	34.8	12.62	34.63	304	182	P	V
			5469.52	53.24	-14.96	68.2	40.43	34.8	12.64	34.63	304	182	P	V
			5457.84	43.71	-10.29	54	30.92	34.8	12.62	34.63	304	182	A	V
	*		5500	112.73	-	-	99.88	34.8	12.67	34.62	304	182	P	V
	*		5500	106.48	-	-	93.63	34.8	12.67	34.62	304	182	A	V
														V
802.11ac VHT20 CH 116 5580MHz		5443.84	49.81	-24.19	74	37.04	34.79	12.61	34.63	265	182	P	H	
		5467.6	48.89	-19.31	68.2	36.09	34.8	12.63	34.63	265	182	P	H	
		5459.68	40.62	-13.38	54	27.82	34.8	12.63	34.63	265	182	A	H	
	*	5580	104.92	-	-	92.12	34.7	12.76	34.66	265	182	P	H	
	*	5580	100.53	-	-	87.73	34.7	12.76	34.66	265	182	A	H	
			5761.535	49.2	-19	68.2	35.76	35.2	13.01	34.77	265	182	P	H
			5451.28	51.03	-22.97	74	38.24	34.8	12.62	34.63	297	182	P	V
			5465.44	48.08	-20.12	68.2	35.28	34.8	12.63	34.63	297	182	P	V
			5459.68	40.86	-13.14	54	28.06	34.8	12.63	34.63	297	182	A	V
	*		5580	111.42	-	-	98.62	34.7	12.76	34.66	297	182	P	V
	*		5580	106.63	-	-	93.83	34.7	12.76	34.66	297	182	A	V
			5759.015	49.47	-18.73	68.2	36.03	35.2	13.01	34.77	297	182	P	V



802.11ac VHT20 CH 140 5700MHz	*	5700	106.98	-	-	93.59	35.2	12.92	34.73	276	181	P	H
	*	5700	100.43	-	-	87.04	35.2	12.92	34.73	276	181	A	H
		5725	52.23	-15.97	68.2	38.82	35.2	12.96	34.75	276	181	P	H
													H
													H
													H
	*	5700	113.39	-	-	100	35.2	12.92	34.73	288	180	P	V
	*	5700	107.51	-	-	94.12	35.2	12.92	34.73	288	180	A	V
		5725.72	55.65	-12.55	68.2	42.24	35.2	12.96	34.75	288	180	P	V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 100 5500MHz		11000	46	-28	74	47.18	37.8	19.11	58.09	-	-	P	H	
		16500	49.36	-18.84	68.2	40.15	42.1	23.44	56.33	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11000	47.22	-26.78	74	48.4	37.8	19.11	58.09	-	-	P	V
			16500	49.67	-18.53	68.2	40.46	42.1	23.44	56.33	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 116 5580MHz		11160	46.11	-27.89	74	46.82	37.82	19.23	57.76	-	-	P	H	
		16740	49.33	-18.87	68.2	39.45	42.28	23.59	55.99	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11160	45.94	-28.06	74	46.65	37.82	19.23	57.76	-	-	P	V
			16740	49.2	-19	68.2	39.32	42.28	23.59	55.99	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 140 5700MHz		11400	46.18	-27.82	74	45.83	38.2	19.41	57.26	-	-	P	H
		17100	50.87	-17.33	68.2	40.87	41.8	23.83	55.63	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			11400	46.74	-27.26	74	46.39	38.2	19.41	57.26	-	-	P
		17100	51.46	-16.74	68.2	41.46	41.8	23.83	55.63	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 102 5510MHz		5459.92	51.11	-22.89	74	38.31	34.8	12.63	34.63	295	190	P	H
		5468.32	50.97	-17.23	68.2	38.16	34.8	12.64	34.63	295	190	P	H
		5459.92	41.73	-12.27	54	28.93	34.8	12.63	34.63	295	190	A	H
	*	5510	101.99	-	-	89.16	34.78	12.68	34.63	295	190	P	H
	*	5510	95.95	-	-	83.12	34.78	12.68	34.63	295	190	A	H
		5733.815	49.98	-18.22	68.2	36.56	35.2	12.97	34.75	295	190	P	H
		5458.24	51.56	-22.44	74	38.77	34.8	12.62	34.63	304	183	P	V
		5468.32	55.51	-12.69	68.2	42.7	34.8	12.64	34.63	304	183	P	V
		5458.96	43.19	-10.81	54	30.4	34.8	12.62	34.63	304	183	A	V
	*	5510	108.44	-	-	95.61	34.78	12.68	34.63	304	183	P	V
	*	5510	102.04	-	-	89.21	34.78	12.68	34.63	304	183	A	V
		5738.54	49.68	-18.52	68.2	36.25	35.2	12.98	34.75	304	183	P	V
802.11ac VHT40 CH 110 5550MHz		5459.68	52.09	-21.91	74	39.29	34.8	12.63	34.63	292	182	P	H
		5464	52.61	-15.59	68.2	39.81	34.8	12.63	34.63	292	182	P	H
		5452.96	43.51	-10.49	54	30.72	34.8	12.62	34.63	292	182	A	H
	*	5550	105.97	-	-	93.19	34.7	12.73	34.65	292	182	P	H
	*	5550	99.52	-	-	86.74	34.7	12.73	34.65	292	182	A	H
		5744.84	49.97	-18.23	68.2	36.54	35.2	12.99	34.76	292	182	P	H
		5436.88	54	-20	74	41.26	34.77	12.6	34.63	301	183	P	V
		5466.88	55.65	-12.55	68.2	42.85	34.8	12.63	34.63	301	183	P	V
		5457.52	45.28	-8.72	54	32.49	34.8	12.62	34.63	301	183	A	V
	*	5550	111.77	-	-	98.99	34.7	12.73	34.65	301	183	P	V
	*	5550	106.06	-	-	93.28	34.7	12.73	34.65	301	183	A	V
		5735.075	51.23	-16.97	68.2	37.8	35.2	12.98	34.75	301	183	P	V



802.11ac VHT40 CH 134 5670MHz		5417.9	49.32	-24.68	74	36.63	34.74	12.58	34.63	298	181	P	H
		5466.2	47.84	-20.36	68.2	35.04	34.8	12.63	34.63	298	181	P	H
		5452.9	40.69	-13.31	54	27.9	34.8	12.62	34.63	298	181	A	H
	*	5670	104.22	-	-	90.98	35.08	12.88	34.72	298	181	P	H
	*	5670	99.36	-	-	86.12	35.08	12.88	34.72	298	181	A	H
		5732.625	52.11	-16.09	68.2	38.69	35.2	12.97	34.75	298	181	P	H
		5423.85	50.65	-23.35	74	37.94	34.75	12.59	34.63	291	180	P	V
		5460.95	48.77	-19.43	68.2	35.97	34.8	12.63	34.63	291	180	P	V
		5449.4	41.16	-12.84	54	28.38	34.8	12.61	34.63	291	180	A	V
	*	5670	112.74	-	-	99.5	35.08	12.88	34.72	291	180	P	V
	*	5670	106.79	-	-	93.55	35.08	12.88	34.72	291	180	A	V
		5748.725	58.85	-9.35	68.2	45.41	35.2	13	34.76	291	180	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - 5470~5725MHz
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 102 5510MHz		11020	46.1	-27.9	74	47.22	37.8	19.13	58.05	-	-	P	H	
		16530	49.85	-18.35	68.2	40.83	41.86	23.45	56.29	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11020	45.88	-28.12	74	47	37.8	19.13	58.05	-	-	P	V
			16530	49.86	-18.34	68.2	40.84	41.86	23.45	56.29	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 110 5550MHz		11100	45.93	-28.07	74	46.72	37.9	19.19	57.88	-	-	P	H	
		16650	49.39	-18.81	68.2	39.89	42.1	23.52	56.12	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11100	45.51	-28.49	74	46.3	37.9	19.19	57.88	-	-	P	V
			16650	49.7	-18.5	68.2	40.2	42.1	23.52	56.12	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 134 5670MHz		11340	45.65	-28.35	74	45.49	38.18	19.36	57.38	-	-	P	H	
		17010	50.87	-17.33	68.2	40.81	41.92	23.77	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11340	45.25	-28.75	74	45.09	38.18	19.36	57.38	-	-	P	V
			17010	51.29	-16.91	68.2	41.23	41.92	23.77	55.63	-	-	P	V
														V
														V
														V
														V
														V
														V
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 106 5530MHz		5455.6	52.16	-21.84	74	39.37	34.8	12.62	34.63	232	174	P	H
		5464.48	52.13	-16.07	68.2	39.33	34.8	12.63	34.63	232	174	P	H
		5456.8	43.89	-10.11	54	31.1	34.8	12.62	34.63	232	174	A	H
	*	5530	100	-	-	87.2	34.74	12.7	34.64	232	174	P	H
	*	5530	93.38	-	-	80.58	34.74	12.7	34.64	232	174	A	H
		5751.455	50.28	-17.92	68.2	36.84	35.2	13	34.76	232	174	P	H
		5454.64	54.13	-19.87	74	41.34	34.8	12.62	34.63	100	169	P	V
		5464.72	55.14	-13.06	68.2	42.34	34.8	12.63	34.63	100	169	P	V
		5454.4	46.72	-7.28	54	33.93	34.8	12.62	34.63	100	169	A	V
	*	5530	103.4	-	-	90.6	34.74	12.7	34.64	100	169	P	V
	*	5530	96.52	-	-	83.72	34.74	12.7	34.64	100	169	A	V
	5744.21	52	-16.2	68.2	38.57	35.2	12.99	34.76	100	169	P	V	
802.11ac VHT80 CH 122 5610MHz		5439.6	50.23	-23.77	74	37.48	34.78	12.6	34.63	100	215	P	H
		5469.7	50.1	-18.1	68.2	37.29	34.8	12.64	34.63	100	215	P	H
		5459.9	42.34	-11.66	54	29.54	34.8	12.63	34.63	100	215	A	H
	*	5610	102.77	-	-	89.9	34.76	12.79	34.68	100	215	P	H
	*	5610	96.13	-	-	83.26	34.76	12.79	34.68	100	215	A	H
		5752.05	51.33	-16.87	68.2	37.89	35.2	13	34.76	100	215	P	H
		5444.15	53.88	-20.12	74	41.11	34.79	12.61	34.63	295	187	P	V
		5466.9	52.15	-16.05	68.2	39.35	34.8	12.63	34.63	295	187	P	V
		5455	43.75	-10.25	54	30.96	34.8	12.62	34.63	295	187	A	V
	*	5610	108.88	-	-	96.01	34.76	12.79	34.68	295	187	P	V
	*	5610	102.24	-	-	89.37	34.76	12.79	34.68	295	187	A	V
	5749.075	51.98	-16.22	68.2	38.54	35.2	13	34.76	295	187	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 106 5530MHz		11060	46.28	-27.72	74	47.27	37.82	19.16	57.97	-	-	P	H	
		16590	48.52	-19.68	68.2	39.53	41.7	23.49	56.2	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11060	46.32	-27.68	74	47.31	37.82	19.16	57.97	-	-	P	V
			16590	49.13	-19.07	68.2	40.14	41.7	23.49	56.2	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 122 5610MHz		11220	45.93	-28.07	74	46.35	37.94	19.27	57.63	-	-	P	H	
		16830	50.24	-17.96	68.2	40.16	42.3	23.65	55.87	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11220	45.53	-28.47	74	45.95	37.94	19.27	57.63	-	-	P	V
			16830	50.62	-17.58	68.2	40.54	42.3	23.65	55.87	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



**Band 3 5470~5725MHz
WIFI 802.11ac VHT160 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT160 CH 114 5570MHz		5413.6	54.1	-19.9	74	41.44	34.73	12.57	34.64	234	181	P	H
		5463.52	54.37	-13.83	68.2	41.57	34.8	12.63	34.63	234	181	P	H
		5413.84	45.42	-8.58	54	32.75	34.73	12.58	34.64	234	181	A	H
	*	5570	95.74	-	-	82.95	34.7	12.75	34.66	234	181	P	H
	*	5570	89.72	-	-	76.93	34.7	12.75	34.66	234	181	A	H
		5735.705	53.43	-14.77	68.2	40	35.2	12.98	34.75	234	181	P	H
		5417.92	57.34	-16.66	74	44.65	34.74	12.58	34.63	270	181	P	V
		5469.04	56.18	-12.02	68.2	43.37	34.8	12.64	34.63	270	181	P	V
		5418.88	49.41	-4.59	54	36.72	34.74	12.58	34.63	270	181	A	V
	*	5570	100.67	-	-	87.88	34.7	12.75	34.66	270	181	P	V
	*	5570	92.33	-	-	79.54	34.7	12.75	34.66	270	181	A	V
		5750.195	58.67	-9.53	68.2	45.23	35.2	13	34.76	270	181	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ac VHT160 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT160 CH 114 5570MHz		11140	46.02	-27.98	74	46.78	37.82	19.22	57.8	-	-	P	H	
		16710	50.39	-17.81	68.2	40.64	42.22	23.57	56.04	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11140	45.8	-28.2	74	46.56	37.82	19.22	57.8	-	-	P	V
			16710	49.72	-18.48	68.2	39.97	42.22	23.57	56.04	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 3 5470~5725MHz
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 100 5500MHz		5438.16	51.32	-22.68	74	38.57	34.78	12.6	34.63	350	192	P	H
		5468.56	50.17	-18.03	68.2	37.36	34.8	12.64	34.63	350	192	P	H
		5460	41.75	-12.25	54	28.95	34.8	12.63	34.63	350	192	A	H
	*	5500	107.79	-	-	94.94	34.8	12.67	34.62	350	192	P	H
	*	5500	101	-	-	88.15	34.8	12.67	34.62	350	192	A	H
		5458.64	51.83	-22.17	74	39.04	34.8	12.62	34.63	360	180	P	V
		5469.2	52.67	-15.53	68.2	39.86	34.8	12.64	34.63	360	180	P	V
		5460	43.8	-10.2	54	31	34.8	12.63	34.63	360	180	A	V
	*	5500	113.77	-	-	100.92	34.8	12.67	34.62	360	180	P	V
	*	5500	106.6	-	-	93.75	34.8	12.67	34.62	360	180	A	V
													V
												V	
802.11ax HE20 Full CH 116 5580MHz		5405.92	50.2	-23.8	74	37.56	34.71	12.57	34.64	398	192	P	H
		5468.08	50.19	-18.01	68.2	37.39	34.8	12.63	34.63	398	192	P	H
		5459.92	40.43	-13.57	54	27.63	34.8	12.63	34.63	398	192	A	H
	*	5580	107.12	-	-	94.32	34.7	12.76	34.66	398	192	P	H
	*	5580	100.95	-	-	88.15	34.7	12.76	34.66	398	192	A	H
		5731.925	49.22	-18.98	68.2	35.8	35.2	12.97	34.75	398	192	P	H
		5408.08	50.53	-23.47	74	37.88	34.72	12.57	34.64	299	180	P	V
		5468.56	49.51	-18.69	68.2	36.7	34.8	12.64	34.63	299	180	P	V
		5458.48	40.87	-13.13	54	28.08	34.8	12.62	34.63	299	180	A	V
	*	5580	113.31	-	-	100.51	34.7	12.76	34.66	299	180	P	V
	*	5580	106.87	-	-	94.07	34.7	12.76	34.66	299	180	A	V
	5747.99	50.18	-18.02	68.2	36.75	35.2	12.99	34.76	299	180	P	V	



802.11ax HE20 Full CH 140 5700MHz	*	5700	108.23	-	-	94.84	35.2	12.92	34.73	100	220	P	H
	*	5700	99.54	-	-	86.15	35.2	12.92	34.73	100	220	A	H
		5725.96	52.2	-16	68.2	38.79	35.2	12.96	34.75	100	220	P	H
													H
													H
													H
	*	5700	114.05	-	-	100.66	35.2	12.92	34.73	336	179	P	V
	*	5700	106.55	-	-	93.16	35.2	12.92	34.73	336	179	A	V
		5726.2	60.29	-7.91	68.2	46.88	35.2	12.96	34.75	336	179	P	V
													V
												V	
												V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ax HE20 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 100 5500MHz		11000	46.84	-27.16	74	48.02	37.8	19.11	58.09	-	-	P	H	
		16500	49.34	-18.86	68.2	40.13	42.1	23.44	56.33	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11000	45.98	-28.02	74	47.16	37.8	19.11	58.09	-	-	P	V
			16500	50.36	-17.84	68.2	41.15	42.1	23.44	56.33	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Full CH 116 5580MHz		11160	45.43	-28.57	74	46.14	37.82	19.23	57.76	-	-	P	H	
		16740	49.45	-18.75	68.2	39.57	42.28	23.59	55.99	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11160	45.87	-28.13	74	46.58	37.82	19.23	57.76	-	-	P	V
			16740	48.94	-19.26	68.2	39.06	42.28	23.59	55.99	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 140 5700MHz		11400	46.38	-27.62	74	46.03	38.2	19.41	57.26	-	-	P	H
		17100	50.77	-17.43	68.2	40.77	41.8	23.83	55.63	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	802.11ax HE20 Full CH 140 5700MHz		11400	45.89	-28.11	74	45.54	38.2	19.41	57.26	-	-	P
		17100	51.54	-16.66	68.2	41.54	41.8	23.83	55.63	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 												



Band 3 5470~5725MHz
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/0 CH 100 5260MHz		5355.92	50.24	-23.76	74	37.57	34.79	12.53	34.65	214	185	P	H	
		5463.76	50.32	-17.88	68.2	37.52	34.8	12.63	34.63	214	185	P	H	
		5459.92	41.26	-12.74	54	28.46	34.8	12.63	34.63	214	185	A	H	
	*	5500	102.59	-	-	89.74	34.8	12.67	34.62	214	185	P	H	
	*	5500	98.32	-	-	85.47	34.8	12.67	34.62	214	185	A	H	
														H
			5427.76	51.59	-22.41	74	38.87	34.76	12.59	34.63	107	176	P	V
			5462.32	50.01	-18.19	68.2	37.21	34.8	12.63	34.63	107	176	P	V
			5460	42.81	-11.19	54	30.01	34.8	12.63	34.63	107	176	A	V
	*		5500	107.57	-	-	94.72	34.8	12.67	34.62	107	176	P	V
	*		5500	102.94	-	-	90.09	34.8	12.67	34.62	107	176	A	V
														V
802.11ax HE20 Partial 26/8 CH 140 5700MHz	*	5700	104.83	-	-	91.44	35.2	12.92	34.73	100	230	P	H	
	*	5700	99.57	-	-	86.18	35.2	12.92	34.73	100	230	A	H	
		5753.72	52.16	-16.04	68.2	38.72	35.2	13	34.76	100	230	P	H	
														H
														H
														H
	*		5700	107.81	-	-	94.42	35.2	12.92	34.73	160	182	P	V
	*		5700	103.79	-	-	90.4	35.2	12.92	34.73	160	182	A	V
			5744.76	51.6	-16.6	68.2	38.17	35.2	12.99	34.76	160	182	P	V
														V
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 3 5470~5725MHz

WIFI 802.11ax HE20 Partial 26 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/0		11000	44.98	-29.02	74	46.43	37.8	19.11	58.36	-	-	P	H
		16500	49.42	-18.78	68.2	40.36	42.1	23.44	56.48	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
CH 100 5500MHz		11000	44.71	-29.29	74	46.16	37.8	19.11	58.36	-	-	P	V
		16500	49.13	-19.07	68.2	40.07	42.1	23.44	56.48	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20		11160	45.76	-28.24	74	46.63	37.82	19.23	57.92	-	-	P	H
		16740	49.62	-18.58	68.2	40.18	42.28	23.59	56.43	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
Partial 26/4 CH 116 5580MHz		11160	45.33	-28.67	74	46.2	37.82	19.23	57.92	-	-	P	V
		16740	49.41	-18.79	68.2	39.97	42.28	23.59	56.43	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/8 CH 140 5700MHz		11400	45.26	-28.74	74	44.9	38.2	19.41	57.25	-	-	P	H	
		17100	49.14	-19.06	68.2	39.73	41.8	23.83	56.22	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11400	45.23	-28.77	74	44.87	38.2	19.41	57.25	-	-	P	V
			17100	49.67	-18.53	68.2	40.26	41.8	23.83	56.22	-	-	P	V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 5470~5725MHz
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 52/37 CH 100 5500MHz		5452.56	51.18	-22.82	74	38.39	34.8	12.62	34.63	208	181	P	H	
		5460.88	49.83	-18.37	68.2	37.03	34.8	12.63	34.63	208	181	P	H	
		5452.4	41.01	-12.99	54	28.22	34.8	12.62	34.63	208	181	A	H	
	*	5500	106.08	-	-	93.23	34.8	12.67	34.62	208	181	P	H	
	*	5500	99.4	-	-	86.55	34.8	12.67	34.62	208	181	A	H	
														H
			5435.76	51.78	-22.22	74	39.04	34.77	12.6	34.63	106	172	P	V
			5466.64	51.3	-16.9	68.2	38.5	34.8	12.63	34.63	106	172	P	V
			5454.32	41.92	-12.08	54	29.13	34.8	12.62	34.63	106	172	A	V
	*	5500	107.94	-	-	95.09	34.8	12.67	34.62	106	172	P	V	
	*	5500	103.04	-	-	90.19	34.8	12.67	34.62	106	172	A	V	
													V	
802.11ax HE20 Partial 52/40 CH 140 5700MHz	*	5700	105.83	-	-	92.44	35.2	12.92	34.73	102	230	P	H	
	*	5700	99.82	-	-	86.43	35.2	12.92	34.73	102	230	A	H	
		5751.72	50.73	-17.47	68.2	37.29	35.2	13	34.76	102	230	P	H	
														H
														H
														H
	*	5700	108.64	-	-	95.25	35.2	12.92	34.73	159	186	P	V	
	*	5700	103.57	-	-	90.18	35.2	12.92	34.73	159	186	A	V	
			5731.88	51.94	-16.26	68.2	38.52	35.2	12.97	34.75	159	186	P	V
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 3 5470~5725MHz
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 106/53 CH 100 5500MHz		5434.32	50.6	-23.4	74	37.86	34.77	12.6	34.63	219	176	P	H	
		5463.28	50.43	-17.77	68.2	37.63	34.8	12.63	34.63	219	176	P	H	
		5457.52	40.93	-13.07	54	28.14	34.8	12.62	34.63	219	176	A	H	
	*	5500	106.49	-	-	93.64	34.8	12.67	34.62	219	176	P	H	
	*	5500	100.74	-	-	87.89	34.8	12.67	34.62	219	176	A	H	
														H
			5455.28	51.67	-22.33	74	38.88	34.8	12.62	34.63	131	185	P	V
			5466.64	51.62	-16.58	68.2	38.82	34.8	12.63	34.63	131	185	P	V
			5459.6	41.86	-12.14	54	29.06	34.8	12.63	34.63	131	185	A	V
	*		5500	110.23	-	-	97.38	34.8	12.67	34.62	131	185	P	V
	*		5500	105.02	-	-	92.17	34.8	12.67	34.62	131	185	A	V
													V	
802.11ax HE20 Partial 106/54 CH 140 5700MHz	*	5700	107.58	-	-	94.19	35.2	12.92	34.73	100	218	P	H	
	*	5700	100.58	-	-	87.19	35.2	12.92	34.73	100	218	A	H	
			5740.2	51.39	-16.81	68.2	37.96	35.2	12.98	34.75	100	218	P	H
														H
														H
														H
	*		5700	111.51	-	-	98.12	35.2	12.92	34.73	100	198	P	V
	*		5700	106.07	-	-	92.68	35.2	12.92	34.73	100	198	A	V
			5726.36	52.82	-15.38	68.2	39.41	35.2	12.96	34.75	100	198	P	V
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.													



Band 3 5470~5725MHz
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 102 5510MHz		5446.48	49.84	-24.16	74	37.07	34.79	12.61	34.63	295	190	P	H
		5469.52	51.1	-17.1	68.2	38.29	34.8	12.64	34.63	295	190	P	H
		5459.92	42.06	-11.94	54	29.26	34.8	12.63	34.63	295	190	A	H
	*	5510	102	-	-	89.17	34.78	12.68	34.63	295	190	P	H
	*	5510	95.84	-	-	83.01	34.78	12.68	34.63	295	190	A	H
		5742.635	50.92	-17.28	68.2	37.49	35.2	12.99	34.76	295	190	P	H
		5434	51.88	-22.12	74	39.14	34.77	12.6	34.63	304	182	P	V
		5467.36	55.61	-12.59	68.2	42.81	34.8	12.63	34.63	304	182	P	V
		5458.96	43.94	-10.06	54	31.15	34.8	12.62	34.63	304	182	A	V
	*	5510	107.83	-	-	95	34.78	12.68	34.63	304	182	P	V
	*	5510	101.84	-	-	89.01	34.78	12.68	34.63	304	182	A	V
		5753.975	50.07	-18.13	68.2	36.63	35.2	13	34.76	304	182	P	V
802.11ax HE40 Full CH 110 5550MHz		5434	52.9	-21.1	74	40.16	34.77	12.6	34.63	264	182	P	H
		5462.32	52.11	-16.09	68.2	39.31	34.8	12.63	34.63	264	182	P	H
		5452.96	43.89	-10.11	54	31.1	34.8	12.62	34.63	264	182	A	H
	*	5550	105.36	-	-	92.58	34.7	12.73	34.65	264	182	P	H
	*	5550	99.71	-	-	86.93	34.7	12.73	34.65	264	182	A	H
		5749.565	50.4	-17.8	68.2	36.96	35.2	13	34.76	264	182	P	H
		5457.76	55.5	-18.5	74	42.71	34.8	12.62	34.63	302	182	P	V
		5468.56	54.87	-13.33	68.2	42.06	34.8	12.64	34.63	302	182	P	V
		5458.24	45.88	-8.12	54	33.09	34.8	12.62	34.63	302	182	A	V
	*	5548	111.55	-	-	98.78	34.7	12.72	34.65	302	182	P	V
	*	5548	105.79	-	-	93.02	34.7	12.72	34.65	302	182	A	V
		5759.96	50.52	-17.68	68.2	37.08	35.2	13.01	34.77	302	182	P	V



802.11ax HE40 Full CH 134 5670MHz		5366.8	48.84	-25.16	74	36.17	34.77	12.54	34.64	259	181	P	H
		5468.65	48.32	-19.88	68.2	35.51	34.8	12.64	34.63	259	181	P	H
		5459.2	40.59	-13.41	54	27.79	34.8	12.63	34.63	259	181	A	H
	*	5670	106.39	-	-	93.15	35.08	12.88	34.72	259	181	P	H
	*	5670	99.86	-	-	86.62	35.08	12.88	34.72	259	181	A	H
		5733.675	52.57	-15.63	68.2	39.15	35.2	12.97	34.75	259	181	P	H
		5384.65	49.76	-24.24	74	37.12	34.73	12.55	34.64	290	180	P	V
		5469.7	47.96	-20.24	68.2	35.15	34.8	12.64	34.63	290	180	P	V
		5452.55	40.9	-13.1	54	28.11	34.8	12.62	34.63	290	180	A	V
	*	5670	113.41	-	-	100.17	35.08	12.88	34.72	290	180	P	V
	*	5670	106.62	-	-	93.38	35.08	12.88	34.72	290	180	A	V
		5729.475	56.19	-12.01	68.2	42.77	35.2	12.97	34.75	290	180	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 102 5510MHz		11020	46.71	-27.29	74	47.83	37.8	19.13	58.05	-	-	P	H	
		16530	49.39	-18.81	68.2	40.37	41.86	23.45	56.29	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11020	46.88	-27.12	74	48	37.8	19.13	58.05	-	-	P	V
			16530	49.98	-18.22	68.2	40.96	41.86	23.45	56.29	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	
													V	
													V	
													V	



WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 110 5550MHz		11100	46.39	-27.61	74	47.18	37.9	19.19	57.88	-	-	P	H	
		16650	49.23	-18.97	68.2	39.73	42.1	23.52	56.12	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11100	46.55	-27.45	74	47.34	37.9	19.19	57.88	-	-	P	V
			16650	50.36	-17.84	68.2	40.86	42.1	23.52	56.12	-	-	P	V
														V
														V
														V
														V
														V
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 134 5670MHz		11340	46.79	-27.21	74	46.63	38.18	19.36	57.38	-	-	P	H	
		17010	50.6	-17.6	68.2	40.54	41.92	23.77	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
	802.11ax HE40 Full CH 134 5670MHz		11340	46.03	-27.97	74	45.87	38.18	19.36	57.38	-	-	P	V
			17010	50.44	-17.76	68.2	40.38	41.92	23.77	55.63	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 5470~5725MHz
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/61 CH 102 5510MHz		5442.88	50.81	-23.19	74	38.04	34.79	12.61	34.63	100	205	P	H
		5463.52	51.37	-16.83	68.2	38.57	34.8	12.63	34.63	100	205	P	H
		5453.68	42.23	-11.77	54	29.44	34.8	12.62	34.63	100	205	A	H
	*	5510	105.45	-	-	92.62	34.78	12.68	34.63	100	205	P	H
	*	5510	99.74	-	-	86.91	34.78	12.68	34.63	100	205	A	H
		5732.555	50.26	-17.94	68.2	36.84	35.2	12.97	34.75	100	205	P	H
		5452.96	52.71	-21.29	74	39.92	34.8	12.62	34.63	100	196	P	V
		5466.64	53.83	-14.37	68.2	41.03	34.8	12.63	34.63	100	196	P	V
		5454.4	43.58	-10.42	54	30.79	34.8	12.62	34.63	100	196	A	V
	*	5510	109.43	-	-	96.6	34.78	12.68	34.63	100	196	P	V
	*	5510	103.78	-	-	90.95	34.78	12.68	34.63	100	196	A	V
		5734.13	50.11	-18.09	68.2	36.69	35.2	12.97	34.75	100	196	P	V
802.11ax HE40 Partial 242/62 CH 134 5670MHz		5392	49.53	-24.47	74	36.9	34.72	12.55	34.64	100	228	P	H
		5464.45	49.82	-18.38	68.2	37.02	34.8	12.63	34.63	100	228	P	H
		5458.5	40.5	-13.5	54	27.71	34.8	12.62	34.63	100	228	A	H
	*	5670	106.61	-	-	93.37	35.08	12.88	34.72	100	228	P	H
	*	5670	100.62	-	-	87.38	35.08	12.88	34.72	100	228	A	H
		5729.3	53.04	-15.16	68.2	39.62	35.2	12.97	34.75	100	228	P	H
		5379.75	50.29	-23.71	74	37.64	34.74	12.55	34.64	100	190	P	V
		5460.95	48.37	-19.83	68.2	35.57	34.8	12.63	34.63	100	190	P	V
		5459.2	40.9	-13.1	54	28.1	34.8	12.63	34.63	100	190	A	V
	*	5670	111.34	-	-	98.1	35.08	12.88	34.72	100	190	P	V
*	5670	105.71	-	-	92.47	35.08	12.88	34.72	100	190	A	V	
	5741.55	53.26	-14.94	68.2	39.83	35.2	12.99	34.76	100	190	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ax HE40 Partial 242 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Partial 242/61 CH 102 5510MHz		11020	45.3	-28.7	74	46.67	37.8	19.13	58.3	-	-	P	H	
		16530	49.65	-18.55	68.2	40.81	41.86	23.45	56.47	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11020	45.48	-28.52	74	46.85	37.8	19.13	58.3	-	-	P	V
			16530	49.85	-18.35	68.2	41.01	41.86	23.45	56.47	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 134 5670MHz		11340	46.2	-27.8	74	46.07	38.18	19.36	57.41	-	-	P	H
		17010	50.76	-17.44	68.2	41.43	41.92	23.77	56.36	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	Remark	1. No other spurious found.											
2. All results are PASS against Peak and Average limit line.													
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 3 5470~5725MHz
WIFI 802.11ax HE80 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 106 5530MHz		5457.52	52.61	-21.39	74	39.82	34.8	12.62	34.63	230	173	P	H
		5467.6	52.68	-15.52	68.2	39.88	34.8	12.63	34.63	230	173	P	H
		5457.28	44.07	-9.93	54	31.28	34.8	12.62	34.63	230	173	A	H
	*	5530	100.5	-	-	87.7	34.74	12.7	34.64	230	173	P	H
	*	5530	93.35	-	-	80.55	34.74	12.7	34.64	230	173	A	H
		5736.02	49.98	-18.22	68.2	36.55	35.2	12.98	34.75	230	173	P	H
		5446.96	55.45	-18.55	74	42.68	34.79	12.61	34.63	106	184	P	V
		5466.64	53.62	-14.58	68.2	40.82	34.8	12.63	34.63	106	184	P	V
		5456.32	46.38	-7.62	54	33.59	34.8	12.62	34.63	106	184	A	V
	*	5530	104.41	-	-	91.61	34.74	12.7	34.64	106	184	P	V
	*	5530	97.15	-	-	84.35	34.74	12.7	34.64	106	184	A	V
	5759.645	49.86	-18.34	68.2	36.42	35.2	13.01	34.77	106	184	P	V	
802.11ax HE80 Full CH 122 5610MHz		5455	49.79	-24.21	74	37	34.8	12.62	34.63	100	223	P	H
		5469	49.21	-18.99	68.2	36.4	34.8	12.64	34.63	100	223	P	H
		5459.2	41.3	-12.7	54	28.5	34.8	12.63	34.63	100	223	A	H
	*	5610	102.57	-	-	89.7	34.76	12.79	34.68	100	223	P	H
	*	5610	96.46	-	-	83.59	34.76	12.79	34.68	100	223	A	H
		5739.45	50.96	-17.24	68.2	37.53	35.2	12.98	34.75	100	223	P	H
		5453.6	53.44	-20.56	74	40.65	34.8	12.62	34.63	100	190	P	V
		5465.15	53.6	-14.6	68.2	40.8	34.8	12.63	34.63	100	190	P	V
		5452.9	44.08	-9.92	54	31.29	34.8	12.62	34.63	100	190	A	V
	*	5610	108.35	-	-	95.48	34.76	12.79	34.68	100	190	P	V
	*	5610	100.78	-	-	87.91	34.76	12.79	34.68	100	190	A	V
	5725.45	51.86	-16.34	68.2	38.45	35.2	12.96	34.75	100	190	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz

WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE80 Full CH 106 5530MHz		11060	44.82	-29.18	74	46.03	37.82	19.16	58.19	-	-	P	H	
		16590	49.02	-19.18	68.2	40.29	41.7	23.49	56.46	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11060	44.4	-29.6	74	45.61	37.82	19.16	58.19	-	-	P	V
			16590	48.44	-19.76	68.2	39.71	41.7	23.49	56.46	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	



WiFi Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 122 5610MHz		11220	44.23	-29.77	74	44.77	37.94	19.27	57.75	-	-	P	H
		16830	49.58	-18.62	68.2	40.04	42.3	23.65	56.41	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	Remark	1. No other spurious found.											
2. All results are PASS against Peak and Average limit line.													
3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 3 5470~5725MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 114 5570MHz		5420.8	56.21	-17.79	74	43.52	34.74	12.58	34.63	280	189	P	H
		5461.12	52.07	-16.13	68.2	39.27	34.8	12.63	34.63	280	189	P	H
		5421.52	47.9	-6.1	54	35.21	34.74	12.58	34.63	280	189	A	H
	*	5570	96.45	-	-	83.66	34.7	12.75	34.66	280	189	P	H
	*	5570	87.87	-	-	75.08	34.7	12.75	34.66	280	189	A	H
		5733.5	52.3	-15.9	68.2	38.88	35.2	12.97	34.75	280	189	P	H
		5399.92	60.33	-13.67	74	47.71	34.7	12.56	34.64	117	176	P	V
		5462.32	55.13	-13.07	68.2	42.33	34.8	12.63	34.63	117	176	P	V
		5432.08	52.03	-1.97	54	39.3	34.76	12.6	34.63	117	176	A	V
	*	5570	99.44	-	-	86.65	34.7	12.75	34.66	117	176	P	V
	*	5570	92.04	-	-	79.25	34.7	12.75	34.66	117	176	A	V
		5726.885	59.09	-9.11	68.2	45.68	35.2	12.96	34.75	117	176	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE160 Full CH 114 5570MHz		11140	44.46	-29.54	74	45.39	37.82	19.22	57.97	-	-	P	H	
		16710	48.57	-19.63	68.2	39.22	42.22	23.57	56.44	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11140	45.27	-28.73	74	46.2	37.82	19.22	57.97	-	-	P	V
			16710	49.41	-18.79	68.2	40.06	42.22	23.57	56.44	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 3 - Straddle Channel
WIFI 802.11a (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a CH 144 5720MHz		5405.38	49.97	-24.03	74	37.33	34.71	12.57	34.64	100	229	P	H
		5469.73	49.84	-18.36	68.2	37.03	34.8	12.64	34.63	100	229	P	H
		5455.3	40.31	-13.69	54	27.52	34.8	12.62	34.63	100	229	A	H
	*	5720	108	-	-	94.59	35.2	12.95	34.74	100	229	P	H
	*	5720	101.82	-	-	88.41	35.2	12.95	34.74	100	229	A	H
		5929.75	51.83	-16.37	68.2	38.48	35.04	13.17	34.86	100	229	P	H
		5447.89	50.2	-23.8	74	37.42	34.8	12.61	34.63	100	182	P	V
		5468.95	50.02	-18.18	68.2	37.21	34.8	12.64	34.63	100	182	P	V
		5412.01	40.46	-13.54	54	27.81	34.72	12.57	34.64	100	182	A	V
	*	5720	113.87	-	-	100.46	35.2	12.95	34.74	100	182	P	V
	*	5720	106.41	-	-	93	35.2	12.95	34.74	100	182	A	V
			5870.5	51.92	-16.28	68.2	38.58	35.04	13.13	34.83	100	182	P
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11a (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11a CH 144 5720MHz		11440	46.3	-27.7	74	45.92	38.12	19.43	57.17	-	-	P	H	
		17160	50.89	-17.31	68.2	41.08	41.58	23.86	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11440	45.91	-28.09	74	45.53	38.12	19.43	57.17	-	-	P	V
			17160	50.93	-17.27	68.2	41.12	41.58	23.86	55.63	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 - Straddle Channel
WIFI 802.11ac VHT20 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT20 CH 144 5720MHz		5451.01	49.76	-24.24	74	36.97	34.8	12.62	34.63	263	181	P	H
		5465.83	48.62	-19.58	68.2	35.82	34.8	12.63	34.63	263	181	P	H
		5459.2	40.35	-13.65	54	27.55	34.8	12.63	34.63	263	181	A	H
	*	5720	106.11	-	-	92.7	35.2	12.95	34.74	263	181	P	H
	*	5720	100.4	-	-	86.99	35.2	12.95	34.74	263	181	A	H
		5912.75	50.88	-17.32	68.2	37.5	35.07	13.16	34.85	263	181	P	H
		5420.98	49.35	-24.65	74	36.66	34.74	12.58	34.63	287	179	P	V
		5465.05	49.1	-19.1	68.2	36.3	34.8	12.63	34.63	287	179	P	V
		5412.01	40.71	-13.29	54	28.06	34.72	12.57	34.64	287	179	A	V
	*	5720	114.31	-	-	100.9	35.2	12.95	34.74	287	179	P	V
	*	5720	107.49	-	-	94.08	35.2	12.95	34.74	287	179	A	V
		5875.75	52.15	-16.05	68.2	38.8	35.05	13.13	34.83	287	179	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ac VHT20 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBµV/m)	Margin (dB)	Limit Line (dBµV/m)	Read Level (dBµV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT20 CH 144 5720MHz		11440	46.31	-27.69	74	45.93	38.12	19.43	57.17	-	-	P	H	
		17160	50.75	-17.45	68.2	40.94	41.58	23.86	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11440	46.22	-27.78	74	45.84	38.12	19.43	57.17	-	-	P	V
			17160	51.16	-17.04	68.2	41.35	41.58	23.86	55.63	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 - Straddle Channel
WIFI 802.11ac VHT40 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT40 CH 142 5710MHz		5429.56	48.88	-25.12	74	36.16	34.76	12.59	34.63	279	189	P	H
		5464.66	47.95	-20.25	68.2	35.15	34.8	12.63	34.63	279	189	P	H
		5459.59	39.68	-14.32	54	26.88	34.8	12.63	34.63	279	189	A	H
	*	5710	106.96	-	-	93.56	35.2	12.94	34.74	279	189	P	H
	*	5710	100.22	-	-	86.82	35.2	12.94	34.74	279	189	A	H
		5946	50.38	-17.82	68.2	37.05	35.01	13.19	34.87	279	189	P	H
		5425.27	49.45	-24.55	74	36.74	34.75	12.59	34.63	291	184	P	V
		5467.39	49.06	-19.14	68.2	36.26	34.8	12.63	34.63	291	184	P	V
		5459.59	40.11	-13.89	54	27.31	34.8	12.63	34.63	291	184	A	V
	*	5710	113.99	-	-	100.59	35.2	12.94	34.74	291	184	P	V
	*	5710	106.26	-	-	92.86	35.2	12.94	34.74	291	184	A	V
		5864.75	50.95	-17.25	68.2	37.62	35.03	13.12	34.82	291	184	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ac VHT40 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT40 CH 142 5710MHz		11420	46.05	-27.95	74	45.69	38.16	19.42	57.22	-	-	P	H	
		17130	50.17	-18.03	68.2	40.27	41.68	23.85	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11420	46.62	-27.38	74	46.26	38.16	19.42	57.22	-	-	P	V
			17130	51.23	-16.97	68.2	41.33	41.68	23.85	55.63	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



**Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ac VHT80 CH 138 5690MHz		5417.47	51.3	-22.7	74	38.62	34.73	12.58	34.63	100	230	P	H
		5461.93	49.08	-19.12	68.2	36.28	34.8	12.63	34.63	100	230	P	H
		5459.59	40.57	-13.43	54	27.77	34.8	12.63	34.63	100	230	A	H
	*	5690	104.36	-	-	91.02	35.16	12.91	34.73	100	230	P	H
	*	5690	98.63	-	-	85.29	35.16	12.91	34.73	100	230	A	H
		5895.4	52.4	-15.8	68.2	39	35.09	13.15	34.84	100	230	P	H
		5418.64	51.08	-22.92	74	38.39	34.74	12.58	34.63	289	183	P	V
		5466.22	51.06	-17.14	68.2	38.26	34.8	12.63	34.63	289	183	P	V
		5457.25	42.47	-11.53	54	29.68	34.8	12.62	34.63	289	183	A	V
	*	5690	112.09	-	-	98.75	35.16	12.91	34.73	289	183	P	V
	*	5690	105.01	-	-	91.67	35.16	12.91	34.73	289	183	A	V
	5899	51.68	-16.52	68.2	38.27	35.1	13.15	34.84	289	183	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ac VHT80 (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ac VHT80 CH 138 5690MHz		11380	46	-28	74	45.71	38.2	19.39	57.3	-	-	P	H	
		17070	50.33	-17.87	68.2	40.24	41.92	23.8	55.63	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11380	46.45	-27.55	74	46.16	38.2	19.39	57.3	-	-	P	V
			17070	49.89	-18.31	68.2	39.8	41.92	23.8	55.63	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Band 3 - Straddle Channel
WIFI 802.11ax HE20 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 144 5720MHz		5424.88	49.12	-24.88	74	36.41	34.75	12.59	34.63	100	229	P	H
		5463.88	47.71	-20.49	68.2	34.91	34.8	12.63	34.63	100	229	P	H
		5458.81	40.31	-13.69	54	27.52	34.8	12.62	34.63	100	229	A	H
	*	5720	107.83	-	-	94.42	35.2	12.95	34.74	100	229	P	H
	*	5720	101.58	-	-	88.17	35.2	12.95	34.74	100	229	A	H
		5940	51.44	-16.76	68.2	38.11	35.02	13.18	34.87	100	229	P	H
		5415.13	50.17	-23.83	74	37.5	34.73	12.58	34.64	313	180	P	V
		5468.17	48.68	-19.52	68.2	35.88	34.8	12.63	34.63	313	180	P	V
		5412.01	40.72	-13.28	54	28.07	34.72	12.57	34.64	313	180	A	V
	*	5720	114.12	-	-	100.71	35.2	12.95	34.74	313	180	P	V
	*	5720	107.56	-	-	94.15	35.2	12.95	34.74	313	180	A	V
	5904	51.83	-16.37	68.2	38.44	35.09	13.15	34.85	313	180	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ax HE20 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Full CH 144 5720MHz		11440	46.72	-27.28	74	46.34	38.12	19.43	57.17	-	-	P	H
		17160	50.83	-17.37	68.2	41.02	41.58	23.86	55.63	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	802.11ax HE20 Full CH 144 5720MHz		11440	46.14	-27.86	74	45.76	38.12	19.43	57.17	-	-	P
		17160	50.71	-17.49	68.2	40.9	41.58	23.86	55.63	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Band 3 Straddle Channel
WIFI 802.11ax HE20 Partial 26 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 26/8 CH 144 5720MHz		5357.8	48.92	-25.08	74	36.26	34.78	12.53	34.65	100	229	P	H
		5462.32	48.37	-19.83	68.2	35.57	34.8	12.63	34.63	100	229	P	H
		5459.98	40.35	-13.65	54	27.55	34.8	12.63	34.63	100	229	A	H
	*	5720	105.71	-	-	92.3	35.2	12.95	34.74	100	229	P	H
	*	5720	100.89	-	-	87.48	35.2	12.95	34.74	100	229	A	H
		5904	51.74	-16.46	68.2	38.35	35.09	13.15	34.85	100	229	P	H
		5442.82	50.11	-23.89	74	37.34	34.79	12.61	34.63	157	182	P	V
		5469.73	48.93	-19.27	68.2	36.12	34.8	12.64	34.63	157	182	P	V
		5458.42	40.41	-13.59	54	27.62	34.8	12.62	34.63	157	182	A	V
	*	5720	107.69	-	-	94.28	35.2	12.95	34.74	157	182	P	V
	*	5720	103.96	-	-	90.55	35.2	12.95	34.74	157	182	A	V
		5937.25	51.71	-16.49	68.2	38.36	35.03	13.18	34.86	157	182	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 Straddle Channel
WIFI 802.11ax HE20 Partial 26 (Harmonic @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE20 Partial 26/8 CH 144 5720MHz		11440	46.24	-27.76	74	45.83	38.12	19.43	57.14	-	-	P	H	
		17160	49.79	-18.41	68.2	40.47	41.58	23.86	56.12	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11440	44.78	-29.22	74	44.37	38.12	19.43	57.14	-	-	P	V
			17160	49.15	-19.05	68.2	39.83	41.58	23.86	56.12	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Band 3 Straddle Channel
WIFI 802.11ax HE20 Partial 52 (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 52/40 CH 144 5720MHz		5389.39	49.83	-24.17	74	37.2	34.72	12.55	34.64	100	229	P	H
		5468.17	48.59	-19.61	68.2	35.79	34.8	12.63	34.63	100	229	P	H
		5459.98	40.35	-13.65	54	27.55	34.8	12.63	34.63	100	229	A	H
	*	5720	107.25	-	-	93.84	35.2	12.95	34.74	100	229	P	H
	*	5720	100.88	-	-	87.47	35.2	12.95	34.74	100	229	A	H
		5927.75	50.81	-17.39	68.2	37.46	35.04	13.17	34.86	100	229	P	H
		5432.68	49.82	-24.18	74	37.08	34.77	12.6	34.63	100	189	P	V
		5467.39	48.96	-19.24	68.2	36.16	34.8	12.63	34.63	100	189	P	V
		5458.81	40.47	-13.53	54	27.68	34.8	12.62	34.63	100	189	A	V
	*	5720	109.88	-	-	96.47	35.2	12.95	34.74	100	189	P	V
	*	5720	104.5	-	-	91.09	35.2	12.95	34.74	100	189	A	V
		5861.75	51.68	-16.52	68.2	38.36	35.02	13.12	34.82	100	189	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 Straddle Channel
WIFI 802.11ax HE20 Partial 106 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE20 Partial 106/54 CH 144 5720MHz		5429.17	49.97	-24.03	74	37.25	34.76	12.59	34.63	100	217	P	H
		5464.66	49.46	-18.74	68.2	36.66	34.8	12.63	34.63	100	217	P	H
		5453.35	40.37	-13.63	54	27.58	34.8	12.62	34.63	100	217	A	H
	*	5720	108.19	-	-	94.78	35.2	12.95	34.74	100	217	P	H
	*	5720	101.56	-	-	88.15	35.2	12.95	34.74	100	217	A	H
		5906.25	52.11	-16.09	68.2	38.72	35.09	13.15	34.85	100	217	P	H
		5363.65	49.89	-24.11	74	37.23	34.77	12.53	34.64	102	194	P	V
		5469.34	49.53	-18.67	68.2	36.72	34.8	12.64	34.63	102	194	P	V
		5459.2	40.41	-13.59	54	27.61	34.8	12.63	34.63	102	194	A	V
	*	5720	111.56	-	-	98.15	35.2	12.95	34.74	102	194	P	V
	*	5720	106.06	-	-	92.65	35.2	12.95	34.74	102	194	A	V
		5947	51.62	-16.58	68.2	38.29	35.01	13.19	34.87	102	194	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ax HE40 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Full CH 142 5710MHz		5420.2	48.94	-25.06	74	36.25	34.74	12.58	34.63	276	185	P	H
		5463.1	50.29	-17.91	68.2	37.49	34.8	12.63	34.63	276	185	P	H
		5459.59	40.49	-13.51	54	27.69	34.8	12.63	34.63	276	185	A	H
	*	5710	107.24	-	-	93.84	35.2	12.94	34.74	276	185	P	H
	*	5710	99.68	-	-	86.28	35.2	12.94	34.74	276	185	A	H
		5911.75	52.08	-16.12	68.2	38.69	35.08	13.16	34.85	276	185	P	H
		5401.48	50.38	-23.62	74	37.76	34.7	12.56	34.64	262	172	P	V
		5464.27	49.92	-18.28	68.2	37.12	34.8	12.63	34.63	262	172	P	V
		5451.79	40.63	-13.37	54	27.84	34.8	12.62	34.63	262	172	A	V
	*	5710	113.67	-	-	100.27	35.2	12.94	34.74	262	172	P	V
	*	5710	105.23	-	-	91.83	35.2	12.94	34.74	262	172	A	V
		5880.25	52.95	-15.25	68.2	39.59	35.06	13.13	34.83	262	172	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ax HE40 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Full CH 142 5710MHz		11420	45.28	-28.72	74	44.89	38.16	19.42	57.19	-	-	P	H	
		17130	50.11	-18.09	68.2	40.75	41.68	23.85	56.17	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11420	45.55	-28.45	74	45.16	38.16	19.42	57.19	-	-	P	V
			17130	49.23	-18.97	68.2	39.87	41.68	23.85	56.17	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



**Band 3 Straddle Channel
WIFI 802.11ax HE40 Partial 242 (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE40 Partial 242/62 CH 142 5710MHz		5441.65	48.99	-25.01	74	36.23	34.78	12.61	34.63	100	218	P	H
		5466.22	48.74	-19.46	68.2	35.94	34.8	12.63	34.63	100	218	P	H
		5459.59	40.52	-13.48	54	27.72	34.8	12.63	34.63	100	218	A	H
	*	5710	108.6	-	-	95.2	35.2	12.94	34.74	100	218	P	H
	*	5710	102.45	-	-	89.05	35.2	12.94	34.74	100	218	A	H
		5920.25	51.76	-16.44	68.2	38.39	35.06	13.17	34.86	100	218	P	H
		5393.29	49.46	-24.54	74	36.83	34.71	12.56	34.64	100	178	P	V
		5463.88	48.8	-19.4	68.2	36	34.8	12.63	34.63	100	178	P	V
		5459.98	40.81	-13.19	54	28.01	34.8	12.63	34.63	100	178	A	V
	*	5710	113.59	-	-	100.19	35.2	12.94	34.74	100	178	P	V
	*	5710	107.43	-	-	94.03	35.2	12.94	34.74	100	178	A	V
	5864.5	53.06	-15.14	68.2	39.73	35.03	13.12	34.82	100	178	P	V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**Band 3 Straddle Channel
WIFI 802.11ax HE40 Partial 242 (Harmonic @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE40 Partial 242/62 CH 142 5710MHz		11420	46.81	-27.19	74	46.42	38.16	19.42	57.19	-	-	P	H	
		17130	50.42	-17.78	68.2	41.06	41.68	23.85	56.17	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
	Remark	1. No other spurious found.												
		2. All results are PASS against Peak and Average limit line.												
	3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



**Band 3 - Straddle Channel
WIFI 802.11ax HE80 Full (Band Edge @ 3m)**

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE80 Full CH 138 5690MHz		5459.59	51.27	-22.73	74	38.47	34.8	12.63	34.63	100	223	P	H
		5468.17	48.72	-19.48	68.2	35.92	34.8	12.63	34.63	100	223	P	H
		5459.98	40.67	-13.33	54	27.87	34.8	12.63	34.63	100	223	A	H
	*	5690	106.8	-	-	93.46	35.16	12.91	34.73	100	223	P	H
	*	5690	99.04	-	-	85.7	35.16	12.91	34.73	100	223	A	H
		5852.2	51.74	-16.46	68.2	38.45	35	13.11	34.82	100	223	P	H
		5435.02	50.49	-23.51	74	37.75	34.77	12.6	34.63	338	180	P	V
		5461.54	49	-19.2	68.2	36.2	34.8	12.63	34.63	338	180	P	V
		5446.33	40.85	-13.15	54	28.08	34.79	12.61	34.63	338	180	A	V
	*	5690	110.39	-	-	97.05	35.16	12.91	34.73	338	180	P	V
	*	5690	103.54	-	-	90.2	35.16	12.91	34.73	338	180	A	V
		5856.1	52.86	-15.34	68.2	39.56	35.01	13.11	34.82	338	180	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 - Straddle Channel
WIFI 802.11ax HE80 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE80 Full CH 138 5690MHz		11380	44.6	-29.4	74	44.31	38.2	19.39	57.3	-	-	P	H	
		17070	49.72	-18.48	68.2	40.27	41.92	23.8	56.27	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission above 18GHz

WIFI 802.11ax HE160 Full (SHF @ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE160 Full SHF		37184	44.89	-23.31	68.2	49.64	42.93	13.96	61.64	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			39384	45.54	-28.46	74	46.56	43.73	14.68	59.43	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

WIFI 802.11ax HE160 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE160 Full LF		30	29.65	-10.35	40	34.23	24.29	1.07	29.94	-	-	P	H	
		160.68	30.51	-12.99	43.5	41.68	16.3	2.37	29.84	-	-	P	H	
		214.14	36.24	-7.26	43.5	48.45	14.92	2.7	29.83	-	-	P	H	
		834.8	31.43	-14.57	46	27.55	27.92	5.16	29.2	-	-	P	H	
		892.2	32.76	-13.24	46	28.18	28.21	5.26	28.89	-	-	P	H	
		953.8	33.06	-12.94	46	26.97	29.32	5.41	28.64	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			30.27	32.76	-7.24	40	37.42	24.21	1.07	29.94	-	-	P	V
			41.34	29.41	-10.59	40	39.05	19.04	1.24	29.92	-	-	P	V
			51.6	28.71	-11.29	40	43.47	13.77	1.39	29.92	-	-	P	V
			773.9	30.29	-15.71	46	27.23	27.51	4.93	29.38	-	-	P	V
			874.7	32.38	-13.62	46	27.95	28.19	5.25	29.01	-	-	P	V
			955.2	32.82	-13.18	46	26.51	29.53	5.41	28.63	-	-	P	V
														V
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. 													



<Sample 2>

Band 3 - 5470~5725MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 114 5570MHz		5414.08	59.44	-14.56	74	46.77	34.73	12.58	34.64	217	180	P	H
		5464.24	55.97	-12.23	68.2	43.17	34.8	12.63	34.63	217	180	P	H
		5424.4	49.85	-4.15	54	37.14	34.75	12.59	34.63	217	180	A	H
	*	5570	96.17	-	-	83.38	34.7	12.75	34.66	217	180	P	H
	*	5570	89.29	-	-	76.5	34.7	12.75	34.66	217	180	A	H
		5726.255	54.18	-14.02	68.2	40.77	35.2	12.96	34.75	217	180	P	H
		5432.8	61.5	-12.5	74	48.76	34.77	12.6	34.63	119	174	P	V
		5462.32	58.13	-10.07	68.2	45.33	34.8	12.63	34.63	119	174	P	V
		5422.48	52.58	-1.42	54	39.89	34.74	12.58	34.63	119	174	A	V
	*	5570	101.46	-	-	88.67	34.7	12.75	34.66	119	174	P	V
	*	5570	93.1	-	-	80.31	34.7	12.75	34.66	119	174	A	V
		5734.13	57.66	-10.54	68.2	44.24	35.2	12.97	34.75	119	174	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE160 Full CH 114 5570MHz		11140	44.99	-29.01	74	45.92	37.82	19.22	57.97	-	-	P	H	
		16710	50.48	-17.72	68.2	41.13	42.22	23.57	56.44	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11140	46.02	-27.98	74	46.95	37.82	19.22	57.97	-	-	P	V
			16710	49.9	-18.3	68.2	40.55	42.22	23.57	56.44	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.													



Emission above 18GHz

WIFI 802.11ax HE160 Full (SHF @ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE160 Full SHF		36150	44.72	-23.48	68.2	49.93	42.9	13.72	61.83	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			37382	44.65	-23.55	68.2	49.56	42.76	14.01	61.68	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

WIFI 802.11ax HE160 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE160 Full LF		88.86	25.25	-18.25	43.5	38.86	14.51	1.79	29.91	-	-	P	H	
		162.57	28.25	-15.25	43.5	39.58	16.13	2.38	29.84	-	-	P	H	
		219	36.24	-9.76	46	48.19	15.15	2.73	29.83	-	-	P	H	
		420.4	31.21	-14.79	46	35.1	22.24	3.67	29.8	-	-	P	H	
		808.2	30.98	-15.02	46	28.01	27.19	5.04	29.26	-	-	P	H	
		946.1	33.24	-12.76	46	27.27	29.28	5.38	28.69	-	-	P	H	
														H
														H
														H
														H
														H
														H
														H
			30.27	32.77	-7.23	40	37.43	24.21	1.07	29.94	-	-	P	V
			41.34	30.47	-9.53	40	40.11	19.04	1.24	29.92	-	-	P	V
			51.06	28.19	-11.81	40	42.71	14.02	1.38	29.92	-	-	P	V
			745.9	30.78	-15.22	46	28.24	27.18	4.85	29.49	-	-	P	V
			885.9	32.8	-13.2	46	28.5	27.97	5.26	28.93	-	-	P	V
			955.2	32.84	-13.16	46	26.53	29.53	5.41	28.63	-	-	P	V
														V
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



<Sample 3>

Band 3 - 5470~5725MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 114 5570MHz		5426.32	58.66	-15.34	74	45.95	34.75	12.59	34.63	106	172	P	H
		5467.84	52.85	-15.35	68.2	40.05	34.8	12.63	34.63	106	172	P	H
		5427.28	49.72	-4.28	54	37.01	34.75	12.59	34.63	106	172	A	H
	*	5570	97.45	-	-	84.66	34.7	12.75	34.66	106	172	P	H
	*	5570	89.24	-	-	76.45	34.7	12.75	34.66	106	172	A	H
		5746.415	52.21	-15.99	68.2	38.78	35.2	12.99	34.76	106	172	P	H
		5433.04	62.08	-11.92	74	49.34	34.77	12.6	34.63	116	170	P	V
		5462.56	57.22	-10.98	68.2	44.42	34.8	12.63	34.63	116	170	P	V
		5433.52	52.75	-1.25	54	40.01	34.77	12.6	34.63	116	170	A	V
	*	5570	101.6	-	-	88.81	34.7	12.75	34.66	116	170	P	V
	*	5570	94	-	-	81.21	34.7	12.75	34.66	116	170	A	V
		5734.76	57.27	-10.93	68.2	43.84	35.2	12.98	34.75	116	170	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)	
802.11ax HE160 Full CH 114 5570MHz		11140	44.36	-29.64	74	45.29	37.82	19.22	57.97	-	-	P	H	
		16710	50.21	-17.99	68.2	40.86	42.22	23.57	56.44	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			11140	44.86	-29.14	74	45.79	37.82	19.22	57.97	-	-	P	V
			16710	49.42	-18.78	68.2	40.07	42.22	23.57	56.44	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Emission above 18GHz

WIFI 802.11ax HE160 Full (SHF @ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11ax HE160 Full SHF		37228	44.5	-23.7	68.2	49.45	42.73	13.97	61.65	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			37074	45.29	-22.91	68.2	49.8	43.16	13.94	61.61	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
Remark	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

WIFI 802.11ax HE160 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE160 Full LF		88.59	25.03	-18.47	43.5	38.67	14.48	1.79	29.91	-	-	P	H	
		176.88	30.17	-13.33	43.5	42.42	15.09	2.49	29.83	-	-	P	H	
		214.14	35.74	-7.76	43.5	47.95	14.92	2.7	29.83	-	-	P	H	
		470.8	31.05	-14.95	46	33.97	22.97	3.9	29.79	-	-	P	H	
		867	32.22	-13.78	46	27.96	28.08	5.24	29.06	-	-	P	H	
		944.7	34.62	-11.38	46	28.72	29.22	5.38	28.7	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30.54	30.93	-9.07	40	35.66	24.13	1.08	29.94	-	-	P	V
			43.23	26.99	-13.01	40	37.64	18.01	1.27	29.93	-	-	P	V
			51.06	26.86	-13.14	40	41.38	14.02	1.38	29.92	-	-	P	V
			745.9	29.98	-16.02	46	27.44	27.18	4.85	29.49	-	-	P	V
			851.6	32.37	-13.63	46	27.76	28.54	5.23	29.16	-	-	P	V
			957.3	32.86	-13.14	46	26.37	29.68	5.42	28.61	-	-	P	V
													V	
													V	
													V	
													V	
													V	
													V	

Remark

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



<Sample 4>

Band 3 - 5470~5725MHz

WIFI 802.11ax HE160 Full (Band Edge @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 114 5570MHz		5400.64	50.91	-23.09	74	38.29	34.7	12.56	34.64	290	181	P	H
		5464.48	51.12	-17.08	68.2	38.32	34.8	12.63	34.63	290	181	P	H
		5453.68	42.93	-11.07	54	30.14	34.8	12.62	34.63	290	181	A	H
	*	5570	97.36	-	-	84.57	34.7	12.75	34.66	290	181	P	H
	*	5570	89.56	-	-	76.77	34.7	12.75	34.66	290	181	A	H
		5725.31	52.23	-15.97	68.2	38.82	35.2	12.96	34.75	290	181	P	H
		5401.12	55.13	-18.87	74	42.51	34.7	12.56	34.64	100	174	P	V
		5462.08	55.43	-12.77	68.2	42.63	34.8	12.63	34.63	100	174	P	V
		5452.48	46.2	-7.8	54	33.41	34.8	12.62	34.63	100	174	A	V
	*	5570	99.73	-	-	86.94	34.7	12.75	34.66	100	174	P	V
	*	5570	93.73	-	-	80.94	34.7	12.75	34.66	100	174	A	V
		5726.57	57.89	-10.31	68.2	44.48	35.2	12.96	34.75	100	174	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



Band 3 5470~5725MHz
WIFI 802.11ax HE160 Full (Harmonic @ 3m)

WIFI Ant. 0+1	Note	Frequency (MHz)	Level (dBμV/m)	Margin (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Path Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11ax HE160 Full CH 114 5570MHz		11140	44.7	-29.3	74	45.63	37.82	19.22	57.97	-	-	P	H
		16710	49.9	-18.3	68.2	40.55	42.22	23.57	56.44	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
	Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.											



Emission above 18GHz

WIFI 802.11ax HE160 Full (SHF @ 1m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE160 Full SHF		37536	44.87	-23.33	68.2	49.46	43.03	14.04	61.66	-	-	P	V	
													H	
													H	
													H	
													H	
													H	
														H
														H
														H
														H
														H
														H
														H
														H
														H
														H
														H
			37030	44.44	-23.76	68.2	48.92	43.2	13.93	61.61	-	-	P	H
														V
														V
													V	
													V	
													V	
													V	
													V	
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only. 													



Emission below 1GHz
WIFI 802.11ax HE160 Full (LF @ 3m)

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.		
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)	
802.11ax HE160 Full LF		30	25.47	-14.53	40	30.05	24.29	1.07	29.94	-	-	P	H	
		176.61	30.45	-13.05	43.5	42.7	15.1	2.48	29.83	-	-	P	H	
		217.11	36.11	-9.89	46	48.21	15.01	2.72	29.83	-	-	P	H	
		722.1	29.82	-16.18	46	28.08	26.53	4.76	29.55	-	-	P	H	
		853	31.9	-14.1	46	27.3	28.52	5.23	29.15	-	-	P	H	
		953.8	32.96	-13.04	46	26.87	29.32	5.41	28.64	-	-	P	H	
														H
														H
														H
														H
														H
														H
			30.27	33.65	-6.35	40	38.31	24.21	1.07	29.94	-	-	P	V
			41.34	29.85	-10.15	40	39.49	19.04	1.24	29.92	-	-	P	V
			65.64	30.39	-9.61	40	46.71	12.04	1.54	29.9	-	-	P	V
			793.5	30.63	-15.37	46	27.92	27.04	4.98	29.31	-	-	P	V
			878.2	31.63	-14.37	46	27.06	28.3	5.25	28.98	-	-	P	V
			956.6	32.8	-13.2	46	26.34	29.66	5.42	28.62	-	-	P	V
														V
														V
													V	
													V	
													V	
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against limit line. The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only. 													



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is Margin line.
P/A	Peak or Average
H/V	Horizontal or Vertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
Ant.					Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
0+1		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11a		5150	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 36		5150	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H
5180MHz													

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) = Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 5150MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
2. Margin (dB)
= Leve(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 5150MHz:

1. Level(dBμV/m)
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
2. Margin (dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54 (dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



Appendix D. Radiated Spurious Emission Plots

Test Engineer :	Jesse Wang, Stan Hsieh and Ken Wu	Temperature :	22.5~25.8°C
		Relative Humidity :	53.3~68.5%





Note symbol

-L	Low channel location
-R	High channel location







<Sample 1>

Band 1 - 5150~5250MHz
WIFI 802.11a (Band Edge @ 3m)

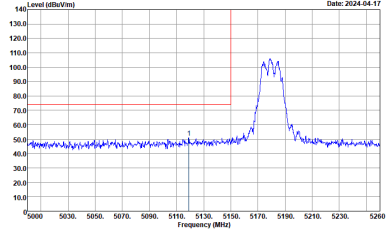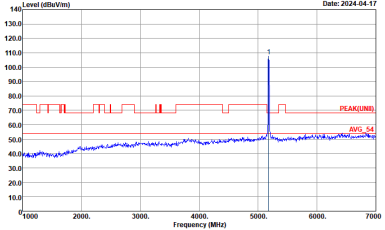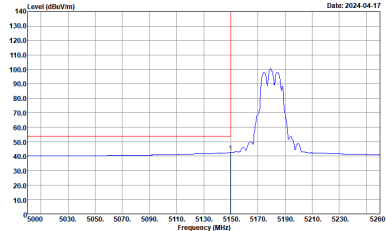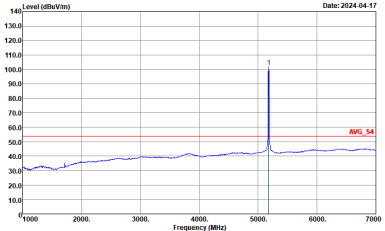WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
0+1	Horizontal	Fundamental
Peak	 <p>Site : 03CH07-HY Condition : : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : : PEAK(LIN)1 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH07-HY Condition : : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>	 <p>Site : 03CH07-HY Condition : : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.0100kHz SWT:Auto</p>

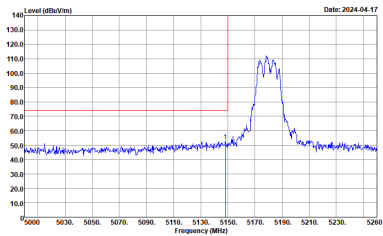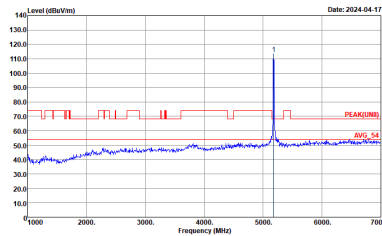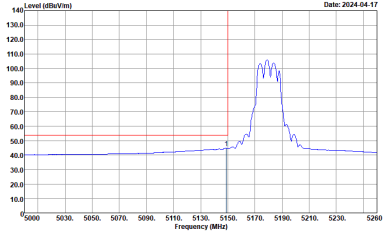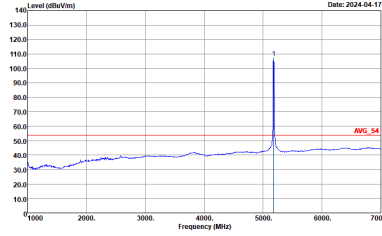

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH36 5180MHz	
0+1	Vertical	Fundamental
Peak	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz; VBW:3000.000kHz; SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK(LINE) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz; VBW:3000.000kHz; SWT:Auto</p>
Avg.	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz; VBW:0.010kHz; SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz; VBW:0.010kHz; SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
0+1	Horizontal	Fundamental
Peak	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK(LINE) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
0+1	Horizontal	Fundamental
<p>Peak</p>		<p>Left blank</p>
<p>Avg.</p>		<p>Left blank</p>







WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - L	
0+1	Vertical	Fundamental
Peak	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK(LINE) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	<p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH44 5220MHz - R	
0+1	Vertical	Fundamental
<p>Peak</p>	<p>Site : 03CH07-HY Condition : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	<p>Site : 03CH07-HY Condition : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>

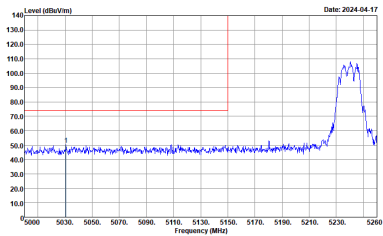
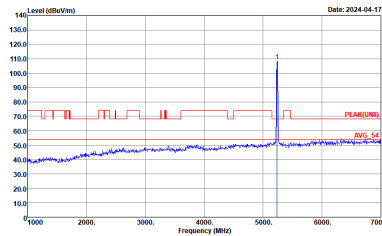
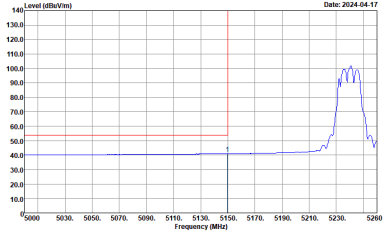
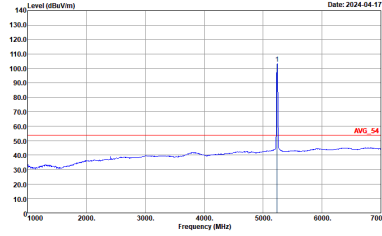


WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
0+1	Horizontal	Fundamental
Peak	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK(FUND) 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>



WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
0+1	Horizontal	Fundamental
<p>Peak</p>		<p>Left blank</p>
<p>Avg.</p>		<p>Left blank</p>

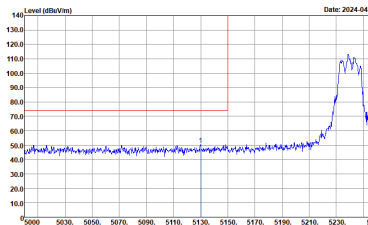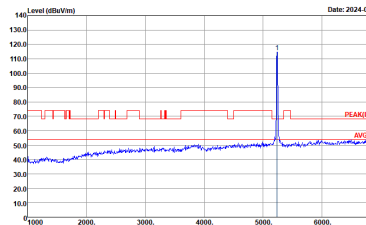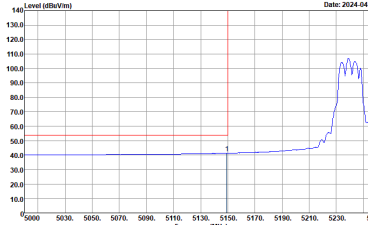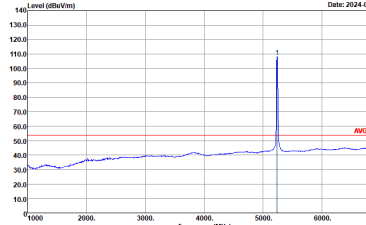





WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - L	
0+1	Vertical	Fundamental
Peak	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK(LIN) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>







WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11a CH48 5240MHz - R	
0+1	Vertical	Fundamental
<p>Peak</p>	<p>Site : 03CH07-HY Condition : : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p>Avg.</p>	<p>Site : 03CH07-HY Condition : : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:5.000kHz SWT:Auto</p>	<p>Left blank</p>



Band 1 5150~5250MHz
WIFI 802.11ac VHT20 (Band Edge @ 3m)

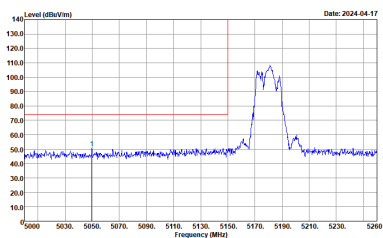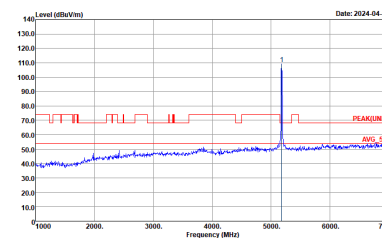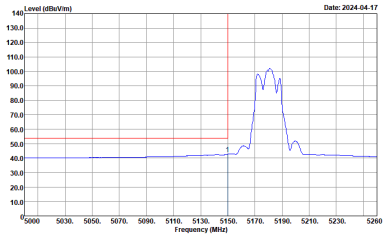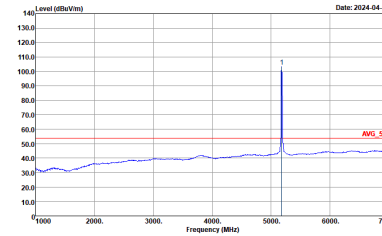WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH36 5180MHz	
0+1	Horizontal	Fundamental
Peak	 <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : PEAK(LIN)I 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWTAuto</p>
Avg.	 <p>Site Condition : 03CH07-HY : AVG_BE_34 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWTAuto</p>	 <p>Site Condition : 03CH07-HY : AVG_34 3m HF_ANT_00075962 HORIZONTAL : RBW:1000.000kHz VBW:0.010kHz SWTAuto</p>

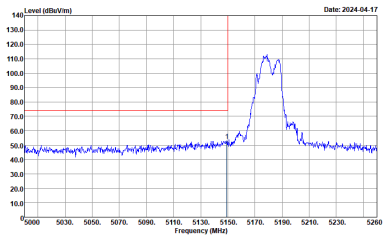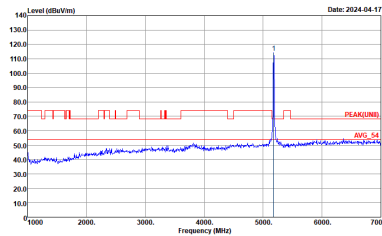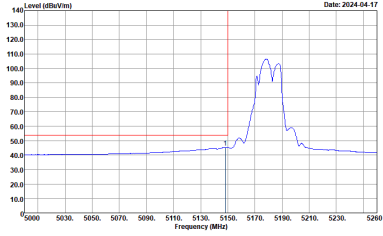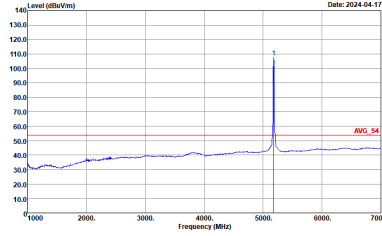

WIFI	Band 1 5150~5250MHz Band Edge @ 3m	
ANT	802.11ac VHT20 CH36 5180MHz	
0+1	Vertical	Fundamental
Peak	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK_BE_74 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : PEAK(FUN) 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_BE_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>	 <p>Date: 2024-04-17</p> <p>Site Condition : 03CH07-HY : AVG_54 3m HF_ANT_00075962 VERTICAL : RBW:1000.000kHz VBW:0.010kHz SWT:Auto</p>