


Product Introduction

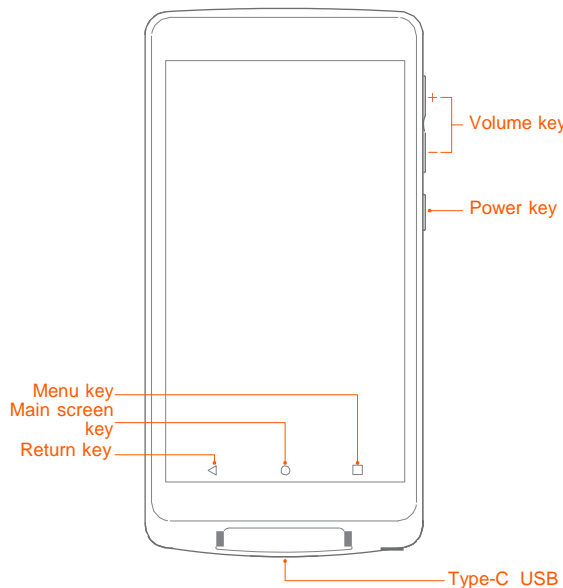

Power key

Short press: light the screen, lock the screen.
Long press: in shutdown mode, long press for 2 to 3 seconds to turn on the device;
in service mode, long press for 2 to 3 seconds, and you can choose to shut down or to reboot;
in crashed mode, long press for 11 seconds to automatically reboot.

Volume key

Adjust the volume

Return key


Click to return to the previous screen

Main screen key

Click to quickly return to the main screen

Menu key

Click to quickly check the program running at the backstage; choose application and sideslip to close this application.

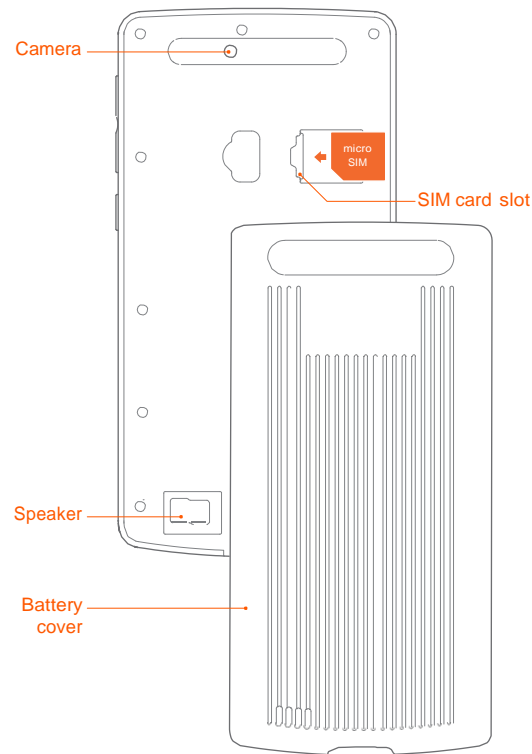

Camera

Used for payment code scanning, supporting 1 D & QR code.

SIM card slot


Note: this slot uses micro-SIM card;
when inserting or taking out SIM card, the device must be always in shutdown mode. If it is inserted or taken out in the state of power-on, it may cause device fault.

Open the battery cover, insert or take out SIM card in the direction as shown in this figure:

Battery Instructions/Points for Attention

This device chooses 3.8V/3000mAh non-removable built-in lithium battery. Please don't disassemble it by yourself.

To ensure the lifetime of this battery, please don't charge it after it has been completely consumed.

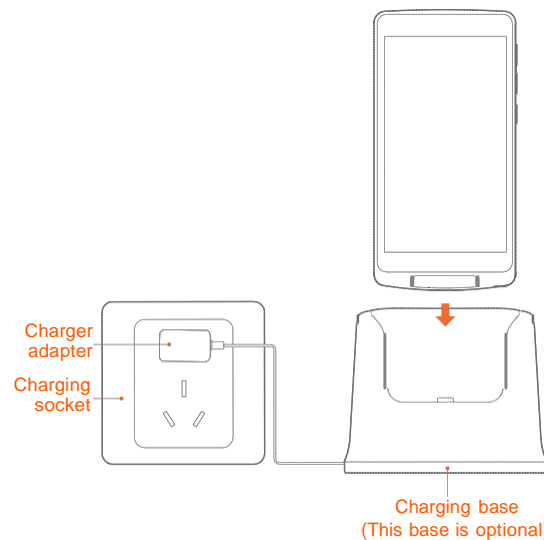

Charging & battery instructions

This device supports the charging with USB line, and also charging with charging base;

Insert the base adapter into the charging socket;

Place the device into the charging base in the direction as shown in this figure:

It is being charged, there will be a corresponding icon to display it on the screen;

If there is no charging icon displayed, please check whether the direction in which the device is placed into the charging base is correct or not.

Minimalist Setting

It will take only a few steps to enable an intelligent commercial device

- ① 2G/3G/4G device. Insert the corresponding 2G/3G/4G card in shutdown mode, and then turn the device on.
(Please read the technical specification table as for the details of card support)
- ② Long press the power key for 2 to 3 seconds, light the screen, enter the first boot interface and then operate according to the prompt.
As for this device, there are two types of Internet surfing modes available.

③ WIFI setting

·Click "Setting" button, and then enable WLAN to enter WLAN search interface. Wait for its search and listing of available WLAN hot spots;
·Click WLAN to be connected. If one encrypted network is selected, it is necessary to enter access password for connection.

How to download/use App

As for the relevant Apps, you may complete the installation by opening App market, browsing & downloading App in networking mode.

Common troubleshooting

Unable to turn on the device (for example: too low electric quantity of the device)

- Power on the device or place it onto the charging base to charge it. Turn the device on after charging for 3 minutes;
- Check whether charging state is normally displayed or not on the screen.

What to do if the device is crashed

Long press the power key for 11 seconds, and enter the reboot state.

More using help

After turning on the device, please check the "User Guide" of the application

Technical Indexes of the Product

Items	Technical Specification
Operating system	Android 7.1
CPU basic frequency	1.4GHz quad core
RAM	1GB LPDDR3
FLASH	8GB Nand Flash
Display screen	5 inch IPS, resolution 1280 x 720
Touch screen	Capacitive touch control screen
Camera	30W FF
Wireless data	2G : B2/B3/B5/B8 3G : WCDMA(B1/B2/B4/B5);EVDO(BC0/BC1) 4G : B2/B4/B7/B17/B28
Wi-Fi	Built-in IEEE 802.11 a/b/g/n (2.4G/5G)
Bluetooth	Supports Bluetooth 3.0/4.2 BLE supports iBeacon
Button	Power key, volume key
Port	USB Type Cport
Battery	3.8V/3000mAh
External dimension	L 144.4mm xW 73.2mm xH 13.7mm
Adapter	OUTPUT : DC5V/1A INPUT : AC100~240V/0.15A

Package Content

- One host
- One piece of User Guide
- One charging adapter
- One USB connection line
- _____

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

FCC ID: 2AH25M2

NOTE: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

---Reorient or relocate the receiving antenna.

---Increase the separation between the equipment and receiver.

---Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

---Consult the dealer or an experienced radio/TV technician for help.

Body-worn Operation

This device was tested for typical body-worn operations. To comply With RF exposure requirements, a minimum separation distance of 1.0cm must be maintained between the user's body and the handset, including the antenna.

Third-party belt-clips, holsters, and similar including the antenna.

Third-party belt-clips, holsters, and similar accessories used by this device should not contain any metallic components. Body-worn accessories that do not meet these requirements may not comply with RF exposure requirements and should be avoided.

Specific Absorption Rate (SAR) information:

This wireless phone meets the government's requirements for exposure to radio waves. The guidelines are based on standards that were

developed by independent scientific organizations through periodic and thorough evaluation of scientific studies. The standards include a substantial safety margin designed to assure the safety of all persons regardless of age or health.

FCC RF Exposure Information and Statement. The SAR limit of USA (FCC) is 1.6W/kg averaged over one gram of tissue.

Device types: T8900&T8901 has also been tested against this SAR limit. The highest SAR value reported under this standard during product certification when properly worn on the body is 1.363W/kg (1gSAR, test distance : 5mm, limit 1.6W/kg). This device was tested for body-worn operations with the back of the handset kept 5mm from the body.

To maintain compliance with FCC RF exposure requirements, use accessories that maintain a 5mm separation distance between the user's body and the back of the handset. The use of belt clips, holsters and similar accessories should not contain metallic components in its assembly. The use of accessories that do not satisfy these requirements may not comply with FCC RF exposure requirements, and should be avoided.

Name and content of toxic and harmful substances contained in this product are shown in the following table

Name of parts	Toxic and harmful substances and elements					
	(Pb)	(Hg)	(Cd)	(Cr(VII))	(PBB)	(PBDE)
Circuit board	×	○	○	○	○	○
Shell	○	○	○	○	○	○

○:It indicates that the content of toxic and harmful substances in all homogeneous materials of this part is below the limit specified in SJ/T11363-2006.

×:It indicates that the content of toxic and harmful substances is higher than the limit specified in SJ/T11363-2006 in at least one homogeneous material of this part; however, the the reason why the toxic substance of that part exceeds the limit is that there is no applicable material to replace it currently.

For products that have reached or passed the service years for environmental protection, they should be recycled according to Measures for Control and Management of Electronic Information Products and should not be thrown away at will.

Manufacture

Shanghai Sunmi Technology Co., Ltd.
Room 505 No.388 Song Hu Road Shanghai, China

