

Shanghai Sunnyway Communication Technology Limited Company

Skyline Acknowledgement Book

Customer: SUNMI		The project: P2 LITE SE	
Operating frequency band: GSM850/ 900/1800/1900 +WCDMA1/2/5/8+LTE Band 1/2/3/4/5/7/12/17/28+TDD Band/38/41			
Motherboard version: P2 LITE SE-MB-V1.2			
Shangyuan material specifications			
Specifications and models	Shangyuan material number	Customer part number	
div antenna	SH22027IB75-3		

The record of project changes			
Date of preparation/change	Changes	Change of person	version
22.09.20	first edition	linfeng	V1.0

Sunnyway counter-signature bar				
Research and development	ME:	Auditor:	QE:	Approver:
	RF:	Auditor:		
Client Counter-signature bar				
EE	PM	RF	QE	

Tel: +86-021-60835368 (Shanghai) ; +86-0755-82504258 (Shenzhen)

Shanghai R&D Center Address: 1st Floor, Building 4, No. 99, Lane 215, Gaoguang Road,
Qingpu District, Shanghai

Shenzhen R & D Center Address: Shenzhen Guangming District South Taiyun Chuanggu Center 5
Building 6 floor

Chongqing R&D Center Address: C08-1 Building-1, No. 19 Xiantao Data Valley East Road,
Yubei District, Chongqing

目录


1. Project picture.....	3
2. Test fixtures.....	4
3. Matching circuits.....	4
4. S11 Test.....	6
4.1 S11 Test Method Description.....	6
4.2 S11 parameter.....	6
5. Darkroom test data.....	10
5.1 <u>Passive test data.....</u>	<u>10</u>
6. Prototype grounding.....	15
7. Antenna Radiation Patterns.....	15
8. Mass production antenna indicators.....	18
9. Drawings	19

1. Project information

Machine information



Antenna information

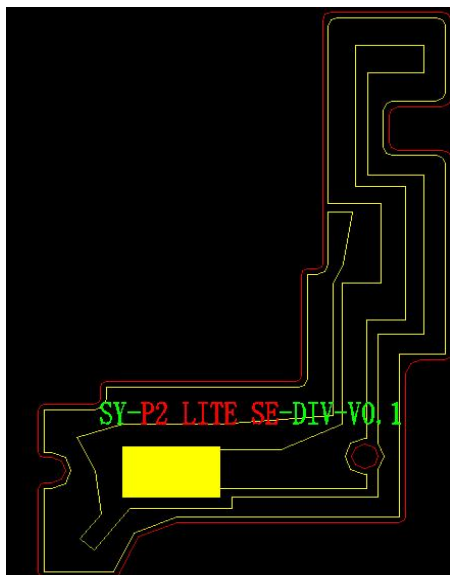


	Antenna version
Diversity	SY-P2 LITE SE-DIV-V0.1

Note: The customer finally verified that the antenna performance prototype was retained in our company for at least one year, which is convenient for analysis and solution to abnormal situations in antenna mass production.
Ensure antenna shipment quality.

2. Test fixtures


Purpose: To test the passive parameters of the antenna as accurately as possible.

How to make: The prototyping mechanism is made of a 50 ohm coaxial cable, one end is connected to the test point at the back of the matching circuit of the prototype motherboard (the front of the RF test hole), and the other end is connected to the SMA connector. The schematic diagram is as follows:

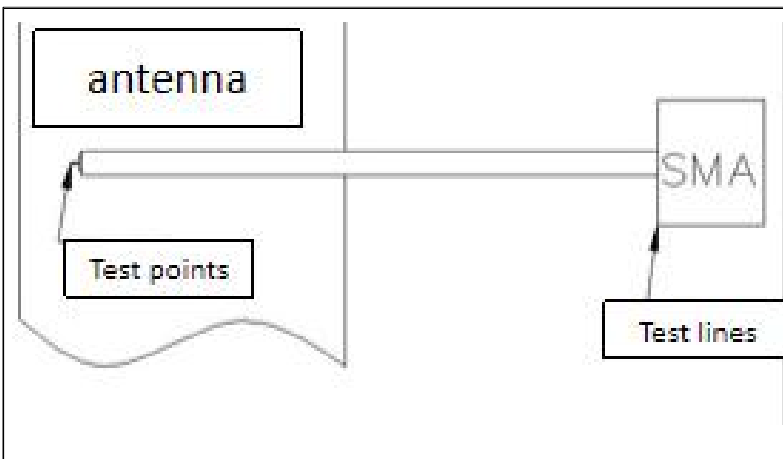


3. Matching circuits

Diversity antenna

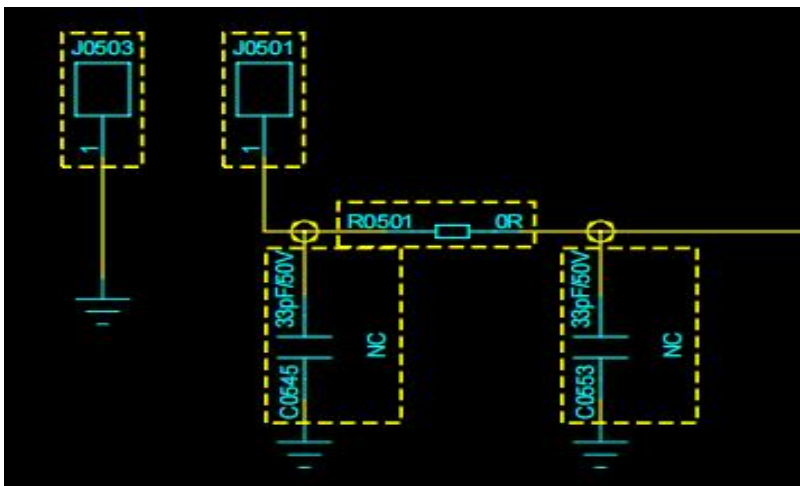

Element	Value	Main circuit electronic components
E1	3.9nH	C0545
E2	0 Ω	R0501
E3	N/C	C0553

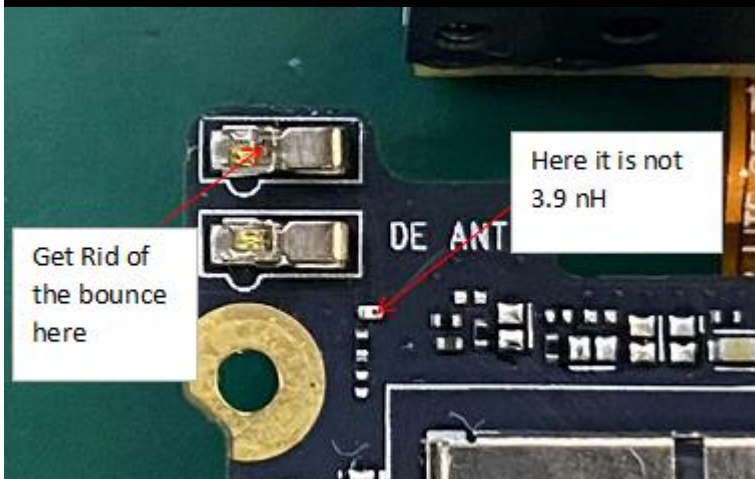


4. S11 test

4.1 S11 Test Method Description

Test Equipment: Network Analyzer (E5071C)


Test method: A 50 ohm CABLE cable is derived from the instrument test port, and the SMA connector of the prototype is connected after calibration using the calibrator to record the return loss and standing wave ratio corresponding to the relevant frequency point.

The test diagram is as follows:

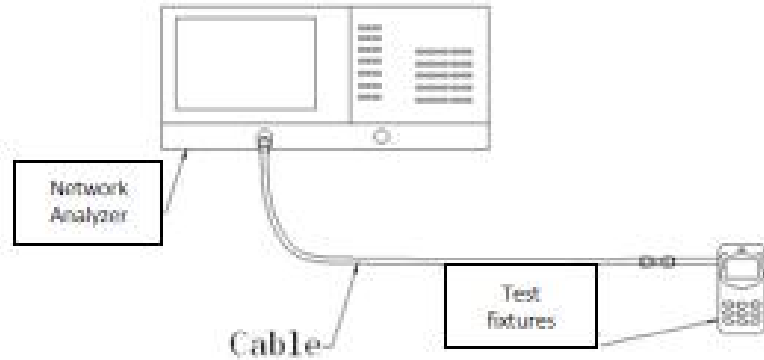

Test the schematic

4.2 S11 parameter

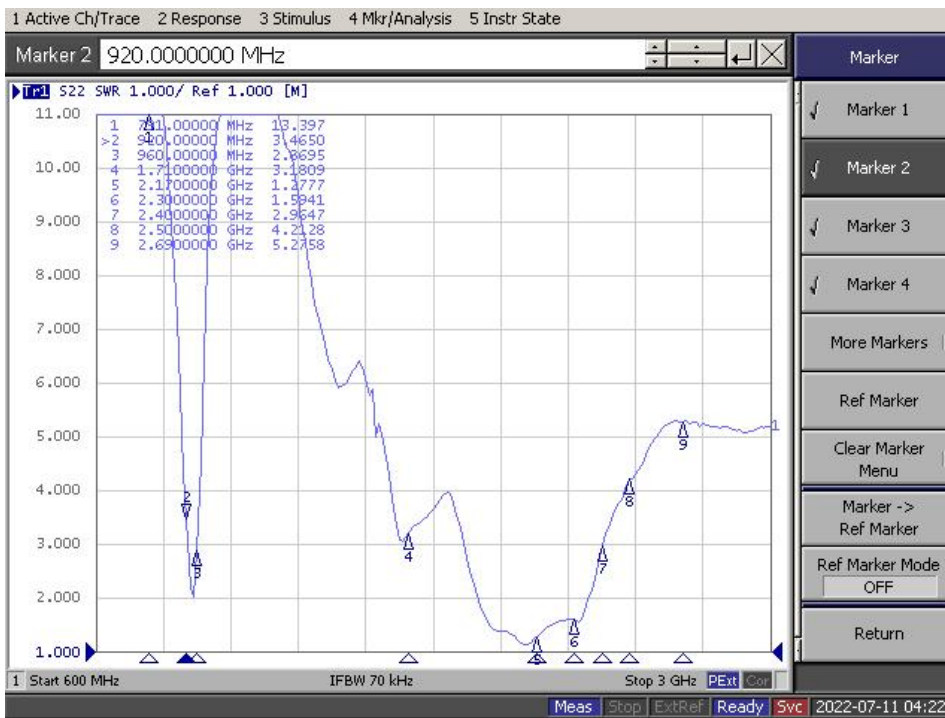

frequency (MHz)	SWR
791	13.39
920	3.46
960	2.86
1710	3.18
2170	1.27
2300	1.59
2400	2.96
2500	4.20
2690	5.27

5 Darkroom test data

Test system: Shielded darkroom

Test environment: temperature $22^{\circ}\text{C}\pm 3^{\circ}\text{C}$, humidity
 $50\%\pm 15\%$


Test equipment: When testing passive data, use the
Network Analyzer Agilent E5062C

When testing active data, the Comprehensive Tester
Agilent 8960 /CMW500/E4438C is used

5.1 Passive test data


Diversity antenna											
frequency (MHz)	Gain(dBi)	Efficiency(dB)	frequency (MHz)	Gain(dBi)	Efficiency(dB)	frequency (MHz)	Gain(dBi)	Efficiency(dB)	frequency (MHz)	Gain(dBi)	Efficiency(dB)
880	-6.5	-9.8	1890	1.3	-5.3	2170	0.1	-4.5	2450	-0.3	-6.3
890	-5.8	-9.2	1900	0.4	-6.0	2180	0.3	-4.1	2460	-0.4	-6.3
900	-4.4	-7.8	1910	0.3	-6.1	2190	0.3	-4.2	2470	-1.2	-6.8
910	-3.6	-7.0	1920	-0.3	-6.4	2200	0.4	-3.7	2480	-0.9	-6.6
920	-2.7	-6.2	1930	-0.1	-6.2	2210	0.3	-4.0	2490	-0.8	-6.4
930	-2.7	-6.0	1940	-0.1	-6.0	2220	0.8	-3.5	2500	-0.7	-6.7
940	-2.6	-5.8	1950	0.4	-5.5	2230	0.9	-3.6	2510	-0.7	-6.4
950	-3.0	-6.1	1960	0.2	-5.8	2240	1.0	-3.6	2520	-1.1	-6.5
960	-3.4	-6.8	1970	0.3	-5.7	2250	0.7	-4.2	2530	-0.8	-6.1
			1980	0.0	-6.1	2260	0.6	-4.4	2540	-0.8	-5.9
1710	-0.6	-6.0	1990	0.5	-5.5	2270	0.4	-5.1	2550	-1.0	-5.9
1720	-1.0	-6.3	2000	0.4	-5.5	2280	0.4	-5.2	2560	-1.8	-6.6
1730	0.0	-5.3	2010	0.1	-5.9	2290	0.4	-5.4	2570	-1.2	-6.1
1740	0.0	-5.2	2020	0.2	-5.7	2300	0.4	-5.3	2580	-1.6	-6.6
1750	0.8	-4.5	2030	0.3	-5.5	2310	0.4	-5.5	2590	-1.3	-6.3
1760	0.4	-5.3	2040	0.2	-5.4	2320	1.1	-5.0	2600	-2.1	-7.2
1770	1.2	-5.0	2050	-0.2	-5.4	2330	1.2	-5.0	2610	-2.1	-7.1
1780	0.7	-5.6	2060	-0.1	-4.8	2340	1.5	-4.6	2620	-3.0	-8.0
1790	1.2	-5.3	2070	-0.7	-4.9	2350	1.0	-5.0	2630	-2.6	-7.6
1800	0.3	-6.2	2080	-0.6	-4.7	2360	0.6	-4.9	2640	-2.9	-7.7
1810	0.4	-6.1	2090	-0.3	-4.8	2370	-0.7	-5.9	2650	-3.1	-7.8
1820	-0.3	-6.8	2100	0.1	-4.2	2380	0.1	-5.1	2660	-3.6	-8.2
1830	0.3	-6.2	2110	-0.2	-4.2	2390	-0.3	-5.7	2670	-3.2	-7.7
1840	0.4	-6.2	2120	-0.1	-4.3	2400	-0.2	-6.2	2680	-3.4	-7.9
1850	1.1	-5.6	2130	0.0	-4.3	2410	-0.5	-6.5	2690	-3.4	-7.9
1860	0.9	-5.8	2140	0.0	-4.4	2420	-0.1	-6.0			
1870	1.5	-5.3	2150	0.0	-4.4	2430	-0.5	-6.1			
1880	1.1	-5.5	2160	-0.1	-4.6	2440	0.1	-5.7			

6. Prototype grounding

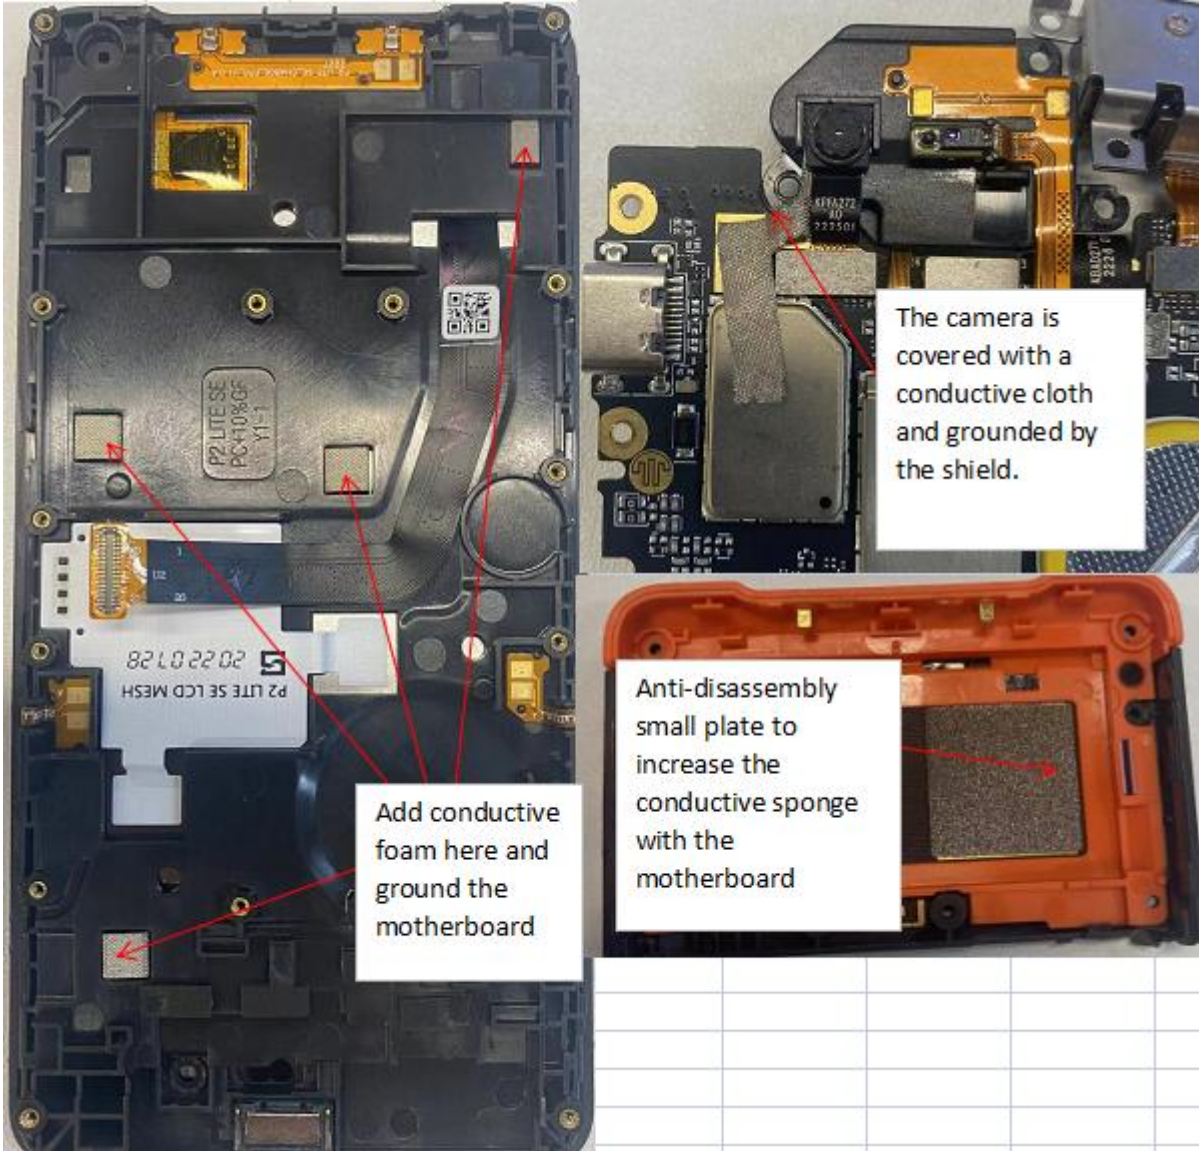


7. Antenna Radiation Patterns


820.000MHz

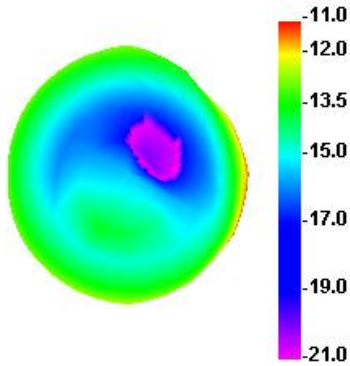


820.000MHz H

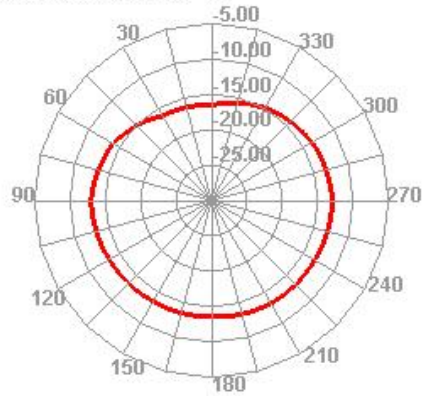


820.000MHz E1

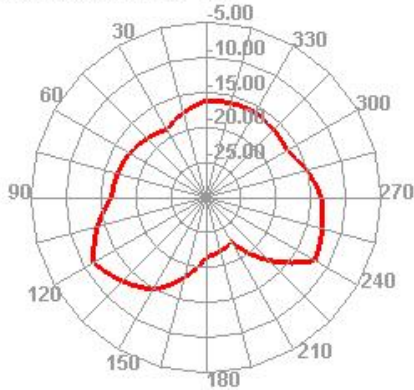


820.000MHz E2

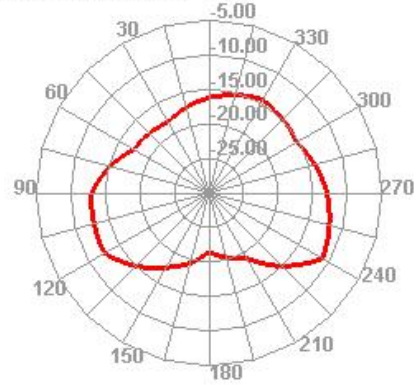


960.000MHz

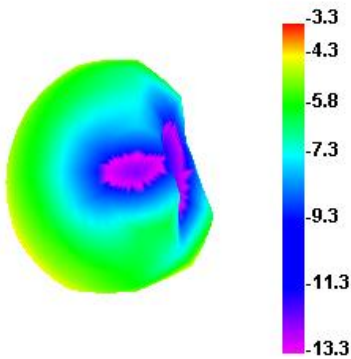


960.000MHz H

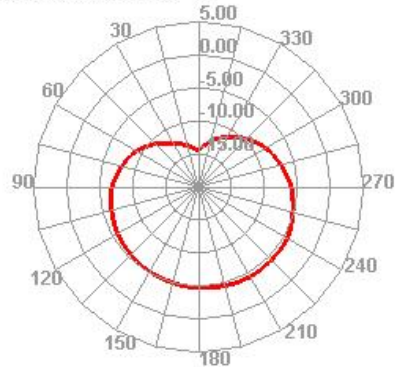

960.000MHz E1

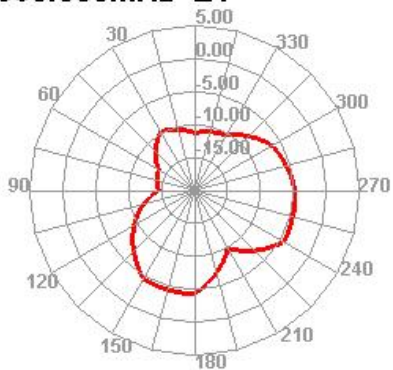


960.000MHz E2

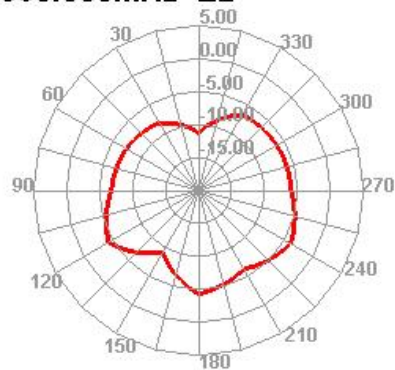


MAntenna Radiation Patterns


1810.000MHz

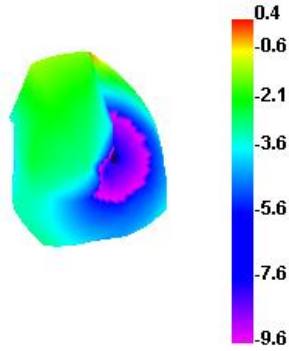


1810.000MHz H

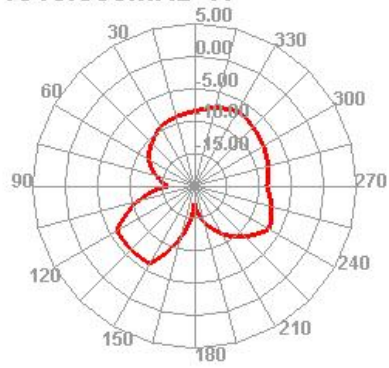


1810.000MHz E1

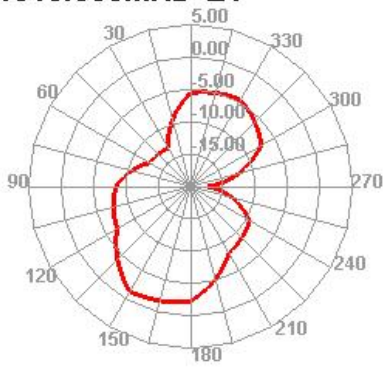


1810.000MHz E2

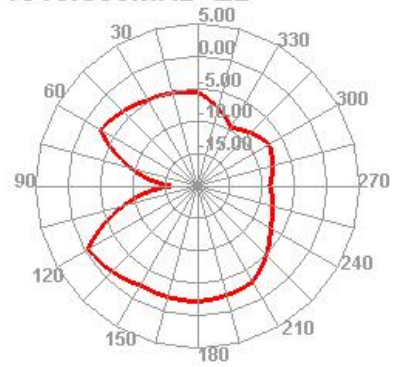


2690.000MHz




2690.000MHz H

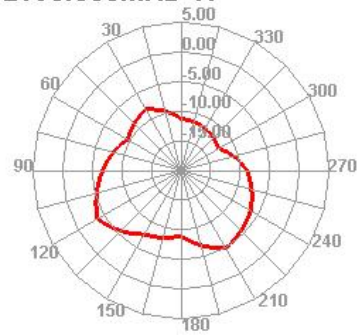

2690.000MHz E1

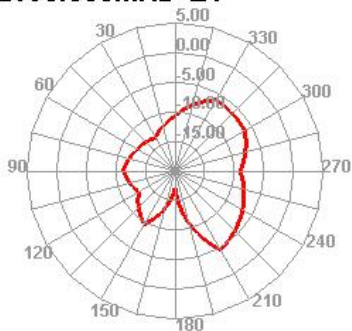

2690.000MHz E2

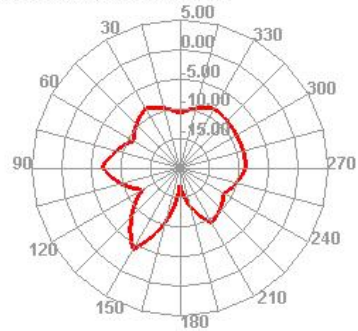

8. Mass production antenna indicators



When the antenna is mass-produced, the standing wave ratio is used as the mass production test standard. According to the differences in the project itself, the following criteria are given:

frequency (MHz)	Mass production standards
Diversity antenna 920--960; 1710--2690	VSWR (Mass production performance) <VSWR(Acknowledge performance)+0.5

9 Drawings

由 Autodesk 教育版产品制作

- Technology requirement:
- 1: With "*" as the key detection size;
 - 2: Excipients should not be biased;
 - 3: Appearance requirements are based on the antenna inspection standard. When the coaxial wire is soldered to the FPC, there is no unwelding phenomenon, and the terminal direction is not solderable.
 - 4: Unfilled tolerances refer to the general tolerance table;

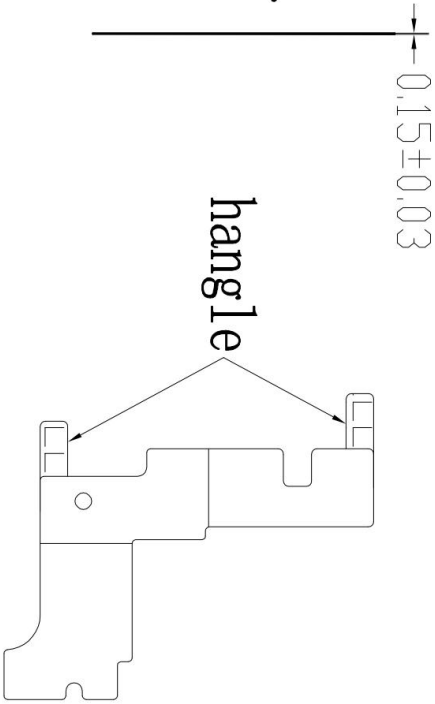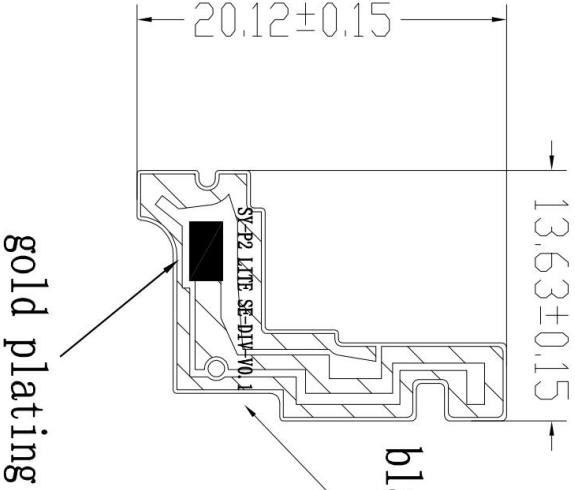

Version	Modify content	modifier	Date
5			

Sunnyway Technology Co., Ltd			
		PART NAME : DIV-FPC P2 LITE SE	DATE : 2022.09.20
TOLERANCE X.X ±0.20 .XX ±0.10 .XXX±0.05 ANGULAR $\leq \pm 0.5^\circ$	PART NO : SH220271B75-3	DRAWN : linfeng	
	MATERIAL : FPC	CHECKED : yujiang	
	FINISHING :	APPROVED : caojimao	
UNIT : mm	SCALE : 1:1	REV : T:A	

由 Autodesk 教育版产品制作

2

3

6

7