

Industrial Internet Innovation Center (Shanghai) Co.,Ltd.

SAR TEST REPORT

PRODUCT	Smart POS System
BRAND	SUNMI
MODEL	T6831
FCC ID	2AH25T6831
APPLICANT	Shanghai Sunmi Technology Co.,Ltd.
ISSUE DATE	June 7, 2024
STANDARD(S)	FCC 47 CFR Part 2.1093, ANSI/IEEE C95.1-1992, IEEE Std 1528-2013

Prepared by: Chen Jintao

Reviewed by: Yan Hang

Approved by: Zhang Min

陈锦涛

颜航

张旻

**CAUTION:**

*This report shall not be reproduced except in full without the written permission of the test laboratory and shall not be quoted out of context.*

## CONTENTS

<b>1</b>	<b>SUMMARY OF TEST REPORT .....</b>	<b>5</b>
1.1	TEST STANDARD (S) .....	5
1.2	REFERENCE DOCUMENTS.....	5
1.3	SUMMARY OF TEST RESULTS .....	6
<b>2</b>	<b>GENERAL INFORMATION OF THE LABORATORY.....</b>	<b>9</b>
2.1	TESTING LABORATORY.....	9
2.2	LABORATORY ENVIRONMENTAL REQUIREMENTS.....	9
2.3	PROJECT INFORMATION.....	9
<b>3</b>	<b>GENERAL INFORMATION OF THE CUSTOMER .....</b>	<b>10</b>
3.1	APPLICANT .....	10
3.2	MANUFACTURER .....	10
3.3	FACTORY .....	10
<b>4</b>	<b>GENERAL INFORMATION OF THE PRODUCT .....</b>	<b>11</b>
4.1	PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	11
4.2	DESCRIPTION FOR AUXILIARY EQUIPMENT (AE) .....	12
<b>5</b>	<b>TEST CONFIGURATION INFORMATION .....</b>	<b>13</b>
5.1	TEST EQUIPMENTS UTILIZED .....	13
5.2	MEASUREMENT UNCERTAINTY .....	14
5.3	EUT CONNECTION DIAGRAM OF TEST SYSTEM.....	15
<b>6</b>	<b>SPECIFIC ABSORPTION RATE(SAR) .....</b>	<b>16</b>
6.1	INTRODUCTION.....	16
6.2	SAR DEFINITION.....	16
<b>7</b>	<b>SAR MEASUREMENT SYSTEM INTRODUCTION .....</b>	<b>17</b>
7.1	MEASUREMENT SET-UP .....	17
7.2	E-FIELD PROBE SYSTEM.....	18
7.3	E-FIELD PROBE CALIBRATION.....	19
7.4	OTHER TEST EQUIPMENT .....	20
<b>8</b>	<b>TEST POSITION IN RELATION TO THE PHANTOM .....</b>	<b>23</b>
8.1	GENERAL CONSIDERATIONS .....	23
8.2	BODY-WORN DEVICE .....	24
8.3	DESKTOP DEVICE.....	25
<b>9</b>	<b>TISSUE SIMULATING LIQUIDS .....</b>	<b>26</b>
9.1	EQUIVALENT TISSUES COMPOSITION.....	26
9.2	LIQUID DEPTH .....	28
9.3	DIELECTRIC PERFORMANCE OF TSL .....	29

<b>10</b>	<b>SYSTEM CHECK</b> .....	<b>30</b>
10.1	SYSTEM CHECK.....	30
10.2	SYSTEM SETUP .....	30
10.3	SYSTEM CHECK RESULT .....	31
<b>11</b>	<b>MEASUREMENT PROCEDURES</b> .....	<b>32</b>
11.1	TEST STEPS .....	32
11.2	SPATIAL PEAK SAR EVALUATION.....	33
11.3	GENERAL MEASUREMENT PROCEDURE .....	34
11.4	GSM/GPRS MEASUREMENT PROCEDURES.....	35
11.5	WCDMA MEASUREMENT PROCEDURES.....	35
11.6	LTE MEASUREMENT PROCEDURE.....	36
11.7	BLUETOOTH & WI-FI MEASUREMENT PROCEDURES .....	38
11.8	AREA SCAN BASED 1G SAR .....	39
<b>12</b>	<b>SIMULTANEOUS TRANSMISSION SAR CONSIDERATIONS</b> .....	<b>40</b>
12.1	REFERENCE DOCUMENT .....	40
12.2	ANTENNA SEPARATION DISTANCES .....	40
12.3	SAR MEASUREMENT POSITIONS.....	40
12.4	LOW POWER TRANSMITTERS SAR CONSIDERATION .....	41
12.5	SIMULTANEOUS TRANSMISSION ANALYSIS .....	42
12.6	SIMULTANEOUS TRANSMISSION TABLE .....	43
<b>13</b>	<b>CONDUCTED OUTPUT POWER</b> .....	<b>44</b>
13.1	POWER REDUCTION PROCEDURES.....	44
13.2	GSM MEASUREMENT RESULT .....	45
13.3	WCDMA MEASUREMENT RESULT .....	47
13.4	LTE MEASUREMENT RESULT.....	50
13.5	BT MEASUREMENT RESULT .....	82
13.6	WI-FI MEASUREMENT RESULT .....	83
13.7	NFC MEASUREMENT RESULT .....	85
<b>14</b>	<b>TEST RESULTS</b> .....	<b>86</b>
14.1	STANDALONE SAR TEST RESULT.....	86
14.2	SIMULTANEOUS SAR EVALUATION.....	103
14.3	SAR MEASUREMENT VARIABILITY.....	104
<b>15</b>	<b>SAR REDUCTION FUNCTION VALIDATION PROCEDURE</b> .....	<b>105</b>
15.1	REFERENCE DOCUMENT ( POWER REDUCTION FOR PROXIMITY SENSOR) .....	105
15.2	PROCEDURES FOR DETERMINING PROXIMITY SENSOR TRIGGERING DISTANCES.....	105
15.3	PROCEDURES FOR DETERMINING ANTENNA AND PROXIMITY SENSOR COVERAGE .....	105
15.4	PROXIMITY SENSOR STATUS TABLE OF TRIGGER DISTANCE.....	107
15.5	TILT ANGLE INFLUENCES TO PROXIMITY SENSOR TRIGGERING .....	110
15.6	POWER REDUCTION PER AIR-INTERFACE.....	111

15.7	PROXIMITY SENSOR COVERAGE AREA .....	111
<b>ANNEX A: MEASUREMENT DATA.....</b>		<b>112</b>
A.1	SAR GRAPH RESULTS.....	112
A.2	SYSTEM CHECK GRAPH RESULTS.....	151
<b>ANNEX B: CALIBRATION CERTIFICATE .....</b>		<b>164</b>
<b>ANNEX C: REVISED HISTORY.....</b>		<b>235</b>
<b>ANNEX D: ACCREDITATION CERTIFICATE.....</b>		<b>236</b>

## 1 Summary of Test Report

### 1.1 Test Standard (s)

No.	Test Standard(s)	Title	Version
1	FCC 47 CFR Part 2.1093	Radiofrequency radiation exposure evaluation: portable devices.	N/A
2	ANSI/IEEE C95.1	IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz.	1992
3	IEEE Std 1528	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	2013

Note: The standard of FCC 47 CFR Part 2.1093 has not been accredited by A2LA.

### 1.2 Reference Documents

No.	Reference Document(s)	Title	Version
1	KDB 447498	General RF Exposure Guidance	D01 v06
2	KDB 865664	SAR Measurement 100 MHz to 6 GHz	D01 v01r04
3	KDB 865664	RF Exposure Reporting	D02 v01r02
4	KDB 941225	3G SAR Procedures	D01 v03r01
5	KDB 941225	SAR for LTE Devices	D05 v02r05
6	KDB 941225	Hotspot SAR	D06 v02r01
7	KDB 616217	SAR for laptop and tablets	D04 v01r02
8	KDB 248227	802.11 Wi-Fi SAR	D01 v02r02

### 1.3 Summary of Test Results

1.3.1 The maximum results of Specific Absorption Rate (SAR) in standalone mode are as follows.

Band	Reported SAR 1g(W/Kg)	Reported SAR 10g(W/Kg)	Detailed Results
	Body-Worn&Hotspot(5mm)	Limb(0mm)	
GSM850	0.70	1.06	See section 14.1
GSM1900	0.84	0.97	See section 14.1
WCDMA Band II	0.87	1.01	See section 14.1
WCDMA Band IV	1.02	<b>1.12</b>	See section 14.1
WCDMA Band V	0.53	0.88	See section 14.1
LTE Band 2	0.93	0.94	See section 14.1
LTE Band 4	<b>1.14</b>	1.06	See section 14.1
LTE Band 7	0.92	0.73	See section 14.1
LTE Band 26	0.48	0.83	See section 14.1
LTE Band 40	0.58	0.51	See section 14.1
LTE Band 41	0.66	0.61	See section 14.1
Wi-Fi 2.4G	0.55	0.30	See section 14.1
Wi-Fi 5G	0.49	0.31	See section 14.1
BT	0.13	0.07	See section 14.1

NOTE1: The T6831 manufactured by Shanghai Sunmi Technology Co.,Ltd. is a variant product for testing.  
 NOTE2: This project is a variant project based on the original report 23T04I30131-SAR01-V01 with below changes:

**Software Modifications:**

-Other changes detailed: Optimize functions, solve bugs, and iterate software versions. Iterative software upgrades do not affect RF performance.

**Hardware Modifications:**

- Components on PCB changes: YES.
- Camera changes: Please refer to the following difference chart.
- LCD changes: Please refer to the following difference chart.
- Other changes: PCBA Change.

Type of Service	Model Name	Scanner	Rear Camera	Flash Lamp	LCD (Just different manufacturers)
Original	T6F10	Yes	5M AF+flash	Yes	SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD (9A-3R067-7026A)
Variant	T6831	NO	2M FF	NO	SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD (98-31050-7084A)
					SHENZHEN DJN PHOTOELECTRIC TECHNOLOGY CO., LTD (98-31050-7084A-H)
					GUANGDONG SUPERVIEW OPTOELECTRONICS CO.,LTD. (G499BHA085A0)

**Mechanical Modifications:**

- Use new metal front/back cover or keypad: YES
- Mechanical shell changes: YES
- Other changes detailed: No scanner; The position of the front camera is different; Add keyboard.

According to the product change description, this project fully tested the SAR of T6831. For the maximum conducted power, this project adjusts the power in the "Sensor on" state of bands GSM850 and WCDMA Band IV, so this project retests the power in the "Sensor on" state of bands GSM850 and WCDMA Band IV. The maximum conducted power in the "Full power" state of GSM850 and WCDMA Band IV and the maximum conducted power of the other frequency bands refer to the original report.

This project has three sets of configured sample S06aa/S07aa (Main supply), S13aa (Second supply) and S14aa(Third supply), among which the S06aa/S07aa sample is the main test, and the S13aa/S14aa sample tests the worst mode of each frequency band.

NOTE3: The product has two SIM cards, SIM 1 and SIM 2 does not support simultaneous work, only supports a single transmitter; When SIM 1 is working, SIM 2 will be suspended until SIM 2 is selected. When stop using the SIM 1, SIM 2 would work. SIM1 is the worst mode.

NOTE4: The device supports LTE Band 5, LTE Band 26, LTE Band 38 and LTE Band 41, since the supported frequency span for LTE Band 5/38 falls completely within the supports frequency span for LTE Band 26/41. The maximum output power(including tolerance) of LTE Band 5/38 is less than or equal to LTE Band 26/41, and both LTE bands share the same transmission path. According to TCB workshop April 2015 RF Exposure Procedures(Overlapping LTE Bands), LTE Band 5 is covered by LTE Band 26, LTE Band 38 is covered by LTE Band 41, therefore, SAR was only assessed for LTE Band 26 and LTE Band 41.

NOTE5: The device implements proximity sensor trigger reduced power for SAR compliance at different exposure conditions, which can refer to chapter 13.1.

NOTE6: Industrial Internet Innovation Center (Shanghai) Co., Ltd. has verified that the compliance of the tested device specified in section 4 of this test report is successfully evaluated according to the procedure and test methods as defined in type certification requirement listed in section 1 of this test report.

1.3.2 The maximum results of Specific Absorption Rate (SAR) in simultaneous mode are as follows.

<b>Highest Reported SAR 1g(W/kg)</b>			
<b>Mode</b>	<b>Position</b>	<b>Simultaneous Transmission SAR</b>	<b>Detailed Results</b>
WCDMA Band IV&Wi-Fi 2.4G	Body- Worn&Hotspot(5mm)	1.44	See section 14.2
<b>Highest Reported SAR 10g(W/kg)</b>			
GSM850&Wi-Fi 5G	Limb(0mm)	1.36	See section 14.2



## 2 General Information of The Laboratory

### 2.1 Testing Laboratory

Lab Name	Industrial Internet Innovation Center (Shanghai) Co.,Ltd.
Address	Building 4, No. 766, Jingang Road, Pudong, Shanghai, China
Telephone	021-68866880
FCC Registration No.	708870
FCC Designation No.	CN1364

### 2.2 Laboratory Environmental Requirements

Temperature	18°C~25°C
Relative Humidity	25%RH~75%RH

### 2.3 Project Information

Project Manager	Gao Hongning
Test Date	April 16, 2024 to May 8, 2024

### 3 General Information of The Customer

#### 3.1 Applicant

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

#### 3.2 Manufacturer

Company	Shanghai Sunmi Technology Co.,Ltd.
Address	Room 505, No.388,Song Hu Road, Yang Pu District, Shanghai, China
Telephone	18826519551

#### 3.3 Factory

Company	N/A
Address	N/A

## 4 General Information of The Product

### 4.1 Product Description for Equipment under Test (EUT)

Product	Smart POS System
Model	T6831
Date of Receipt	April 15, 2024
EUT ID*	S06aa/S07aa(Main supply) S13aa(Second supply) S14aa(Third supply)
SN/IMEI	S06aa:860104070000061/860104070005060 S07aa:860104070000442/860104070005441 S13aa:860104070001408/860104070006407 S14aa:860104070001846/860104070006845
Supported Radio Technology and Bands	GSM850/GSM900/GSM1800/GSM1900 WCDMA Band I/II/IV/V/VI/VIII/XIX LTE Band 1/2/3/4/5/7/8/18/19/20/26/28/34/38/39/40/41 Wi-Fi 802.11a/b/g/n/ac BT 5.0,BLE NFC
Tx Frequency	824 MHz-849 MHz (GSM850) 1850 MHz-1910 MHz (GSM1900) 1850 MHz-1910 MHz (WCDMA Band II) 1710 MHz-1755 MHz (WCDMA Band IV) 824 MHz-849 MHz (WCDMA Band V) 1850 MHz-1910 MHz (LTE Band 2) 1710 MHz-1755 MHz (LTE Band 4) 824 MHz-849 MHz (LTE Band 5) 2500 MHz-2570 MHz (LTE Band 7) 814 MHz-849 MHz (LTE Band 26) 2570 MHz-2620 MHz (LTE Band 38) 2305 MHz-2315 MHz/2350 MHz-2360 MHz (LTE Band 40) 2496 MHz-2690 MHz (LTE Band 41) 2412 MHz-2462 MHz (Wi-Fi 2.4G) 5180 MHz-5240 MHz (U-NII-1) 5260 MHz-5320 MHz (U-NII-2A) 5500 MHz-5700 MHz (U-NII-2C) 5745 MHz-5825 MHz (U-NII-3) 2402 MHz-2480 MHz (BT) 13.56 MHz (NFC)
Hardware Version	V1.0
Software Version	V3.0.4
Dimension	201.4*80*18.55 (L*W*Hmm)
NOTE1: EUT ID is the internal identification code of the laboratory. NOTE2: Samples in the test report are provided by the customer. The test results are only applicable to the samples received by the laboratory.	

#### 4.2 Description for Auxiliary Equipment (AE)

AE ID*	Description	Model	SN/Remark
BA06	Battery	HPPA	E1501403743810210

NOTE: AE ID is the internal identification code of the laboratory.

## 5 Test Configuration Information

### 5.1 Test Equipments Utilized

No.	Name	Model	S/N	Software Version	Hardware Version	Manufacturer	Cal. Date	Cal. Interval
1	Network analyzer	N5242 A	MY51221755	A.09.33.09	N/A	Agilent	Oct.16, 2023	1 Year
2	Power meter	NRX	103851	02.50.21112602	N/A	R&S	Jul.26, 2023	1 Year
3	Power sensor	NRP18S-10	101841	N/A	N/A	R&S	Jul.26, 2023	1 Year
4	Power sensor	NRP18S-10	101842	N/A	N/A	R&S	Jul.26, 2023	1 Year
5	Signal Generator	E4438C	MY49072044	N/A	C.05.83	Agilent	Jul.26, 2023	1 Year
6	Amplifier	NTWPA-07605	22039018	N/A	N/A	RFLIGHT	Jul.26, 2023	1 Year
7	Test Software	DASY5	N/A	52.10.4.1527	N/A	SPEAG	N/A	N/A
8	DAE	DAE4	1581	N/A	N/A	SPEAG	Feb.22, 2024	1 Year
9	E-field Probe	EX3DV4	7634	N/A	N/A	SPEAG	Mar.20, 2024	1 Year
10	BTS	CMU 200	123102	V5.21	N/A	R&S	Jul.26, 2023	1 Year
11	BTS	MT8820C	6201240338	V3.8.10	N/A	Anritsu	Oct.16, 2023	1 Year
12	Dipole Validation Kit	D835 V2	4d112	N/A	N/A	SPEAG	Sep.6, 2023	1 Year
13	Dipole Validation Kit	D1750 V2	1044	N/A	N/A	SPEAG	Sep.8, 2023	1 Year
14	Dipole Validation Kit	D1900 V2	5d232	N/A	N/A	SPEAG	Nov.16, 2023	1 Year
15	Dipole Validation Kit	D2300 V2	1021	N/A	N/A	SPEAG	Sep.11, 2023	1 Year
16	Dipole Validation Kit	D2450 V2	858	N/A	N/A	SPEAG	Sep.12, 2023	1 Year
17	Dipole Validation Kit	D2600 V2	1031	N/A	N/A	SPEAG	Sep.8, 2023	1 Year
18	Dipole Validation Kit	D5GHz V2	1172	N/A	N/A	SPEAG	Sep.7, 2023	1 Year

## 5.2 Measurement Uncertainty

Item	Uncertainty
SAR	$U_{SAR(1g)}=21.66\%$ , $U_{SAR(10g)}=21.38\%$

NOTE: This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

### 5.3 EUT Connection Diagram of Test System

#### 5.3.1 SAR

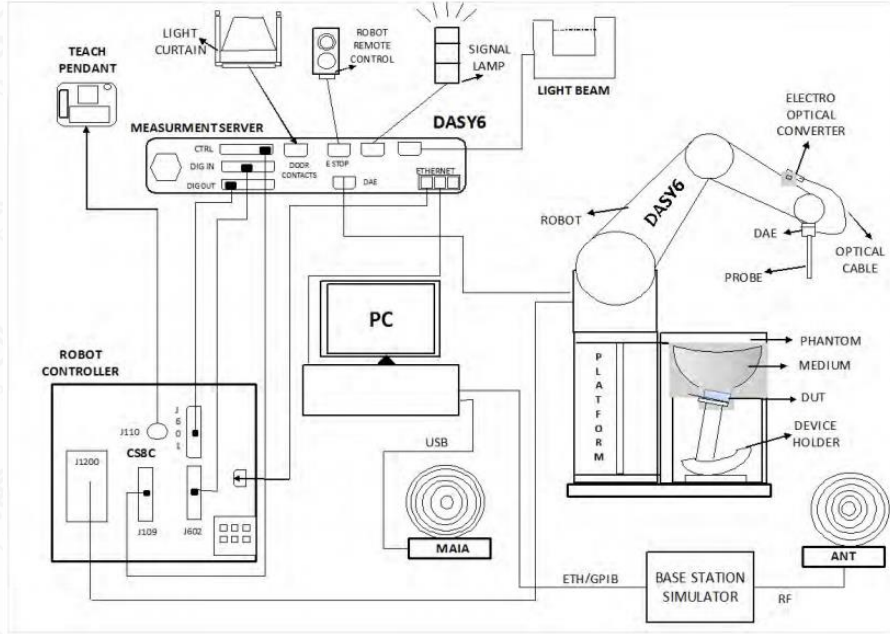


Figure 5.3.1-1 SAR Connection Diagram

## 6 Specific Absorption Rate(SAR)

### 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/ controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy ( $dW$ ) absorbed by (dissipated in) an incremental mass ( $dm$ ) contained in a volume element ( $dv$ ) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by:

$$SAR = c \left( \frac{\delta T}{\delta t} \right)$$

Where:  $C$  is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  is the exposure duration, or related to the electrical field in the tissue by:

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:

$\sigma$  is the conductivity of the tissue

$\rho$  is the mass density of tissue, which is normally set to  $1\text{g/cm}^3$

$E$  is the RMS electrical field strength


However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 7 SAR Measurement System Introduction

### 7.1 Measurement Set-up

The DASY6 system for performing compliance tests is illustrated above graphically. This system consists of the following items:

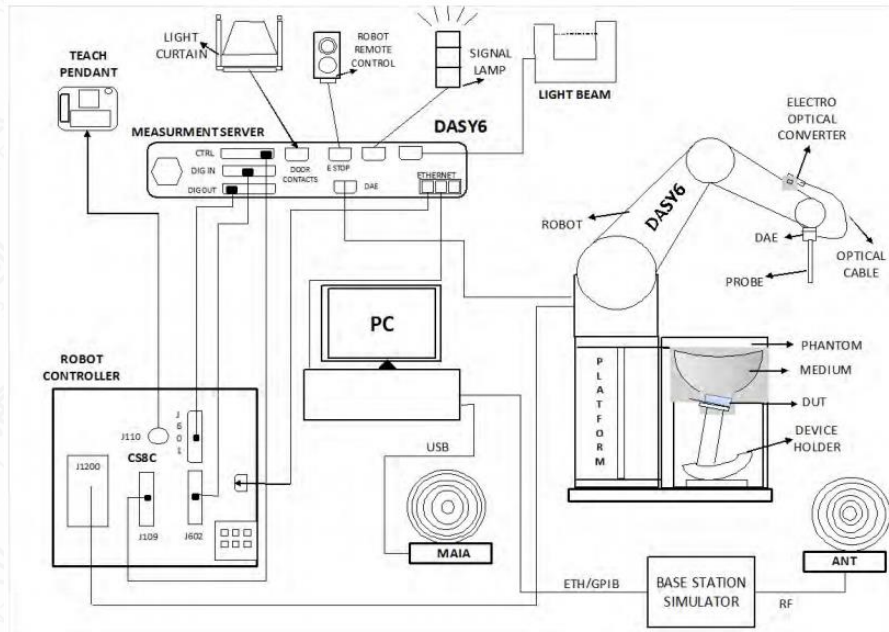

Figures 7.1-1 SAR Measurement Set-up

- A standard high precision 6-axis robot (Stäubli TX=RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP and the DASY software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.

The phantom, the device holder and other accessories according to the targeted measurement.

## 7.2 E-field Probe System

The SAR measurements were conducted with the dosimetric probe designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY software reads the reflection during a software approach and looks for the maximum using 2nd order curve fitting. The approach is stopped at reaching the maximum.



Probe Specifications		
Model	EX3DV4	
Frequency Range	4 MHz – 10 GHz	
Calibration	In head simulating tissue at frequency from 650MHz to 5900MHz	
Linearity	±0.2 dB (30 MHz – 10 GHz)	
Dynamic Range	10 μW/g – >100 mW/g	
Probe Length	337 mm	
Probe Tip Length	20 mm	
Body Diameter	12 mm	
Tip Diameter	2.5 mm	
Tip-Center	1 mm	
Application	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields); the only probe that enables compliance testing for frequencies up to 6 GHz with precision of better than 30%.	

Figure 7.2-1 Detail of Probe

Figure 7.2-2 E-field Probe

### 7.3 E-field Probe Calibration

Each E-Probe/Probe Amplifier combination has unique calibration parameters. A TEM cell calibration procedure is conducted to determine the proper amplifier settings to enter in the probe parameters. The amplifier settings are determined for a given frequency by subjecting the probe to a known E-field density (1 mW/cm<sup>2</sup>) using an RF Signal generator, TEM cell, and RF Power Meter.

The free space E-field from amplified probe outputs is determined in a test chamber. This calibration can be performed in a TEM cell if the frequency is below 1 GHz and in a waveguide or other methodologies above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees until the three channels show the maximum reading. The power density readings equates to 1 mW/cm<sup>2</sup>.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The E-field in the medium correlates with the temperature rise in the dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

$$SAR = C \frac{\Delta T}{\Delta t}$$

Where:

$\Delta t$  = Exposure time (30 seconds),

C = Heat capacity of tissue (brain or muscle),

$\Delta T$  = Temperature increase due to RF exposure.

$$SAR = \frac{|E|^2 \cdot \sigma}{\rho}$$

Where:

$\sigma$  = Simulated tissue conductivity,

$\rho$  = Tissue density (kg/m<sup>3</sup>).

## 7.4 Other Test Equipment

### 7.4.1 Data Acquisition Electronics (DAE)

The data acquisition electronics consist of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder with a control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information, as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection. The input impedance of the DAE is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.



Figure 7.4.1-1: DAE

### 7.4.2 Robot

The SPEAG DASY system uses the high precision robots (DASY6: TX90) type from Stäubli SA (France).

For the 6-axis controller system, the robot controller version from Stäubli is used. The Stäubli robot series have many features that are important for our application

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchronal motors; no stepper motors)
- Low ELF interference (motor control fields shielded via the closed metallic construction shields)

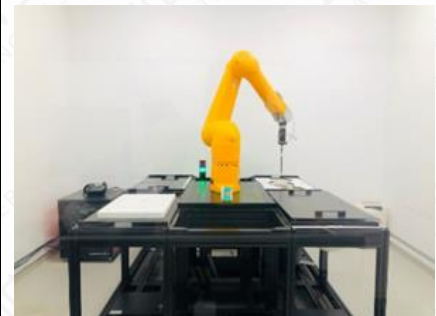


Figure 7.4.2-1: DASY6

### 7.4.3 Measurement Server

The DASY6 measurement server is based on a PC/104 CPU board with a 400 MHz intel ULV Celeron, 128 MB chipdisk and 128 MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronics box as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY6 I/O board, which is directly connected to the PC/104 bus of the CPU board.



Figure 7.4.3-1 Server for DASY6

The measurement server performs all real-time data evaluation of field measurements and surface detection, controls robot movements and handles safety operation. The PC operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with an expansion port which is reserved for future applications. Please note that this expansion port does not have a standardized pinout, and therefore only devices provided by SPEAG can be connected. Devices from any other supplier could seriously damage the measurement server.

### 7.4.4 Device Holder for Phantom

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with the different positions given in the standard. It has two scales for device rotation (with respect to the body axis) and device inclination (with respect to the line between the ear reference points). The rotation centers for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.



Figure 7.4.4-1: Device Holder

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the Mounting Device in place of the phone positioner. The extension is fully compatible with the Twin-SAM and ELI phantoms.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Figure 7.4.4-2: Laptop Extension Kit

#### 7.4.5 Phantom

The SAM Twin Phantom V4.0 is constructed of a fiberglass shell integrated in a table. The shape of the shell is based on data from an anatomical study designed to represent the 90th percentile of the population. The phantom enables the dissymmetric evaluation of SAR for both left and right handed handset usage, as well as body-worn usage using the flat phantom region. Reference markings on the Phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot. The shell phantom has a 2mm shell thickness (except the ear region where shell thickness increases to 6 mm).

Shell Thickness	2 ± 0.2 mm
Available	Special
Filling Volume	Approx. 25 liters
Dimensions	810 mm x 1000 mm x 500 mm (H x L x W)

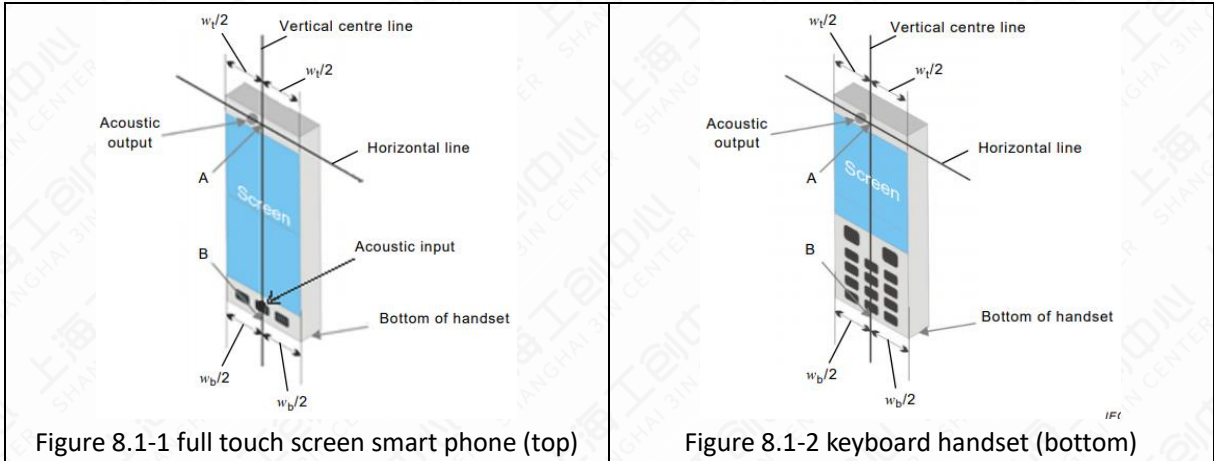


Figure 7.4.5-1: SAM Twin Phantom

## 8 Test Position in Relation to the Phantom

### 8.1 General considerations

This standard specifies two handset test positions against the head phantom – the “cheek” position and the “tilt” position.



$w_t$	Width of the handset at the level of the acoustic output
$w_b$	Width of the bottom of the handset
A	Midpoint of the width $w_t$ of the DUT at the level of the acoustic output
B	Midpoint of the width $w_b$ of the bottom of the handset

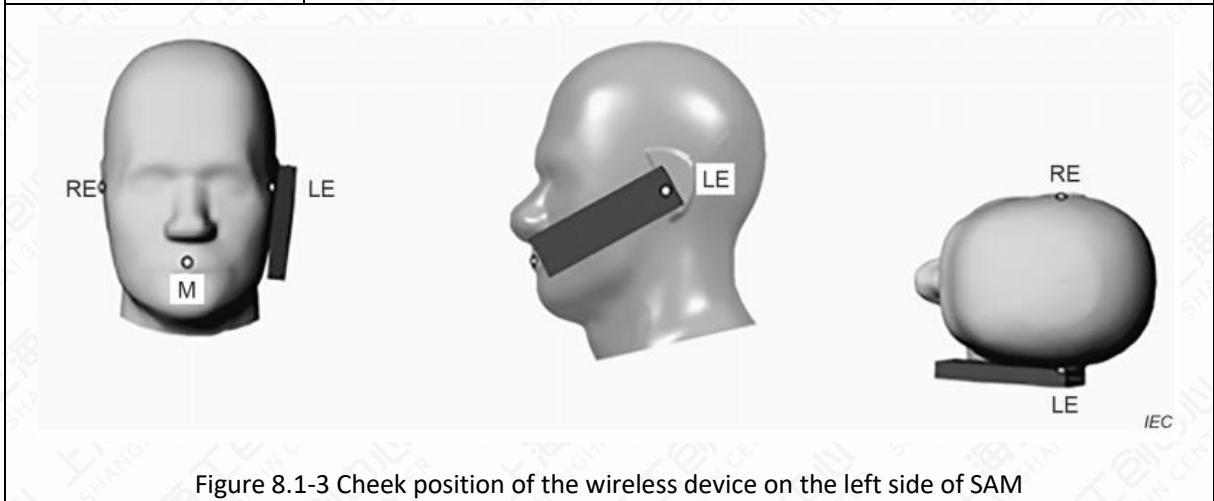


Figure 8.1-3 Cheek position of the wireless device on the left side of SAM

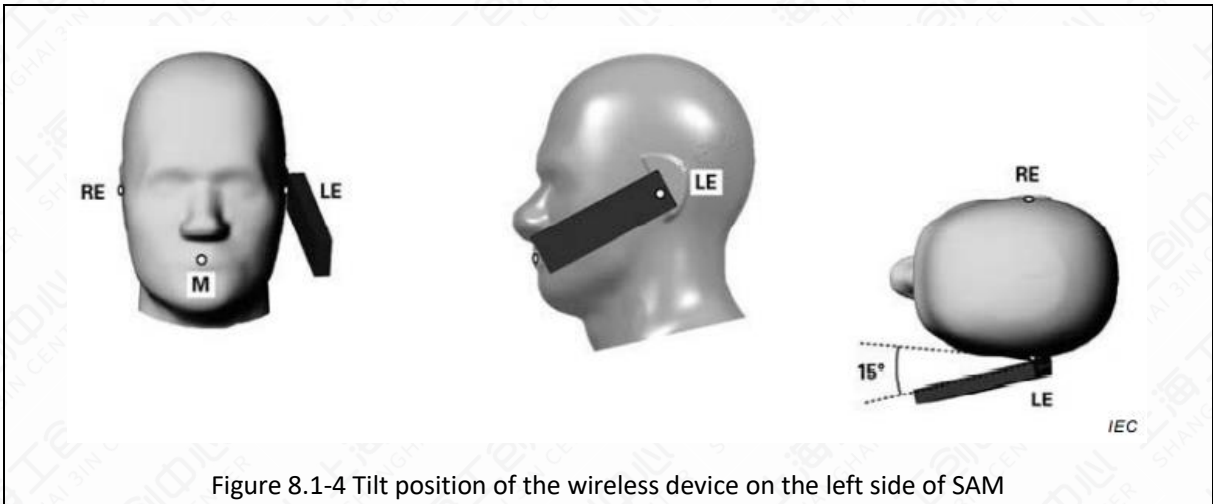


Figure 8.1-4 Tilt position of the wireless device on the left side of SAM

## 8.2 Body-worn device

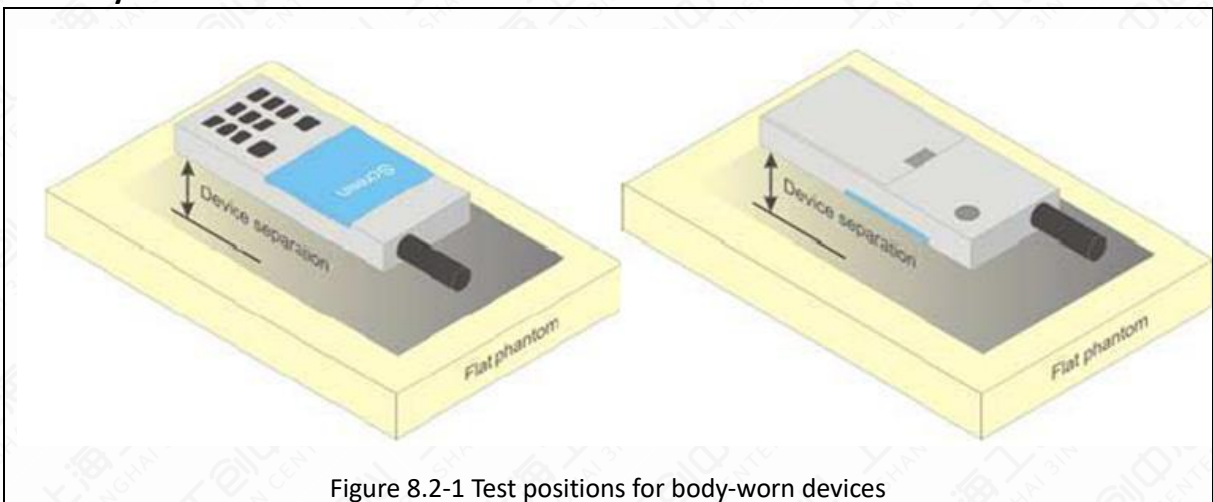


Figure 8.2-1 Test positions for body-worn devices

A typical example of a body-worn device is a mobile phone, wireless enabled PDA (personal digital assistant) or other battery operated wireless device with the ability to transmit while mounted on a person's body using a carry accessory approved by the wireless device manufacturer.



### 8.3 Desktop device

A typical example of a desktop device is a wireless enabled desktop computer placed on a table or desk when used.

The DUT shall be positioned at the distance and in the orientation to the phantom that corresponds to the intended use as specified by the manufacturer in the user instructions. For devices that employ an external antenna with variable positions.

Tests shall be performed for all antenna positions specified.

Picture 8-6 shows positions for desktop device SAR tests. If the intended use is not specified, the device shall be tested directly against the flat

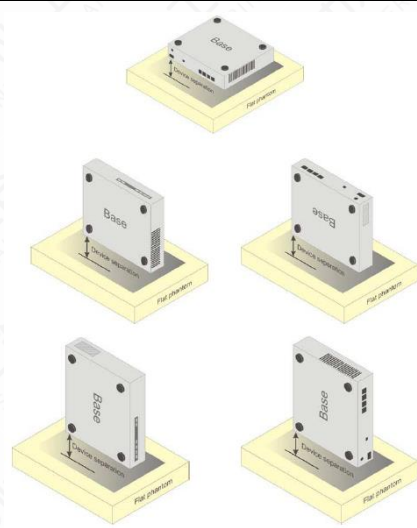


Figure 8.3-1 Test positions for desktop devices

## 9 Tissue Simulating Liquids

### 9.1 Equivalent Tissues Composition

The liquid used for the frequency range of 650-6000 MHz consisted of water, sugar, salt, preventol, glycol monobutyl and Cellulose. The liquid has been previously proven to be suited for worst-case. The Table 9.1 shows the detail solution. It's satisfying the latest tissue dielectric parameters requirements proposed by the IEEE Std 1528.

Table 9.1-1: Composition of the Head Tissue Equivalent Matter

Frequency (MHz)	835	900	1800	1950	2300	2450	2600	5800
<b>Ingredients (% by weight)</b>								
Water	41.45	40.92	55.242	54.89	56.34	58.79	58.79	65.53
Sugar	56.0	56.5	/	/	/	/	/	/
Salt	1.45	1.48	0.306	0.18	0.14	0.06	0.06	/
Preventol	0.1	0.1	/	/	/	/	/	/
Cellulose	1.0	1.0	/	/	/	/	/	/
GlycolMonobutyl	/	/	44.452	44.93	43.52	41.15	41.15	/
Diethyenglycol momohexylether	/	/	/	/	/	/	/	17.24
Triton X-100	/	/	/	/	/	/	/	17.23
Dielectric Parameters Target Value	$\epsilon=41.5$ $\sigma=0.90$	$\epsilon=41.5$ $\sigma=0.97$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=40.0$ $\sigma=1.40$	$\epsilon=39.5$ $\sigma=1.67$	$\epsilon=39.2$ $\sigma=1.80$	$\epsilon=39.0$ $\sigma=1.96$	$\epsilon=35.3$ $\sigma=5.27$

Table 9.1-2: Targets for tissue simulating liquid

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon$ )	$\pm 5\%$ Range
750	Head	0.89	0.846~0.934	41.9	39.805~43.995
835	Head	0.90	0.855~0.945	41.5	39.425~43.575
900	Head	0.97	0.922~1.018	41.5	39.425~43.575
1450	Head	1.20	1.140~1.260	40.5	38.475~42.525
1800	Head	1.40	1.330~1.470	40.0	38.000~42.000
1900	Head	1.40	1.330~1.470	40.0	38.000~42.000
1950	Head	1.40	1.330~1.470	40.0	38.000~42.000
2000	Head	1.40	1.330~1.470	40.0	38.000~42.000
2100	Head	1.49	1.416~1.564	39.8	37.810~41.790
2450	Head	1.80	1.710~1.890	39.2	37.240~41.160
2600	Head	1.96	1.862~2.058	39.0	37.050~40.950
3000	Head	2.40	2.280~2.520	38.5	36.575~40.425
3500	Head	2.91	2.765~3.055	37.9	36.005~39.795
4000	Head	3.43	3.259~3.601	37.4	35.530~39.270
4500	Head	3.94	3.743~4.137	36.8	34.960~38.640
5000	Head	4.45	4.228~4.672	36.2	34.390~38.010
5200	Head	4.66	4.427~4.893	36.0	34.200~37.800
5400	Head	4.86	4.617~5.103	35.8	34.010~37.590
5600	Head	5.07	4.817~5.323	35.5	33.725~37.275
5800	Head	5.27	5.007~5.533	35.3	33.535~37.065
6000	Head	5.48	5.206~5.754	35.1	33.345~36.855

## 9.2 Liquid depth

The Measurements were performed in the flat section of the TWIN SAM or ELI phantom, shell thickness:  $2.0 \pm 0.2 \text{ mm}$  (bottom Plate) filled with Body or Head simulating Liquid.

The depth of tissue-equivalent liquid in a phantom must be  $\geq 15.0 \text{ cm}$  with  $\leq \pm 0.5 \text{ cm}$  variation for SAR measurements  $\leq 3 \text{ GHz}$  and  $\geq 10.0 \text{ cm}$  with  $\pm 0.5 \text{ cm}$  variation for measurements  $> 3 \text{ GHz}$ .

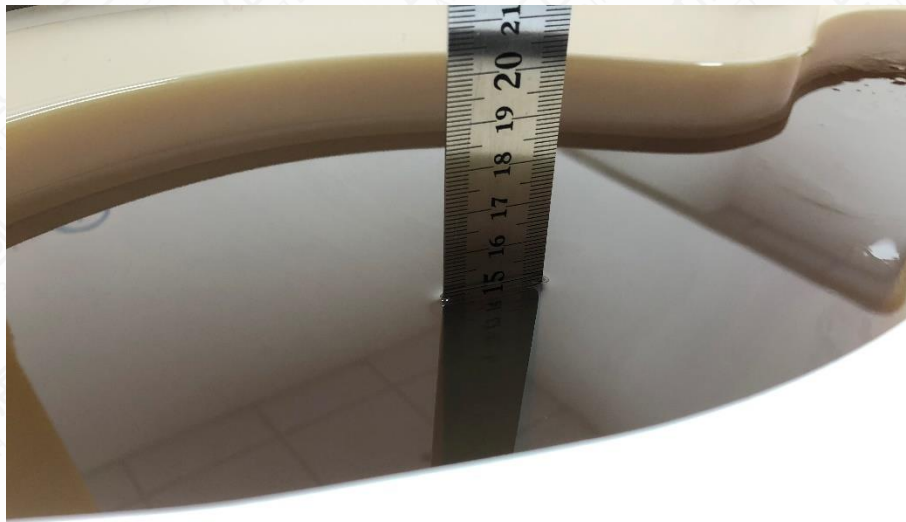


Figure 9.2-1 Liquid depth in the Flat Phantom for SAR measurements  $\leq 3 \text{ GHz}$

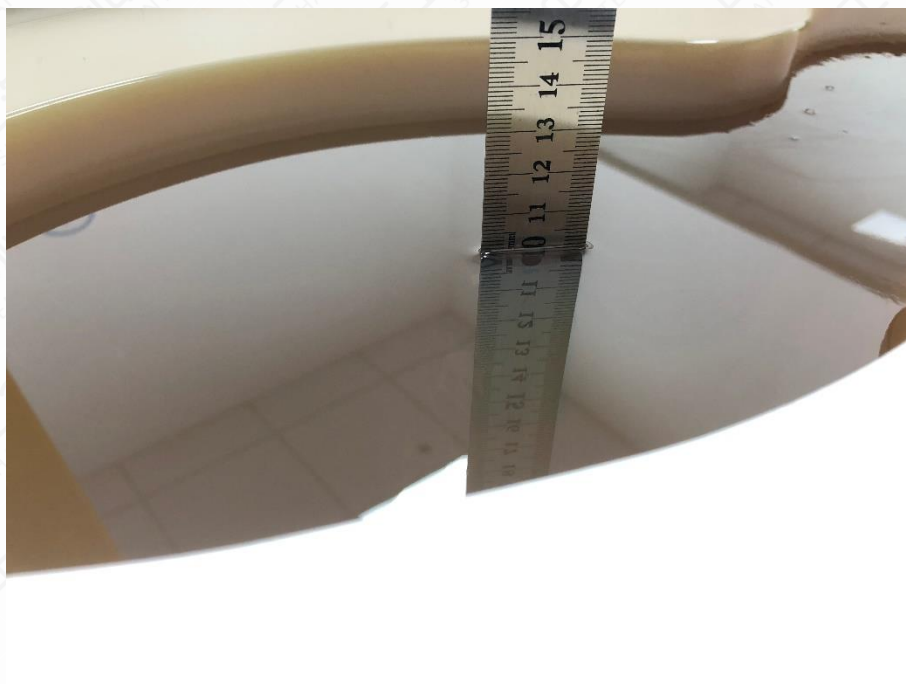


Figure 9.2-2 Liquid depth in the Flat Phantom for SAR measurements  $> 3 \text{ GHz}$

### 9.3 Dielectric Performance of TSL

Table 9.3-1: Dielectric Performance of Head Tissue Simulating Liquid

Frequency (MHz)	Head(Standard)		Temperature	Date	Test Result		Deviation	
	Permittivity $\epsilon$	Conductivity $\sigma$			Permittivity $\epsilon$	Conductivity $\sigma$	Permittivity $\epsilon$	Conductivity $\sigma$
835	41.50	0.90	20.4°C	April 17, 2024	41.515	0.916	0.04%	1.78%
835	41.50	0.90	20.6°C	May 8, 2024	41.265	0.910	-0.57%	1.11%
1750	40.10	1.37	20.5°C	April 23, 2024	38.810	1.324	-3.22%	-3.36%
1900	40.00	1.40	20.4°C	April 16, 2024	38.255	1.414	-4.36%	1.00%
1900	40.00	1.40	20.5°C	May 8, 2024	38.249	1.414	-4.38%	1.00%
2300	39.50	1.67	20.5°C	May 7, 2024	39.193	1.709	-0.78%	2.34%
2450	39.20	1.80	20.5°C	April 18, 2024	40.201	1.853	2.55%	2.94%
2600	39.00	1.96	20.5°C	April 24, 2024	38.664	1.952	-0.86%	-0.41%
2600	39.00	1.96	20.6°C	May 8, 2024	38.289	1.936	-1.82%	-1.22%
5200	36.00	4.66	20.5°C	May 6, 2024	35.264	4.672	-2.04%	0.26%
5300	35.90	4.76	20.5°C	May 6, 2024	35.056	4.781	-2.35%	0.44%
5600	35.50	5.07	20.3°C	April 19, 2024	34.442	5.126	-2.98%	1.10%
5800	35.30	5.27	20.3°C	April 19, 2024	34.040	5.366	-3.57%	1.82%

## 10 System Check

### 10.1 System Check

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 10.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

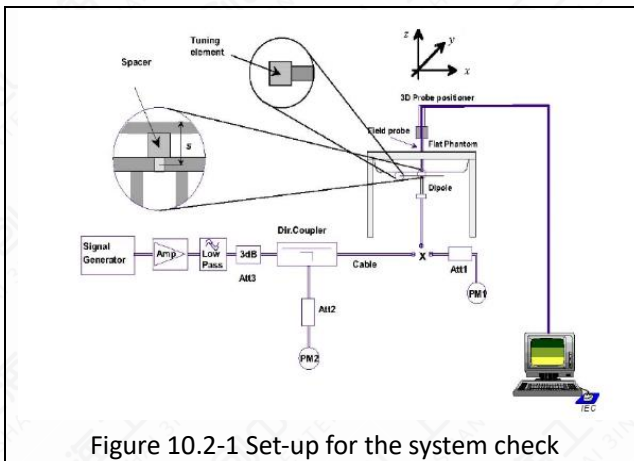


Figure 10.2-1 Set-up for the system check

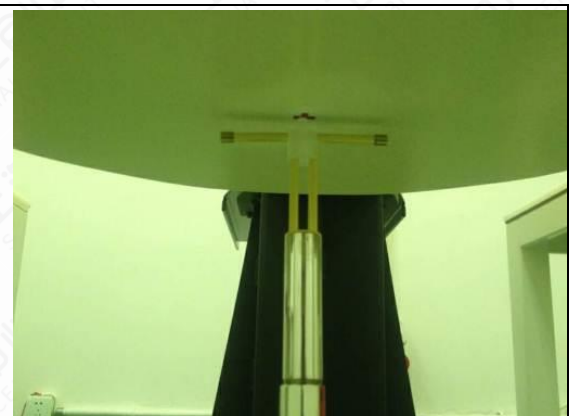


Figure 10.2-2. Setup for Dipole

### 10.3 System Check Result

Table 10.3-1: System Check Result of SAR

SAR System Check								
Frequency (MHz)	Target Value (w/kg)		Temperature	Date	Test Result (w/kg)		Deviation	
	10g	1g			10g	1g	10g	1g
835	6.24	9.67	21.4°C	April 17, 2024	6.36	9.84	1.92%	1.76%
835	6.24	9.67	21.6°C	May 8, 2024	6.16	9.56	-1.28%	-1.14%
1750	19.40	36.70	21.5°C	April 23, 2024	19.76	37.32	1.86%	1.69%
1900	20.70	39.80	21.4°C	April 16, 2024	20.96	40.40	1.26%	1.51%
1900	20.70	39.80	21.6°C	May 8, 2024	20.72	40.40	0.10%	1.51%
2300	23.90	50.30	21.6°C	May 7, 2024	23.00	48.80	-3.77%	-2.98%
2450	24.40	52.60	21.5°C	April 18, 2024	25.32	54.80	3.77%	4.18%
2600	24.80	55.70	21.5°C	April 24, 2024	25.68	56.80	3.55%	1.97%
2600	24.80	55.70	21.6°C	May 8, 2024	25.08	55.60	1.13%	-0.18%
5200	21.80	77.40	21.5°C	May 6, 2024	22.40	77.80	2.75%	0.52%
5300	22.50	79.40	21.5°C	May 6, 2024	23.40	81.70	4.00%	2.90%
5600	23.20	82.40	21.4°C	April 19, 2024	23.80	83.60	2.59%	1.46%
5800	22.00	78.60	21.4°C	April 19, 2024	22.80	80.30	3.64%	2.16%

NOTE: The system verifies that the measured input power level is equivalent to 250mW for 0.6GHz to 3GHz and above 3GHz is equivalent to 100mW, and the measured results are compared with the target value by converting to 1W.

## 11 Measurement Procedures

### 11.1 Test Steps

According to the SAR test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

#### (a) Power reference measurement

The reference and drift jobs are useful for monitoring the power drift of the device under test in the batch process. Both jobs measure the electric field strength at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method.

#### (b) Area scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum locations even in relatively coarse grids. The scan area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the area scan's property sheet is brought up, grid was at to 15mm \* 15mm and can be edited by users.

#### (c) Zoom scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1g and 10g of simulated tissue. The default zoom scan measures 5 \* 5 \* 7 points within a cube whose base faces are centered around the maximum found in a preceding area scan job within the same procedure. If the preceding Area Scan job indicates more than one maximum, the number of Zoom Scans has to be enlarged accordingly.

#### (d) Power drift measurement

The drift job measures the field at the same location as the most recent reference job within the same procedure, and with the same setting. The drift measurement gives the field difference in dB from the reading conducted within the last reference measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under within a batch process. In the properties of the drift job, the user can specify a limit for the drift and have DASY software stop the measurements if this limit is exceeded. This ensures that the power drift during one measurement is within 5%.

The SAR measurement procedures for each of test conditions are as follows:

- (a) Make EUT to transmit it maximum output power
- (b) Measure conducted output power through RF cable
- (c) Place the EUT in the specific position of phantom
- (d) Measure SAR results for Middle channel or the highest power channel on each testing position
- (e) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg
- (f) Record the SAR value



## 11.2 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the IEEE Std 1528 standard. It can be conducted for 1g and 10g.

The DASY system allows evaluations that combine measured data and robot positions, such as:

### (a) Maximum Search

During a maximum search, global and local maximum searches are automatically performed in 2D after each Area Scan measurement with at least 6 measurement points. It is based on the evaluation of the local SAR gradient calculated by the Quadratic Shepard's method. The algorithm will find the global maximum and all local maxima within -2dB of the global maxima for all SAR distributions.

### (b) Extrapolation

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. Several measurements at different distances are necessary for the extrapolation.

Extrapolation routines require at least 10 measurement points in 3D space. They are used in the Cube Scan to obtain SAR values between the lowest measurement points and the inner phantom surface. The routine uses the modified Quadratic Shepard's method for extrapolation. For a grid using 5\*5\*5 measurement points with 5mm resolution amounting to 343 measurement points, the uncertainty of the extrapolation routines is less than 1% for 1g and 10 cubes.

### (c) Boundary effect

For measurements in the immediate vicinity of a phantom surface, the field coupling effects between the probe and the boundary influence the probe characteristics. Boundary effect errors of different dosi-metric probe types have been analyzed by measurements and using a numerical probe model. As expected, both methods showed an enhanced sensitivity in the immediate vicinity of the boundary. The effect strongly depends on the probe dimensions and disappears with increasing distance from the boundary. The sensitivity can be approximately given as:

$$S \approx S_0 + S_b * \exp\left(-\frac{z}{a}\right) * \cos\left(\pi \frac{z}{\lambda}\right)$$

Since the decay of the boundary effect dominates for small probe ( $a \ll \lambda$ ), the cos-term can be omitted. Factors  $S_b$  (parameter Alpha in the DASY software) and  $a$  (parameter Delta in the DASY software) and assessed during probe calibration and used for numerical compensation of the boundary effect. Several simulations and measurements have confirmed that the compensation is valid for different field and boundary configurations.

This simple compensation procedure can largely reduce the probe uncertainty near boundaries. It works well as long as:

- The boundary curvature is small
- The probe axis is angled less than 30° to the boundary normal
- The distance between probe and boundary is larger than 25% of the probe diameter
- The probe is symmetric (all sensors have the same offset from the probe tip)

Since all of these requirements are fulfilled in a DASY system, the correction of the probe boundary effect in the vicinity of the phantom surface is performed in a fully automated manner via the

measurement data extraction during post processing.

### 11.3 General Measurement Procedure

The area and zoom scan resolutions specified in the table below must be applied to the SAR measurements and fully documented in SAR reports to qualify for TCB approval. Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std 1528-2013. The results should be documented as part of the system validation records and may be requested to support test results when all the measurement parameters in the following table are not satisfied.

Table 11.3-1: Test Resolution Requirement

Items		≤3GHz	>3GHz	
Maximum Distance		5mm ±1mm	$\frac{1}{2} * \delta * \ln(2)$ mm ±0.5mm	
Maximum probe angle		30±1°	20±1°	
Maximum Area Scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤2GHz: ≤15mm	3-4GHz: ≤12mm	
		2-3GHz: ≤12mm	4-6GHz: ≤10mm	
		when the x or y dimension of the device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the device with at least one measurement point on the device		
Maximum Zoom Scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤2GHz: ≤8mm	3-4GHz: ≤5mm	
		2-3GHz: ≤5mm	4-6GHz: ≤4mm	
maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤5mm	3-4GHz: ≤4mm 4-5GHz: ≤3mm 5-6GHz: ≤2mm	
	graded grid	$\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface	≤4mm	3-4GHz: ≤3mm 4-5GHz: ≤2.5mm 5-6GHz: ≤2mm
		$\Delta z_{Zoom}(n > 1)$ between subsequent points	≤1.5*	
minimum zoom scan volume	x, y, z	≥30mm	3-4GHz: ≥28mm 4-5GHz: ≥25mm 5-6GHz: ≥22mm	

**Notes:**

$\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium in IEEE Std 1528-2013.

When Zoom Scan is required and reported SAR from the Area Scan based 1-g SAR estimation procedure of KDB publication 447498 is  $\leq 1.4$  W/kg,  $\leq 8$ mm for 2GHz-3GHz,  $\leq 7$ mm for 3GHz-4GHz,  $\leq 5$ mm for 4GHz-6GHz Zoom Scan resolution may be applied.

### 11.4 GSM/GPRS Measurement Procedures

GSM/GPRS/EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Other configurations of GSM/GPRS/EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.

### 11.5 WCDMA Measurement Procedures

The following procedures are applicable to WCDMA handsets operating under 3GPP Release99, Release 5 and Release 6. The default test configuration is to measure SAR with an established radio link between the DUT and a communication test set using a 12.2kbps RMC (reference measurement channel) configured in Test Loop Mode 1. SAR is selectively confirmed for other physical channel configurations (DPCCH & DPDCH), HSDPA and HSPA (HSUPA/HSDPA) modes according to output power, exposure conditions and device operating capabilities. Both uplink and downlink should be configured with the same RMC or AMR, when required. SAR for Release 5 HSDPA and Release 6 HSPA are measured using the applicable FRC (fixed reference channel) and E-DCH reference channel configurations. Maximum output power is verified according to applicable versions of 3GPP TS 34.121 and SAR must be measured according to these maximum output conditions. When Maximum Power Reduction (MPR) is not implemented according to Cubic Metric (CM) requirements for Release 6 HSPA, the following procedures do not apply.

Table 11.5-1: HSDPA setting for Release 5

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	CM (dB)	MPR (dB)
1	2/15	15/15	64	2/15	4/15	1.5	0.5
2	12/15	15/15	64	12/15	24/25	2.0	1
3	15/15	8/15	64	15/8	30/15	2.0	1
4	15/15	4/15	64	15/4	30/15	2.0	1

Table 11.5-2: HSUPA setting for Release 6

Sub-test	$\beta_c$	$\beta_d$	$\beta_d$ (SF)	$\beta_c / \beta_d$	$\beta_{hs}$	$\beta_{ec}$	$\beta_{ed}$	$\beta_{ed}$ (SF)	$\beta_{ed}$ (codes)	CM (dB)	MPR (dB)	AG Index	E-TFCI

1	11/15	15/15	64	11/15	22/15	209/225	1039/225	4	1	2.0	1.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	12/15	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1},_{47/15}$ $\beta_{ed2},_{47/15}$	4	2	3.0	2.0	15	92
4	2/15	15/15	64	2/15	4/15	4/15	56/75	4	1	2.0	1.0	17	71
5	15/15	15/15	64	15/15	24/15	30/15	134/15	4	1	2.0	1.0	21	81

### 11.6 LTE Measurement Procedure

SAR tests for LTE are performed with a base station simulator. Closed loop power control was used so the UE transmits with maximum output power during SAR testing.

- (a) KDB 941225 D05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
- (b) 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
- (c) For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.
- (d) 16QAM/64QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; 16QAM/64QAM SAR testing is not required.
- (e) Smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is  $\leq 1.45$  W/kg; smaller bandwidth SAR testing is not required.
- (f) For LTE Band 12/26 the maximum bandwidth does not support three non-overlapping channels, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
- (g) LTE band 17/2/5/38/4 SAR test was covered by Band 12/25/26/41/66; according to TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.

### 11.6.1 LTE Carrier Aggregation Conducted Power (Downlink)

Uplink maximum output power measurement with downlink carrier aggregation active should be measured, using the highest output channel measured without downlink carrier aggregation, to confirm that uplink maximum output power with downlink carrier aggregation active remains within the specified tune-up tolerance limits and not more than ¼ dB higher than the maximum output measured without downlink carrier aggregation active.

### 11.6.2 LTE Carrier Aggregation Conducted Power (Uplink)

UL CA shall be tested based on the worst-case SAR configuration determined from non-CA SAR testing result. The channel BW, channel number, RB allocation, etc. would be selected to allow contiguous CA of PCC and SCC. Uplink output power for UL CA is the total power measured across the PCC and SCC.

UL CA power measurements were performed for each antennas at with QPSK modulation based on the worst-case standalone SAR.

The UL CA mode power measurements represent the total power across both carriers. Measurements were made for all supported PCC bandwidths using the channel/RB combination resulting in the highest standalone output power at the least MPR (0 dB). SCCs were set to use configurations similar to the PCC to establish conservative or worst case equivalent SAR test conditions (highest maximum power with MPR of 0 dB).

The standalone power measurement is the power for the PCC in the non-CA mode (i.e. single carrier power). In all cases the UL CA power is less than or equal to the standalone power.

### 11.6.3 LTE TDD Considerations

Time-Division Duplex (TDD) systems, SAR must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP LTE TDD configurations.

SAR was tested with the highest transmission duty factor (63.33%) using Uplink-downlink configuration 0 and Special sub-frame configuration 7.

Table 11.6.3-1 Calculated Duty Cycle for LTE TDD

Uplink-Downlink Configuration		Sub-frame Number										Calculated
Config	Periodicity	1	2	3	4	5	6	7	8	9	10	Duty Cycle (%)
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67

6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33
---	------	---	---	---	---	---	---	---	---	---	---	-------

Example for Calculated Duty Cycle for Uplink-Downlink Configuration 0:

$$\text{Calculated Duty Cycle} = (5120 \times T_s \times 2 + 6 \text{ ms}) / 10\text{ms} = 63.33\%$$

Where

$$T_s = 1/(15000 \times 2048) \text{ seconds}$$

### 11.7 Bluetooth & Wi-Fi Measurement Procedures

Normal network operating configurations are not suitable for measuring the SAR of IEEE 802.11 transmitters in general. Unpredictable fluctuations in network traffic and antenna diversity conditions can introduce undesirable variations in SAR results. The SAR for these devices should be measured using chipset based test mode software to ensure that the results are consistent and reliable.

Chipset based test mode software is hardware dependent and generally varies among manufacturers. The device operating parameters established in a test mode for SAR measurements must be identical to those programmed in production units, including output power levels, amplifier gain settings and other RF performance tuning parameters. The test frequencies should correspond to actual channel frequencies defined for domestic use. SAR for devices with switched diversity should be measured with only one antenna transmitting at a time during each SAR measurement, according to a fixed modulation and data rate. The same data pattern should be used for all measurements.

Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2 \text{ W/kg}$ .

Per KDB 248227 D01v02r02, U-NII-1 SAR testing is not required when the U-NII-2A band highest reported SAR for a test configuration is  $\leq 1.2 \text{ W/kg}$ , SAR is not required for U-NII-1 band. For all positions / configurations, when the reported SAR is  $> 0.8 \text{ W/kg}$ , SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is  $\leq 1.2 \text{ W/kg}$  or all required channels are tested.

## 11.8 Area Scan Based 1g SAR

According to the KDB447498 D01, a first class of fast SAR techniques is based on a modified measurement procedure and post processing algorithms. In practice, these methods require a special software, for example DASYS2 form SPEAG.

When the implementation is based the specific polynomial fit algorithm as presented at the 29th Bio-electromagnetics Society meeting (2007) and the estimated 1-g SAR is  $\leq 1.2$  W/kg, a zoom scan measurement is not required provided it is also not needed for any other purpose; for example, if the peak SAR location required for simultaneous transmission SAR test exclusion can be determined accurately by the SAR system or manually to discriminate between distinctive peaks and scattered noisy SAR distributions from area scans.

There must not be any warning or alert messages due to various measurement concerns identified by the SAR system; for example, noise in measurements, peaks too close to scan boundary, peaks are too sharp, spatial resolution and uncertainty issues etc. When all the SAR results for each exposure condition in a frequency band and wireless mode are based on estimated 1-g SAR, the 1-g SAR for the highest SAR configuration must be determined by a zoom scan.

The approach is based on the area scan measurement applying a frequency dependent attenuation parameter. This attenuation parameter was empirically determined by analyzing a large number of phones. The MOTOROLA FAST SAR was developed and validated by the MOTOROLA Research Group in Ft. Lauderdale.

In the initial study, an approximation algorithm based on Linear fit was developed. The accuracy of the algorithm has been demonstrated across a broad frequency range (136-2450 MHz) and for both 1-g and 10-g averaged SAR using a sample of 264 SAR measurements from 55 wireless handsets. For the sample size studied, the root-mean-squared errors of the algorithm are 1.2% and 5.8% for 1- and 10-g averaged SAR, respectively. The paper describing the algorithm in detail is expected to be published in August 2004 within the Special Issue of Transactions on MTT.

In the second step, the same research group optimized the fitting algorithm to an Polynomial fit whereby the frequency validity was extended to cover the range 30MHz-6000MHz. Details of this study can be found in the BEMS 2007 Proceedings.

## 12 Simultaneous Transmission SAR Considerations

### 12.1 Reference Document

The following procedures adopted from “FCC SAR Considerations for Cell Phones with Multiple Transmitters” are applicable to handsets with built-in unlicensed transmitters such as IEEE 802.11 a/b/g/n/ac/ax and Bluetooth devices which may simultaneously transmit with the licensed transmitter.

### 12.2 Antenna Separation Distances

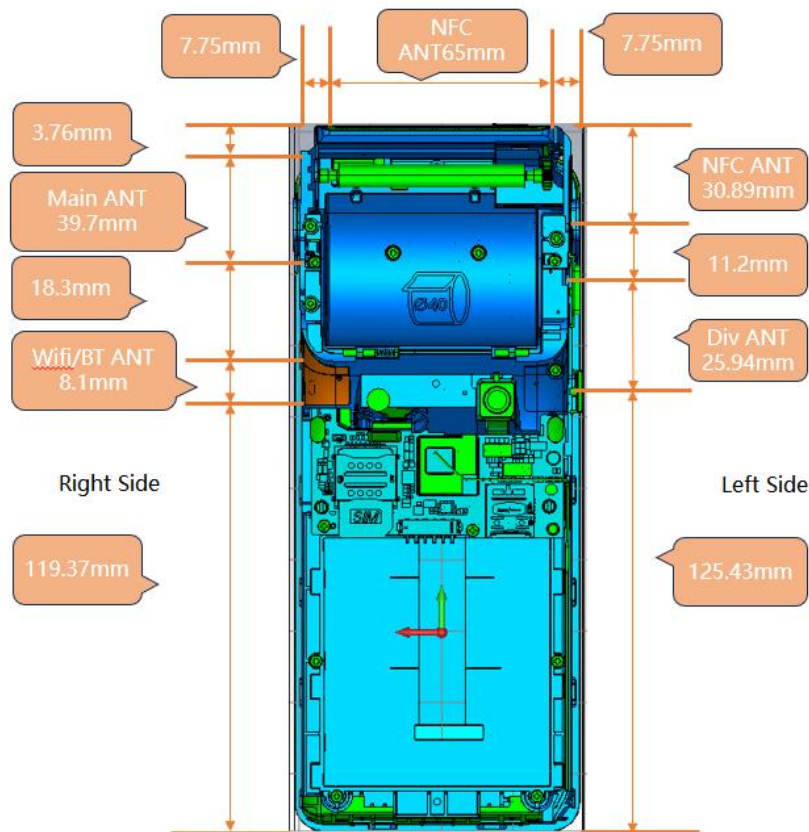


Figure 12.2-1 Antenna Locations (Back View)

### 12.3 SAR Measurement Positions

The edges with less than 2.5 cm distance to the antennas need to be tested for SAR.

Table 12.3-1: SAR measurement Positions

Antenna Mode	Front	Back	Left	Right	Top	Bottom
Main ANT	Yes	Yes	No	Yes	Yes	No
Wi-Fi/BT ANT	Yes	Yes	No	Yes	Yes	No



## 12.4 Low Power Transmitters SAR Consideration

Standalone 1-g head or body SAR evaluation by measurement or numerical simulation for low power transmitters is not required when the corresponding SAR Exclusion Threshold condition, listed below, is satisfied.

The 1-g SAR test exclusion threshold for 100 MHz to 6 GHz at test separation distances  $\leq 50$  mm are determined by:

$$\frac{(\text{max. power of channel, including tune - up tolerance, mW})}{(\text{min. test separation distance, mm})} \times \sqrt{\text{Frequency(GHz)}} \leq 3.0$$

Where:

- Frequency (GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

According to the KDB447498 appendix A, the SAR test exclusion threshold for 2450MHz at 5mm test separation distances is 10mW. That means the transmitters with tune-up power below 10mW are excluded for SAR measurement.

SAR test exclusion for NFC separation  $< 50\text{mm} = [474 * (1 + \log(100/f_{\text{(MHz)}}))] / 2 = 443$  mW, the maximum tune up of NFC is -23.00 dBm(0.005mW), NFC can be exempted.

## 12.5 Simultaneous Transmission Analysis

KDB 447498 D01 General RF Exposure Guidance introduces a new formula for calculating the SPLSR (SAR to Peak Location Ratio) between pairs of simultaneously transmitting antennas:

$$\text{SPLSR} = \sqrt{(\text{SAR1} + \text{SAR2})^3 / R_i}$$

Where:

- SAR1 is the highest measured or estimated SAR for the first of a pair of simultaneous transmitting antennas, in a specific test operating mode and exposure condition.
- SAR2 is the highest measured or estimated SAR for the second of a pair of simultaneous transmitting antennas, in the same test operating mode and exposure condition as the first.
- $R_i$  is the separation distance between the pair of simultaneous transmitting antennas. When the SAR is measured, for both antennas in the pair, it is determined by the actual x, y and z coordinates in the 1-g SAR for each SAR peak location, based on the extrapolated and interpolated result in the zoom scan measurement, using the formula of

$$(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2$$

In order for a pair of simultaneous transmitting antennas with the sum of 1-g SAR > 1.6 W/kg to qualify for exemption from Simultaneous Transmission SAR measurements, it has to satisfy the condition of:

$$\sqrt{(\text{SAR1} + \text{SAR2})^3 / R_i} < 0.04$$

## 12.6 Simultaneous Transmission Table

Table 12.6-1: Simultaneous Transmission Configurations

Items	Capable Transmit Configurations
1	GSM/GPRS/EDGE+BT
2	GSM/GPRS/EDGE+Wi-Fi 2.4G
3	GSM/GPRS/EDGE+Wi-Fi 5G
4	WCDMA+BT
5	WCDMA+Wi-Fi 2.4G
6	WCDMA+Wi-Fi 5G
7	LTE+BT
8	LTE+Wi-Fi 2.4G
9	LTE+Wi-Fi 5G

NOTE: For the DUT, the following combination that can transmit signal simultaneously.

## 13 Conducted Output Power

### 13.1 Power Reduction Procedures

The device uses a proximity sensor to reduce the maximum output power of main transmitting antenna in selected wireless modes and operating configurations to ensure SAR compliance. The procedures in KDB 616217 are applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions.

The following tables summarize the key power reduction information of main transmitting antenna triggered by specific use conditions.

Table 13.1-1:WWAN power reduction table

Main Antenna				
Band	Mode	Full Power (Tune Up)dBm	Sensor on (Tune Up)dBm	Power Reduction(dB)
GSM850	GPRS 1TS	33.50	26.00	7.50
	GPRS 2TS	32.50	26.00	6.50
	GPRS 3TS	30.50	26.00	4.50
	GPRS 4TS	30.00	26.00	4.00
	EGPRS 1TS	27.00	19.50	7.50
	EGPRS 2TS	25.50	19.50	6.00
	EGPRS 3TS	23.00	19.50	3.50
	EGPRS 4TS	22.00	19.50	2.50
GSM1900	GPRS 1TS	30.00	23.00	7.00
	GPRS 2TS	29.50	23.00	6.50
	GPRS 3TS	27.50	23.00	4.50
	GPRS 4TS	26.50	22.50	4.00
	EGPRS 1TS	27.00	19.00	8.00
	EGPRS 2TS	25.50	19.00	6.50
	EGPRS 3TS	23.50	19.00	4.50
	EGPRS 4TS	22.00	19.00	3.00
WCDMA Band II	RMC	23.50	18.50	5.00
WCDMA Band IV	RMC	23.50	20.50	3.00
WCDMA Band V	RMC	24.50	21.50	3.00
LTE Band 2	QPSK	23.00	18.00	5.00
LTE Band 4	QPSK	23.00	20.00	3.00
LTE Band 5	QPSK	23.50	21.00	2.50
LTE Band 7	QPSK	23.50	16.50	7.00
LTE Band 26	QPSK	23.50	21.00	2.50
LTE Band 38	QPSK	24.00	18.00	6.00
LTE Band 40	QPSK	23.50	17.50	6.00
LTE Band 41	QPSK	24.00	18.00	6.00

### 13.2 GSM Measurement result

Table 13.2-1: The conducted power measurement results for GSM850

GSM850			Full power								
Mode	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devision Factor (dB)	Tune up Max	Average Power(dBm)		
				128/824.2	190/836.6	251/848.8			128/824.2	190/836.6	251/848.8
GPRS	GMSK	1 Tx	33.50	32.81	32.95	33.02	-9.03	24.47	23.78	23.92	23.99
		2 Tx	32.50	32.05	32.16	32.25	-6.02	26.48	26.03	26.14	26.23
		3 Tx	30.50	30.24	30.36	30.44	-4.26	26.24	25.98	26.10	26.18
		4 Tx	30.00	29.12	29.38	29.36	-3.01	26.99	26.11	26.37	26.35
EGPRS	8PSK	1 Tx	27.00	26.38	26.47	26.42	-9.03	17.97	17.35	17.44	17.39
		2 Tx	25.50	24.94	25.11	25.14	-6.02	19.48	18.92	19.09	19.12
		3 Tx	23.00	22.66	22.76	22.75	-4.26	18.74	18.40	18.50	18.49
		4 Tx	22.00	21.57	21.71	21.72	-3.01	18.99	18.56	18.70	18.71

GSM850			Sensor on								
Mode	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devision Factor (dB)	Tune up Max	Average Power(dBm)		
				128/824.2	190/836.6	251/848.8			128/824.2	190/836.6	251/848.8
GPRS	GMSK	1 Tx	26.00	25.43	25.30	25.46	-9.03	16.97	16.40	16.27	16.43
		2 Tx	26.00	25.32	25.26	25.40	-6.02	19.98	19.30	19.24	19.38
		3 Tx	26.00	25.29	25.17	25.34	-4.26	21.74	21.03	20.91	21.08
		4 Tx	26.00	25.10	25.11	25.07	-3.01	22.99	22.09	22.10	22.06
EGPRS	8PSK	1 Tx	19.50	19.03	19.05	18.85	-9.03	10.47	10.00	10.02	9.82
		2 Tx	19.50	18.81	18.89	18.64	-6.02	13.48	12.79	12.87	12.62
		3 Tx	19.50	18.72	18.83	18.62	-4.26	15.24	14.46	14.57	14.36
		4 Tx	19.50	18.75	18.82	18.60	-3.01	16.49	15.74	15.81	15.59

Table 13.2-2: The conducted power measurement results for GSM1900

GSM1900			Full power								
Mode	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devision Factor (dB)	Tune up Max	Average Power(dBm)		
				512/1850.2	661/1880	810/1909.8			512/1850.2	661/1880	810/1909.8
GPRS	GMSK	1 Tx	30.00	29.74	29.62	29.37	-9.03	20.97	20.71	20.59	20.34
		2 Tx	29.50	29.01	28.91	28.78	-6.02	23.48	22.99	22.89	22.76
		3 Tx	27.50	27.26	27.24	27.17	-4.26	23.24	23.00	22.98	22.91
		4 Tx	26.50	26.13	26.14	26.11	-3.01	23.49	23.12	23.13	23.10
EGPRS	8PSK	1 Tx	27.00	26.68	26.34	26.14	-9.03	17.97	17.65	17.31	17.11
		2 Tx	25.50	25.25	25.04	24.88	-6.02	19.48	19.23	19.02	18.86
		3 Tx	23.50	23.01	22.78	22.51	-4.26	19.24	18.75	18.52	18.25
		4 Tx	22.00	21.76	21.48	21.23	-3.01	18.99	18.75	18.47	18.22

GSM1900			Sensor on								
Mode	Modulation	Time Slot	Tune up (dBm)	Measure Power(dBm)			Devison Factor (dB)	Tune up Max	Average Power(dBm)		
				512/1850.2	661/1880	810/1909.8			512/1850.2	661/1880	810/1909.8
GPRS	GMSK	1 Tx	23.00	22.45	22.48	22.51	-9.03	13.97	13.42	13.45	13.48
		2 Tx	23.00	22.38	22.44	22.47	-6.02	16.98	16.36	16.42	16.45
		3 Tx	23.00	22.35	22.39	22.44	-4.26	18.74	18.09	18.13	18.18
		4 Tx	22.50	22.31	22.44	22.42	-3.01	19.99	19.30	19.37	19.41
EGPRS	8PSK	1 Tx	19.00	18.60	18.49	18.31	-9.03	9.97	9.57	9.46	9.28
		2 Tx	19.00	18.50	18.26	18.11	-6.02	12.98	12.48	12.24	12.09
		3 Tx	19.00	18.46	18.26	18.13	-4.26	14.74	14.20	14.00	13.87
		4 Tx	19.00	18.55	18.24	18.14	-3.01	15.99	15.54	15.23	15.13

**NOTES:**
**1) Division Factors**

To average the power, the division factor is as follows:

1TX-slot = 1 transmit time slot out of 8 time slots=> conducted power divided by (8/1) => -9.03dB

2TX-slots = 2 transmit time slots out of 8 time slots=> conducted power divided by (8/2) => -6.02dB

3TX-slots = 3 transmit time slots out of 8 time slots=> conducted power divided by (8/3) => -4.26dB

4TX-slots = 4 transmit time slots out of 8 time slots=> conducted power divided by (8/4) => -3.01dB

According to the conducted power as above, the body measurements are performed with 4Txslots for GSM850 and 4Txslots for GSM1900.

### 13.3 WCDMA Measurement result

Table 13.3-1: The conducted power for WCDMA Band II

Full power					
WCDMA Band II		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel/Frequency(MHz)		
			9262/1852.4	9400/1880	9538/1907.6
WCDMA	RMC	23.50	23.05	23.08	23.06
HSDPA	Subtest1	22.50	21.93	22.18	21.92
	Subtest2	22.50	22.11	22.02	22.02
	Subtest3	22.00	21.47	21.54	21.44
	Subtest4	22.00	21.61	21.70	21.46
HSUPA	Subtest1	20.50	20.15	20.04	20.04
	Subtest2	20.50	20.03	20.06	20.00
	Subtest3	21.50	21.11	21.08	21.22
	Subtest4	20.00	19.41	19.52	19.60
	Subtest5	21.50	21.11	20.96	21.20

Sensor on					
WCDMA Band II		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel/Frequency(MHz)		
			9262/1852.4	9400/1880	9538/1907.6
WCDMA	RMC	18.50	18.07	18.03	18.02
HSDPA	Subtest1	17.50	17.11	17.11	17.08
	Subtest2	17.50	17.03	17.11	16.90
	Subtest3	17.50	16.61	16.47	16.68
	Subtest4	17.50	16.59	16.57	16.58
HSUPA	Subtest1	15.50	14.93	15.03	14.88
	Subtest2	15.50	14.93	14.89	15.08
	Subtest3	16.50	16.09	16.17	15.98
	Subtest4	15.50	14.63	14.59	14.36
	Subtest5	16.50	16.07	16.03	15.94

Table 13.3-2: The conducted power for WCDMA Band IV

Full power					
WCDMA BandIV		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel/Frequency(MHz)		
			1312/1712.4	1413/1732.6	1513/1752.6
WCDMA	RMC	23.50	23.11	23.13	23.06
HSDPA	Subtest1	22.50	22.01	22.11	22.14
	Subtest2	22.50	22.05	22.25	21.90
	Subtest3	22.00	21.55	21.77	21.44
	Subtest4	22.00	21.55	21.55	21.44
HSUPA	Subtest1	20.50	20.25	20.17	20.06
	Subtest2	20.50	20.03	20.01	20.10
	Subtest3	21.50	21.01	21.09	21.16
	Subtest4	20.00	19.73	19.61	19.48
	Subtest5	21.50	20.99	21.07	21.18
Sensor on					
WCDMA BandIV		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel/Frequency(MHz)		
			1312/1712.4	1413/1732.6	1513/1752.6
WCDMA	RMC	20.50	20.01	20.05	20.11
HSDPA	Subtest1	19.50	18.95	18.93	18.82
	Subtest2	19.50	18.82	18.77	18.84
	Subtest3	19.50	18.31	18.27	18.34
	Subtest4	19.00	18.24	18.41	18.35
HSUPA	Subtest1	17.50	16.98	17.05	16.86
	Subtest2	17.50	16.93	16.99	16.86
	Subtest3	18.50	18.05	18.03	18.22
	Subtest4	17.00	16.59	16.41	16.40
	Subtest5	18.50	17.98	18.05	17.99



Table 13.3-3: The conducted power for WCDMA Band V

Full power					
WCDMA Band V		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel/Frequency(MHz)		
			4132/826.4	4183/836.6	4233/846.6
WCDMA	RMC	24.50	23.76	23.78	23.73
HSDPA	Subtest1	23.50	22.80	22.64	22.89
	Subtest2	23.50	22.76	22.74	22.85
	Subtest3	23.00	22.10	22.28	22.37
	Subtest4	22.50	22.24	22.24	22.27
HSUPA	Subtest1	21.50	20.74	20.82	20.73
	Subtest2	21.50	20.80	20.92	20.69
	Subtest3	22.00	21.66	21.64	21.63
	Subtest4	20.50	20.20	20.24	20.19
	Subtest5	22.50	21.62	21.86	21.75

Sensor on					
WCDMA Band V		Maximum Conducted Power (dBm)			
Mode	Test Mode	Tune up	Channel/Frequency(MHz)		
			4132/826.4	4183/836.6	4233/846.6
WCDMA	RMC	21.50	20.65	20.66	20.65
HSDPA	Subtest1	20.00	19.49	19.68	19.61
	Subtest2	20.00	19.69	19.68	19.73
	Subtest3	20.00	19.17	19.30	19.27
	Subtest4	19.50	19.27	19.08	19.23
HSUPA	Subtest1	18.50	17.59	17.70	17.81
	Subtest2	18.00	17.63	17.76	17.51
	Subtest3	19.00	18.61	18.70	18.49
	Subtest4	17.50	17.27	17.12	17.13
	Subtest5	19.00	18.65	18.50	18.57

### 13.4 LTE Measurement result

Table 13.4-1: The conducted power for LTE Band 2

Full power						
LTE B2			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				Channel/Frequency(MHz)		
				18607/1850.7	18900/1880	19193/1909.3
QPSK	1	Low	23.00	22.06	22.12	22.11
		Middle		22.29	22.27	22.25
		High		21.97	21.98	22.01
	50%	Low	23.00	22.19	22.33	22.28
		Middle		22.20	22.25	22.17
		High		22.17	22.27	22.05
100%	/	22.00	21.27	21.38	21.25	
16QAM	1	Low	22.00	21.41	21.57	21.52
		Middle		21.39	21.44	21.47
		High		21.40	21.37	21.31
	50%	Low	22.00	21.35	21.28	21.25
		Middle		21.33	21.26	21.35
		High		21.34	21.32	21.26
100%	/	21.00	20.34	20.42	20.36	
Modulation	RB	RB Offset	Tune up	3MHz		
				Channel/Frequency(MHz)		
				18615/1851.5	18900/1880	19185/1908.5
QPSK	1	Low	23.00	22.08	22.16	22.14
		Middle		22.27	22.30	22.29
		High		22.00	22.03	22.05
	50%	Low	22.00	21.29	21.55	21.41
		Middle		21.32	21.35	21.29
		High		21.27	21.38	21.15
100%	/	22.00	21.27	21.42	21.28	
16QAM	1	Low	22.00	21.44	21.59	21.55
		Middle		21.42	21.44	21.51
		High		21.42	21.41	21.34
	50%	Low	21.00	20.46	20.41	20.37
		Middle		20.44	20.39	20.47
		High		20.44	20.44	20.39
100%	/	21.00	20.37	20.46	20.39	
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				18625/1852.5	18900/1880	19175/1907.5

QPSK	1	Low	23.00	22.05	22.14	22.10
		Middle		22.35	22.31	22.26
		High		21.97	21.98	22.01
	50%	Low	22.00	21.26	21.50	21.37
		Middle		21.30	21.31	21.24
		High		21.25	21.36	21.11
	100%	/	22.00	21.27	21.41	21.26
16QAM	1	Low	22.00	21.41	21.55	21.52
		Middle		21.39	21.42	21.48
		High		21.39	21.39	21.30
	50%	Low	21.00	20.44	20.37	20.34
		Middle		20.41	20.34	20.43
		High		20.41	20.39	20.35
	100%	/	21.00	20.35	20.42	20.34
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				18650/1855	18900/1880	19150/1905
QPSK	1	Low	23.00	22.07	22.15	22.13
		Middle		22.31	22.21	22.30
		High		21.99	22.02	22.04
	50%	Low	22.00	21.29	21.55	21.41
		Middle		21.33	21.36	21.28
		High		21.27	21.40	21.16
	100%	/	22.00	21.31	21.43	21.30
16QAM	1	Low	22.00	21.43	21.58	21.54
		Middle		21.42	21.46	21.51
		High		21.42	21.41	21.33
	50%	Low	21.00	20.47	20.42	20.38
		Middle		20.43	20.38	20.46
		High		20.44	20.44	20.39
	100%	/	21.00	20.38	20.47	20.38
Modulation	RB	RB Offset	Tune up	15MHz		
				Channel/Frequency(MHz)		
				18675/1857.5	18900/1880	19125/1902.5
QPSK	1	Low	23.00	22.06	22.11	22.11
		Middle		22.33	22.34	22.27
		High		21.96	21.97	22.00
	50%	Low	22.00	21.27	21.51	21.38
		Middle		21.30	21.31	21.24
		High		21.24	21.37	21.12
	100%	/	22.00	21.29	21.39	21.25
16QAM	1	Low	22.00	21.38	21.56	21.52

		Middle		21.40	21.43	21.49	
		High		21.39	21.37	21.30	
		Low		20.44	20.40	20.35	
	50%	Middle	21.00	20.40	20.33	20.42	
		High	21.00	20.42	20.40	20.36	
	100%	/	21.00	20.35	20.42	20.34	
Modulation	RB	RB Offset	Tune up	20MHz			
				Channel/Frequency(MHz)			
				18700/1860	18900/1880	19100/1900	
QPSK	1	Low	23.00	22.03	22.07	22.08	
		Middle		22.35	22.36	22.25	
		High		21.94	21.96	21.97	
	50%	Low	22.00	21.24	21.56	21.34	
		Middle		21.28	21.27	21.21	
		High		21.21	21.32	21.08	
	100%	/	22.00	21.26	21.34	21.21	
	16QAM	1	Low	22.00	21.46	21.52	21.47
			Middle		21.36	21.41	21.45
High			21.37		21.34	21.28	
50%		Low	21.00	20.41	20.36	20.32	
		Middle		20.37	20.31	20.39	
		High		20.39	20.35	20.32	
100%		/	21.00	20.33	20.38	20.31	
<b>Sensor on</b>							
<b>LTE B2</b>			<b>Maximum Conducted Power (dBm)</b>				
Modulation	RB	RB Offset	Tune up	1.4MHz			
				Channel/Frequency(MHz)			
				18607/1850.7	18900/1880	19193/1909.3	
QPSK	1	Low	18.00	17.14	17.17	17.07	
		Middle		17.29	17.27	17.28	
		High		16.90	17.01	16.91	
	50%	Low	18.00	17.09	17.21	17.15	
		Middle		17.09	17.05	17.00	
		High		17.07	17.08	17.08	
100%	/	18.00	17.09	17.17	17.12		
16QAM	1	Low	18.00	17.06	17.03	16.97	
		Middle		17.04	17.08	17.04	
		High		17.12	17.17	17.06	
	50%	Low	18.00	17.11	17.03	17.29	
		Middle		17.11	17.16	17.11	
		High		17.27	17.15	17.26	
	100%	/	18.00	16.92	16.99	16.92	

Modulation	RB	RB Offset	Tune up	3MHz			
				Channel/Frequency(MHz)			
				18615/1851.5	18900/1880	19185/1908.5	
QPSK	1	Low	18.00	17.16	17.21	17.10	
		Middle		17.27	17.30	17.32	
		High		16.93	17.06	16.95	
	50%	Low	18.00	17.27	17.27	17.24	
		Middle		17.17	17.27	17.20	
		High		17.17	17.23	17.20	
	100%	/	18.00	17.09	17.21	17.15	
	16QAM	1	Low	18.00	17.09	17.05	17.00
			Middle		17.07	17.08	17.08
High			17.14		17.21	17.09	
50%		Low	18.00	17.22	17.16	17.11	
		Middle		17.22	17.29	17.23	
		High		16.87	16.97	16.89	
100%		/	18.00	16.95	17.03	16.95	
Modulation		RB	RB Offset	Tune up	5MHz		
					Channel/Frequency(MHz)		
	18625/1852.5				18900/1880	19175/1907.5	
QPSK	1	Low	18.00	17.13	17.19	17.06	
		Middle		17.25	17.35	17.29	
		High		16.90	17.01	16.91	
	50%	Low	18.00	17.24	17.22	17.20	
		Middle		17.15	17.23	17.15	
		High		17.15	17.21	17.16	
	100%	/	18.00	17.09	17.20	17.13	
	16QAM	1	Low	18.00	17.06	17.01	16.97
			Middle		17.04	17.06	17.05
High			17.11		17.19	17.05	
50%		Low	18.00	17.20	17.12	17.08	
		Middle		17.19	17.24	17.19	
		High		16.84	16.92	16.85	
100%		/	18.00	16.93	16.99	16.90	
Modulation		RB	RB Offset	Tune up	10MHz		
					Channel/Frequency(MHz)		
	18650/1855				18900/1880	19150/1905	
QPSK	1	Low	18.00	17.15	17.20	17.09	
		Middle		17.28	17.31	17.33	
		High		16.92	17.05	16.94	
	50%	Low	18.00	17.27	17.27	17.24	
		Middle		17.18	17.23	17.19	
		High					

		High		17.17	17.25	17.21
				100%	/	18.00
16QAM	1	Low	18.00	17.08	17.04	16.99
		Middle		17.07	17.10	17.08
		High		17.14	17.21	17.08
	50%	Low	18.00	17.23	17.17	17.12
		Middle		17.21	17.23	17.22
		High		16.87	16.97	16.89
100%	/	18.00	16.96	17.04	16.94	
Modulation	RB	RB Offset	Tune up	15MHz		
				Channel/Frequency(MHz)		
				18675/1857.5	18900/1880	19125/1902.5
QPSK	1	Low	18.00	17.14	17.16	17.07
		Middle		17.26	17.30	17.30
		High		16.89	17.00	16.90
	50%	Low	18.00	17.25	17.23	17.21
		Middle		17.15	17.23	17.15
		High		17.14	17.22	17.17
100%	/	18.00	17.11	17.18	17.12	
16QAM	1	Low	18.00	17.03	17.02	16.97
		Middle		17.05	17.07	17.06
		High		17.11	17.17	17.05
	50%	Low	18.00	17.20	17.15	17.09
		Middle		17.18	17.23	17.18
		High		16.85	16.93	16.86
100%	/	18.00	16.93	16.99	16.90	
Modulation	RB	RB Offset	Tune up	20MHz		
				Channel/Frequency(MHz)		
				18700/1860	18900/1880	19100/1900
QPSK	1	Low	18.00	17.11	17.12	17.04
		Middle		17.25	17.36	17.28
		High		16.87	16.99	16.87
	50%	Low	18.00	17.22	17.28	17.17
		Middle		17.13	17.19	17.12
		High		17.11	17.17	17.13
100%	/	18.00	17.08	17.13	17.08	
16QAM	1	Low	18.00	16.92	16.98	16.92
		Middle		17.01	17.05	17.02
		High		17.09	17.14	17.03
	50%	Low	18.00	17.17	17.11	17.06
		Middle		17.15	17.21	17.15
		High		16.82	16.88	16.82

	100%	/	18.00	16.91	16.95	16.87
--	------	---	-------	-------	-------	-------

Table 13.4-2: The conducted power for LTE Band 4

Full power							
LTE B4			Maximum Conducted Power (dBm)				
Modulation	RB	RB Offset	Tune up	1.4MHz			
				Channel/Frequency(MHz)			
				19957/1710.7	20175/1732.5	20393/1754.3	
QPSK	1	Low	23.00	21.97	22.02	21.88	
		Middle		22.09	22.07	22.15	
		High		21.75	21.79	21.82	
	50%	Low	23.00	22.09	22.15	22.09	
		Middle		22.09	22.12	22.10	
		High		21.98	22.03	22.01	
	100%	/	22.00	21.04	21.13	21.07	
	16QAM	1	Low	22.00	21.18	21.33	21.27
			Middle		21.16	21.22	21.14
High			21.19		21.28	21.31	
50%		Low	22.00	21.06	21.09	21.06	
		Middle		21.07	21.10	21.07	
		High		21.07	20.98	20.86	
100%		/	21.00	20.19	20.10	20.07	
Modulation		RB	RB Offset	Tune up	3MHz		
					Channel/Frequency(MHz)		
	19965/1711.5				20175/1732.5	20385/1753.5	
QPSK	1	Low	23.00	21.99	22.06	21.91	
		Middle		22.07	22.09	22.04	
		High		21.78	21.84	21.86	
	50%	Low	22.00	21.19	21.28	21.22	
		Middle		21.21	21.22	21.25	
		High		21.08	21.14	21.11	
	100%	/	22.00	21.04	21.17	21.10	
	16QAM	1	Low	22.00	21.21	21.35	21.30
			Middle		21.19	21.22	21.18
High			21.21		21.32	21.34	
50%		Low	21.00	20.17	20.22	20.18	
		Middle		20.18	20.23	20.19	
		High		20.17	20.10	19.99	
100%		/	21.00	20.22	20.14	20.10	
Modulation		RB	RB Offset	Tune up	5MHz		
					Channel/Frequency(MHz)		

				19975/1712.5	20175/1732.5	20375/1752.5
QPSK	1	Low	23.00	21.96	22.04	21.87
		Middle		22.05	22.06	22.07
		High		21.75	21.79	21.82
	50%	Low	22.00	21.16	21.23	21.18
		Middle		21.19	21.28	21.17
		High		21.06	21.12	21.07
	100%	/	22.00	21.04	21.16	21.08
16QAM	1	Low	22.00	21.18	21.31	21.27
		Middle		21.16	21.20	21.15
		High		21.18	21.30	21.30
	50%	Low	21.00	20.15	20.18	20.15
		Middle		20.15	20.18	20.15
		High		20.14	20.05	19.95
	100%	/	21.00	20.20	20.10	20.05
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				20000/1715	20175/1732.5	20350/1750
QPSK	1	Low	23.00	21.98	22.05	21.90
		Middle		22.08	22.14	22.12
		High		21.77	21.83	21.85
	50%	Low	22.00	21.19	21.28	21.22
		Middle		21.22	21.23	21.21
		High		21.08	21.16	21.12
	100%	/	22.00	21.08	21.18	21.12
16QAM	1	Low	22.00	21.20	21.34	21.29
		Middle		21.19	21.24	21.18
		High		21.21	21.32	21.33
	50%	Low	21.00	20.18	20.23	20.19
		Middle		20.17	20.22	20.18
		High		20.17	20.10	19.99
	100%	/	21.00	20.23	20.15	20.09
Modulation	RB	RB Offset	Tune up	15MHz		
				Channel/Frequency(MHz)		
				20025/1717.5	20175/1732.5	20325/1747.5
QPSK	1	Low	23.00	21.97	22.01	21.88
		Middle		22.06	22.11	22.07
		High		21.74	21.78	21.81
	50%	Low	22.00	21.17	21.24	21.19
		Middle		21.19	21.28	21.17
		High		21.05	21.13	21.08
	100%	/	22.00	21.06	21.14	21.07



16QAM	1	Low	22.00	21.15	21.32	21.27
		Middle		21.17	21.21	21.16
		High		21.18	21.28	21.30
	50%	Low	21.00	20.15	20.21	20.16
		Middle		20.14	20.17	20.14
		High		20.15	20.06	19.96
	100%	/	21.00	20.20	20.10	20.05
Modulation	RB	RB Offset	Tune up	20MHz		
				Channel/Frequency(MHz)		
				20050/1720	20175/1732.5	20300/1745
QPSK	1	Low	23.00	21.94	21.97	21.85
		Middle		22.05	22.16	22.15
		High		21.72	21.77	21.78
	50%	Low	22.00	21.14	21.29	21.15
		Middle		21.11	21.24	21.14
		High		21.02	21.08	21.04
	100%	/	22.00	21.03	21.09	21.03
16QAM	1	Low	22.00	21.16	21.28	21.22
		Middle		21.13	21.19	21.12
		High		21.16	21.25	21.28
	50%	Low	21.00	20.12	20.17	20.13
		Middle		20.11	20.15	20.11
		High		20.12	20.01	19.92
	100%	/	21.00	20.18	20.06	20.02
<b>Sensor on</b>						
<b>LTE B4</b>			<b>Maximum Conducted Power (dBm)</b>			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				Channel/Frequency(MHz)		
				19957/1710.7	20175/1732.5	20393/1754.3
QPSK	1	Low	20.00	19.04	19.10	19.11
		Middle		19.19	19.23	19.17
		High		19.14	19.03	18.97
	50%	Low	20.00	19.05	19.10	19.04
		Middle		19.14	19.06	19.16
		High		19.05	19.15	19.04
	100%	/	20.00	19.16	19.25	19.22
16QAM	1	Low	20.00	19.07	19.17	19.12
		Middle		19.05	19.10	19.04
		High		19.14	19.06	19.16
	50%	Low	20.00	19.07	19.17	19.12
		Middle		19.08	19.12	19.04
		High		19.12	19.06	19.11

	100%	/	20.00	19.10	19.06	19.12	
Modulation	RB	RB Offset	Tune up	3MHz			
				Channel/Frequency(MHz)			
				19965/1711.5	20175/1732.5	20385/1753.5	
QPSK	1	Low	20.00	19.06	19.14	19.14	
		Middle		19.17	19.26	19.21	
		High		19.17	19.08	19.01	
	50%	Low	20.00	19.19	19.22	19.23	
		Middle		19.26	19.17	19.21	
		High		19.25	19.20	19.15	
	100%	/	20.00	19.16	19.19	19.25	
	16QAM	1	Low	20.00	19.10	19.19	19.15
			Middle		19.08	19.10	19.08
High			19.16		19.10	19.19	
50%		Low	20.00	19.12	19.18	19.23	
		Middle		19.19	19.27	19.21	
		High		19.08	19.18	19.22	
100%		/	20.00	19.13	19.10	19.15	
Modulation		RB	RB Offset	Tune up	5MHz		
					Channel/Frequency(MHz)		
	19975/1712.5				20175/1732.5	20375/1752.5	
QPSK	1	Low	20.00	19.03	19.12	19.10	
		Middle		19.15	19.22	19.18	
		High		19.14	19.03	18.97	
	50%	Low	20.00	19.16	19.27	19.19	
		Middle		19.24	19.23	19.26	
		High		19.23	19.18	19.11	
	100%	/	20.00	19.16	19.28	19.23	
	16QAM	1	Low	20.00	19.07	19.15	19.12
			Middle		19.05	19.08	19.05
High			19.13		19.08	19.15	
50%		Low	20.00	19.10	19.14	19.20	
		Middle		19.16	19.22	19.17	
		High		19.05	19.13	19.18	
100%		/	20.00	19.11	19.06	19.10	
Modulation		RB	RB Offset	Tune up	10MHz		
					Channel/Frequency(MHz)		
	20000/1715				20175/1732.5	20350/1750	
QPSK	1	Low	20.00	19.05	19.13	19.13	
		Middle		19.18	19.27	19.22	
		High		19.16	19.07	19.00	
	50%	Low	20.00	19.19	19.12	19.23	

		Middle		19.27	19.18	19.20
		High		19.25	19.22	19.16
	100%	/	20.00	19.20	19.20	19.27
16QAM	1	Low	20.00	19.09	19.18	19.14
		Middle		19.08	19.12	19.08
		High		19.16	19.10	19.18
	50%	Low	20.00	19.13	19.19	19.24
		Middle		19.18	19.26	19.20
		High		19.08	19.18	19.22
	100%	/	20.00	19.14	19.11	19.14
Modulation	RB	RB Offset	Tune up	15MHz		
				Channel/Frequency(MHz)		
				20025/1717.5	20175/1732.5	20325/1747.5
QPSK	1	Low	20.00	19.04	19.09	19.11
		Middle		19.16	19.26	19.19
		High		19.13	19.02	18.96
	50%	Low	20.00	19.17	19.28	19.20
		Middle		19.24	19.23	19.26
		High		19.22	19.19	19.12
	100%	/	20.00	19.18	19.26	19.22
16QAM	1	Low	20.00	19.04	19.16	19.12
		Middle		19.06	19.09	19.06
		High		19.13	19.06	19.15
	50%	Low	20.00	19.10	19.17	19.21
		Middle		19.15	19.21	19.16
		High		19.06	19.14	19.19
	100%	/	20.00	19.11	19.06	19.10
Modulation	RB	RB Offset	Tune up	20MHz		
				Channel/Frequency(MHz)		
				20050/1720	20175/1732.5	20300/1745
QPSK	1	Low	20.00	19.01	19.05	19.08
		Middle		19.15	19.22	19.17
		High		19.11	19.01	18.93
	50%	Low	20.00	19.22	19.29	19.23
		Middle		19.21	19.28	19.20
		High		19.19	19.14	19.08
	100%	/	20.00	19.15	19.21	19.18
16QAM	1	Low	20.00	19.06	19.12	19.07
		Middle		19.02	19.07	19.02
		High		19.11	19.03	19.13
	50%	Low	20.00	19.07	19.13	19.18
		Middle		19.12	19.19	19.13

		High		19.03	19.09	19.15
	100%	/	20.00	19.09	19.02	19.07

Table 13.4-3: The conducted power for LTE Band 5

Full power						
LTE B5			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				Channel/Frequency(MHz)		
				20407/824.7	20525/836.5	20643/848.3
QPSK	1	Low	23.50	22.31	22.44	21.94
		Middle		22.42	22.36	21.94
		High		22.42	22.37	21.93
	50%	Low	23.50	22.37	22.44	22.36
		Middle		22.33	22.44	22.37
		High		22.27	22.30	22.24
	100%	/	22.50	21.29	21.40	21.45
16QAM	1	Low	22.50	21.47	21.46	21.51
		Middle		21.45	21.50	21.43
		High		21.51	21.49	21.48
	50%	Low	22.50	21.28	21.37	21.46
		Middle		21.45	21.36	21.44
		High		21.42	21.38	21.43
	100%	/	21.50	20.33	20.41	20.37
Modulation	RB	RB Offset	Tune up	3MHz		
				Channel/Frequency(MHz)		
				20415/825.5	20525/836.5	20635/847.5
QPSK	1	Low	23.50	22.32	22.37	21.96
		Middle		22.41	22.40	21.99
		High		22.44	22.41	21.96
	50%	Low	22.50	21.47	21.56	21.49
		Middle		21.46	21.55	21.48
		High		21.37	21.43	21.35
	100%	/	22.50	21.33	21.45	21.50
16QAM	1	Low	22.50	21.49	21.47	21.53
		Middle		21.48	21.52	21.47
		High		21.53	21.53	21.50
	50%	Low	21.50	20.40	20.51	20.59
		Middle		20.55	20.48	20.55
		High		20.52	20.50	20.56
	100%	/	21.50	20.37	20.46	20.39
Modulation	RB	RB Offset	Tune up	5MHz		

				Channel/Frequency(MHz)		
				20425/826.5	20525/836.5	20625/846.5
QPSK	1	Low	23.50	22.31	22.43	21.94
		Middle		22.39	22.39	21.96
		High		22.41	22.36	21.92
	50%	Low	22.50	21.45	21.52	21.46
		Middle		21.43	21.50	21.44
		High		21.34	21.40	21.31
	100%	/	22.50	21.31	21.41	21.45
16QAM	1	Low	22.50	21.44	21.45	21.51
		Middle		21.46	21.49	21.45
		High		21.50	21.49	21.47
	50%	Low	21.50	20.37	20.49	20.56
		Middle		20.52	20.43	20.51
		High		20.50	20.46	20.53
	100%	/	21.50	20.34	20.41	20.35
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				20450/829	20525/836.5	20600/844
QPSK	1	Low	23.50	22.28	22.39	21.91
		Middle		22.38	22.45	21.94
		High		22.39	22.35	21.89
	50%	Low	22.50	21.42	21.57	21.42
		Middle		21.41	21.46	21.41
		High		21.31	21.35	21.27
	100%	/	22.50	21.28	21.36	21.41
16QAM	1	Low	22.50	21.48	21.41	21.46
		Middle		21.42	21.47	21.41
		High		21.48	21.46	21.45
	50%	Low	21.50	20.34	20.45	20.53
		Middle		20.49	20.41	20.48
		High		20.47	20.41	20.49
	100%	/	21.50	20.32	20.37	20.32
<b>Sensor on</b>						
<b>LTE B5</b>			<b>Maximum Conducted Power (dBm)</b>			
Modulation	RB	RB Offset	Tune up	1.4MHz		
				Channel/Frequency(MHz)		
				20407/824.7	20525/836.5	20643/848.3
QPSK	1	Low	21.00	20.48	20.48	20.51
		Middle		20.41	20.47	20.51
		High		20.39	20.43	20.52
	50%	Low	21.00	20.36	20.54	20.46

		Middle		20.30	20.54	20.44
		High		20.20	20.32	20.28
	100%	/	21.00	20.27	20.43	20.36
16QAM	1	Low	21.00	20.43	20.41	20.33
		Middle		20.41	20.28	20.31
		High		20.44	20.49	20.40
	50%	Low	21.00	20.46	20.33	20.21
		Middle		20.41	20.28	20.23
		High		20.44	20.35	20.35
	100%	/	21.00	20.40	20.37	20.51
Modulation	RB	RB Offset	Tune up	3MHz		
				Channel/Frequency(MHz)		
				20415/825.5	20525/836.5	20635/847.5
QPSK	1	Low	21.00	20.49	20.51	20.53
		Middle		20.50	20.51	20.55
		High		20.41	20.47	20.55
	50%	Low	21.00	20.46	20.56	20.49
		Middle		20.43	20.55	20.55
		High		20.30	20.45	20.39
	100%	/	21.00	20.31	20.48	20.41
16QAM	1	Low	21.00	20.45	20.42	20.35
		Middle		20.44	20.30	20.35
		High		20.46	20.53	20.42
	50%	Low	21.00	20.48	20.47	20.34
		Middle		20.51	20.40	20.34
		High		20.54	20.47	20.48
	100%	/	21.00	20.44	20.42	20.53
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				20425/826.5	20525/836.5	20625/846.5
QPSK	1	Low	21.00	20.48	20.47	20.51
		Middle		20.48	20.50	20.53
		High		20.38	20.42	20.51
	50%	Low	21.00	20.44	20.52	20.56
		Middle		20.40	20.50	20.51
		High		20.27	20.42	20.35
	100%	/	21.00	20.29	20.44	20.36
16QAM	1	Low	21.00	20.40	20.40	20.33
		Middle		20.42	20.27	20.33
		High		20.43	20.49	20.39
	50%	Low	21.00	20.55	20.45	20.31
		Middle		20.48	20.35	20.30

	100%	High	21.00	20.52	20.43	20.45	
		/		20.41	20.37	20.49	
Modulation	RB	RB Offset	Tune up	10MHz			
				Channel/Frequency(MHz)			
				20450/829	20525/836.5	20600/844	
QPSK	1	Low	21.00	20.45	20.53	20.48	
		Middle		20.47	20.56	20.51	
		High		20.36	20.41	20.48	
	50%	Low	21.00	20.41	20.57	20.52	
		Middle		20.38	20.56	20.48	
		High		20.24	20.37	20.31	
	100%	/	21.00	20.26	20.39	20.32	
	16QAM	1	Low	21.00	20.41	20.36	20.28
			Middle		20.38	20.25	20.29
High			20.41		20.46	20.37	
50%		Low	21.00	20.52	20.41	20.28	
		Middle		20.45	20.33	20.27	
		High		20.49	20.38	20.41	
100%		/	21.00	20.39	20.33	20.46	

Table 13.4-4: The conducted Power for LTE Band 7

Full power						
LTE B7			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				20775/2502.5	21100/2535	21425/2567.5
QPSK	1	Low	23.50	22.19	22.08	22.16
		Middle		22.54	22.47	22.48
		High		22.34	22.29	22.22
	50%	Low	22.50	21.44	21.52	21.46
		Middle		21.38	21.51	21.40
		High		21.41	21.49	21.42
100%	/	22.50	21.43	21.54	21.40	
16QAM	1	Low	22.50	21.50	21.35	21.44
		Middle		21.48	21.54	21.45
		High		21.37	21.49	21.39
	50%	Low	21.50	20.44	20.53	20.43
		Middle		20.48	20.51	20.43
		High		20.61	20.58	20.51
100%	/	21.50	20.48	20.63	20.47	
Modulation	RB	RB Offset	Tune up	10MHz		

				Channel/Frequency(MHz)		
				20800/2505	21100/2535	21400/2565
QPSK	1	Low	23.50	22.21	22.09	22.19
		Middle		22.47	22.52	22.52
		High		22.36	22.33	22.25
	50%	Low	22.50	21.47	21.57	21.50
		Middle		21.41	21.56	21.44
		High		21.43	21.53	21.47
	100%	/	22.50	21.47	21.56	21.44
16QAM	1	Low	22.50	21.52	21.38	21.46
		Middle		21.51	21.58	21.48
		High		21.40	21.51	21.42
	50%	Low	21.50	20.47	20.58	20.47
		Middle		20.50	20.55	20.46
		High		20.64	20.63	20.55
	100%	/	21.50	20.51	20.68	20.51
Modulation	RB	RB Offset	Tune up	15MHz		
				Channel/Frequency(MHz)		
				20825/2507.5	21100/2535	21375/2562.5
QPSK	1	Low	23.50	22.20	22.05	22.17
		Middle		22.55	22.51	22.49
		High		22.33	22.28	22.21
	50%	Low	22.50	21.45	21.53	21.47
		Middle		21.38	21.51	21.40
		High		21.40	21.50	21.43
	100%	/	22.50	21.45	21.52	21.39
16QAM	1	Low	22.50	21.47	21.36	21.44
		Middle		21.49	21.55	21.46
		High		21.37	21.47	21.39
	50%	Low	21.50	20.44	20.56	20.44
		Middle		20.47	20.50	20.42
		High		20.62	20.59	20.52
	100%	/	21.50	20.48	20.63	20.47
Modulation	RB	RB Offset	Tune up	20MHz		
				Channel/Frequency(MHz)		
				20850/2510	21100/2535	21350/2560
QPSK	1	Low	23.50	22.17	22.01	22.14
		Middle		22.54	22.57	22.47
		High		22.31	22.27	22.18
	50%	Low	22.50	21.42	21.58	21.43
		Middle		21.36	21.47	21.37
		High		21.37	21.45	21.39



	100%	/	22.50	21.42	21.47	21.35
16QAM	1	Low	22.50	21.39	21.32	21.39
		Middle		21.45	21.53	21.42
		High		21.35	21.44	21.37
	50%	Low	21.50	20.41	20.52	20.41
		Middle		20.44	20.48	20.39
		High		20.59	20.54	20.48
	100%	/	21.50	20.46	20.59	20.44
<b>Sensor on</b>						
<b>LTE B7</b>			<b>Maximum Conducted Power (dBm)</b>			
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				20775/2502.5	21100/2535	21425/2567.5
QPSK	1	Low	16.50	15.58	15.73	15.59
		Middle		15.98	16.05	15.89
		High		15.74	15.77	15.66
	50%	Low	16.50	15.78	16.06	15.82
		Middle		15.88	15.98	15.87
		High		15.86	15.96	15.82
	100%	/	16.50	15.90	16.02	15.92
16QAM	1	Low	16.50	15.78	15.92	15.84
		Middle		15.76	15.84	15.81
		High		15.75	15.90	15.78
	50%	Low	16.50	15.72	15.80	15.75
		Middle		15.70	15.78	15.72
		High		15.81	15.90	15.84
	100%	/	16.50	15.70	15.86	15.81
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				20800/2505	21100/2535	21400/2565
QPSK	1	Low	16.50	15.60	15.74	15.62
		Middle		16.01	16.04	15.93
		High		15.76	15.81	15.69
	50%	Low	16.50	15.81	15.95	15.86
		Middle		15.91	16.03	15.91
		High		15.88	16.00	15.87
	100%	/	16.50	15.94	16.01	15.96
16QAM	1	Low	16.50	15.80	15.95	15.86
		Middle		15.79	15.88	15.84
		High		15.78	15.92	15.81
	50%	Low	16.50	15.75	15.85	15.79
		Middle		15.72	15.82	15.75

Modulation	RB	RB Offset	Tune up	15MHz			
				Channel/Frequency(MHz)			
				20825/2507.5	21100/2535	21375/2562.5	
QPSK	1	High	16.50	15.84	15.95	15.88	
		Middle		15.73	15.91	15.85	
		Low		15.59	15.70	15.60	
	50%	High	16.50	15.73	15.76	15.65	
		Middle		15.79	16.01	15.83	
		Low		15.88	15.98	15.87	
	100%	/	16.50	15.85	15.97	15.83	
	16QAM	1	High	16.50	15.92	16.02	15.91
			Middle		15.75	15.93	15.84
Low			15.77		15.85	15.82	
50%		High	16.50	15.75	15.88	15.78	
		Middle		15.72	15.83	15.76	
		Low		15.69	15.77	15.71	
100%		/	16.50	15.82	15.91	15.85	
QPSK		1	High	16.50	15.70	15.86	15.81
			Middle		15.56	15.66	15.57
	Low		15.98		16.05	15.88	
	50%	High	16.50	15.71	15.75	15.62	
		Middle		15.76	16.02	15.79	
		Low		15.71	15.94	15.78	
	100%	/	16.50	15.70	15.92	15.75	
	16QAM	1	High	16.50	15.89	16.01	15.87
			Middle		15.81	15.89	15.79
Low			15.73		15.83	15.78	
50%		High	16.50	15.73	15.85	15.76	
		Middle		15.69	15.79	15.73	
		Low		15.66	15.75	15.68	
100%		/	16.50	15.79	15.86	15.81	
QPSK		1	High	16.50	15.68	15.82	15.78
			Middle		15.68	15.82	15.78
	Low		15.68		15.82	15.78	
	50%	High	16.50	15.68	15.82	15.78	
		Middle		15.68	15.82	15.78	
		Low		15.68	15.82	15.78	
	100%	/	16.50	15.68	15.82	15.78	

Table 13.4-5: The conducted Power for LTE Band 26

Full power					
LTE B26			Maximum Conducted Power (dBm)		
Modulation	RB	RB Offset	Tune up	1.4MHz	

				Channel/Frequency(MHz)		
				26697/814.7	26865/831.5	27033/848.3
QPSK	1	Low	23.50	22.40	22.33	22.43
		Middle		22.37	22.36	22.36
		High		22.35	22.38	22.36
	50%	Low	23.50	22.49	22.55	22.39
		Middle		22.38	22.54	22.47
		High		22.48	22.49	22.44
100%	/	22.50	21.42	21.52	21.45	
16QAM	1	Low	22.50	21.58	21.60	21.51
		Middle		21.56	21.57	21.48
		High		21.39	21.51	21.35
	50%	Low	22.50	21.30	21.37	21.46
		Middle		21.45	21.37	21.52
		High		21.42	21.39	21.29
100%	/	21.50	20.46	20.56	20.53	
Modulation	RB	RB Offset	Tune up	3MHz		
				Channel/Frequency(MHz)		
				26705/815.5	26865/831.5	27025/847.5
QPSK	1	Low	23.50	22.39	22.35	22.42
		Middle		22.33	22.35	22.37
		High		22.35	22.38	22.36
	50%	Low	22.50	21.56	21.52	21.48
		Middle		21.48	21.50	21.54
		High		21.56	21.48	21.50
100%	/	22.50	21.42	21.55	21.46	
16QAM	1	Low	22.50	21.58	21.58	21.51
		Middle		21.56	21.55	21.49
		High		21.38	21.53	21.34
	50%	Low	21.50	20.39	20.46	20.55
		Middle		20.53	20.45	20.60
		High		20.49	20.46	20.38
100%	/	21.50	20.47	20.56	20.51	
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				26715/816.5	26865/831.5	27015/846.5
QPSK	1	Low	23.50	22.41	22.36	22.45
		Middle		22.36	22.40	22.41
		High		22.37	22.42	22.39
	50%	Low	22.50	21.49	21.57	21.52
		Middle		21.51	21.55	21.48
		High		21.48	21.52	21.55

	100%	/	22.50	21.46	21.57	21.50
16QAM	1	Low	22.50	21.60	21.61	21.53
		Middle		21.59	21.59	21.52
		High		21.41	21.55	21.37
	50%	Low	21.50	20.42	20.51	20.59
		Middle		20.55	20.49	20.63
		High		20.52	20.51	20.42
100%	/	21.50	20.50	20.61	20.55	
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				26740/819	26865/831.5	26990/844
QPSK	1	Low	23.50	22.40	22.32	22.43
		Middle		22.34	22.39	22.38
		High		22.34	22.37	22.35
	50%	Low	22.50	21.57	21.53	21.49
		Middle		21.48	21.50	21.54
		High		21.55	21.49	21.51
100%	/	22.50	21.44	21.53	21.45	
16QAM	1	Low	22.50	21.55	21.59	21.51
		Middle		21.57	21.56	21.50
		High		21.38	21.51	21.34
	50%	Low	21.50	20.39	20.49	20.56
		Middle		20.52	20.44	20.59
		High		20.50	20.47	20.39
100%	/	21.50	20.47	20.56	20.51	
Modulation	RB	RB Offset	Tune up	15MHz		
				Channel/Frequency(MHz)		
				26765/821.5	26865/831.5	26965/841.5
QPSK	1	Low	23.50	22.37	22.28	22.40
		Middle		22.33	22.45	22.36
		High		22.32	22.36	22.32
	50%	Low	22.50	21.54	21.58	21.45
		Middle		21.46	21.56	21.51
		High		21.52	21.54	21.47
100%	/	22.50	21.41	21.48	21.41	
16QAM	1	Low	22.50	21.47	21.55	21.46
		Middle		21.53	21.54	21.46
		High		21.36	21.48	21.32
	50%	Low	21.50	20.36	20.45	20.53
		Middle		20.49	20.42	20.56
		High		20.47	20.42	20.35
100%	/	21.50	20.45	20.52	20.48	

Sensor on							
LTE B26			Maximum Conducted Power (dBm)				
Modulation	RB	RB Offset	Tune up	1.4MHz			
				Channel/Frequency(MHz)			
				26697/814.7	26865/831.5	27033/848.3	
QPSK	1	Low	21.00	20.72	20.84	20.78	
		Middle		20.86	20.78	20.78	
		High		20.79	20.78	20.82	
	50%	Low	21.00	20.41	20.56	20.41	
		Middle		20.44	20.55	20.40	
		High		20.42	20.48	20.40	
100%	/	21.00	20.46	20.55	20.45		
16QAM	1	Low	21.00	20.40	20.46	20.42	
		Middle		20.38	20.50	20.37	
		High		20.45	20.41	20.28	
	50%	Low	21.00	20.33	20.26	20.32	
		Middle		20.43	20.36	20.31	
		High		20.37	20.35	20.26	
	100%	/	21.00	20.46	20.38	20.32	
	Modulation	RB	RB Offset	Tune up	3MHz		
					Channel/Frequency(MHz)		
26705/815.5					26865/831.5	27025/847.5	
QPSK	1	Low	21.00	20.71	20.86	20.87	
		Middle		20.82	20.77	20.79	
		High		20.79	20.78	20.82	
	50%	Low	21.00	20.48	20.53	20.50	
		Middle		20.54	20.51	20.47	
		High		20.50	20.57	20.46	
100%	/	21.00	20.46	20.58	20.46		
16QAM	1	Low	21.00	20.40	20.44	20.42	
		Middle		20.38	20.48	20.38	
		High		20.44	20.43	20.27	
	50%	Low	21.00	20.42	20.35	20.41	
		Middle		20.51	20.44	20.39	
		High		20.44	20.42	20.35	
	100%	/	21.00	20.47	20.38	20.30	
	Modulation	RB	RB Offset	Tune up	5MHz		
					Channel/Frequency(MHz)		
26715/816.5					26865/831.5	27015/846.5	
QPSK	1	Low	21.00	20.73	20.87	20.80	
		Middle		20.85	20.82	20.83	

	50%	High	21.00	20.81	20.82	20.85	
		Low		20.51	20.58	20.54	
		Middle		20.57	20.56	20.51	
		High		20.52	20.51	20.51	
	100%	/	21.00	20.50	20.60	20.50	
16QAM	1	Low	21.00	20.42	20.47	20.44	
		Middle		20.41	20.52	20.41	
		High		20.47	20.45	20.30	
	50%	Low	21.00	20.45	20.40	20.45	
		Middle		20.53	20.48	20.42	
		High		20.47	20.47	20.39	
	100%	/	21.00	20.50	20.43	20.34	
	Modulation	RB	RB Offset	Tune up	10MHz		
					Channel/Frequency(MHz)		
26740/819					26865/831.5	26990/844	
QPSK	1	Low	21.00	20.72	20.83	20.78	
		Middle		20.83	20.81	20.80	
		High		20.78	20.77	20.81	
	50%	Low	21.00	20.49	20.54	20.51	
		Middle		20.54	20.51	20.47	
		High		20.49	20.58	20.47	
	100%	/	21.00	20.48	20.56	20.45	
16QAM	1	Low	21.00	20.37	20.45	20.42	
		Middle		20.39	20.49	20.39	
		High		20.44	20.41	20.27	
	50%	Low	21.00	20.42	20.38	20.42	
		Middle		20.50	20.43	20.38	
		High		20.45	20.43	20.36	
	100%	/	21.00	20.47	20.38	20.30	
	Modulation	RB	RB Offset	Tune up	15MHz		
					Channel/Frequency(MHz)		
26765/821.5					26865/831.5	26965/841.5	
QPSK	1	Low	21.00	20.69	20.79	20.85	
		Middle		20.82	20.87	20.78	
		High		20.76	20.86	20.78	
	50%	Low	21.00	20.46	20.59	20.47	
		Middle		20.52	20.57	20.44	
		High		20.46	20.53	20.43	
	100%	/	21.00	20.45	20.51	20.41	
16QAM	1	Low	21.00	20.37	20.41	20.37	
		Middle		20.35	20.47	20.35	
		High		20.42	20.38	20.25	

	50%	Low	21.00	20.39	20.34	20.39
		Middle		20.47	20.41	20.35
		High		20.42	20.38	20.32
	100%	/	21.00	20.45	20.34	20.27

Table 13.4-6: The conducted Power for LTE Band 38

Full power						
LTE B38			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				37775/2572.5	38000/2595	38225/2617.5
QPSK	1	Low	24.00	22.56	22.34	22.17
		Middle		22.51	22.55	22.59
		High		22.38	22.34	22.33
	50%	Low	23.00	21.38	21.43	21.39
		Middle		21.44	21.42	21.44
		High		21.40	21.41	21.45
100%	/	23.00	21.43	21.42	21.48	
16QAM	1	Low	23.00	21.51	21.31	21.27
		Middle		21.49	21.44	21.46
		High		21.34	21.43	21.28
	50%	Low	22.00	20.47	20.50	20.43
		Middle		20.50	20.55	20.50
		High		20.45	20.55	20.38
100%	/	22.00	20.43	20.56	20.40	
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				37800/2575	38000/2595	38200/2615
QPSK	1	Low	24.00	22.58	22.35	22.20
		Middle		22.54	22.60	22.53
		High		22.40	22.38	22.36
	50%	Low	23.00	21.41	21.48	21.43
		Middle		21.47	21.47	21.48
		High		21.42	21.45	21.40
100%	/	23.00	21.47	21.44	21.42	
16QAM	1	Low	23.00	21.43	21.34	21.29
		Middle		21.42	21.48	21.49
		High		21.37	21.45	21.31
	50%	Low	22.00	20.50	20.55	20.47
		Middle		20.52	20.59	20.53
		High		20.48	20.60	20.42

	100%	/	22.00	20.46	20.61	20.44	
Modulation	RB	RB Offset	Tune up	15MHz			
				Channel/Frequency(MHz)			
				37825/2577.5	38000/2595	38175/2612.5	
QPSK	1	Low	24.00	22.57	22.31	22.18	
		Middle		22.52	22.59	22.50	
		High		22.37	22.33	22.32	
	50%	Low	23.00	21.39	21.44	21.40	
		Middle		21.44	21.42	21.44	
		High		21.39	21.42	21.46	
	100%	/	23.00	21.45	21.40	21.47	
	16QAM	1	Low	23.00	21.48	21.32	21.27
			Middle		21.40	21.45	21.47
High			21.34		21.41	21.28	
50%		Low	22.00	20.47	20.53	20.44	
		Middle		20.49	20.54	20.49	
		High		20.46	20.56	20.39	
100%		/	22.00	20.43	20.56	20.40	
Modulation		RB	RB Offset	Tune up	20MHz		
					Channel/Frequency(MHz)		
	37850/2580				38000/2595	38150/2610	
QPSK	1	Low	24.00	22.64	22.27	22.15	
		Middle		22.51	22.65	22.58	
		High		22.35	22.32	22.29	
	50%	Low	23.00	21.36	21.49	21.36	
		Middle		21.42	21.48	21.41	
		High		21.36	21.47	21.42	
	100%	/	23.00	21.42	21.45	21.43	
	16QAM	1	Low	23.00	21.21	21.28	21.22
			Middle		21.46	21.43	21.43
High			21.32		21.38	21.26	
50%		Low	22.00	20.44	20.49	20.41	
		Middle		20.46	20.52	20.46	
		High		20.43	20.51	20.35	
100%		/	22.00	20.41	20.52	20.37	
<b>Sensor on</b>							
<b>LTE B38</b>			<b>Maximum Conducted Power (dBm)</b>				
Modulation	RB	RB Offset	Tune up	5MHz			
				Channel/Frequency(MHz)			
				37775/2572.5	38000/2595	38225/2617.5	
QPSK	1	Low	18.00	16.69	16.79	16.69	
		Middle		17.01	17.04	17.06	



	50%	High	18.00	16.85	16.91	16.98	
		Low		16.74	16.83	16.88	
		Middle		16.91	17.11	17.14	
		High		17.02	17.06	17.16	
	100%	/	18.00	16.93	17.11	17.13	
16QAM	1	Low	18.00	17.15	16.92	17.00	
		Middle		17.15	17.16	17.11	
		High		16.94	17.03	17.14	
	50%	Low	18.00	16.89	17.04	17.16	
		Middle		17.16	17.16	17.08	
		High		17.10	17.08	16.95	
	100%	/	18.00	16.89	16.97	17.11	
	Modulation	RB	RB Offset	Tune up	10MHz		
					Channel/Frequency(MHz)		
37800/2575					38000/2595	38200/2615	
QPSK	1	Low	18.00	16.71	16.80	16.72	
		Middle		17.04	17.02	17.03	
		High		16.87	16.95	17.01	
	50%	Low	18.00	16.77	16.88	16.92	
		Middle		16.94	17.16	17.08	
		High		17.04	17.10	17.11	
	100%	/	18.00	16.97	17.13	17.17	
16QAM	1	Low	18.00	17.12	16.95	17.02	
		Middle		17.14	17.15	17.14	
		High		16.97	17.05	17.07	
	50%	Low	18.00	16.92	17.09	17.13	
		Middle		17.11	17.14	17.11	
		High		17.13	17.13	16.99	
	100%	/	18.00	16.92	17.02	17.15	
Modulation	RB	RB Offset	Tune up	15MHz			
				Channel/Frequency(MHz)			
				37825/2577.5	38000/2595	38175/2612.5	
QPSK	1	Low	18.00	16.70	16.76	16.70	
		Middle		17.02	17.01	17.04	
		High		16.84	16.90	16.97	
	50%	Low	18.00	16.75	16.84	16.89	
		Middle		16.91	17.11	17.14	
		High		17.01	17.07	17.13	
	100%	/	18.00	16.95	17.09	17.12	
16QAM	1	Low	18.00	17.14	16.93	17.00	
		Middle		17.16	17.14	17.12	
		High		16.94	17.01	17.14	

Modulation	RB	RB Offset	Tune up	20MHz			
				Channel/Frequency(MHz)			
				37850/2580	38000/2595	38150/2610	
QPSK	50%	Low	18.00	16.89	17.07	17.15	
		Middle	18.00	17.15	17.15	17.07	
		High	18.00	17.11	17.09	16.96	
	100%	/	18.00	16.89	16.97	17.11	
	16QAM	1	Low	18.00	16.67	16.72	16.67
			Middle	18.00	17.01	17.07	17.05
			High	18.00	16.82	16.89	16.94
		50%	Low	18.00	16.72	16.79	16.85
			Middle	18.00	16.89	17.17	17.11
High			18.00	16.98	17.02	17.13	
100%		/	18.00	16.92	17.04	17.08	
16QAM		1	Low	18.00	16.85	16.89	16.95
			Middle	18.00	17.12	17.15	17.08
	High		18.00	16.92	16.98	17.12	
	50%	Low	18.00	16.86	17.03	17.14	
		Middle	18.00	17.12	17.13	17.04	
		High	18.00	17.08	17.04	16.92	
	100%	/	18.00	16.87	16.93	17.08	

Table 13.4-7: The conducted Power for LTE Band 40(2305MHz-2315MHz)

Full power						
LTE B40			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				38725/2307.5	38750/2310	38775/2312.5
QPSK	1	Low	23.50	22.68	22.80	22.71
		Middle	23.50	22.77	22.82	22.77
		High	23.50	22.58	22.63	22.61
	50%	Low	22.50	21.81	21.82	21.80
		Middle	22.50	21.78	21.78	21.82
		High	22.50	21.79	21.87	21.81
100%	/	22.50	21.75	21.90	21.60	
16QAM	1	Low	22.50	21.14	21.82	21.70
		Middle	22.50	21.16	21.05	21.12
		High	22.50	21.56	21.71	21.45
	50%	Low	21.50	20.85	20.92	20.69
		Middle	21.50	20.81	20.91	20.75
		High	21.50	20.86	20.93	20.80

	100%	/	21.50	20.88	20.98	20.86	
Modulation	RB	RB Offset	Tune up	10MHz			
				Channel/Frequency(MHz)			
				/	38750/2310	/	
QPSK	1	Low	23.50	/	22.76	/	
		Middle		/	22.83	/	
		High		/	22.62	/	
	50%	Low	22.50	/	21.87	/	
		Middle		/	21.84	/	
		High		/	21.82	/	
	100%	/	22.50	/	21.85	/	
	16QAM	1	Low	22.50	/	21.78	/
			Middle		/	21.03	/
High			/		21.68	/	
50%		Low	21.50	/	20.88	/	
		Middle		/	20.89	/	
		High		/	20.88	/	
100%		/	21.50	/	20.94	/	
<b>Sensor on</b>							
<b>LTE B40</b>			<b>Maximum Conducted Power (dBm)</b>				
Modulation	RB	RB Offset	Tune up	5MHz			
				Channel/Frequency(MHz)			
				38725/2307.5	38750/2310	38775/2312.5	
QPSK	1	Low	17.50	16.97	17.05	16.96	
		Middle		17.02	17.07	16.96	
		High		16.98	16.86	16.84	
	50%	Low	17.50	17.00	17.04	16.90	
		Middle		17.04	17.04	17.00	
		High		16.90	17.02	16.95	
	100%	/	17.50	16.95	17.01	16.91	
	16QAM	1	Low	17.50	16.80	16.97	16.86
			Middle		16.82	16.91	16.86
High			16.70		16.89	16.81	
50%		Low	17.50	16.78	16.97	16.85	
		Middle		16.85	16.93	16.86	
		High		16.89	16.94	16.83	
100%		/	17.50	16.73	16.80	16.72	
Modulation		RB	RB Offset	Tune up	10MHz		
					Channel/Frequency(MHz)		
	/				38750/2310	/	
QPSK	1	Low	17.50	/	17.01	/	
		Middle		/	17.10	/	

	50%	High	17.50	/	16.85	/
		Low		/	17.09	/
		Middle		/	17.07	/
		High		/	16.97	/
	100%	/	17.50	/	16.96	/
16QAM	1	Low	17.50	/	16.93	/
		Middle		/	16.89	/
		High		/	16.86	/
	50%	Low	17.50	/	16.93	/
		Middle		/	16.91	/
		High		/	16.89	/
	100%	/	17.50	/	16.76	/

Table 13.4-8: The conducted Power for LTE Band 40(2350MHz-2360MHz)

Full power						
LTE B40			Maximum Conducted Power (dBm)			
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				39175/2352.5	39200/2355	39225/2357.5
QPSK	1	Low	23.50	22.88	22.94	22.89
		Middle		22.84	22.91	22.80
		High		22.84	22.98	22.87
	50%	Low	22.50	22.14	22.13	22.07
		Middle		22.10	22.12	22.10
		High		22.12	22.17	22.06
	100%	/	22.50	21.91	22.12	22.05
16QAM	1	Low	22.50	22.08	22.16	22.16
		Middle		22.10	22.04	21.99
		High		22.14	22.11	22.04
	50%	Low	21.50	21.08	21.26	21.07
		Middle		21.17	21.10	21.04
		High		21.14	21.22	21.10
	100%	/	21.50	21.21	21.15	21.09
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				/	39200/2355	/
QPSK	1	Low	23.50	/	22.96	/
		Middle		/	22.99	/
		High		/	22.97	/
	50%	Low	22.50	/	22.18	/
		Middle		/	22.16	/

		High		/	22.12	/
	100%	/	22.50	/	22.07	/
16QAM	1	Low	22.50	/	22.12	/
		Middle		/	22.02	/
		High		/	22.08	/
	50%	Low	21.50	/	21.22	/
		Middle		/	21.08	/
		High		/	21.17	/
100%	/	21.50	/	21.11	/	
<b>Sensor on</b>						
<b>LTE B40</b>			<b>Maximum Conducted Power (dBm)</b>			
Modulation	RB	RB Offset	Tune up	5MHz		
				Channel/Frequency(MHz)		
				39175/2352.5	39200/2355	39225/2357.5
QPSK	1	Low	17.50	16.90	17.06	17.07
		Middle		17.02	17.04	17.03
		High		16.88	16.98	16.90
	50%	Low	17.50	17.00	17.01	16.97
		Middle		16.89	17.04	16.97
		High		16.87	17.00	16.95
100%	/	17.50	16.90	16.99	16.92	
16QAM	1	Low	17.50	16.86	16.93	16.88
		Middle		16.88	16.93	16.80
		High		16.84	16.92	16.84
	50%	Low	17.50	16.74	16.83	16.78
		Middle		16.80	16.86	16.82
		High		16.85	16.98	17.03
100%	/	17.50	16.74	16.82	16.76	
Modulation	RB	RB Offset	Tune up	10MHz		
				Channel/Frequency(MHz)		
				/	39200/2355	/
QPSK	1	Low	17.50	/	17.02	/
		Middle		/	17.08	/
		High		/	16.97	/
	50%	Low	17.50	/	17.07	/
		Middle		/	17.04	/
		High		/	16.95	/
100%	/	17.50	/	16.94	/	
16QAM	1	Low	17.50	/	16.89	/
		Middle		/	16.91	/
		High		/	16.89	/
	50%	Low	17.50	/	16.79	/

		Middle		/	16.84	/
		High		/	16.93	/
	100%	/	17.50	/	16.78	/

Table 13.4-9: The conducted Power for LTE Band 41

Full power								
LTE B41			Maximum Conducted Power (dBm)					
Modulation	RB	RB Offset	Tune up	5MHz				
				Channel/Frequency(MHz)				
				39675/2498.5	40148/2545.8	40620/2593	41093/2640.3	41565/2687.5
QPSK	1	Low	24.00	22.68	22.58	22.74	22.55	22.79
		Middle		23.08	22.98	23.11	23.04	23.05
		High		22.81	22.75	22.80	22.74	22.81
	50%	Low	23.00	21.84	21.79	21.92	21.77	21.97
		Middle		21.87	21.76	22.09	21.94	22.03
		High		21.92	21.72	21.96	21.91	21.82
	100%	/	23.00	22.03	21.96	22.18	22.07	22.15
16QAM	1	Low	23.00	22.17	21.90	21.86	21.83	21.82
		Middle		22.15	21.88	22.12	22.16	22.13
		High		21.99	21.80	21.98	21.89	21.90
	50%	Low	22.00	21.12	21.19	21.04	21.11	21.16
		Middle		21.08	21.26	21.17	21.13	21.22
		High		21.20	21.15	21.15	21.21	21.21
	100%	/	22.00	21.23	21.19	21.09	21.15	21.29
Modulation	RB	RB Offset	Tune up	10MHz				
				Channel/Frequency(MHz)				
				39700/2501	40160/2547	40620/2593	41080/2639	41540/2685
QPSK	1	Low	24.00	22.70	22.60	22.75	22.58	22.80
		Middle		23.11	23.01	23.16	23.08	23.10
		High		22.83	22.77	22.84	22.77	22.85
	50%	Low	23.00	21.87	21.82	21.97	21.81	22.02
		Middle		21.90	21.79	22.14	21.98	22.08
		High		21.94	21.74	22.00	21.96	21.86
	100%	/	23.00	22.07	22.00	22.20	22.11	22.17
16QAM	1	Low	23.00	22.19	21.92	21.89	21.85	21.85
		Middle		22.18	21.91	22.16	22.19	22.17
		High		22.02	21.83	22.00	21.92	21.92
	50%	Low	22.00	21.15	21.22	21.09	21.15	21.21
		Middle		21.10	21.28	21.21	21.16	21.26
		High		21.23	21.18	21.20	21.25	21.26
	100%	/	22.00	21.26	21.22	21.14	21.19	21.34

Modulation	RB	RB Offset	Tune up	15MHz				
				Channel/Frequency(MHz)				
				39725/2503.5	40173/2548.3	40620/2593	41068/2637.8	41515/2682.5
QPSK	1	Low	24.00	22.66	22.59	22.71	22.56	22.72
		Middle		23.08	22.99	23.15	23.05	23.05
		High		22.78	22.74	22.79	22.73	22.79
	50%	Low	23.00	21.82	21.80	21.93	21.78	21.93
		Middle		21.85	21.76	22.09	21.94	21.99
		High		21.88	21.71	21.97	21.92	21.78
	100%	/	23.00	22.02	21.98	22.16	22.06	22.08
16QAM	1	Low	23.00	21.97	21.87	21.87	21.83	21.79
		Middle		22.12	21.89	22.13	22.17	22.12
		High		21.97	21.80	21.96	21.89	21.85
	50%	Low	22.00	21.09	21.19	21.07	21.12	21.15
		Middle		21.04	21.25	21.16	21.12	21.19
		High		21.18	21.16	21.16	21.22	21.17
	100%	/	22.00	21.21	21.19	21.09	21.15	21.25
Modulation	RB	RB Offset	Tune up	20MHz				
				Channel/Frequency(MHz)				
				39750/2506	40185/2549.5	40620/2593	41055/2636.5	41490/2680
QPSK	1	Low	24.00	22.72	22.62	22.73	22.59	22.78
		Middle		23.14	23.04	23.17	23.09	23.11
		High		22.84	22.78	22.84	22.76	22.85
	50%	Low	23.00	21.92	21.87	21.98	21.84	22.03
		Middle		21.95	21.84	22.15	22.01	22.09
		High		21.98	21.78	22.02	21.98	21.88
	100%	/	23.00	22.02	21.95	22.11	22.02	22.08
16QAM	1	Low	23.00	21.97	21.92	21.83	21.78	21.79
		Middle		22.12	21.85	22.11	22.13	22.12
		High		21.97	21.78	21.93	21.87	21.85
	50%	Low	22.00	21.09	21.16	21.03	21.09	21.15
		Middle		21.04	21.22	21.14	21.09	21.19
		High		21.18	21.13	21.11	21.18	21.17
	100%	/	22.00	21.21	21.17	21.05	21.12	21.25
Sensor on								
LTE B41			Maximum Conducted Power (dBm)					
Modulation	RB	RB Offset	Tune up	5MHz				
				Channel/Frequency(MHz)				
				39675/2498.5	40148/2545.8	40620/2593	41093/2640.3	41565/2687.5
QPSK	1	Low	18.00	16.60	16.54	16.75	16.56	16.80
		Middle		17.07	17.01	17.10	17.04	16.98
		High		16.58	16.52	16.77	16.58	16.96

	50%	Low	18.00	17.06	17.00	16.98	17.03	17.02	
		Middle		17.04	17.01	17.09	17.04	16.98	
		High		17.05	16.93	17.06	16.92	17.00	
	100%	/	18.00	16.92	16.80	17.05	16.84	16.93	
16QAM	1	Low	18.00	17.13	17.04	16.90	16.74	16.84	
		Middle		17.11	17.02	16.99	16.99	16.96	
		High		17.00	16.88	17.09	16.88	17.10	
	50%	Low	18.00	16.84	16.75	16.89	16.74	16.79	
		Middle		17.11	16.99	17.03	16.99	17.10	
		High		17.10	17.02	17.09	17.03	17.06	
	100%	/	18.00	17.09	17.00	17.09	17.07	16.98	
	Modulation	RB	RB Offset	Tune up	10MHz				
					Channel/Frequency(MHz)				
39700/2501					40160/2547	40620/2593	41080/2639	41540/2685	
QPSK	1	Low	18.00	16.62	16.56	16.76	16.59	16.83	
		Middle		17.10	17.04	17.15	17.08	17.02	
		High		16.60	16.54	16.81	16.61	16.99	
	50%	Low	18.00	17.09	17.03	17.03	17.07	17.06	
		Middle		17.07	17.04	17.14	17.08	17.02	
		High		17.07	16.95	17.10	16.97	17.05	
	100%	/	18.00	16.96	16.84	17.07	16.88	16.97	
	16QAM	1	Low	18.00	17.15	17.06	16.93	16.76	16.86
			Middle		17.14	17.05	17.03	17.02	16.99
High			17.03		16.91	17.11	16.91	17.13	
50%		Low	18.00	16.87	16.78	16.94	16.78	16.83	
		Middle		17.13	17.01	17.07	17.02	17.13	
		High		17.13	17.05	17.14	17.07	17.10	
100%		/	18.00	17.12	17.03	17.14	17.11	17.02	
Modulation		RB	RB Offset	Tune up	15MHz				
					Channel/Frequency(MHz)				
	39725/2503.5				40173/2548.3	40620/2593	41068/2637.8	41515/2682.5	
QPSK	1	Low	18.00	16.61	16.55	16.72	16.57	16.81	
		Middle		17.08	17.02	17.14	17.05	16.99	
		High		16.57	16.51	16.76	16.57	16.95	
	50%	Low	18.00	17.07	17.01	16.99	17.04	17.03	
		Middle		17.04	17.01	17.09	17.04	16.98	
		High		17.04	16.92	17.07	16.93	17.01	
	100%	/	18.00	16.94	16.82	17.03	16.83	16.92	
	16QAM	1	Low	18.00	17.10	17.01	16.91	16.74	16.84
			Middle		17.12	17.03	17.00	17.00	16.97
High			17.00		16.88	17.07	16.88	17.10	
50%		Low	18.00	16.84	16.75	16.92	16.75	16.80	



		Middle		17.10	16.98	17.02	16.98	17.09	
		High		17.11	17.03	17.10	17.04	17.07	
	100%	/	18.00	17.09	17.00	17.09	17.07	16.98	
Modulation	RB	RB Offset	Tune up	20MHz					
				Channel/Frequency(MHz)					
				39750/2506	40185/2549.5	40620/2593	41055/2636.5	41490/2680	
QPSK	1	Low	18.00	16.64	16.58	16.74	16.60	16.84	
		Middle		17.13	17.07	17.16	17.09	17.03	
		High		16.61	16.55	16.81	16.60	16.98	
	50%	Low	18.00	17.14	17.08	17.04	17.10	17.09	
		Middle		17.12	17.09	17.15	17.11	17.05	
		High		17.11	16.99	17.12	16.99	17.07	
	100%	/	18.00	16.91	16.79	16.98	16.79	16.88	
	16QAM	1	Low	18.00	16.78	16.66	16.87	16.69	16.79
			Middle		17.08	16.99	16.98	16.96	16.93
High			16.98		16.86	17.04	16.86	17.08	
50%		Low	18.00	16.83	16.74	16.90	16.74	16.79	
		Middle		17.09	16.97	17.02	16.97	17.08	
		High		17.10	17.02	17.07	17.02	17.05	
100%		/	18.00	17.07	16.98	17.05	17.04	16.95	

### 13.5 BT Measurement result

Table 13.5-1: The conducted power for Bluetooth

Full power						
BlueTooth	Maximum Output Power (dBm)					
Channel/Frequency(MHz)	0/2402		39/2441		78/2480	
Mode	Tune up	Output Power	Tune up	Output Power	Tune up	Output Power
DH5	10.00	9.43	10.00	9.25	10.00	9.56
2DH5	9.00	8.67	9.00	8.80	9.00	8.83
3DH5	9.00	8.73	9.00	8.76	9.00	8.86
Mode	Channel/Frequency(MHz)		Tune up		Output Power	
BLE_1M	0/2402		-1.50		-2.50	
	19/2440		-1.00		-1.94	
	39/2480		-2.00		-2.74	
BLE_2M	0/2402		-1.50		-2.56	
	19/2440		-1.00		-1.93	
	39/2480		-2.00		-2.89	
BLE_125K	0/2402		-2.00		-2.83	
	19/2440		-1.00		-1.89	
	39/2480		-2.00		-2.64	
BLE_500K	0/2402		-2.00		-2.78	
	19/2440		-1.00		-1.89	
	39/2480		-2.00		-2.63	

### 13.6 Wi-Fi Measurement result

Table 13.6-1: The average conducted power for Wi-Fi 2.4G

Full power				
Wi-Fi 2.4G			Maximum Conducted Power (dBm)	
Mode	BW	Channel/Frequency(MHz)	Tune up(dBm)	Output Power(dBm)
802.11b	20M	1/2412	17.00	16.54
		6/2437	17.00	16.88
		11/2462	17.00	16.35
802.11g	20M	1/2412	15.00	14.58
		6/2437	16.00	15.10
		11/2462	15.00	14.39
802.11n	20M	1/2412	15.00	13.93
		6/2437	14.00	13.11
		11/2462	14.00	12.69
	40M	3/2422	12.00	10.62
		6/2437	14.00	13.15
		9/2452	14.00	12.96
802.11ac	20M	1/2412	10.00	9.31
		6/2437	10.50	9.80
		11/2462	10.50	9.43
	40M	3/2422	12.00	10.91
		6/2437	10.50	9.63
		9/2452	10.50	9.39

Table 13.6-2: The average conducted power for Wi-Fi 5G

Wi-Fi 5G			Maximum Conducted Power (dBm)	
Mode	BW	Channel/Frequency(MHz)	Tune up	Output Power
802.11a	20M	36/5180	11.00	10.62
		40/5200	8.00	6.79
		48/5240	10.00	9.00
		52/5260	10.00	9.13
		56/5280	10.00	8.98
		60/5300	9.00	7.54

		64/5320	10.00	9.26
		100/5500	5.00	4.09
		116/5580	10.00	8.91
		140/5700	10.50	10.00
		149/5745	10.00	9.48
		157/5785	10.00	8.96
		165/5825	10.00	8.95
802.11n	20M	36/5180	10.00	9.20
		40/5200	7.00	5.68
		48/5240	7.00	6.13
		52/5260	9.00	8.34
		56/5280	9.00	8.35
		64/5320	7.00	5.66
		100/5500	6.00	4.42
		116/5580	10.00	8.67
		140/5700	10.00	9.27
		149/5745	10.00	8.92
		157/5785	10.00	8.30
		165/5825	10.00	8.16
	40M	38/5190	9.00	7.77
		46/5230	9.00	8.13
		54/5270	8.00	7.42
		62/5310	9.00	7.69
		102/5510	6.00	5.24
		110/5550	8.00	6.82
		134/5670	9.00	7.81
151/5755	9.00	7.48		
159/5795	8.00	6.96		
802.11ac	20M	36/5180	7.00	6.16
		40/5200	7.00	5.72
		48/5240	6.00	4.98
		52/5260	6.00	5.25
		64/5320	6.00	5.62

		100/5500	6.00	4.28
		116/5580	6.00	4.77
		140/5700	7.00	5.69
		149/5745	7.00	5.74
		157/5785	6.00	5.18
		165/5825	6.00	5.11
	40M	38/5190	7.00	5.67
		46/5230	6.00	5.03
		54/5270	6.00	5.15
		62/5310	7.00	5.57
		102/5510	5.00	4.31
		110/5550	6.00	4.40
		134/5670	7.00	5.75
		151/5755	7.00	5.61
	80M	159/5795	6.00	4.87
		42/5210	6.00	5.23
		58/5290	6.00	5.26
		106/5530	5.00	4.21
		122/5610	6.00	5.00
			155/5775	7.00

### 13.7 NFC Measurement result

Frequency(MHz)	dB $\mu$ V/m @3m	EIRP(dBm)	Tune up(dBm)
13.56	71.358	-23.87	-23.00

Note:  $EIRP(dBm) = \text{Radiated field strength}(dB\mu V/m) + 20\text{Log}(3) - 104.77$ .

## 14 Test Results

### 14.1 Standalone SAR Test Result

#### 14.1.1 Limit/Criterion

At frequencies between 100 kHz and 6 GHz, the MPE (Maximum Permissible Exposure) in population/uncontrolled environments for electromagnetic field strengths may be exceeded if

- (a) The exposure conditions can be shown by appropriate techniques to produce SARs below 0.08W/kg, as averaged over the whole body, and spatial peak SAR values not exceeding 1.6 W/kg, as averaged over any 1g of tissue (defined as a tissue volume in the shape of a cube), except for the hands, wrists, feet, and ankles where the spatial peak SAR shall not exceed 4 W/kg, as averaged over any 10g of tissue (defined as a tissue volume in the shape of a cube); and
- (b) The induced currents in the body confirm with the MPE in table 2, Part B in ANSI/IEEE C95.1-1992.

## 14.1.2 Test Results

Table 14.1.2-1: SAR Values for GSM850

Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
								Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>											
Front Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	0.16	0.497	1.15	0.573	/
Back Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.09	0.215	1.15	0.248	/
Left Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.04	0.070	1.15	0.081	/
Right Side	Sensor on	GPRS 4TS	190	836.6	25.11	26.00	-0.06	0.567	1.23	0.696	/
Top Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	0.14	0.060	1.15	0.070	/
<b>Second Supply</b>											
Right Side	Sensor on	GPRS 4TS	190	836.6	25.11	26.00	-0.07	0.573	1.23	0.703	A.1-1
<b>Third supply</b>											
Right Side	Sensor on	GPRS 4TS	190	836.6	25.11	26.00	-0.06	0.569	1.23	0.698	/
<b>Body SAR Define (16mm)</b>											
Right Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.05	0.284	1.15	0.328	/
Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
								Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>											
Front Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.03	0.641	1.15	0.739	/
Back Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.04	0.196	1.15	0.226	/
Left Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.08	0.058	1.15	0.067	/
Right Side	Sensor on	GPRS 4TS	190	836.6	25.11	26.00	-0.16	0.820	1.23	1.007	/
Top Side	Full power	GPRS 4TS	190	836.6	29.38	30.00	-0.04	0.062	1.15	0.071	/
<b>Second Supply</b>											
Right Side	Sensor on	GPRS 4TS	190	836.6	25.11	26.00	-0.06	0.863	1.23	1.059	A.1-2
<b>Third supply</b>											
Right Side	Sensor on	GPRS 4TS	190	836.6	25.11	26.00	-0.03	0.770	1.23	0.945	/

Table 14.1.2-2: SAR Values for GSM1900

Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
								Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>											
Front Side	Full power	GPRS 4TS	661	1880	26.14	26.50	-0.06	0.772	1.09	0.839	/
Back Side	Full power	GPRS 4TS	661	1880	26.14	26.50	-0.02	0.055	1.09	0.060	/
Left Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.01	0.186	1.09	0.202	/
Right Side	Sensor on	GPRS 4TS	661	1880	22.44	22.50	-0.09	0.826	1.01	0.837	A.1-3
Top Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.04	0.195	1.09	0.212	/
Front Side	Full power	GPRS 4TS	512	1850.2	26.13	26.50	-0.06	0.738	1.09	0.804	/
Front Side	Full power	GPRS 4TS	810	1909.8	26.11	26.50	0.17	0.752	1.09	0.823	/
Right Side	Sensor on	GPRS 4TS	512	1850.2	22.31	22.50	0.12	0.733	1.04	0.766	/
Right Side	Sensor on	GPRS 4TS	810	1909.8	22.42	22.50	0.14	0.810	1.02	0.825	/
<b>Repeat</b>											
Right Side	Sensor on	GPRS 4TS	661	1880	22.44	22.50	0.03	0.792	1.01	0.803	/
<b>Second Supply</b>											
Front Side	Full power	GPRS 4TS	661	1880	26.14	26.50	-0.01	0.771	1.09	0.838	/
<b>Third supply</b>											
Front Side	Full power	GPRS 4TS	661	1880	26.14	26.50	-0.06	0.768	1.09	0.834	/
<b>Body SAR Define (16mm)</b>											
Right Side	Full power	GPRS 4TS	661	1880	26.14	26.50	-0.08	0.440	1.09	0.478	/
Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
								Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>											
Front Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.04	0.888	1.09	0.965	A.1-4
Back Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.09	0.043	1.09	0.046	/
Left Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.06	0.243	1.09	0.264	/
Right Side	Sensor on	GPRS 4TS	661	1880	22.44	22.50	0.07	0.811	1.01	0.822	/
Top Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.02	0.171	1.09	0.186	/
<b>Second Supply</b>											
Front Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.12	0.808	1.09	0.878	/
<b>Third supply</b>											
Front Side	Full power	GPRS 4TS	661	1880	26.14	26.50	0.03	0.831	1.09	0.903	/



Table 14.1.2-3: SAR Values for WCDMA Band II

Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
								Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>											
Front Side	Full power	RMC12.2k	9400	1880	23.08	23.50	-0.06	0.743	1.10	0.818	/
Back Side	Full power	RMC12.2k	9400	1880	23.08	23.50	-0.05	0.059	1.10	0.065	/
Left Side	Full power	RMC12.2k	9400	1880	23.08	23.50	0.16	0.199	1.10	0.219	/
Right Side	Sensor on	RMC12.2k	9400	1880	18.03	18.50	0.12	0.668	1.11	0.744	/
Top Side	Full power	RMC12.2k	9400	1880	23.08	23.50	0.01	0.208	1.10	0.229	/
Front Side	Full power	RMC12.2k	9262	1852.4	23.05	23.50	0.00	0.784	1.11	0.870	A.1-5
Front Side	Full power	RMC12.2k	9538	1907.6	23.06	23.50	-0.10	0.775	1.11	0.858	/
<b>Second Supply</b>											
Front Side	Full power	RMC12.2k	9262	1852.4	23.05	23.50	-0.03	0.781	1.11	0.866	/
<b>Third supply</b>											
Front Side	Full power	RMC12.2k	9262	1852.4	23.05	23.50	0.07	0.779	1.11	0.864	/
<b>Body SAR Define (16mm)</b>											
Right Side	Full power	RMC12.2k	9400	1880	23.08	23.50	-0.03	0.598	1.10	0.659	/
Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
								Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>											
Front Side	Full power	RMC12.2k	9400	1880	23.08	23.50	-0.03	0.913	1.10	1.006	A.1-6
Back Side	Full power	RMC12.2k	9400	1880	23.08	23.50	-0.03	0.065	1.10	0.072	/
Left Side	Full power	RMC12.2k	9400	1880	23.08	23.50	0.10	0.192	1.10	0.211	/
Right Side	Sensor on	RMC12.2k	9400	1880	18.03	18.50	-0.09	0.638	1.11	0.711	/
Top Side	Full power	RMC12.2k	9400	1880	23.08	23.50	-0.09	0.175	1.10	0.193	/
<b>Second Supply</b>											
Front Side	Full power	RMC12.2k	9400	1880	23.08	23.50	0.04	0.906	1.10	0.998	/
<b>Third supply</b>											
Front Side	Full power	RMC12.2k	9400	1880	23.08	23.50	0.03	0.867	1.10	0.955	/

Table 14.1.2-4: SAR Values for WCDMA Band IV

Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
								Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>											
Front Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	-0.09	0.839	1.09	0.914	/
Back Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	-0.04	0.076	1.09	0.083	/
Left Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.14	0.080	1.09	0.087	/
Right Side	Sensor on	RMC12.2k	1413	1732.6	20.05	20.50	-0.03	0.726	1.11	0.805	/
Top Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.09	0.242	1.09	0.264	/
Front Side	Full power	RMC12.2k	1312	1712.4	23.11	23.50	-0.05	0.930	1.09	1.017	A.1-7
Front Side	Full power	RMC12.2k	1513	1752.6	23.06	23.50	-0.05	0.860	1.11	0.952	/
Right Side	Sensor on	RMC12.2k	1312	1712.4	20.01	20.50	-0.02	0.636	1.12	0.712	/
Right Side	Sensor on	RMC12.2k	1513	1752.6	20.11	20.50	-0.06	0.814	1.09	0.890	/
<b>Repeat</b>											
Front Side	Full power	RMC12.2k	1312	1712.4	23.11	23.50	-0.02	0.927	1.09	1.014	/
<b>Second Supply</b>											
Front Side	Full power	RMC12.2k	1312	1712.4	23.11	23.50	-0.04	0.925	1.09	1.012	/
<b>Third supply</b>											
Front Side	Full power	RMC12.2k	1312	1712.4	23.11	23.50	-0.05	0.880	1.09	0.963	/
<b>Body SAR Define (16mm)</b>											
Right Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.07	0.444	1.09	0.483	/
Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
								Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>											
Front Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.13	1.030	1.09	1.122	A.1-8
Back Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.14	0.068	1.09	0.074	/
Left Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.02	0.086	1.09	0.094	/
Right Side	Sensor on	RMC12.2k	1413	1732.6	20.05	20.50	0.12	0.823	1.11	0.913	/
Top Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.02	0.169	1.09	0.184	/
<b>SIM 2</b>											
Front Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	-0.01	1.020	1.09	1.111	/
<b>Second Supply</b>											
Front Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	0.06	1.020	1.09	1.111	/
<b>Third supply</b>											
Front Side	Full power	RMC12.2k	1413	1732.6	23.13	23.50	-0.09	0.944	1.09	1.028	/

Table 14.1.2-5: SAR Values for WCDMA Band V

Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
								Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>											
Front Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	0.03	0.250	1.18	0.295	/
Back Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	-0.02	0.102	1.18	0.120	/
Left Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	0.07	0.043	1.18	0.050	/
Right Side	Sensor on	RMC12.2k	4183	836.6	20.66	21.50	0.03	0.433	1.21	0.525	A.1-9
Top Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	0.13	0.034	1.18	0.040	/
<b>Second Supply</b>											
Right Side	Sensor on	RMC12.2k	4183	836.6	20.66	21.50	-0.03	0.430	1.21	0.522	/
<b>Third supply</b>											
Right Side	Sensor on	RMC12.2k	4183	836.6	20.66	21.50	-0.03	0.424	1.21	0.514	/
<b>Body SAR Define (16mm)</b>											
Right Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	-0.04	0.210	1.18	0.248	/
Test Position	Power Reduction	Mode	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
								Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>											
Front Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	0.02	0.335	1.18	0.395	/
Back Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	-0.05	0.100	1.18	0.118	/
Left Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	0.12	0.039	1.18	0.046	/
Right Side	Sensor on	RMC12.2k	4183	836.6	20.66	21.50	0.04	0.724	1.21	0.878	A.1-10
Top Side	Full power	RMC12.2k	4183	836.6	23.78	24.50	-0.05	0.036	1.18	0.043	/
<b>Second Supply</b>											
Right Side	Sensor on	RMC12.2k	4183	836.6	20.66	21.50	-0.07	0.644	1.21	0.781	/
<b>Third supply</b>											
Right Side	Sensor on	RMC12.2k	4183	836.6	20.66	21.50	-0.11	0.634	1.21	0.769	/

Table 14.1.2-6: SAR Values for LTE Band 2

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	-0.04	0.799	1.16	0.926	A.1-11
Back Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	-0.03	0.073	1.16	0.085	/
Left Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.03	0.189	1.16	0.219	/
Right Side	Sensor on	QPSK	20	1	mid	18900	1880	17.36	18.00	-0.02	0.710	1.16	0.823	/
Top Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.03	0.162	1.16	0.188	/
Front Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.02	0.648	1.11	0.717	/
Back Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	-0.10	0.057	1.11	0.063	/
Left Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.04	0.145	1.11	0.160	/
Right Side	Sensor on	QPSK	20	50%	low	18900	1880	17.28	18.00	-0.09	0.714	1.18	0.843	/
Top Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.01	0.127	1.11	0.141	/
Front Side	Full power	QPSK	20	1	mid	18700	1860	22.35	23.00	-0.16	0.750	1.16	0.871	/
Front Side	Full power	QPSK	20	1	mid	19100	1900	22.25	23.00	0.04	0.747	1.19	0.888	/
Right Side	Sensor on	QPSK	20	1	mid	18700	1860	17.25	18.00	0.12	0.693	1.19	0.824	/
Right Side	Sensor on	QPSK	20	1	mid	19100	1900	17.28	18.00	-0.02	0.678	1.18	0.800	/
Right Side	Sensor on	QPSK	20	50%	low	18700	1860	17.22	18.00	-0.03	0.685	1.20	0.820	/
Right Side	Sensor on	QPSK	20	50%	low	19100	1900	17.17	18.00	-0.05	0.676	1.21	0.818	/
Front Side	Full power	QPSK	20	100%	low	18900	1880	21.34	22.00	0.04	0.574	1.16	0.668	/
Right Side	Sensor on	QPSK	20	100%	low	18900	1880	17.13	18.00	0.03	0.646	1.22	0.789	/
<b>Second Supply</b>														
Front Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.03	0.737	1.16	0.854	/
<b>Third supply</b>														
Front Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	-0.04	0.775	1.16	0.898	/
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	-0.10	0.562	1.16	0.651	/
Right Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	-0.02	0.433	1.11	0.479	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.18	0.764	1.16	0.885	/
Back Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.03	0.063	1.16	0.073	/
Left Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	-0.02	0.269	1.16	0.312	/
Right Side	Sensor on	QPSK	20	1	mid	18900	1880	17.36	18.00	-0.06	0.685	1.16	0.794	/
Top Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	-0.07	0.140	1.16	0.162	/
Front Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.03	0.624	1.11	0.691	/
Back Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.02	0.049	1.11	0.054	/
Left Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.02	0.175	1.11	0.194	/
Right Side	Sensor on	QPSK	20	50%	low	18900	1880	17.28	18.00	0.07	0.706	1.18	0.833	/
Top Side	Full power	QPSK	20	50%	low	18900	1880	21.56	22.00	0.04	0.108	1.11	0.120	/
<b>Second Supply</b>														
Front Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.09	0.815	1.16	0.944	A.1-12
<b>Third supply</b>														
Front Side	Full power	QPSK	20	1	mid	18900	1880	22.36	23.00	0.03	0.803	1.16	0.930	/

Table 14.1.2-7: SAR Values for LTE Band 4

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	-0.04	0.936	1.21	1.136	A.1-13
Back Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.06	0.055	1.21	0.067	/
Left Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.02	0.131	1.21	0.159	/
Right Side	Sensor on	QPSK	20	1	mid	20175	1732.5	19.22	20.00	0.09	0.659	1.20	0.789	/
Top Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.02	0.214	1.21	0.260	/
Front Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.00	0.707	1.18	0.833	/
Back Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.14	0.045	1.18	0.053	/
Left Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.06	0.104	1.18	0.122	/
Right Side	Sensor on	QPSK	20	50%	low	20175	1732.5	19.29	20.00	0.09	0.639	1.18	0.752	/
Top Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.03	0.170	1.18	0.200	/
Front Side	Full power	QPSK	20	1	mid	20050	1720	22.05	23.00	0.03	0.859	1.24	1.069	/
Front Side	Full power	QPSK	20	1	mid	20300	1745	22.15	23.00	0.01	0.859	1.22	1.045	/
Front Side	Full power	QPSK	20	50%	low	20050	1720	21.14	22.00	-0.04	0.768	1.22	0.936	/
Front Side	Full power	QPSK	20	50%	low	20300	1745	21.15	22.00	-0.07	0.769	1.22	0.935	/
Front Side	Full power	QPSK	20	100%	low	20175	1732.5	21.09	22.00	0.01	0.637	1.23	0.785	/
<b>Repeat</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	-0.03	0.909	1.21	1.103	/
<b>SIM2</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	-0.07	0.766	1.21	0.929	/
<b>Second Supply</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.00	0.851	1.21	1.033	/
<b>Third supply</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	-0.05	0.857	1.21	1.040	/
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	-0.05	0.375	1.21	0.455	/
Right Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	-0.04	0.293	1.18	0.345	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.03	0.870	1.21	1.056	A.1-14
Back Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.04	0.043	1.21	0.052	/
Left Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.03	0.097	1.21	0.118	/
Right Side	Sensor on	QPSK	20	1	mid	20175	1732.5	19.22	20.00	0.14	0.772	1.20	0.924	/
Top Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.08	0.159	1.21	0.193	/
Front Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.02	0.688	1.18	0.810	/
Back Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.13	0.036	1.18	0.042	/
Left Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.06	0.080	1.18	0.094	/
Right Side	Sensor on	QPSK	20	50%	low	20175	1732.5	19.29	20.00	0.05	0.741	1.18	0.873	/
Top Side	Full power	QPSK	20	50%	low	20175	1732.5	21.29	22.00	0.03	0.125	1.18	0.147	/
<b>Second Supply</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.04	0.858	1.21	1.041	/
<b>Third supply</b>														
Front Side	Full power	QPSK	20	1	mid	20175	1732.5	22.16	23.00	0.04	0.868	1.21	1.053	/

Table 14.1.2-8: SAR Values for LTE Band 7

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	-0.02	0.464	1.24	0.575	/
Back Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	0.08	0.360	1.24	0.446	/
Left Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	0.02	0.240	1.24	0.297	/
Right Side	Sensor on	QPSK	20	1	mid	21100	2535	16.05	16.50	0.15	0.712	1.11	0.790	/
Top Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	-0.05	0.348	1.24	0.431	/
Front Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	0.05	0.378	1.24	0.467	/
Back Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	0.04	0.278	1.24	0.344	/
Left Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	0.01	0.188	1.24	0.232	/
Right Side	Sensor on	QPSK	20	50%	low	21100	2535	16.02	16.50	0.03	0.716	1.12	0.800	A.1-15
Top Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	-0.07	0.275	1.24	0.340	/
Right Side	Sensor on	QPSK	20	50%	low	20850	2510	15.76	16.50	0.04	0.680	1.19	0.806	/
Right Side	Sensor on	QPSK	20	50%	low	21350	2560	15.79	16.50	0.02	0.658	1.18	0.775	/
Right Side	Sensor on	QPSK	20	100%	low	21100	2535	16.01	16.50	0.03	0.661	1.12	0.740	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	20	50%	low	20850	2510	15.76	16.50	0.02	0.625	1.19	0.741	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	20	50%	low	20850	2510	15.76	16.50	-0.02	0.662	1.19	0.785	/
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	0.14	0.739	1.24	0.915	A.1-16
Right Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	0.05	0.583	1.24	0.721	/
Right Side	Full power	QPSK	20	1	mid	20850	2510	22.54	23.50	0.11	0.722	1.25	0.901	/
Right Side	Full power	QPSK	20	1	mid	21350	2560	22.47	23.50	0.03	0.686	1.27	0.870	/
Right Side	Full power	QPSK	20	100%	low	21100	2535	21.47	22.50	0.04	0.555	1.27	0.704	/
<b>Second Supply</b>														
Right Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	-0.07	0.673	1.24	0.834	/
<b>Third supply</b>														
Right Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	-0.03	0.704	1.24	0.872	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	0.06	0.392	1.24	0.486	/
Back Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	-0.06	0.225	1.24	0.279	/
Left Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	0.03	0.169	1.24	0.209	/
Right Side	Sensor on	QPSK	20	1	mid	21100	2535	16.05	16.50	0.05	0.648	1.11	0.719	/
Top Side	Full power	QPSK	20	1	mid	21100	2535	22.57	23.50	-0.03	0.314	1.24	0.389	/
Front Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	0.10	0.318	1.24	0.393	/
Back Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	-0.12	0.173	1.24	0.214	/
Left Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	0.05	0.133	1.24	0.164	/
Right Side	Sensor on	QPSK	20	50%	low	21100	2535	16.02	16.50	0.17	0.654	1.12	0.730	A.1-17
Top Side	Full power	QPSK	20	50%	low	21100	2535	21.58	22.50	-0.07	0.248	1.24	0.307	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	20	50%	low	21100	2535	16.02	16.50	0.05	0.561	1.12	0.627	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	20	50%	low	21100	2535	16.02	16.50	-0.02	0.651	1.12	0.727	/

Table 14.1.2-9: SAR Values for LTE Band 26

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.08	0.263	1.27	0.335	/
Back Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.13	0.103	1.27	0.131	/
Left Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.03	0.042	1.27	0.053	/
Right Side	Sensor on	QPSK	15	1	mid	26865	831.5	20.87	21.00	-0.14	0.455	1.03	0.469	A.1-18
Top Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.04	0.036	1.27	0.046	/
Front Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	0.02	0.224	1.24	0.277	/
Back Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	-0.11	0.084	1.24	0.104	/
Left Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	-0.04	0.035	1.24	0.043	/
Right Side	Sensor on	QPSK	15	50%	low	26865	831.5	20.59	21.00	-0.07	0.433	1.10	0.476	/
Top Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	-0.05	0.030	1.24	0.037	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	15	50%	low	26865	831.5	20.59	21.00	-0.13	0.430	1.10	0.473	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	15	50%	low	26865	831.5	20.59	21.00	-0.10	0.414	1.10	0.455	/
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.02	0.175	1.27	0.223	/
Right Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	-0.03	0.135	1.24	0.167	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	0.03	0.308	1.27	0.392	/
Back Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.05	0.101	1.27	0.129	/
Left Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	0.03	0.036	1.27	0.046	/
Right Side	Sensor on	QPSK	15	1	mid	26865	831.5	20.87	21.00	-0.08	0.757	1.03	0.780	/
Top Side	Full power	QPSK	15	1	mid	26865	831.5	22.45	23.50	-0.07	0.036	1.27	0.046	/
Front Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	0.12	0.257	1.24	0.318	/
Back Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	-0.05	0.083	1.24	0.103	/
Left Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	-0.11	0.030	1.24	0.037	/
Right Side	Sensor on	QPSK	15	50%	low	26865	831.5	20.59	21.00	0.10	0.758	1.10	0.833	A.1-19
Top Side	Full power	QPSK	15	50%	low	26865	831.5	21.58	22.50	0.08	0.031	1.24	0.038	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	15	50%	low	26865	831.5	20.59	21.00	-0.03	0.676	1.10	0.743	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	15	50%	low	26865	831.5	20.59	21.00	-0.07	0.755	1.10	0.830	/

Table 14.1.2-10: SAR Values for LTE Band 40(2305 MHz-2315 MHz)

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.10	0.254	1.17	0.296	/
Back Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	-0.03	0.175	1.17	0.204	/
Left Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.03	0.089	1.17	0.104	/
Right Side	Sensor on	QPSK	10	1	mid	38750	2310	17.10	17.50	-0.05	0.397	1.10	0.435	/
Top Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	-0.10	0.081	1.17	0.095	/
Front Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.16	0.192	1.16	0.222	/
Back Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.17	0.132	1.16	0.153	/
Left Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.13	0.067	1.16	0.077	/
Right Side	Sensor on	QPSK	10	50%	low	38750	2310	17.09	17.50	-0.03	0.385	1.10	0.423	/
Top Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	-0.02	0.059	1.16	0.068	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	10	1	mid	38750	2310	17.10	17.50	0.12	0.330	1.10	0.362	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	10	1	mid	38750	2310	17.10	17.50	-0.03	0.404	1.10	0.443	A.1-20
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.02	0.442	1.17	0.516	/
Right Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.09	0.334	1.16	0.386	/
<b>Second Supply</b>														
Right Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.03	0.458	1.17	0.534	/
<b>Third supply</b>														
Right Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.06	0.500	1.17	0.583	A.1-21
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.04	0.197	1.17	0.230	/
Back Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	-0.02	0.121	1.17	0.141	/
Left Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	0.18	0.127	1.17	0.148	/
Right Side	Sensor on	QPSK	10	1	mid	38750	2310	17.10	17.50	0.03	0.420	1.10	0.461	/
Top Side	Full power	QPSK	10	1	mid	38750	2310	22.83	23.50	-0.11	0.059	1.17	0.069	/
Front Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.03	0.151	1.16	0.175	/
Back Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.04	0.091	1.16	0.105	/
Left Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	0.03	0.095	1.16	0.110	/
Right Side	Sensor on	QPSK	10	50%	low	38750	2310	17.09	17.50	0.15	0.412	1.10	0.453	/
Top Side	Full power	QPSK	10	50%	low	38750	2310	21.87	22.50	-0.02	0.043	1.16	0.050	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	10	1	mid	38750	2310	17.10	17.50	0.05	0.356	1.10	0.390	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	10	1	mid	38750	2310	17.10	17.50	-0.04	0.448	1.10	0.491	A.1-22



Table 14.1.2-11: SAR Values for LTE Band 40(2350 MHz-2360MHz)

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.03	0.279	1.12	0.314	/
Back Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	-0.02	0.184	1.12	0.207	/
Left Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	-0.02	0.099	1.12	0.111	/
Right Side	Sensor on	QPSK	10	1	mid	39200	2355	17.08	17.50	-0.12	0.443	1.10	0.488	/
Top Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	-0.10	0.147	1.12	0.165	/
Front Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	0.04	0.218	1.08	0.235	/
Back Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	0.08	0.146	1.08	0.157	/
Left Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	0.06	0.077	1.08	0.083	/
Right Side	Sensor on	QPSK	10	50%	low	39200	2355	17.07	17.50	-0.11	0.446	1.10	0.492	/
Top Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	-0.02	0.077	1.08	0.083	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	10	50%	low	39200	2355	17.07	17.50	0.04	0.363	1.10	0.401	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	10	50%	low	39200	2355	17.07	17.50	0.09	0.457	1.10	0.505	A.1-23
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.05	0.453	1.12	0.509	/
Right Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	0.11	0.359	1.08	0.386	/
<b>Second Supply</b>														
Right Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.05	0.422	1.12	0.475	/
<b>Third supply</b>														
Right Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.02	0.502	1.12	0.565	A.1-24
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.07	0.214	1.12	0.241	/
Back Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.05	0.124	1.12	0.139	/
Left Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	0.04	0.116	1.12	0.130	/
Right Side	Sensor on	QPSK	10	1	mid	39200	2355	17.08	17.50	0.12	0.440	1.10	0.485	/
Top Side	Full power	QPSK	10	1	mid	39200	2355	22.99	23.50	-0.10	0.114	1.12	0.128	/
Front Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	0.16	0.168	1.08	0.181	/
Back Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	-0.03	0.099	1.08	0.107	/
Left Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	0.07	0.091	1.08	0.098	/
Right Side	Sensor on	QPSK	10	50%	low	39200	2355	17.07	17.50	0.05	0.448	1.10	0.495	/
Top Side	Full power	QPSK	10	50%	low	39200	2355	22.18	22.50	-0.02	0.080	1.08	0.086	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	10	50%	low	39200	2355	17.07	17.50	0.03	0.359	1.10	0.396	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	10	50%	low	39200	2355	17.07	17.50	0.05	0.457	1.10	0.505	A.1-25

Table 14.1.2-12: SAR Values for LTE Band 41

Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR1g	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.12	0.250	1.21	0.303	/
Back Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.07	0.205	1.21	0.248	/
Left Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.02	0.106	1.21	0.128	/
Right Side	Sensor on	QPSK	20	1	mid	40620	2593	17.16	18.00	0.09	0.545	1.21	0.661	A.1-26
Top Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	-0.02	0.275	1.21	0.333	/
Front Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	0.07	0.159	1.22	0.193	/
Back Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	0.16	0.155	1.22	0.189	/
Left Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	0.03	0.081	1.22	0.099	/
Right Side	Sensor on	QPSK	20	50%	mid	40620	2593	17.15	18.00	0.06	0.428	1.22	0.521	/
Top Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	-0.07	0.204	1.22	0.248	/
Right Side	Sensor on	QPSK	20	1	mid	39750	2506	17.13	18.00	-0.02	0.492	1.22	0.601	/
Right Side	Sensor on	QPSK	20	1	mid	40185	2549.5	17.07	18.00	-0.02	0.510	1.24	0.632	/
Right Side	Sensor on	QPSK	20	1	mid	41055	2636.5	17.09	18.00	0.16	0.424	1.23	0.523	/
Right Side	Sensor on	QPSK	20	1	mid	41490	2680	17.03	18.00	0.03	0.445	1.25	0.556	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	20	1	mid	40620	2593	17.16	18.00	-0.08	0.449	1.21	0.545	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	20	1	mid	40620	2593	17.16	18.00	0.08	0.461	1.21	0.559	/
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.05	0.374	1.21	0.453	/
Right Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	-0.13	0.244	1.22	0.297	/
Test Position	Power Reduction	Mode				Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)			Figure No.
		Modulation	BW(MHz)	RB Allocation	RB Offset						Measured SAR10g	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.02	0.240	1.21	0.291	/
Back Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.02	0.109	1.21	0.132	/
Left Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	0.10	0.125	1.21	0.151	/
Right Side	Sensor on	QPSK	20	1	mid	40620	2593	17.16	18.00	-0.03	0.450	1.21	0.546	/
Top Side	Full power	QPSK	20	1	mid	40620	2593	23.17	24.00	-0.04	0.245	1.21	0.297	/
Front Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	0.10	0.185	1.22	0.225	/
Back Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	0.06	0.089	1.22	0.108	/
Left Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	0.02	0.092	1.22	0.112	/
Right Side	Sensor on	QPSK	20	50%	mid	40620	2593	17.15	18.00	0.01	0.419	1.22	0.510	/
Top Side	Full power	QPSK	20	50%	mid	40620	2593	22.15	23.00	-0.07	0.181	1.22	0.220	/
<b>Second Supply</b>														
Right Side	Sensor on	QPSK	20	1	mid	40620	2593	17.16	18.00	-0.10	0.352	1.21	0.427	/
<b>Third supply</b>														
Right Side	Sensor on	QPSK	20	1	mid	40620	2593	17.16	18.00	0.04	0.503	1.21	0.610	A.1-27

Table 14.1.2-13: SAR Values for Wi-Fi 2.4G

Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)				Figure No.
										Measured SAR1g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.00	0.039	1.00	1.03	0.040	/
Back Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.03	0.070	1.00	1.03	0.072	/
Left Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.08	0.021	1.00	1.03	0.022	/
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.02	0.535	1.00	1.03	0.550	A.1-28
Top Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.03	0.020	1.00	1.03	0.021	/
<b>Second Supply</b>														
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.13	0.533	1.00	1.03	0.548	/
<b>Third supply</b>														
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.00	0.531	1.00	1.03	0.546	/
<b>Body SAR Define (16mm)</b>														
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.02	0.178	1.00	1.03	0.183	/
Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)				Figure No.
										Measured SAR10g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.04	0.037	1.00	1.03	0.038	/
Back Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.03	0.049	1.00	1.03	0.050	/
Left Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.14	0.016	1.00	1.03	0.016	/
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.08	0.290	1.00	1.03	0.298	A.1-29
Top Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.05	0.017	1.00	1.03	0.017	/
<b>Second Supply</b>														
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	0.01	0.278	1.00	1.03	0.286	/
<b>Third supply</b>														
Right Side	Full power	802.11b	20	100%	6	2437	16.88	17.00	-0.11	0.247	1.00	1.03	0.254	/

Table 14.1.2-14: SAR Values for Wi-Fi 5G U-NII-1

Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)				Figure No.
										Measured SAR1g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.00	0.010	1.03	1.09	0.011	/
Back Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.06	0.055	1.03	1.09	0.061	/
Left Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.00	0.049	1.03	1.09	0.055	/
Right Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.02	0.111	1.03	1.09	0.125	/
Top Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	-0.10	0.004	1.03	1.09	0.004	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.02	0.130	1.03	1.09	0.146	A.1-30
<b>Third supply</b>														
Right Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.02	0.128	1.03	1.09	0.144	/
Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)				Figure No.
										Measured SAR10g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.00	0.007	1.03	1.09	0.008	/
Back Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.02	0.026	1.03	1.09	0.029	/
Left Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.00	0.029	1.03	1.09	0.032	/
Right Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.06	0.120	1.03	1.09	0.135	/
Top Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.00	0.003	1.03	1.09	0.003	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.03	0.135	1.03	1.09	0.152	A.1-31
<b>Third supply</b>														
Right Side	Full power	802.11a	20	97.20%	36	5180	10.62	11.00	0.06	0.127	1.03	1.09	0.143	/

Table 14.1.2-15: SAR Values for Wi-Fi 5G U-NII-2A

Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)				Figure No.
										Measured SAR1g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.00	0.021	1.03	1.19	0.025	/
Back Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.12	0.045	1.03	1.19	0.055	/
Left Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.00	0.053	1.03	1.19	0.064	/
Right Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.07	0.218	1.03	1.19	0.266	/
Top Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.00	0.007	1.03	1.19	0.009	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.11	0.193	1.03	1.19	0.235	/
<b>Third supply</b>														
Right Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.02	0.221	1.03	1.19	0.270	A.1-32
Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)				Figure No.
										Measured SAR10g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.00	0.014	1.03	1.19	0.017	/
Back Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	-0.03	0.024	1.03	1.19	0.030	/
Left Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.10	0.032	1.03	1.19	0.039	/
Right Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.11	0.170	1.03	1.19	0.207	/
Top Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.00	0.004	1.03	1.19	0.005	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	-0.03	0.169	1.03	1.19	0.206	/
<b>Third supply</b>														
Right Side	Full power	802.11a	20	97.20%	64	5320	9.26	10.00	0.03	0.179	1.03	1.19	0.218	A.1-33

Table 14.1.2-16: SAR Values for Wi-Fi 5G U-NII-2C

Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)				Figure No.
										Measured SAR1g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.10	0.060	1.03	1.12	0.069	/
Back Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.02	0.055	1.03	1.12	0.064	/
Left Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.00	0.042	1.03	1.12	0.048	/
Right Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.00	0.352	1.03	1.12	0.406	A.1-34
Top Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.05	0.012	1.03	1.12	0.014	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	-0.09	0.326	1.03	1.12	0.376	/
<b>Third supply</b>														
Right Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.09	0.342	1.03	1.12	0.395	/
Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)				Figure No.
										Measured SAR10g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.00	0.031	1.03	1.12	0.035	/
Back Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.03	0.029	1.03	1.12	0.034	/
Left Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.00	0.024	1.03	1.12	0.028	/
Right Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.04	0.236	1.03	1.12	0.272	A.1-35
Top Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.00	0.003	1.03	1.12	0.004	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	0.17	0.236	1.03	1.12	0.272	/
<b>Third supply</b>														
Right Side	Full power	802.11a	20	97.20%	140	5700	10.00	10.50	-0.13	0.219	1.03	1.12	0.253	/

Table 14.1.2-17: SAR Values for Wi-Fi 5G U-NII-3

Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)				Figure No.
										Measured SAR1g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>														
Front Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.00	0.063	1.04	1.13	0.074	/
Back Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.06	0.058	1.04	1.13	0.068	/
Left Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.00	0.041	1.04	1.13	0.048	/
Right Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	-0.03	0.418	1.04	1.13	0.488	A.1-36
Top Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.10	0.011	1.04	1.13	0.013	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.07	0.330	1.04	1.13	0.385	/
<b>Third supply</b>														
Right Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.04	0.324	1.04	1.13	0.378	/
Test Position	Power Reduction	Mode	BW(MHz)	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)				Figure No.
										Measured SAR10g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>														
Front Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.00	0.026	1.04	1.13	0.031	/
Back Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.01	0.042	1.04	1.13	0.049	/
Left Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.00	0.020	1.04	1.13	0.024	/
Right Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.11	0.261	1.04	1.13	0.305	A.1-37
Top Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	-0.12	0.003	1.04	1.13	0.003	/
<b>Second Supply</b>														
Right Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	0.10	0.260	1.04	1.13	0.304	/
<b>Third supply</b>														
Right Side	Full power	802.11a	20	96.53%	149	5745	9.48	10.00	-0.10	0.255	1.04	1.13	0.298	/

**Table 14.1.2-18: SAR Values for BT**

Test Position	Power Reduction	Mode	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 1gSAR 1.6 W/kg (mW/g)				Figure No.
									Measured SAR1g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR1g	
<b>Body SAR (Worn&amp;HotSpot 5mm)</b>													
Front Side	Full power	DH5	76.86%	78	2480	9.56	10.00	-0.10	0.004	1.30	1.11	0.006	/
Back Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.04	0.010	1.30	1.11	0.015	/
Left Side	Full power	DH5	76.86%	78	2480	9.56	10.00	-0.04	0.002	1.30	1.11	0.002	/
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.02	0.092	1.30	1.11	0.132	A.1-38
Top Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.10	0.002	1.30	1.11	0.002	/
<b>Second Supply</b>													
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	-0.02	0.092	1.30	1.11	0.132	/
<b>Third supply</b>													
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.00	0.091	1.30	1.11	0.131	/
<b>Body SAR Define (16mm)</b>													
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.09	0.020	1.30	1.11	0.029	/
Test Position	Power Reduction	Mode	Duty Cycle	Channel	Frequency (MHz)	Measured power (dBm)	Tune-up (dBm)	Power Drift (dB)	Limit of 10gSAR 4.0 W/kg (mW/g)				Figure No.
									Measured SAR10g	Duty Cycle Scaling Factor	Scaling Factor	Report SAR10g	
<b>Limb SAR (0mm)</b>													
Front Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.00	0.004	1.30	1.11	0.005	/
Back Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.10	0.007	1.30	1.11	0.010	/
Left Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.00	0.000	1.30	1.11	0.000	/
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.03	0.046	1.30	1.11	0.066	A.1-39
Top Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.00	0.001	1.30	1.11	0.002	/
<b>Second Supply</b>													
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.08	0.039	1.30	1.11	0.056	/
<b>Third supply</b>													
Right Side	Full power	DH5	76.86%	78	2480	9.56	10.00	0.02	0.038	1.30	1.11	0.055	/

## 14.2 Simultaneous SAR Evaluation

Table 14.2-1 Max. Reported SAR for GSM/WCDMA/LTE

Simultaneous Transmission Table	Test Position	Cellular										Max.Report SAR <sub>10g</sub> GSM/WCDMA/LTE	
		Report SAR <sub>10g</sub> (W/kg)	GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE B2	LTE B4	LTE B7	LTE B26		LTE B40
Body SAR (Worn&HotSpot 5mm)	Front Side	0.573	0.839	0.870	1.017	0.295	0.926	1.136	0.575	0.335	0.314	0.303	1.136
	Back Side	0.248	0.060	0.065	0.083	0.120	0.085	0.067	0.446	0.131	0.207	0.248	0.446
	Left Side	0.081	0.202	0.219	0.087	0.050	0.219	0.159	0.297	0.053	0.111	0.128	0.297
	Right Side	0.703	0.837	0.744	0.890	0.525	0.843	0.789	0.806	0.476	0.505	0.661	0.890
	Top Side	0.070	0.212	0.229	0.264	0.040	0.188	0.260	0.431	0.046	0.165	0.333	0.431
Body SAR Define	Right Side(16mm)	0.328	0.478	0.659	0.483	0.248	0.651	0.455	0.915	0.223	0.583	0.453	0.915
Simultaneous Transmission Table	Test Position	Cellular										Max.Report SAR <sub>10g</sub> GSM/WCDMA/LTE	
		Report SAR <sub>10g</sub> (W/kg)	GSM850	GSM1900	WCDMA Band II	WCDMA Band IV	WCDMA Band V	LTE B2	LTE B4	LTE B7	LTE B26		LTE B40
Limb SAR(0mm)	Front Side	0.739	0.965	1.006	1.122	0.395	0.944	1.056	0.486	0.392	0.241	0.291	1.122
	Back Side	0.226	0.046	0.072	0.074	0.118	0.073	0.052	0.279	0.129	0.141	0.132	0.279
	Left Side	0.067	0.264	0.211	0.094	0.046	0.312	0.118	0.209	0.046	0.148	0.151	0.312
	Right Side	1.059	0.822	0.711	0.913	0.878	0.833	0.924	0.730	0.833	0.505	0.610	1.059
	Top Side	0.071	0.186	0.193	0.184	0.043	0.162	0.193	0.389	0.046	0.128	0.297	0.389

Table 14.2-2 Max. Reported SAR for Wi-Fi&BT

Simultaneous Transmission Table	Test Position	Non-Cellular							Max.Report SAR <sub>10g</sub> Wi-Fi 5G
		Report SAR <sub>10g</sub> (W/kg)	Max.Report SAR <sub>10g</sub> BT	Max.Report SAR <sub>10g</sub> Wi-Fi 2.4G	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3	
Body SAR (Worn&HotSpot 5mm)	Front Side		0.006	0.040	0.011	0.025	0.069	0.074	0.074
	Back Side		0.015	0.072	0.061	0.055	0.064	0.068	0.068
	Left Side		0.002	0.022	0.055	0.064	0.048	0.048	0.064
	Right Side		0.132	0.550	0.146	0.270	0.406	0.488	0.488
	Top Side		0.002	0.021	0.004	0.009	0.014	0.013	0.014
Body SAR Define	Right Side(16mm)		0.029	0.183	0.146	0.270	0.406	0.488	0.488
Simultaneous Transmission Table	Test Position	Non-Cellular							Max.Report SAR <sub>10g</sub> Wi-Fi 5G
		Report SAR <sub>10g</sub> (W/kg)	Max.Report SAR <sub>10g</sub> BT	Max.Report SAR <sub>10g</sub> Wi-Fi 2.4G	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3	
Limb SAR(0mm)	Front Side		0.005	0.038	0.008	0.017	0.035	0.031	0.035
	Back Side		0.010	0.050	0.029	0.030	0.034	0.049	0.049
	Left Side		0.000	0.016	0.032	0.039	0.028	0.024	0.039
	Right Side		0.066	0.298	0.152	0.218	0.272	0.305	0.305
	Top Side		0.002	0.017	0.003	0.005	0.004	0.003	0.005

Table 14.2-3 Simultaneous transmission SAR

Simultaneous Transmission Table	Test Position	Max.Report SAR <sub>10g</sub> GSM/WCDMA/LTE	Non-Cellular			WWAN+BT	WWAN+Wi-Fi 2.4G	WWAN+Wi-Fi 5G	MAX.ZSAR <sub>10g</sub>
			Max.Report SAR <sub>10g</sub> BT	Max.Report SAR <sub>10g</sub> Wi-Fi 2.4G	Max.Report SAR <sub>10g</sub> Wi-Fi 5G				
Body SAR (Worn&HotSpot 5mm)	Front Side	1.136	0.006	0.040	0.074	1.141	1.176	1.209	1.21
	Back Side	0.446	0.015	0.072	0.068	0.461	0.518	0.514	0.52
	Left Side	0.297	0.002	0.022	0.064	0.300	0.319	0.362	0.36
	Right Side	0.890	0.132	0.550	0.488	1.022	1.440	1.379	1.44
	Top Side	0.431	0.002	0.021	0.014	0.434	0.452	0.445	0.45
Body SAR Define	Right Side(16mm)	0.915	0.029	0.183	0.488	0.945	1.098	1.404	1.40
Simultaneous Transmission Table	Test Position	Max.Report SAR <sub>10g</sub> GSM/WCDMA/LTE	Non-Cellular			WWAN+BT	WWAN+Wi-Fi 2.4G	WWAN+Wi-Fi 5G	MAX.ZSAR <sub>10g</sub>
			Max.Report SAR <sub>10g</sub> BT	Max.Report SAR <sub>10g</sub> Wi-Fi 2.4G	Max.Report SAR <sub>10g</sub> Wi-Fi 5G				
Limb SAR(0mm)	Front Side	1.122	0.005	0.038	0.035	1.127	1.159	1.157	1.16
	Back Side	0.279	0.010	0.050	0.049	0.289	0.329	0.328	0.33
	Left Side	0.312	0.000	0.016	0.039	0.312	0.328	0.351	0.35
	Right Side	1.059	0.066	0.298	0.305	1.126	1.357	1.364	1.36
	Top Side	0.389	0.002	0.017	0.005	0.391	0.406	0.394	0.41

According to the above table, the sum of reported SAR values for partial-body GSM/WCDMA/LTE and Wi-Fi/BT < 1.6W/kg; the sum of reported SAR values for Limb GSM/WCDMA/LTE and Wi-Fi/BT < 4.0W/kg.

### 14.3 SAR Measurement Variability

SAR measurement variability must be assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium.

The following procedures are applied to determine if repeated measurements are required.

- (a) Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg; steps(b) through (d) do not apply.
- (b) When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
- (c) Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$ W/kg ( $\sim 10\%$  from the 1-g SAR limit).
- (d) Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .

Table 14.3-1: SAR Measurement Variability (1g)

Frequency		Configuration	Test Position	Original SAR (W/kg)	First Repeated SAR (W/kg)	The Ratio
Channel	Frequency (MHz)					
661	1880	GPRS 4TS	Right Side 5mm	0.826	0.792	1.043
1312	1712.4	RMC 12.2k	Front Side 5mm	0.930	0.927	1.003
20175	1732.5	20MHz 1RB 50 offset	Front Side 5mm	0.936	0.909	1.030

Note: According to the KDB 865664 D01 repeated measurement is not required when the original highest measured SAR is  $< 0.8$  W/kg.



## 15 SAR Reduction Function Validation Procedure

### 15.1 Reference Document ( Power Reduction for Proximity Sensor)

A proximity sensor for power reduction is implemented in this device to address RF exposure compliance when the cellular antenna is positioned close to the user's body. The sensor's mechanical structure is designed to fit within the enclosure design used in this device and also extended around the edge and top of the antenna element in order to optimize sensitivity in these orientations.

### 15.2 Procedures for Determining Proximity Sensor Triggering Distances

The following procedures should be applied to determine proximity sensor triggering distances for the back surface and individual edges of a tablet. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures. Unless there is built-in test software that reports the triggering conditions and enables the power levels to be confirmed separately, monitoring of conducted power during the triggering tests typically requires internal access to the antenna ports inside the tablet, which may interfere with the triggering tests.

- (a) The relevant transmitter should be set to operate at its normal maximum output power.
- (b) The entire back surface or edge of the tablet is positioned below a flat phantom filled with the required tissue-equivalent medium, and positioned at least 20 mm further than the distance that triggers power reduction.
- (c) It should be ensured that the cables required for power measurements are not interfering with the proximity sensor. Cable losses should be properly compensated to report the measured power results.
- (d) The back surface or edge is moved toward the phantom in 3 mm steps until the sensor triggers.
- (e) The back surface or edge is then moved back (further away) from the phantom by at least 5 mm or until maximum output power is returned to the normal maximum level.
- (f) If the tablet is not touching the phantom, it is moved in 3 mm steps until it touches the phantom to confirm that the sensor remains triggered and the maximum power stays reduced.
- (g) The process is then reversed by moving the tablet away from the phantom according to steps 4) to 7), to determine triggering release, until it is at least 10 mm beyond the point that triggers the return of normal maximum power.
- (h) The measured output power within  $\pm 5$  mm of the triggering points, or until the tablet is touching the phantom, for movements to and from the phantom should be tabulated in the SAR report.
- (i) (9) If the sensor design and implementation allow additional variations for triggering distance tolerances, multiple samples should be tested to determine the most conservative distance required for SAR evaluation.

To ensure all production units are compliant, it is generally necessary to reduce the triggering distance determined from the triggering tests by 1 mm, or more if it is necessary, and use the smallest distance for movements to and from the phantom, minus 1 mm, as the sensor triggering distance for determining the SAR measurement distance.

### 15.3 Procedures for Determining Antenna and Proximity Sensor Coverage

The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset

from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. The following are used to determine if additional SAR measurements may be necessary due to sensor and antenna offset. 25 These procedures do not apply and are not required for configurations where the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

- (a) The back surface or edge of the tablet is positioned at a test separation distance less than or equal to the distance required for back surface or edge triggering, with both the antenna and sensor pad located at least 20 mm laterally outside the edge (boundary) of the phantom, along the direction of maximum antenna and sensor offset. For the back surface, if the direction of maximum offset is not aligned with the tablet coordinates (physical edges) the tablet test position would not be aligned with the phantom coordinates (orientations). Each applicable tablet edge should be positioned perpendicularly to the phantom to determine sensor coverage. For antennas and/or sensors located near the corner of a tablet, both adjacent edges must be considered.
- (b) The similar sequence of steps applied to determine sensor triggering distance are used to verify back surface and edge sensor coverage by moving the tablet (sensor and antenna) horizontally toward the phantom while maintaining the same vertical separation between the back surface or edge and the phantom.
- (c) After the exact location where triggering of power reduction is determined, with respect to the sensor and antenna, the tablet movement should be continued, in 3 mm increments, until both the sensor and antenna(s) are fully under the phantom and at least 20 mm inside the phantom edge.
- (d) The process is then repeated from the opposite direction, starting at the other end of the maximum antenna and sensor offset, by rotating the tablet 180° along the vertical axis.
- (e) The triggering points should be documented graphically, with the antenna and sensor clearly identified, along with all relevant dimensions.

If the subsequently measured peak SAR location for the antenna is not between the triggering points, established by the sensor coverage tests from opposite ends of the antenna and sensor, additional SAR tests may be required for conditions where only part of the back surface or edge of a tablet corresponding to the antenna is in proximity to the user and the sensor may not be triggering as desired. A KDB inquiry must be submitted by the test lab to determine if additional tests are required and the proper test configurations to use for testing. This may include situations where the sensor coverage region is too small for the antenna, the sensor is located too far away from the antenna, the sensor location is insufficient to cover multiple antennas or the antenna is at the corner of a tablet etc.

### 15.4 Proximity Sensor Status Table of Trigger Distance

The following tables summarize the key power reduction information for proximity sensor. The test procedures be applied to determine proximity sensor triggering distances, and sensor coverage for normal and tilt positions.

To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering and sensor coverage for normal and tilt positions for all usage conditions and applicable sides, minus 1 mm, must be used as the test separation distance for additional SAR testing of each higher power stage.

Table 15.4-1 Power reduction for proximity sensor

Main Antenna			
Band	Test position	Sensor Trigger Distance range (DUT to Phantom)	Power reduction amount(dB)
GSM850 GPRS4TS	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	4.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
GSM1900 GPRS4TS	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	4.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
WCDMA Band II RMC	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	5.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
WCDMA Band IV RMC	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	3.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
WCDMA Band V RMC	Front side	N/A	0.0
	Back side	N/A	0.0


	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	3.0
		distance>17mm	0.0
	Top side	N/A	0.0
Bottom side	N/A	0.0	
LTE B2 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	5.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
LTE B4 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	3.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
LTE B5 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	2.5
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
LTE B7 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	7.0
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
LTE B26 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	2.5
		distance>17mm	0.0
	Top side	N/A	0.0
	Bottom side	N/A	0.0
LTE B38 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0

	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	6.0
		distance>17mm	0.0
	Top side	N/A	0.0
Bottom side	N/A	0.0	
LTE B40 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	6.0
		distance>17mm	0.0
	Top side	N/A	0.0
Bottom side	N/A	0.0	
LTE B41 QPSK	Front side	N/A	0.0
	Back side	N/A	0.0
	Left side	N/A	0.0
	Right side	0mm≤distance≤17mm	6.0
		distance>17mm	0.0
	Top side	N/A	0.0
Bottom side	N/A	0.0	

### Procedures for determining proximity sensor triggering distances

The device was tested by the test lab to determine the proximity sensor triggering distances for the right side of the device. To ensure all production units are compliant, the smallest separation distance determined by the sensor triggering minus 1 mm, must be used as the test separation distance for SAR testing.

The Proximity sensor triggering distance measurement method are as below:

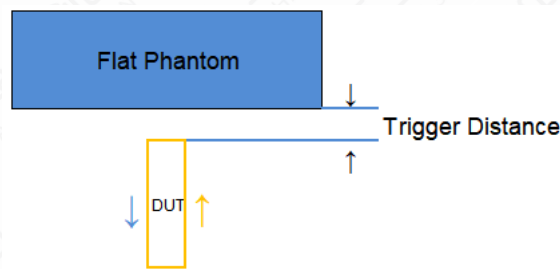

Figuer 15.4-1 Proximity sensor triggering distances assessment(Right side)

The following table is the summary of the trigger distance.

Table 15.4-2 Summary of trigger distance

Band	Trigger distance- Right side	
	Moving toward Phantom	Moving away from Phantom

GSM850	17mm	17mm
GSM1900	17mm	17mm
WCDMA Band II	17mm	17mm
WCDMA Band IV	17mm	17mm
WCDMA Band V	17mm	17mm
LTE Band 2	17mm	17mm
LTE Band 4	17mm	17mm
LTE Band 5	17mm	17mm
LTE Band 7	17mm	17mm
LTE Band 26	17mm	17mm
LTE Band 38	17mm	17mm
LTE Band 40	17mm	17mm
LTE Band 41	17mm	17mm

### 15.5 Tilt Angle Influences to Proximity Sensor Triggering

The following procedure is used to determine the tilt angle influences to proximity sensor triggering.

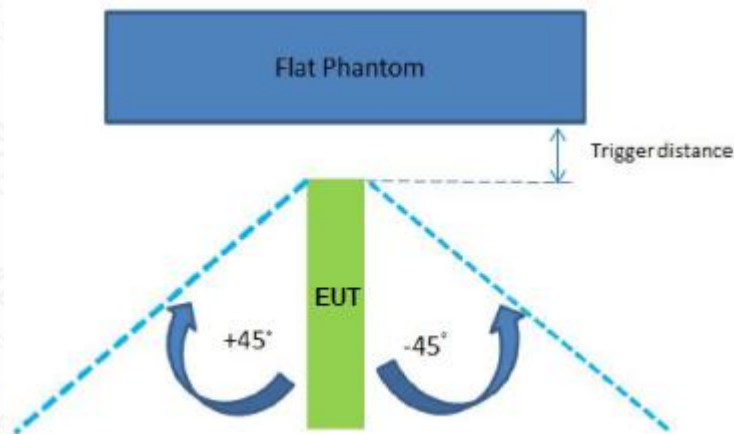



Table 15.5-1 Summary of tilt angle

Test position	Minimum trigger distance at which power reduction was maintained over $\pm 45^\circ$	Power Reduction Status											
		-45°	-35°	-25°	-15°	-5°	0°	5°	15°	25°	35°	45°	
Right side	17mm	on	on	on	on	on	on	on	on	on	on	on	on

### 15.6 Power Reduction per Air-interface

The following graphs show the detailed conducted power and the distance from the DUT to the flat phantom for the Right side.

Right Side:

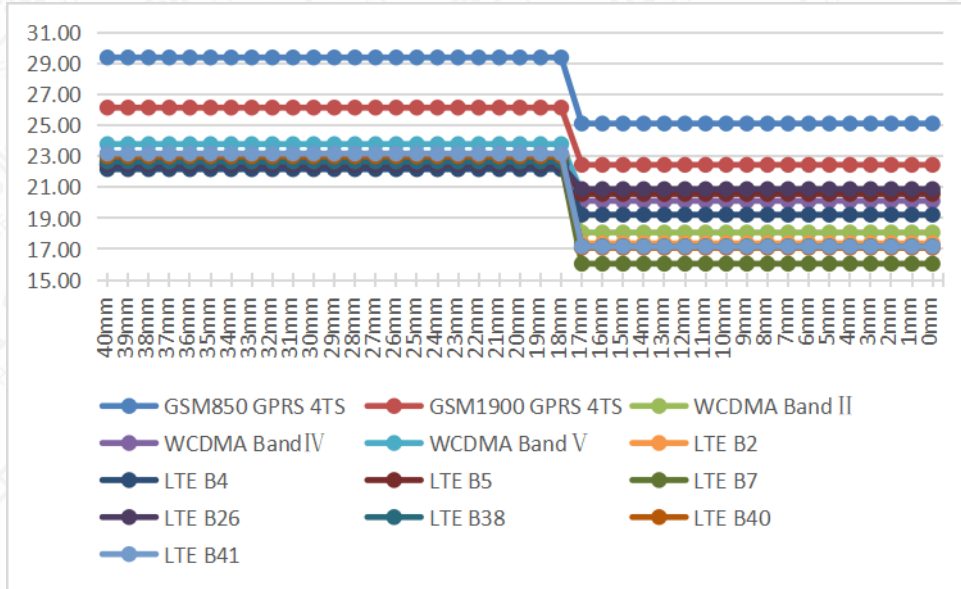

### 15.7 Proximity Sensor Coverage Area

Proximity Sensor Coverage Area of not request when the antenna and sensor are collocated and the peak SAR location is overlapping with the sensor.

## Annex A: Measurement Data

### A.1 SAR Graph Results

#### GSM850 GPRS 4TS Right Side Mode Middle 5mm

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.911 \text{ S/m}$ ;  $\epsilon_r = 41.266$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: GPRS 850 4TS 900MHz;      Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @  $836.6 \text{ MHz}$

#### GSM850 GPRS 4TS Right Side Mode Middle 5mm/Area Scan (5x11x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.703 \text{ W/kg}$

#### GSM850 GPRS 4TS Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $14.17 \text{ V/m}$ ; Power Drift =  $-0.07 \text{ dB}$

Peak SAR (extrapolated) =  $1.07 \text{ W/kg}$

SAR(1 g) =  $0.573 \text{ W/kg}$ ; SAR(10 g) =  $0.321 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.885 \text{ W/kg}$

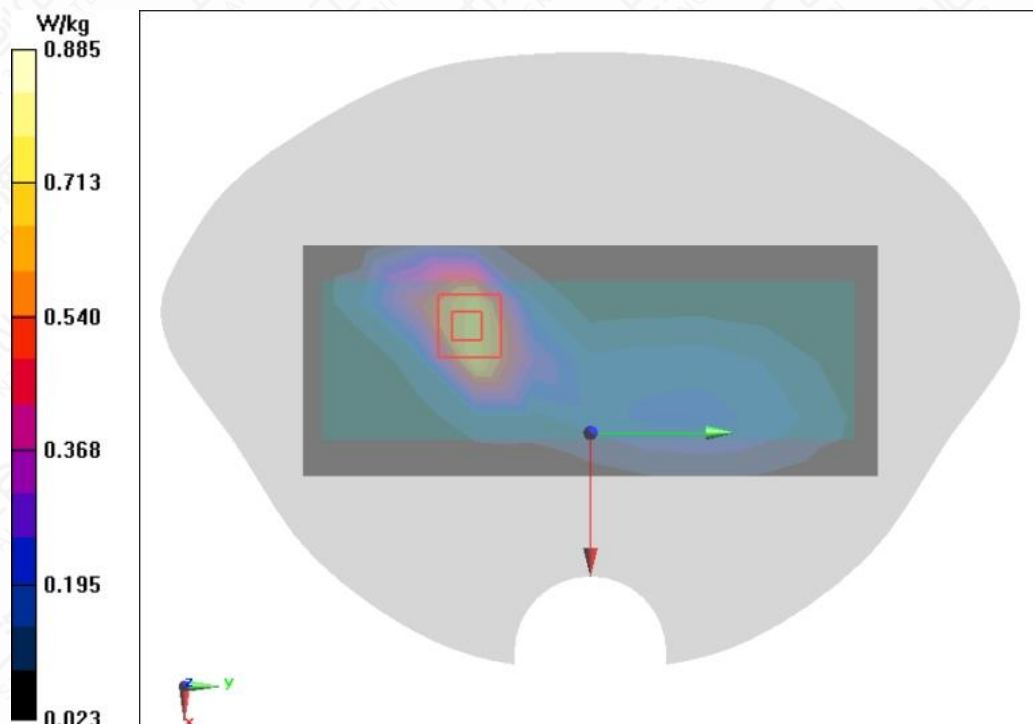


Figure A.1-1 GSM850 GPRS 4TS Right Side Mode Middle 5mm



**GSM850 GPRS 4TS Right Side Mode Middle 0mm**

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.911 \text{ S/m}$ ;  $\epsilon_r = 41.266$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: GPRS 850 4TS 900MHz;      Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:2

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @  $836.6 \text{ MHz}$

**GSM850 GPRS 4TS Right Side Mode Middle 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.94 \text{ W/kg}$

**GSM850 GPRS 4TS Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.16 \text{ V/m}$ ; Power Drift =  $-0.06 \text{ dB}$

Peak SAR (extrapolated) =  $3.30 \text{ W/kg}$

SAR(1 g) =  $1.64 \text{ W/kg}$ ; SAR(10 g) =  $0.863 \text{ W/kg}$

Maximum of SAR (measured) =  $2.52 \text{ W/kg}$

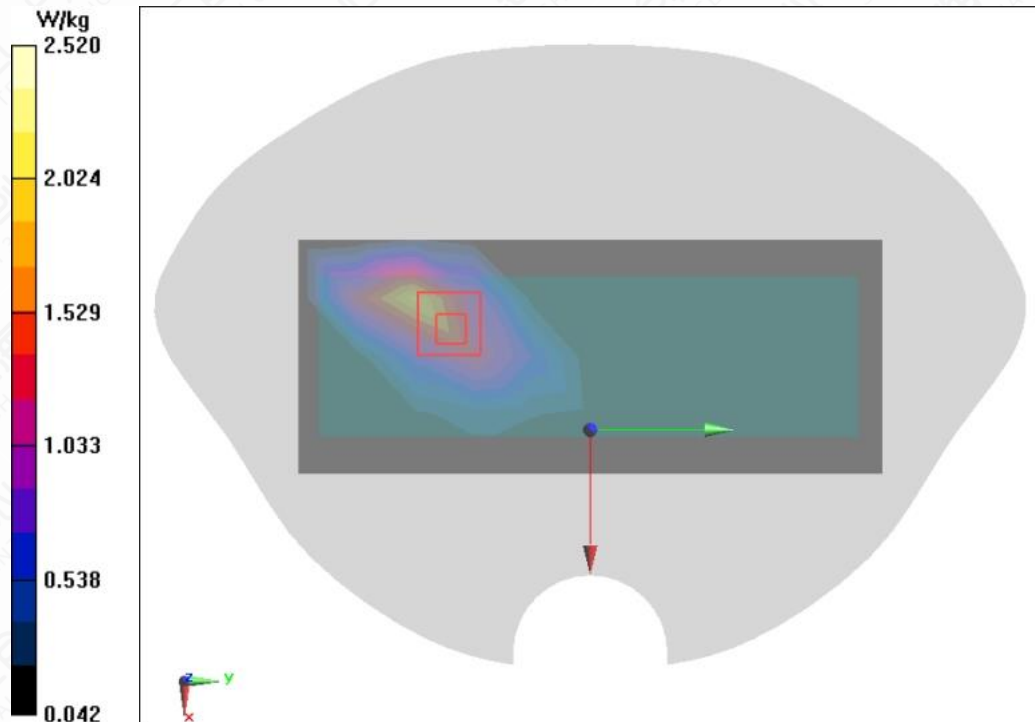


Figure A.1-2 GSM850 GPRS 4TS Right Side Mode Middle 0mm

**GSM1900 GPRS 4TS Right Side Mode Middle 5mm**

Date/Time: 2024/4/16

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 38.29$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: GSM 1900MHz GPRS 4TS (0);      Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1880 MHz

**GSM1900 GPRS 4TS Right Side Mode Middle 5mm/Area Scan (5x12x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

 Maximum value of SAR (measured) =  $0.840 \text{ W/kg}$ 
**GSM1900 GPRS 4TS Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $12.54 \text{ V/m}$ ; Power Drift =  $-0.09 \text{ dB}$ 

 Peak SAR (extrapolated) =  $1.70 \text{ W/kg}$ 

 SAR(1 g) =  $0.826 \text{ W/kg}$ ; SAR(10 g) =  $0.394 \text{ W/kg}$ 

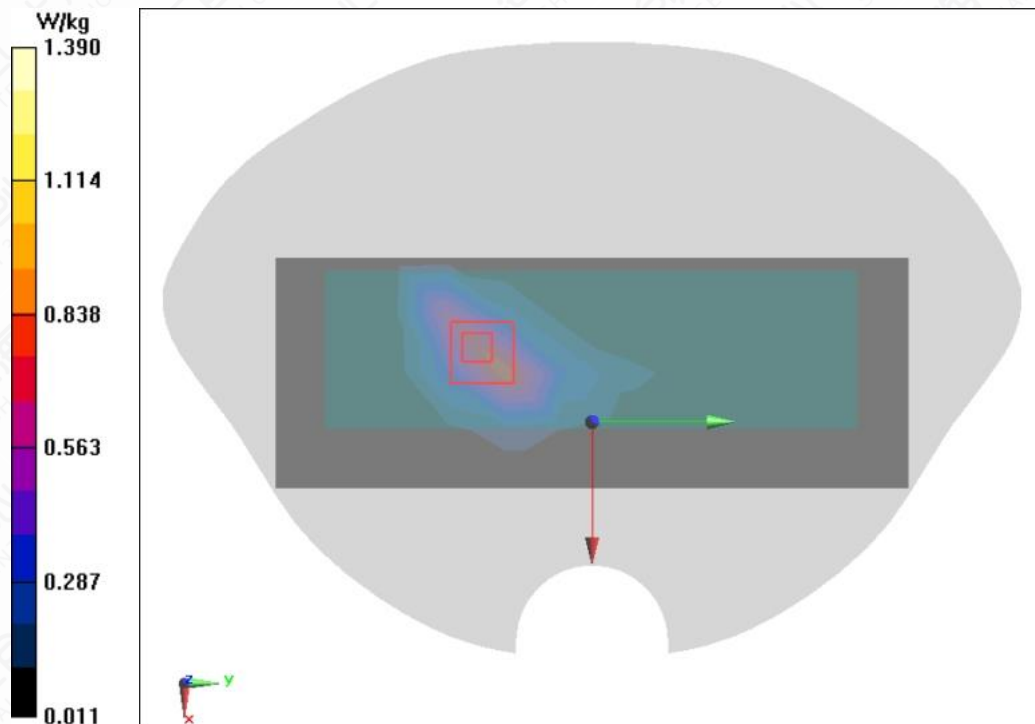
 Maximum value of SAR (measured) =  $1.39 \text{ W/kg}$ 


Figure A.1-3 GSM1900 GPRS 4TS Right Side Mode Middle 5mm

**GSM1900 GPRS 4TS Front Side Mode Middle 0mm**

Date/Time: 2024/4/16

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 38.29$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: GSM 1900MHz GPRS 4TS (0);      Frequency: 1880 MHz; Duty Cycle: 1:2

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1880 MHz

**GSM1900 GPRS 4TS Front Side Mode Middle 0mm/Area Scan (7x11x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $2.30 \text{ W/kg}$

**GSM1900 GPRS 4TS Front Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $9.740 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $3.19 \text{ W/kg}$

SAR(1 g) =  $1.67 \text{ W/kg}$ ; SAR(10 g) =  $0.888 \text{ W/kg}$

Maximum value of SAR (measured) =  $2.44 \text{ W/kg}$

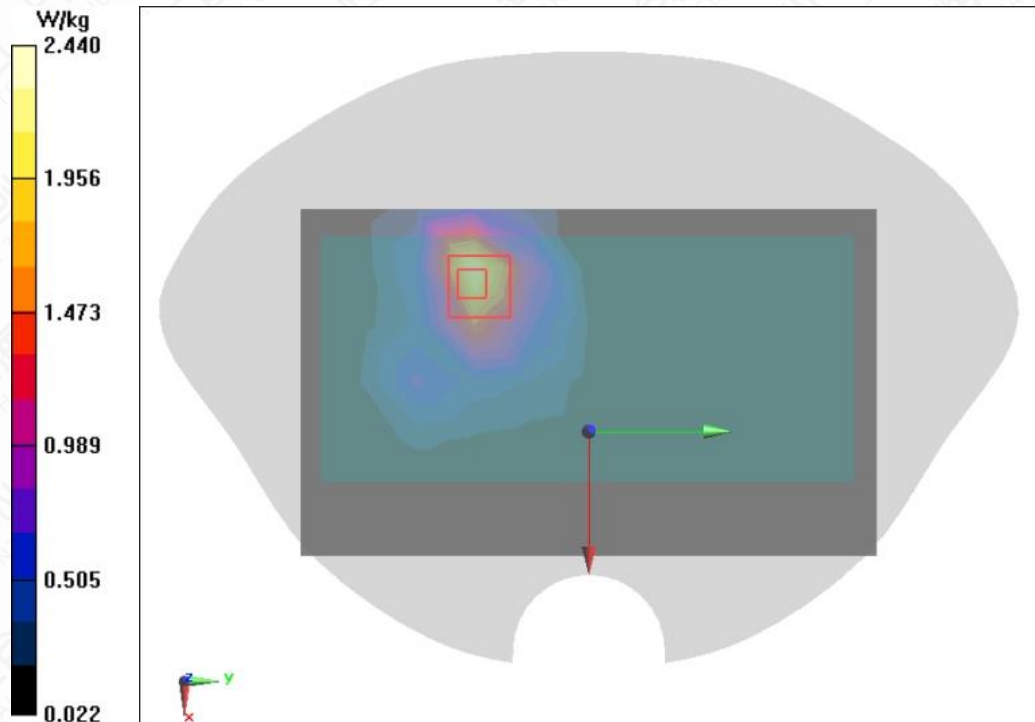


Figure A.1-4 GSM1900 GPRS 4TS Front Side Mode Middle 0mm

**WCDMA Band II Front Side Mode Low 5mm**

Date/Time: 2024/4/16

Electronics: DAE4 Sn1581

 Medium parameters used (interpolated):  $f = 1852.4$  MHz;  $\sigma = 1.386$  S/m;  $\epsilon_r = 38.339$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 21.4°C      Liquid Temperature: 20.4°C

Communication System: WCDMA Professional Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1852.4 MHz

**WCDMA Band II Front Side Mode Low 5mm/Area Scan (7x11x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.994 W/kg

**WCDMA Band II Front Side Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.11 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.28 W/kg

SAR(1 g) = 0.784 W/kg; SAR(10 g) = 0.463 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

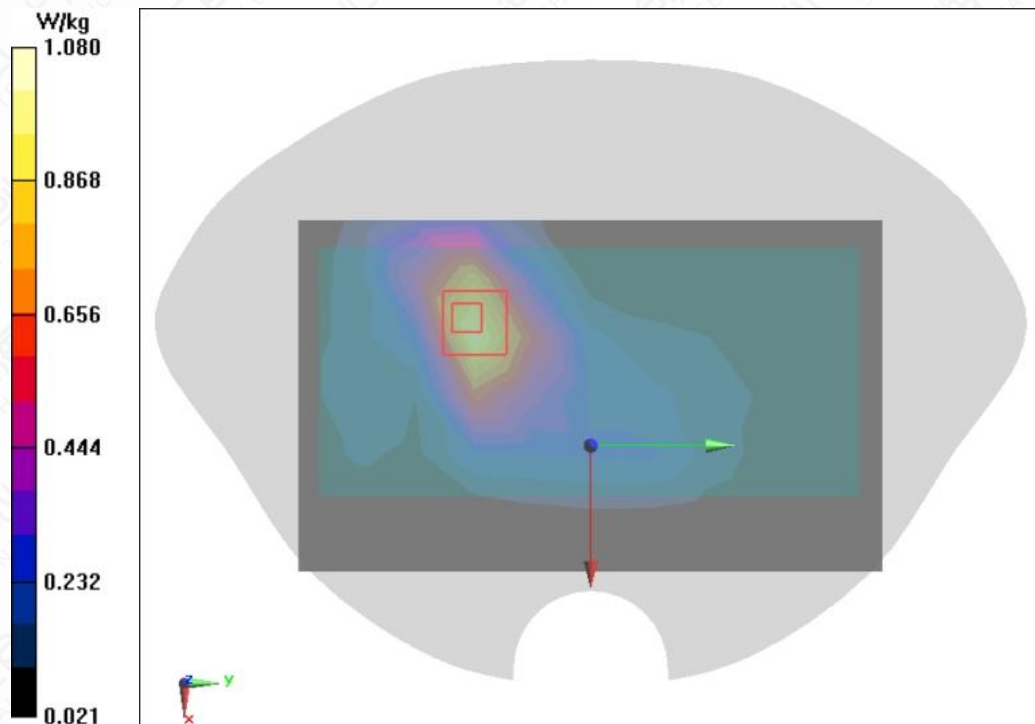


Figure A.1-5 WCDMA Band II Front Side Mode Low 5mm

**WCDMA Band II Front Side Mode Middle 0mm**

Date/Time: 2024/4/16

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 38.29$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: WCDMA Bandand II; Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1880 MHz

**WCDMA Band II Front Side Mode Middle 0mm/Area Scan (7x11x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 2.54 W/kg

**WCDMA Band II Front Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 8.225 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 3.23 W/kg

SAR(1 g) = 1.73 W/kg; SAR(10 g) = 0.913 W/kg

Maximum value of SAR (measured) = 2.65 W/kg

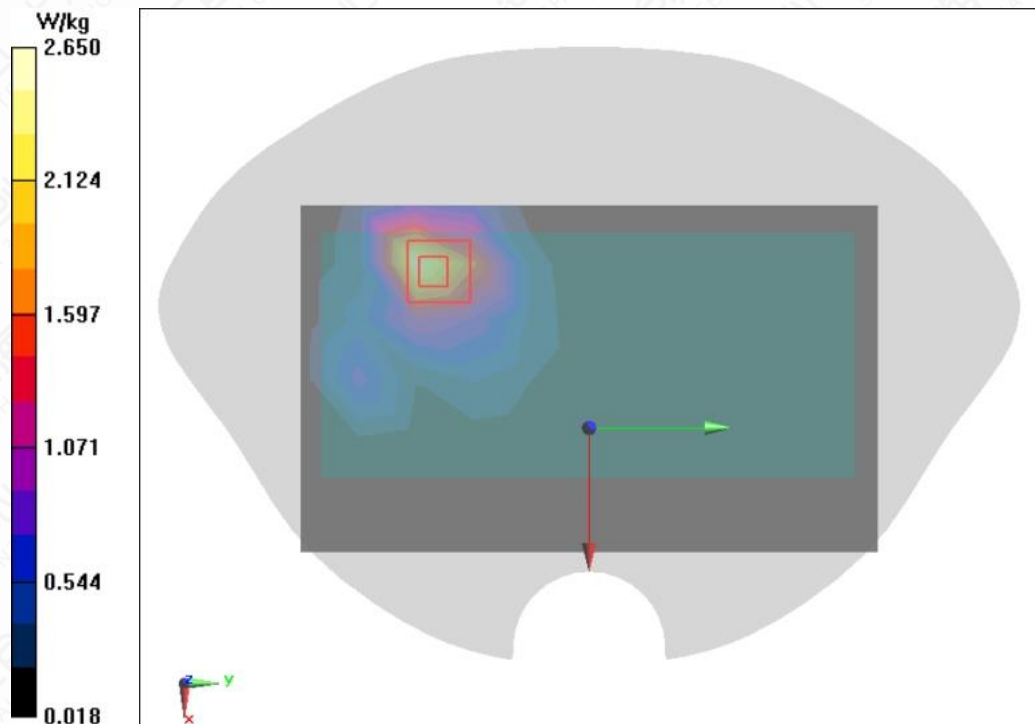


Figure A.1-6 WCDMA Band II Front Side Mode Middle 0mm

**WCDMA BandIV Front Side Mode Low 5mm**

Date/Time: 2024/4/23

Electronics: DAE4 Sn1581

Medium parameters used (interpolated):  $f = 1712.4$  MHz;  $\sigma = 1.302$  S/m;  $\epsilon_r = 38.874$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature:21.5°C Liquid Temperature:20.3°C

Communication System: WCDMA Professional Band IV; Frequency: 1712.4 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.86, 8.86, 8.86) @ 1712.4 MHz

**WCDMA BandIV Front Side Mode Low 5mm/Area Scan (7x11x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.10 W/kg

**WCDMA BandIV Front Side Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.65 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.53 W/kg

SAR(1 g) = 0.930 W/kg; SAR(10 g) = 0.536 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

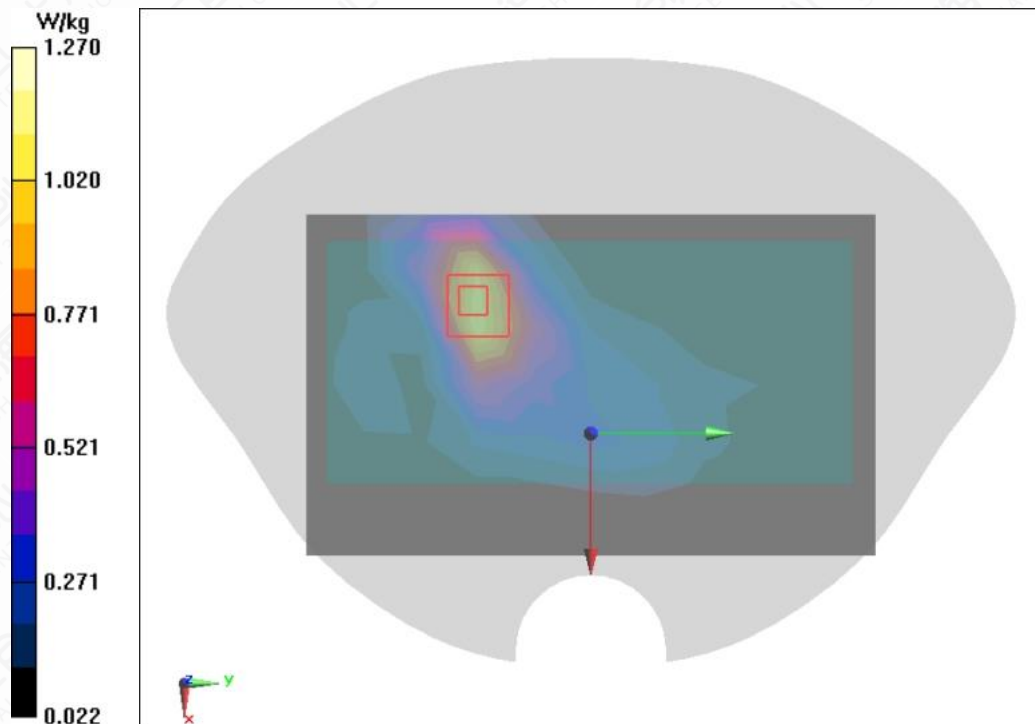


Figure A.1-7 WCDMA BandIV Front Side Mode Low 5mm

**WCDMA BandIV Front Side Mode Middle 0mm**

Date/Time: 2024/4/23

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 1733 \text{ MHz}$ ;  $\sigma = 1.314 \text{ S/m}$ ;  $\epsilon_r = 38.839$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.3^\circ\text{C}$ 

 Communication System: WCDMA Professional Band IV; Frequency:  $1732.6 \text{ MHz}$ ; Duty Cycle: 1:1

 Probe: EX3DV4 - SN7634ConvF(8.86, 8.86, 8.86) @  $1732.6 \text{ MHz}$ 
**WCDMA BandIV Front Side Mode Middle 0mm/Area Scan (7x11x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

 Maximum value of SAR (measured) =  $2.40 \text{ W/kg}$ 
**WCDMA BandIV Front Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $8.803 \text{ V/m}$ ; Power Drift =  $0.13 \text{ dB}$ 

 Peak SAR (extrapolated) =  $3.50 \text{ W/kg}$ 

 SAR(1 g) =  $1.92 \text{ W/kg}$ ; SAR(10 g) =  $1.03 \text{ W/kg}$ 

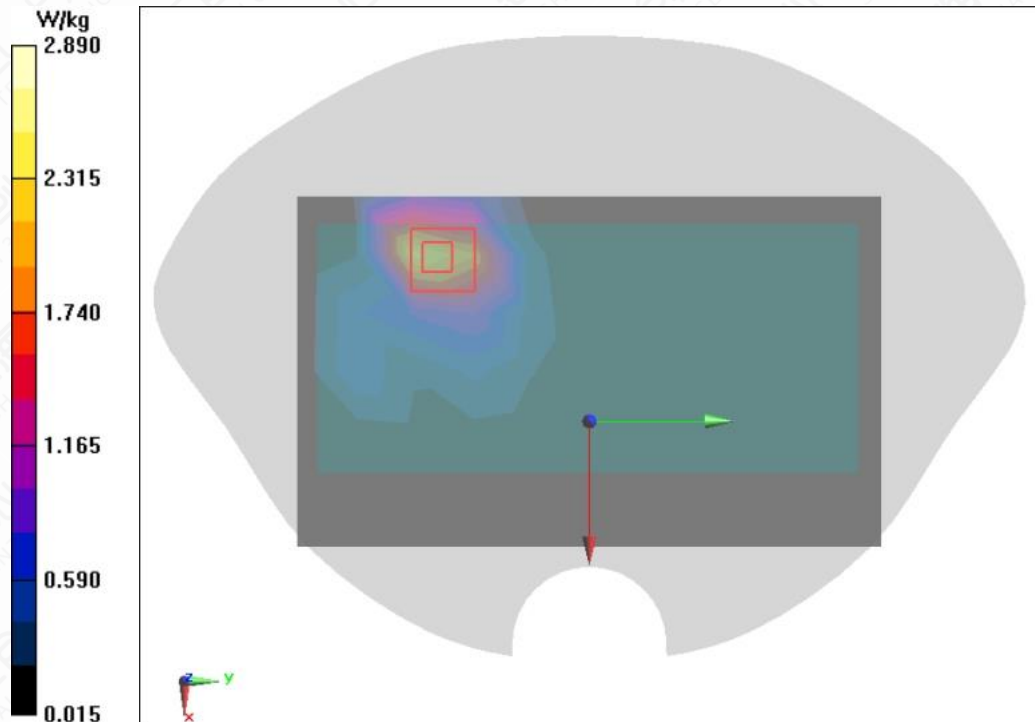
 Maximum value of SAR (measured) =  $2.89 \text{ W/kg}$ 


Figure A.1-8 WCDMA BandIV Front Side Mode Middle 0mm

**WCDMA Band V Right Side Mode Middle 5mm**

Date/Time: 2024/4/17

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.917 \text{ S/m}$ ;  $\epsilon_r = 41.517$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: WCDMA Professional Band V; Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @  $836.6 \text{ MHz}$

**WCDMA Band V Right Side Mode Middle 5mm/Area Scan (5x12x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.465 \text{ W/kg}$

**WCDMA Band V Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $12.44 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$

Peak SAR (extrapolated) =  $0.799 \text{ W/kg}$

SAR(1 g) =  $0.433 \text{ W/kg}$ ; SAR(10 g) =  $0.241 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.664 \text{ W/kg}$

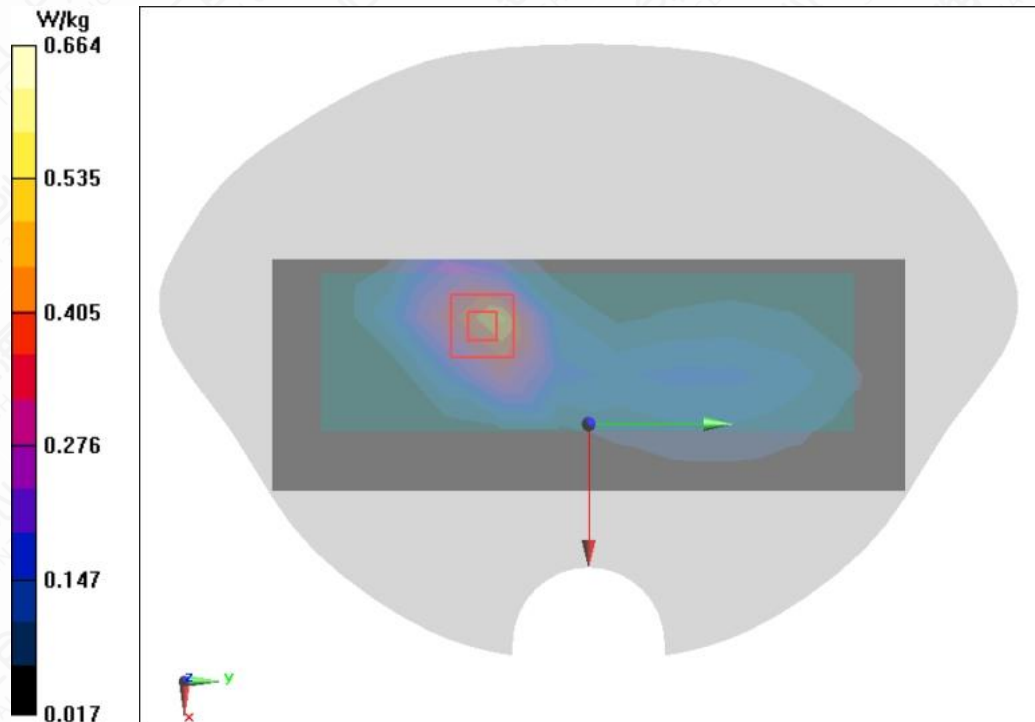


Figure A.1-9 WCDMA Band V Right Side Mode Middle 5mm



**WCDMA Band V Right Side Mode Middle 0mm**

Date/Time: 2024/4/17

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 837 \text{ MHz}$ ;  $\sigma = 0.917 \text{ S/m}$ ;  $\epsilon_r = 41.517$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

 Communication System: WCDMA Professional Band V; Frequency:  $836.6 \text{ MHz}$ ; Duty Cycle: 1:1

 Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @  $836.6 \text{ MHz}$ 
**WCDMA Band V Right Side Mode Middle 0mm/Area Scan (5x12x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

 Maximum value of SAR (measured) =  $1.66 \text{ W/kg}$ 
**WCDMA Band V Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $16.06 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$ 

 Peak SAR (extrapolated) =  $2.84 \text{ W/kg}$ 

 SAR(1 g) =  $1.4 \text{ W/kg}$ ; SAR(10 g) =  $0.724 \text{ W/kg}$ 

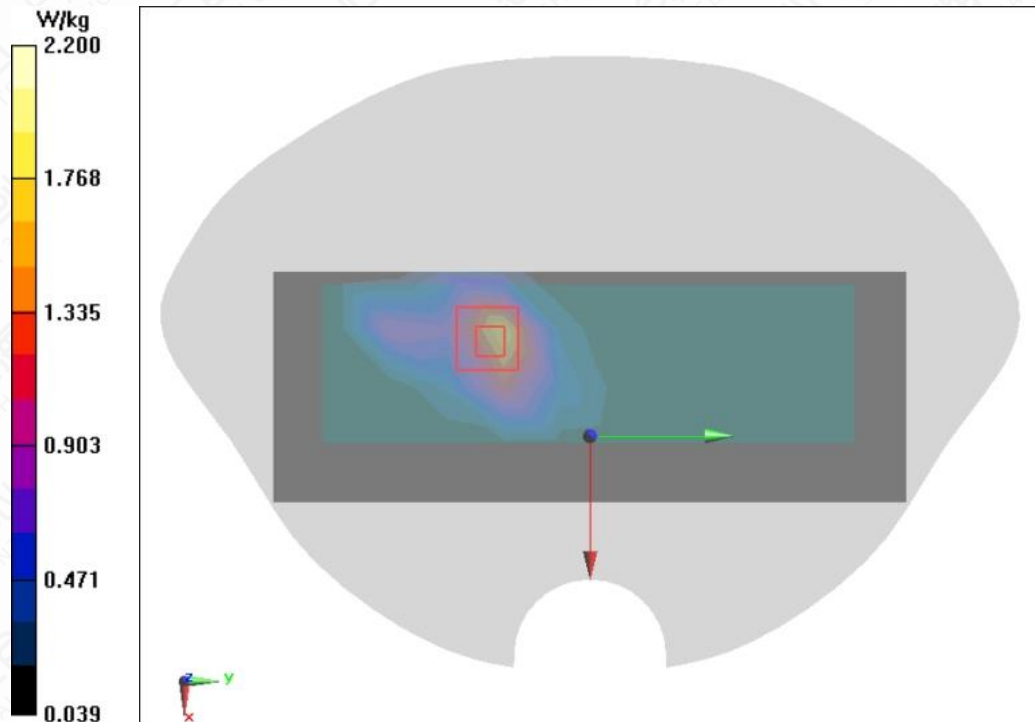
 Maximum value of SAR (measured) =  $2.20 \text{ W/kg}$ 


Figure A.1-10 WCDMA Band V Right Side Mode Middle 0mm

**LTE B2 20MHz 1RB 50offset Front Side Mode Middle 5mm**

Date/Time: 2024/4/16

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 38.29$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: LTE B2 1900MHz;      Frequency: 1880 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1880 MHz

**LTE B2 20MHz 1RB 50offset Front Side Mode Middle 5mm/Area Scan (7x11x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

 Maximum value of SAR (measured) =  $0.978 \text{ W/kg}$ 
**LTE B2 20MHz 1RB 50offset Front Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $13.22 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$ 

 Peak SAR (extrapolated) =  $1.34 \text{ W/kg}$ 

 SAR(1 g) =  $0.799 \text{ W/kg}$ ; SAR(10 g) =  $0.471 \text{ W/kg}$ 

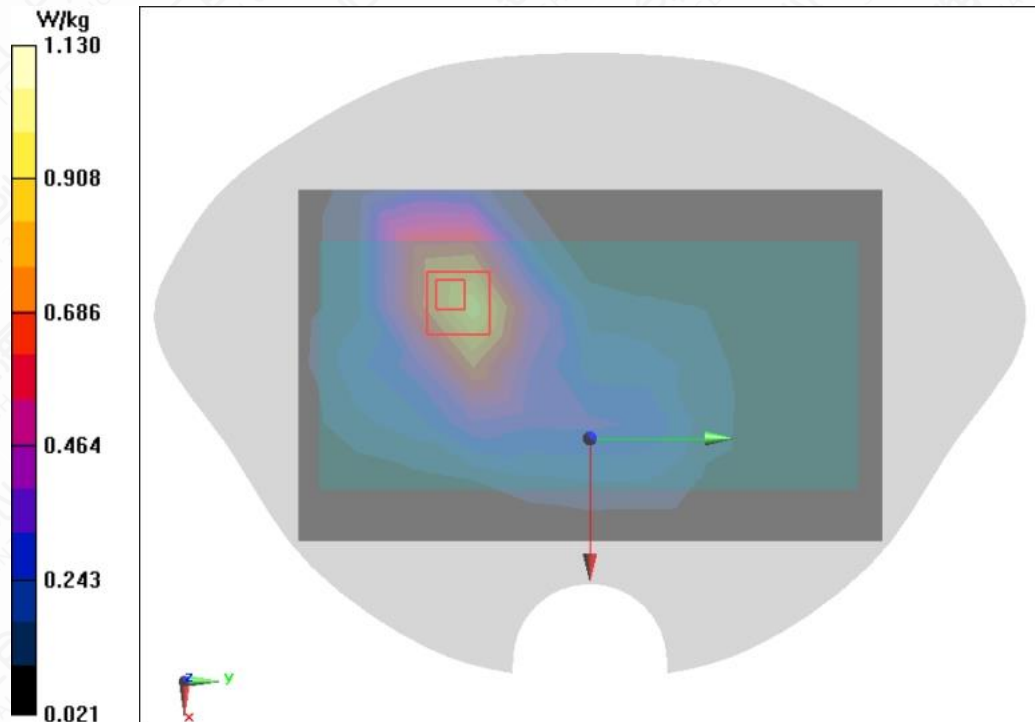
 Maximum value of SAR (measured) =  $1.13 \text{ W/kg}$ 


Figure A.1-11 LTE B2 20MHz 1RB 50offset Front Side Mode Middle 5mm

**LTE B2 20MHz 1RB 50offset Front Side Mode Middle 0mm**

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 1880 \text{ MHz}$ ;  $\sigma = 1.402 \text{ S/m}$ ;  $\epsilon_r = 38.286$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.5^\circ\text{C}$

Communication System: LTE B2 1900MHz;      Frequency:  $1880 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @  $1880 \text{ MHz}$

**LTE B2 20MHz 1RB 50offset Front Side Mode Middle 0mm/Area Scan (7x11x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.65 \text{ W/kg}$

**LTE B2 20MHz 1RB 50offset Front Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $10.75 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

Peak SAR (extrapolated) =  $2.78 \text{ W/kg}$

SAR(1 g) =  $1.49 \text{ W/kg}$ ; SAR(10 g) =  $0.815 \text{ W/kg}$

Maximum value of SAR (measured) =  $2.19 \text{ W/kg}$

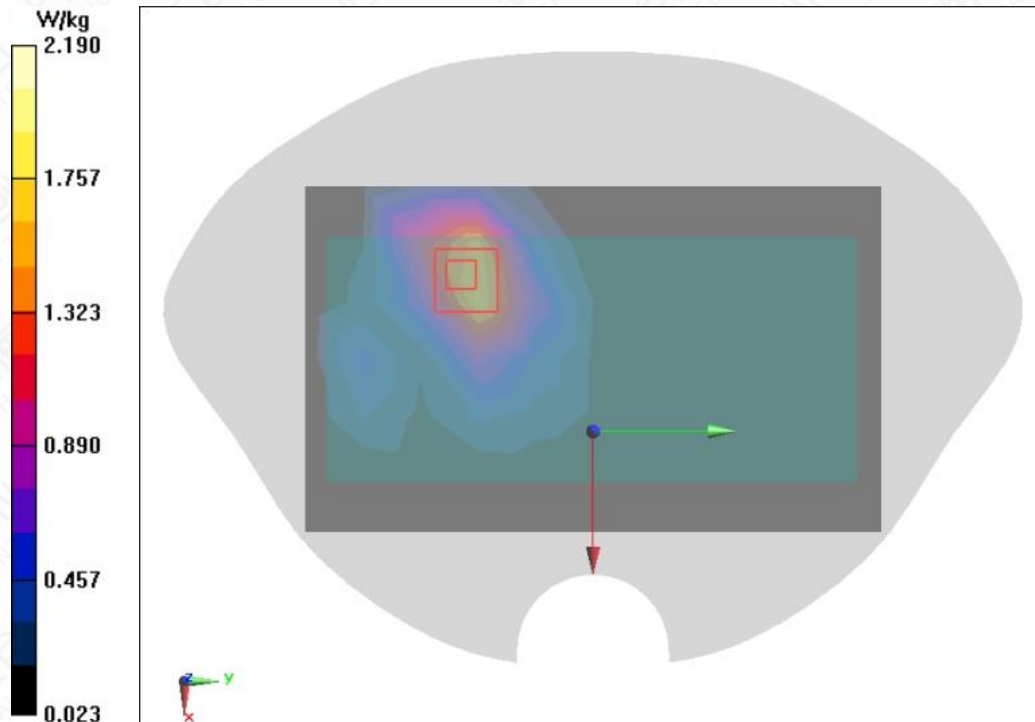


Figure A.1-12 LTE B2 20MHz 1RB 50offset Front Side Mode Middle 0mm

**LTE B4 20MHz 1RB 50offset Front Side Mode Middle 5mm**

Date/Time: 2024/4/23

Electronics: DAE4 Sn1581

Medium parameters used (interpolated):  $f = 1732.5$  MHz;  $\sigma = 1.314$  S/m;  $\epsilon_r = 38.84$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 21.5°C      Liquid Temperature: 20.5°C

Communication System: LTE B4 1900MHz;      Frequency: 1732.5 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.86, 8.86, 8.86) @ 1732.5 MHz

**LTE B4 20MHz 1RB 50offset Front Side Mode Middle 5mm/Area Scan (7x11x1):**

Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.09 W/kg

**LTE B4 20MHz 1RB 50offset Front Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.13 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.55 W/kg

SAR(1 g) = 0.936 W/kg; SAR(10 g) = 0.549 W/kg

Maximum value of SAR (measured) = 1.27 W/kg

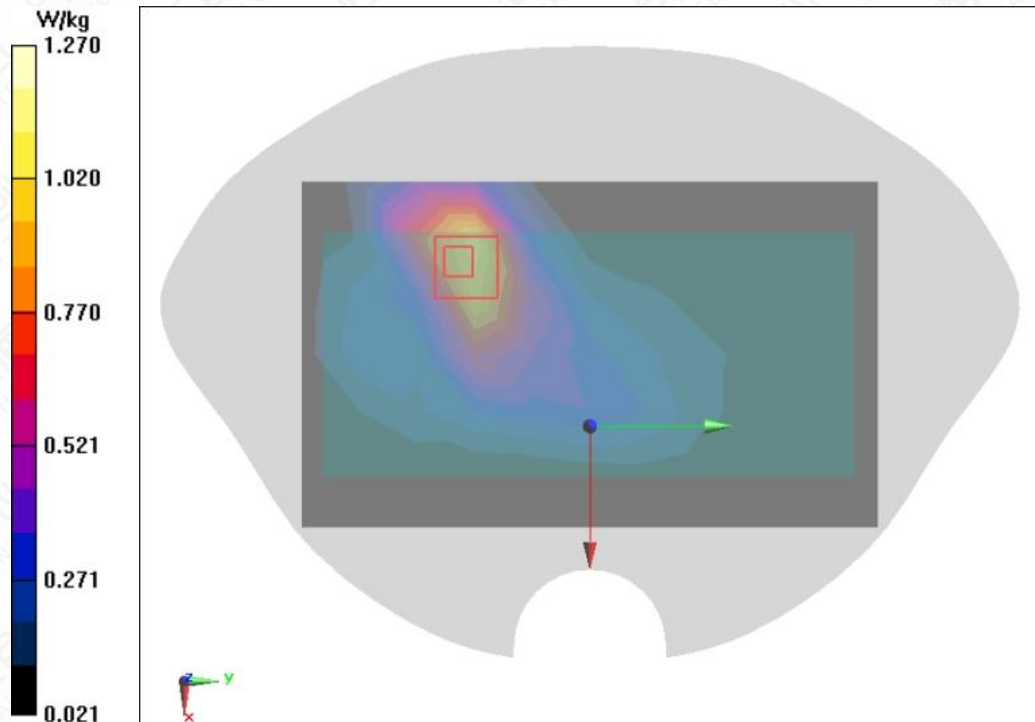


Figure A.1-13 LTE B4 20MHz 1RB 50offset Front Side Mode Middle 5mm

**LTE B4 20MHz 1RB 50offset Front Side Mode Middle 0mm**

Date/Time: 2024/4/23

Electronics: DAE4 Sn1581

Medium parameters used (interpolated):  $f = 1732.5 \text{ MHz}$ ;  $\sigma = 1.314 \text{ S/m}$ ;  $\epsilon_r = 38.84$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.5^\circ\text{C}$

Communication System: LTE B4 1900MHz;    Frequency:  $1732.5 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.86, 8.86, 8.86) @  $1732.5 \text{ MHz}$

**LTE B4 20MHz 1RB 50offset Front Side Mode Middle 0mm/Area Scan (7x11x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.35 \text{ W/kg}$

**LTE B4 20MHz 1RB 50offset Front Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $8.923 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$

Peak SAR (extrapolated) =  $2.94 \text{ W/kg}$

SAR(1 g) =  $1.61 \text{ W/kg}$ ; SAR(10 g) =  $0.870 \text{ W/kg}$

Maximum value of SAR (measured) =  $2.32 \text{ W/kg}$

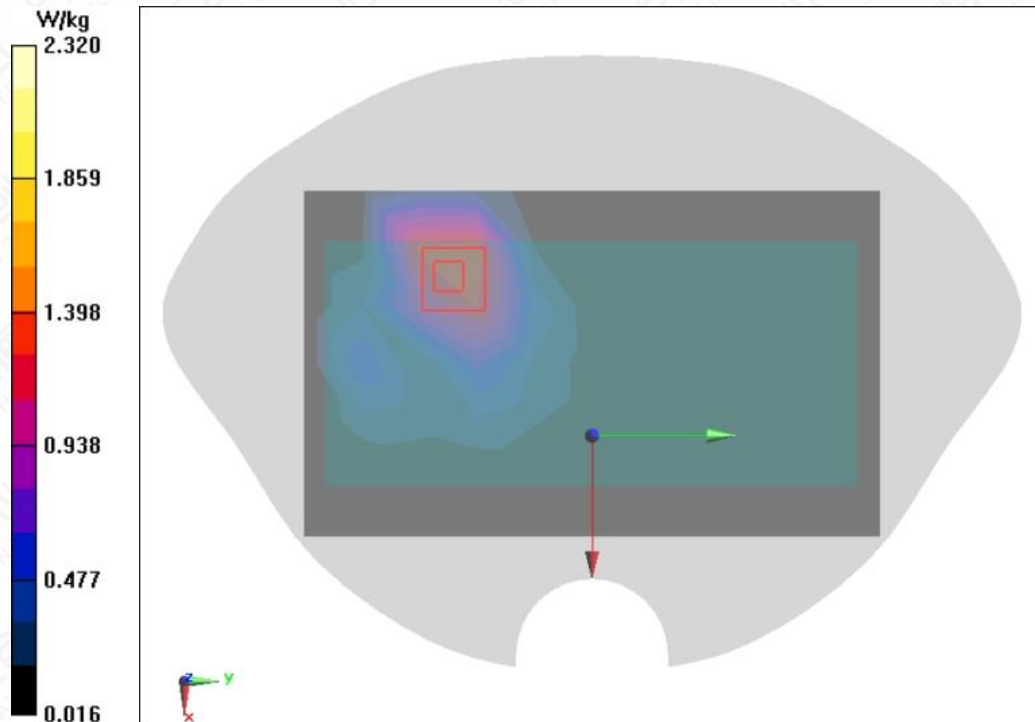


Figure A.1-14 LTE B4 20MHz 1RB 50offset Front Side Mode Middle 0mm

**LTE B7 20MHz 50RB Offset Right Side Mode Middle 5mm**

Date/Time: 2024/4/24

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.898 \text{ S/m}$ ;  $\epsilon_r = 38.791$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: LTE B7 2450MHz;      Frequency: 2535 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2535 MHz

**LTE B7 20MHz 50RB Offset Right Side Mode Middle 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

Maximum value of SAR (measured) = 0.848 W/kg

**LTE B7 20MHz 50RB Offset Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 5.910 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.48 W/kg

SAR(1 g) = 0.716 W/kg; SAR(10 g) = 0.340 W/kg

Maximum value of SAR (measured) = 1.17 W/kg

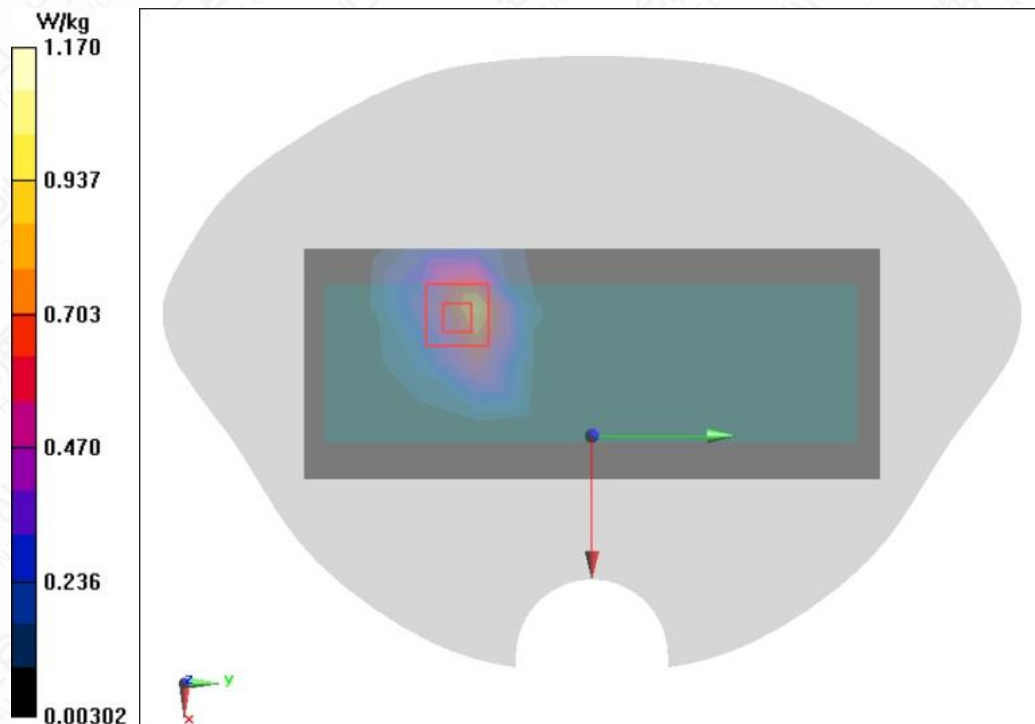


Figure A.1-15 LTE B7 20MHz 50RB Offset Right Side Mode Middle 5mm

**LTE B7 20MHz 1RB 50offset Right Side Mode Middle 16mm**

Date/Time: 2024/4/24

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.898 \text{ S/m}$ ;  $\epsilon_r = 38.791$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: LTE B7 2450MHz;    Frequency: 2535 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2535 MHz

**LTE B7 20MHz 1RB 50offset Right Side Mode Middle 16mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.09 W/kg

**LTE B7 20MHz 1RB 50offset Right Side Mode Middle 16mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 6.180 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 1.39 W/kg

SAR(1 g) = 0.739 W/kg; SAR(10 g) = 0.396 W/kg

Maximum value of SAR (measured) = 1.12 W/kg

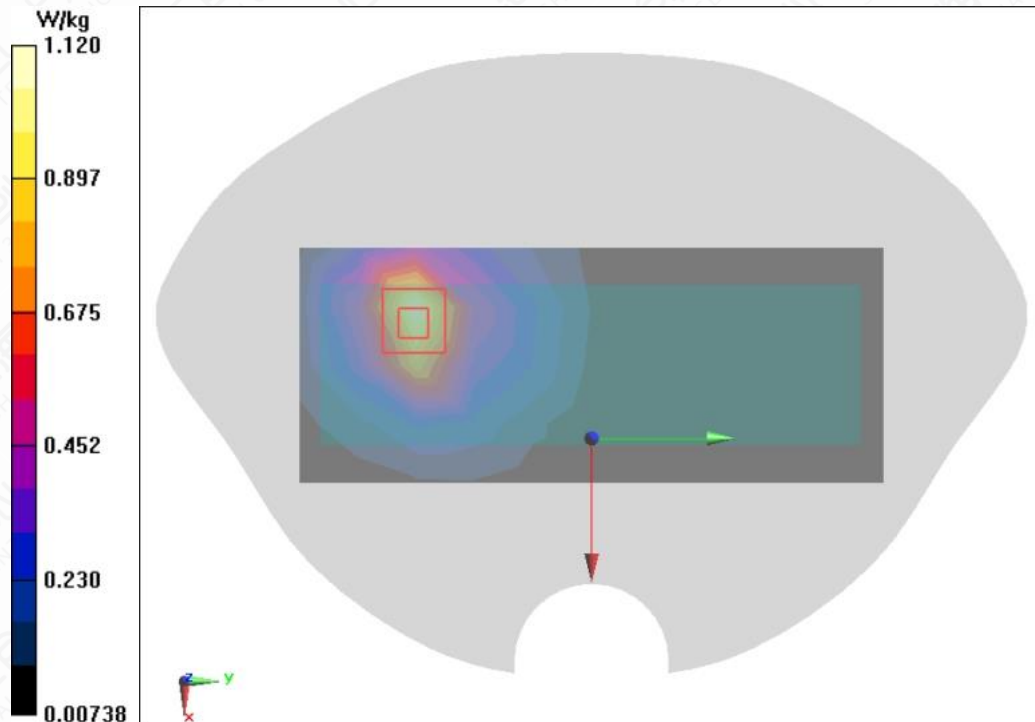


Figure A.1-16 LTE B7 20MHz 1RB 50offset Right Side Mode Middle 16mm

**LTE B7 20MHz 50RB Ooffset Right Side Mode Middle 0mm**

Date/Time: 2024/4/24

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2535 \text{ MHz}$ ;  $\sigma = 1.898 \text{ S/m}$ ;  $\epsilon_r = 38.791$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: LTE B7 2450MHz;      Frequency: 2535 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2535 MHz

**LTE B7 20MHz 50RB Ooffset Right Side Mode Middle 0mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

Maximum value of SAR (measured) = 1.82 W/kg

**LTE B7 20MHz 50RB Ooffset Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 3.021 V/m; Power Drift = 0.17 dB

Peak SAR (extrapolated) = 3.33 W/kg

SAR(1 g) = 1.51 W/kg; SAR(10 g) = 0.654 W/kg

Maximum of SAR (measured) = 2.41 W/kg

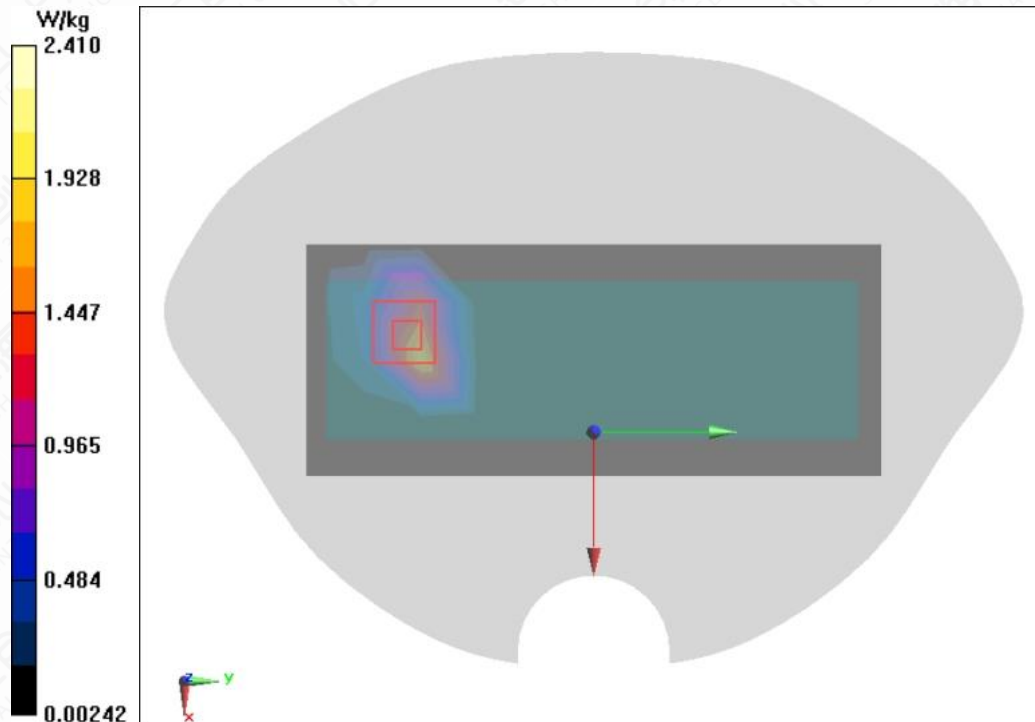


Figure A.1-17 LTE B7 20MHz 50RB Ooffset Right Side Mode Middle 0mm



**LTE B26 15MHz 1RB 38 Right Side Mode Middle 5mm**

Date/Time: 2024/4/17

Electronics: DAE4 Sn1581

Medium parameters used (interpolated):  $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.915 \text{ S/m}$ ;  $\epsilon_r = 41.515$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: LTE B26 900MHz;      Frequency:  $831.5 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @  $831.5 \text{ MHz}$

**LTE B26 15MHz 1RB 38 Right Side Mode Middle 5mm/Area Scan (5x11x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $0.445 \text{ W/kg}$

**LTE B26 15MHz 1RB 38 Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $13.99 \text{ V/m}$ ; Power Drift =  $-0.14 \text{ dB}$

Peak SAR (extrapolated) =  $0.867 \text{ W/kg}$

SAR(1 g) =  $0.455 \text{ W/kg}$ ; SAR(10 g) =  $0.253 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.716 \text{ W/kg}$

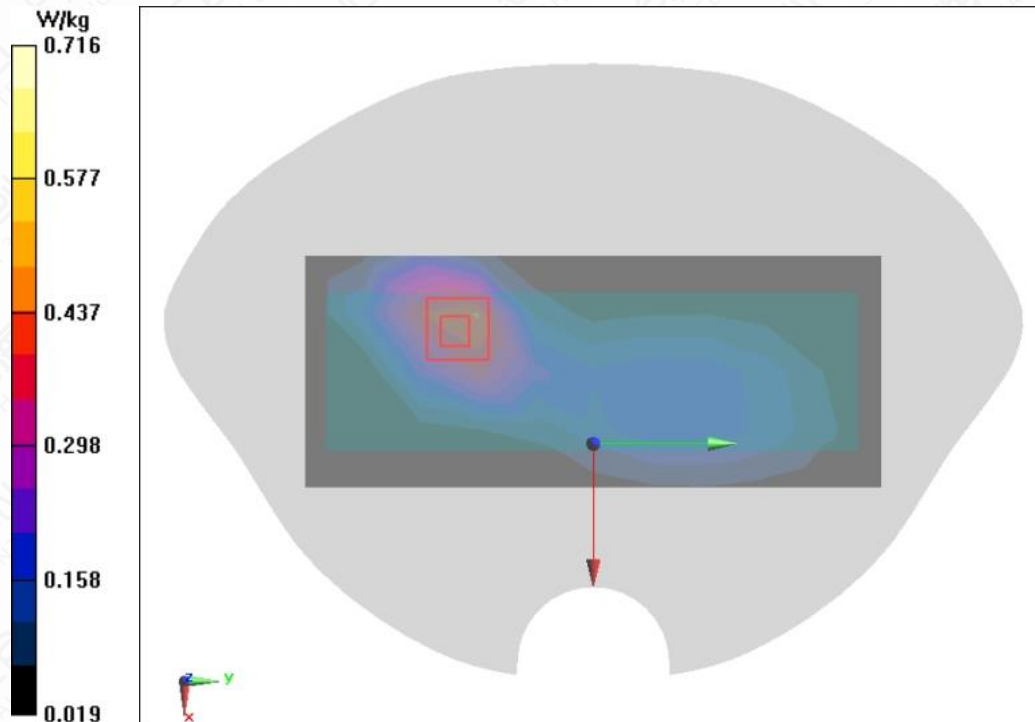


Figure A.1-18 LTE B26 15MHz 1RB 38 Right Side Mode Middle 5mm

**LTE B26 15MHz 36RB 0offset Right Side Mode Middle 0mm**

Date/Time: 2024/4/17

Electronics: DAE4 Sn1581

Medium parameters used (interpolated):  $f = 831.5 \text{ MHz}$ ;  $\sigma = 0.915 \text{ S/m}$ ;  $\epsilon_r = 41.515$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: LTE B26 900MHz;      Frequency:  $831.5 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @  $831.5 \text{ MHz}$

**LTE B26 15MHz 36RB 0offset Right Side Mode Middle 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $1.55 \text{ W/kg}$

**LTE B26 15MHz 36RB 0offset Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $11.34 \text{ V/m}$ ; Power Drift =  $0.10 \text{ dB}$

Peak SAR (extrapolated) =  $2.95 \text{ W/kg}$

SAR(1 g) =  $1.44 \text{ W/kg}$ ; SAR(10 g) =  $0.758 \text{ W/kg}$

Maximum of SAR (measured) =  $2.25 \text{ W/kg}$

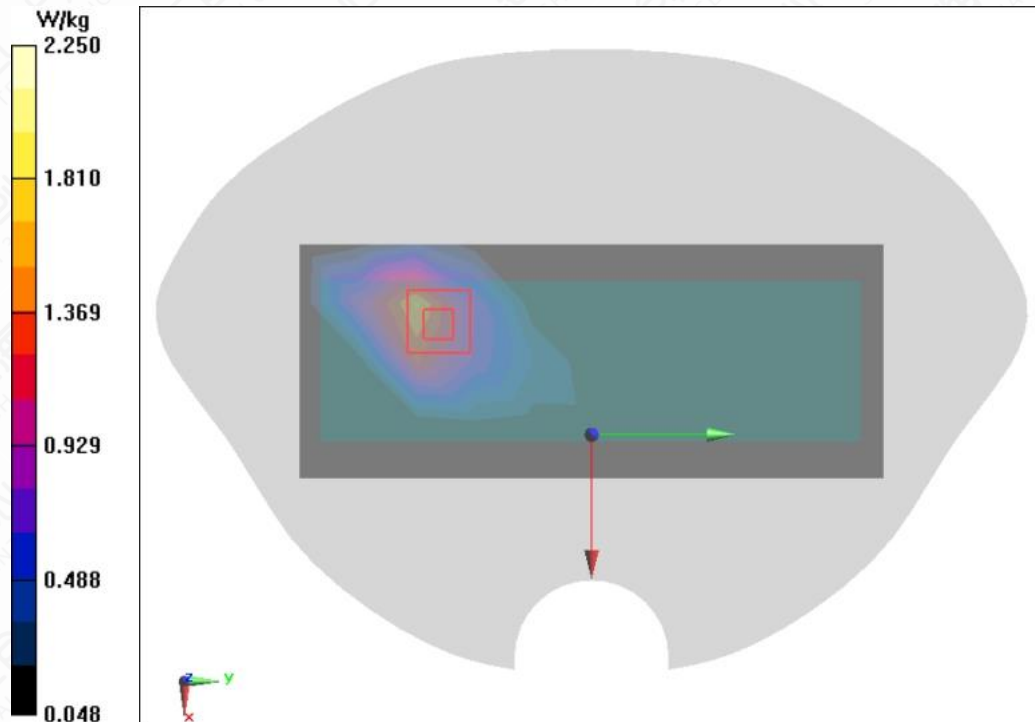


Figure A.1-19 LTE B26 15MHz 36RB 0offset Right Side Mode Middle 0mm

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 5mm**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2310 \text{ MHz}$ ;  $\sigma = 1.717 \text{ S/m}$ ;  $\epsilon_r = 39.176$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: LTE B40 2450MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2310 MHz

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

 Maximum value of SAR (measured) =  $0.604 \text{ W/kg}$ 
**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $3.580 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$ 

 Peak SAR (extrapolated) =  $0.825 \text{ W/kg}$ 

 SAR(1 g) =  $0.404 \text{ W/kg}$ ; SAR(10 g) =  $0.188 \text{ W/kg}$ 

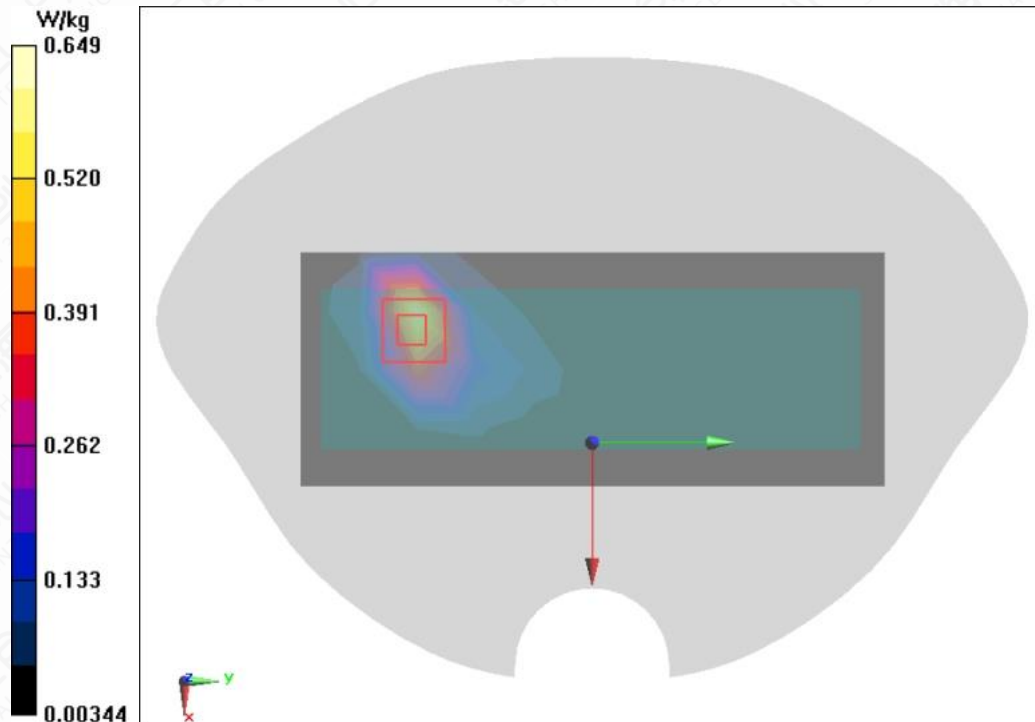
 Maximum value of SAR (measured) =  $0.649 \text{ W/kg}$ 


Figure A.1-20 LTE B40 10MHz 1RB 25offset Right Side Mode Middle 5mm

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2310 \text{ MHz}$ ;  $\sigma = 1.717 \text{ S/m}$ ;  $\epsilon_r = 39.176$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: LTE B40 2450MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2310 MHz

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $0.635 \text{ W/kg}$

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.739 \text{ V/m}$ ; Power Drift =  $0.06 \text{ dB}$

Peak SAR (extrapolated) =  $0.882 \text{ W/kg}$

SAR(1 g) =  $0.500 \text{ W/kg}$ ; SAR(10 g) =  $0.280 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.739 \text{ W/kg}$

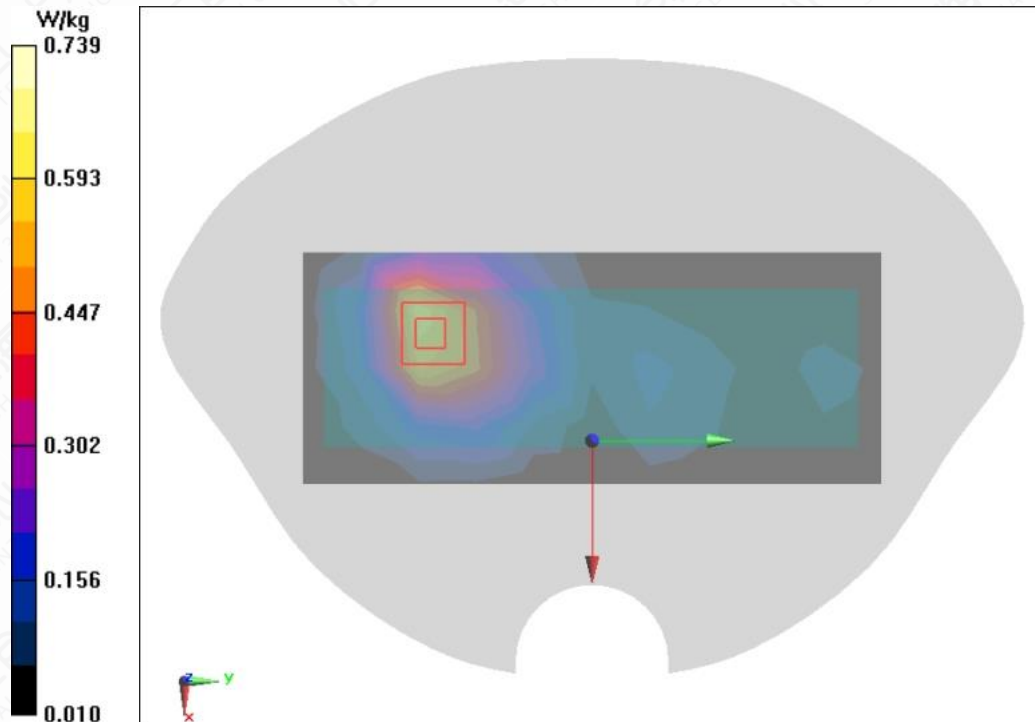


Figure A.1-21 LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 0mm**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2310 \text{ MHz}$ ;  $\sigma = 1.717 \text{ S/m}$ ;  $\epsilon_r = 39.176$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: LTE B40 2450MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2310 MHz

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $1.67 \text{ W/kg}$

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $4.721 \text{ V/m}$ ; Power Drift =  $-0.04 \text{ dB}$

Peak SAR (extrapolated) =  $2.41 \text{ W/kg}$

SAR(1 g) =  $1.07 \text{ W/kg}$ ; SAR(10 g) =  $0.448 \text{ W/kg}$

Maximum value of SAR (measured) =  $1.87 \text{ W/kg}$

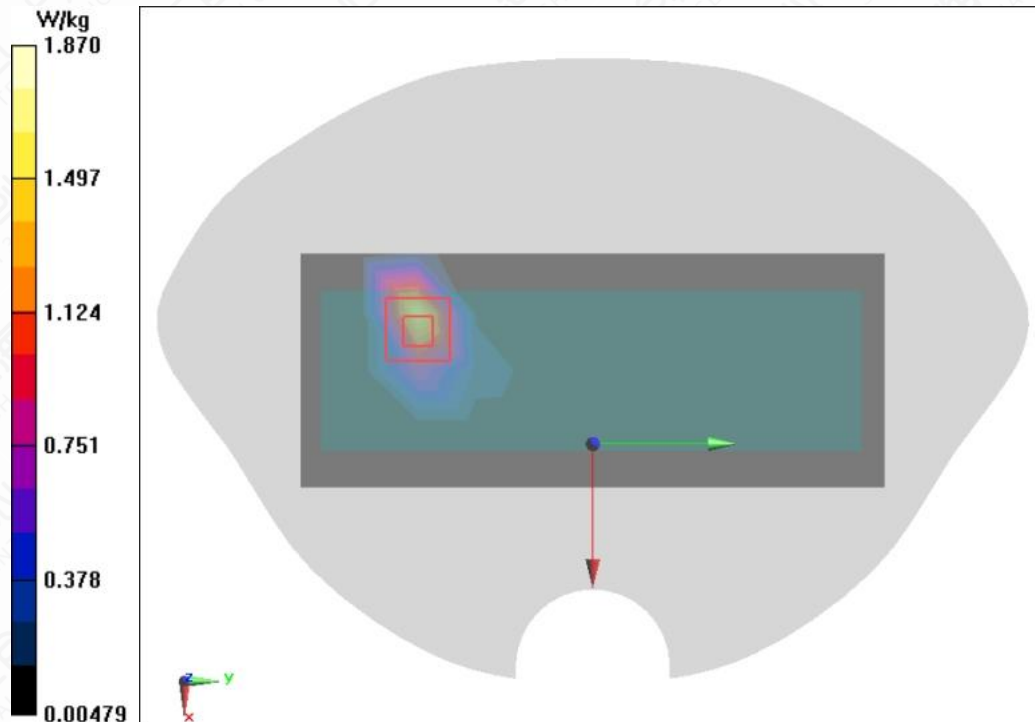


Figure A.1-22 LTE B40 10MHz 1RB 25offset Right Side Mode Middle 0mm

**LTE B40 10MHz 25RB 0offset Right Side Mode Middle 5mm**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2355 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.124$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: LTE B40 2450MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2355 MHz

**LTE B40 10MHz 25RB 0offset Right Side Mode Middle 5mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $0.663 \text{ W/kg}$

**LTE B40 10MHz 25RB 0offset Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $2.986 \text{ V/m}$ ; Power Drift =  $0.09 \text{ dB}$

Peak SAR (extrapolated) =  $0.952 \text{ W/kg}$

SAR(1 g) =  $0.457 \text{ W/kg}$ ; SAR(10 g) =  $0.210 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.738 \text{ W/kg}$

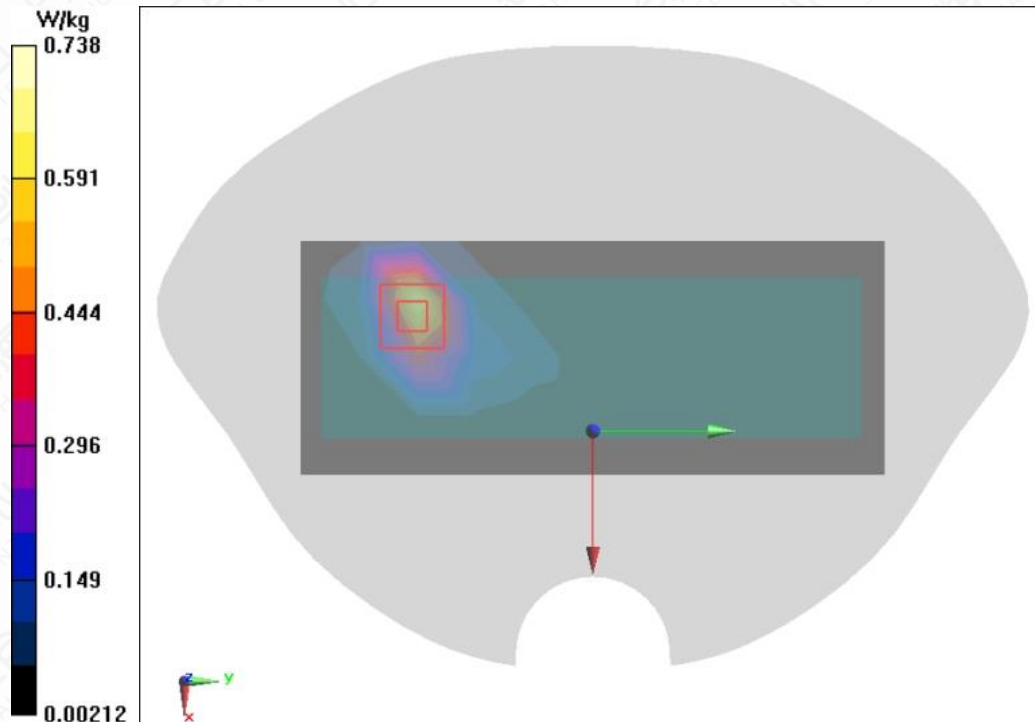


Figure A.1-23 LTE B40 10MHz 25RB 0offset Right Side Mode Middle 5mm

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

Medium: Head 2450MHz

Medium parameters used:  $f = 2355 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.124$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: LTE B40 2450MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2355 MHz

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $0.644 \text{ W/kg}$

**LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $6.946 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$

Peak SAR (extrapolated) =  $0.901 \text{ W/kg}$

SAR(1 g) =  $0.502 \text{ W/kg}$ ; SAR(10 g) =  $0.278 \text{ W/kg}$

Maximum value of SAR (measured) =  $0.749 \text{ W/kg}$

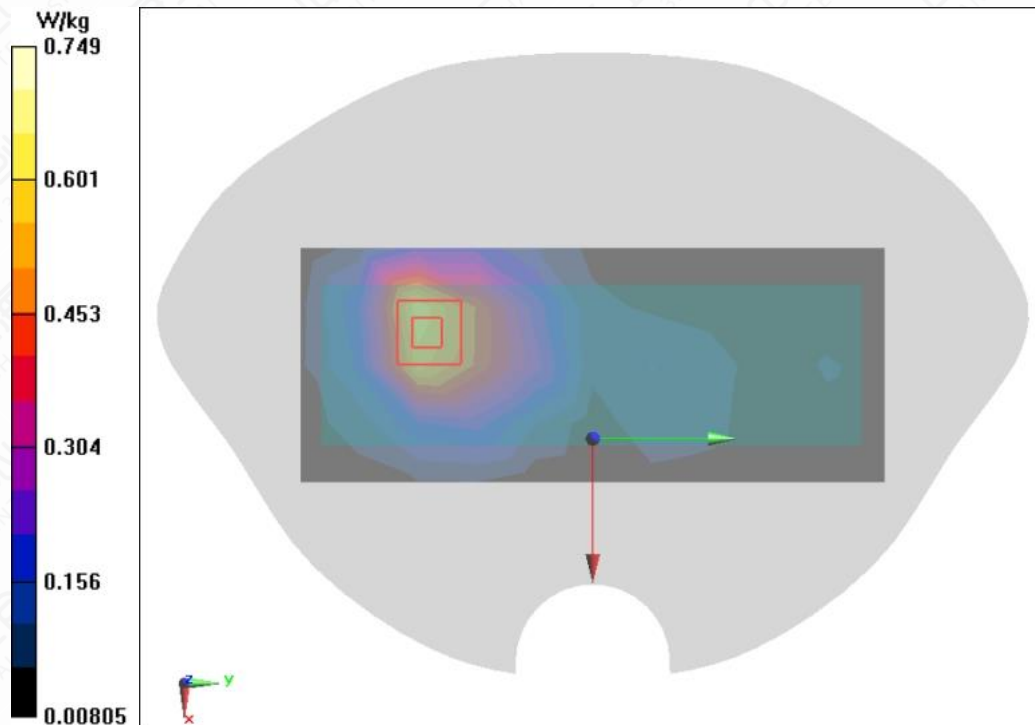


Figure A.1-24 LTE B40 10MHz 1RB 25offset Right Side Mode Middle 16mm

**LTE B40 10MHz 25RB 0offset Right Side Mode Middle 0mm**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2355 \text{ MHz}$ ;  $\sigma = 1.752 \text{ S/m}$ ;  $\epsilon_r = 39.124$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: LTE B40 2450MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2355 MHz

**LTE B40 10MHz 25RB 0offset Right Side Mode Middle 0mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

 Maximum value of SAR (measured) =  $1.23 \text{ W/kg}$ 
**LTE B40 10MHz 25RB 0offset Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $4.903 \text{ V/m}$ ; Power Drift =  $0.05 \text{ dB}$ 

 Peak SAR (extrapolated) =  $2.42 \text{ W/kg}$ 

 SAR(1 g) =  $1.08 \text{ W/kg}$ ; SAR(10 g) =  $0.457 \text{ W/kg}$ 

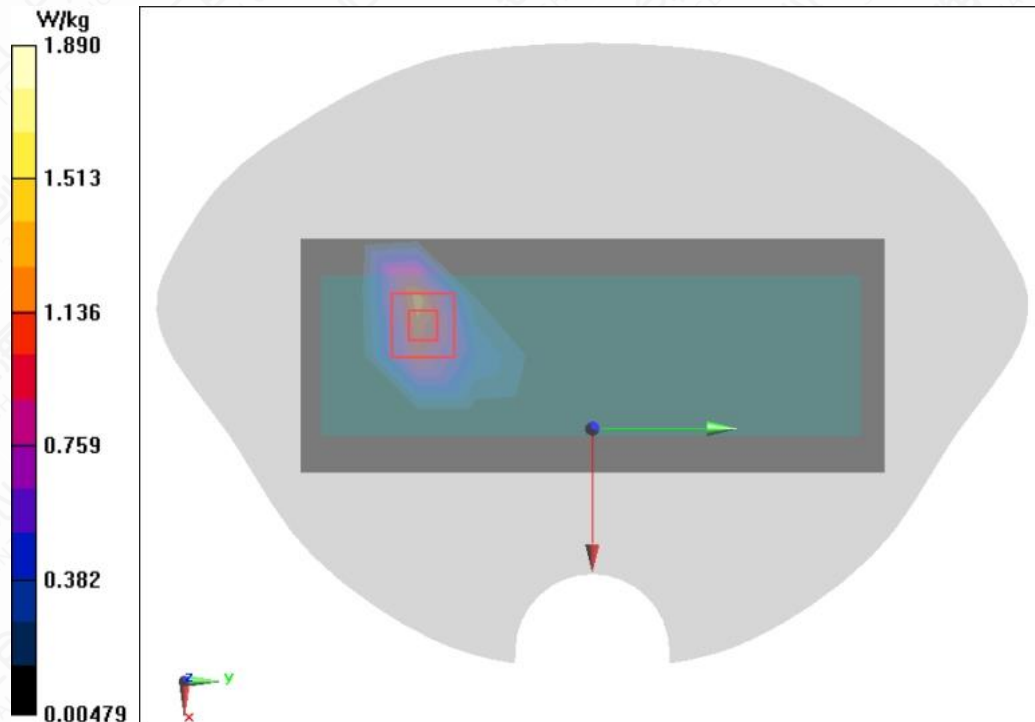
 Maximum of SAR (measured) =  $1.89 \text{ W/kg}$ 


Figure A.1-25 LTE B40 10MHz 25RB 0offset Right Side Mode Middle 0mm



**LTE B41 20MHz 1RB 50offset Right Side Mode Middle 5mm**

Date/Time: 2024/4/24

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 1.947 \text{ S/m}$ ;  $\epsilon_r = 38.674$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.3^\circ\text{C}$

Communication System: LTE B41 2450MHz;      Frequency: 2593 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(7.85, 7.85, 7.85) @ 2593 MHz

**LTE B41 20MHz 1RB 50offset Right Side Mode Middle 5mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 0.693 W/kg

**LTE B41 20MHz 1RB 50offset Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 2.166 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.47 W/kg

SAR(1 g) = 0.545 W/kg; SAR(10 g) = 0.223 W/kg

Maximum of SAR (measured) = 0.711 W/kg

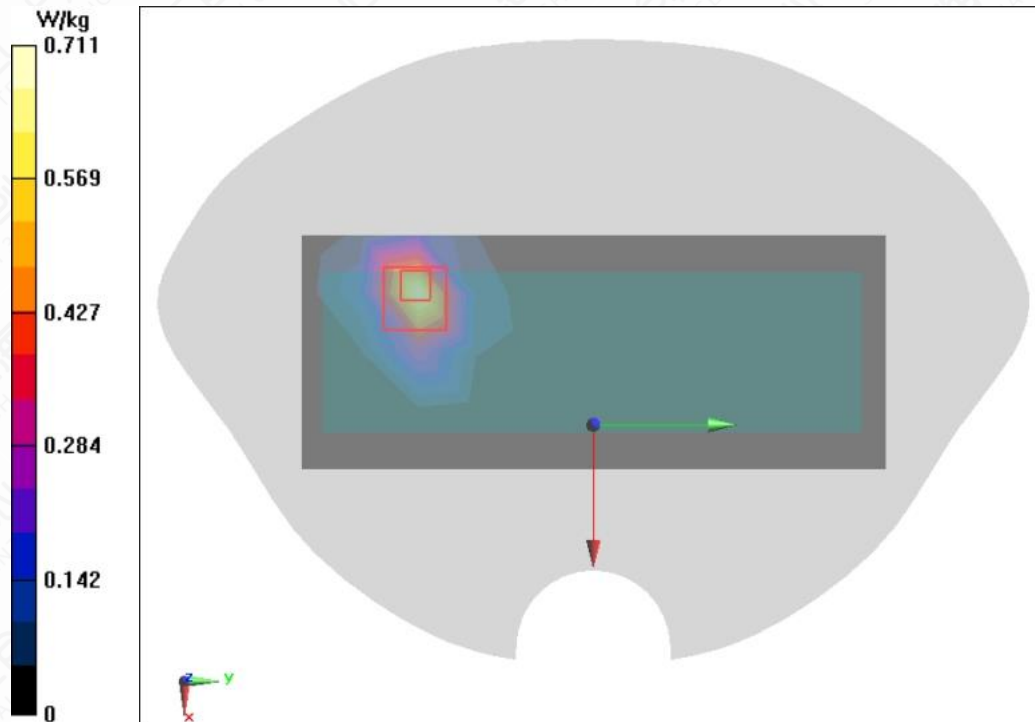


Figure A.1-26 LTE B41 20MHz 1RB 50offset Right Side Mode Middle 5mm

**LTE B41 20MHz 1RB 50offset Right Side Mode Middle 0mm**

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2593 \text{ MHz}$ ;  $\sigma = 1.931 \text{ S/m}$ ;  $\epsilon_r = 38.301$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: LTE B41 2450MHz;    Frequency: 2593 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(7.85, 7.85, 7.85) @ 2593 MHz

**LTE B41 20MHz 1RB 50offset Right Side Mode Middle 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) = 1.28 W/kg

**LTE B41 20MHz 1RB 50offset Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 4.598 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 2.69 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.503 W/kg

Maximum value of SAR (measured) = 2.17 W/kg

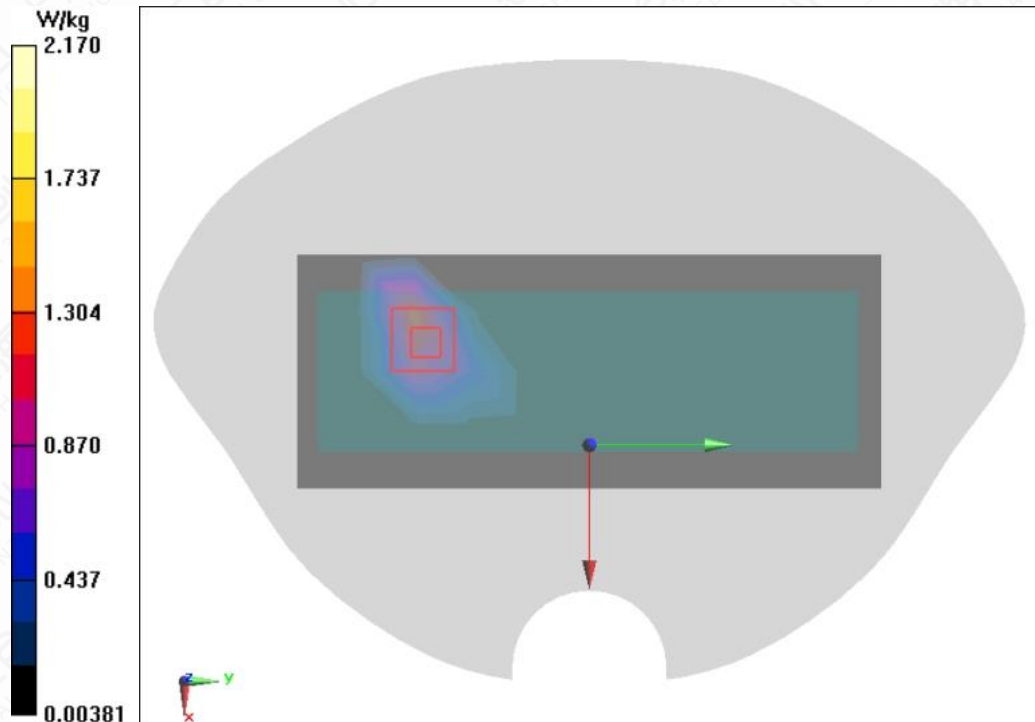


Figure A.1-27 LTE B41 20MHz 1RB 50offset Right Side Mode Middle 0mm

**Wi-Fi 2.4G 802.11b Right Side Mode Middle 5mm**

Date/Time: 2024/4/18

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.833 \text{ S/m}$ ;  $\epsilon_r = 40.225$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.3^\circ\text{C}$ 

Communication System: WLAN 2450 2450MHz;      Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2437 MHz

**Wi-Fi 2.4G 802.11b Right Side Mode Middle 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

 Maximum value of SAR (measured) =  $1.01 \text{ W/kg}$ 
**Wi-Fi 2.4G 802.11b Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $12.38 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$ 

 Peak SAR (extrapolated) =  $1.23 \text{ W/kg}$ 

 SAR(1 g) =  $0.535 \text{ W/kg}$ ; SAR(10 g) =  $0.237 \text{ W/kg}$ 

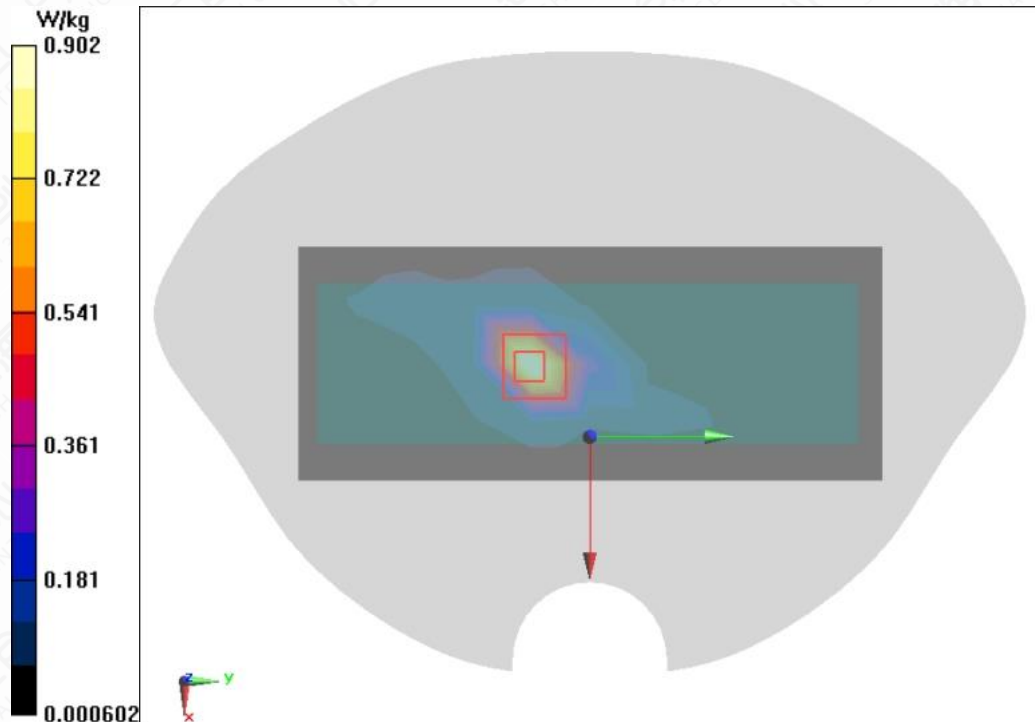
 Maximum value of SAR (measured) =  $0.902 \text{ W/kg}$ 


Figure A.1-28 Wi-Fi 2.4G 802.11b Right Side Mode Middle 5mm

**Wi-Fi 2.4G 802.11b Right Side Mode Middle 0mm**

Date/Time: 2024/4/18

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2437 \text{ MHz}$ ;  $\sigma = 1.843 \text{ S/m}$ ;  $\epsilon_r = 40.225$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.3^\circ\text{C}$

Communication System: WLAN 2450 2450MHz;      Frequency: 2437 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2437 MHz

**Wi-Fi 2.4G 802.11b Right Side Mode Middle 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $1.31 \text{ W/kg}$

**Wi-Fi 2.4G 802.11b Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $14.97 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$

Peak SAR (extrapolated) =  $1.87 \text{ W/kg}$

SAR(1 g) =  $0.665 \text{ W/kg}$ ; SAR(10 g) =  $0.290 \text{ W/kg}$

Maximum of SAR (measured) =  $1.31 \text{ W/kg}$

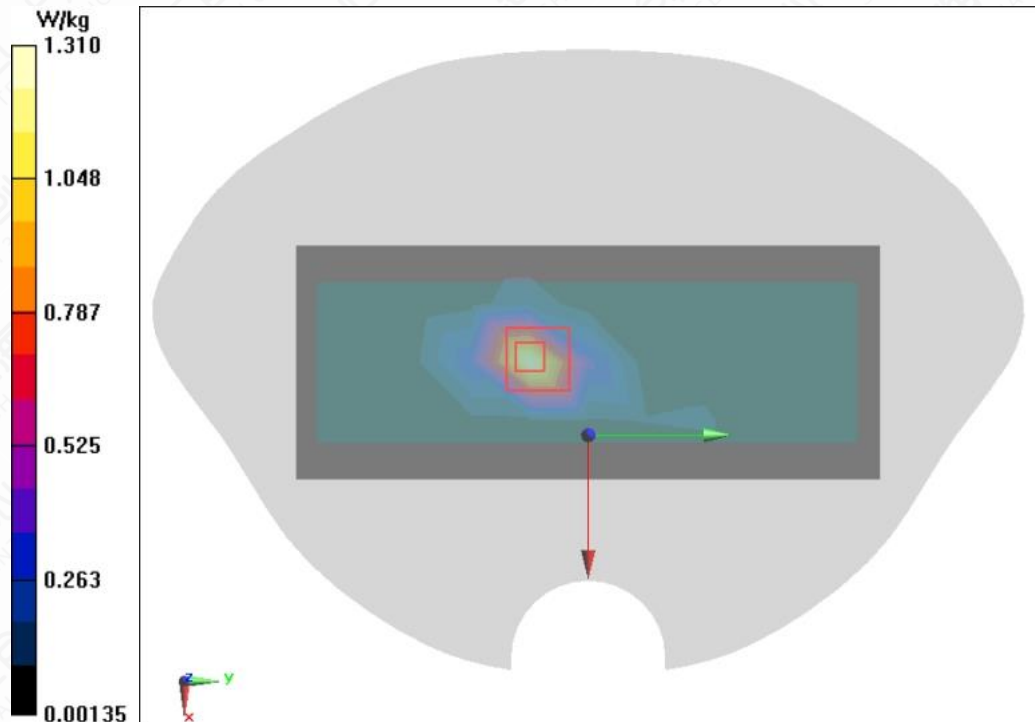


Figure A.1-29 Wi-Fi 2.4G 802.11b Right Side Mode Middle 0mm

**Wi-Fi 5G U-NII-1 802.11a Right Side Mode Low 5mm**

Date/Time: 2024/5/6

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.649 \text{ S/m}$ ;  $\epsilon_r = 35.302$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: 5G-U-NII-1 5GHz;      Frequency: 5180 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.75, 5.75, 5.75) @ 5180 MHz

**Wi-Fi 5G U-NII-1 802.11a Right Side Mode Low 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

 Maximum value of SAR (measured) =  $0.198 \text{ W/kg}$ 
**Wi-Fi 5G U-NII-1 802.11a Right Side Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

 Reference Value =  $1.637 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$ 

 Peak SAR (extrapolated) =  $0.566 \text{ W/kg}$ 

 SAR(1 g) =  $0.130 \text{ W/kg}$ ; SAR(10 g) =  $0.043 \text{ W/kg}$ 

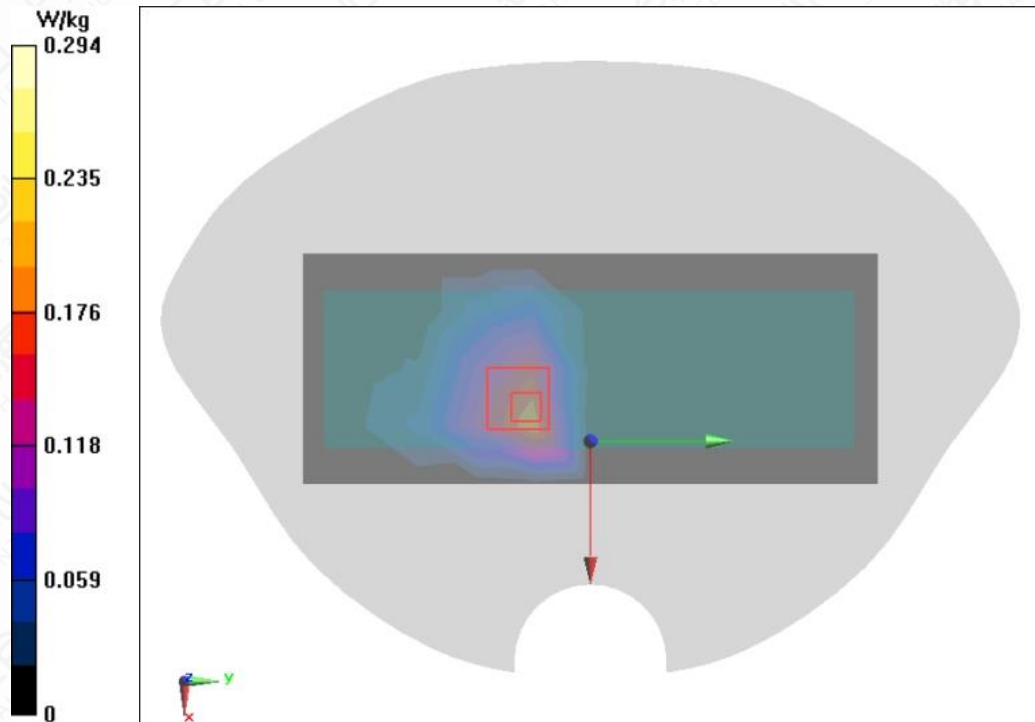
 Maximum of SAR (measured) =  $0.294 \text{ W/kg}$ 


Figure A.1-30 Wi-Fi 5G U-NII-1 802.11a Right Side Mode Low 5mm

**Wi-Fi 5G U-NII-1 802.11a Right Side Mode low 0mm**

Date/Time: 2024/5/6

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5180 \text{ MHz}$ ;  $\sigma = 4.649 \text{ S/m}$ ;  $\epsilon_r = 35.302$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: 5G-U-NII-1 5GHz;      Frequency: 5180 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.75, 5.75, 5.75) @ 5180 MHz

**Wi-Fi 5G U-NII-1 802.11a Right Side Mode low 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.730 \text{ W/kg}$

**Wi-Fi 5G U-NII-1 802.11a Right Side Mode low 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $0.8260 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$

Peak SAR (extrapolated) =  $2.71 \text{ W/kg}$

SAR(1 g) =  $0.536 \text{ W/kg}$ ; SAR(10 g) =  $0.135 \text{ W/kg}$

Maximum of SAR (measured) =  $1.40 \text{ W/kg}$

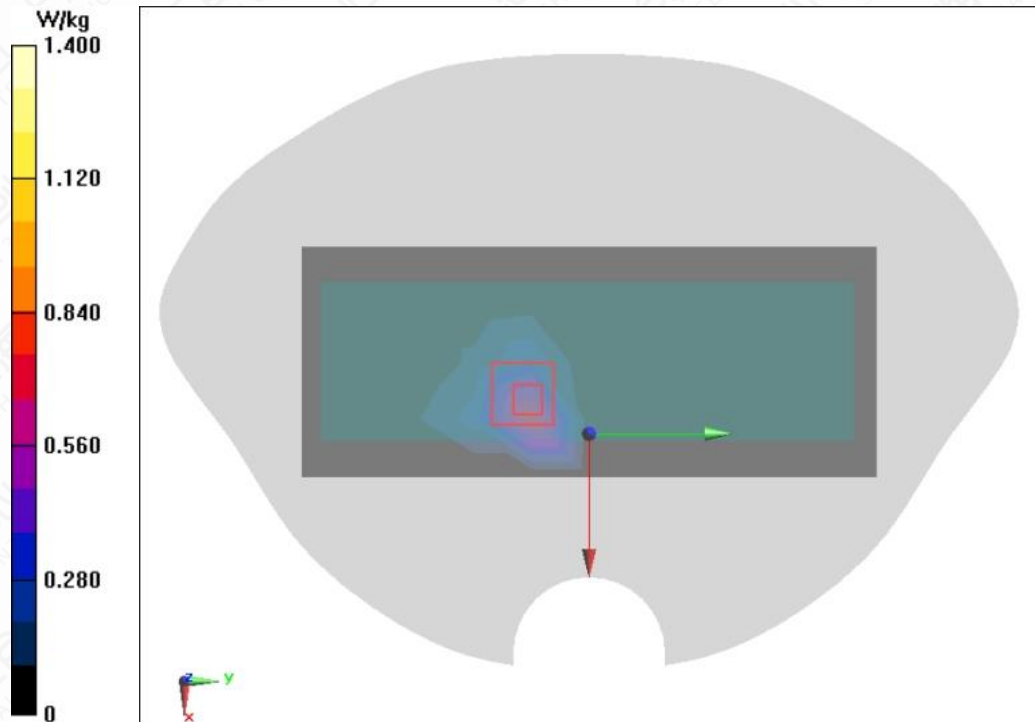


Figure A.1-31 Wi-Fi 5G U-NII-1 802.11a Right Side Mode low 0mm

**Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 5mm**

Date/Time: 2024/5/6

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 5320 \text{ MHz}$ ;  $\sigma = 4.804 \text{ S/m}$ ;  $\epsilon_r = 35.012$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: 5G-U-NII-2A 5GHz;      Frequency: 5320 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.75, 5.75, 5.75) @ 5320 MHz

**Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

 Maximum value of SAR (measured) =  $0.326 \text{ W/kg}$ 
**Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

 Reference Value =  $2.749 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$ 

 Peak SAR (extrapolated) =  $0.889 \text{ W/kg}$ 

 SAR(1 g) =  $0.221 \text{ W/kg}$ ; SAR(10 g) =  $0.064 \text{ W/kg}$ 

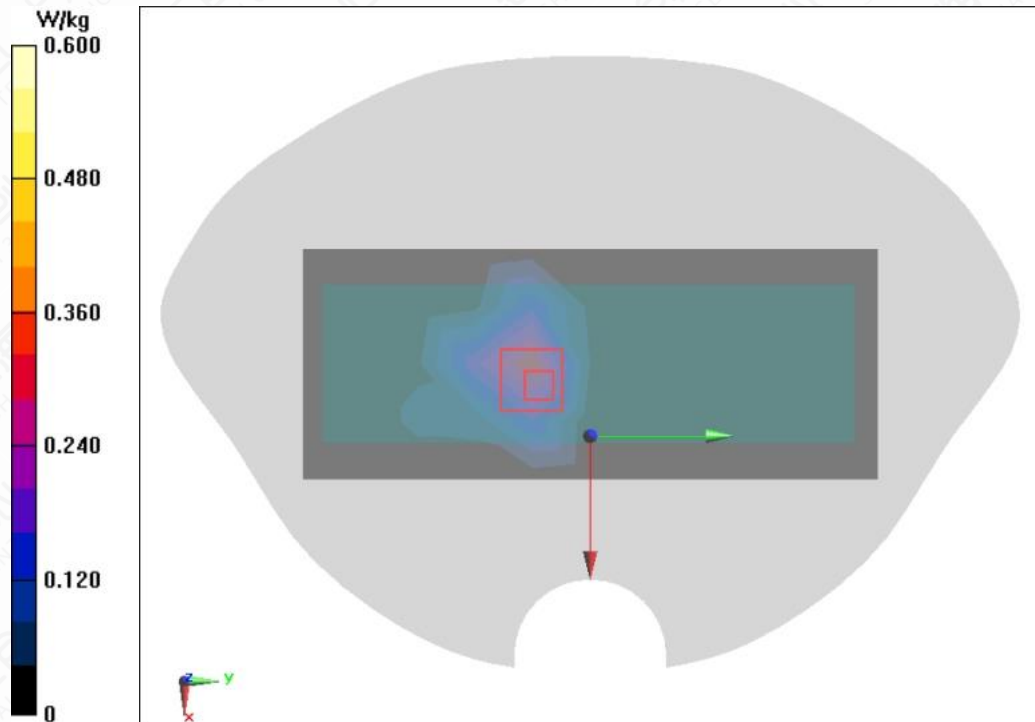
 Maximum of SAR (measured) =  $0.600 \text{ W/kg}$ 


Figure A.1-32 Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 5mm

**Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 0mm**

Date/Time: 2024/5/6

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5320 \text{ MHz}$ ;  $\sigma = 4.804 \text{ S/m}$ ;  $\epsilon_r = 35.012$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: 5G-U-NII-2A 5GHz;      Frequency:  $5320 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.75, 5.75, 5.75) @  $5320 \text{ MHz}$

**Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.918 \text{ W/kg}$

**Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $2.298 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$

Peak SAR (extrapolated) =  $3.43 \text{ W/kg}$

SAR(1 g) =  $0.739 \text{ W/kg}$ ; SAR(10 g) =  $0.179 \text{ W/kg}$

Maximum of SAR (measured) =  $2.04 \text{ W/kg}$

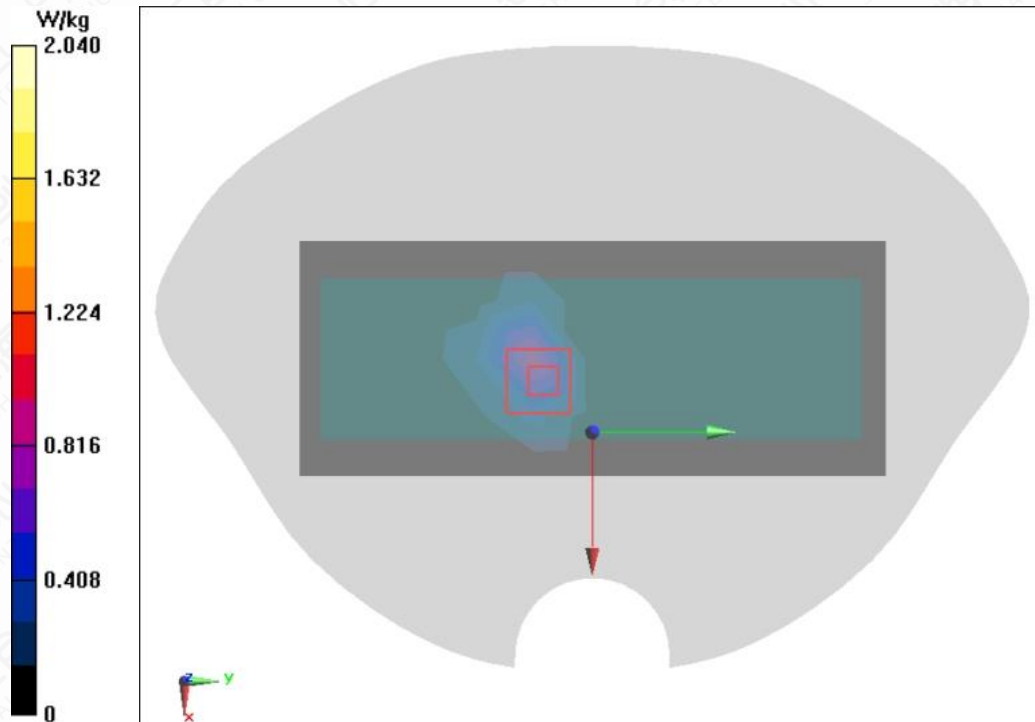


Figure A.1-33 Wi-Fi 5G U-NII-2A 802.11a Right Side Mode High 0mm



**Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 5mm**

Date/Time: 2024/4/19

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5700 \text{ MHz}$ ;  $\sigma = 5.241 \text{ S/m}$ ;  $\epsilon_r = 34.217$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: 5G-U-NII-2C 5GHz;      Frequency:  $5700 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.1, 5.1, 5.1) @  $5700 \text{ MHz}$

**Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 5mm/Area Scan (5x11x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $0.627 \text{ W/kg}$

**Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 5mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $0 \text{ V/m}$ ; Power Drift =  $0.00 \text{ dB}$

Peak SAR (extrapolated) =  $1.28 \text{ W/kg}$

SAR(1 g) =  $0.352 \text{ W/kg}$ ; SAR(10 g) =  $0.109 \text{ W/kg}$

Maximum of SAR (measured) =  $0.863 \text{ W/kg}$

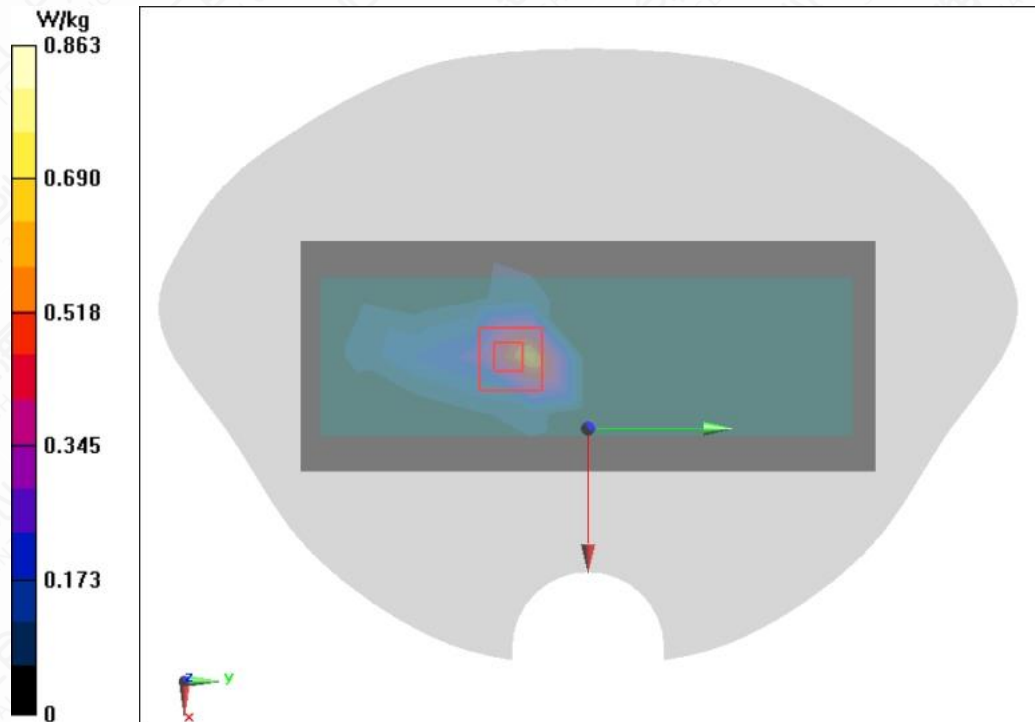


Figure A.1-34 Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 5mm

**Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 0mm**

Date/Time: 2024/4/19

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5700 \text{ MHz}$ ;  $\sigma = 5.241 \text{ S/m}$ ;  $\epsilon_r = 34.217$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: 5G-U-NII-2C 5GHz;      Frequency:  $5700 \text{ MHz}$ ; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.1, 5.1, 5.1) @  $5700 \text{ MHz}$

**Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 0mm/Area Scan (5x11x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $2.57 \text{ W/kg}$

**Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 0mm/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $1.872 \text{ V/m}$ ; Power Drift =  $0.04 \text{ dB}$

Peak SAR (extrapolated) =  $4.39 \text{ W/kg}$

SAR(1 g) =  $0.899 \text{ W/kg}$ ; SAR(10 g) =  $0.236 \text{ W/kg}$

Maximum of SAR (measured) =  $2.44 \text{ W/kg}$

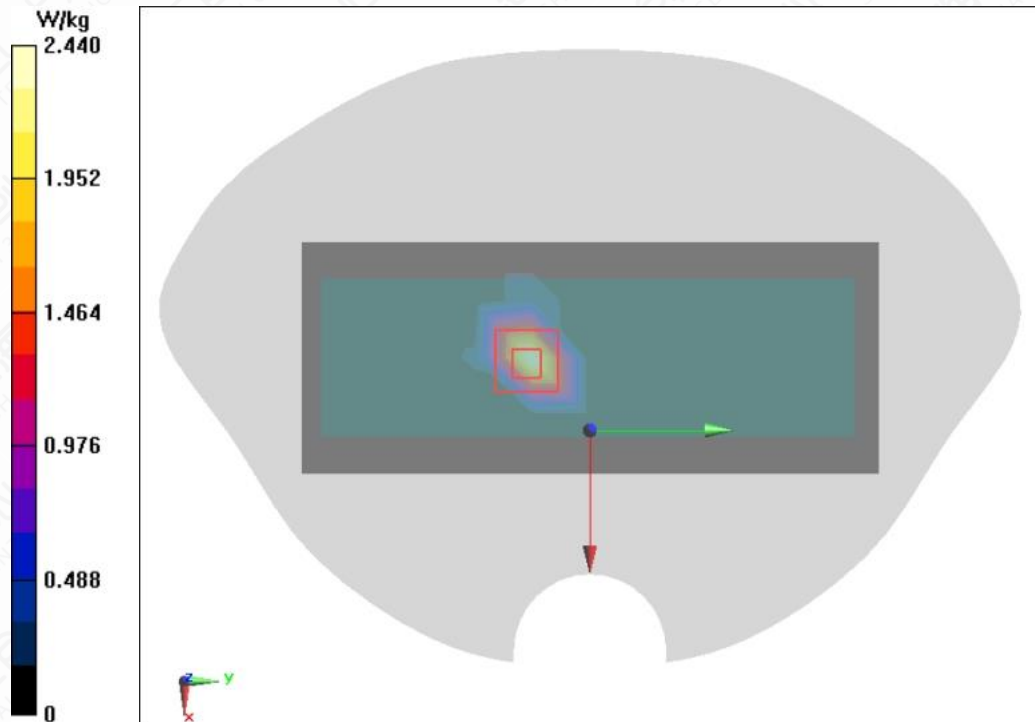


Figure A.1-35 Wi-Fi 5G U-NII-2C 802.11a Right Side Mode High 0mm

**Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 5mm**

Date/Time: 2024/4/19

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 5.299 \text{ S/m}$ ;  $\epsilon_r = 34.133$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.3^\circ\text{C}$     Liquid Temperature:  $20.2^\circ\text{C}$ 

Communication System: 5G-U-NII-3 5GHz;    Frequency: 5745 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.25, 5.25, 5.25) @ 5745 MHz

**Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

 Maximum value of SAR (measured) =  $0.473 \text{ W/kg}$ 
**Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

 Reference Value =  $4.476 \text{ V/m}$ ; Power Drift =  $-0.03 \text{ dB}$ 

 Peak SAR (extrapolated) =  $1.71 \text{ W/kg}$ 

 SAR(1 g) =  $0.418 \text{ W/kg}$ ; SAR(10 g) =  $0.126 \text{ W/kg}$ 

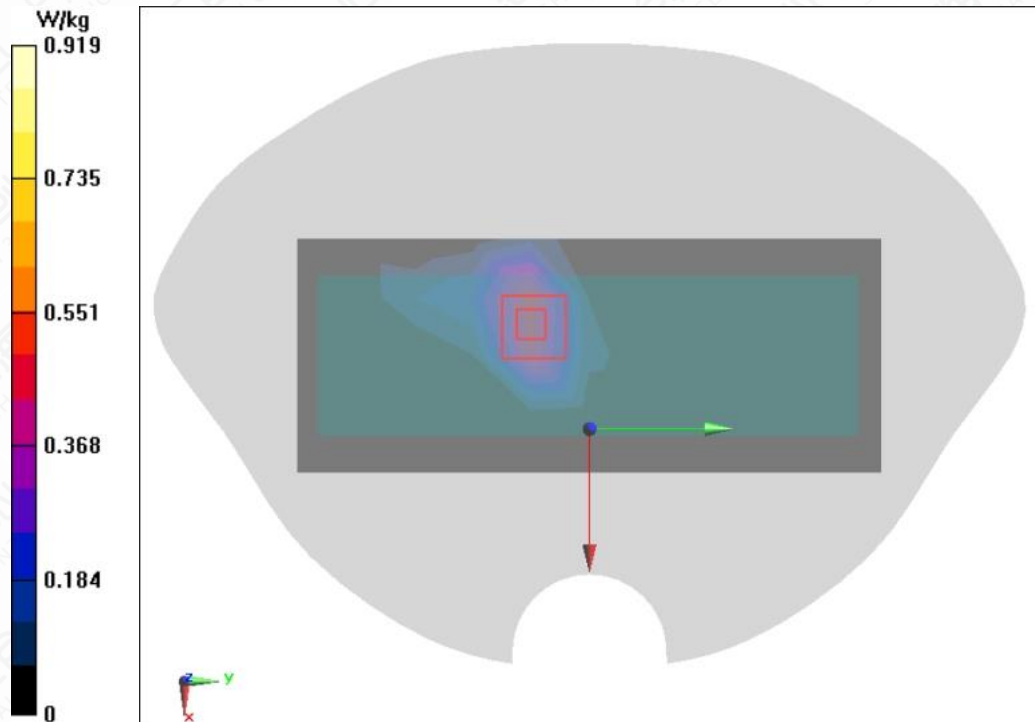
 Maximum of SAR (measured) =  $0.919 \text{ W/kg}$ 


Figure A.1-36 Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 5mm

**Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 0mm**

Date/Time: 2024/4/19

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 5745 \text{ MHz}$ ;  $\sigma = 5.299 \text{ S/m}$ ;  $\epsilon_r = 34.133$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.3^\circ\text{C}$     Liquid Temperature:  $20.2^\circ\text{C}$ 

Communication System: 5G-U-NII-3 5GHz;    Frequency: 5745 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.25, 5.25, 5.25) @ 5745 MHz

**Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 0mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

 Maximum value of SAR (measured) =  $0.793 \text{ W/kg}$ 
**Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

 Reference Value =  $5.944 \text{ V/m}$ ; Power Drift =  $0.11 \text{ dB}$ 

 Peak SAR (extrapolated) =  $5.64 \text{ W/kg}$ 

 SAR(1 g) =  $1.08 \text{ W/kg}$ ; SAR(10 g) =  $0.261 \text{ W/kg}$ 

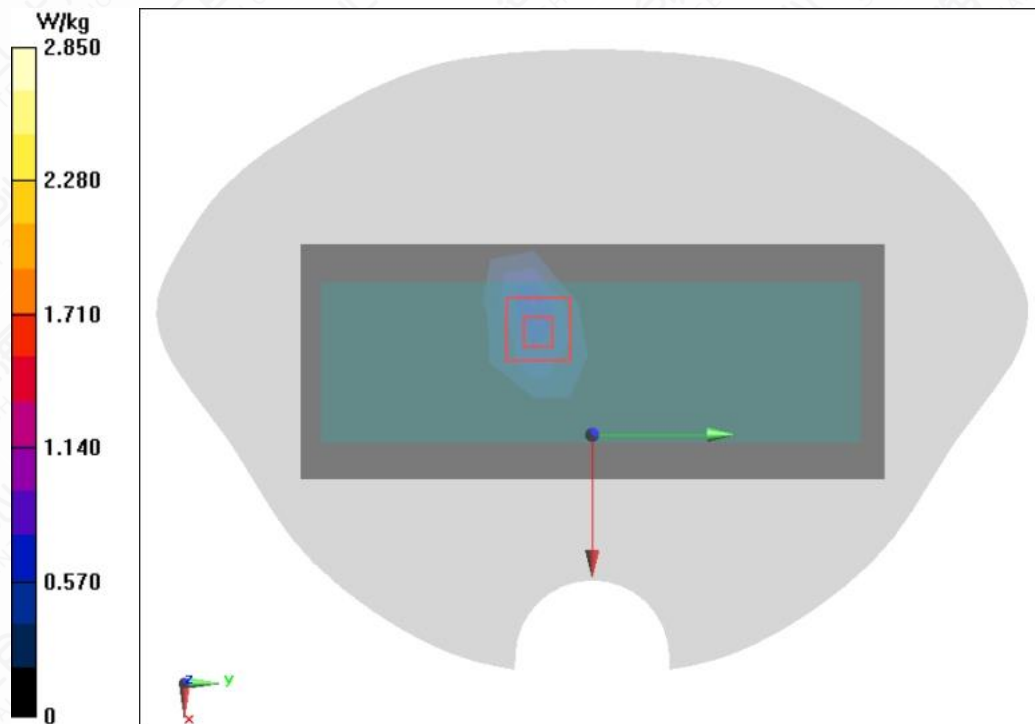
 Maximum of SAR (measured) =  $2.85 \text{ W/kg}$ 


Figure A.1-37 Wi-Fi 5G U-NII-3 802.11a Right Side Mode Low 0mm

**BT DH5 Right Side Mode Middle 5mm**

Date/Time: 2024/4/18

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2480 \text{ MHz}$ ;  $\sigma = 1.877 \text{ S/m}$ ;  $\epsilon_r = 40.155$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$ 

Communication System: Bluetooth 2450MHz;      Frequency: 2480 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2480 MHz

**BT DH5 Right Side Mode Middle 5mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

 Maximum value of SAR (measured) =  $0.108 \text{ W/kg}$ 
**BT DH5 Right Side Mode Middle 5mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

 Reference Value =  $3.561 \text{ V/m}$ ; Power Drift =  $0.02 \text{ dB}$ 

 Peak SAR (extrapolated) =  $0.218 \text{ W/kg}$ 

 SAR(1 g) =  $0.092 \text{ W/kg}$ ; SAR(10 g) =  $0.041 \text{ W/kg}$ 

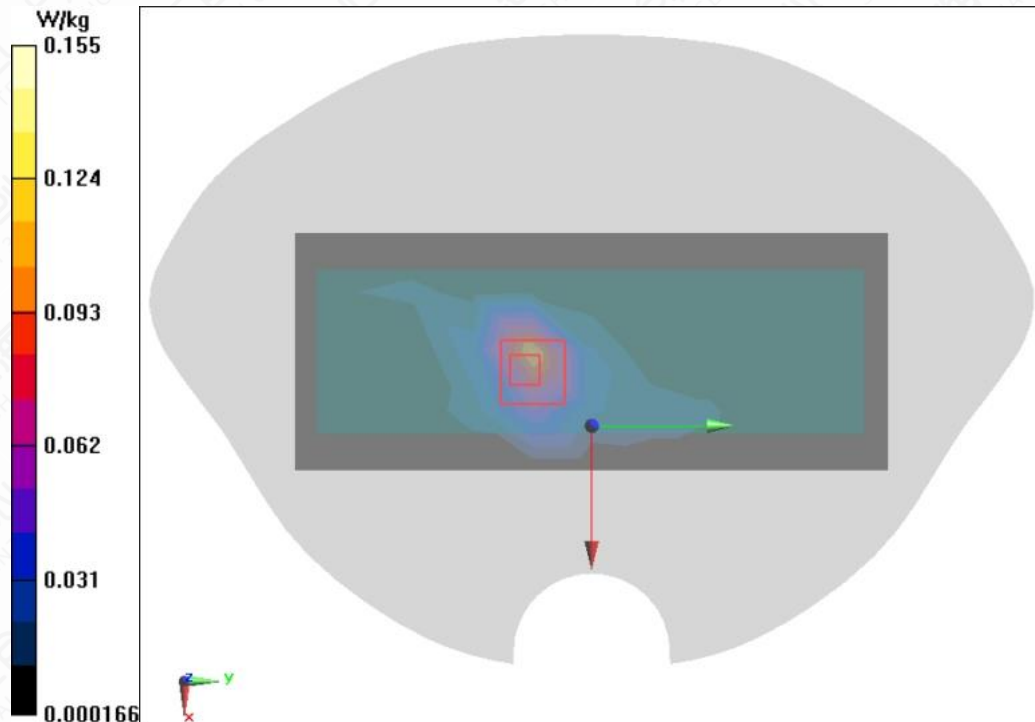
 Maximum value of SAR (measured) =  $0.155 \text{ W/kg}$ 


Figure A.1-38 BT DH5 Right Side Mode Middle 5mm

**BT DH5 Right Side Mode Middle 0mm**

Date/Time: 2024/4/18

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2480 \text{ MHz}$ ;  $\sigma = 1.877 \text{ S/m}$ ;  $\epsilon_r = 40.155$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.3^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$ 

Communication System: Bluetooth 2450MHz;      Frequency: 2480 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2480 MHz

**BT DH5 Right Side Mode Middle 0mm/Area Scan (5x11x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

 Maximum value of SAR (measured) =  $0.122 \text{ W/kg}$ 
**BT DH5 Right Side Mode Middle 0mm/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

 Reference Value =  $2.729 \text{ V/m}$ ; Power Drift =  $0.03 \text{ dB}$ 

 Peak SAR (extrapolated) =  $0.321 \text{ W/kg}$ 

 SAR(1 g) =  $0.109 \text{ W/kg}$ ; SAR(10 g) =  $0.046 \text{ W/kg}$ 

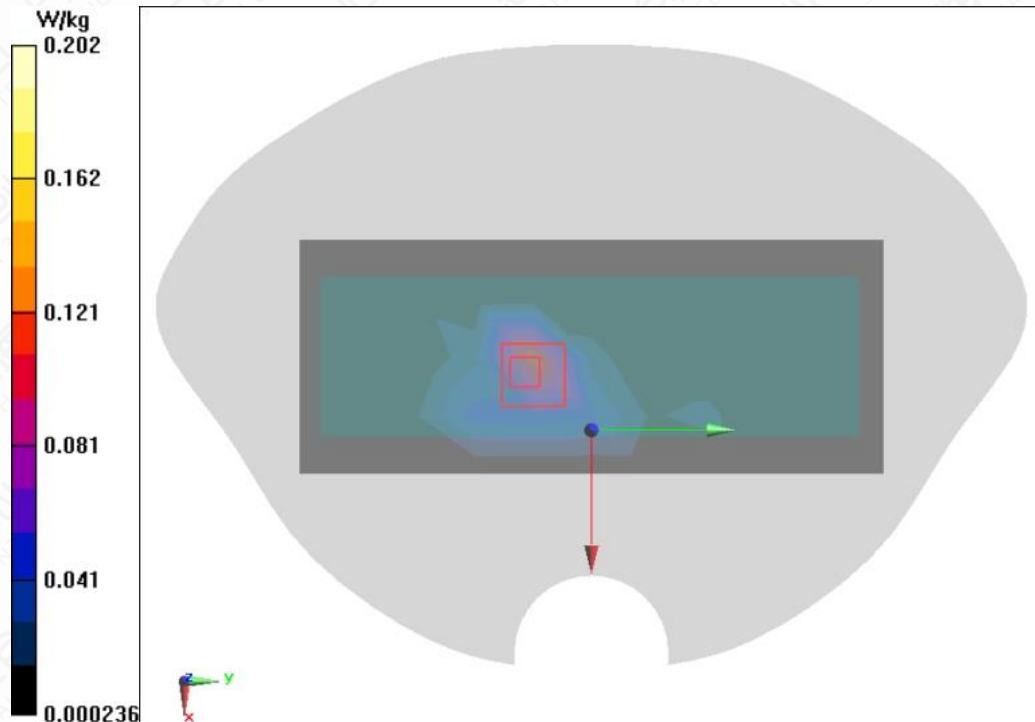
 Maximum of SAR (measured) =  $0.202 \text{ W/kg}$ 


Figure A.1-39 BT DH5 Right Side Mode Middle 0mm

## A.2 System Check Graph Results

### System Check 835MHz

Date/Time: 2024/4/17

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.916 \text{ S/m}$ ;  $\epsilon_r = 41.515$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$

Communication System: CW 900MHz;    Frequency: 835 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @ 835 MHz

### System Check 835MHz/Area Scan (7x13x1):

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $3.01 \text{ W/kg}$

### System Check 835MHz/Zoom Scan (7x7x7) (5x5x7)/Cube 0:

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $61.81 \text{ V/m}$ ; Power Drift =  $0.00 \text{ dB}$

Peak SAR (extrapolated) =  $3.93 \text{ W/kg}$

SAR(1 g) =  $2.46 \text{ W/kg}$ ; SAR(10 g) =  $1.59 \text{ W/kg}$

Maximum value of SAR (measured) =  $3.41 \text{ W/kg}$

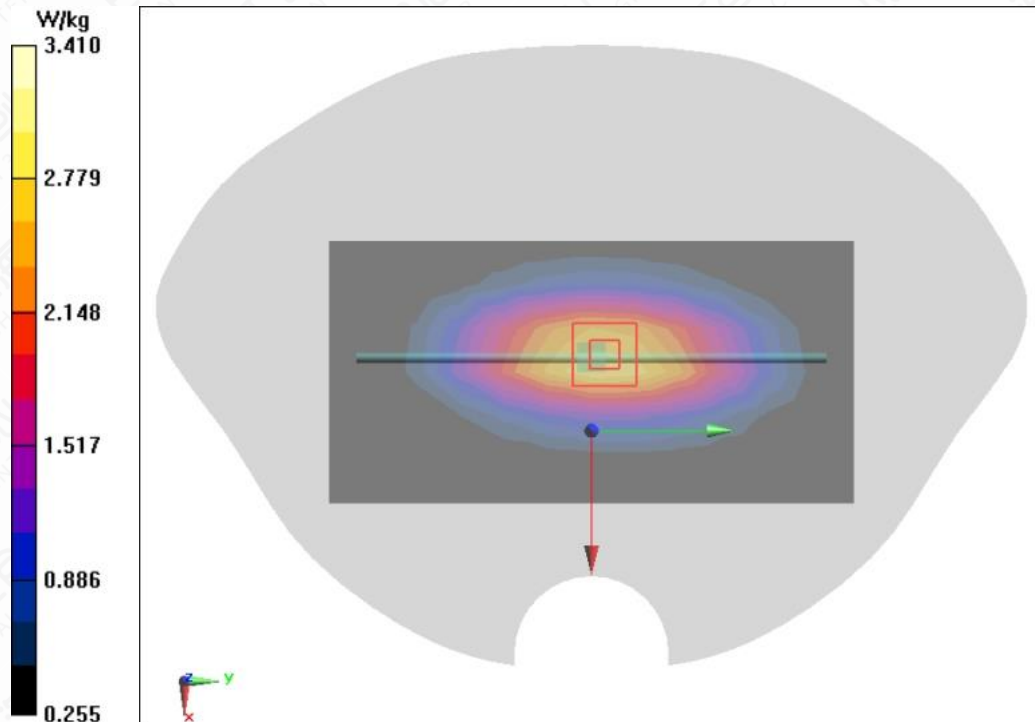


Figure A.2-1 System Check 835MHz

**System Check 835MHz**

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 835 \text{ MHz}$ ;  $\sigma = 0.91 \text{ S/m}$ ;  $\epsilon_r = 41.265$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.6^\circ\text{C}$     Liquid Temperature:  $20.5^\circ\text{C}$ 

Communication System: CW 900MHz;    Frequency: 835 MHz;    Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(10.19, 10.19, 10.19) @ 835 MHz

**System Check 835MHz/Area Scan (7x13x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

Maximum value of SAR (measured) = 2.93 W/kg

**System Check 835MHz/Zoom Scan (7x7x7) (5x5x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 61.64 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.80 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.54 W/kg

Maximum value of SAR (measured) = 3.30 W/kg

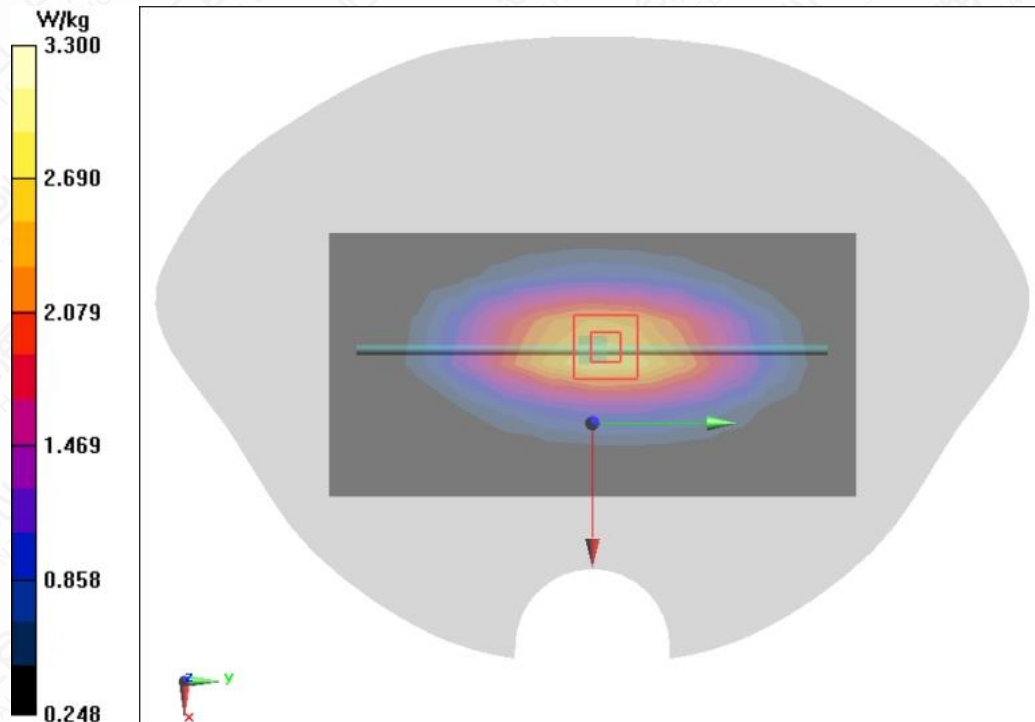


Figure A.2-2 System Check 835MHz



**System Check 1750MHz**

Date/Time: 2024/4/23

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 1750 \text{ MHz}$ ;  $\sigma = 1.324 \text{ S/m}$ ;  $\epsilon_r = 38.81$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: CW 1750MHz;    Frequency: 1750 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.86, 8.86, 8.86) @ 1750 MHz

**System Check 1750MHz/Area Scan (8x7x1):**

 Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$ 

 Maximum value of SAR (measured) =  $9.97 \text{ W/kg}$ 
**System Check 1750MHz/Zoom Scan (7x7x7) (5x5x7)/Cube 0:**

 Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $105.9 \text{ V/m}$ ; Power Drift =  $0.01 \text{ dB}$ 

 Peak SAR (extrapolated) =  $17.2 \text{ W/kg}$ 

 SAR(1 g) =  $9.33 \text{ W/kg}$ ; SAR(10 g) =  $4.94 \text{ W/kg}$ 

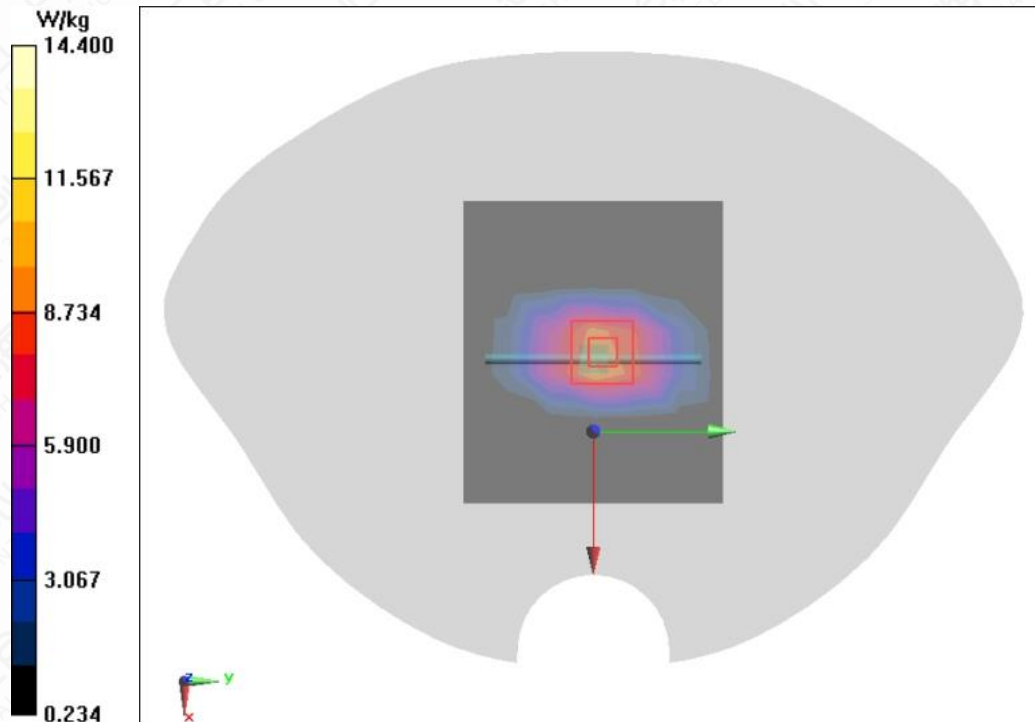
 Maximum value of SAR (measured) =  $14.4 \text{ W/kg}$ 


Figure A.2-3 System Check 1750MHz

**System Check 1900MHz**

Date/Time: 2024/4/16

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.414 \text{ S/m}$ ;  $\epsilon_r = 38.255$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.3^\circ\text{C}$

Communication System: CW 1750MHz;    Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1900 MHz

**System Check 1900MHz/Area Scan (8x7x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) = 13.4 W/kg

**System Check 1900MHz/Zoom Scan (7x7x7) (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value = 104.9 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 19.5 W/kg

SAR(1 g) = 10.1 W/kg; SAR(10 g) = 5.24 W/kg

Maximum value of SAR (measured) = 16.0 W/kg

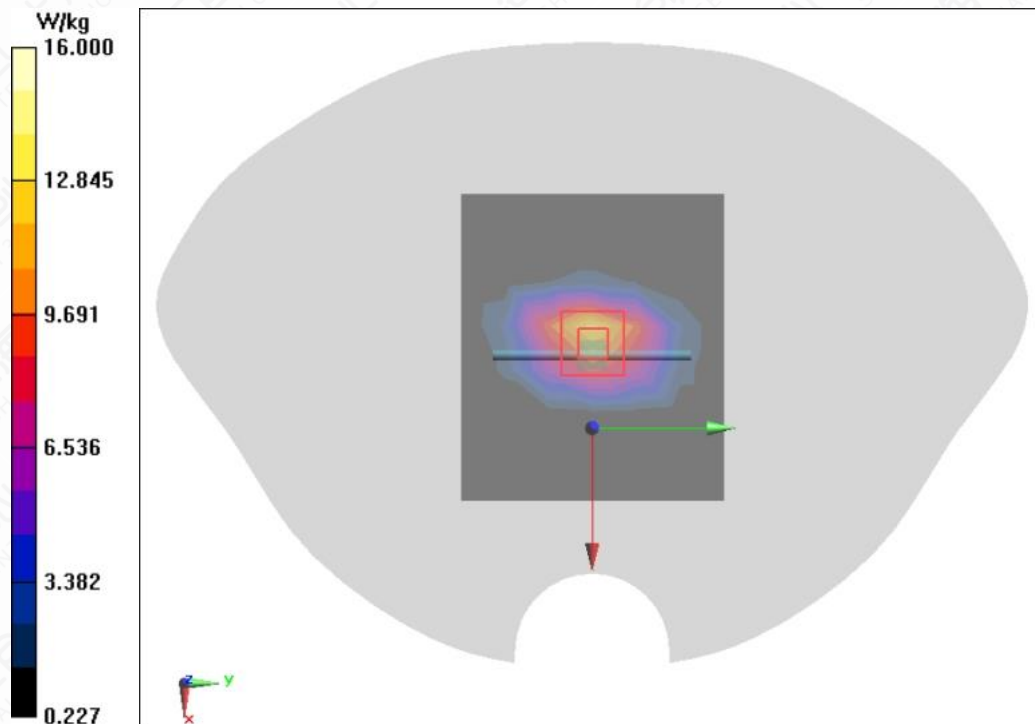


Figure A.2-4 System Check 1900MHz

**System Check 1900MHz**

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 1900 \text{ MHz}$ ;  $\sigma = 1.414 \text{ S/m}$ ;  $\epsilon_r = 38.249$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.5^\circ\text{C}$

Communication System: CW 1750MHz;    Frequency: 1900 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.51, 8.51, 8.51) @ 1900 MHz

**System Check 1900MHz/Area Scan (8x7x1):**

Measurement grid:  $dx=15\text{mm}$ ,  $dy=15\text{mm}$

Maximum value of SAR (measured) =  $12.7 \text{ W/kg}$

**System Check 1900MHz/Zoom Scan (7x7x7) (7x7x7)/Cube 0:**

Measurement grid:  $dx=8\text{mm}$ ,  $dy=8\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $105.6 \text{ V/m}$ ; Power Drift =  $-0.05 \text{ dB}$

Peak SAR (extrapolated) =  $19.4 \text{ W/kg}$

SAR(1 g) =  $10.1 \text{ W/kg}$ ; SAR(10 g) =  $5.18 \text{ W/kg}$

Maximum value of SAR (measured) =  $15.8 \text{ W/kg}$

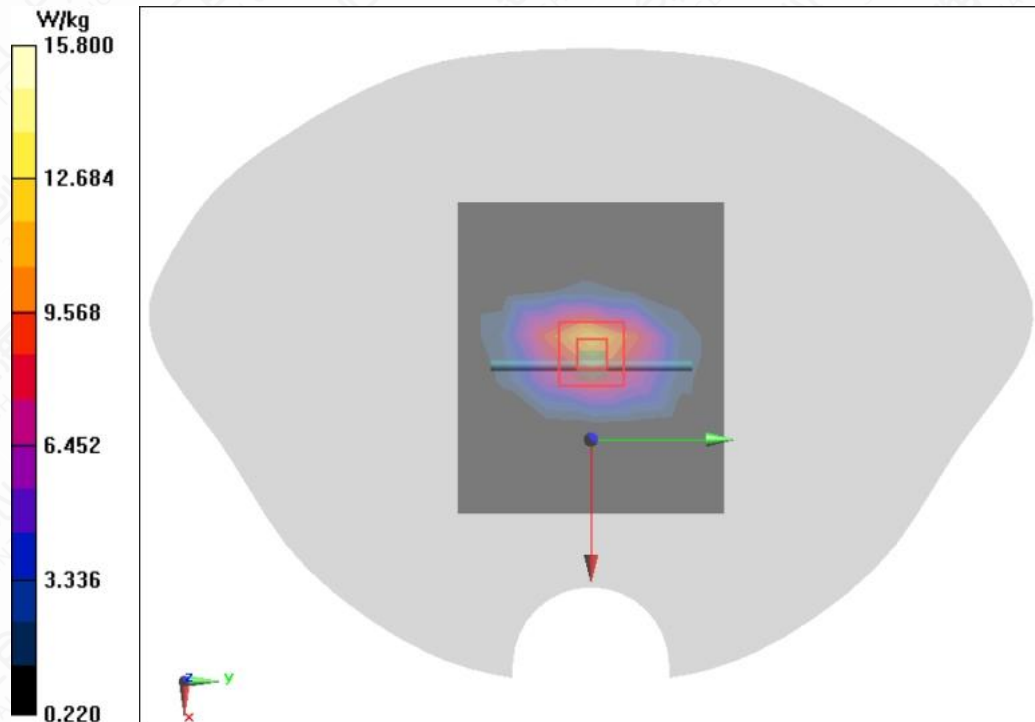


Figure A.2-5 System Check 1900MHz

**System Check 2300MHz**

Date/Time: 2024/5/7

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2300 \text{ MHz}$ ;  $\sigma = 1.709 \text{ S/m}$ ;  $\epsilon_r = 39.193$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.4^\circ\text{C}$ 

Communication System: CW 2450;      Frequency: 2300 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.32, 8.32, 8.32) @ 2300 MHz

**System Check 2300MHz/Area Scan (8x8x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

 Maximum value of SAR (measured) =  $15.1 \text{ W/kg}$ 
**System Check 2300MHz/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

 Reference Value =  $107.2 \text{ V/m}$ ; Power Drift =  $0.08 \text{ dB}$ 

 Peak SAR (extrapolated) =  $24.9 \text{ W/kg}$ 

 SAR(1 g) =  $12.2 \text{ W/kg}$ ; SAR(10 g) =  $5.75 \text{ W/kg}$ 

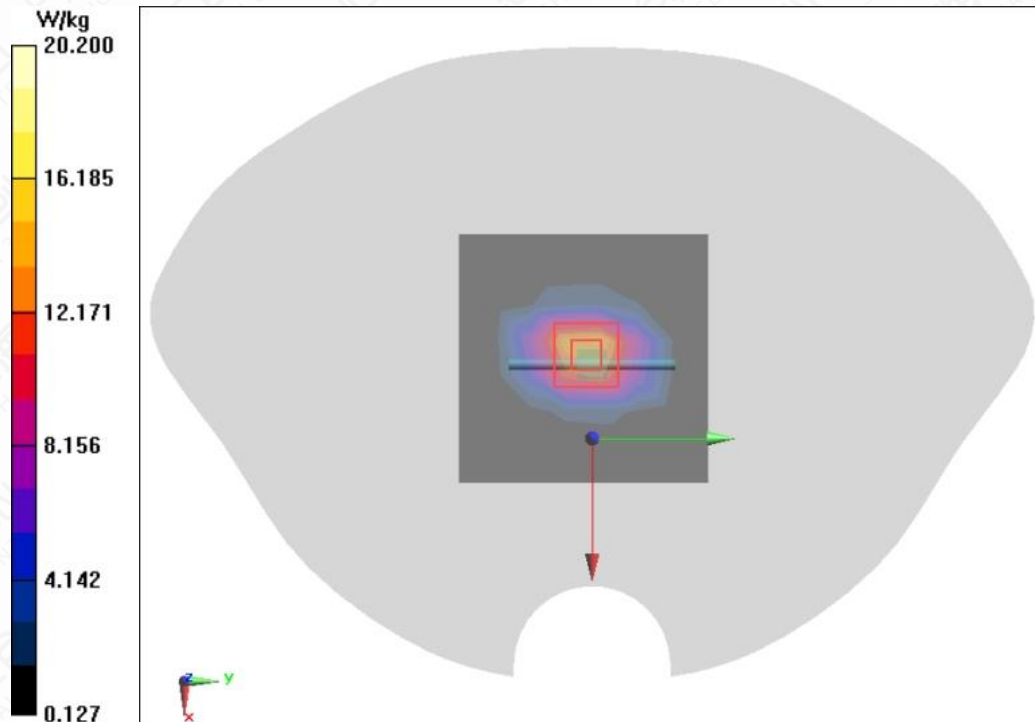
 Maximum value of SAR (measured) =  $20.2 \text{ W/kg}$ 


Figure A.2-6 System Check 2300MHz

**System Check 2450MHz**

Date/Time: 2024/4/18

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2450 \text{ MHz}$ ;  $\sigma = 1.853 \text{ S/m}$ ;  $\epsilon_r = 40.201$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.3^\circ\text{C}$

Communication System: CW 2450MHz;    Frequency: 2450 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(8.05, 8.05, 8.05) @ 2450 MHz

**System Check 2450MHz/Area Scan (9x9x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $12.5 \text{ W/kg}$

**System Check 2450MHz/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $88.10 \text{ V/m}$ ; Power Drift =  $0.14 \text{ dB}$

Peak SAR (extrapolated) =  $28.7 \text{ W/kg}$

SAR(1 g) =  $13.7 \text{ W/kg}$ ; SAR(10 g) =  $6.33 \text{ W/kg}$

Maximum value of SAR (measured) =  $15.5 \text{ W/kg}$

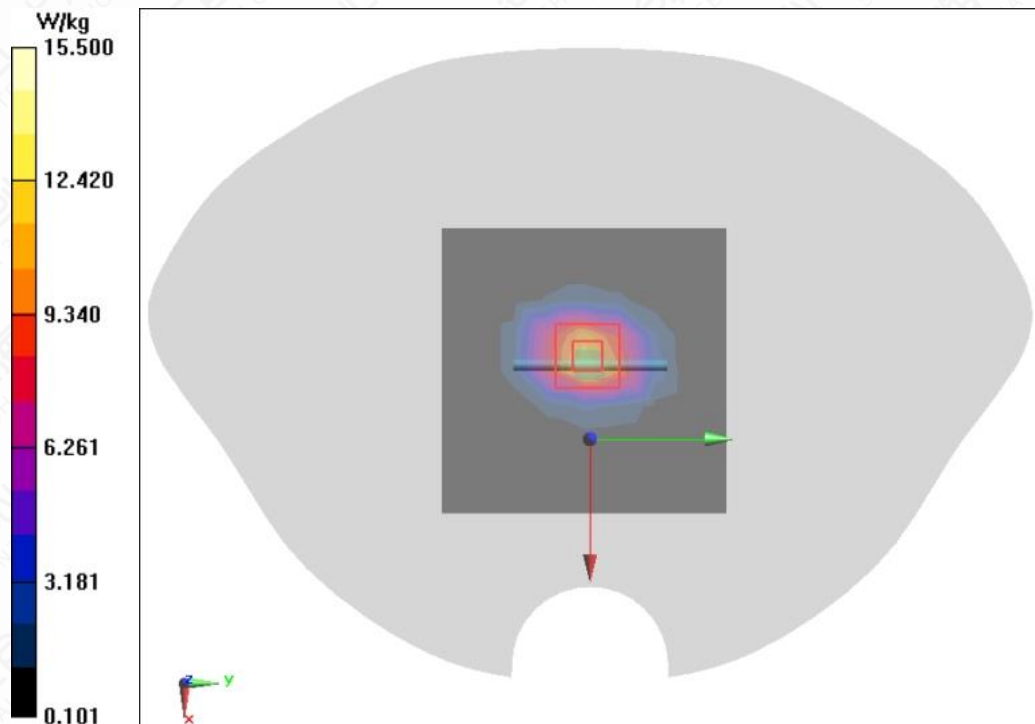


Figure A.2-7 System Check 2450MHz

**System Check 2600MHz**

Date/Time: 2024/4/24

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 2600 \text{ MHz}$ ;  $\sigma = 1.952 \text{ S/m}$ ;  $\epsilon_r = 38.664$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.5^\circ\text{C}$ 

Communication System: CW 2450MHz;    Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(7.85, 7.85, 7.85) @ 2600 MHz

**System Check 2600MHz/Area Scan (8x8x1):**

 Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$ 

Maximum value of SAR (measured) = 19.9 W/kg

**System Check 2600MHz/Zoom Scan (7x7x7)/Cube 0:**

 Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$ 

Reference Value = 114.7 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 30.3 W/kg

SAR(1 g) = 14.2 W/kg; SAR(10 g) = 6.42 W/kg

Maximum value of SAR (measured) = 24.2 W/kg

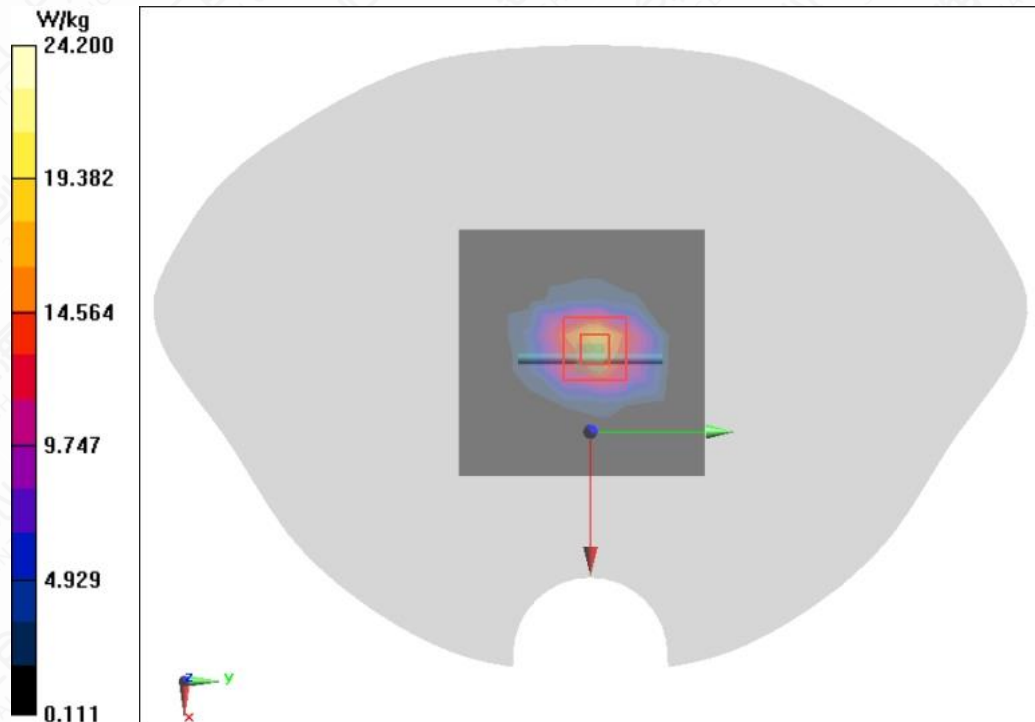


Figure A.2-8 System Check 2600MHz

**System Check 2600MHz**

Date/Time: 2024/5/8

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 2600 \text{ MHz}$ ;  $\sigma = 1.936 \text{ S/m}$ ;  $\epsilon_r = 38.289$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.6^\circ\text{C}$       Liquid Temperature:  $20.5^\circ\text{C}$

Communication System: CW 2450MHz;    Frequency: 2600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(7.85, 7.85, 7.85) @ 2600 MHz

**System Check 2600MHz/Area Scan (8x8x1):**

Measurement grid:  $dx=12\text{mm}$ ,  $dy=12\text{mm}$

Maximum value of SAR (measured) =  $19.3 \text{ W/kg}$

**System Check 2600MHz/Zoom Scan (7x7x7)/Cube 0:**

Measurement grid:  $dx=5\text{mm}$ ,  $dy=5\text{mm}$ ,  $dz=5\text{mm}$

Reference Value =  $109.9 \text{ V/m}$ ; Power Drift =  $0.07 \text{ dB}$

Peak SAR (extrapolated) =  $29.6 \text{ W/kg}$

SAR(1 g) =  $13.9 \text{ W/kg}$ ; SAR(10 g) =  $6.27 \text{ W/kg}$

Maximum value of SAR (measured) =  $23.7 \text{ W/kg}$

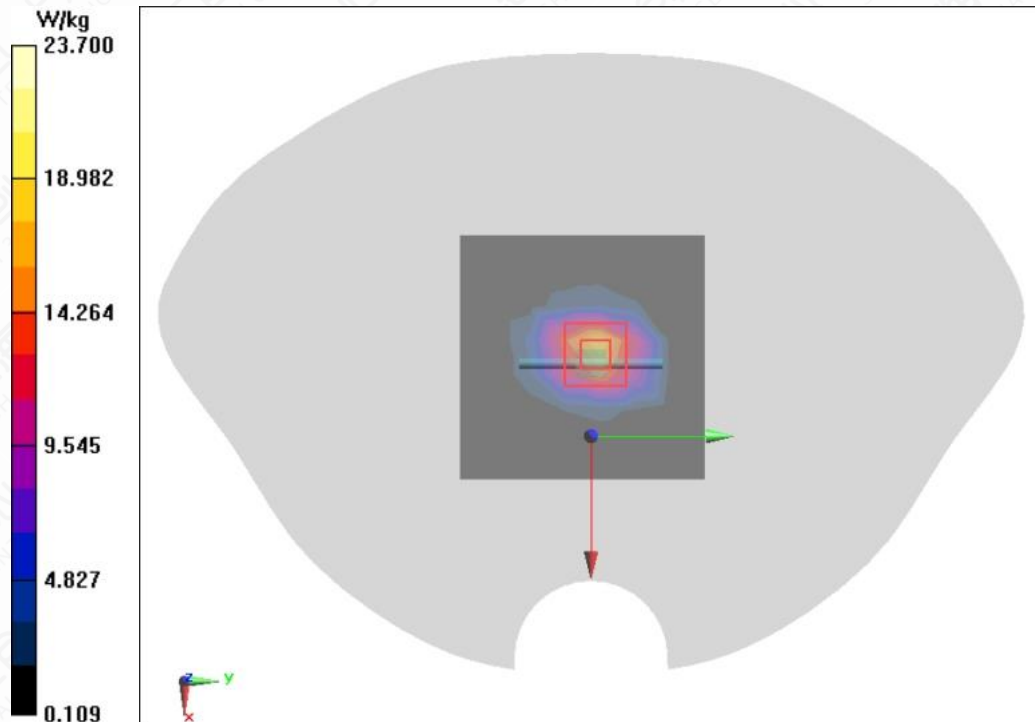


Figure A.2-9 System Check 2600MHz

**System Check 5200MHz**

Date/Time: 2024/5/6

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5200 \text{ MHz}$ ;  $\sigma = 4.672 \text{ S/m}$ ;  $\epsilon_r = 35.264$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.5^\circ\text{C}$     Liquid Temperature:  $20.5^\circ\text{C}$

Communication System: 600-6000MHz;    Frequency: 5200 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.75, 5.75, 5.75) @ 5200 MHz

**System Check 5200MHz/Area Scan (8x8x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 18.4 W/kg

**System Check 5200MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 72.42 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 31.0 W/kg

SAR(1 g) = 7.78 W/kg; SAR(10 g) = 2.24 W/kg

Maximum of SAR (measured) = 19.6 W/kg

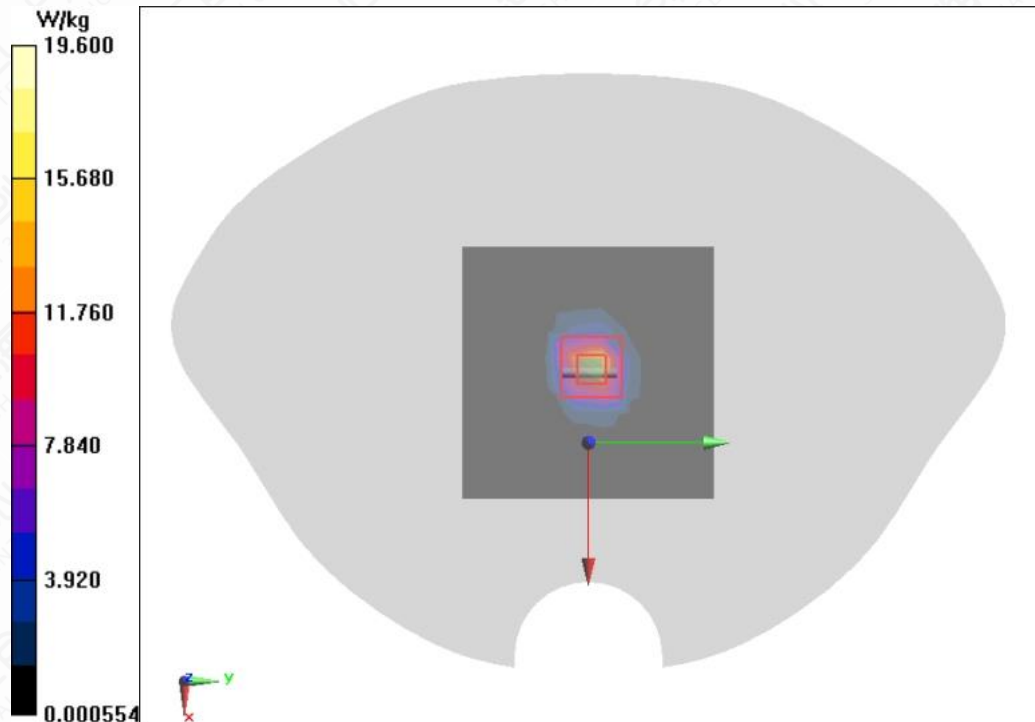


Figure A.2-10 System Check 5200MHz



**System Check 5300MHz**

Date/Time: 2024/5/6

Electronics: DAE4 Sn1581

 Medium parameters used:  $f = 5300 \text{ MHz}$ ;  $\sigma = 4.781 \text{ S/m}$ ;  $\epsilon_r = 35.056$ ;  $\rho = 1000 \text{ kg/m}^3$ 

 Ambient Temperature:  $21.5^\circ\text{C}$       Liquid Temperature:  $20.5^\circ\text{C}$ 

Communication System: CW 5GHz;      Frequency: 5300 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.75, 5.75, 5.75) @ 5300 MHz

**System Check 5300MHz/Area Scan (10x10x1):**

 Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$ 

Maximum value of SAR (measured) = 15.0 W/kg

**System Check 5300MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0:**

 Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$ 

Reference Value = 69.52 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 33.4 W/kg

SAR(1 g) = 8.17 W/kg; SAR(10 g) = 2.34 W/kg

Maximum value of SAR (measured) = 20.8 W/kg

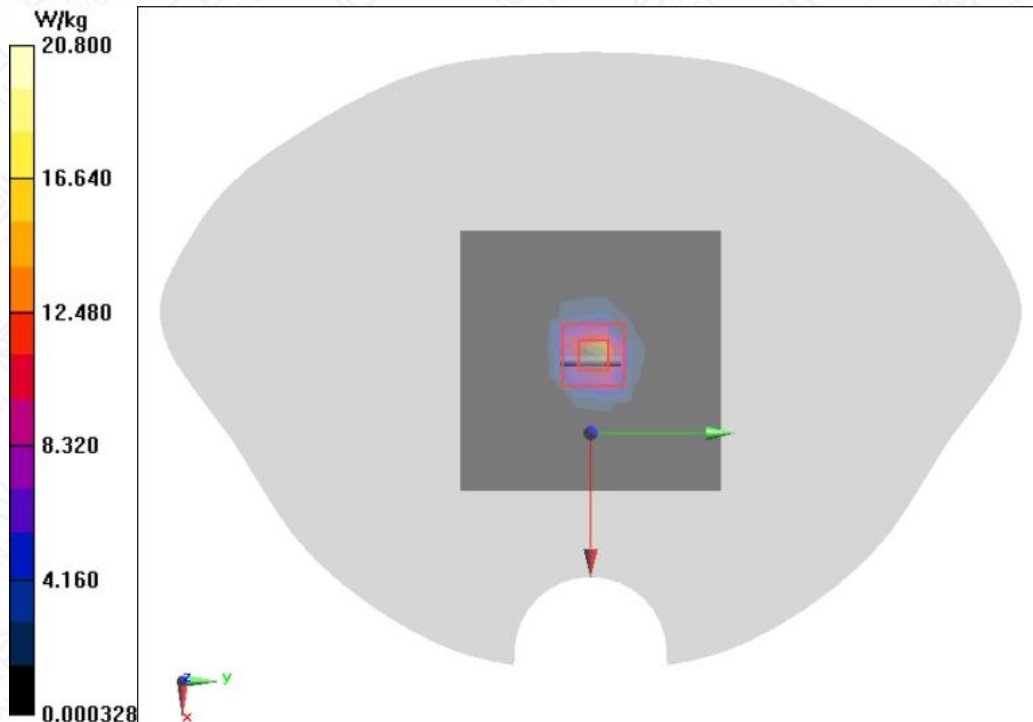


Figure A.2-11 System Check 5300MHz

**System Check 5600MHz**

Date/Time: 2024/4/19

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5600 \text{ MHz}$ ;  $\sigma = 5.126 \text{ S/m}$ ;  $\epsilon_r = 34.442$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: CW 5GHz;      Frequency: 5600 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.1, 5.1, 5.1) @ 5600 MHz

**System Check 5600MHz/Area Scan (10x10x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) = 16.5 W/kg

**System Check 5600MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value = 68.70 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 34.2 W/kg

SAR(1 g) = 8.36 W/kg; SAR(10 g) = 2.38 W/kg

Maximum of SAR (measured) = 21.7 W/kg

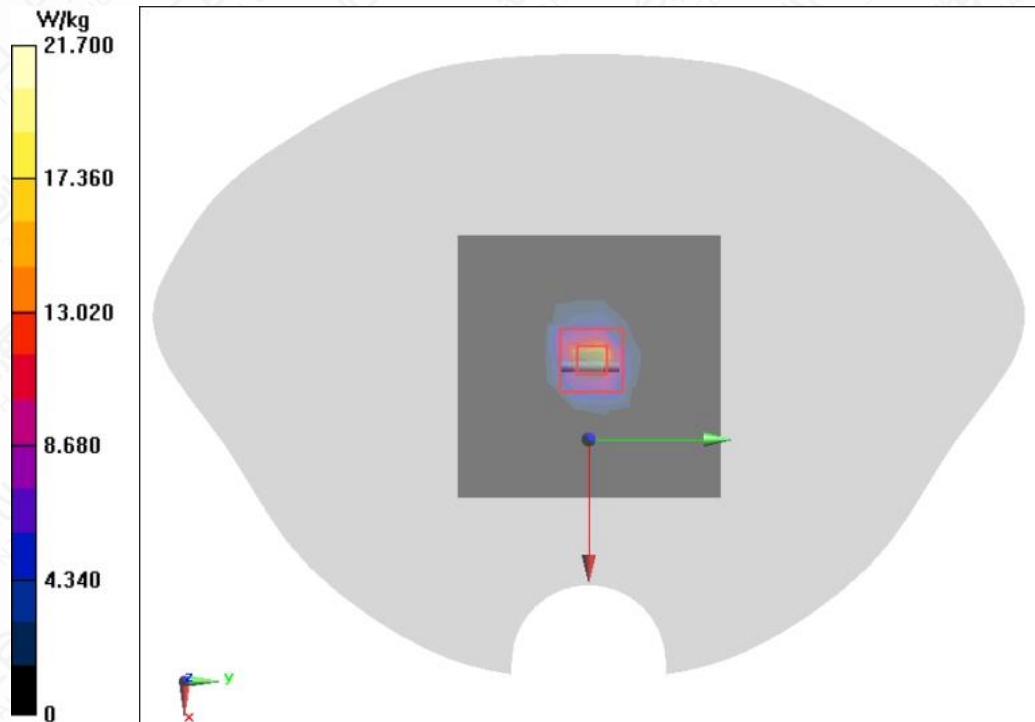


Figure A.2-12 System Check 5600MHz

**System Check 5800MHz**

Date/Time: 2024/4/19

Electronics: DAE4 Sn1581

Medium parameters used:  $f = 5800 \text{ MHz}$ ;  $\sigma = 5.366 \text{ S/m}$ ;  $\epsilon_r = 34.04$ ;  $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature:  $21.4^\circ\text{C}$       Liquid Temperature:  $20.2^\circ\text{C}$

Communication System: CW 5GHz;      Frequency: 5800 MHz; Duty Cycle: 1:1

Probe: EX3DV4 - SN7634ConvF(5.25, 5.25, 5.25) @ 5800 MHz

**System Check 5800MHz/Area Scan (10x10x1):**

Measurement grid:  $dx=10\text{mm}$ ,  $dy=10\text{mm}$

Maximum value of SAR (measured) =  $15.1 \text{ W/kg}$

**System Check 5800MHz/Zoom Scan (4x4x1.4mm, graded), dist=1.4mm (7x7x7)/Cube 0:**

Measurement grid:  $dx=4\text{mm}$ ,  $dy=4\text{mm}$ ,  $dz=2\text{mm}$

Reference Value =  $67.46 \text{ V/m}$ ; Power Drift =  $-0.01 \text{ dB}$

Peak SAR (extrapolated) =  $35.3 \text{ W/kg}$

SAR(1 g) =  $8.03 \text{ W/kg}$ ; SAR(10 g) =  $2.28 \text{ W/kg}$

Maximum of SAR (measured) =  $21.4 \text{ W/kg}$

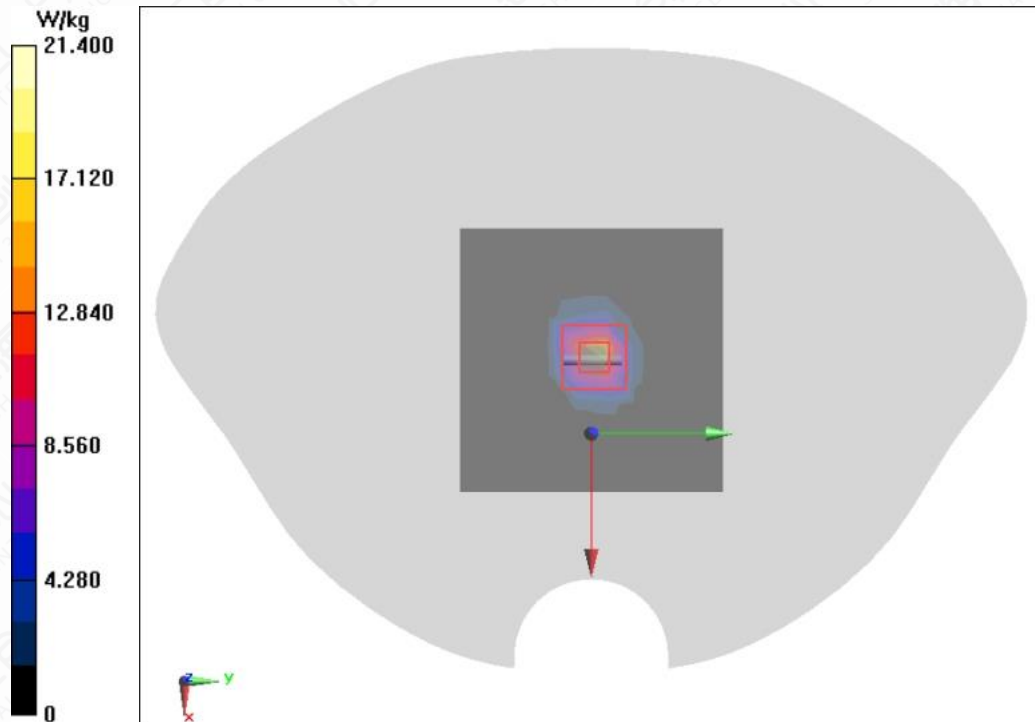


Figure A.2-13 System Check 5800MHz

## Annex B: Calibration Certificate



In Collaboration with  
**Speaq**  
 CALIBRATION LABORATORY  
 Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2117  
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>



中国认可  
 国际互认  
 校准  
 CALIBRATION  
 CNAS L0570

 Client : **3in**

 Certificate No: **24J02Z000044**

### CALIBRATION CERTIFICATE

Object: **DAE4 - SN: 1581**

Calibration Procedure(s): **FF-Z11-002-01**  
 Calibration Procedure for the Data Acquisition Electronics (DAEx)




Calibration date: **February 22, 2024**

This calibration Certificate documents the traceability to national standards, which realize the physical units of measurements(SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22±3)°C and humidity<70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date(Calibrated by, Certificate No.)	Scheduled Calibration
Process Calibrator 753	1971018	12-Jun-23 (CTTL, No.J23X05436)	Jun-24

	Name	Function	Signature
Calibrated by:	Yu Zongying	SAR Test Engineer	
Reviewed by:	Lin Jun	SAR Test Engineer	
Approved by:	Qi Dianyuan	SAR Project Leader	

Issued: February 26, 2024

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
Tel: +86-10-62304633-2117  
E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

**Glossary:**

DAE data acquisition electronics  
Connector angle information used in DASY system to align probe sensor X to the robot coordinate system.

**Methods Applied and Interpretation of Parameters:**

- *DC Voltage Measurement:* Calibration Factor assessed for use in DASY system by comparison with a calibrated instrument traceable to national standards. The figure given corresponds to the full scale range of the voltmeter in the respective range.
- *Connector angle:* The angle of the connector is assessed measuring the angle mechanically by a tool inserted. Uncertainty is not required.
- The report provide only calibration results for DAE, it does not contain other performance test results.



Add: No.52 HuaYuanBei Road, Haidian District, Beijing, 100191, China  
 Tel: +86-10-62304633-2117  
 E-mail: emf@caict.ac.cn <http://www.caict.ac.cn>

**DC Voltage Measurement**

A/D - Converter Resolution nominal  
 High Range: 1LSB = 6.1 $\mu$ V, full range = -100...+300 mV  
 Low Range: 1LSB = 61nV, full range = -1.....+3mV  
 DASY measurement parameters: Auto Zero Time: 3 sec; Measuring time: 3 sec

Calibration Factors	X	Y	Z
High Range	405.345 $\pm$ 0.15% (k=2)	405.593 $\pm$ 0.15% (k=2)	405.846 $\pm$ 0.15% (k=2)
Low Range	3.99569 $\pm$ 0.7% (k=2)	3.99961 $\pm$ 0.7% (k=2)	4.00455 $\pm$ 0.7% (k=2)

**Connector Angle**

Connector Angle to be used in DASY system	13° $\pm$ 1°
---	--------------