

3D Antenna Measurement Summary Report

REPORT NO.: ORCCOG-WTW-P23040303

MODEL NAME: PAS600,PAS600L,PAS600T

TESTED DATE: 2023.5.10

ISSUED: 2023.6.21

APPLICANT : Schneider Electric Industries SAS

ADDRESS : Electropole Site - 38EQ1, 31 rue Pierre Mendes France,
Eybens - 38050 Grenoble cedex 9

ISSUED BY: Bureau Veritas Consumer Products Services (Hong Kong)
Limited, Taoyuan Branch Mobile Communications Laboratory

ADDRESS: No.19, Hwa Ya 2nd Rd., Kwei shan Dist., Taoyuan City, Taiwan
(R.O.C)

The client to claim product certification, approval, or endorsement by TAF, CTIA or any government agencies, should not use this report.



This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

RELEASE CONTROL RECORD

REPORT NO.	REASON FOR CHANGE	DATE ISSUED
ORCCOG-WTW-P23040303	Original release	2023.6.21

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
1. Test Methods.....	4
2. Description of the anechoic chamber:	4
3. Test Equipment List.....	5
4. Measurement Uncertainty.....	5
5. Testing Setup Photo.....	6
6. Antenna Radiation Performance.....	6
7. APPENDIX. 3D Antenna Patterns	7
7.1. With PCB ANTENNA, model: U8_1	7
7.2. With PCB ANTENNA, model: U7_1	10
7.3. With PCB ANTENNA, model: U31_1	13
APPENDIX. EUT photograph	22

GENERAL INFORMATION

APPLICANT:	Schneider Electric Industries SAS
MANUFACTURER:	Schneider Electric Industries SAS
MODEL NAME:	PAS600,PAS600L,PAS600T
MEASUREMENT STATNDARD	ANSI/IEEE 149 1979.

TESTED BY : Leo Chen , **DATE :** 2023.6.21
Leo Chen / Engineer

PREPARED BY : Johnny Liu , **DATE :** 2023.6.21
Johnny Liu / Supervisor

APPROVED BY : Ken Chan , **DATE :** 2023.6.21
Ken Chan / Manager

1. Test Methods


The Antenna Gain Test is performed according to The ANSI/IEEE Std 149 12.3.1 Antenna Gain (Small size (< 42cm) Linear Polarization Antennas), using a two-axis support device and one fixed measurement antenna. The EUT is positioned along the required MAPS centerline fixture holder. The EUT is then stepped between 0 and 180 degrees along the theta axis in 15-degree increments. At each theta position, the phi axis is stepped from 0-360 degrees in 15-degree increments. Data is recorded using the Network analyzer for both theta and phi polarizations at each position. Depending on the protocol, an appropriate filter is used in the EMQuest software to process the data. Upon completion of the test, test results (angular dependent EIRP) is calculated at each measurement point and the required value is automatically calculated. This test procedure is repeated for frequency and configuration as required.

2. Description of the anechoic chamber:

Length: 7.32 m

Width: 3.66 m

Height: 3.51 m

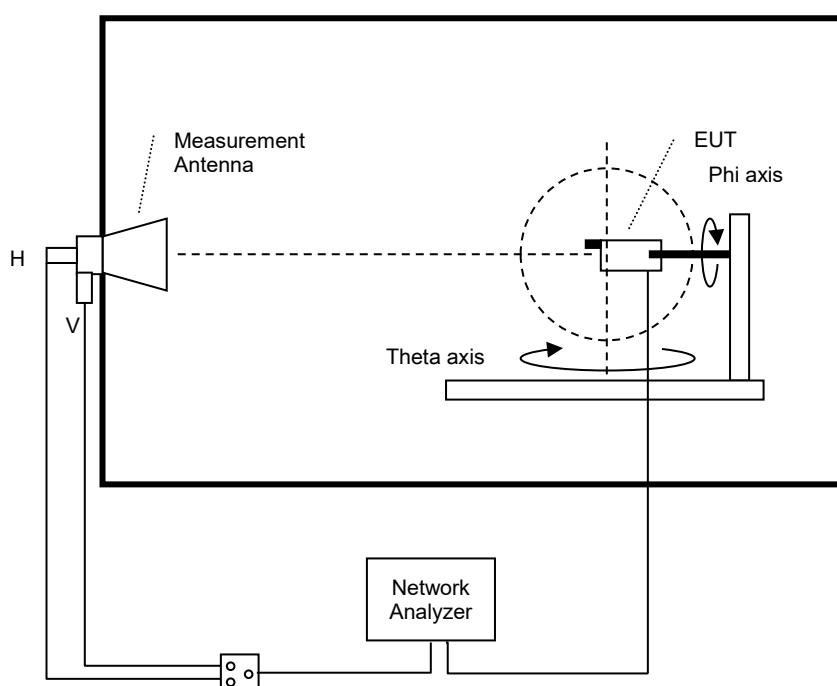

3. Test Equipment List


TYPE OF EQUIPMENT	MODEL NUMBER	SERIAL NUMBER	CALIBRATION DUE DATE
(OTA3-HY) ETS Anechoic Chamber	ETS-Lindgren AMS-8500	CT0000411-1132	N/A
Measurement Software	ETS-Lindgren EMQuest V1.14 build 31654	1281	N/A
Multi-Axis Positioning System	ETS-Lindgren 2090-OPTI	00086248	N/A
Switch Control	Agilent 3499A	MY42005285	N/A
Network Analyzer	Agilent E5071C	MY46104190	2024/5/28

4. Measurement Uncertainty


Expanded Uncertainty for Measurement ($k=2$ or 95.45% Confidence Level) at Passive antenna test over frequency range:..

FREQUENCY RANGE	MEASUREMENT UNCERTAINTY
780~2200 MHz	1.40 dB
2200~3000 MHz	1.72 dB
3000~6000 MHz	3.86 dB


5. Testing Setup Photo

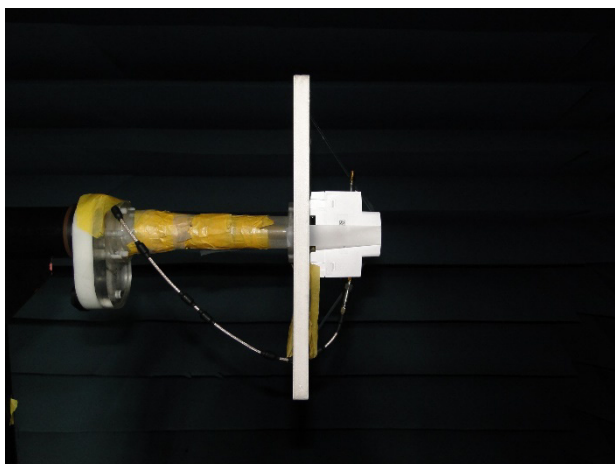

With PCB ANTENNA, model: U8_1

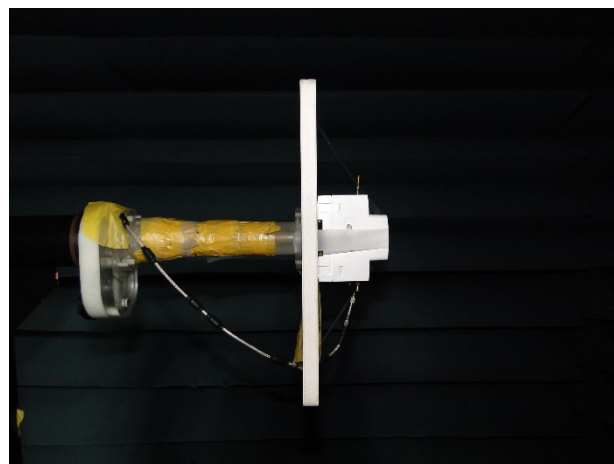

With PCB ANTENNA, model: U7_1

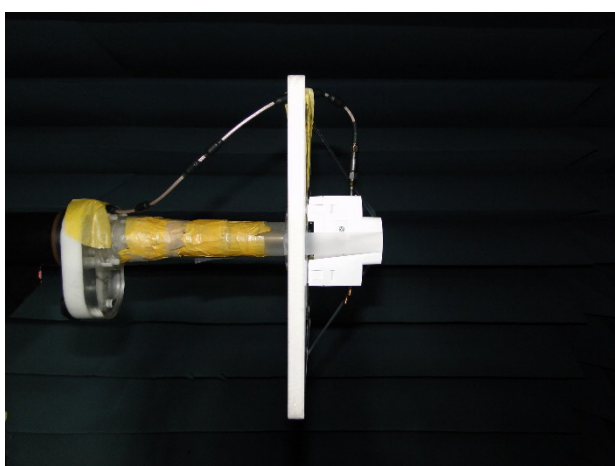

With PCB ANTENNA, model: U31_1

6. Antenna Radiation Performance


With PCB ANTENNA, model: U8_1									
Frequency (MHz)	2400	2450	2500						
Average Gain (dBi)	-4.07	-3.71	-3.24						
Peak Gain (dBi)	0.72	1.00	1.48						
Efficiency (%)	39.20	42.55	47.41						
With PCB ANTENNA, model: U7_1									
Frequency (MHz)	2400	2450	2500						
Average Gain (dBi)	-2.05	-2.14	-2.46						
Peak Gain (dBi)	1.38	1.72	1.66						
Efficiency (%)	62.40	61.08	56.79						
With PCB ANTENNA, model: U31_1									
Frequency (MHz)	2400	2450	2500	5150	5250	5350	5500	5725	5825
Average Gain (dBi)	-2.82	-2.75	-2.79	-7.76	-7.29	-6.65	-5.89	-5.35	-5.81
Peak Gain (dBi)	2.02	2.14	2.03	-0.55	0.22	1.10	2.17	1.98	1.35
Efficiency (%)	52.22	53.09	52.65	16.76	18.67	21.65	25.74	29.15	26.22

7. APPENDIX. 3D Antenna Patterns


7.1. With PCB ANTENNA, model: U8_1

2400MHz


Total

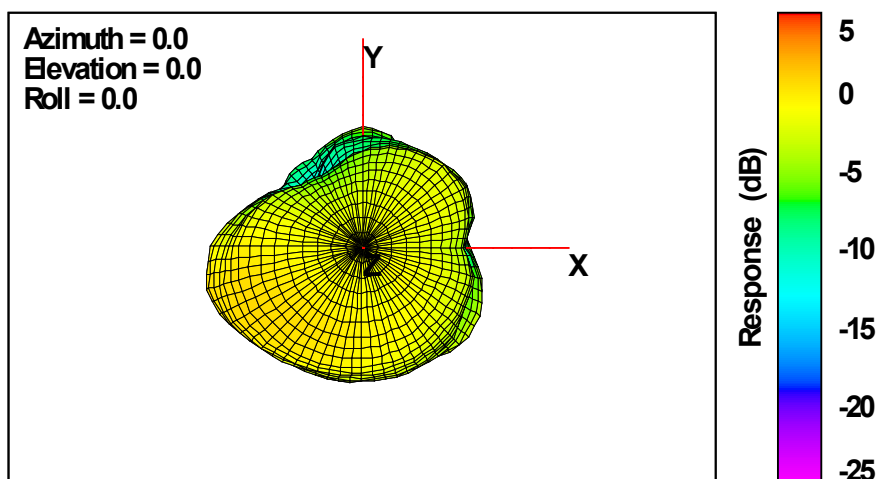

Total

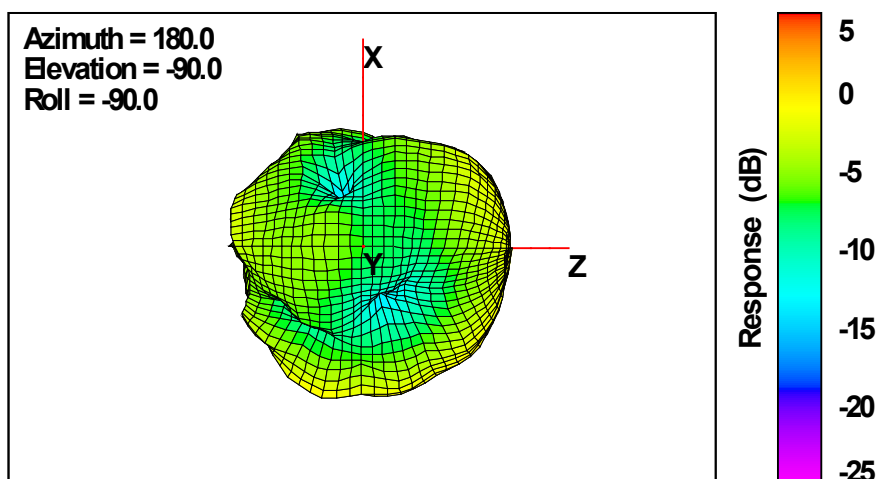


Total

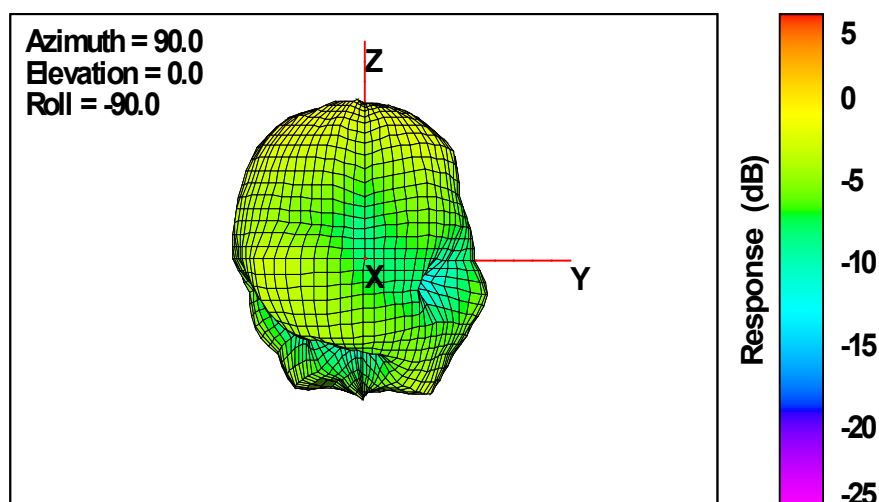


Frequency (MHz)	2400
Average Gain (dBi)	-4.07
Peak Gain (dBi)	0.72
Efficiency (%)	39.20


**2450MHz
Total**

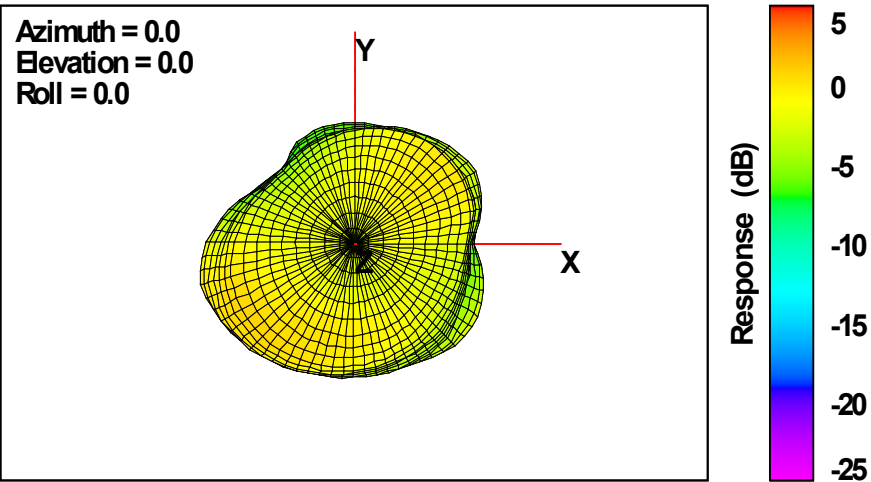

Total

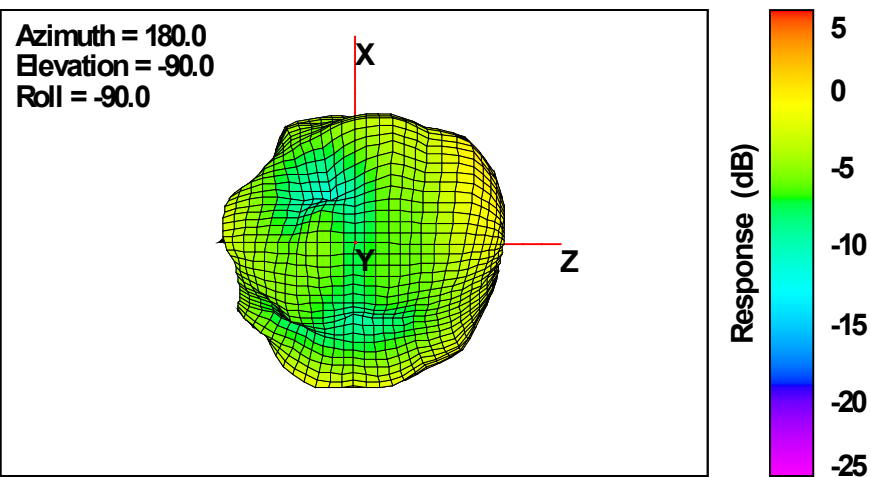


Total

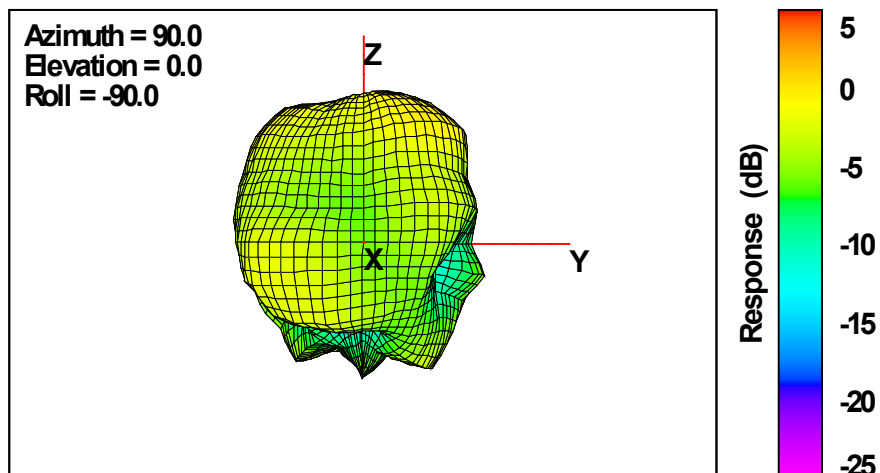


Frequency (MHz)	2450
Average Gain (dBi)	-3.71
Peak Gain (dBi)	1.00
Efficiency (%)	42.55


**2500MHz
Total**

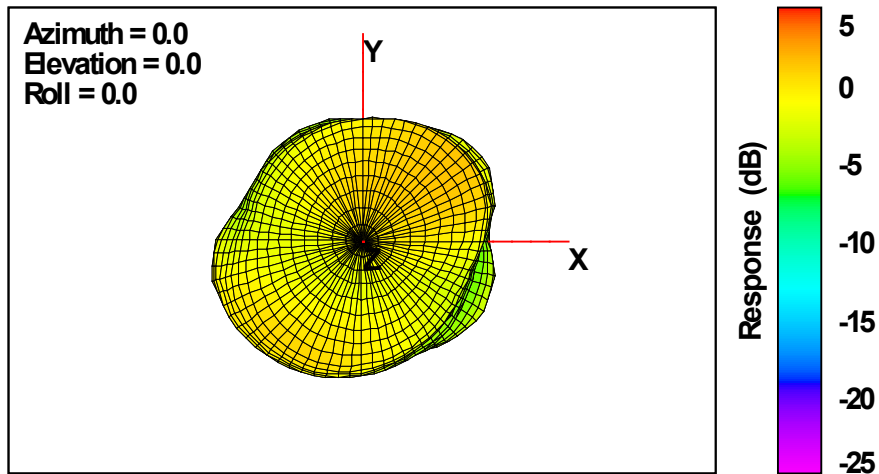

Total

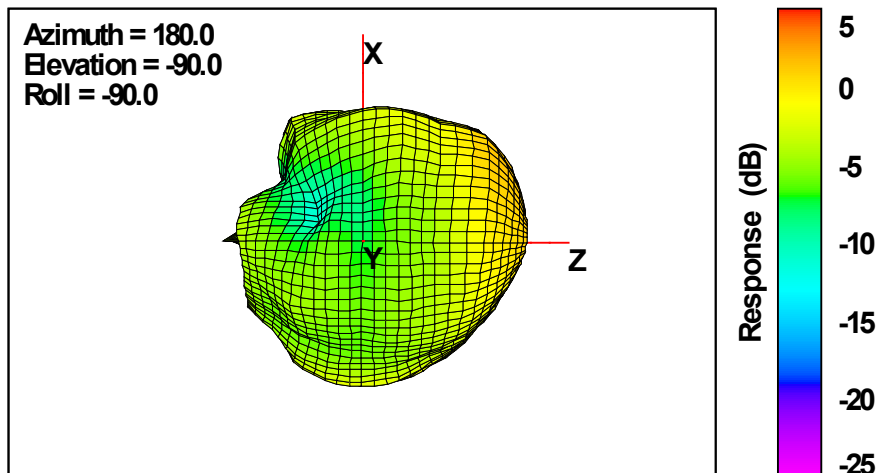


Total

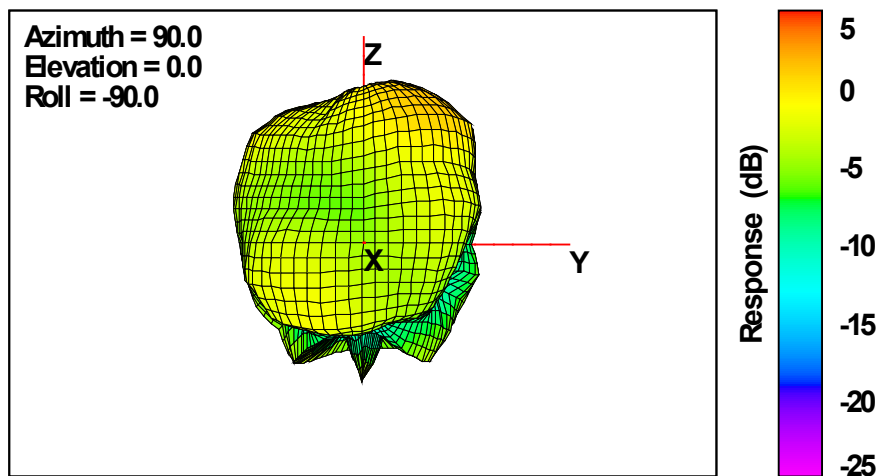


Frequency (MHz)	2500
Average Gain (dBi)	-3.24
Peak Gain (dBi)	1.48
Efficiency (%)	47.41

7.2. With PCB ANTENNA, model: U7_1


2400MHz
Total

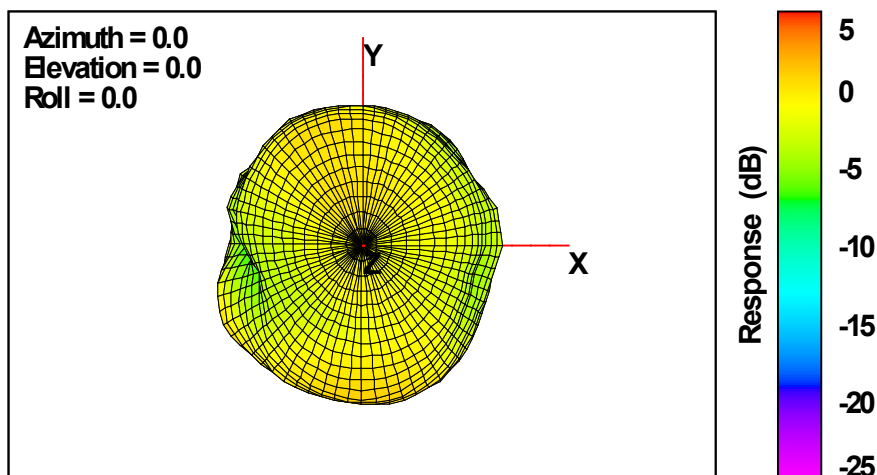

Total

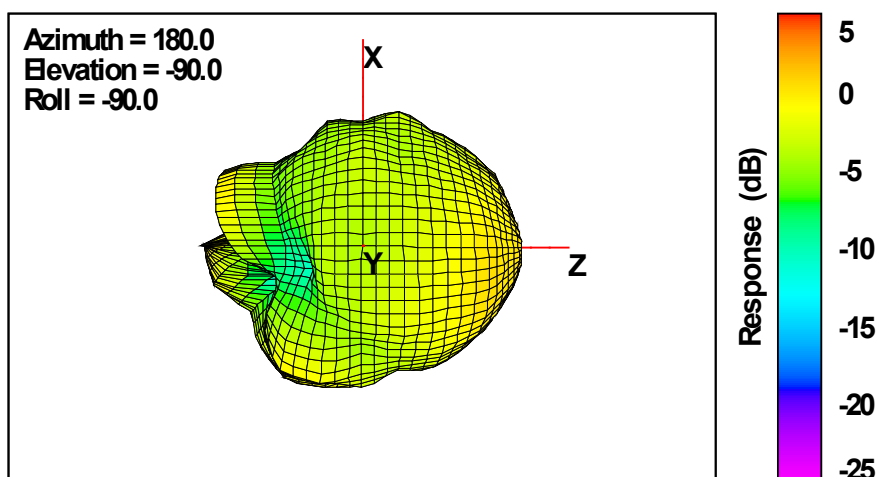


Total

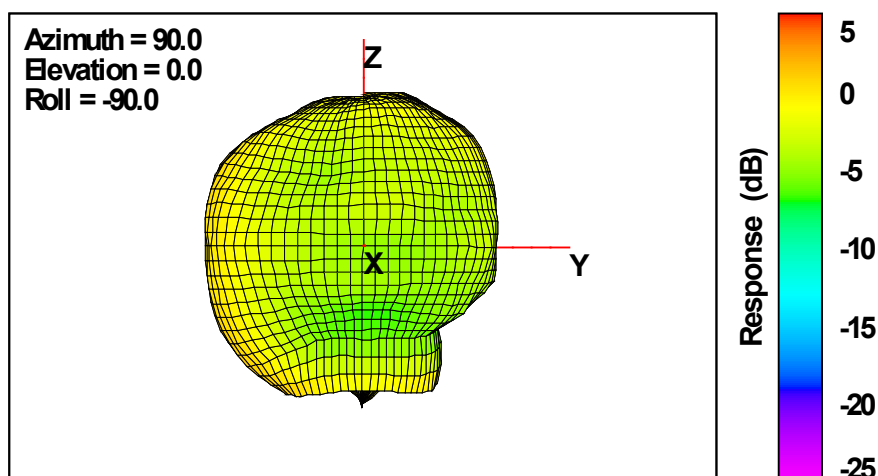


Frequency (MHz)	2400
Average Gain (dBi)	-2.05
Peak Gain (dBi)	1.38
Efficiency (%)	62.40


**2450MHz
Total**

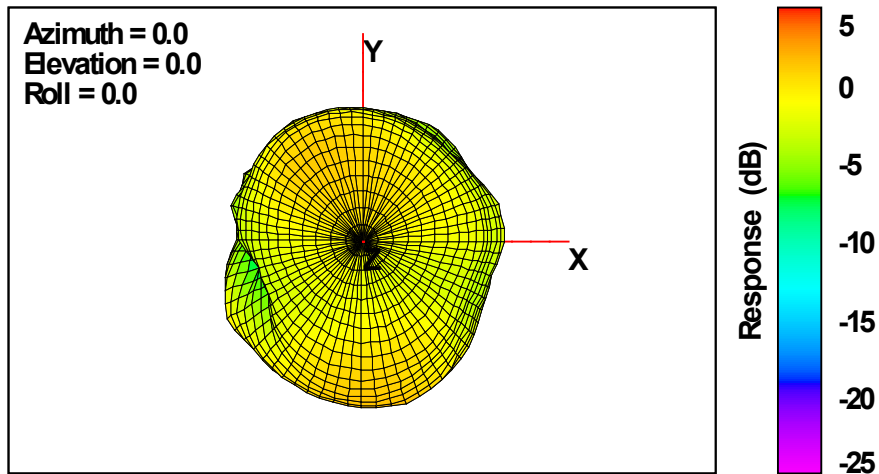

Total

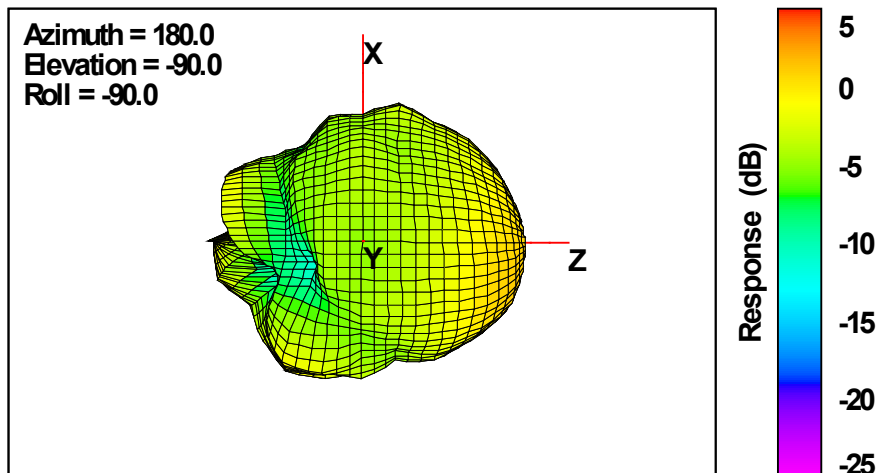


Total

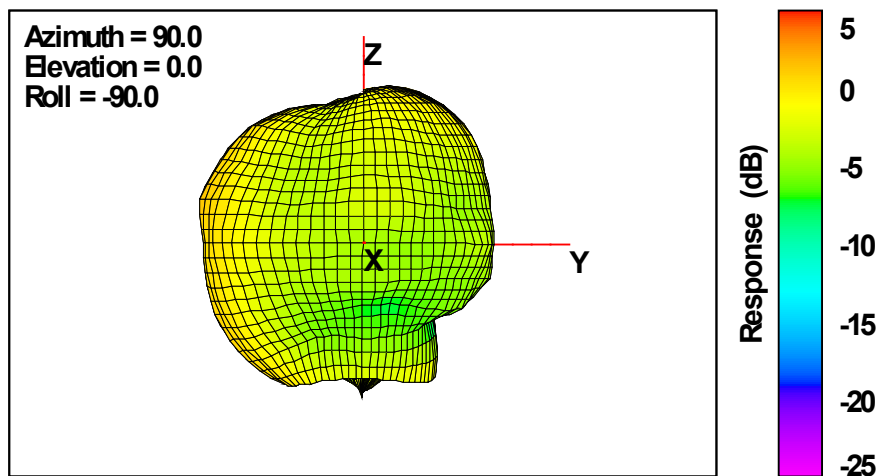


Frequency (MHz)	2450
Average Gain (dBi)	-2.14
Peak Gain (dBi)	1.72
Efficiency (%)	61.08


**2500MHz
Total**

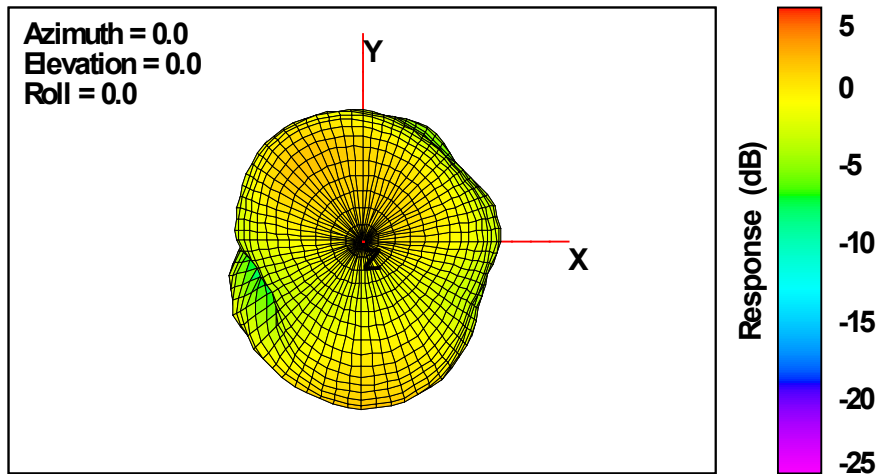

Total

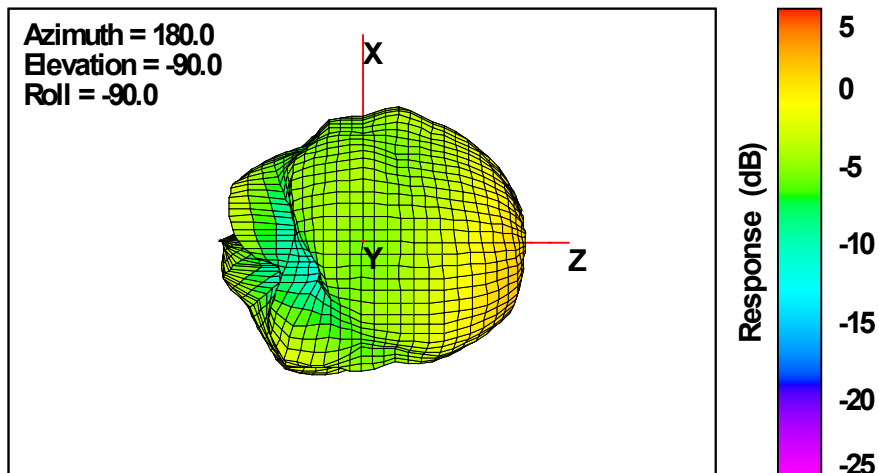


Total

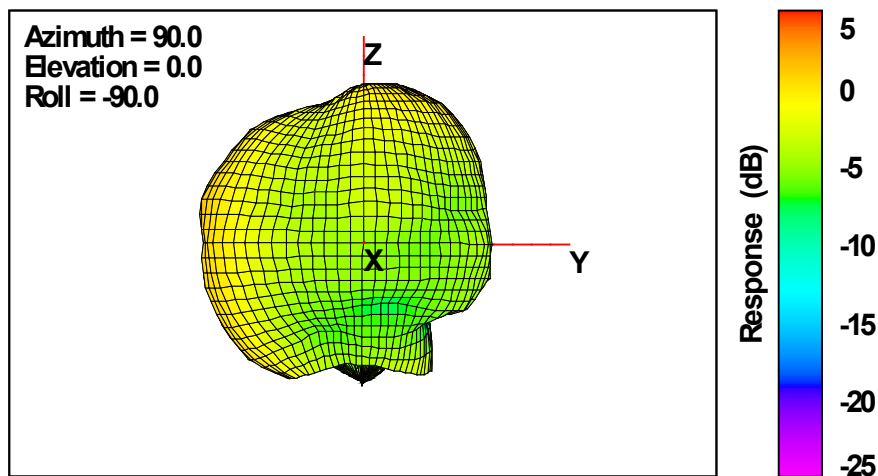


Frequency (MHz)	2500
Average Gain (dBi)	-2.46
Peak Gain (dBi)	1.66
Efficiency (%)	56.79

7.3. With PCB ANTENNA, model: U31_1


2400MHz
Total

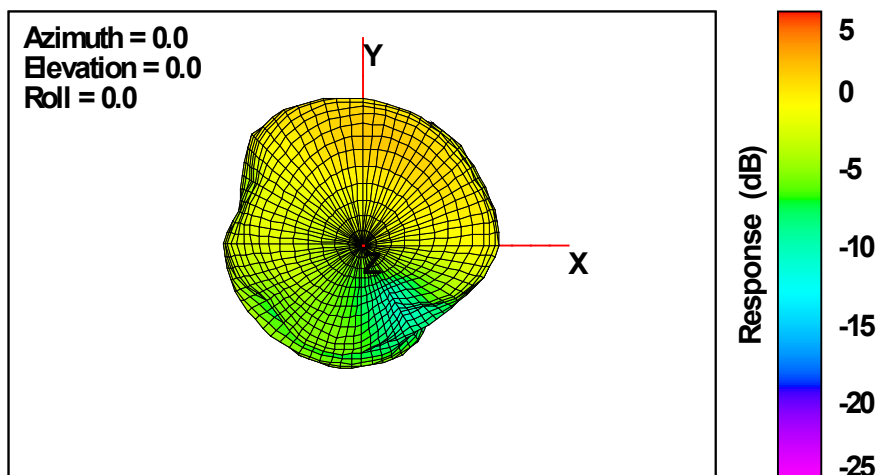

Total

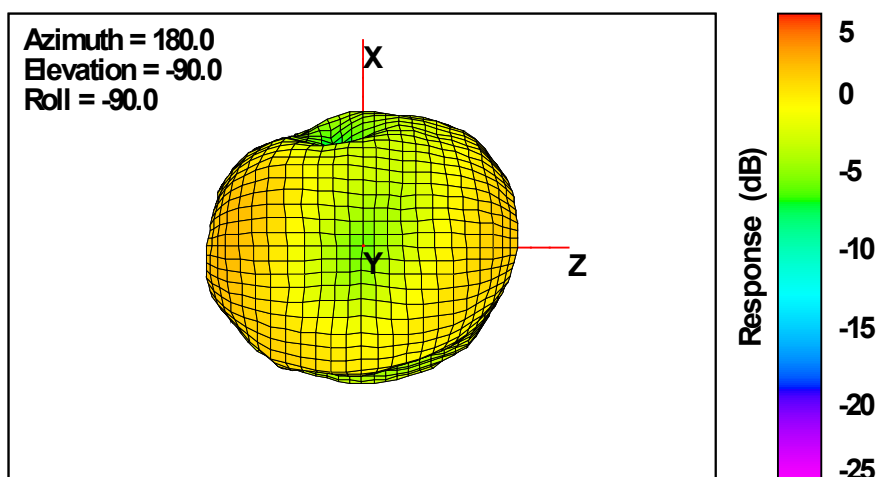


Total

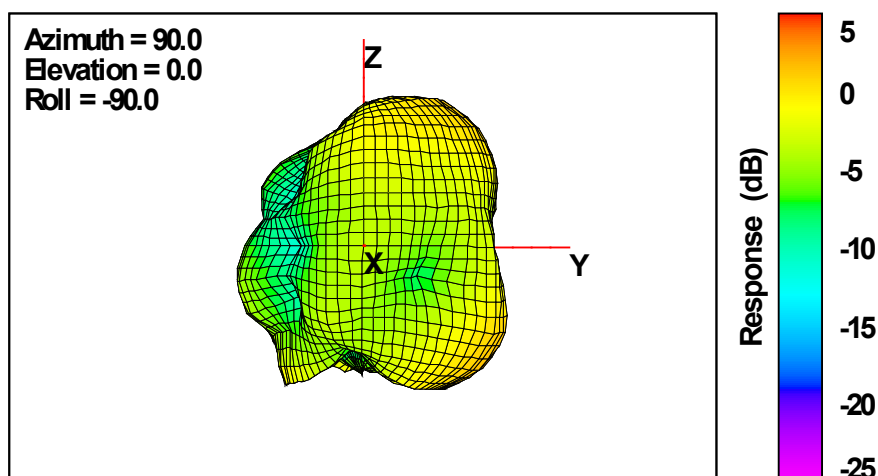


Frequency (MHz)	2400
Average Gain (dBi)	-2.82
Peak Gain (dBi)	2.02
Efficiency (%)	52.22


**2440MHz
Total**

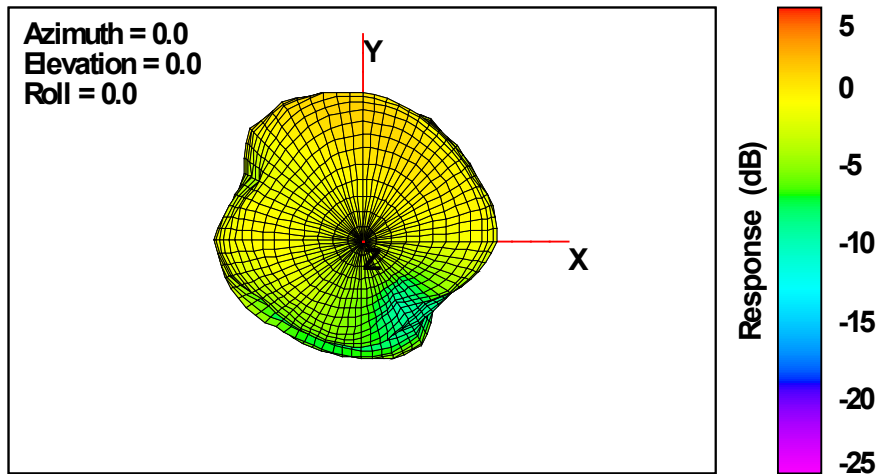

Total

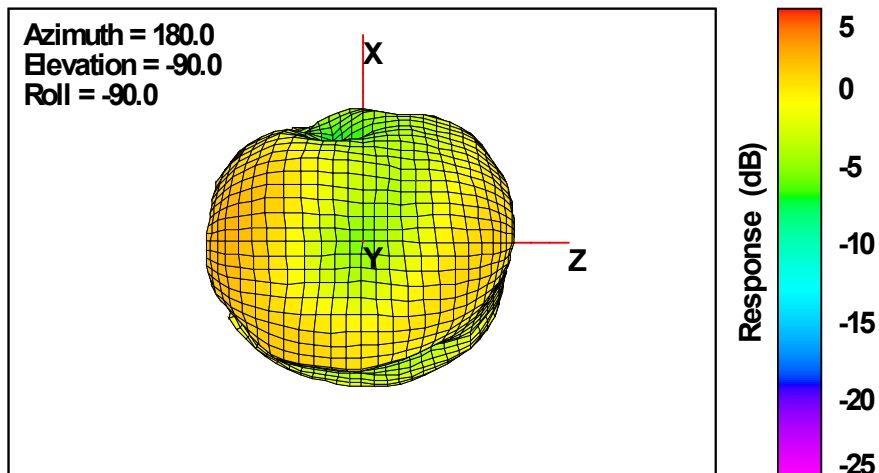


Total

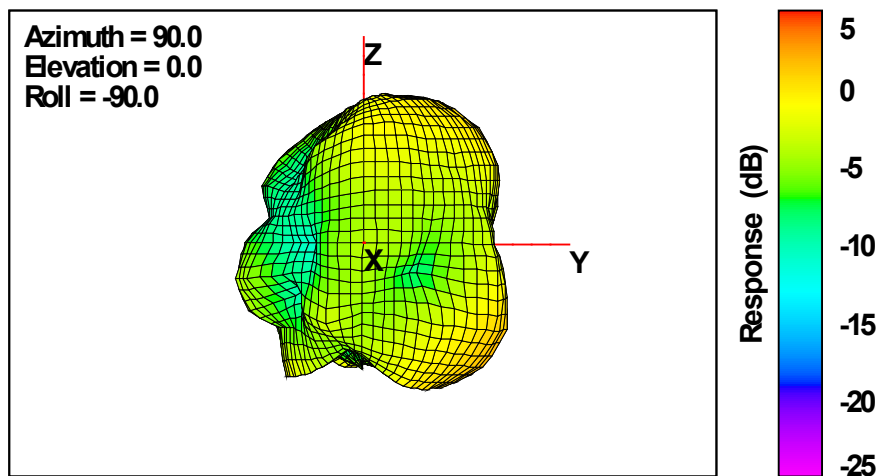


Frequency (MHz)	2450
Average Gain (dBi)	-2.75
Peak Gain (dBi)	2.14
Efficiency (%)	53.09


**2500MHz
Total**

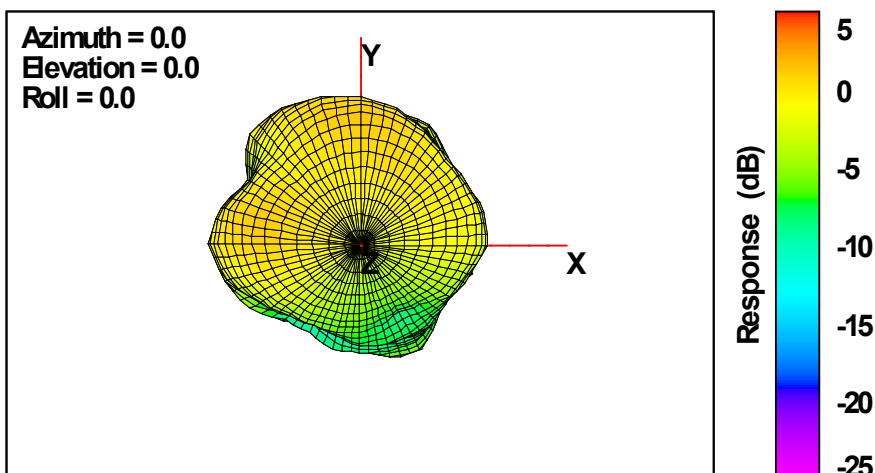

Total

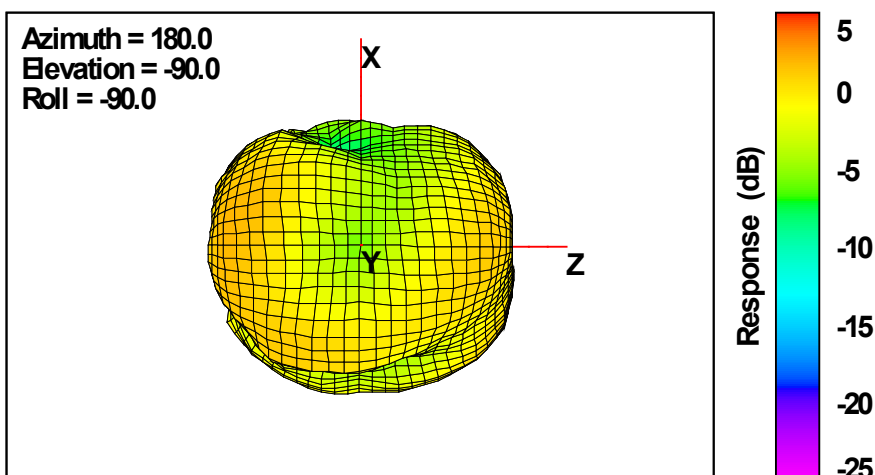


Total

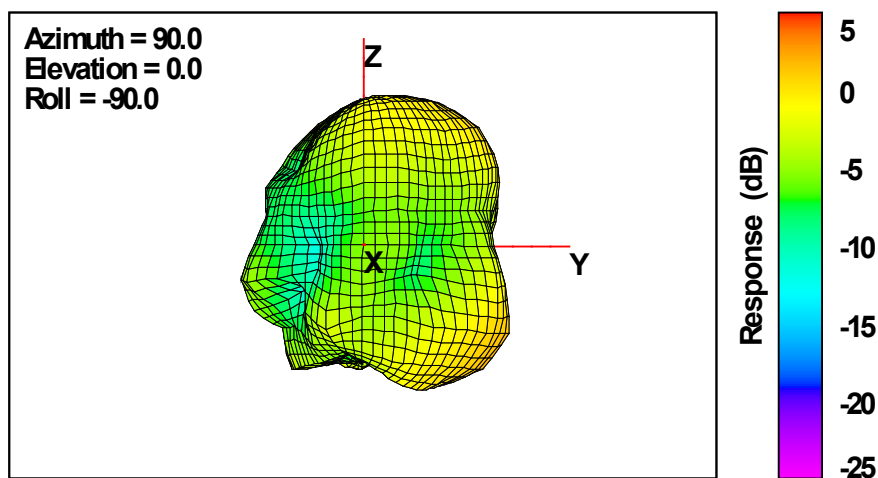


Frequency (MHz)	2500
Average Gain (dBi)	-2.79
Peak Gain (dBi)	2.03
Efficiency (%)	52.65


**5150MHz
Total**

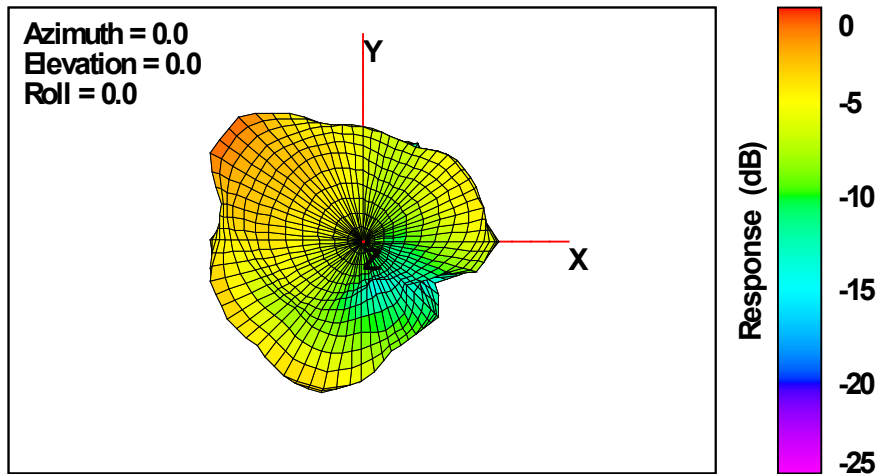

Total

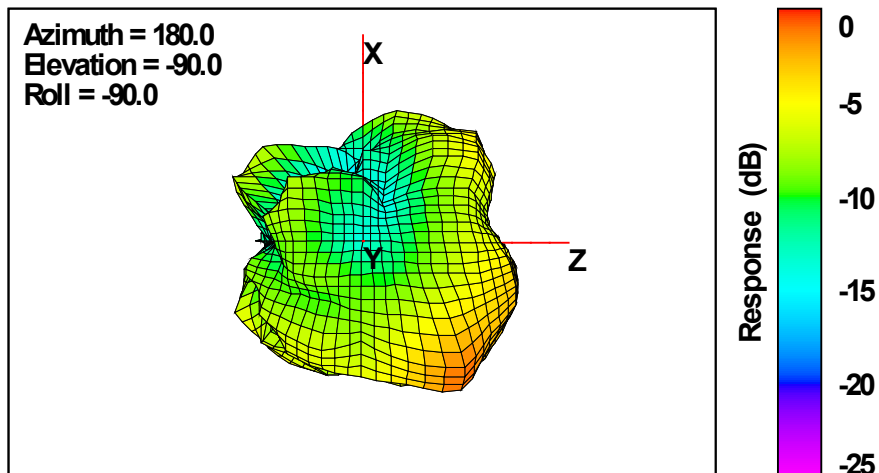


Total

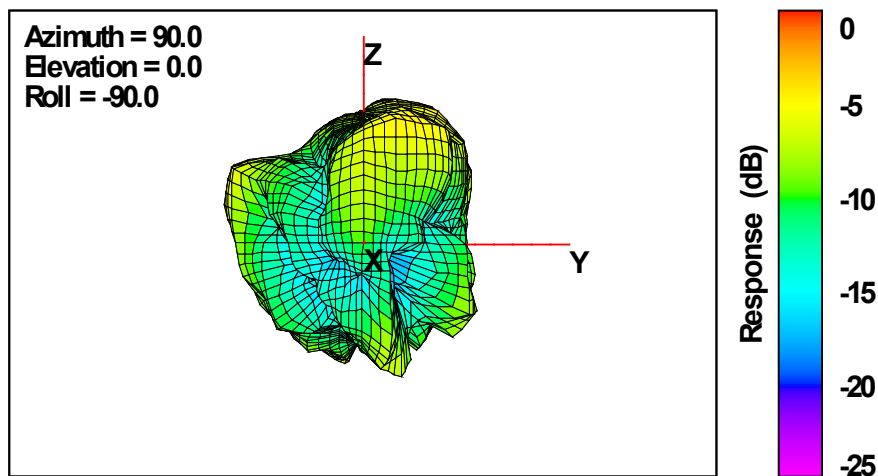


Frequency (MHz)	5150
Average Gain (dBi)	-7.76
Peak Gain (dBi)	-0.55
Efficiency (%)	16.76


**5250MHz
Total**

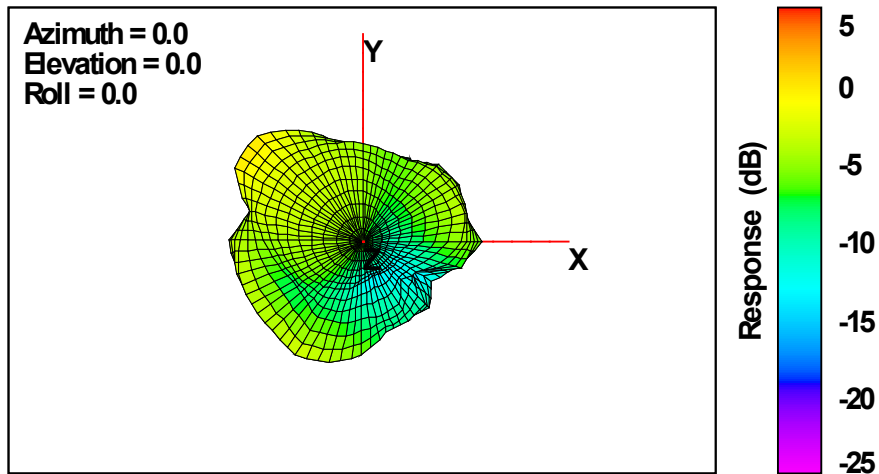

Total

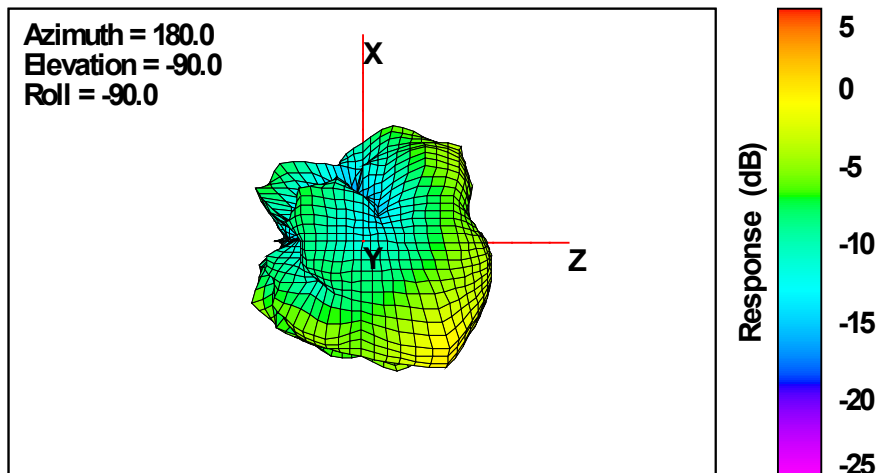


Total

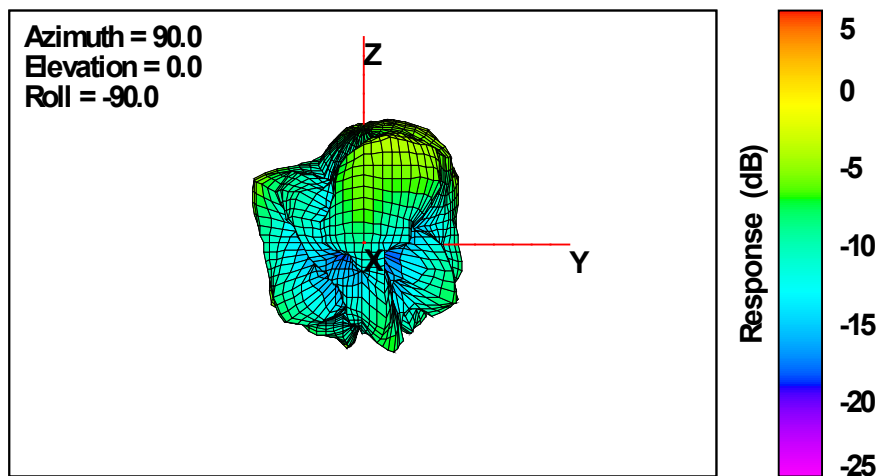


Frequency (MHz)	5250
Average Gain (dBi)	-7.29
Peak Gain (dBi)	0.22
Efficiency (%)	18.67


**5350MHz
Total**

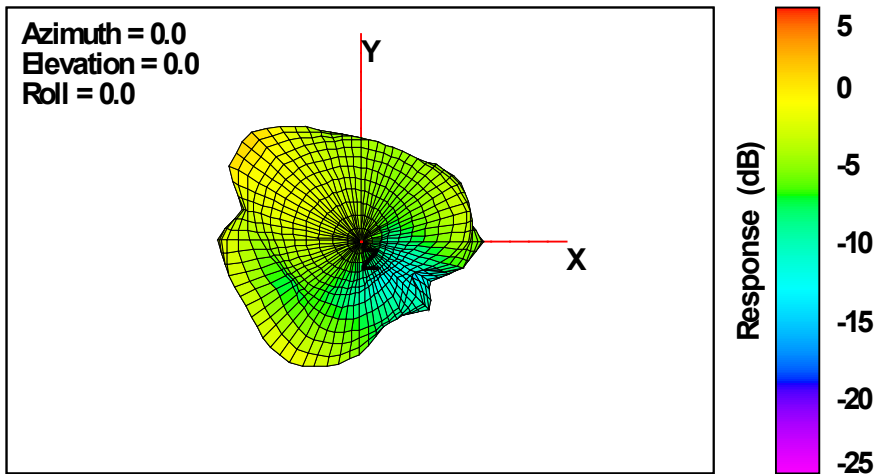

Total

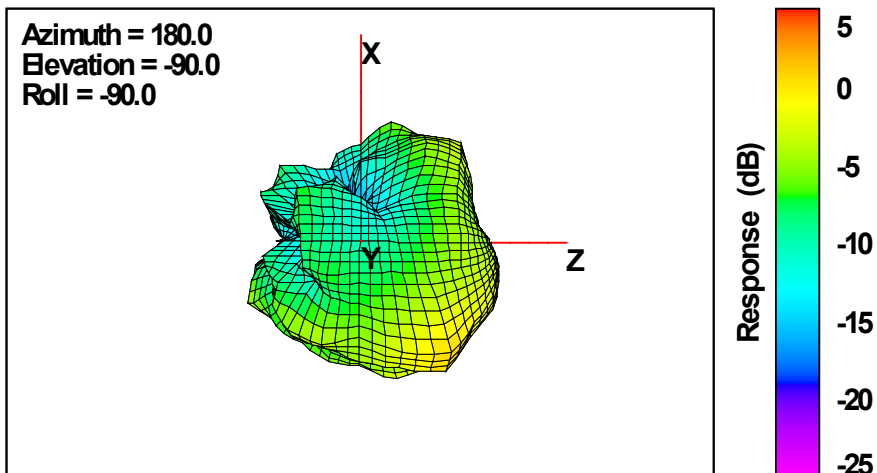


Total

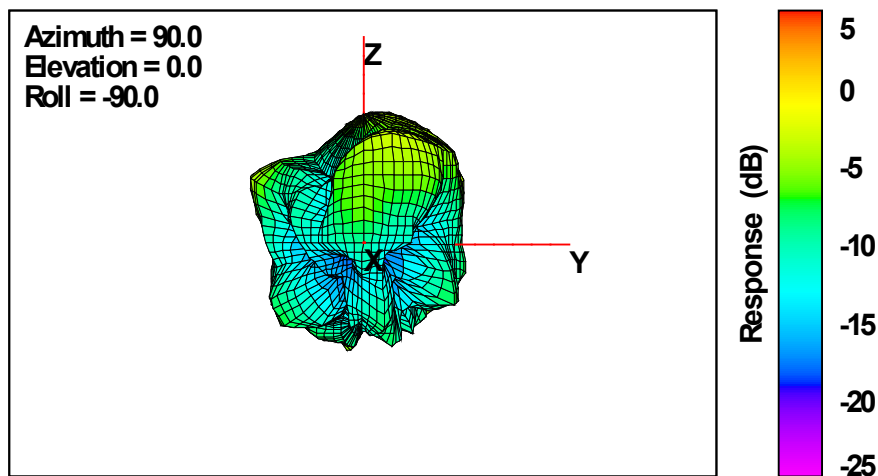


Frequency (MHz)	5350
Average Gain (dBi)	-6.65
Peak Gain (dBi)	1.10
Efficiency (%)	21.65


**5500MHz
Total**

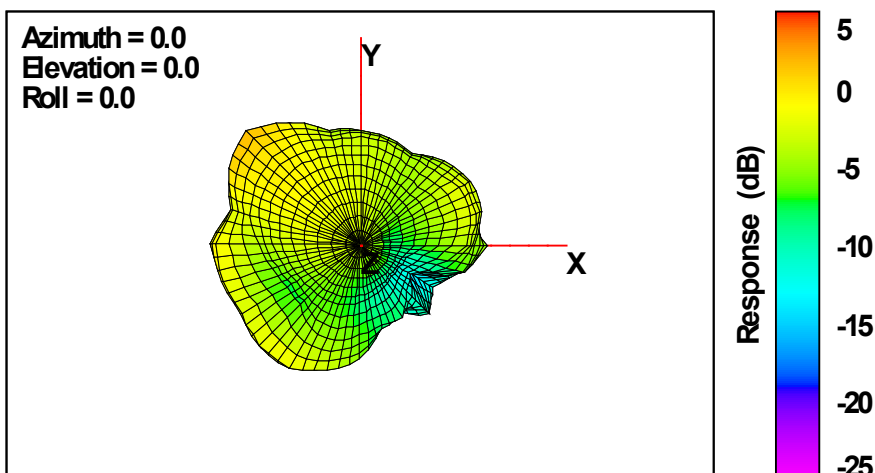

Total

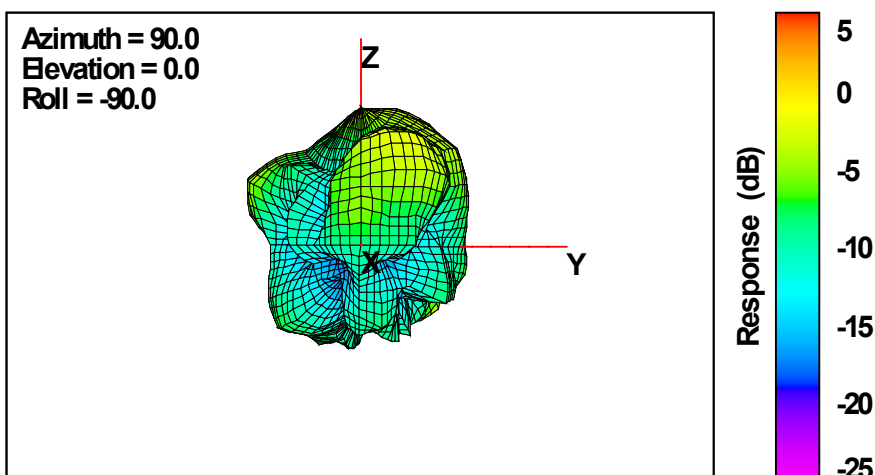


Total

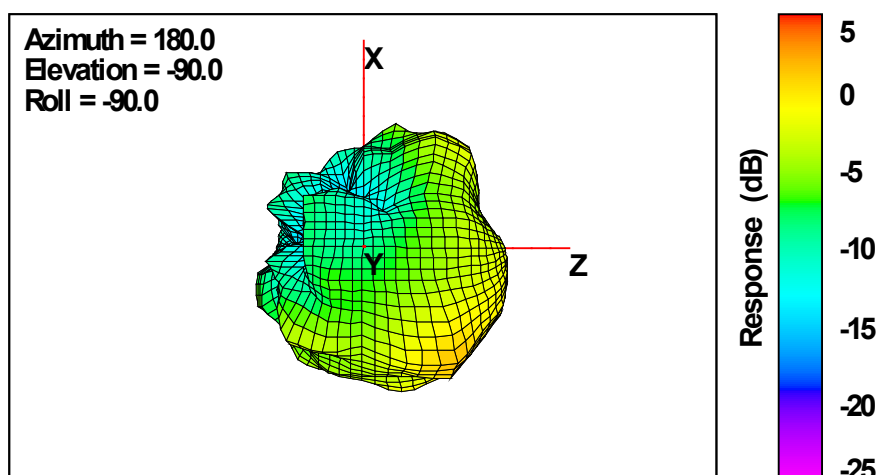


Frequency (MHz)	5500
Average Gain (dBi)	-5.89
Peak Gain (dBi)	2.17
Efficiency (%)	25.74


**5725MHz
Total**

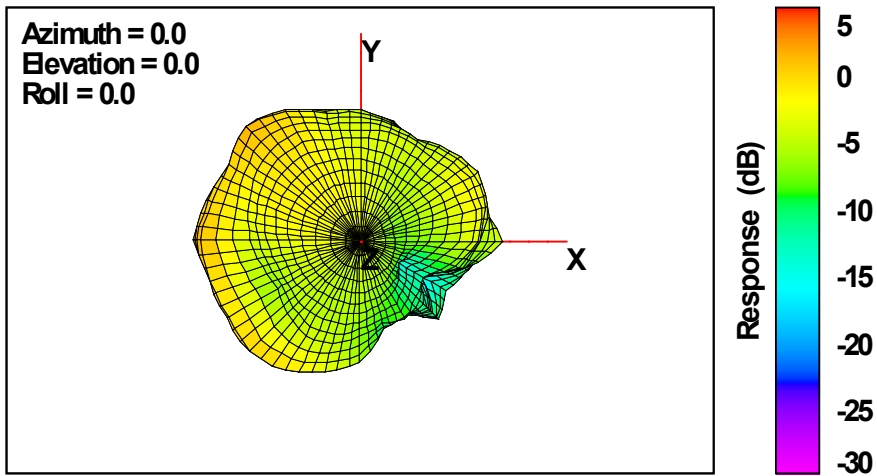

Total

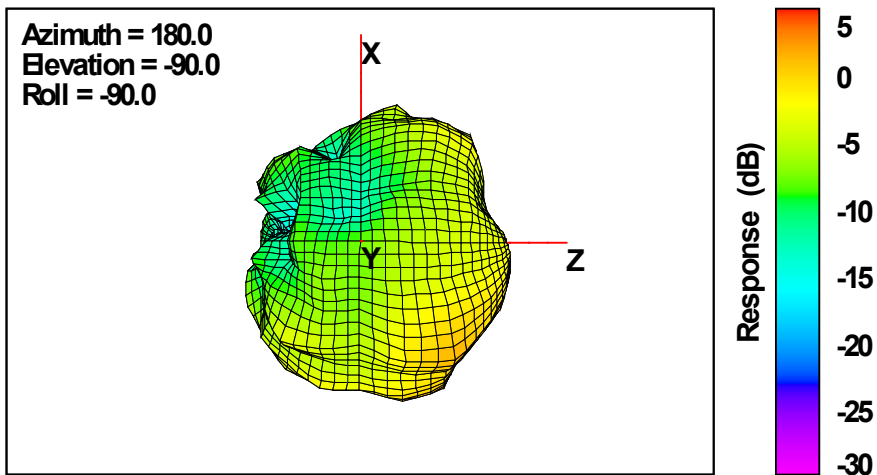


Total

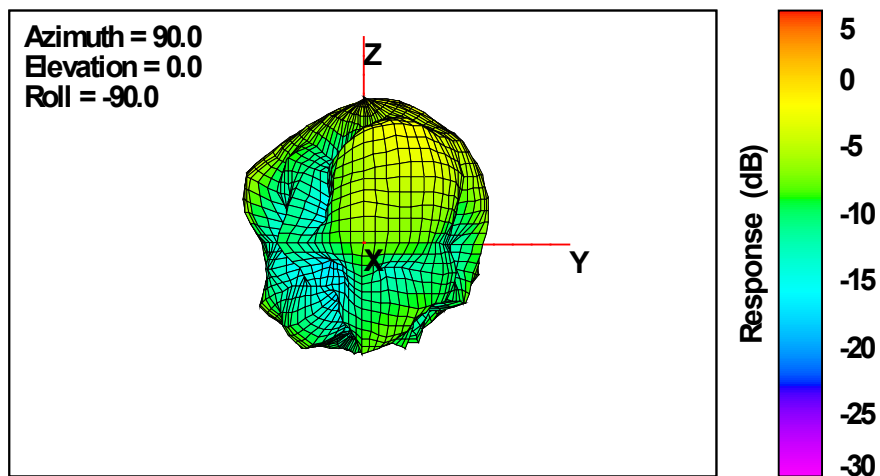


Frequency (MHz)	5725
Average Gain (dBi)	-5.35
Peak Gain (dBi)	1.98
Efficiency (%)	29.15


**5825MHz
Total**

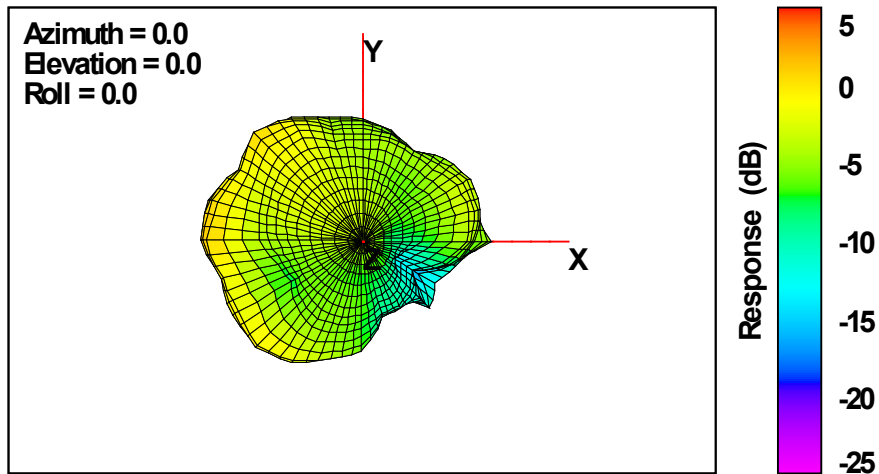

Total

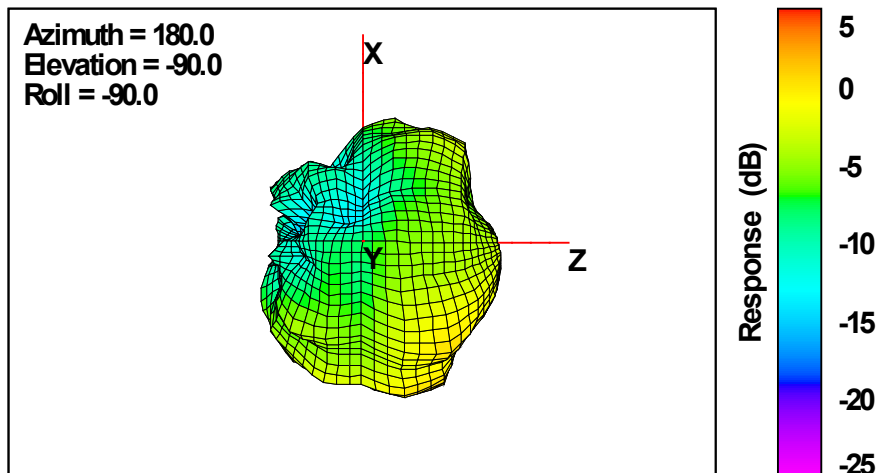

Total

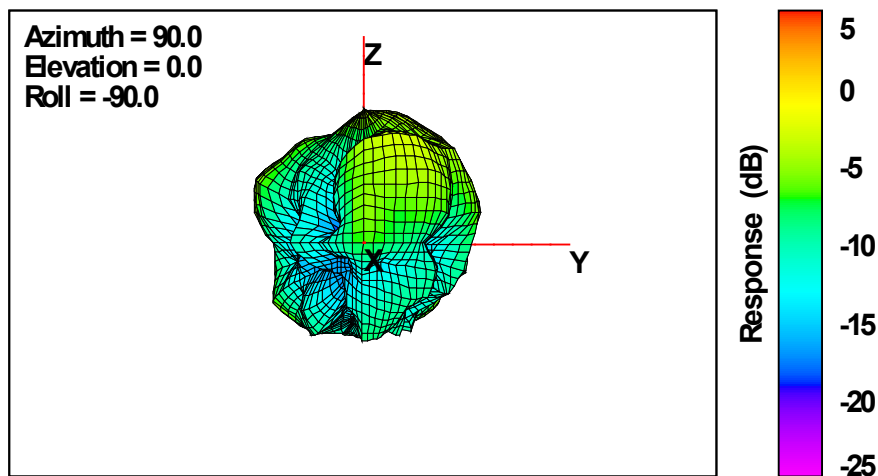

Frequency (MHz)	5825
Average Gain (dBi)	-5.81
Peak Gain (dBi)	1.35
Efficiency (%)	26.22

APPENDIX. EUT photograph

