



Operating Instructions

0.5W Handheld walkie talkie

Model NO: 4913

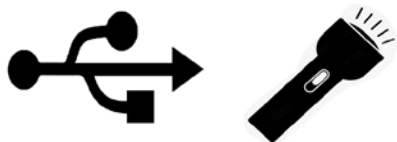

Safety Information and Warnings

Information on Safe Operation

Read This Information Before Using Your Radio.

The operation of your radio in Your country is subject to conditions in the following license:

Radio Antenna

Do not use any radio that has a damaged antenna. If a damaged antenna comes in contact with the skin, a minor burn may result.

Unauthorized antennas, modifications, or attachments could damage the radio and violate compliance.

Do NOT change or modify the antenna.

Do NOT hold the antenna when the radio is "IN USE." Holding the antenna reduces range and may cause bodily harm.

Safety and general use whilst in a vehicle

Check the State and Federal laws and regulations regarding the use of two way radios in the area where you drive, and always obey them.

For Vehicles fitted with Air Bags

Do not place your radio in the area over an air bag or in the air bag deployment area. Air bags inflate with great force.

If a radio is placed in the air bag deployment area and the air bag inflates, the radio may be propelled with great force and Cause serious injury to the occupants of the vehicle.

Batteries

All batteries can cause property damage and/or bodily injury such as burns if conductive material such as jewellery, keys, or Beaded chains touches exposed terminals. The material may complete an electrical circuit (short circuit) and become quite hot. Exercise care in handling any charged battery, particularly when placing it inside a pocket, purse, or other container with metal objects.

Do not replace or charge batteries in a potentially explosive atmosphere. Contact sparking may occur while installing or removing batteries and cause an explosion.

Potentially Explosive Atmospheres

Turn your radio OFF when in any area with a potentially explosive atmosphere. Sparks in such areas could cause an explosion or fire resulting in injury or even death.

NOTE: Areas with potentially explosive atmospheres are often, but not always clearly marked.

They include fueling areas such as below deck on boats; fuel or chemical transfer or storage facilities;

areas where the air contains chemicals or particles, such as grain, dust, or metal powders;

and any other area where you would normally be advised to turn off your vehicle engine.

Blasting Caps and Areas

To avoid possible interference with blasting operations, turn your radio OFF near electrical blasting caps or in a "blasting area" or in areas posted: "Turn off the two way radio." Obey all signs and instructions.

Transmit and Receive Procedure

Your two-way radio contains a transmitter and a receiver. To control your exposure and ensure compliance with the general population/uncontrolled environment exposure limits, always adhere to the following procedure:

- Transmit no more than 50% of the time. To receive calls, release the PTT button.

To transmit (talk), press the Push to Talk (PTT) button. Transmitting 50% of the time, or less, is important because the radio generates measurable RF energy exposure only when transmitting (in terms of measuring standards compliance).

Always hold the radio approximately 5cm in front of your mouth with the antenna pointing away from your head.

Radio Operation and EME Exposure

Unauthorized antennas, modifications, or attachments could damage the radio and violate Compliance.

Do NOT hold the antenna when the radio is "IN USE." Holding the antenna reduces the effective range.

Do not use the radio if the antenna is damaged. If a damaged antenna makes contact with your skin,

a minor burn can result. If you wear a radio on your body when transmitting, always fit the radio on the belt clip (supplied).

Always ensure the radio and it's antenna are at least 5cm from your body when transmitting.

Electromagnetic Interference/Compatibility

Nearly every electronic device is susceptible to electromagnetic interference (EMI). To avoid the possibility of electromagnetic interference and/or compatibility conflicts, turn off your radio in any location where posted notices instruct you to do so such

as health care facilities.

Aircraft

When instructed to do so, turn off your radio when onboard an aircraft. Any use of a radio must be in accordance with applicable regulations per airline crew instructions.

Medical Devices – Pacemakers

The Advanced Medical Technology Association recommends that a minimum separation of 6 inches (15cm) be maintained between a handheld wireless radio and a pacemaker. These recommendations are consistent with the independent research by and recommendations of the U.S. Food and Drug Administration. People with pacemakers should:

- ALWAYS keep the radio more than 15cm from their pacemaker when the radio is turned ON.
- Not carry the radio in the breast pocket.
- Use the ear opposite the pacemaker to minimise the potential for interference.
- Turn the radio OFF immediately if there is any reason to suspect that interference is taking place.

Medical Devices ---Hearing Aids

Some radios may interfere with some hearing aids. In the event of such interference, you may want to consult your hearing aid manufacturer to discuss alternatives.

Other Medical Devices

If you use any other personal medical device, consult the manufacturer of your device to determine if it is adequately shielded from RF energy. Your physician may be able to assist you in obtaining this information.

General warnings

Never use your radio outdoors during a thunderstorm. Keep the radio out of reach of babies and young children.

INSTALLATION

Removing the belt clip

Pull the belt clip latch away from the unit.

See picture as right



Installing the Batteries

FOR USE OF RECHARGEABLE BATTERIES:

If your walkie talkie comes with a rechargeable battery , USB cable, dual USB adaptor and dual USB car charger.

The fully charging time is about 12 hours,during charging ,the battery icon will flash,when it is charged full,the battery icon Will stop flash.

The USB cable, adaptor and car charger will only charge the AAA ni-mAh rechargeable battery or ni-mAh rechargeable battery pack which provided and not other types of rechargeable batteries.After placing batteries into correct positions, replace the battery cover.

Remarks:Dont charge the alkaline battery

FOR USE OF NON RECHARGEABLE BATTERIES:

- 1.Slide down the battery compartment cover.
- 2.Insert 3 x AAA batteries (not included).
- 3.Position the batteries according to the polarity marking on the battery compartment.

After placing batteries into correct positions,replace the battery cover.

Low Battery Meter Indicator

The radio can detect the low battery level when the battery voltage goes low. The battery icon will display the low battery status.

When battery voltage is low, the empty battery symbol will appear and walkie talkie alaming until it totally drains the battery voltage then you will have to replace the batteries.

Transmitting Range

The talk range will depend on your surroundings and environment it will be affected by obstructions such as hills or buildings.

Don't try to use two radio units which are less than 1.5m (5 feet) apart. Otherwise, you may experience interference.

Talk range depends on the terrain. It will be affected by concrete structures, heavy foliage and by operating radios indoors or in vehicles.



- BB** CTCSS Code. Changes from 1 to 38 as selected by the user.

- Battery icon** Displays the Battery charge level. When the bars are reduced, the battery needs recharging.

- TX icon** Displayed when transmitting a signal.

- RX icon** Displayed when receiving a signal.

- Key icon** Displayed when locked

- VOX icon** Displayed when the VOX feature is enabled.

Operating the unit

Turning unit on/off:

1-- Switching on

Press and hold the **Menu/PWR** until you hear a beep sound.

2-- Switching off

Press and hold the **Menu/PWR** until you hear a beep sound.

Adjusting the Volume:

You have 8 preset volume levels. To raise the volume press the **Up / MON** button and to decrease the volume, press the

Down /SC button ,press PTT button to confirm.

Key lock:

Press & hold **Lock/Torch** button 4 second ,the unit will be locked and lock icon will be displayed in the LCD screen ,when the units is locked ,only **Lock/Torch** button , **PWR** button, **PTT** button can be available ,Press & hold **Lock/Torch** button 3 second,it will be unlocked.

Torch:

Press **Lock/Torch** button ,it will be on , Press **Lock/Torch** button again,it will be off .when the unit is turn off ,the torch still can be on/off by **Lock/Torch** button

Auto scan.

Press & hold the **Down /SC** button for 3 seconds to activate auto scan,Press **Menu/PWR** button or **PTT** button to deactivate auto scan.

Monitor (Zero squelch)

Press & hold the **Up / MON** button for 2 seconds to activate monitor.

Press **Up / MON** button again to deactivate monitor.

Changing Channels

You have channels with the legal frequency at your disposal. To communicate with another device, you must both be on the same channel. To change channels, once you have turned your unit on, press the **Menu/PWR** once and use the **Up/Down** button to scroll through to your desired channel. To set your desired channel, press the **PTT** button to confirm changes.

Your unit is simplex "one way at a time". While you are speaking, you can not receive a Transmission.

Your unit is an open--license band. Always identify yourself when transmitting on the same channel.

IMPORTANT: Before transmitting on a channel listen to ensure it is not already in use.

CTCSS/DCS

Press the **Menu/PWR** button twice and use the **Up/ Down** to introduce CTCSS/DCS Continuous Tone--Coded Squelch System or CTCSS is a circuit that is used to reduce the annoyance of listening to other users on a shared two--way radio communications channel. It basically allows a private CH on a busy stream.

CTCSS = Coded tone controlled squelching system. This allows you to talk on a private sub channel on an active channel.

DCS is a digital extension of CTCSS.

DCS=DCS is a digital extension of CTCSS.It provides extra,digitally coded,squelch codes that follow after the 38 CTCSS codes.

CTCSS 1 to 38 ,followed by DCS 39-99.

VOX

voice operated transmitter ,it allows you to transmit with your voice without pressing the button.

Your communicator is equipped with an adjustable Voice Operated Transmitter(VOX) that can be used for automatic voice transmission.

In this convenient mode,transmission is automatically initiated by speaking into the microphone.There is no need to push the button.

By press **Menu/PWR** button 3 times,screen will display VOX character,character OF keep flashing,Press **Up** or **Down** button to select voice level(from 1 to 3 level or OF),by press **PTT** button to confirm setting,VOX default setting as off.

CA

Call allows you to adjust different tones for calling the operator from the same channel.

Press **Menu/PWR** button 4 times,screen will display CA character,digital 01 keep flashing,by press **Up** or **Down** button to select call tone from 01~10,press **PTT** button to confirm call tone setting,default setting for call tone is 01.

There are 10 mode call tones in this unit,you and other party can use designed call tone to communicate separately,secretly to avoid any disturb.To activate this feature,With the unit in normal mode, press twice quickly and release the PTT button to send a tone to other users on the same channel.

Key tone

Symbol on the display when Key tone is opened.

Press **Menu** button 5 times,screen will display tO ON(Key tone is opened),press **Up /MON** button to choose ON or **Down/SC** button to choose OF.Default setting is ON,press the **PTT** button to confirm changes.

Roger Beep

Roger beep means a tone added to the end of broadcast, it indicates that the user/operator has conclude speaking.

This is a tone which is automatically transmitted whenever the **PTT** button is released.

This alerts the receiving party that you have ended the transmission, and you are now in receive mode.

Press **Menu/PWR** button 6 times,screen will display ro ON,press **Up** or **Down** button to choose ro OF or ON,press the **PTT** button to confirm changes.

TOT

time out timer means the unit will automatically stop transmit after 30sec or 60 sec continuously transmit.

Press **Menu** button 7 times,screen will display tt 60(TOT 60 sec is on),press **Up** or **Down** button can choose 60 or 30 seconds or OF.Default setting is 60 seconds,press the **PTT** button to confirm changes.

Transmitting (sending speech)

The unit is continuously in the Receive mode when the unit is turned ON and not transmitting.

When a signal is received on the current channel, receive icon will be displayed on the LCD screen.

a.Press and hold the **PTT** (Push to Talk) button to transmit your voice. The transmit signal icon will display on the LCD screen.

b. Hold the unit in a vertical position with the Mic (Microphone) 5cm away from the mouth. While holding the **PTT** button, speak into the microphone in a normal tone of voice.

c. Release the **PTT** button when you have finished transmitting.For others to receive your transmission, they must be on the same

channel as you.

Reset the unit

Take away the battery from walkie talkie battery compartment,then hold the Menu/PWR button meanwhile put back the battery to walkie talkie battery compartment in right polarity,the unit will turn on and display CH 1 OF ,at this time ,release the Menu/PWR button.

Channel and Frequency (MHz)

USA(22ch)

Ch.	Frequency	Ch.	Frequency	Ch.	Frequency	Ch.	Frequency
1	462.5625	7	462.7125	13	467.6875	19	462.6500
2	462.5875	8	467.5625	14	467.7125	20	462.6750
3	462.6125	9	467.5875	15	462.5500	21	462.7000
4	462.6375	10	467.6125	16	462.5750	22	462.7250
5	462.6625	11	467.6375	17	462.6000		
6	462.6875	12	467.6625	18	462.6250		

TROUBLE SHOOTING GUIDE

PROBLEM	GUIDE
No power or radio switches off after short time	1: Check charger and correct battery installation. 2: Clean battery contacts(Important!) . 3: Replace battery by fully charged or a new battery . 4: Battery capacity poor: battery defective or at end of lifetime replace battery.
I cannot communicate with other group members	1: Verify,that the channel frequency and the CTCSS are the same in the whole group.If you use factory default programming ,this is automatically ok if all members of your group use the same channel number. 2: The other group members are not with the radio coverage.
You can hear the voice from other users,but they cannot hear you	1: Please change your setting to exactly the same number as the partners are using .
Others hear my voice with interruptions only	1: Too weak signal-too far away . 2: External mic defective? Please let service technical check.

I hear too many stations from outside my group	1: Another group is using the same channel number -change channel
--	---

Caution:

Battery

- 1: If you use Alkaline battery ,please use AAA size battery ,but dont attempt to charge alkaline batteries.
- 2: Please dont mix old and new batteries ,it will affect the battery lifetime .
- 3: Do not mix alkaline,standard (carbon-zinc),or rechargeable(Ni-Cd,Ni-MH,etc.)batteries.
- 4: Alkaline battery have expiry time ,please make sure the battery are valid.

FCC Caution:

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

IMPORTANT NOTE:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Safety Information for Radios

Your wireless handheld portable transceiver contains a low power transmitter. When the talk button is pushed, it sends out radio frequency (RF) signals. The device is authorized to operate at a duty factor not to exceed 50%. In August 1996, the Federal Communications Commissions (FCC) adopted RF exposure guidelines with safety levels for handheld wireless devices.

Important

FCC RF Exposure Requirements: For body-worn operation, this radio has been tested and meets the FCC RF exposure guidelines when used with accessories supplied or designated for this product. Use of other accessories may not ensure compliance with FCC RF exposure guidelines. Use only the supplied antenna. Unauthorized antennas, modifications or attachments could damage the transmitter and may violate FCC regulations.

Normal Position

Hold the transmitter approximately 25 mm from your face and speak in a normal voice, with the antenna pointed up and away.