



Test Report No.: RF161008W001-5



FCC TEST REPORT (PART 27)

Product: LTE Digital Mobile Phone

Model Name: NX529J/ nubia Z11 mini

FCC ID: 2AHJO-NX529J

Applicant: Nubia Technology Co., Ltd.
10/F, Tower A, Hans Innovation Mansion, North Ring Rd., No.
Address: 9018, Hi-Tech Industrial Park, Nanshan District, Shenzhen,
P.R.China

Manufacturer: Nubia Technology Co., Ltd.
10/F, Tower A, Hans Innovation Mansion, North Ring Rd., No.
Address: 9018, Hi-Tech Industrial Park, Nanshan District, Shenzhen,
P.R.China

Prepared by: Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch

Lab Location: No. 34, Chenwulu Section, Guantai Rd., Houjie Town, Dongguan
City, Guangdong 523942, China

TEL: +86 769 8593 5656

FAX: +86 769 8593 1080

E-MAIL: customerservice.dg@cn.bureauveritas.com

Report No.: RF161008W001-5

Received Date: Oct. 08, 2016

Test Date: Oct. 09, 2016 ~ Oct. 28, 2016

Issued Date: Oct. 30, 2016

This report should not be used by the client to claim product certification, approval, or endorsement by A2LA or any government agencies.

This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



TABLE OF CONTENTS

RELEASE CONTROL RECORD	4
1 CERTIFICATION.....	5
2 SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	6
2.2 TEST SITE AND INSTRUMENTS	7
3 GENERAL INFORMATION.....	8
3.1 GENERAL DESCRIPTION OF EUT.....	8
3.2 CONFIGURATION OF SYSTEM UNDER TEST	11
3.3 DESCRIPTION OF SUPPORT UNITS.....	12
3.4 DESCRIPTION OF TEST MODES.....	12
3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS.....	18
4 TEST TYPES AND RESULTS	19
4.1 OUTPUT POWER MEASUREMENT	19
4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT	19
4.1.2 TEST PROCEDURES	19
4.1.3 TEST SETUP.....	20
4.1.4 TEST RESULTS	21
4.2 FREQUENCY STABILITY MEASUREMENT	37
4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT.....	37
4.2.2 TEST PROCEDURE	37
4.2.3 TEST SETUP.....	37
4.2.4 TEST RESULTS	38
4.3 OCCUPIED BANDWIDTH MEASUREMENT	40
4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT	40
4.3.2 TEST SETUP.....	40
4.3.3 TEST PROCEDURES	40
4.3.4 TEST RESULTS	41
4.4 PEAK TO AVERAGE RATIO	48
4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT.....	48
4.4.2 TEST SETUP.....	48
4.4.3 TEST PROCEDURES	48
4.4.4 TEST RESULTS	49
4.5 BAND EDGE MEASUREMENT	56
4.5.1 LIMITS OF BAND EDGE MEASUREMENT	56
4.5.2 TEST SETUP.....	56
4.5.3 TEST PROCEDURES	57
4.5.4 TEST RESULTS	58
4.6 CONDUCTED SPURIOUS EMISSIONS.....	71
4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	71
4.6.2 TEST PROCEDURE.....	71
4.6.3 TEST SETUP.....	71
4.6.4 TEST RESULTS	72
4.7 RADIATED EMISSION MEASUREMENT.....	76
4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT	76
4.7.2 TEST PROCEDURES	76
4.7.3 DEVIATION FROM TEST STANDARD	76



**BUREAU
VERITAS**

Test Report No.: RF161008W001-5

4.7.4	TEST SETUP	77
4.7.5	TEST RESULTS	78
5	INFORMATION ON THE TESTING LABORATORIES	106
6	APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	107



Test Report No.: RF161008W001-5

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF161008W001-5	Original release	Oct. 30, 2016



Test Report No.: RF161008W001-5

1 CERTIFICATION

PRODUCT: LTE Digital Mobile Phone
BRAND NAME: Nubia
MODEL NAME: NX529J/ nubia Z11 mini
APPLICANT: Nubia Technology Co., Ltd.
TESTED: Oct. 09, 2016 ~ Oct. 28, 2016
TEST SAMPLE: Identical Prototype
TEST STANDARDS: **FCC Part 27, Subpart C, L**
FCC Part 2
ANSI/TIE/EIA-603-D

The above equipment has been tested by **Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Yuqiang Yin , **DATE:** Oct. 30, 2016
(Yuqiang Yin/ Engineer)

APPROVED BY : Bill Yao , **DATE:** Oct. 30, 2016
(Bill Yao / Manager)



2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 27 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(d)(4)	Maximum Peak Output Power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability	PASS	Meet the requirement of limit.
2.1049 27.53(h)	Occupied Bandwidth	PASS	Meet the requirement of limit.
27.50(d)(5)	Peak to average ratio	PASS	Meet the requirement of limit.
27.53(h)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(h)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(h)	Radiated Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -18.16dB at 36.79MHz.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.66dB
Radiated emissions	9KHz ~ 30MHz	2.74dB
	30MHz ~ 1GMHz	3.55dB
	1GHz ~ 18GHz	4.84dB
	18GHz ~ 40GHz	1.94dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



2.2 TEST SITE AND INSTRUMENTS

Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Next Cal.
EMI Test Receiver	Rohde&Schwarz	ESR7	101494	Apr. 05,16	Apr. 04,17
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV7	102331	Nov. 09,15	Nov. 08,16
Signal and Spectrum Analyzer	Rohde&Schwarz	FSV40	101094	Apr. 05,16	Apr. 04,17
Bilog Antenna 1	Teseq	CBL 6111D	30643	Jul. 14, 16	Jul. 13, 17
Bilog Antenna 2	Teseq	CBL 6111D	27089	Jul. 14, 16	Jul. 13, 17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062558	May 18,16	May 17,17
Horn Antenna (1GHz -18GHz)	ETS -Lindgren	3117	00062557	May 18,16	May 17,17
3m Semi-anechoic Chamber	ETS-LINDGREN	9m*6m*6m	NSEMC003	Mar. 12,16	Mar. 11,18
Test Software	ADT	ADT_Radiated_V7.6.15.9.2	N/A	N/A	N/A
10dB Attenuator	JFW/USA	50HF-010-SM A	1505	Jul. 27, 16	Jul. 26, 17
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170147	Mar. 12,16	Mar. 11,17
Horn Antenna (15GHz-40GHz)	SCHWARZBECK	BBHA 9170	BBHA9170242	Mar. 12,16	Mar. 11,17
Amplifier	Burgeon	BPA-530	100220	Apr. 05,16	Apr. 04,17
Amplifier (9kHz-1GHz)	SONOMA	310D	186955	Mar. 04,16	Mar. 03, 17
Pre-Amplifier(1-18G)	HP	8449B	3008A00409	Apr. 25,16	Apr. 24,17
Pre-Amplifier (18GHz-40GHz)	EMCI	EMC 184045	980102	Nov. 20,15	Nov. 19,16
Humid & Temp Programmable Tester	Haida	HD-2257	110807201	Sep.05,16	Sep. 04,17
Signal Generator	Agilent	N5183A	MY50140980	Nov. 09,15	Nov. 08,16

- NOTE:**
1. The calibration interval of the above test instruments is 12 months or 24 months and the calibrations are traceable to CEPREI/CHINA, GRGT/CHINA and NIM/CHINA.
 2. The test was performed in Dongguan 966 Chamber.
 3. The horn antenna are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 502831.



3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	LTE Digital Mobile Phone	
MODEL NAME	NX529J/ nubia Z11 mini	
POWER SUPPLY	5.0Vdc (adapter or host equipment) 3.85Vdc (battery)	
MODULATION TECHNOLOGY	WCDMA IV	BPSK
	LTE	QPSK, 16QAM
FREQUENCY RANGE	WCDMA IV	1712.4MHz ~ 1752.6MHz
	LTE Band 4 Channel Bandwidth: 1.4MHz	1710.7MHz ~ 1754.3MHz
	LTE Band 4 Channel Bandwidth: 3MHz	1711.5MHz ~ 1753.5MHz
	LTE Band 4 Channel Bandwidth: 5MHz	1712.5MHz ~ 1752.5MHz
	LTE Band 4 Channel Bandwidth: 10MHz	1715.0MHz ~ 1750.0MHz
	LTE Band 4 Channel Bandwidth: 15MHz	1717.5MHz ~ 1747.5MHz
	LTE Band 4 Channel Bandwidth: 20MHz	1720.0MHz ~ 1745.0MHz
	LTE Band 12 Channel Bandwidth: 1.4MHz	699.7MHz ~ 715.3MHz
	LTE Band 12 Channel Bandwidth: 3MHz	700.5MHz ~ 714.5MHz
	LTE Band 12 Channel Bandwidth: 5MHz	701.5MHz ~ 713.5MHz
	LTE Band 12 Channel Bandwidth: 10MHz	704.0MHz ~ 711.0MHz
	LTE Band 17 Channel Bandwidth: 5MHz	706.5MHz ~ 713.5MHz
	LTE Band 17 Channel Bandwidth: 10MHz	709.0MHz ~ 711.0MHz
	EMISSION DESIGNATOR	WCDMA IV
LTE Band 4 Channel Bandwidth: 1.4MHz		QPSK: 1M09G7D
		16QAM: 1M08W7D
LTE Band 4 Channel Bandwidth: 3MHz		QPSK: 2M68G7D
		16QAM: 2M68W7D
LTE Band 4 Channel Bandwidth: 5MHz		QPSK: 4M48G7D
	16QAM: 4M46W7D	
LTE Band 4 Channel Bandwidth: 10MHz	QPSK: 8M92G7D	
	16QAM: 8M92W7D	



Test Report No.: RF161008W001-5

EMISSION DESIGNATOR	LTE Band 4 Channel Bandwidth: 15MHz	QPSK: 13M4G7D 16QAM: 13M3W7D
	LTE Band 4 Channel Bandwidth: 20MHz	QPSK: 17M9G7D 16QAM: 17M8W7D
	LTE Band 12 Channel Bandwidth: 1.4MHz	QPSK: 1M09G7D 16QAM: 1M08W7D
	LTE Band 12 Channel Bandwidth: 3MHz	QPSK: 2M68G7D 16QAM: 2M68W7D
	LTE Band 12 Channel Bandwidth: 5MHz	QPSK: 4M48G7D 16QAM: 4M46W7D
	LTE Band 12 Channel Bandwidth: 10MHz	QPSK: 8M92G7D 16QAM: 8M92W7D
	LTE Band 17 Channel Bandwidth: 5MHz	QPSK: 4M47G7D 16QAM: 4M46W7D
	LTE Band 17 Channel Bandwidth: 10MHz	QPSK: 8M91G7D 16QAM: 8M92W7D
	MAX. ERP/EIRP POWER	WCDMA IV
LTE Band 4 Channel Bandwidth: 1.4MHz		277mW
LTE Band 4 Channel Bandwidth: 3MHz		289mW
LTE Band 4 Channel Bandwidth: 5MHz		300mW
LTE Band 4 Channel Bandwidth: 10MHz		315mW
LTE Band 4 Channel Bandwidth: 15MHz		295mW
LTE Band 4 Channel Bandwidth: 20MHz		244mW
LTE Band 12 Channel Bandwidth: 1.4MHz		207mW
LTE Band 12 Channel Bandwidth: 3MHz		217mW
LTE Band 12 Channel Bandwidth: 5MHz		217mW
LTE Band 12 Channel Bandwidth: 10MHz		194mW
LTE Band 17 Channel Bandwidth: 5MHz		199mW



Test Report No.: RF161008W001-5

	LTE Band 17 Channel Bandwidth: 10MHz	178mW
ANTENNA TYPE	LTE Band 4	Fixed External Antenna with -2.6dBi
	LTE Band 12	Fixed External Antenna with -3.4dBi
	LTE Band 17	Fixed External Antenna with -3.4dBi
HW VERSION	NX529J_V2CMB_A	
SW VERSION	NX529J_ENCommon_V1.05	
ACCESSORY DEVICE	Refer to note as below	
DATA CABLE	USB cable: non-shielded, detachable, 1.0m	

NOTE:

- For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.
- The EUT was powered by the following adapters:

ADAPTER 1	
BRAND:	RUIDE
MODEL:	STC-A515A-Z
INPUT:	AC 100-240V, 600mA
OUTPUT:	DC 5V, 1500mA

ADAPTER 2	
BRAND:	DOKOCOM
MODEL:	STC-A515A-Z
INPUT:	AC 100-240V, 600mA
OUTPUT:	DC 5V, 1500mA

ADAPTER 3	
BRAND:	Salcomp
MODEL:	STC-A515A-Z
INPUT:	AC 100-240V, 600mA
OUTPUT:	DC 5V, 1500mA


- The EUT matched the following USB cable:

USB CABLE	
RAND:	LIXUN
MODEL:	ZXMT1511003
SIGNAL LINE:	1.0 METER


- The above models are identical except the model name for marketing purpose.
- For the test results, the EUT had been tested with all conditions. But only the worst case was shown in test report.

3.2 CONFIGURATION OF SYSTEM UNDER TEST

FOR RADIATION EMISSION TEST

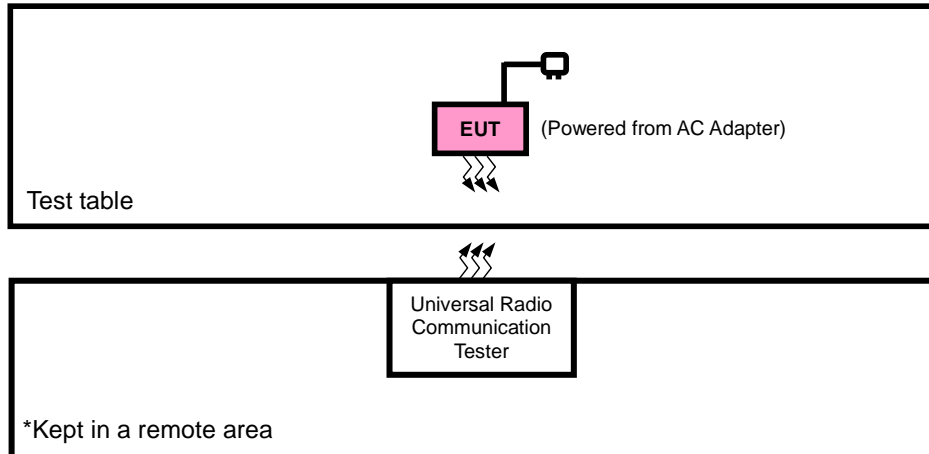

FOR E.R.P./E.I.R.P TEST

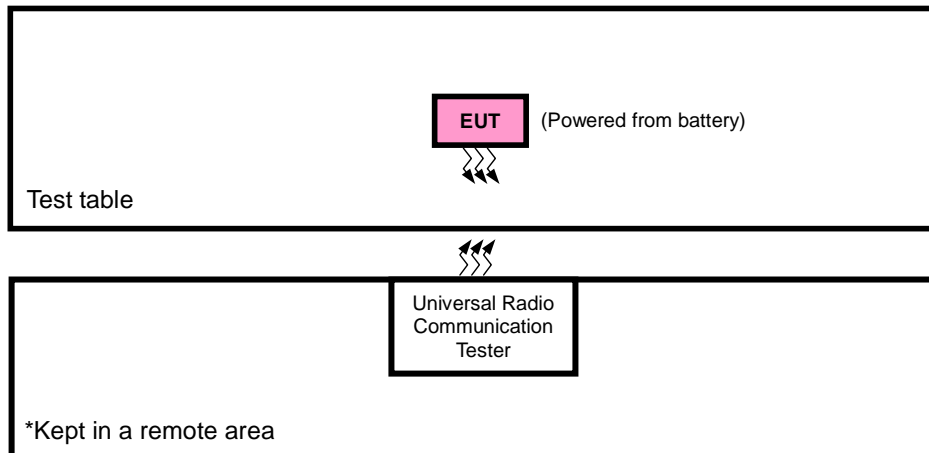



3.3 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	DC source	LONG WEI	PS-6403D	010934269	N/A
2	PC	HP	A6608CN	3CR83825X3	N/A

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	DC Line: Unshielded, Detachable 1.0m
2	AC Line: Unshielded, Detachable 1.5m

NOTE:

- 1. All power cords of the above support units are non shielded (1.8m).

3.4 DESCRIPTION OF TEST MODES

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports. The worst case was found when positioned on X-plane for ERP/EIRP and X-axis for radiated emission. Following channel(s) was (were) selected for the final test as listed below:

EUT CONFIGURE MODE	DESCRIPTION
A	EUT + Adapter + USB Cable with WCDMA or LTE link
B	EUT + Battery + USB Cable with WCDMA or LTE link



Test Report No.: RF161008W001-5

WCDMA MODE

EUT Configure Mode	Test Item	Available Channel	Tested Channel	Mode
A	EIRP	1312 to 1513	1312, 1413, 1513	WCDMA
B	Frequency Stability	1312 to 1513	1413	WCDMA
A	Occupied Bandwidth	1312 to 1513	1312, 1413, 1513	WCDMA
A	Band Edge	1312 to 1513	1312, 1513	WCDMA
A	Peak To Average Ratio	1312 to 1513	1312, 1413, 1513	WCDMA
A	Conducdated Emission	1312 to 1513	1312, 1413, 1513	WCDMA
A	Radiated Emission Below 1GHz	1312 to 1513	1312	WCDMA
A	Radiated Emission Above 1GHz	1312 to 1513	1312, 1413, 1513	WCDMA



LTE BAND 4

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE
-	EIRP	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	FREQUENCY STABILITY	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset
-	OCCUPIED BANDWIDTH	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	6 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	15 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	75 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	100 RB / 0 RB Offset
-	PEAK TO AVERAGE RATIO	19957 to 20393	19957, 20175, 20393	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19965 to 20385	19965, 20175, 20385	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		19975 to 20375	19975, 20175, 20375	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20000 to 20350	20000, 20175, 20350	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20025 to 20325	20025, 20175, 20325	15MHz	QPSK, 16QAM	1 RB / 0 RB Offset
		20050 to 20300	20050, 20175, 20300	20MHz	QPSK, 16QAM	1 RB / 0 RB Offset
-	BAND EDGE	19957 to 20393	19957	1.4MHz	QPSK	1 RB / 0 RB Offset 6 RB / 0 RB Offset
			20393	1.4MHz	QPSK	1 RB / 5 RB Offset 6 RB / 0 RB Offset
		19965 to 20385	19965	3MHz	QPSK	1 RB / 0 RB Offset 15 RB / 0 RB Offset
			20385	3MHz	QPSK	1 RB / 14 RB Offset 15 RB / 0 RB Offset
		19975 to 20375	19975	5MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset
			20375	5MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset
		20000 to 20350	20000	10MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset
			20350	10MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset



Test Report No.: RF161008W001-5

-	BAND EDGE	20025 to 20325	20025	15MHz	QPSK	1 RB / 0 RB Offset
						75 RB / 0 RB Offset
		20050 to 20300	20325	15MHz	QPSK	1 RB / 74 RB Offset
						75 RB / 0 RB Offset
			20050	20MHz	QPSK	1 RB / 0 RB Offset
						100 RB / 0 RB Offset
	20300	20MHz	QPSK	1 RB / 99 RB Offset		
					100 RB / 0 RB Offset	
-	CONDCUDED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset
-	RADIATED EMISSION	19957 to 20393	20175	1.4MHz	QPSK	1 RB / 0 RB Offset
		19965 to 20385	20175	3MHz	QPSK	1 RB / 0 RB Offset
		19975 to 20375	20175	5MHz	QPSK	1 RB / 0 RB Offset
		20000 to 20350	20175	10MHz	QPSK	1 RB / 0 RB Offset
		20025 to 20325	20175	15MHz	QPSK	1 RB / 0 RB Offset
		20050 to 20300	20175	20MHz	QPSK	1 RB / 0 RB Offset

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.



Test Report No.: RF161008W001-5

LTE BAND 12

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
B	ERP	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	1 RB / 0 RB Offset		
B	FREQUENCY STABILITY	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset		
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset		
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset		
		23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset		
B	OCCUPIED BANDWIDTH	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK,16QAM	6 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK,16QAM	15 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK,16QAM	25 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK,16QAM	50 RB / 0 RB Offset		
B	PEAK TO AVERAGE RATIO	23017 to 23173	23017, 23095 , 23173	1.4MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23025 to 23165	23025, 23095 ,23165	3MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23035 to 23155	23035, 23095 ,23155	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23060 to 23130	23060, 23095 ,23130	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
B	BAND EDGE	23017 to 23173	23017	1.4MHz	QPSK	1 RB / 0 RB Offset		
			23173	1.4MHz	QPSK	6 RB / 0 RB Offset		
		23025 to 23165	23025	3MHz	QPSK	1 RB / 5 RB Offset		
			23165	3MHz	QPSK	6 RB / 0 RB Offset		
		23035 to 23155	23035	5MHz	QPSK	1 RB / 0 RB Offset		
			23155	5MHz	QPSK	15 RB / 0 RB Offset		
		23060 to 23130	23060	10MHz	QPSK	1 RB / 14 RB Offset		
			23130	10MHz	QPSK	15 RB / 0 RB Offset		
		B	CONDCUDED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset
				23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset
				23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset
				23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset
A	RADIATED EMISSION	23017 to 23173	23095	1.4MHz	QPSK	1 RB / 0 RB Offset		
		23025 to 23165	23095	3MHz	QPSK	1 RB / 0 RB Offset		
		23035 to 23155	23095	5MHz	QPSK	1 RB / 0 RB Offset		
		23060 to 23130	23095	10MHz	QPSK	1 RB / 0 RB Offset		



Test Report No.: RF161008W001-5

LTE BAND 17

EUT CONFIGURE MODE	TEST ITEM	AVAILABLE CHANNEL	TESTED CHANNEL	CHANNEL BANDWIDTH	MODULATION	MODE		
-	ERP	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
-	FREQUENCY STABILITY	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset		
		23780 to 23800	23790	10MHz	QPSK	1 RB / 0 RB Offset		
-	OCCUPIED BANDWIDTH	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	25 RB / 0 RB Offset		
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	50 RB / 0 RB Offset		
-	PEAK TO AVERAGE RATIO	23755 to 23825	23755, 23790, 23825	5MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
		23780 to 23800	23780, 23790, 23800	10MHz	QPSK, 16QAM	1 RB / 0 RB Offset		
-	BAND EDGE	23755 to 23825	23755	5MHz	QPSK	1 RB / 0 RB Offset 25 RB / 0 RB Offset		
			23825	5MHz	QPSK	1 RB / 24 RB Offset 25 RB / 0 RB Offset		
		23780 to 23800	23780	10MHz	QPSK	1 RB / 0 RB Offset 50 RB / 0 RB Offset		
			23800	10MHz	QPSK	1 RB / 49 RB Offset 50 RB / 0 RB Offset		
		-	CONDCUETED EMISSION	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset
				23780 to 23800	23790	10MHz	QPSK	1 RB / 0 RB Offset
-	RADIATED EMISSION	23755 to 23825	23790	5MHz	QPSK	1 RB / 0 RB Offset		
		23780 to 23800	23790	10MHz	QPSK	1 RB / 0 RB Offset		

Note: This device was tested under all bandwidths, RB configurations and modulations. The worst case was found in QPSK modulation.

TEST CONDITION:

TEST ITEM	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
EIRP(ERP)	24deg. C, 60%RH	3.85Vdc from Battery	Tony
FREQUENCY STABILITY	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
OCCUPIED BANDWIDTH	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
PEAK TO AVERAGE RATIO	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
BAND EDGE	24deg. C, 61%RH	3.85Vdc from Battery	Yuqiang Yin
CONDCUETED EMISSION	24deg. C, 61%RH	5Vdc from adapter	Yuqiang Yin
RADIATED EMISSION	24deg. C, 60%RH	5Vdc from adapter	Tony



Test Report No.: RF161008W001-5

3.5 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27

KDB 971168 D01 Power Meas License Digital Systems v02r02

ANSI/TIA/EIA-603-D

NOTE: All test items have been performed and recorded as per the above standards.



4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

Fixed, mobile, and portable (hand-held) stations operating in the 1710–1755 MHz band are limited to 1 watt EIRP.

Portable stations (hand-held devices) operating in the 699-716 MHz bands are limited to 3 watts ERP.

4.1.2 TEST PROCEDURES

EIRP / ERP MEASUREMENT:


- a. The EUT was set up for the maximum power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 3 channels (low, middle and high operational frequency range). RBW and VBW is 10MHz for LTE.
- b. E.I.R.P power measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The “Read Value” is the spectrum reading the maximum power value.
- c. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to “Read Value” of step a. Record the power level of S.G
- d. $EIRP = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn}$
- e. $E.R.P = E.I.R.P - 2.15 \text{ dB}$

CONDUCTED POWER MEASUREMENT:

- a. The EUT was set up for the maximum power with LTE link data modulation and link up with simulator.
- b. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.


4.1.3 TEST SETUP

EIRP / ERP MEASUREMENT:

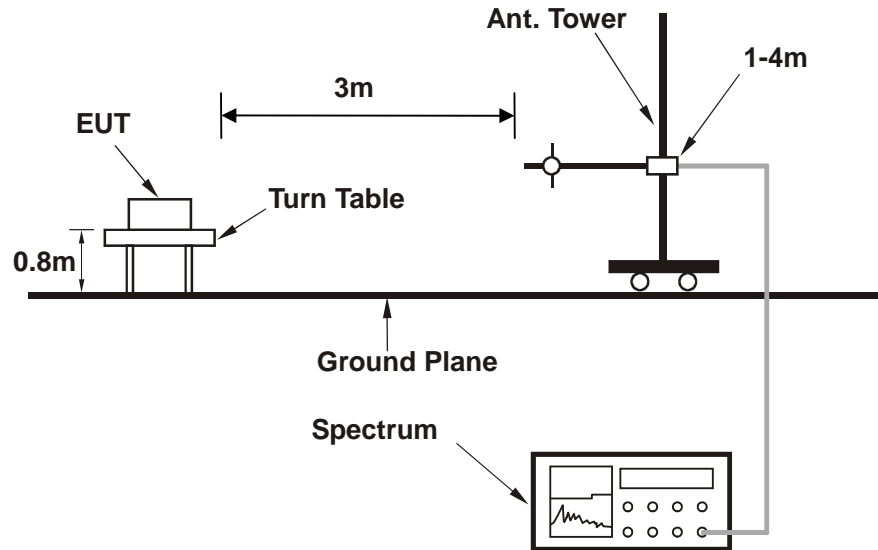

For the actual test configuration, please refer to the attached file (Test Setup Photo).

CONDUCTED POWER MEASUREMENT:

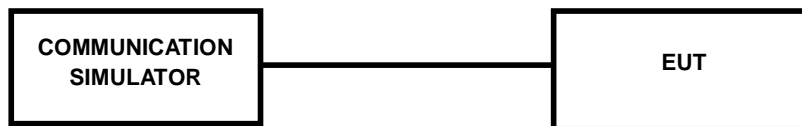

For the actual test configuration, please refer to the attached file (Test Setup Photo).



BUREAU
VERITAS

Test Report No.: RF161008W001-5

4.1.4 TEST RESULTS

AVERAGE CONDUCTED OUTPUT POWER (dBm)

Band	WCDMA IV		
	1312	1413	1513
Channel	1712.4	1732.6	1752.6
Frequency (MHz)	1712.4	1732.6	1752.6
RMC 12.2K	24.09	24.15	24.27
HSPA			
HSDPA Subtest-1	23.06	23.12	23.24
HSDPA Subtest-2	22.98	23.04	23.16
HSDPA Subtest-3	22.62	22.68	22.80
HSDPA Subtest-4	22.61	22.67	22.79
HSUPA Subtest-1	22.88	22.94	23.06
HSUPA Subtest-2	20.91	20.97	21.09
HSUPA Subtest-3	21.84	21.90	22.02
HSUPA Subtest-4	20.94	21.00	21.12
HSUPA Subtest-5	23.03	23.09	23.21



Test Report No.: RF161008W001-5

LTE Band 4							
BW	Modulation	RB Size	RB Offset	Low CH 19957	Mid CH 20175	High CH 20393	MPR
				Frequency 1710.7 MHz	Frequency 1732.5 MHz	Frequency 1754.3 MHz	
1.4MHz	QPSK	1	0	23.93	24.07	23.89	0
		1	2	23.81	23.95	23.77	0
		1	5	23.68	23.82	23.64	0
		3	0	23.91	24.05	23.87	0
		3	1	23.79	23.93	23.75	0
		3	3	23.66	23.80	23.62	0
		6	0	22.80	22.94	22.76	1
	16QAM	1	0	22.79	22.93	22.75	1
		1	2	22.73	22.87	22.69	1
		1	5	22.67	22.81	22.63	1
		3	0	22.78	22.92	22.74	1
		3	1	22.72	22.86	22.68	1
		3	3	22.66	22.80	22.62	1
		6	0	21.84	21.98	21.80	2
BW	Modulation	RB Size	RB Offset	Low CH 19965	Mid CH 20175	High CH 20385	MPR
				Frequency 1711.5 MHz	Frequency 1732.5 MHz	Frequency 1753.5 MHz	
3 MHz	QPSK	1	0	23.94	24.08	23.90	0
		1	7	23.82	23.96	23.78	0
		1	14	23.69	23.83	23.65	0
		8	0	22.86	23.00	22.82	1
		8	3	22.84	22.98	22.80	1
		8	7	22.77	22.91	22.73	1
		15	0	22.81	22.95	22.77	1
	16QAM	1	0	22.80	22.94	22.76	1
		1	7	22.74	22.88	22.70	1
		1	14	22.68	22.82	22.64	1
		8	0	22.01	22.15	21.97	2
		8	3	21.94	22.08	21.90	2
		8	7	21.82	21.96	21.78	2
		15	0	21.85	21.99	21.81	2



Test Report No.: RF161008W001-5

LTE Band 4							
BW	Modulation	RB Size	RB Offset	Low CH 19975	Mid CH 20175	High CH 20375	MPR
				Frequency 1712.5 MHz	Frequency 1732.5 MHz	Frequency 1752.5 MHz	
5 MHz	QPSK	1	0	23.97	24.11	23.93	0
		1	12	23.85	23.99	23.81	0
		1	24	23.72	23.86	23.68	0
		12	0	22.89	23.03	22.85	1
		12	6	22.87	23.01	22.83	1
		12	13	22.80	22.94	22.76	1
		25	0	22.84	22.98	22.80	1
	16QAM	1	0	22.83	22.97	22.79	1
		1	12	22.77	22.91	22.73	1
		1	24	22.71	22.85	22.67	1
		12	0	22.04	22.18	22.00	2
		12	6	21.97	22.11	21.93	2
		12	13	21.85	21.99	21.81	2
		25	0	21.88	22.02	21.84	2
BW	Modulation	RB Size	RB Offset	Low CH 20000	Mid CH 20175	High CH 20350	MPR
				Frequency 1715 MHz	Frequency 1732.5 MHz	Frequency 1750 MHz	
10 MHz	QPSK	1	0	24.01	24.15	23.97	0
		1	24	23.89	24.03	23.85	0
		1	49	23.76	23.90	23.72	0
		25	0	22.93	23.07	22.89	1
		25	12	22.91	23.05	22.87	1
		25	25	22.84	22.98	22.80	1
		50	0	22.88	23.02	22.84	1
	16QAM	1	0	22.87	23.01	22.83	1
		1	24	22.81	22.95	22.77	1
		1	49	22.75	22.89	22.71	1
		25	0	22.08	22.22	22.04	2
		25	12	22.01	22.15	21.97	2
		25	25	21.89	22.03	21.85	2
		50	0	21.92	22.06	21.88	2



Test Report No.: RF161008W001-5

LTE Band 4							
BW	Modulation	RB Size	RB Offset	Low CH 20025	Mid CH 20175	High CH 20325	MPR
				Frequency 1717.5 MHz	Frequency 1732.5 MHz	Frequency 1747.5 MHz	
15 MHz	QPSK	1	0	24.07	24.21	24.03	0
		1	37	23.95	24.09	23.91	0
		1	74	23.82	23.96	23.78	0
		36	0	22.99	23.13	22.95	1
		36	19	22.97	23.11	22.93	1
		36	39	22.90	23.04	22.86	1
		75	0	22.94	23.08	22.90	1
	16QAM	1	0	22.93	23.07	22.89	1
		1	37	22.87	23.01	22.83	1
		1	74	22.81	22.95	22.77	1
		36	0	22.14	22.28	22.10	2
		36	19	22.07	22.21	22.03	2
		36	39	21.95	22.09	21.91	2
		75	0	21.98	22.12	21.94	2
BW	Modulation	RB Size	RB Offset	Low CH 20050	Mid CH 20175	High CH 20300	MPR
				Frequency 1720 MHz	Frequency 1732.5 MHz	Frequency 1745 MHz	
20MHz	QPSK	1	0	24.10	24.24	24.06	0
		1	50	23.98	24.12	23.94	0
		1	99	23.85	23.99	23.81	0
		50	0	23.02	23.16	22.98	1
		50	25	23.00	23.14	22.96	1
		50	50	22.93	23.07	22.89	1
		100	0	22.97	23.11	22.93	1
	16QAM	1	0	22.96	23.10	22.92	1
		1	50	22.90	23.04	22.86	1
		1	99	22.84	22.98	22.80	1
		50	0	22.17	22.31	22.13	2
		50	25	22.10	22.24	22.06	2
		50	50	21.98	22.12	21.94	2
		100	0	22.01	22.15	21.97	2



Test Report No.: RF161008W001-5

LTE Band 12							
BW	Modulation	RB Size	RB Offset	Low CH 23017	Mid CH 23095	High CH 23173	MPR
				Frequency 699.7 MHz	Frequency 707.5 MHz	Frequency 715.3 MHz	
1.4 MHz	QPSK	1	0	24.08	24.26	24.04	0
		1	2	23.96	24.14	23.92	0
		1	5	23.84	24.02	23.80	0
		3	0	24.06	24.24	24.02	0
		3	1	23.94	24.12	23.90	0
		3	3	23.82	24.00	23.78	0
	16QAM	6	0	23.03	23.21	22.99	1
		1	0	23.10	23.28	23.06	1
		1	2	23.04	23.22	23.00	1
		1	5	23.00	23.18	22.96	1
		3	0	23.09	23.27	23.05	1
		3	1	23.03	23.21	22.99	1
		3	3	22.99	23.17	22.95	1
		6	0	22.06	22.24	22.02	2
LTE Band 12							
BW	Modulation	RB Size	RB Offset	Low CH 23025	Mid CH 23095	High CH 23165	MPR
				Frequency 700.5 MHz	Frequency 707.5 MHz	Frequency 714.5 MHz	
3 MHz	QPSK	1	0	24.12	24.30	24.08	0
		1	7	24.00	24.18	23.96	0
		1	14	23.88	24.06	23.84	0
		8	0	23.12	23.30	23.08	1
		8	3	23.10	23.28	23.06	1
		8	7	23.08	23.26	23.04	1
		15	0	23.07	23.25	23.03	1
	16QAM	1	0	23.14	23.32	23.10	1
		1	7	23.08	23.26	23.04	1
		1	14	23.04	23.22	23.00	1
		8	0	21.96	22.14	21.92	2
		8	3	22.14	22.32	22.10	2
		8	7	22.22	22.40	22.18	2
		15	0	22.10	22.28	22.06	2



Test Report No.: RF161008W001-5

LTE Band 12							
BW	Modulation	RB Size	RB Offset	Low CH 23035	Mid CH 23095	High CH 23155	MPR
				Frequency 701.5 MHz	Frequency 707.5 MHz	Frequency 713.5 MHz	
5 MHz	QPSK	1	0	24.18	24.36	24.14	0
		1	12	24.06	24.24	24.02	0
		1	24	23.94	24.12	23.90	0
		12	0	23.18	23.36	23.14	1
		12	6	23.16	23.34	23.12	1
		12	13	23.14	23.32	23.10	1
		25	0	23.13	23.31	23.09	1
	16QAM	1	0	23.20	23.38	23.16	1
		1	12	23.14	23.32	23.10	1
		1	24	23.10	23.28	23.06	1
		12	0	22.02	22.20	21.98	2
		12	6	22.20	22.38	22.16	2
		12	13	22.28	22.46	22.24	2
		25	0	22.16	22.34	22.12	2
LTE Band 12							
BW	Modulation	RB Size	RB Offset	Low CH 23060	Mid CH 23095	High CH 23130	MPR
				Frequency 704 MHz	Frequency 707.5 MHz	Frequency 711 MHz	
10 MHz	QPSK	1	0	24.21	24.39	24.17	0
		1	24	24.09	24.27	24.05	0
		1	49	23.97	24.15	23.93	0
		25	0	23.21	23.39	23.17	1
		25	12	23.19	23.37	23.15	1
		25	25	23.17	23.35	23.13	1
		50	0	23.16	23.34	23.12	1
	16QAM	1	0	23.23	23.41	23.19	1
		1	24	23.17	23.35	23.13	1
		1	49	23.13	23.31	23.09	1
		25	0	22.05	22.23	22.01	2
		25	12	22.23	22.41	22.19	2
		25	25	22.31	22.49	22.27	2
		50	0	22.19	22.37	22.15	2



Test Report No.: RF161008W001-5

LTE Band 17							
BW	Modulation	RB Size	RB Offset	Low CH 23755	Mid CH 23790	High CH 23825	MPR
				Frequency 706.5 MHz	Frequency 710 MHz	Frequency 713.5 MHz	
5 MHz	QPSK	1	0	24.21	24.42	24.15	0
		1	12	24.16	24.37	24.10	0
		1	24	24.11	24.32	24.05	0
		12	0	23.18	23.39	23.12	1
		12	6	23.14	23.35	23.08	1
		12	13	23.08	23.29	23.02	1
		25	0	23.01	23.22	22.95	1
	16QAM	1	0	23.12	23.33	23.06	1
		1	12	23.08	23.29	23.02	1
		1	24	23.04	23.25	22.98	1
		12	0	22.15	22.36	22.09	2
		12	6	22.09	22.30	22.03	2
		12	13	22.02	22.23	21.96	2
		25	0	22.05	22.26	21.99	2
BW	Modulation	RB Size	RB Offset	Low CH 23780	Mid CH 23790	High CH 23800	MPR
				Frequency 709 MHz	Frequency 710 MHz	Frequency 711 MHz	
10 MHz	QPSK	1	0	24.25	24.46	24.19	0
		1	24	24.20	24.41	24.14	0
		1	49	24.15	24.36	24.09	0
		25	0	23.22	23.43	23.16	1
		25	12	23.18	23.39	23.12	1
		25	25	23.12	23.33	23.06	1
		50	0	23.05	23.26	22.99	1
	16QAM	1	0	23.16	23.37	23.10	1
		1	24	23.12	23.33	23.06	1
		1	49	23.08	23.29	23.02	1
		25	0	22.19	22.40	22.13	2
		25	12	22.13	22.34	22.07	2
		25	25	22.06	22.27	22.00	2
		50	0	22.09	22.30	22.03	2



Test Report No.: RF161008W001-5

EIRP

WCDMA IV

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)
1312	1712.4	-26.47	41.39	14.92	31.04	H
1413	1732.6	-26.66	41.36	14.70	29.51	H
1513	1752.6	-26.98	42.63	15.65	36.72	H
1312	1712.4	-20.42	44.17	23.75	236.92	V
1413	1732.6	-21.05	44.20	23.15	206.54	V
1513	1752.6	-20.23	44.35	24.12	257.93	V

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19957	1710.7	-22.12	41.29	19.17	82.68	H	1
20175	1732.5	-21.16	41.36	20.20	104.71	H	1
20393	1754.3	-22.18	42.74	20.56	113.71	H	1
19957	1710.7	-19.82	44.25	24.43	277.01	V	1
20175	1732.5	-20.29	44.20	23.91	246.04	V	1
20393	1754.3	-19.68	44.09	24.41	275.74	V	1

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19957	1710.7	-22.99	41.29	18.30	67.67	H	1
20175	1732.5	-22.09	41.36	19.27	84.53	H	1
20393	1754.3	-23.14	42.74	19.60	91.16	H	1
19957	1710.7	-20.69	44.25	23.56	226.73	V	1
20175	1732.5	-21.22	44.20	22.98	198.61	V	1
20393	1754.3	-20.64	44.09	23.45	221.05	V	1



Test Report No.: RF161008W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19965	1711.5	-22.10	41.27	19.17	82.55	H	1
20175	1732.5	-21.22	41.36	20.14	103.28	H	1
20385	1753.5	-22.13	42.76	20.63	115.53	H	1
19965	1711.5	-19.80	44.26	24.46	279.38	V	1
20175	1732.5	-20.35	44.20	23.85	242.66	V	1
20385	1753.5	-19.63	44.23	24.60	288.54	V	1

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19965	1711.5	-23.17	41.27	18.10	64.52	H	1
20175	1732.5	-22.11	41.36	19.25	84.14	H	1
20385	1753.5	-23.12	42.76	19.64	91.98	H	1
19965	1711.5	-20.87	44.26	23.39	218.37	V	1
20175	1732.5	-21.24	44.20	22.96	197.70	V	1
20385	1753.5	-20.62	44.23	23.61	229.72	V	1

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19975	1712.5	-22.16	41.39	19.23	83.73	H	1
20175	1732.5	-21.17	41.36	20.19	104.47	H	1
20375	1752.5	-22.08	42.63	20.55	113.47	H	1
19975	1712.5	-19.86	44.17	24.31	269.53	V	1
20175	1732.5	-20.30	44.20	23.90	245.47	V	1
20375	1752.5	-19.58	44.35	24.77	299.57	V	1



Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
19975	1712.5	-22.99	41.39	18.40	69.17	H	1
20175	1732.5	-22.19	41.36	19.17	82.60	H	1
20375	1752.5	-23.18	42.63	19.45	88.08	H	1
19975	1712.5	-20.69	44.17	23.48	222.64	V	1
20175	1732.5	-21.32	44.20	22.88	194.09	V	1
20375	1752.5	-20.68	44.35	23.67	232.54	V	1

LTE BAND 4

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20000	1715.0	-21.97	41.49	19.52	89.45	H	1
20175	1732.5	-21.11	41.36	20.25	105.93	H	1
20350	1750.0	-21.95	42.28	20.33	107.97	H	1
20000	1715.0	-19.67	44.06	24.39	274.98	V	1
20175	1732.5	-20.24	44.20	23.96	248.89	V	1
20350	1750.0	-19.45	44.43	24.98	314.77	V	1

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20000	1715.0	-23.12	41.49	18.37	68.64	H	1
20175	1732.5	-22.21	41.36	19.15	82.22	H	1
20350	1750.0	-23.11	42.28	19.17	82.66	H	1
20000	1715.0	-20.82	44.06	23.24	211.01	V	1
20175	1732.5	-21.34	44.20	22.86	193.20	V	1
20350	1750.0	-20.61	44.43	23.82	240.99	V	1



Test Report No.: RF161008W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 15MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20025	1717.5	-21.98	41.34	19.36	86.26	H	1
20175	1732.5	-21.18	41.36	20.18	104.23	H	1
20325	1747.5	-22.02	42.09	20.07	101.53	H	1
20025	1717.5	-19.68	44.04	24.36	273.15	V	1
20175	1732.5	-20.31	44.20	23.89	244.91	V	1
20325	1747.5	-19.52	44.22	24.70	294.78	V	1

CHANNEL BANDWIDTH: 15MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20025	1717.5	-22.84	41.34	18.50	70.76	H	1
20175	1732.5	-22.05	41.36	19.31	85.31	H	1
20325	1747.5	-22.87	42.09	19.22	83.48	H	1
20025	1717.5	-20.54	44.04	23.50	224.08	V	1
20175	1732.5	-21.18	44.20	23.02	200.45	V	1
20325	1747.5	-20.37	44.22	23.85	242.38	V	1

LTE BAND 4

CHANNEL BANDWIDTH: 20MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20050	1720.0	-22.56	41.28	18.72	74.49	H	1
20175	1732.5	-21.63	41.36	19.73	93.99	H	1
20300	1745.0	-22.60	41.96	19.36	86.24	H	1
20050	1720.0	-20.26	44.14	23.88	244.06	V	1
20175	1732.5	-20.76	44.20	23.44	220.60	V	1
20300	1745.0	-20.10	43.88	23.78	238.89	V	1



Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 20MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	EIRP(dBm)	EIRP(mW)	Polarization (H/V)	LIMIT (W)
20050	1720.0	-23.49	41.28	17.79	60.13	H	1
20175	1732.5	-22.70	41.36	18.66	73.47	H	1
20300	1745.0	-23.43	41.96	18.53	71.24	H	1
20050	1720.0	-21.19	44.14	22.95	197.02	V	1
20175	1732.5	-21.83	44.20	22.37	172.42	V	1
20300	1745.0	-20.93	43.88	22.95	197.33	V	1

REMARKS: 1. EIRP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB).
 2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23017	699.7	-9.46	32.77	21.16	130.62	H	3
23095	707.5	-8.46	33.23	22.62	182.81	H	3
23173	715.3	-7.83	33.14	23.16	206.92	H	3
23017	699.7	-16.03	32.42	14.24	26.52	V	3
23095	707.5	-15.17	32.60	15.28	33.73	V	3
23173	715.3	-15.40	32.19	14.64	29.08	V	3

CHANNEL BANDWIDTH: 1.4MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23017	699.7	-10.29	32.77	20.33	107.89	H	3
23095	707.5	-9.48	33.23	21.60	144.54	H	3
23173	715.3	-8.93	33.14	22.06	160.62	H	3
23017	699.7	-16.86	32.42	13.41	21.91	V	3
23095	707.5	-16.19	32.60	14.26	26.67	V	3
23173	715.3	-16.50	32.19	13.54	22.57	V	3



Test Report No.: RF161008W001-5

LTE BAND 12

CHANNEL BANDWIDTH: 3MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23025	700.5	-9.27	32.63	21.21	132.16	H	3
23095	707.5	-8.40	33.23	22.68	185.35	H	3
23165	714.5	-7.70	33.21	23.36	216.52	H	3
23025	700.5	-15.84	32.33	14.34	27.15	V	3
23095	707.5	-15.11	32.60	15.34	34.20	V	3
23165	714.5	-15.27	32.30	14.88	30.77	V	3

CHANNEL BANDWIDTH: 3MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23025	700.5	-10.42	32.63	20.06	101.41	H	3
23095	707.5	-9.50	33.23	21.58	143.88	H	3
23165	714.5	-8.86	33.21	22.20	165.77	H	3
23025	700.5	-16.99	32.33	13.19	20.83	V	3
23095	707.5	-16.21	32.60	14.24	26.55	V	3
23165	714.5	-16.43	32.30	13.72	23.56	V	3

LTE BAND 12

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23035	701.5	-9.28	32.53	21.10	128.68	H	3
23095	707.5	-8.47	33.23	22.61	182.31	H	3
23155	713.5	-7.77	33.29	23.37	217.12	H	3
23035	701.5	-15.85	32.25	14.25	26.63	V	3
23095	707.5	-15.18	32.60	15.27	33.65	V	3
23155	713.5	-15.34	32.39	14.90	30.87	V	3



Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23035	701.5	-10.14	32.53	20.24	105.56	H	3
23095	707.5	-9.34	33.23	21.74	149.21	H	3
23155	713.5	-8.62	33.29	22.52	178.53	H	3
23035	701.5	-16.71	32.25	13.39	21.85	V	3
23095	707.5	-16.05	32.60	14.40	27.54	V	3
23155	713.5	-16.19	32.39	14.05	25.39	V	3

LTE BAND 12

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23060	704.0	-9.86	32.68	20.67	116.76	H	3
23095	707.5	-8.92	33.23	22.16	164.44	H	3
23130	711.0	-8.35	33.39	22.89	194.40	H	3
23060	704.0	-16.43	32.37	13.79	23.92	V	3
23095	707.5	-15.63	32.60	14.82	30.34	V	3
23130	711.0	-15.92	32.56	14.49	28.09	V	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23060	704.0	-10.79	32.68	19.74	94.25	H	3
23095	707.5	-9.99	33.23	21.09	128.53	H	3
23130	711.0	-9.18	33.39	22.06	160.58	H	3
23060	704.0	-17.36	32.37	12.86	19.31	V	3
23095	707.5	-16.70	32.60	13.75	23.71	V	3
23130	711.0	-16.75	32.56	13.66	23.20	V	3

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).

2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss



Test Report No.: RF161008W001-5

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23755	706.5	-8.07	32.64	22.42	174.38	H	3
23790	710.0	-7.87	32.92	22.90	194.98	H	3
23825	713.5	-7.68	32.83	23.00	199.34	H	3
23755	706.5	-15.80	32.14	14.19	26.22	V	3
23790	710.0	-15.58	32.18	14.45	27.86	V	3
23825	713.5	-15.97	31.95	13.83	24.18	V	3

CHANNEL BANDWIDTH: 5MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23755	706.5	-8.93	32.64	21.56	143.05	H	3
23790	710.0	-8.74	32.92	22.03	159.59	H	3
23825	713.5	-8.53	32.83	22.15	163.91	H	3
23755	706.5	-16.66	32.14	13.33	21.51	V	3
23790	710.0	-16.45	32.18	13.58	22.80	V	3
23825	713.5	-16.82	31.95	12.98	19.88	V	3



Test Report No.: RF161008W001-5

LTE BAND 17

CHANNEL BANDWIDTH: 10MHz QPSK

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23780	709.0	-8.65	32.90	22.10	161.99	H	3
23790	710.0	-8.32	32.92	22.45	175.71	H	3
23800	711.0	-8.26	32.92	22.51	178.28	H	3
23780	709.0	-16.38	32.20	13.67	23.25	V	3
23790	710.0	-16.03	32.18	14.00	25.13	V	3
23800	711.0	-16.55	32.13	13.43	22.03	V	3

CHANNEL BANDWIDTH: 10MHz 16QAM

Channel	Frequency (MHz)	SPA LVL (dBm)	Correction Factor(dB)	ERP(dBm)	ERP(mW)	Polarization (H/V)	LIMIT (W)
23780	709.0	-9.58	32.90	21.17	130.77	H	3
23790	710.0	-9.39	32.92	21.38	137.34	H	3
23800	711.0	-9.09	32.92	21.68	147.27	H	3
23780	709.0	-17.31	32.20	12.74	18.77	V	3
23790	710.0	-17.10	32.18	12.93	19.64	V	3
23800	711.0	-17.38	32.13	12.60	18.20	V	3

REMARKS: 1. ERP Output Power (dBm) = SPA LVL (dBm) + Correction Factor (dB) -2.15(dB).

2. Correction factor (dB) = Free Space Loss + Antenna Factor + Cable Loss

4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

4.2.2 TEST PROCEDURE

- a. Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

NOTE: The frequency error was recorded frequency error from the communication simulator.

4.2.3 TEST SETUP

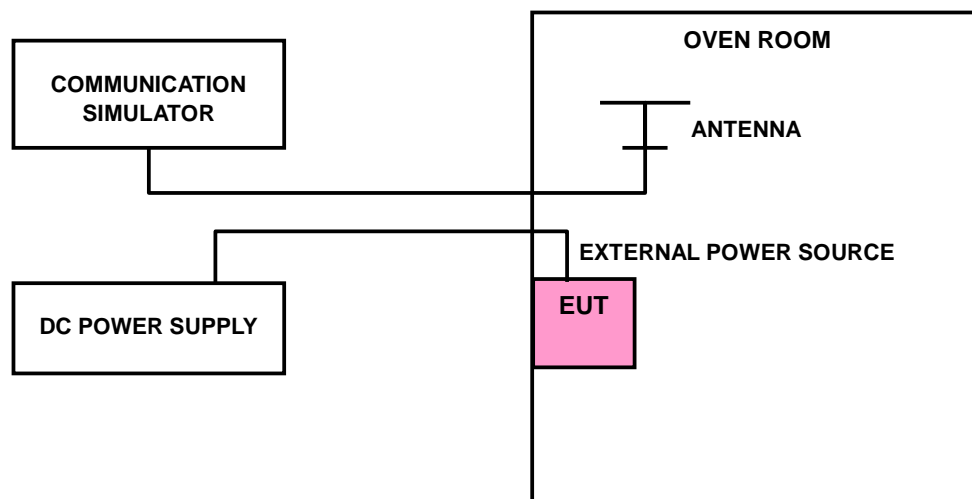



4.2.4 TEST RESULTS

FREQUENCY ERROR VS. VOLTAGE

		FREQUENCY ERROR (PPM)						
VOLTAGE (Volts)	WCDMA	LTE Band 4						LIMIT (ppm)
		1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
3.85	0.0014	0.0012	0.0012	0.0014	0.0012	0.0014	0.0011	2.5
3.3	-0.0017	-0.0018	-0.0017	-0.0018	-0.0018	-0.0019	-0.0015	2.5
4.4	0.0016	0.0017	0.0014	0.0016	0.0017	0.0017	0.0014	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.3Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.

		Frequency Error (PPM)						
TEMP. (°C)	WCDMA	LTE Band 4						LIMIT (ppm)
		1.4MHz	3MHz	5MHz	10MHz	15MHz	20MHz	
-30	0.0055	0.0059	0.0056	0.0060	0.0063	0.0061	0.0062	2.5
-20	0.0048	0.0055	0.0049	0.0054	0.0057	0.0053	0.0055	2.5
-10	0.0043	0.0048	0.0042	0.0041	0.0050	0.0047	0.0049	2.5
0	0.0040	0.0041	0.0036	0.0048	0.0037	0.0041	0.0043	2.5
10	0.0032	0.0034	0.0030	0.0040	0.0030	0.0034	0.0036	2.5
20	0.0027	0.0027	0.0024	0.0031	0.0024	0.0028	0.0030	2.5
30	0.0023	0.0020	0.0017	0.0024	0.0018	0.0021	0.0023	2.5
40	0.0017	0.0014	0.0010	0.0018	0.0012	0.0015	0.0017	2.5
50	0.0010	0.0007	0.0003	0.0010	0.0006	0.0009	0.0008	2.5
60	0.0003	0.0000	-0.0002	0.0002	-0.0001	0.0001	-0.0001	2.5



Test Report No.: RF161008W001-5

FREQUENCY ERROR VS. VOLTAGE

VOLTAGE (Volts)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	LTE Band 12				LTE Band 17		
	1.4MHz	3MHz	5MHz	10MHz	5MHz	10MHz	
3.85	0.0032	0.0027	0.0031	0.0032	0.0033	0.0030	2.5
3.3	-0.0043	-0.0038	-0.0043	-0.0045	-0.0012	-0.0041	2.5
4.4	0.0040	0.0034	0.0038	0.0040	0.0011	0.0033	2.5

NOTE: The applicant defined the normal working voltage of the battery is from 3.3Vdc to 4.4Vdc.

FREQUENCY ERROR vs. TEMPERATURE.


TEMP. (°C)	FREQUENCY ERROR (ppm)						LIMIT (ppm)
	LTE Band 12				LTE Band 17		
	1.4MHz	3MHz	5MHz	10MHz	5MHz	10MHz	
-30	0.0145	0.0150	0.0146	0.0159	0.0150	0.0139	2.5
-20	0.0130	0.0134	0.0131	0.0143	0.0131	0.0122	2.5
-10	0.0115	0.0115	0.0115	0.0123	0.0114	0.0106	2.5
0	0.0101	0.0103	0.0100	0.0105	0.0104	0.0089	2.5
10	0.0089	0.0090	0.0083	0.0087	0.0086	0.0073	2.5
20	0.0077	0.0074	0.0066	0.0075	0.0074	0.0057	2.5
30	0.0060	0.0059	0.0050	0.0062	0.0058	0.0044	2.5
40	0.0044	0.0041	0.0034	0.0044	0.0044	0.0028	2.5
50	0.0028	0.0020	0.0018	0.0027	0.0024	0.0010	2.5
60	0.0005	0.0000	0.0001	0.0004	0.0002	-0.0005	2.5

4.3 OCCUPIED BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF OCCUPIED BANDWIDTH MEASUREMENT

The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5 %of the total mean power of a given emission.

4.3.2 TEST SETUP

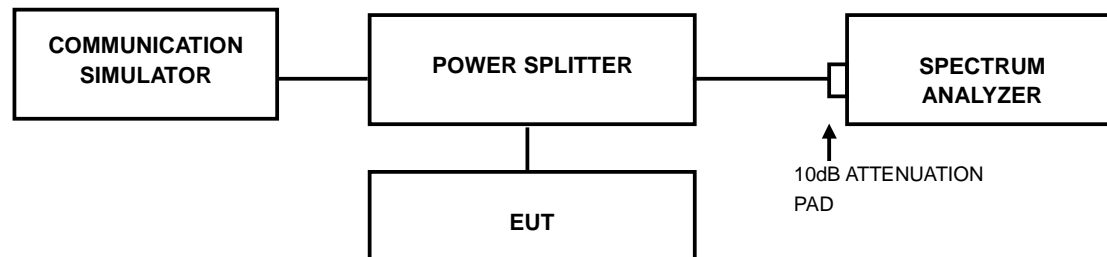

4.3.3 TEST PROCEDURES


- a. The conducted occupied bandwidth used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- b. Use OBW measurement function of Spectrum analyzer to measure 99 % occupied bandwidth.



4.3.4 TEST RESULTS

WCDMA BAND IV

Channel	FREQ. (MHz)	99% Occupied Bandwidth (MHz)	Channel	FREQ. (MHz)	26dB Bandwidth (MHz)
		WCDMA			WCDMA
1312	1712.40	4.12	1312	1712.40	4.71
1413	1732.60	4.29	1413	1732.60	4.70
1513	1752.60	4.11	1513	1752.60	4.71

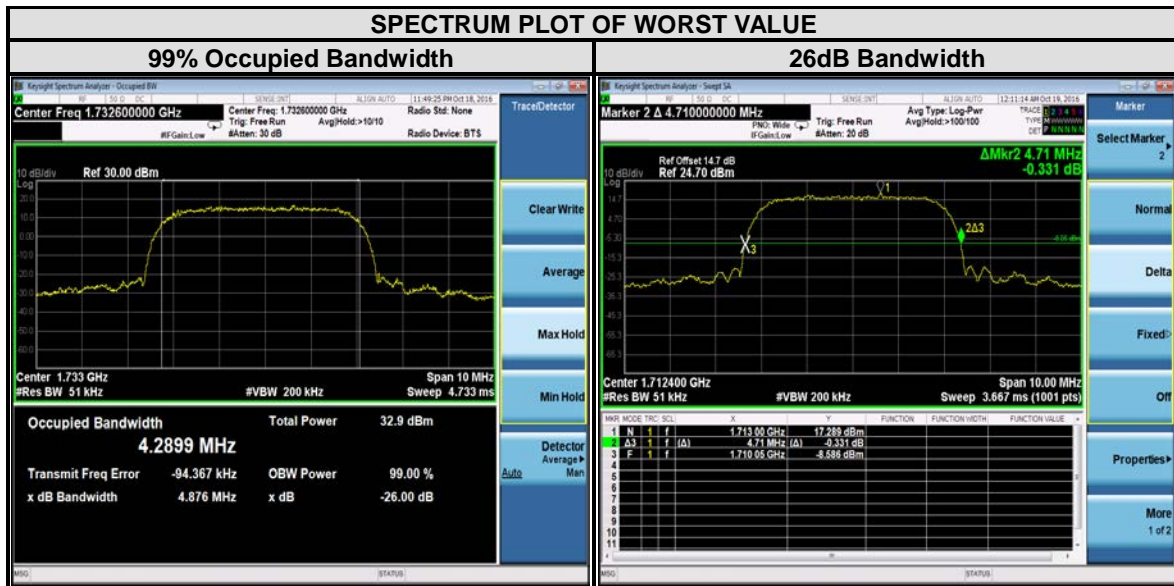



Test Report No.: RF161008W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	1.08	1.08	19965	1711.5	2.68	2.68
20175	1732.5	1.08	1.08	20175	1732.5	2.68	2.68
20393	1754.3	1.09	1.08	20385	1753.5	2.68	2.68



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.48	4.46	20000	1715	8.91	8.90
20175	1732.5	4.47	4.46	20175	1732.5	8.92	8.92
20375	1752.5	4.47	4.46	20350	1750	8.92	8.92

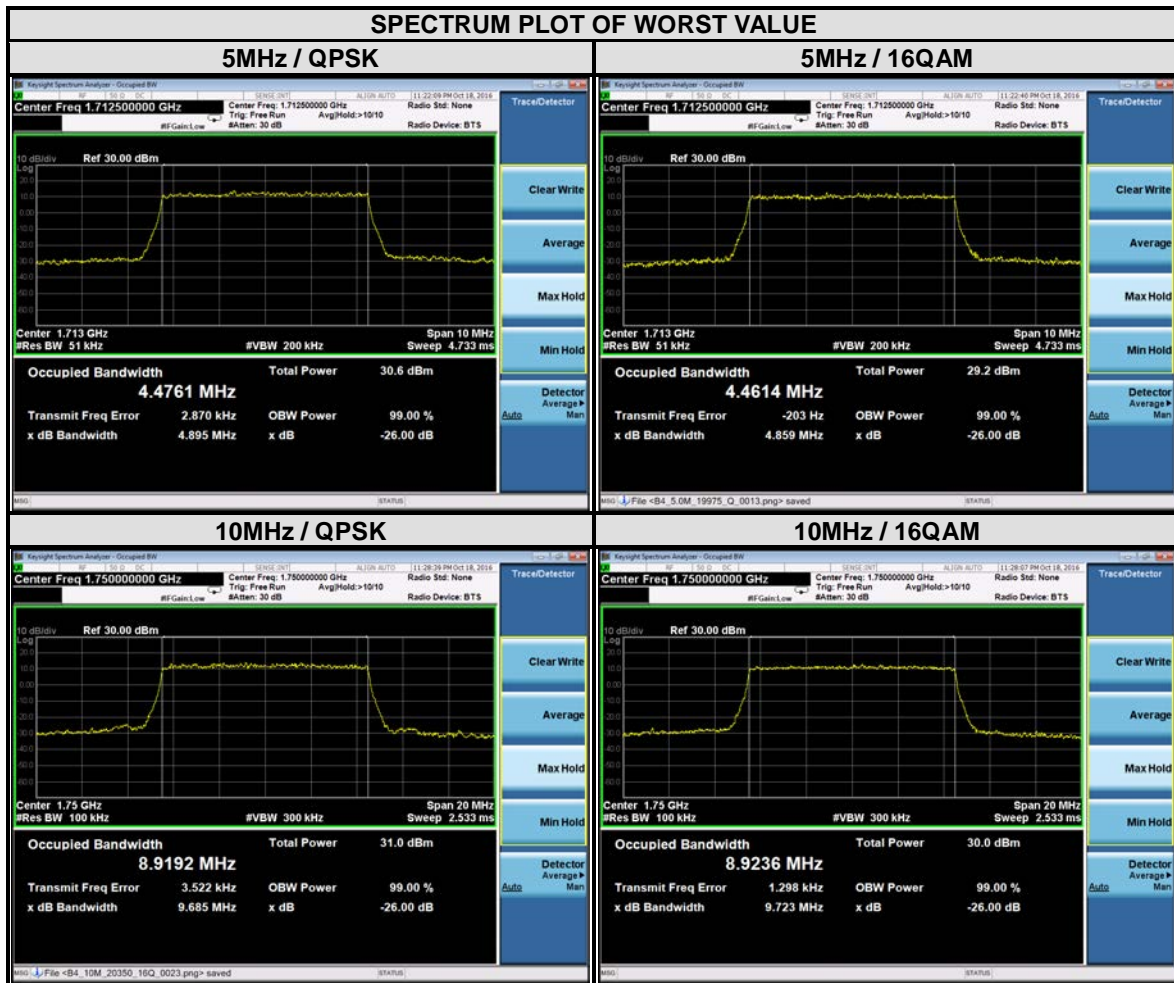



Test Report No.: RF161008W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	13.37	13.34	20050	1720	17.85	17.80
20175	1732.5	13.34	13.35	20175	1732.5	17.86	17.80
20325	1747.5	13.35	13.35	20300	1745	17.86	17.78



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)		CHANNEL	FREQUENCY (MHz)	99% OCCUPIED BANDWIDTH (MHz)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	1.09	1.08	23025	700.5	2.68	2.68
23095	707.5	1.09	1.08	23095	707.5	2.68	2.68
23173	715.3	1.09	1.08	23165	714.5	2.68	2.68





LTE BAND 12

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	4.46	4.45	23060	704	8.92	8.92
23095	707.5	4.48	4.46	23095	707.5	8.92	8.90
23155	713.5	4.47	4.46	23130	711	8.91	8.91






Test Report No.: RF161008W001-5

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)		CHANNEL	Frequency (MHz)	99% OCCUPIED Bandwidth (MHz)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	4.47	4.46	23780	709	8.91	8.92
23790	710	4.47	4.45	23790	710	8.91	8.91
23825	713.5	4.47	4.46	23800	711	8.91	8.91

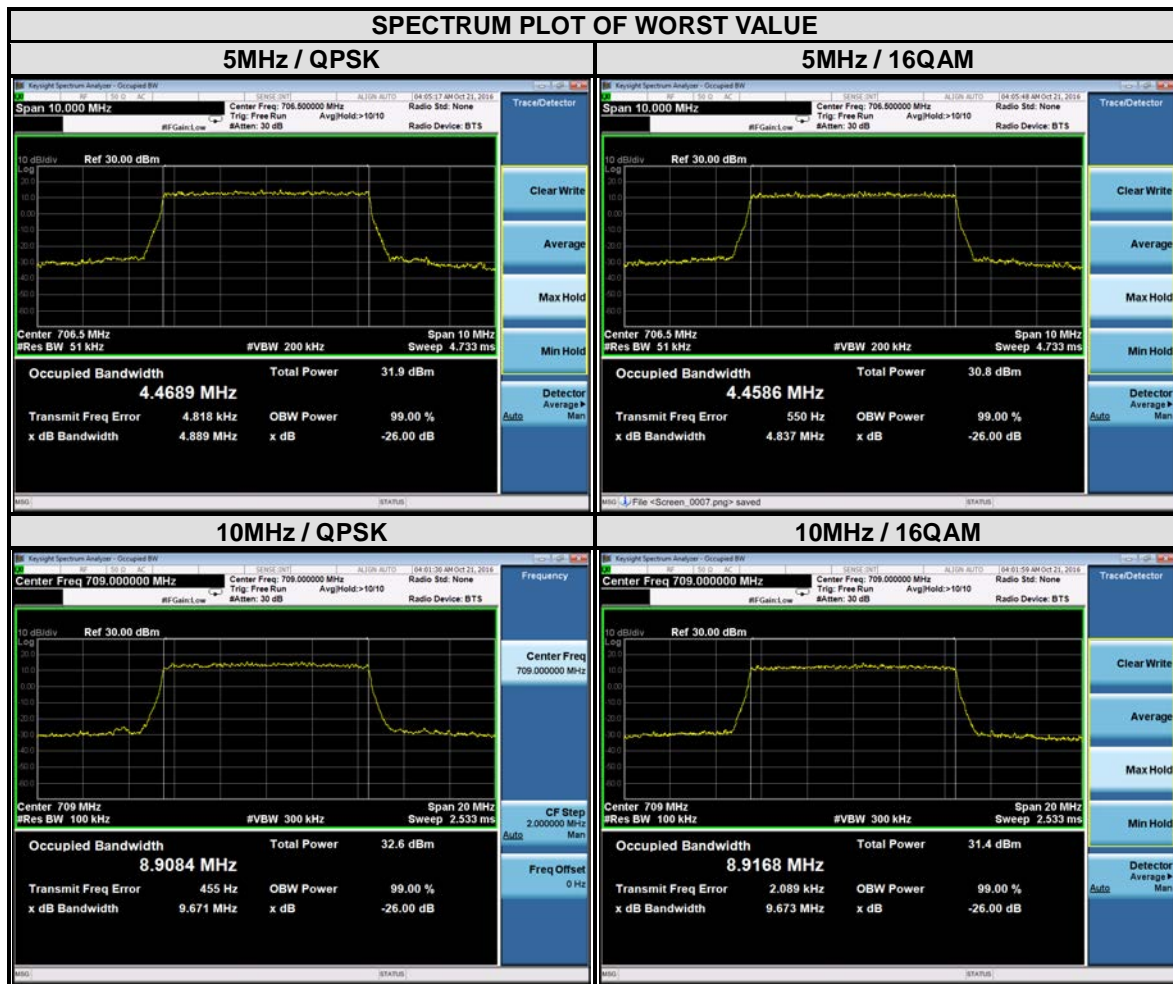

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China


Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

4.4 PEAK TO AVERAGE RATIO

4.4.1 LIMITS OF PEAK TO AVERAGE RATIO MEASUREMENT

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB

4.4.2 TEST SETUP

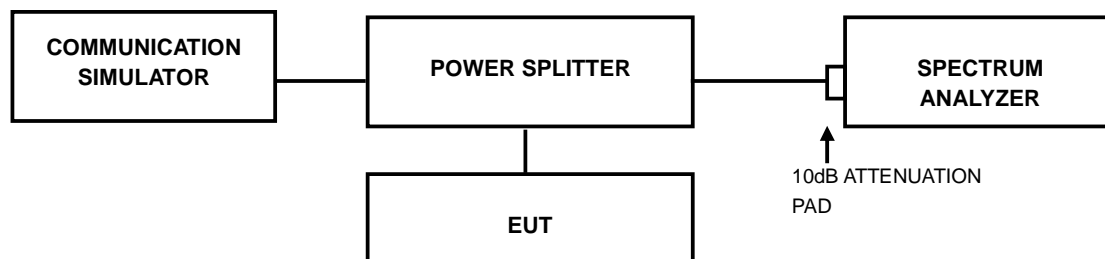

4.4.3 TEST PROCEDURES

1. Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
2. Set the number of counts to a value that stabilizes the measured CCDF curve;
3. Record the maximum PAPR level associated with a probability of 0.1%.




Test Report No.: RF161008W001-5

4.4.4 TEST RESULTS

WCDMA

CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)
1413	1732.6	2.77

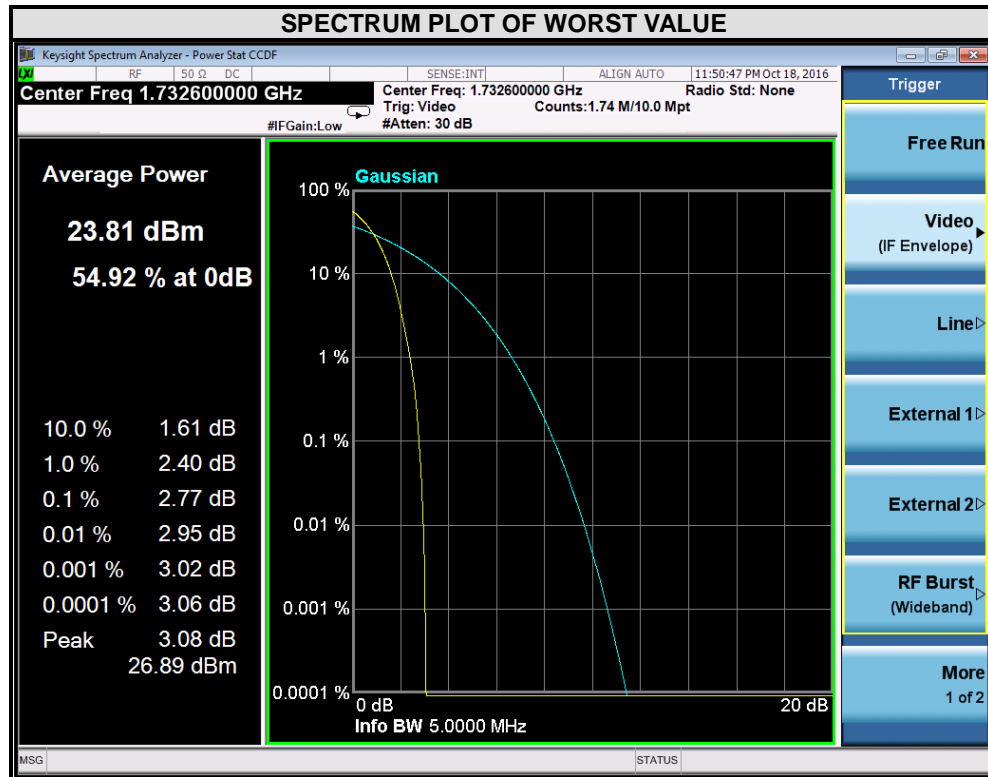




Test Report No.: RF161008W001-5

LTE BAND 4


CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19957	1710.7	4.34	5.19	19965	1711.5	4.51	5.28
20175	1732.5	4.78	5.64	20175	1732.5	4.60	5.40
20393	1754.3	4.23	5.06	20385	1753.5	4.39	5.09

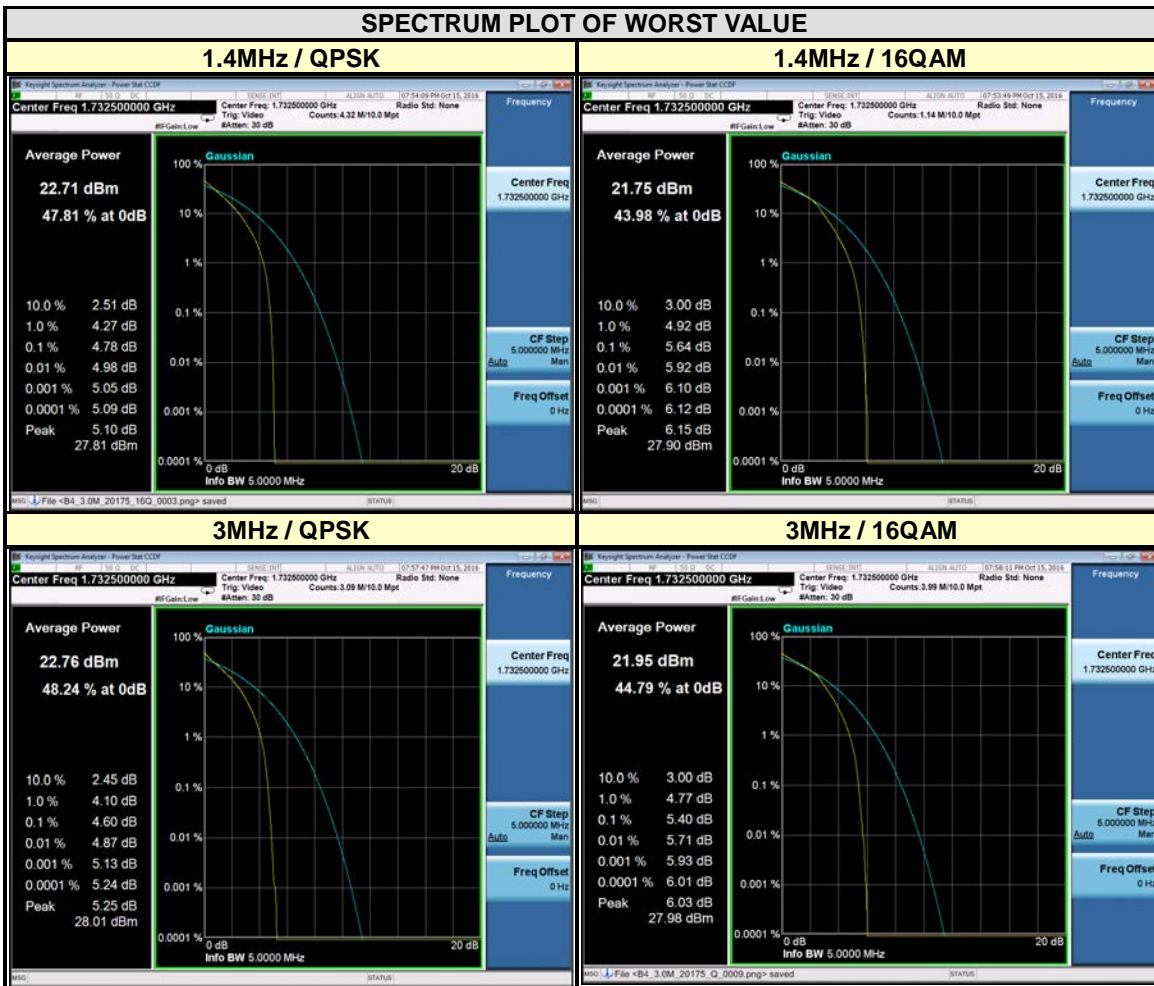



Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
19975	1712.5	4.71	5.48	20000	1715	4.41	5.24
20175	1732.5	4.74	5.53	20175	1732.5	4.51	5.36
20375	1752.5	4.65	5.46	20350	1750	4.43	5.27

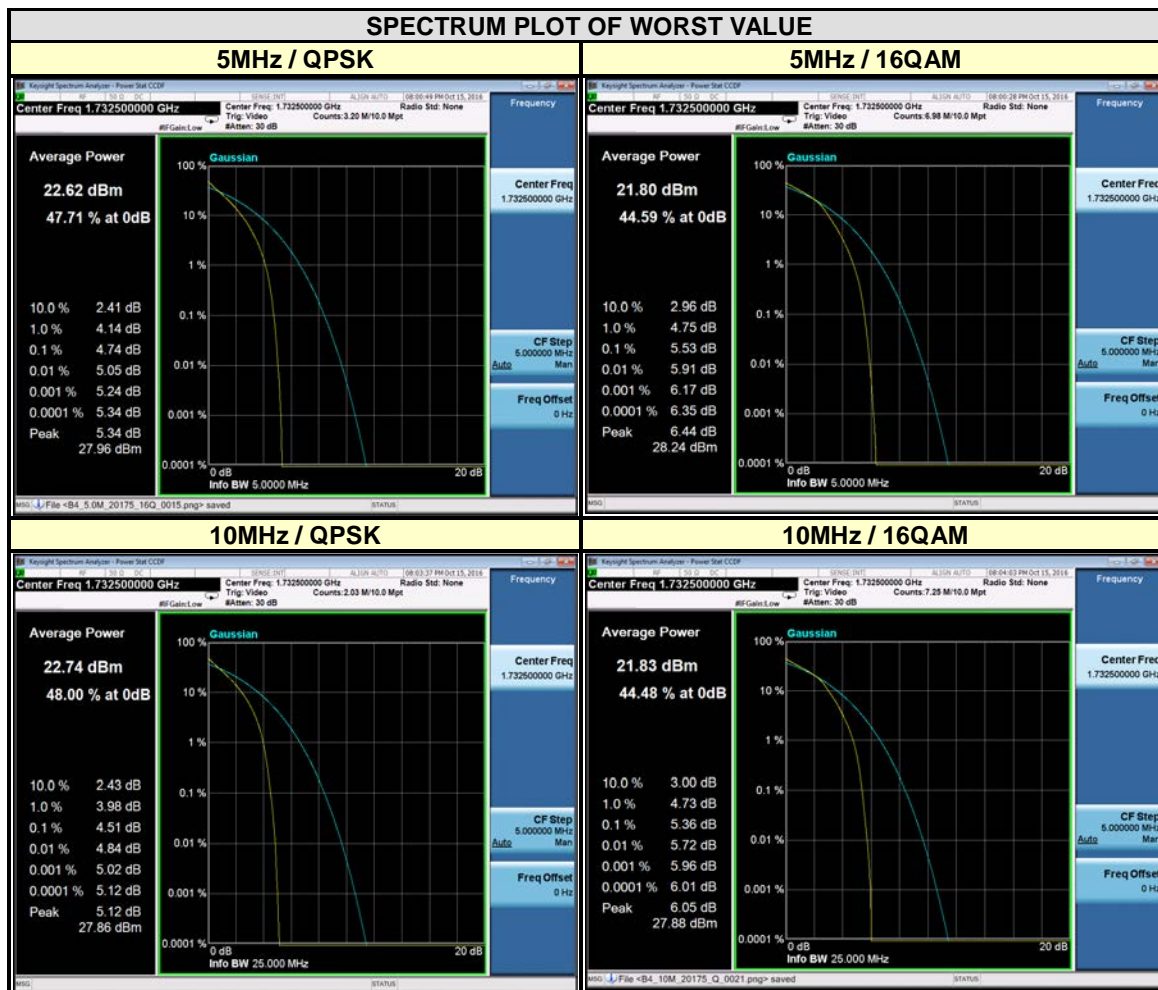

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5


CHANNEL BANDWIDTH: 15MHz				CHANNEL BANDWIDTH: 20MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
20025	1717.5	4.43	5.33	20050	1720	4.71	5.50
20175	1732.5	4.60	5.44	20175	1732.5	4.65	5.46
20325	1747.5	4.52	5.33	20300	1745	4.73	5.55






LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz				CHANNEL BANDWIDTH: 3MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23017	699.7	4.84	5.59	23025	700.5	5.03	5.80
23095	707.5	5.06	5.81	23095	707.5	5.13	5.97
23173	715.3	4.52	5.37	23165	714.5	4.64	5.43

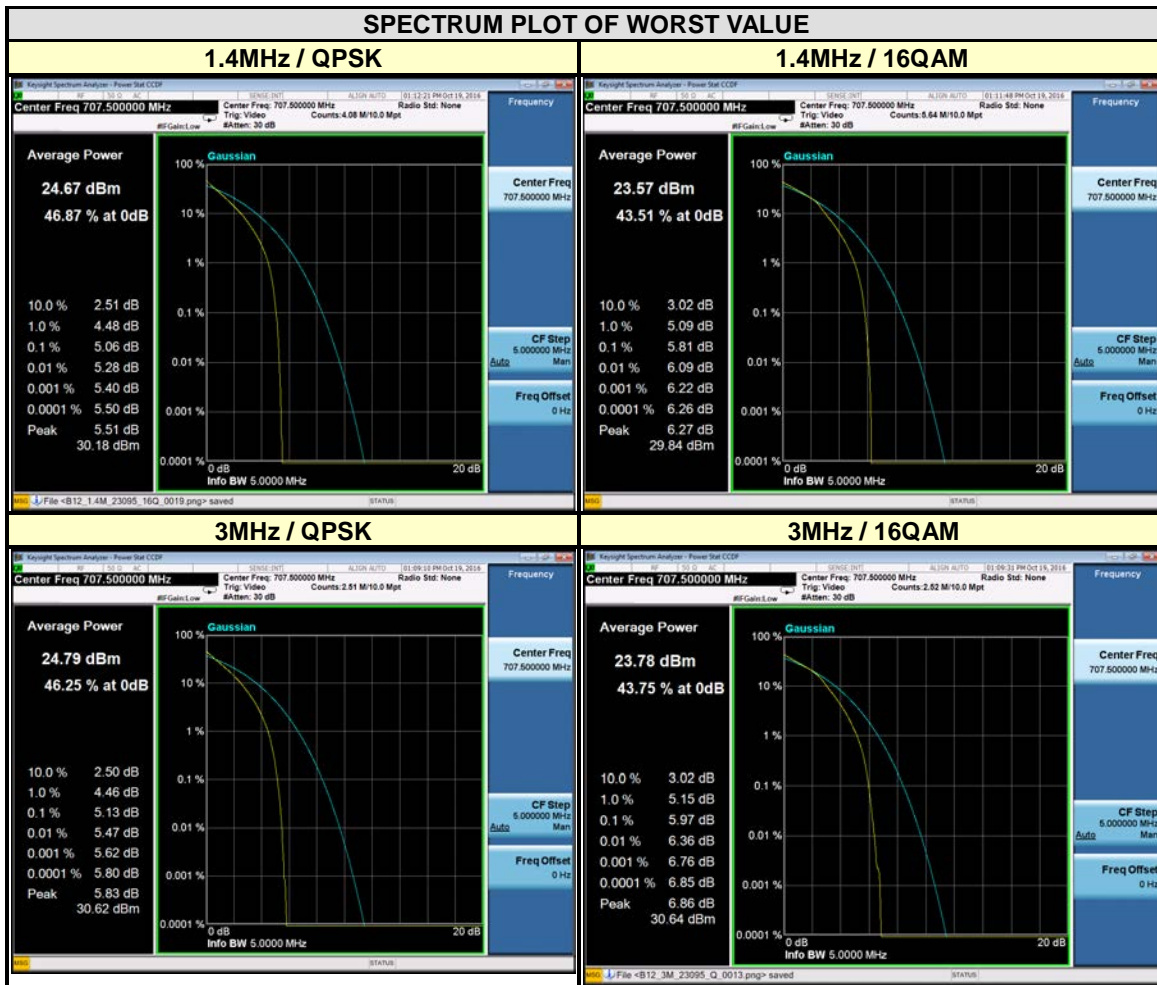



CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23035	701.5	5.03	5.88	23060	704	5.15	5.93
23095	707.5	5.07	5.92	23095	707.5	4.95	5.81
23155	713.5	4.74	5.56	23130	711	4.83	5.60

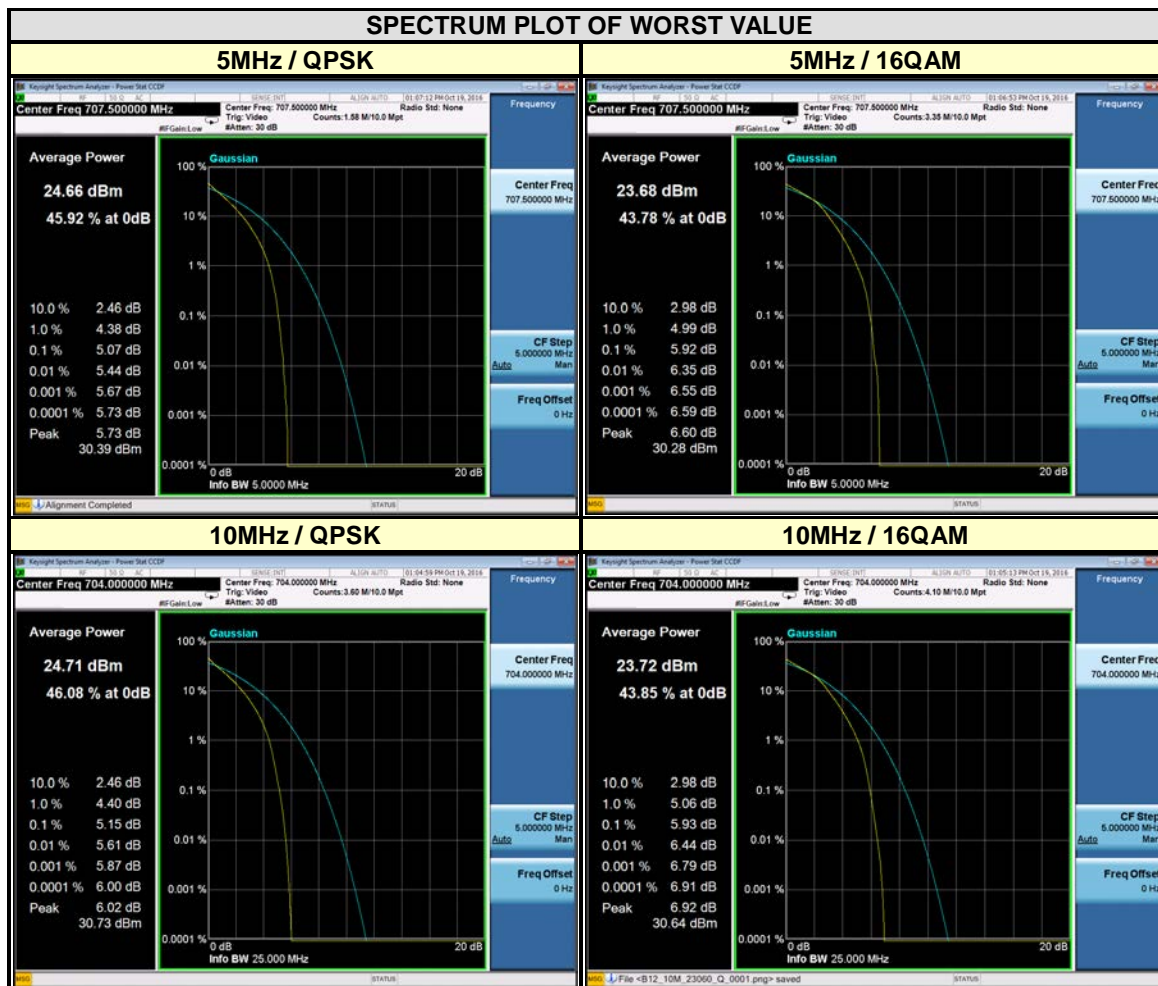




Test Report No.: RF161008W001-5

LTE BAND 17

CHANNEL BANDWIDTH: 5MHz				CHANNEL BANDWIDTH: 10MHz			
CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)		CHANNEL	FREQUENCY (MHz)	PEAK TO AVERAGE RATIO (dB)	
		QPSK	16QAM			QPSK	16QAM
23755	706.5	5.17	6.01	23780	709	4.95	5.80
23790	710	4.83	5.69	23790	710	4.92	5.70
23825	713.5	4.84	5.66	23800	711	4.89	5.70

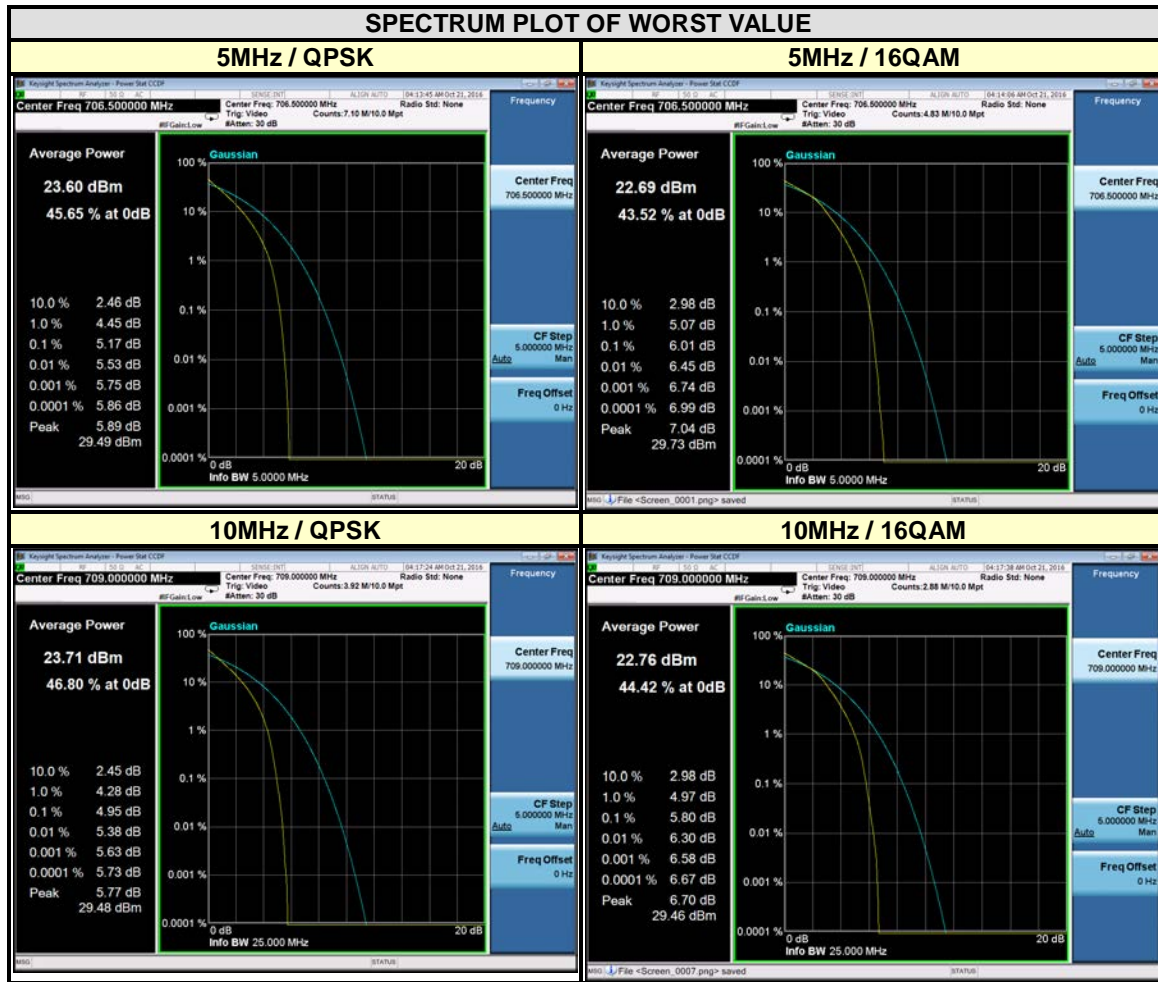


4.5 BAND EDGE MEASUREMENT

4.5.1 LIMITS OF BAND EDGE MEASUREMENT

The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater.

However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

4.5.2 TEST SETUP

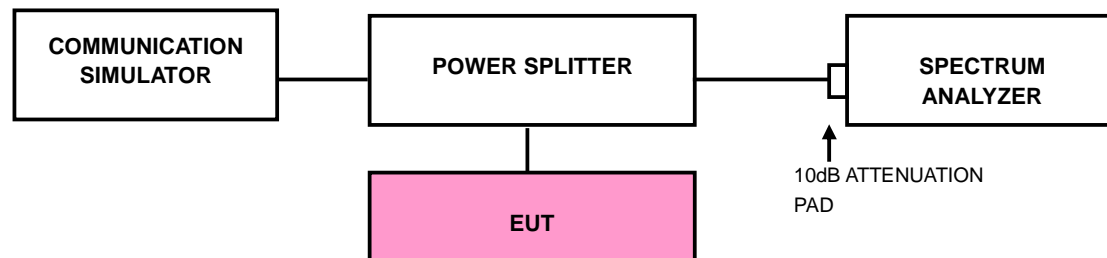




4.5.3 TEST PROCEDURES

- a. The EUT was set up for the maximum peak power with LTE link data modulation. The power was measured with R&S Spectrum Analyzer. All measurements were done at 2 channels (low and high operational frequency range.).
- b. The band edge measurement used the power splitter via EUT RF power connector between simulation base station and spectrum analyzer.
- c. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 20kHz and VB of the spectrum is 100 kHz. (LTE bandwidth 1.4MHz)
- d. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 30kHz and VB of the spectrum is 100kHz. (LTE bandwidth 3MHz)
- e. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 50kHz and VB of the spectrum is 200kHz. (LTE bandwidth 5MHz)
- f. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 100kHz and VB of the spectrum is 300kHz. (LTE bandwidth 10MHz)
- g. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 15MHz)
- h. The center frequency of spectrum is the band edge frequency and span is 1~5 MHz. RB of the spectrum is 200kHz and VB of the spectrum is 1MHz. (LTE bandwidth 20MHz)
- i. Record the max trace plot into the test report.



4.5.4 TEST RESULTS

WCDMA BAND 4

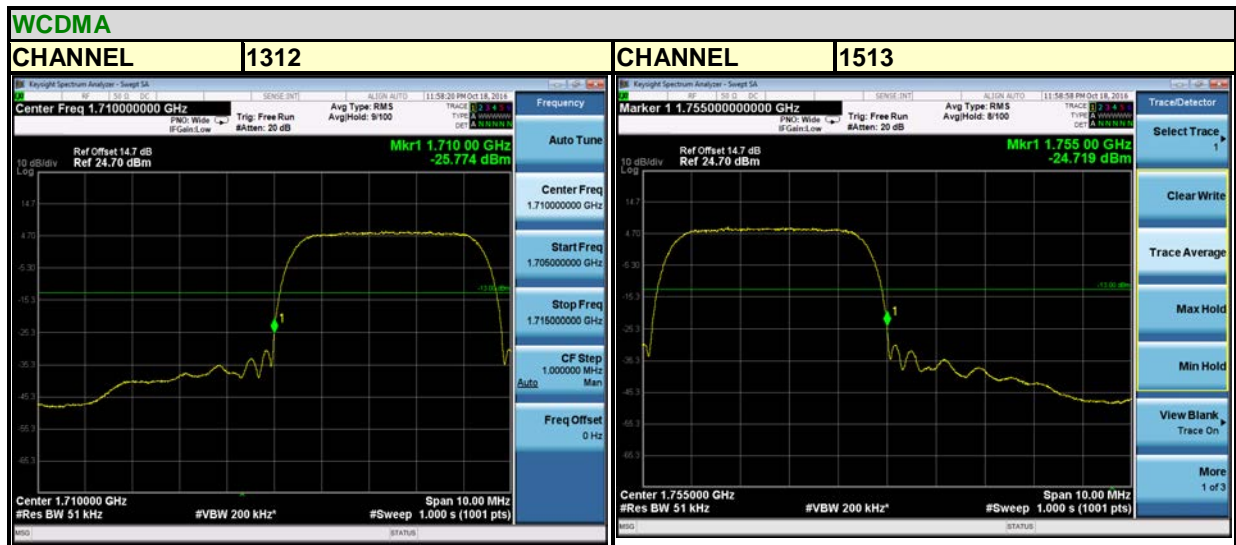



Test Report No.: RF161008W001-5

LTE BAND 4



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 4



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 4

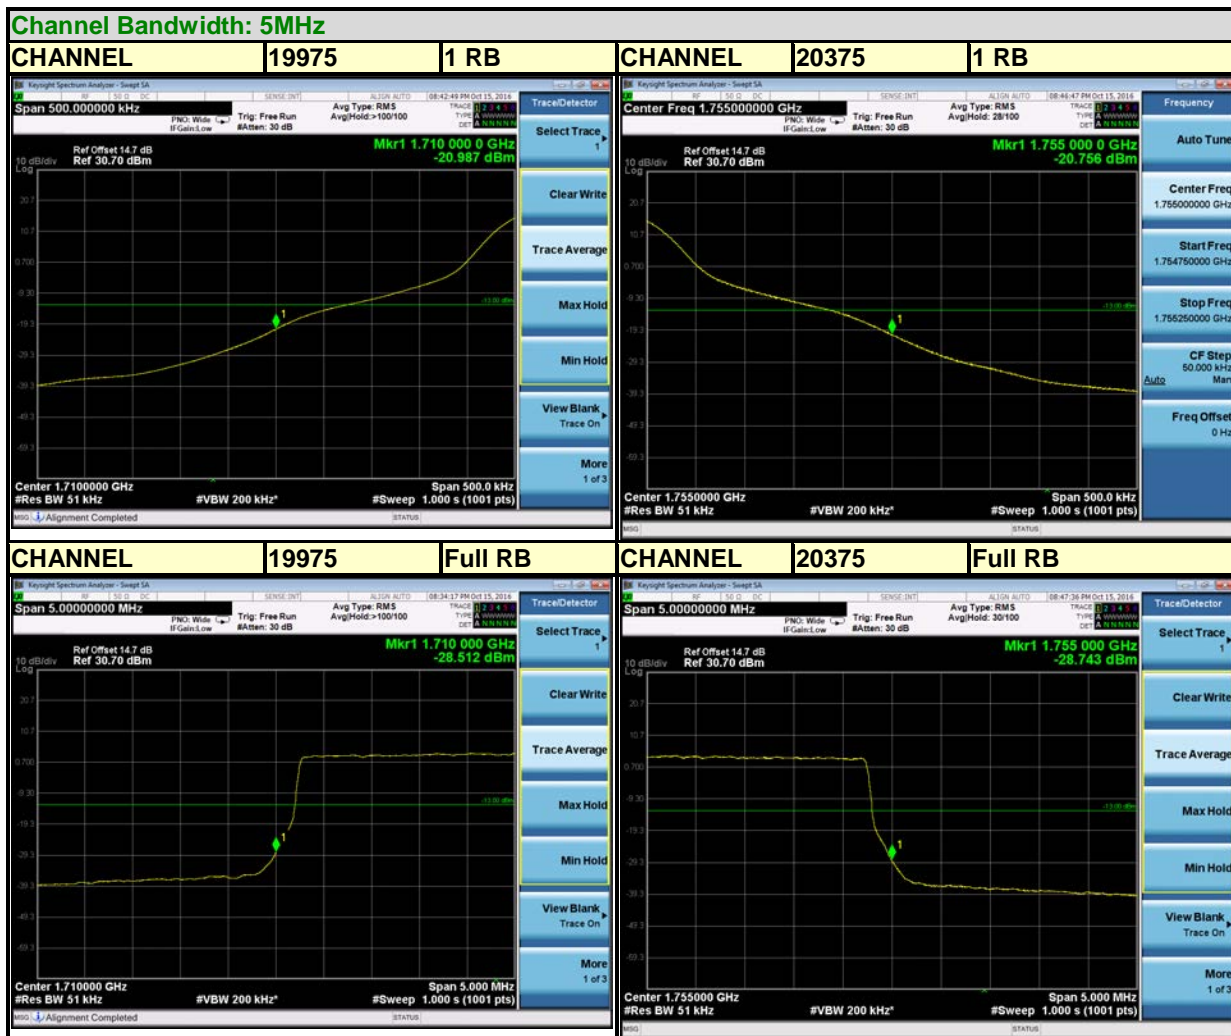

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 4

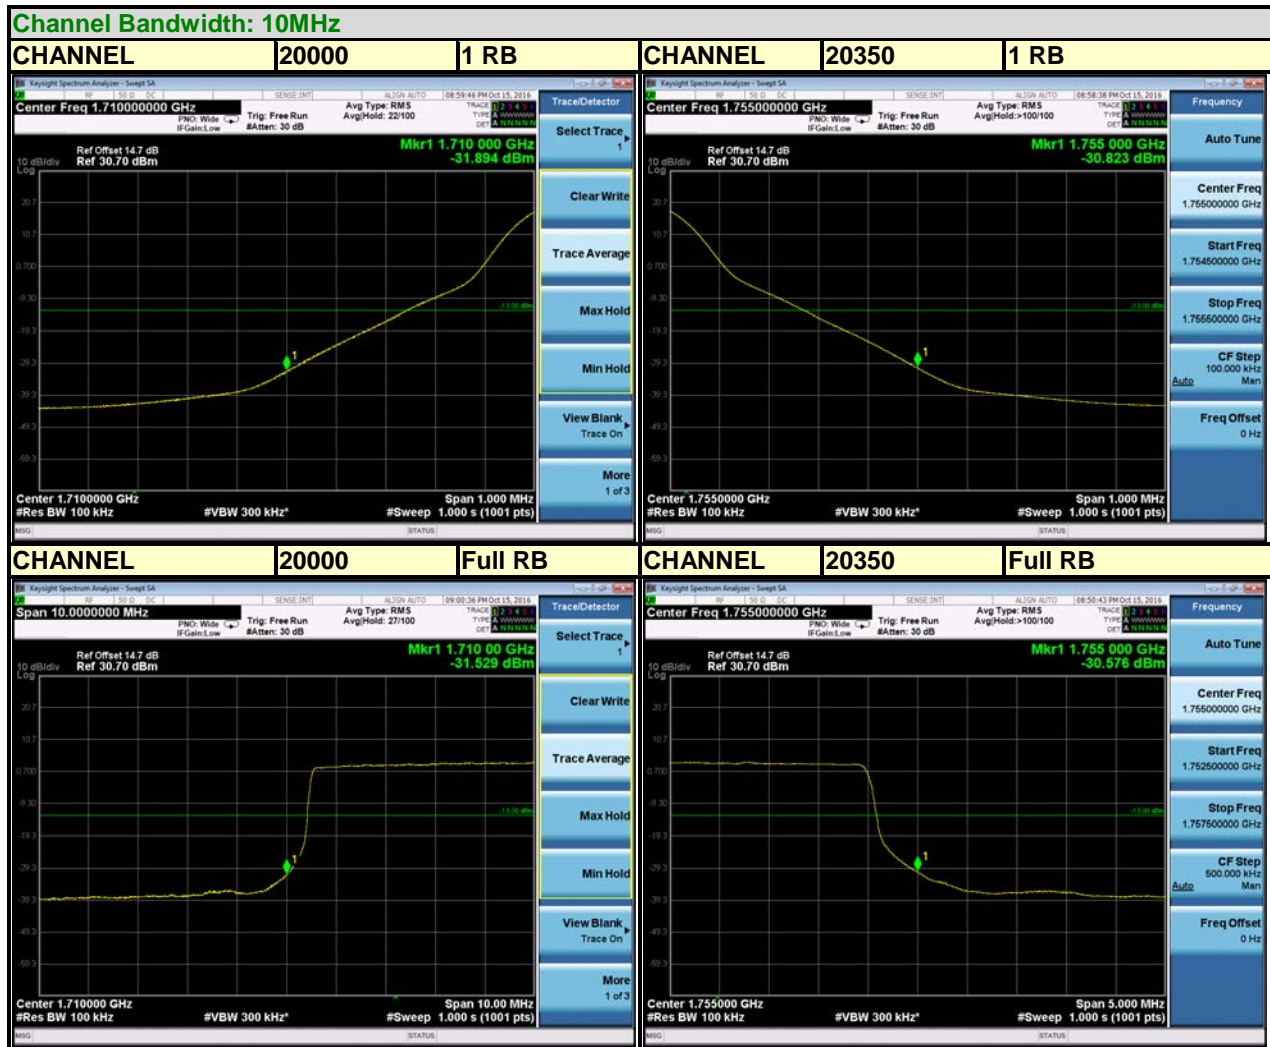

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 4

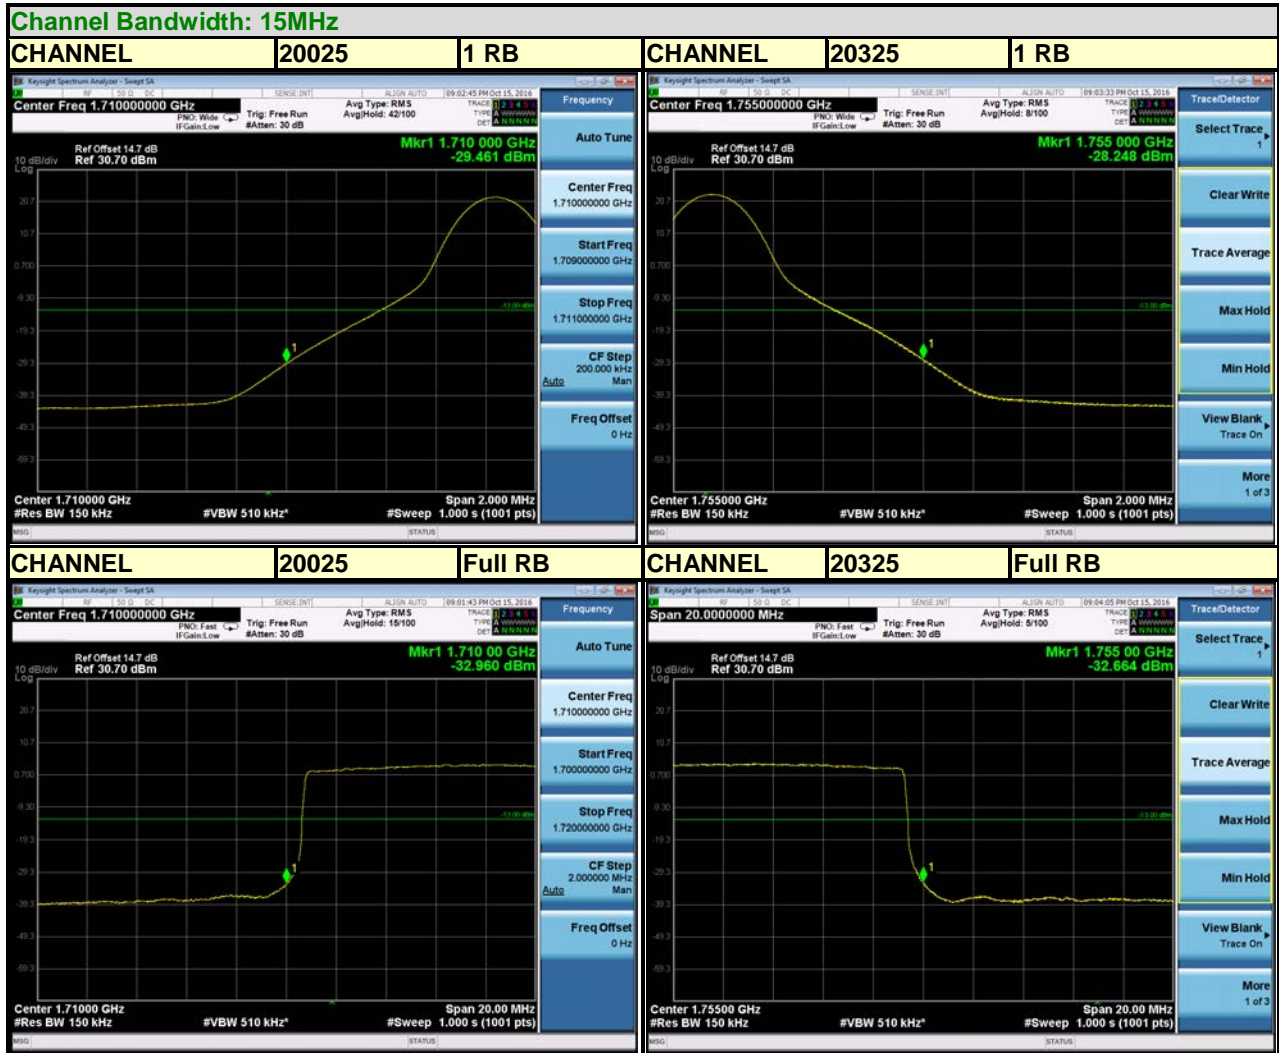

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 4



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 12



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 12



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 12

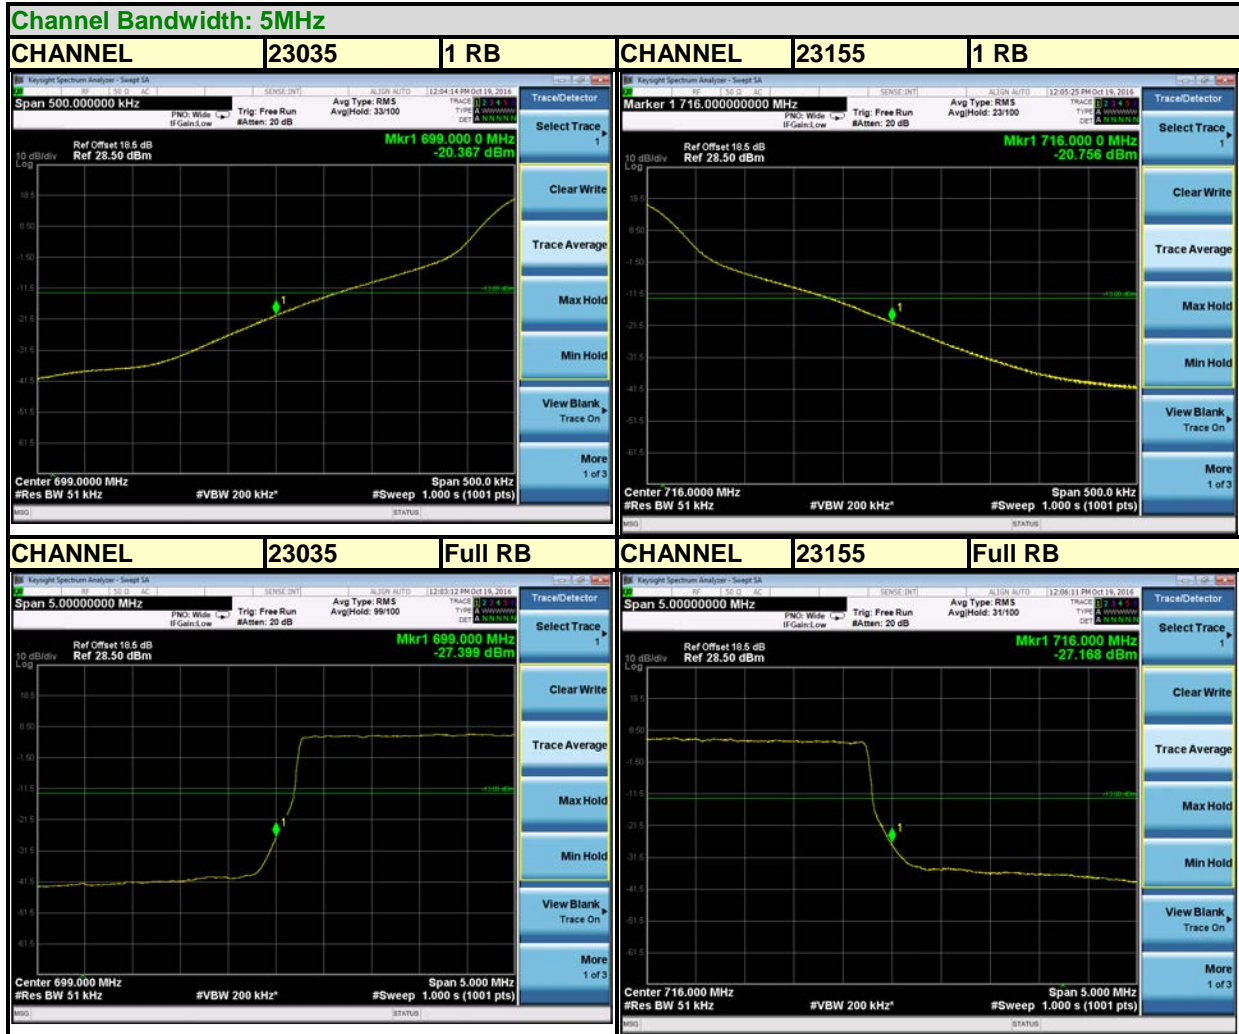

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 12

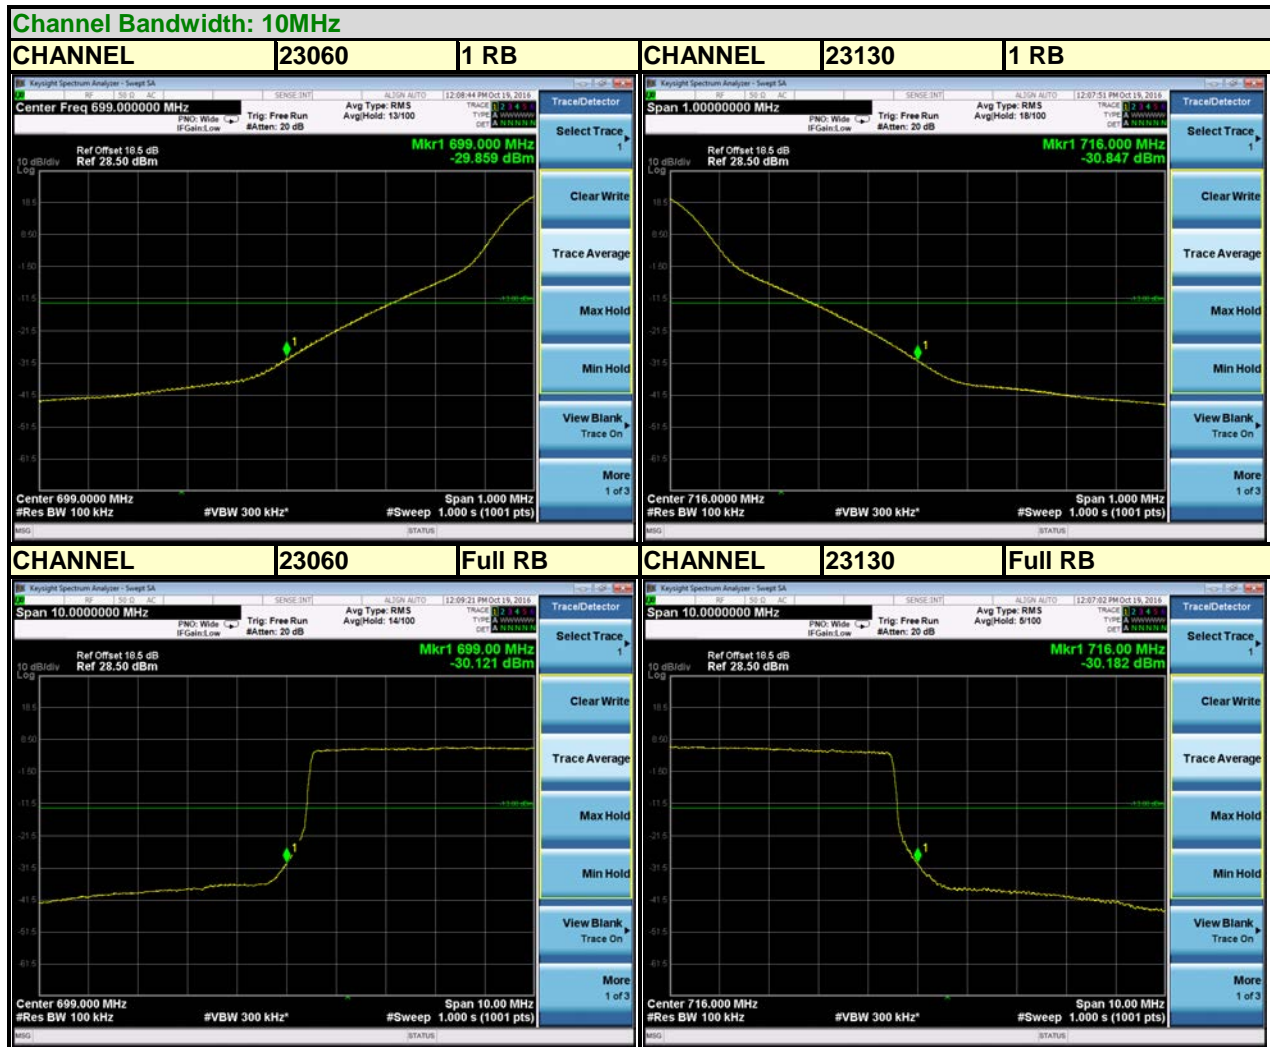

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 17

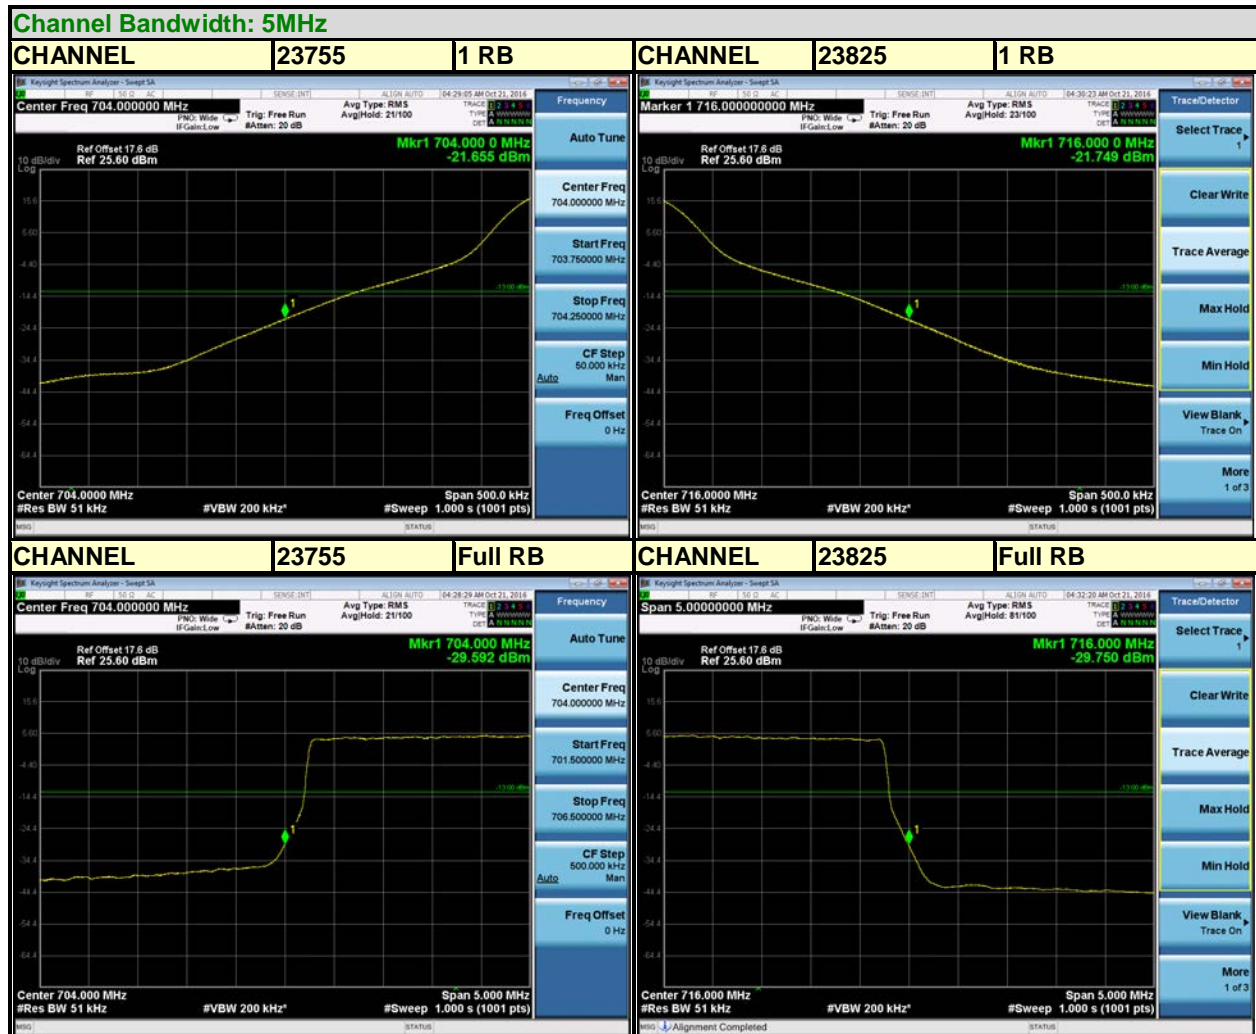

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com



Test Report No.: RF161008W001-5

LTE BAND 17



Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch

No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com

4.6 CONDUCTED SPURIOUS EMISSIONS


4.6.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.6.2 TEST PROCEDURE


- a. The EUT makes a phone call to the communication simulator. All measurements were done at middle operational frequency range.
- b. Measuring frequency range is from 30 MHz to 19.1GHz for WCDMA Band 4 & LTE Band 4, and 30 MHz to 9GHz for LTE Band 12 & LTE Band 17. 10dB attenuation pad is connected with spectrum. RBW=1MHz and VBW=3MHz are used for conducted emission measurement.

4.6.3 TEST SETUP

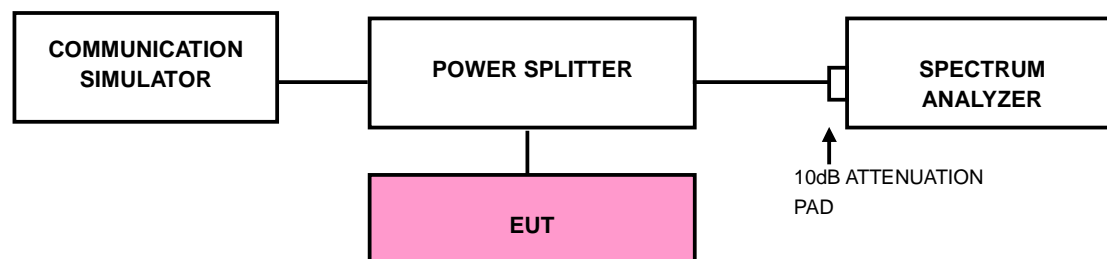




4.6.4 TEST RESULTS

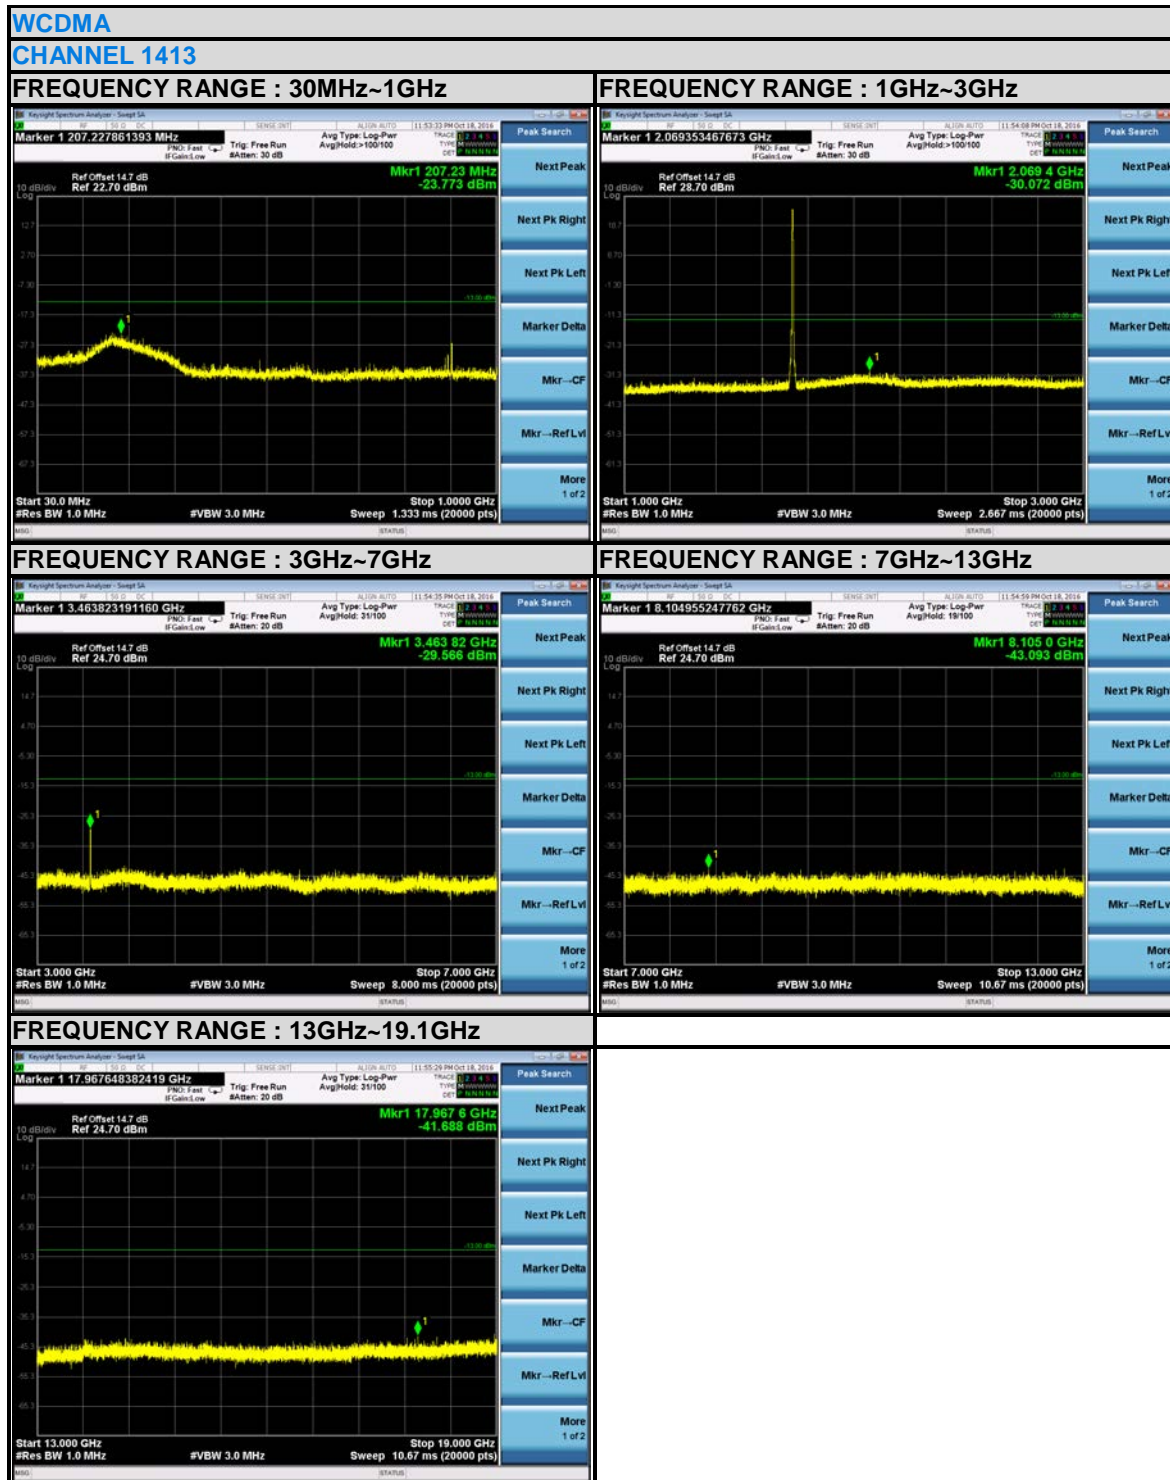




Test Report No.: RF161008W001-5

LTE BAND 4

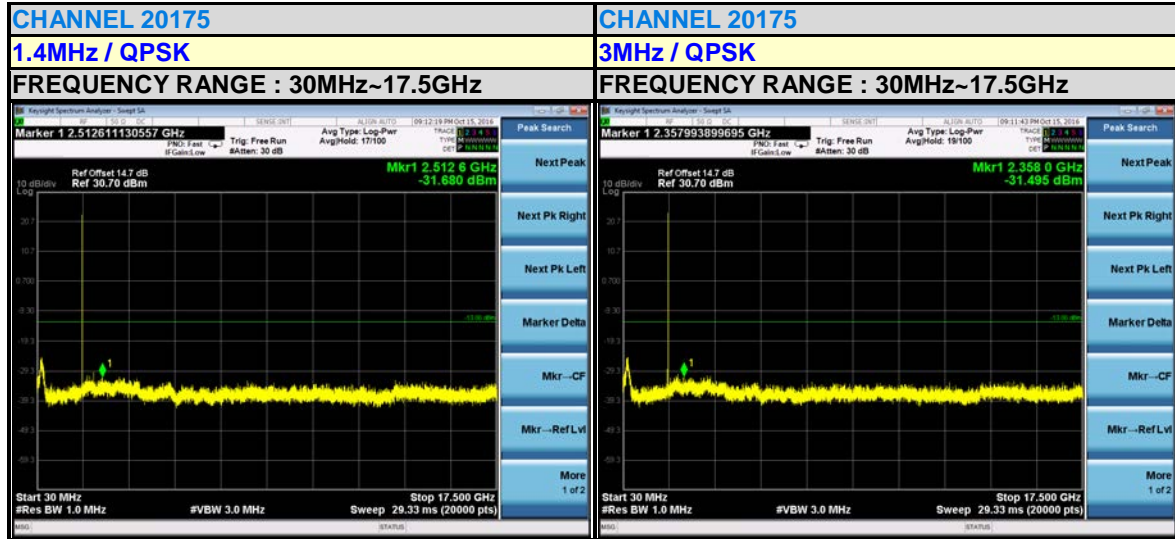

LTE BAND 4

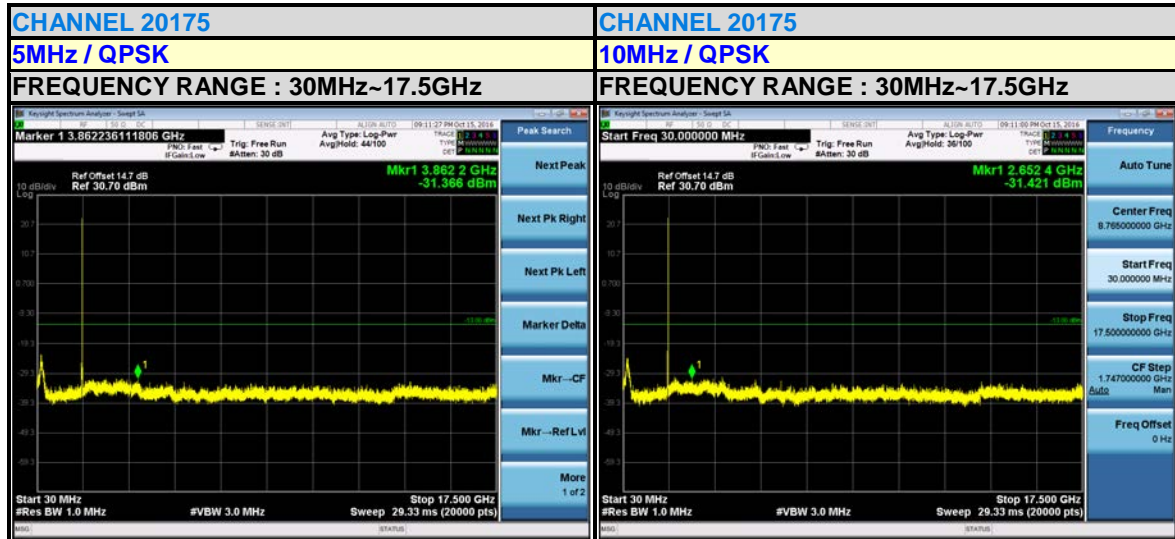

Bureau Veritas Shenzhen Co., Ltd.
Dongguan Branch


No. 34, Chenwulu Section, Guantai Rd.,
Houjie Town, Dongguan City,
Guangdong 523942, China

Tel: +86 769 8593 5656
Fax: +86 769 8593 1080
Email: customerservice.dg@cn.bureauveritas.com




Test Report No.: RF161008W001-5

LTE BAND 4

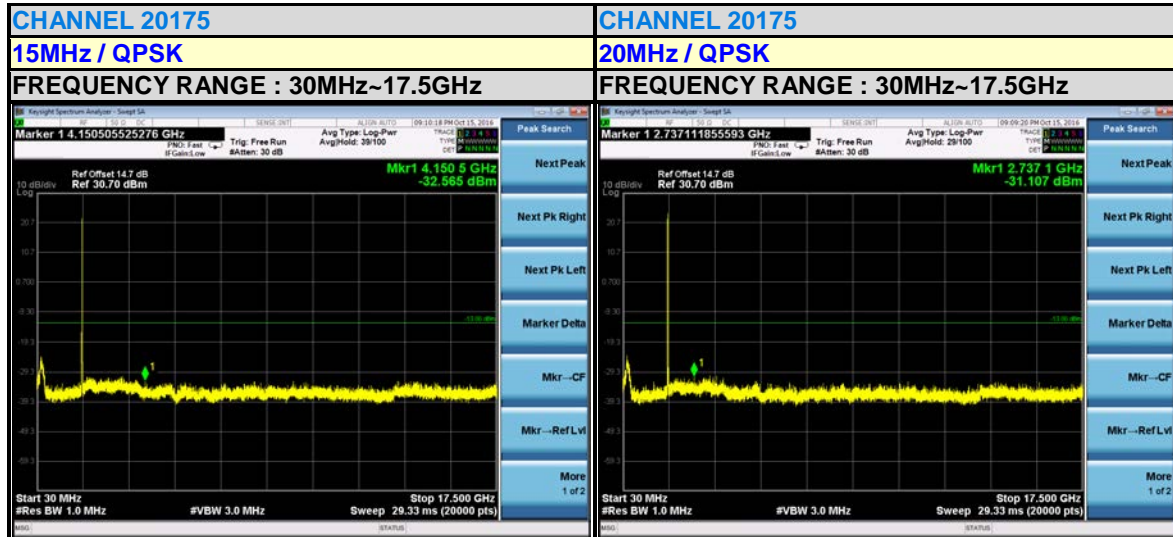


LTE BAND 12

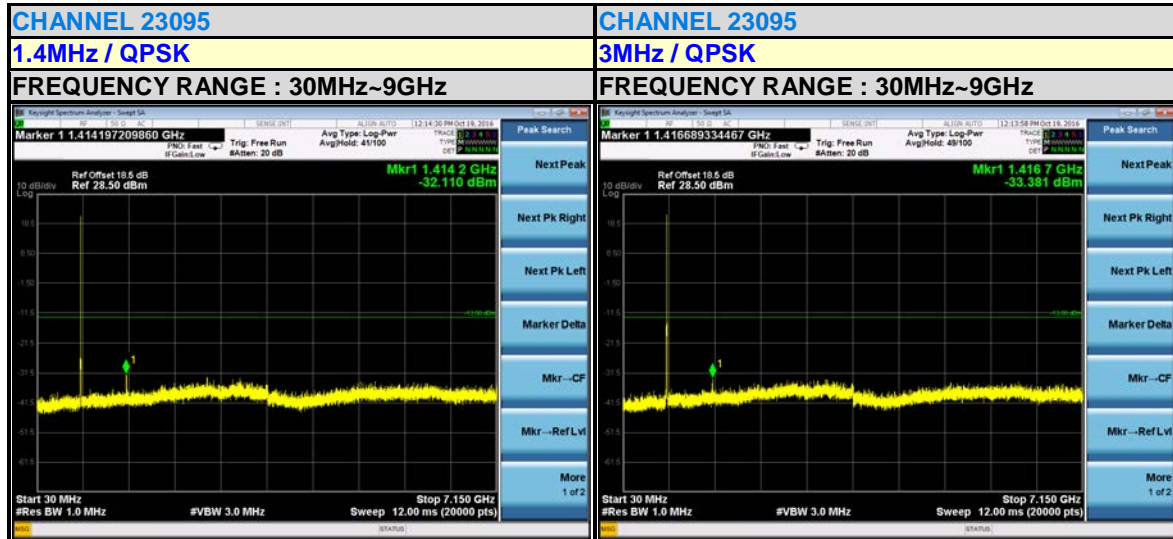




Test Report No.: RF161008W001-5

LTE BAND 12

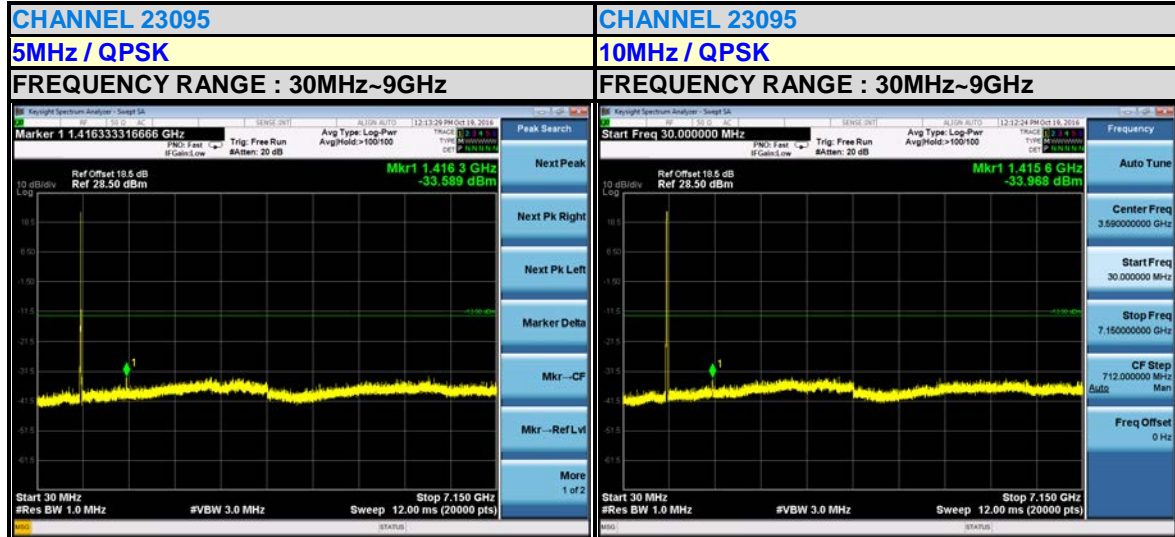

LTE BAND 17

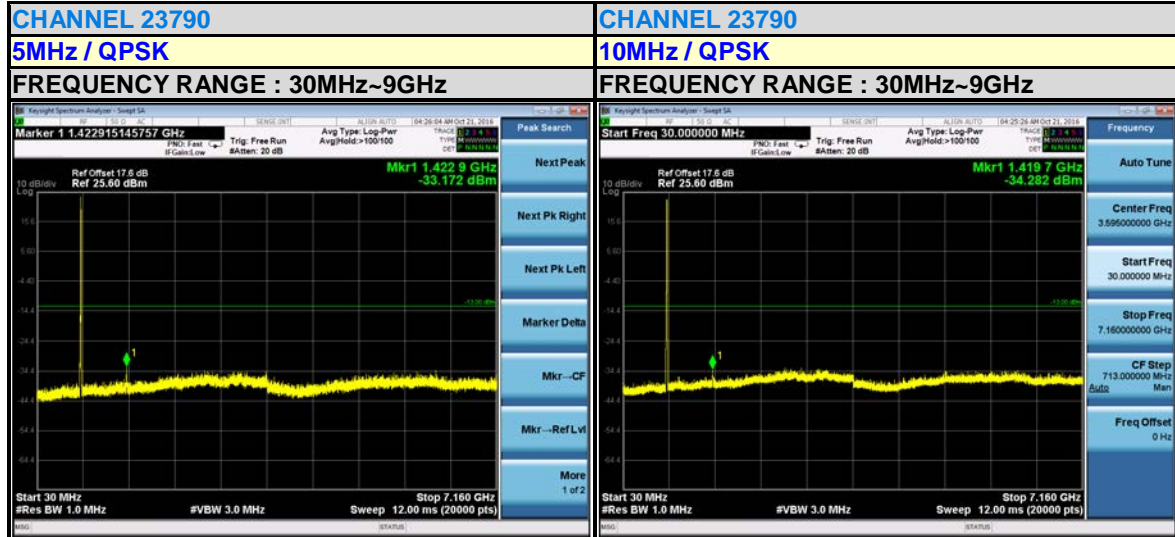



4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

The power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least $43 + 10 \log_{10}(P)$ dB. The limit of emission equal to -13dBm

4.7.2 TEST PROCEDURES


- a. Substitution method is used for E.I.R.P measurement. In the semi-anechoic chamber, EUT placed on the 0.8m height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The substitution horn antenna is substituted for EUT at the same position and signals generator export the CW signal to the substitution antenna via a TX cable. Rotated the Turn Table and moved receiving antenna to find the maximum radiation power. Adjust output power level of S.G to get a Value of spectrum reading equal to "Read Value" of step a. Record the power level of S.G
- c. $\text{EIRP} = \text{Output power level of S.G} - \text{TX cable loss} + \text{Antenna gain of substitution horn.}$
- d. E.R.P power can be calculated form E.I.R.P power by subtracting the gain of dipole, $\text{E.R.P power} = \text{E.I.P.R power} - 2.15\text{dBi.}$

NOTE: The resolution bandwidth of spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz.

4.7.3 DEVIATION FROM TEST STANDARD

No deviation

4.7.4 TEST SETUP

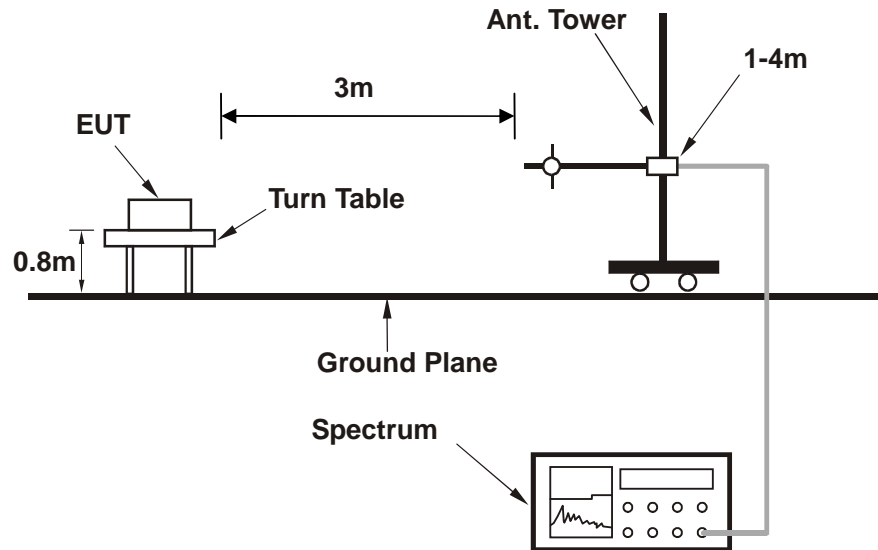

For the actual test configuration, please refer to the attached file (Test Setup Photo).




4.7.5 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

LTE Band 4:

MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	36.790	-31.16	-43.48	-13.00	-18.16	12.32	Peak	Horizontal
2	81.410	-42.79	-34.95	-13.00	-29.79	-7.84	Peak	Horizontal
3	124.090	-60.57	-44.84	-13.00	-47.57	-15.73	Peak	Horizontal
4	184.230	-64.06	-46.41	-13.00	-51.06	-17.65	Peak	Horizontal
5	270.560	-64.33	-49.07	-13.00	-51.33	-15.26	Peak	Horizontal
6	348.160	-70.39	-58.19	-13.00	-57.39	-12.20	Peak	Horizontal

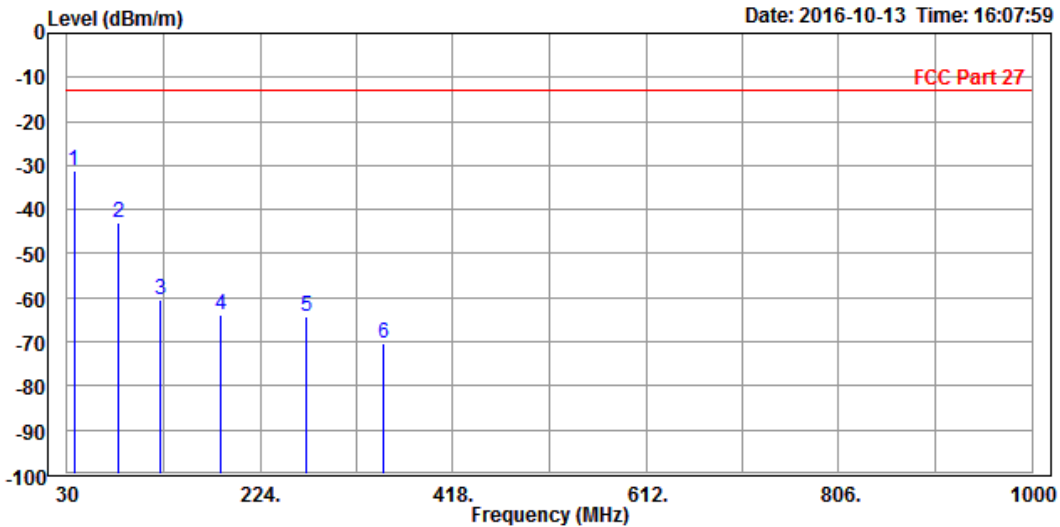




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Below 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP	31.940	-35.75	-38.50	-13.00	-22.75	2.75 Peak	Vertical
2		48.430	-39.86	-35.63	-13.00	-26.86	-4.23 Peak	Vertical
3		81.410	-50.36	-40.07	-13.00	-37.36	-10.29 Peak	Vertical
4		163.860	-62.22	-47.36	-13.00	-49.22	-14.86 Peak	Vertical
5		277.350	-66.01	-54.61	-13.00	-53.01	-11.40 Peak	Vertical
6		380.170	-69.38	-58.37	-13.00	-56.38	-11.01 Peak	Vertical

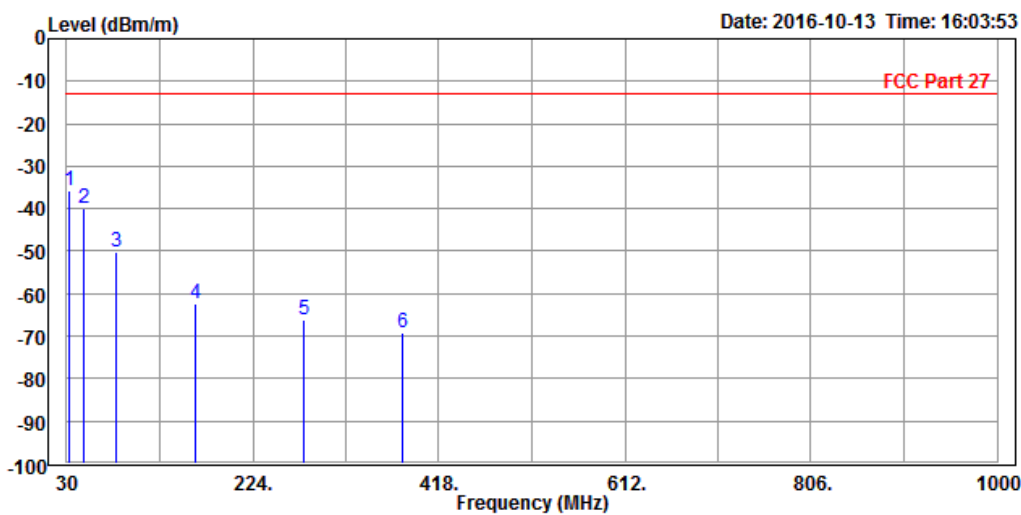




Test Report No.: RF161008W001-5

ABOVE 1GHz

WCDMA Band IV:

MODE	TX channel 1413	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-48.86	-50.89	-13.00	-35.86	2.03	Peak	Horizontal
2 PP	5197.000	-45.59	-54.20	-13.00	-32.59	8.61	Peak	Horizontal

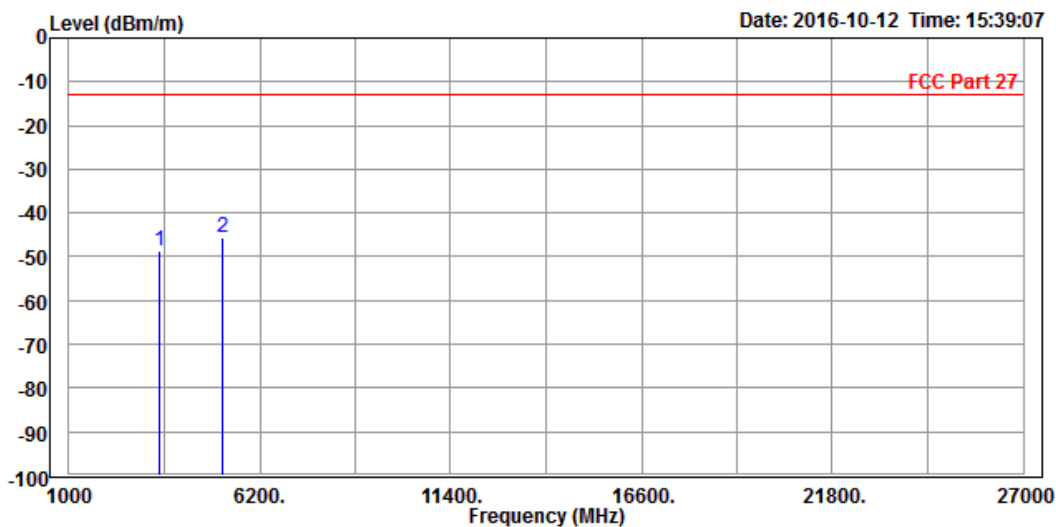




Test Report No.: RF161008W001-5

MODE	TX channel 1413	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.36	-53.89	-13.00	-38.36	2.53	Peak	Vertical
2 PP	5197.000	-45.30	-53.28	-13.00	-32.30	7.98	Peak	Vertical

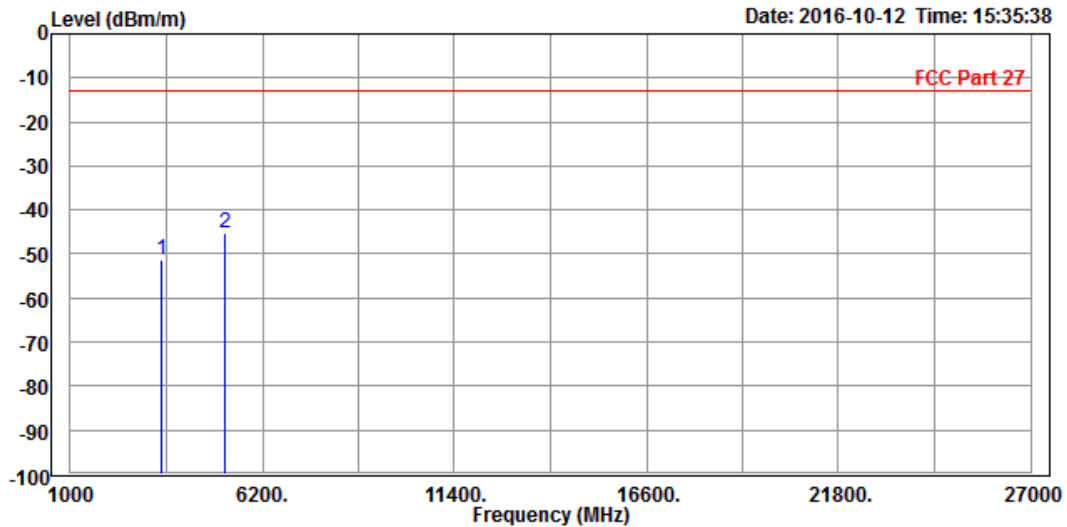




Test Report No.: RF161008W001-5

LTE BAND 4

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.55	-54.58	-13.00	-39.55	2.03	Peak	Horizontal
2 PP	5197.500	-46.10	-54.71	-13.00	-33.10	8.61	Peak	Horizontal

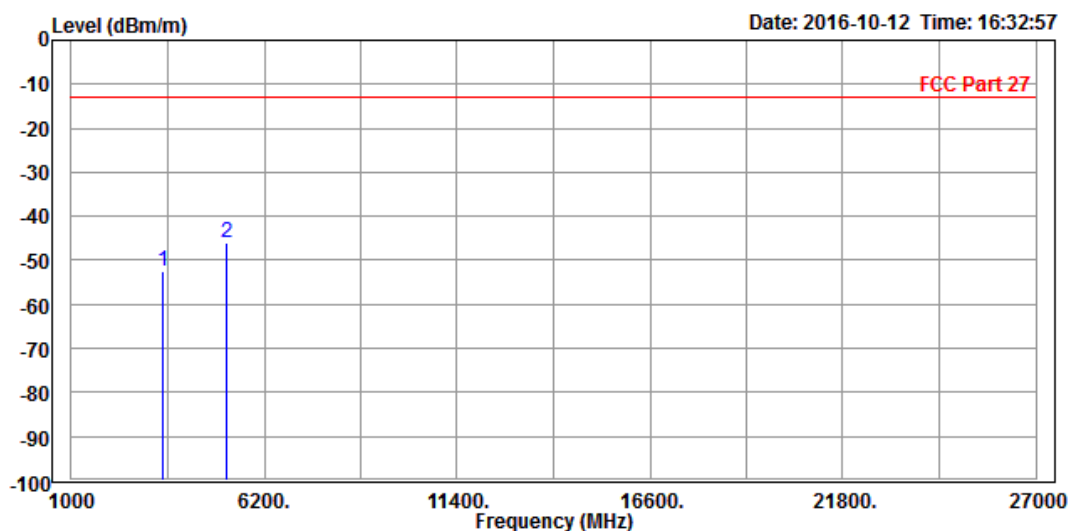




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-50.06	-52.59	-13.00	-37.06	2.53	Peak	Vertical
2 PP	5197.500	-47.07	-55.05	-13.00	-34.07	7.98	Peak	Vertical

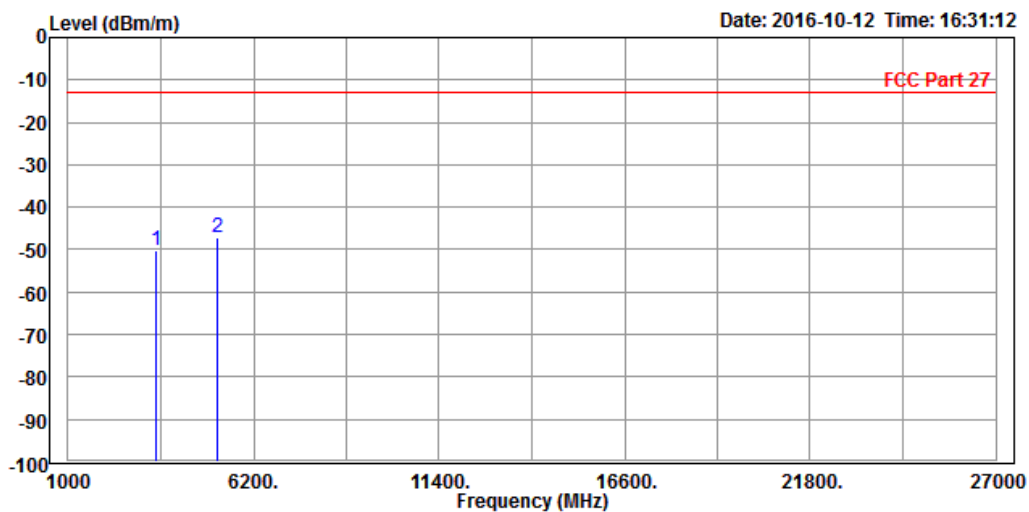




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3470.000	-52.79	-54.84	-13.00	-39.79	2.05	Peak	Horizontal
2	PP 5197.500	-46.23	-54.84	-13.00	-33.23	8.61	Peak	Horizontal

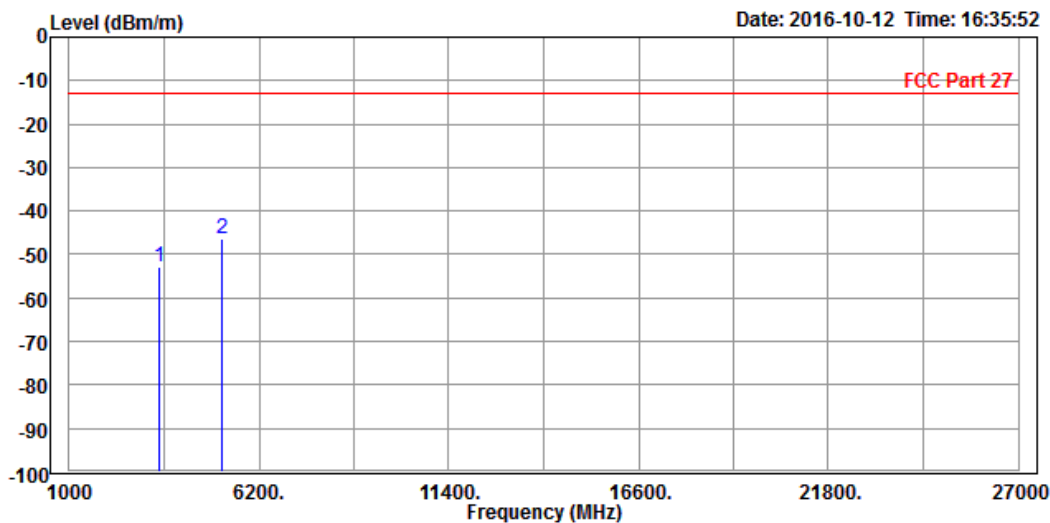




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.33	-54.86	-13.00	-39.33	2.53	Peak	Vertical
2 PP	5197.500	-46.65	-54.63	-13.00	-33.65	7.98	Peak	Vertical

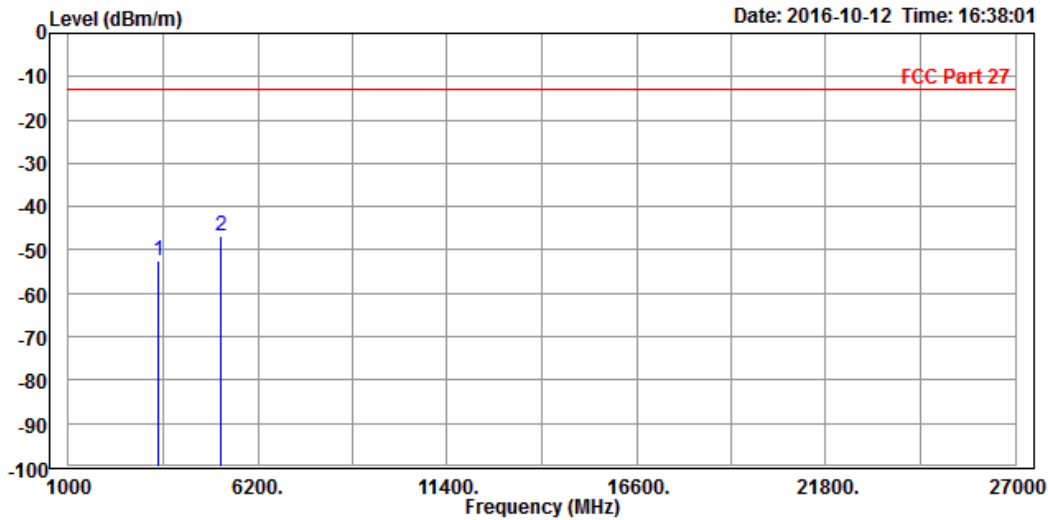




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.07	-53.10	-13.00	-38.07	2.03	Peak	Horizontal
2	PP 5197.500	-46.13	-54.74	-13.00	-33.13	8.61	Peak	Horizontal

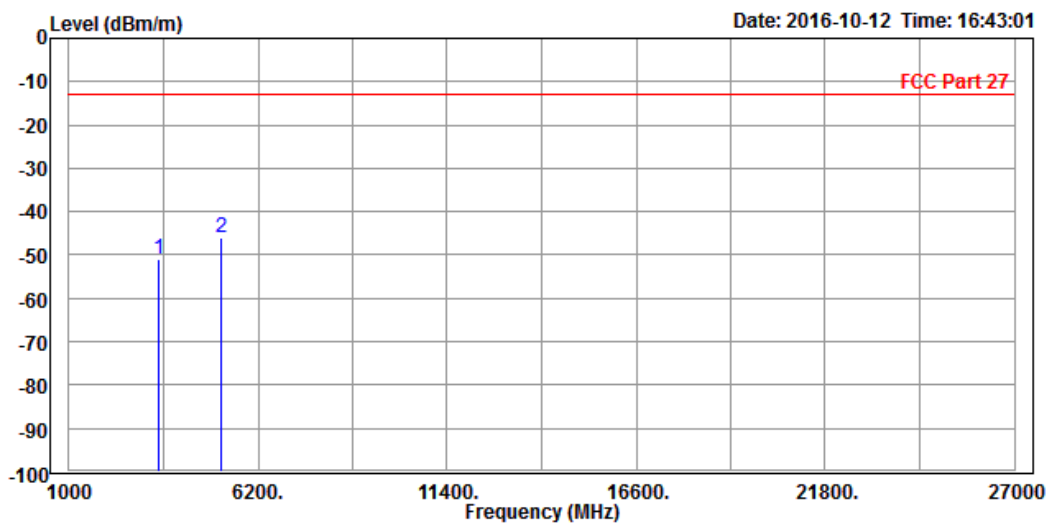




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-48.93	-51.46	-13.00	-35.93	2.53	Peak	Vertical
2	PP 5197.500	-45.73	-53.71	-13.00	-32.73	7.98	Peak	Vertical

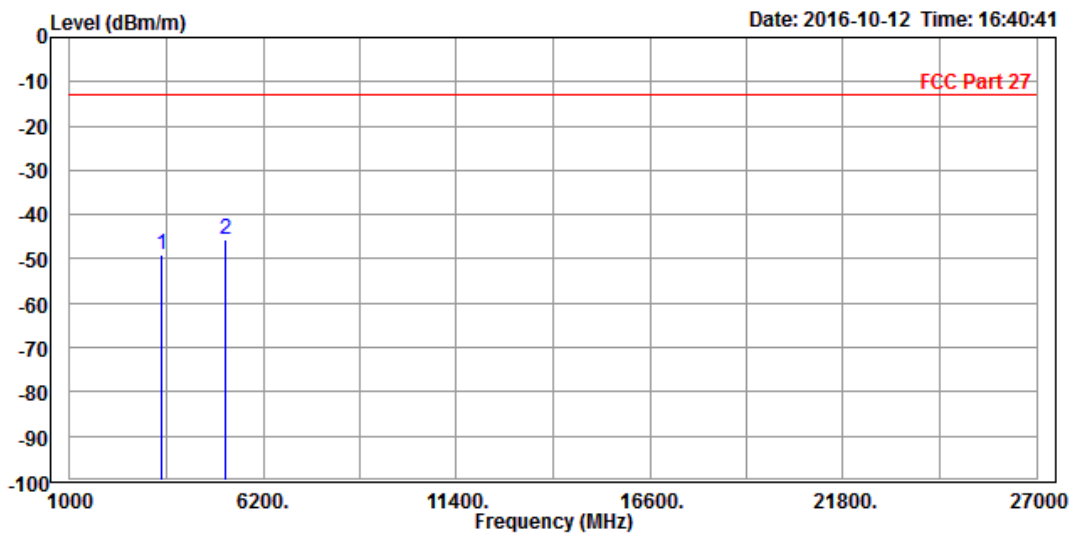




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-51.76	-53.79	-13.00	-38.76	2.03	Peak	Horizontal
2 PP	5197.500	-46.14	-54.75	-13.00	-33.14	8.61	Peak	Horizontal

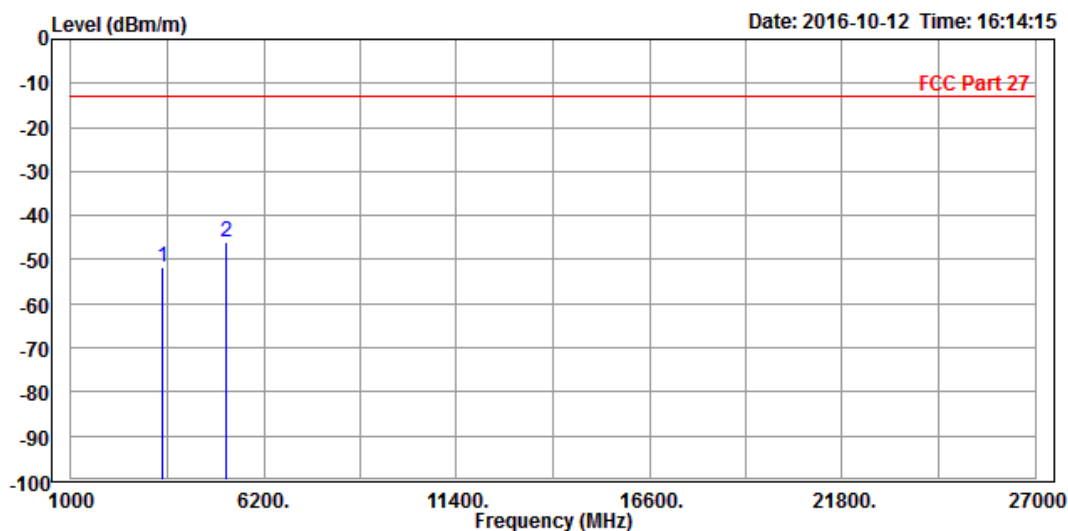




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-50.77	-53.30	-13.00	-37.77	2.53	Peak	Vertical
2 PP	5197.500	-46.65	-54.63	-13.00	-33.65	7.98	Peak	Vertical

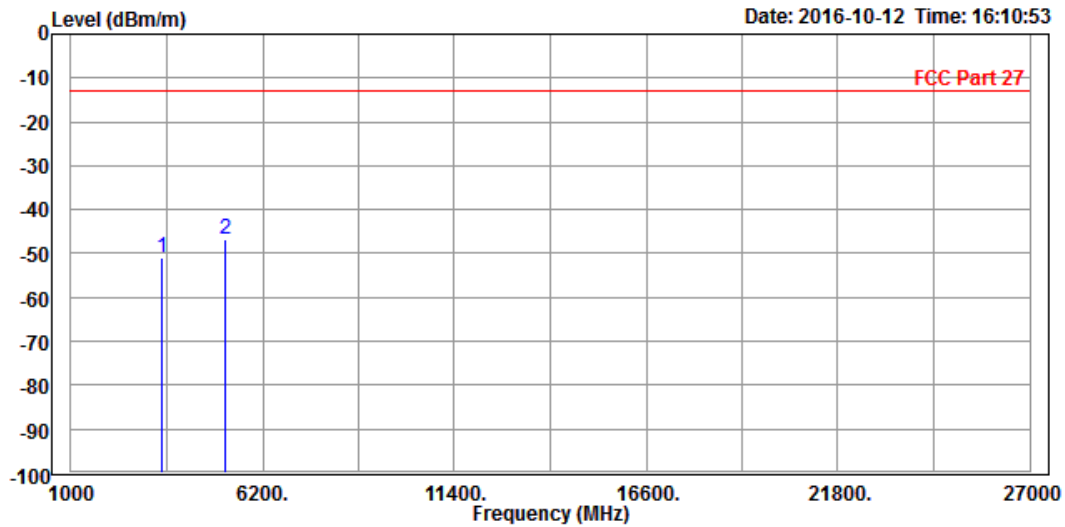




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 15MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.95	-54.98	-13.00	-39.95	2.03	Peak	Horizontal
2 PP	5197.500	-45.81	-54.42	-13.00	-32.81	8.61	Peak	Horizontal

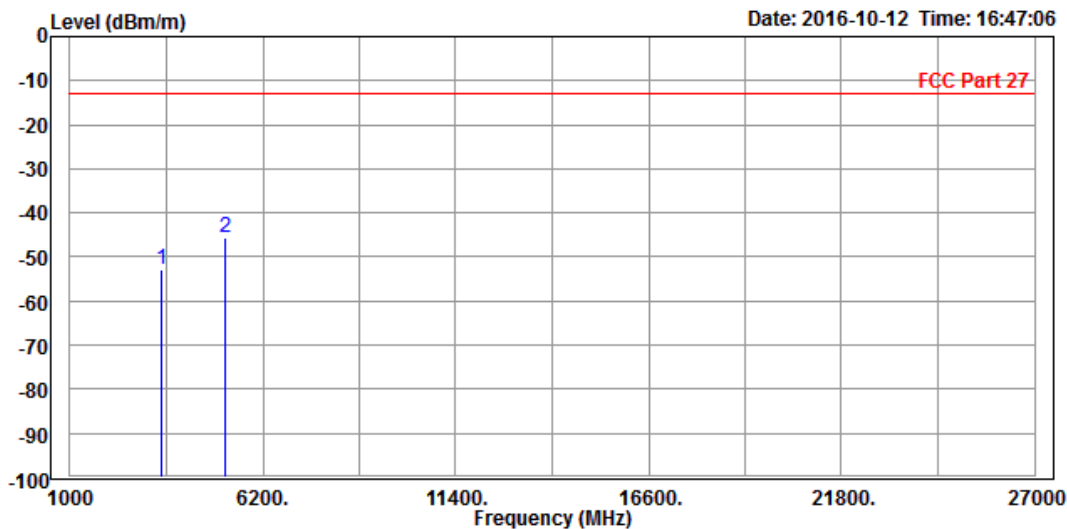




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.11	-54.64	-13.00	-39.11	2.53	Peak	Vertical
2 PP	5197.500	-46.78	-54.76	-13.00	-33.78	7.98	Peak	Vertical

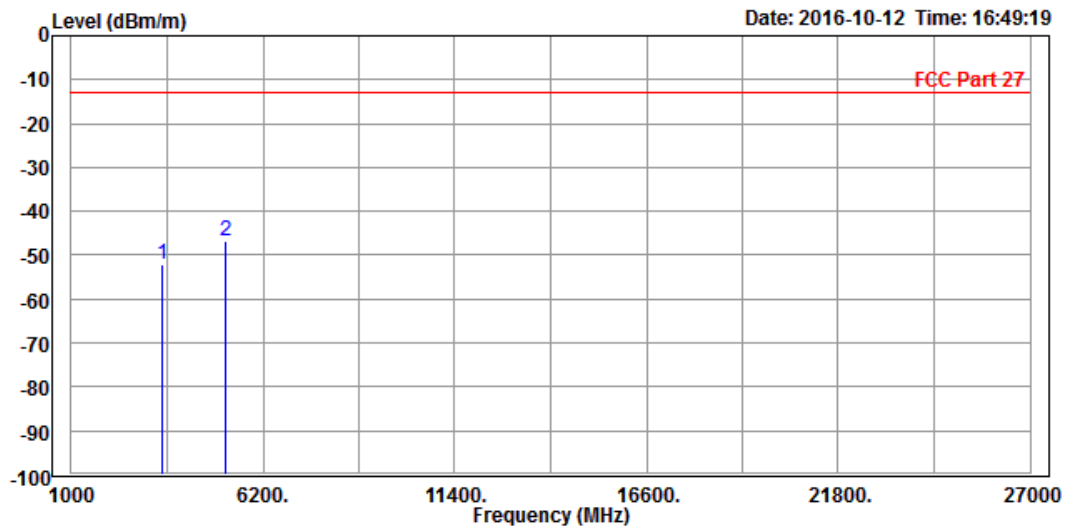




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 20MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-52.21	-54.24	-13.00	-39.21	2.03	Peak	Horizontal
2 PP	5197.500	-44.56	-53.17	-13.00	-31.56	8.61	Peak	Horizontal

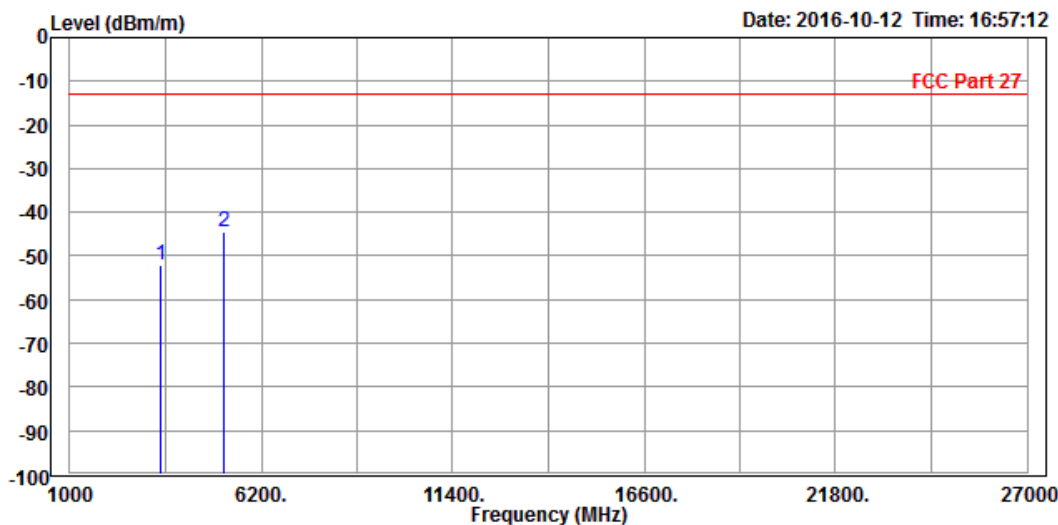




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	3465.000	-50.19	-52.72	-13.00	-37.19	2.53	Peak	Vertical
2 PP	5197.500	-46.49	-54.47	-13.00	-33.49	7.98	Peak	Vertical

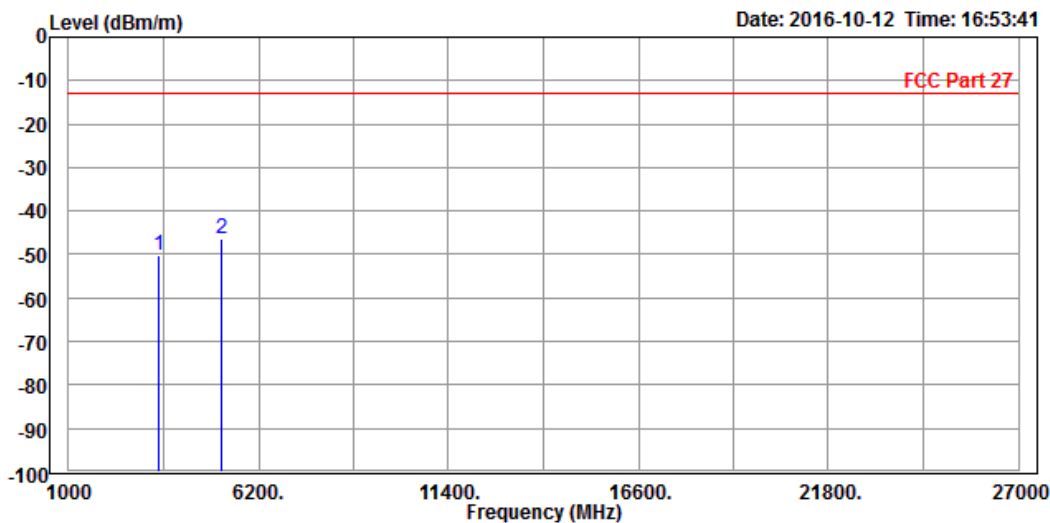




Test Report No.: RF161008W001-5

LTE BAND 12

CHANNEL BANDWIDTH: 1.4MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-56.15	-49.43	-13.00	-43.15	-6.72	Peak	Horizontal
2 PP	2122.500	-53.65	-51.72	-13.00	-40.65	-1.93	Peak	Horizontal

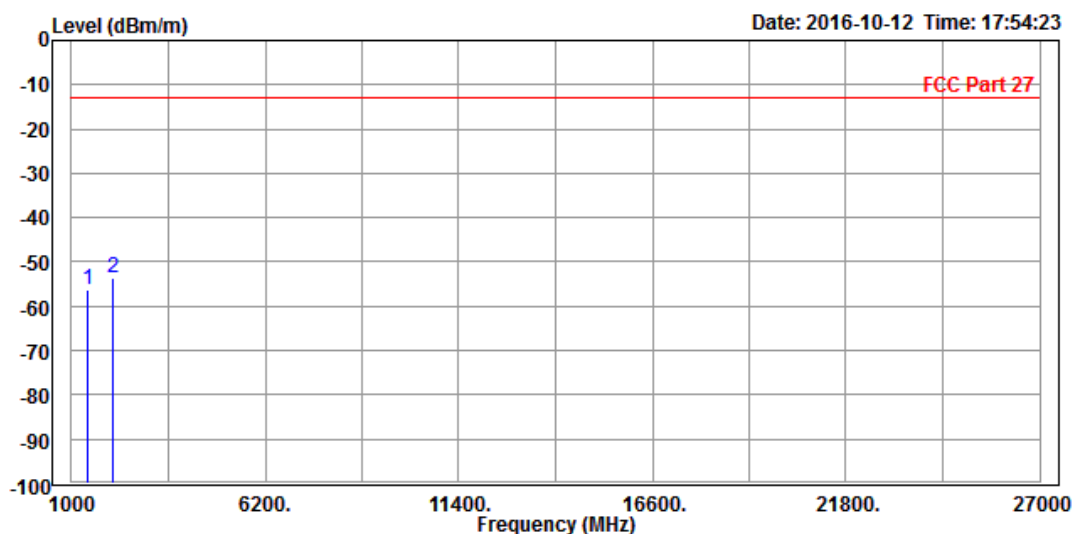




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1416.000	-51.78	-46.34	-13.00	-38.78	-5.44	Peak	Vertical
2	2122.500	-54.15	-53.91	-13.00	-41.15	-0.24	Peak	Vertical

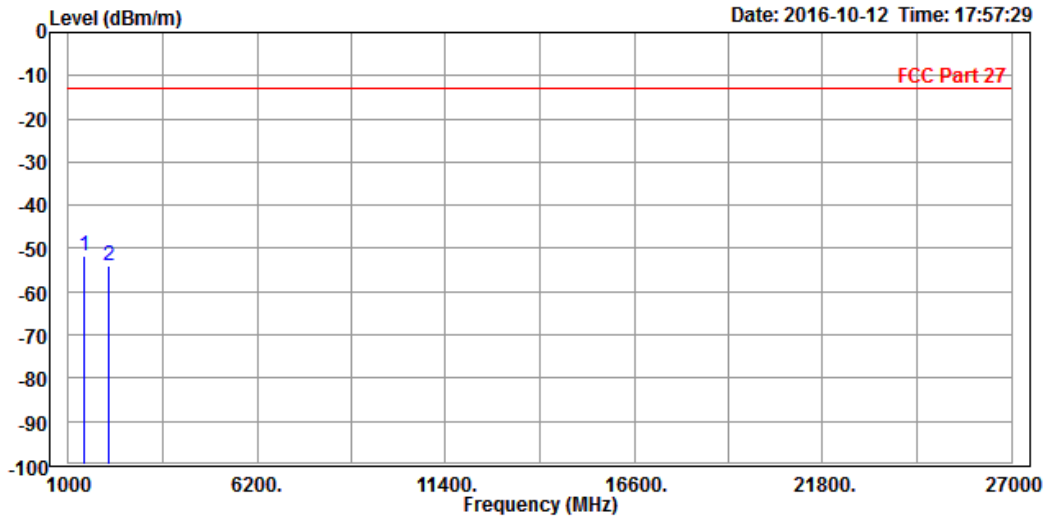




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 3MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

		Read	Limit	Over				
	Freq	Level	Level	Line	Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1416.000	-55.34	-48.62	-13.00	-42.34	-6.72	Peak	Horizontal
2	2122.500	-55.48	-53.55	-13.00	-42.48	-1.93	Peak	Horizontal

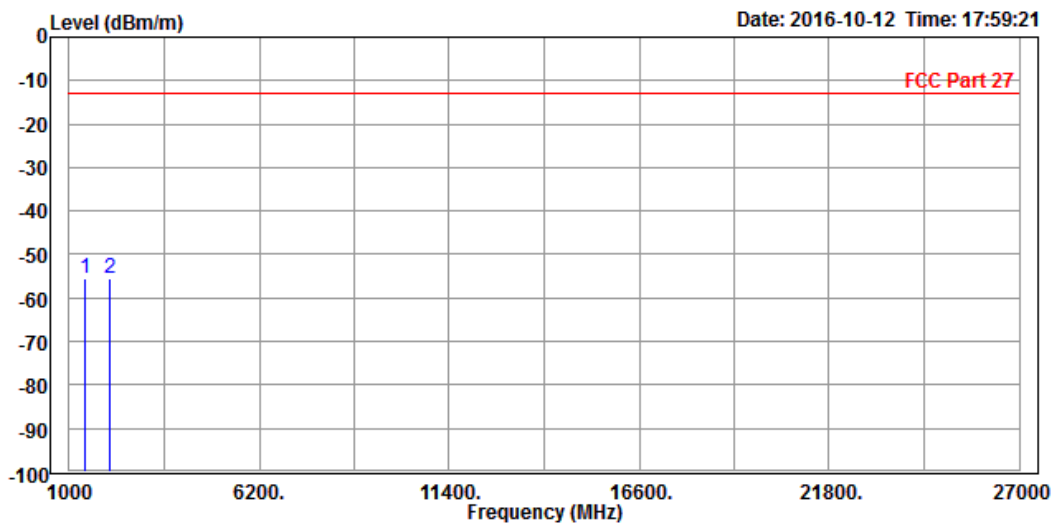




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-56.30	-50.86	-13.00	-43.30	-5.44	Peak	Vertical
2	PP 2122.500	-55.12	-54.88	-13.00	-42.12	-0.24	Peak	Vertical

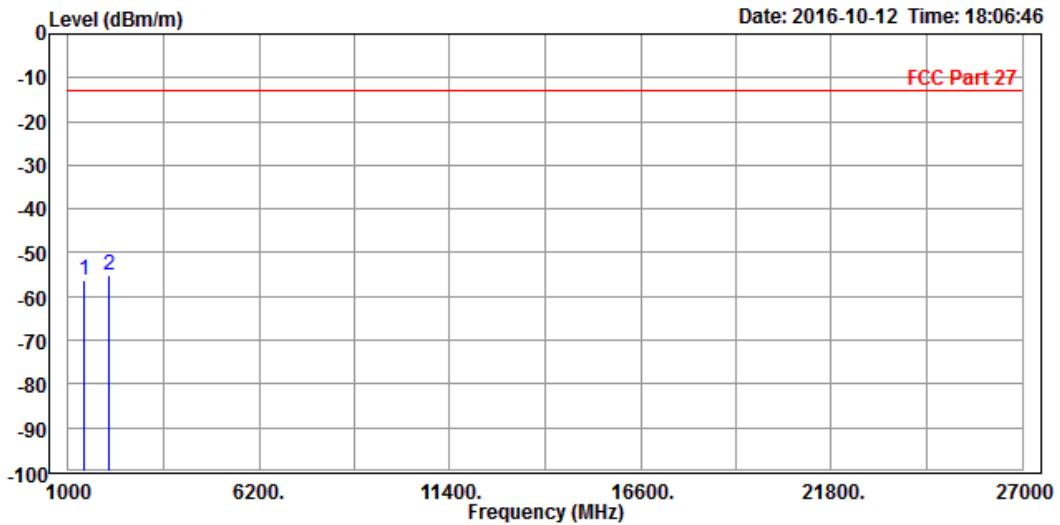




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-57.41	-50.69	-13.00	-44.41	-6.72	Peak	Horizontal
2	PP 2122.500	-56.87	-54.94	-13.00	-43.87	-1.93	Peak	Horizontal

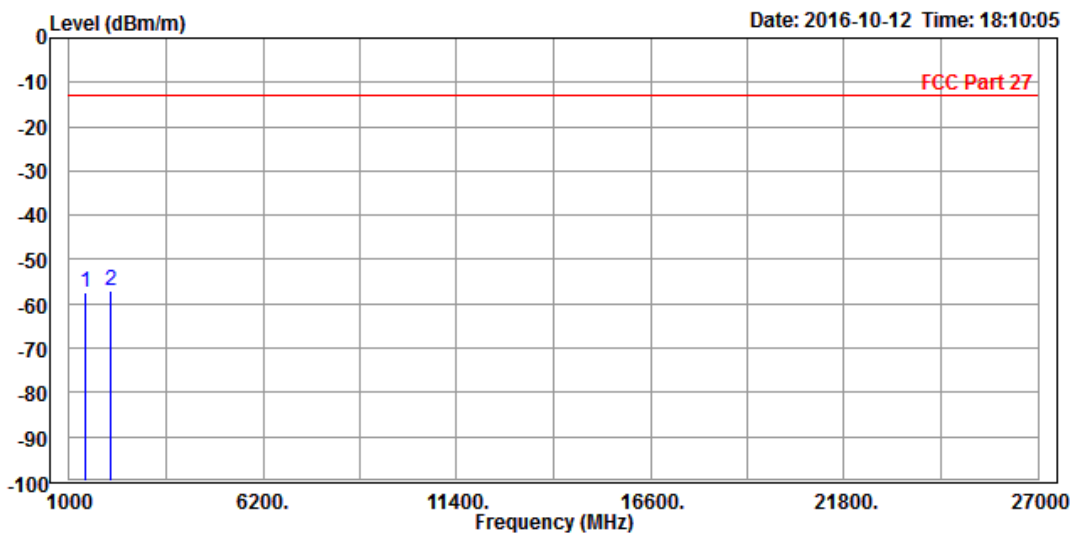




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-54.45	-49.01	-13.00	-41.45	-5.44	Peak	Vertical
2	PP 2122.500	-53.30	-53.06	-13.00	-40.30	-0.24	Peak	Vertical

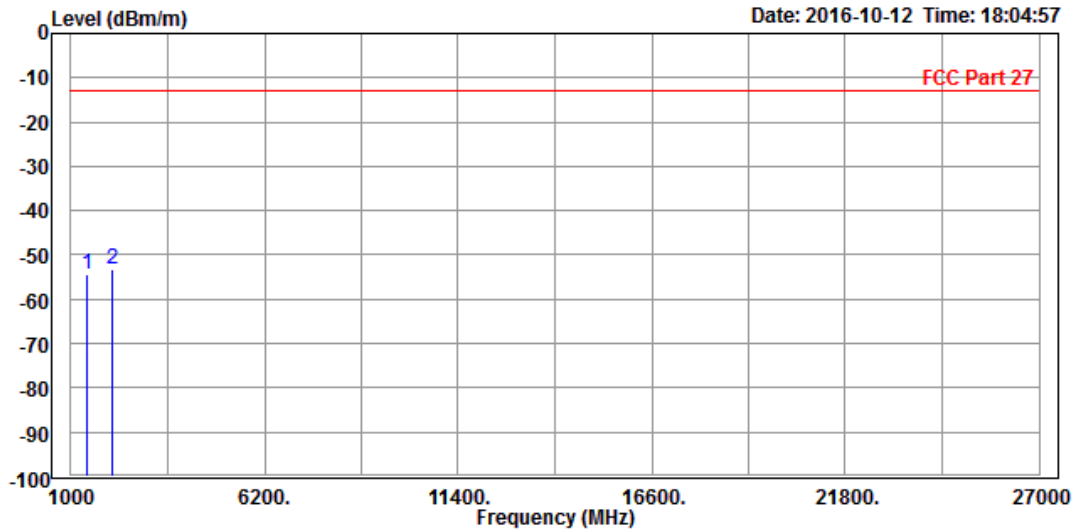




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1416.000	-53.52	-46.80	-13.00	-40.52	-6.72	Peak	Horizontal
2	2122.500	-57.10	-55.17	-13.00	-44.10	-1.93	Peak	Horizontal

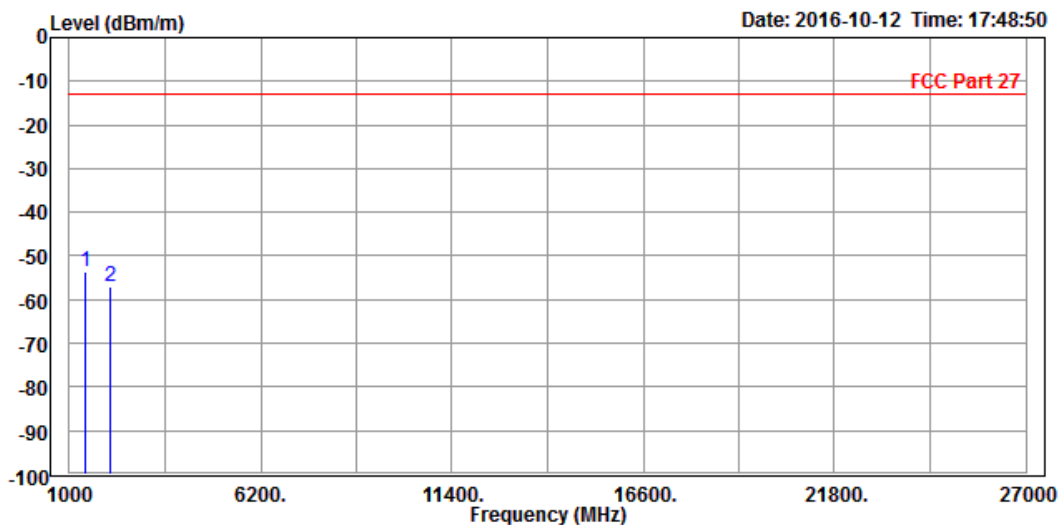




Test Report No.: RF161008W001-5

MODE	TX channel 20175	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	PP 1416.000	-51.68	-46.24	-13.00	-38.68	-5.44	Peak	Vertical
2	2122.500	-55.40	-55.16	-13.00	-42.40	-0.24	Peak	Vertical

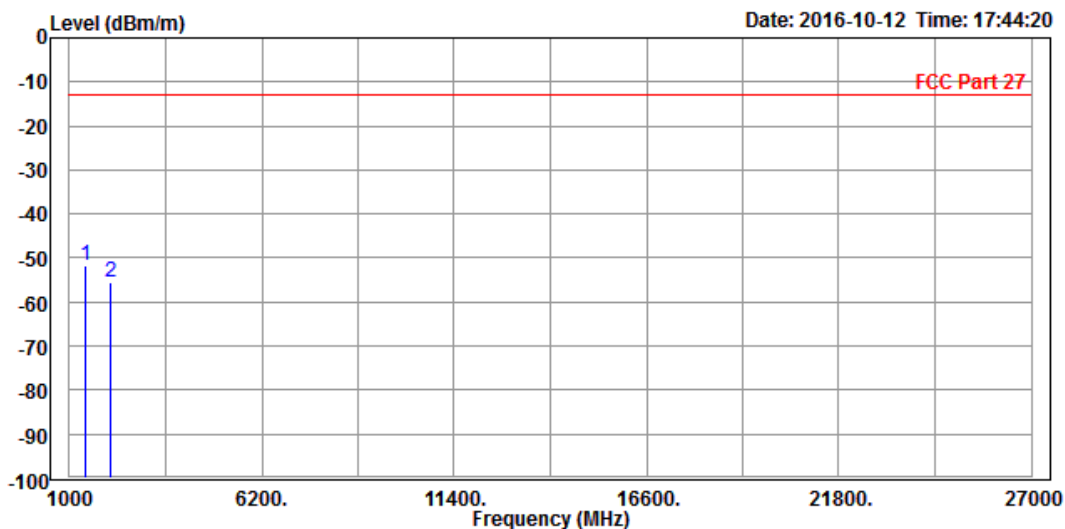




Test Report No.: RF161008W001-5

LTE Band 17

CHANNEL BANDWIDTH: 5MHz / QPSK

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-56.31	-49.59	-13.00	-43.31	-6.72	Peak	Horizontal
2 PP	2130.000	-54.26	-52.33	-13.00	-41.26	-1.93	Peak	Horizontal

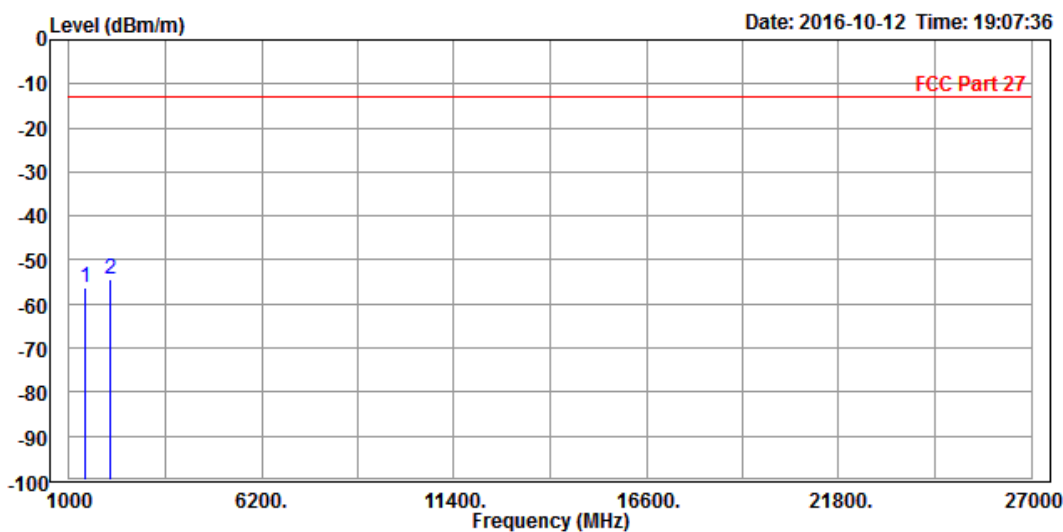




Test Report No.: RF161008W001-5

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-55.40	-49.96	-13.00	-42.40	-5.44	Peak	Vertical
2	PP 2130.000	-44.21	-43.97	-13.00	-31.21	-0.24	Peak	Vertical

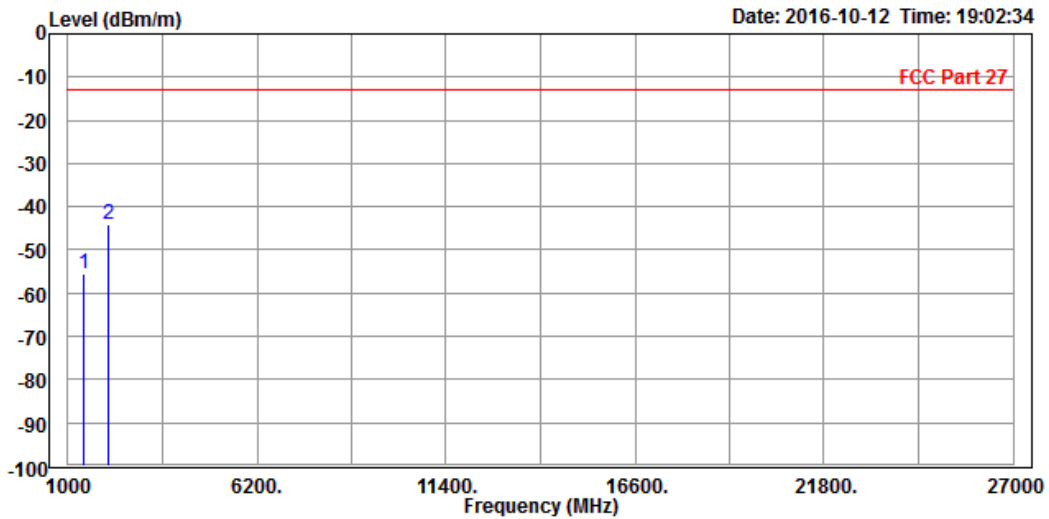




Test Report No.: RF161008W001-5

CHANNEL BANDWIDTH: 10MHz / QPSK

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-57.17	-50.45	-13.00	-44.17	-6.72	Peak	Horizontal
2	PP 2130.000	-56.42	-54.49	-13.00	-43.42	-1.93	Peak	Horizontal

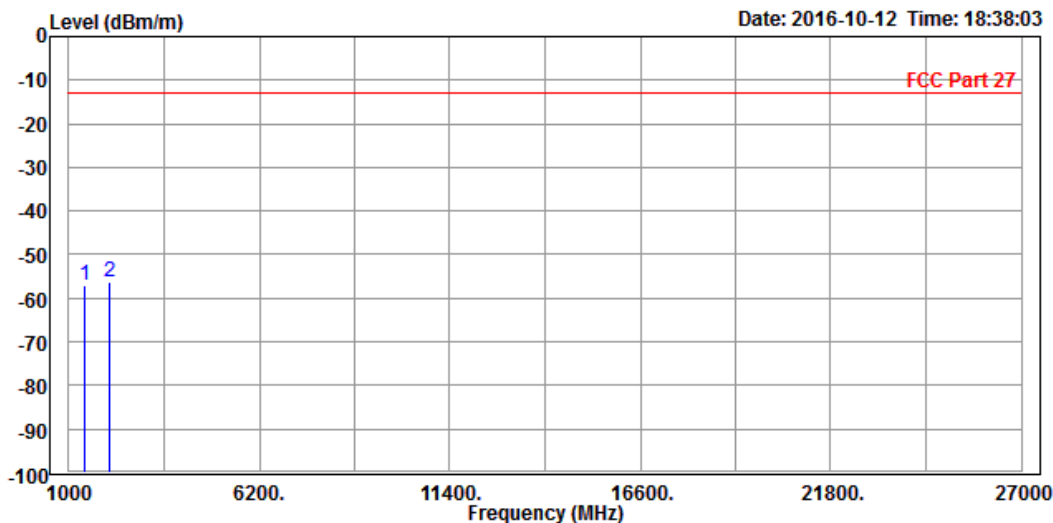




Test Report No.: RF161008W001-5

MODE	TX channel 23790	FREQUENCY RANGE	Above 1000MHz
ENVIRONMENTAL CONDITIONS	26deg. C, 56%RH	INPUT POWER	DC 5V from adapter
TESTED BY	Tony		
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M			

	Freq	Level	Read Level	Limit Line	Over Limit	Factor	Remark	Pol/Phase
	MHz	dBm/m	dBm	dBm/m	dB	dB/m		
1	1416.000	-56.23	-50.79	-13.00	-43.23	-5.44	Peak	Vertical
2	PP 2130.000	-54.12	-53.88	-13.00	-41.12	-0.24	Peak	Vertical

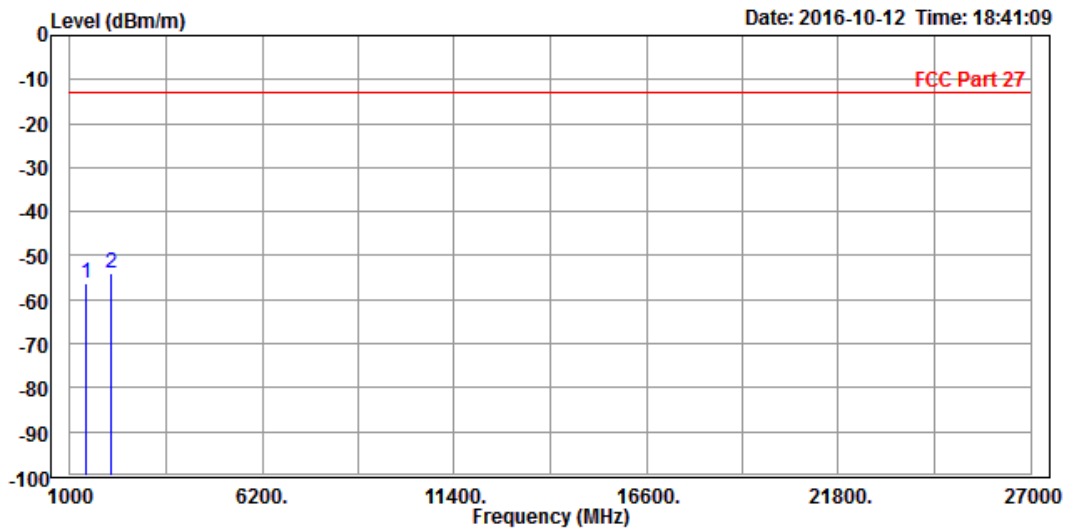



Test Report No.: RF161008W001-5

5 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Shenzhen Co., Ltd. Dongguan Branch, were founded in 2002 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Dongguan EMC/RF Lab:

Tel: +86-769-85935656

Fax: +86-769-85931080

Email: customerservice.dg@cn.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



Test Report No.: RF161008W001-5

6 APPENDIX A – MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

---END---