


(Channel 138,5690MHz, 802.11 ax(HEW 80))

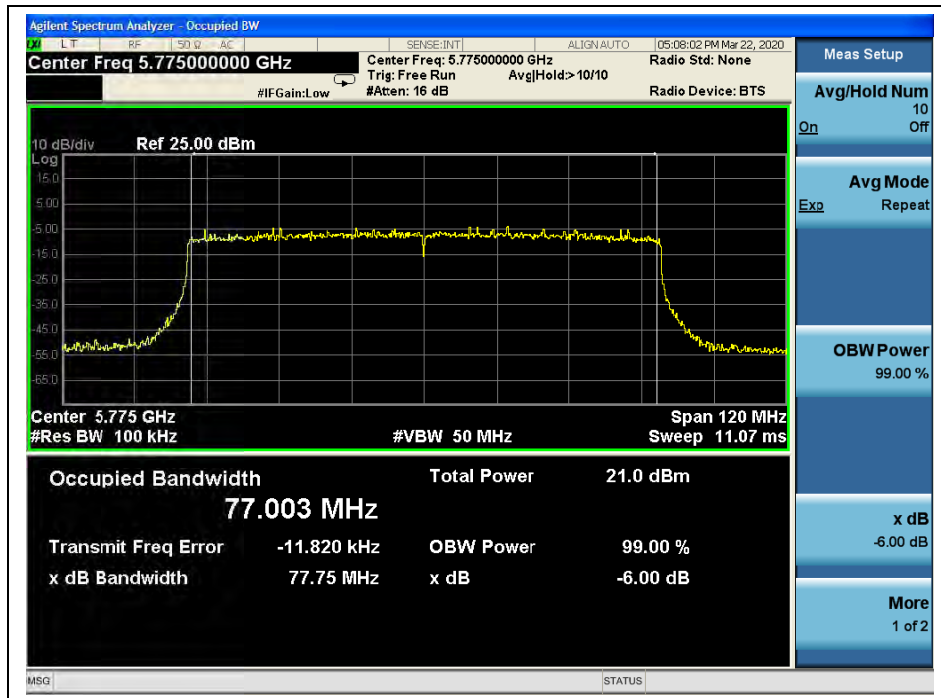

(Channel 155, 5775 MHz, 802.11 ax(HEW80))

2.5. Maximum Power Spectral Density

2.5.1. Requirement

(1) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(2) For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

(3) For the band 5.725-5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500KHz band.


If transmitting antennas of directional gain greater than 6 dBi are used, the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(4) According to KDB662911D01 Measure-and-sum technique, the conducted emission level (e.g., transmit power or power in specified bandwidth) is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in units that are directly proportional to power.

(5) According to KDB 662911 D01, the directional gain = $G_{ANT} + 10\log(N_{ANT})$ dBi, where G_{ANT} is the antenna gain in dBi, N_{ANT} is the number of outputs.

2.5.2. Test Description

Test Setup:

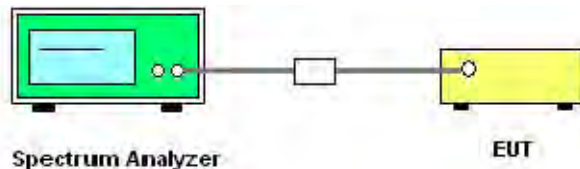

The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 50 Ohm; the path loss as the factor is calibrated to correct the reading.

A. Test Procedure

KDB 789033 Section F) Maximum Power Spectral Density (PSD) Method SA-3 was used in order to prove compliance

- 1) Set span to encompass the entire -26dB emission bandwidth
- 2) Set RBW = 1 MHz. Set VBW \geq 3 MHz.
- 3) Number of points in sweep \geq 2 Span / RBW. Sweep time = auto.
- 4) Detector = Average (RMS)
- 5) Trace mode = Max hold
- 6) Record the max value



2.5.3. Test Result

Below is the worst case situation test data:

802.11a Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Corrected PPSD (dBm/MHz) | | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|-------|-------------|--------------------------|-------|--------------------|---------|
| | | ANT 0 | ANT 1 | | ANT 0 | ANT 1 | | |
| 36 | 5180 | 5.15 | 3.83 | 0.04 | 5.19 | 3.87 | 11 | PASS |
| 40 | 5200 | 5.05 | 3.62 | | 5.09 | 3.66 | | |
| 48 | 5240 | 5.34 | 3.70 | | 5.38 | 3.74 | | |
| 52 | 5260 | 5.31 | 4.03 | | 5.35 | 4.07 | | |
| 60 | 5300 | 5.20 | 4.15 | | 5.24 | 4.19 | | |
| 64 | 5320 | 4.97 | 4.24 | | 5.01 | 4.28 | | |
| 100 | 5500 | 5.82 | 4.63 | | 5.86 | 4.67 | | |
| 120 | 5600 | 5.28 | 4.37 | | 5.32 | 4.41 | | |
| 144 | 5720 | 6.04 | 5.03 | | 6.08 | 5.07 | | |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Corrected PPSD (dBm/MHz) | | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | ANT 0 | ANT 1 | | |
| 144 | 5720 | 3.26 | 2.72 | 0.04 | 3.30 | 2.76 | 30 | PASS |
| 149 | 5745 | 3.19 | 2.21 | | 3.23 | 2.25 | | |
| 157 | 5785 | 2.80 | 2.00 | | 2.84 | 2.04 | | |
| 165 | 5825 | 2.54 | 1.70 | | 2.58 | 1.74 | | |


B. Test Plots




(Channel 36, 5180MHz, 802.11a, ANT 0)




(Channel 40, 5200 MHz, 802.11a, ANT 0)

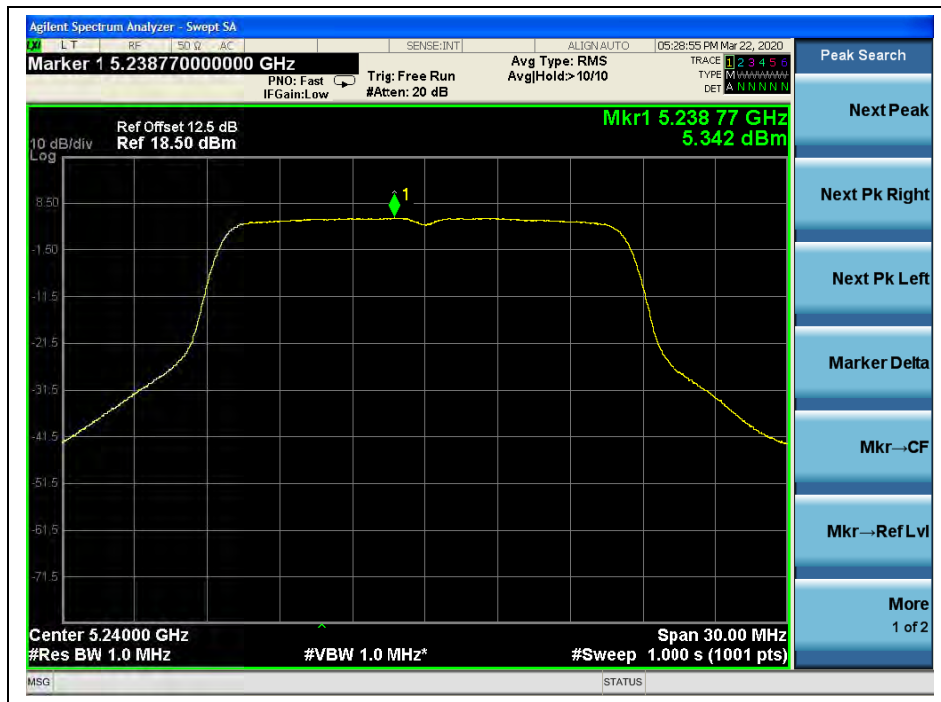


(Channel 48, 5240MHz, 802.11a, ANT 0)

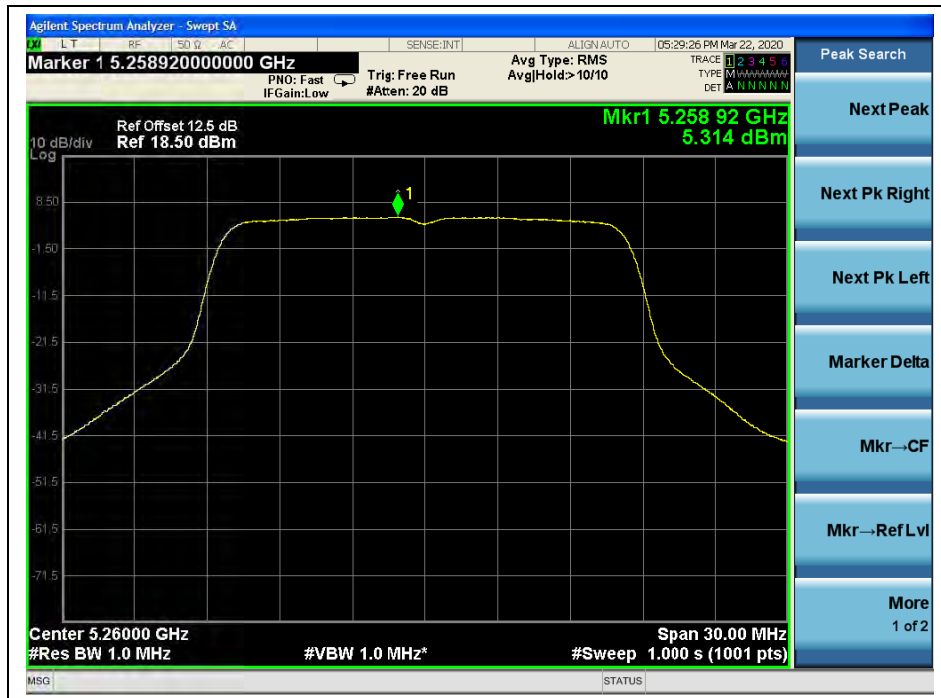


(Channel 52, 5260MHz, 802.11a, ANT 0)

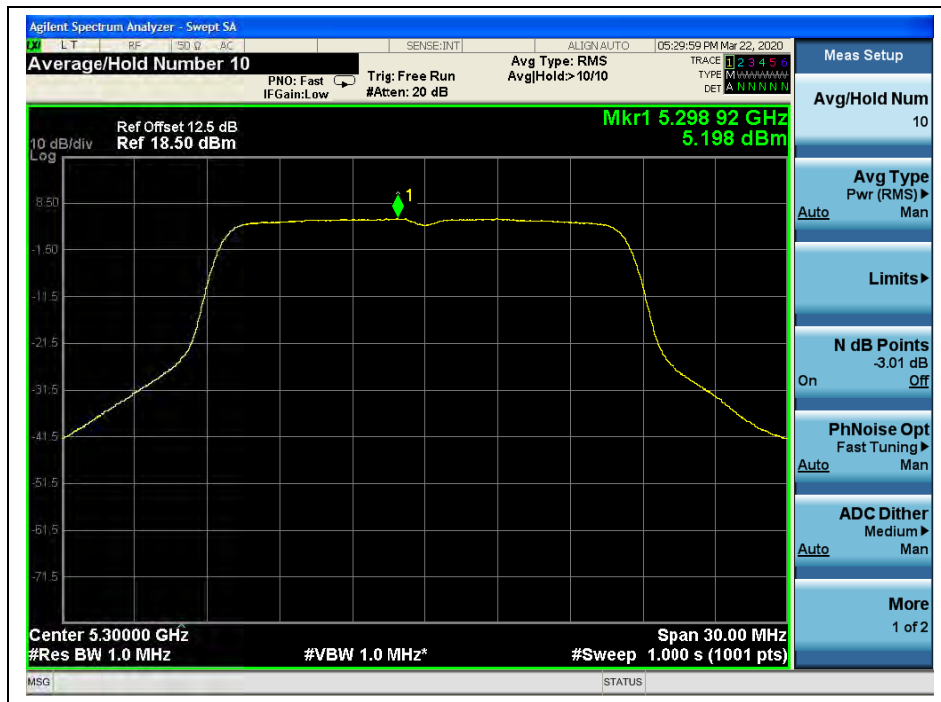


(Channel 60, 5300 MHz, 802.11a, ANT 0)

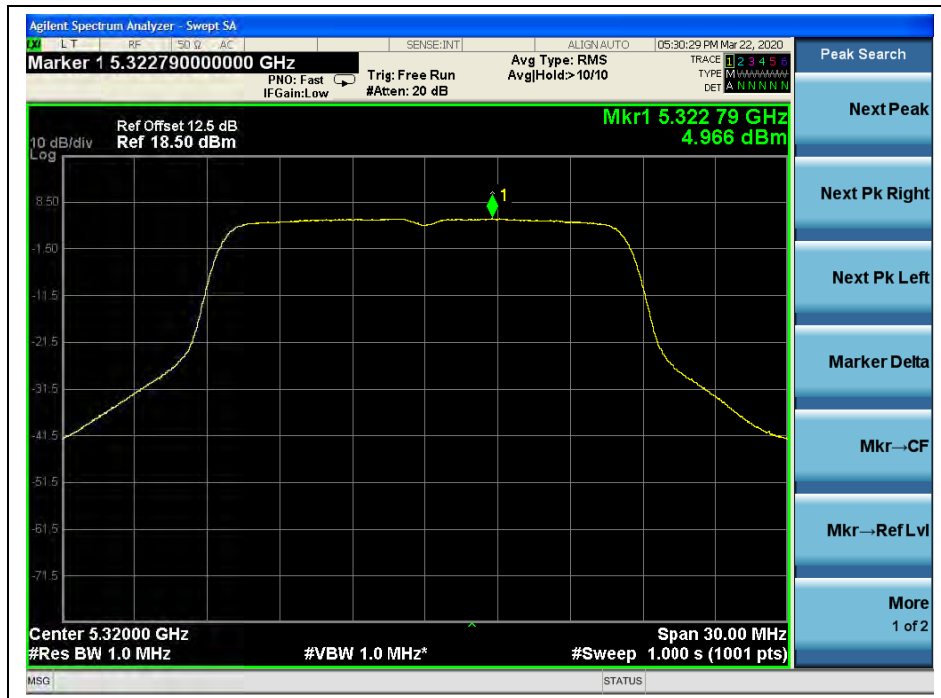


(Channel 64, 5320MHz, 802.11a, ANT 0)

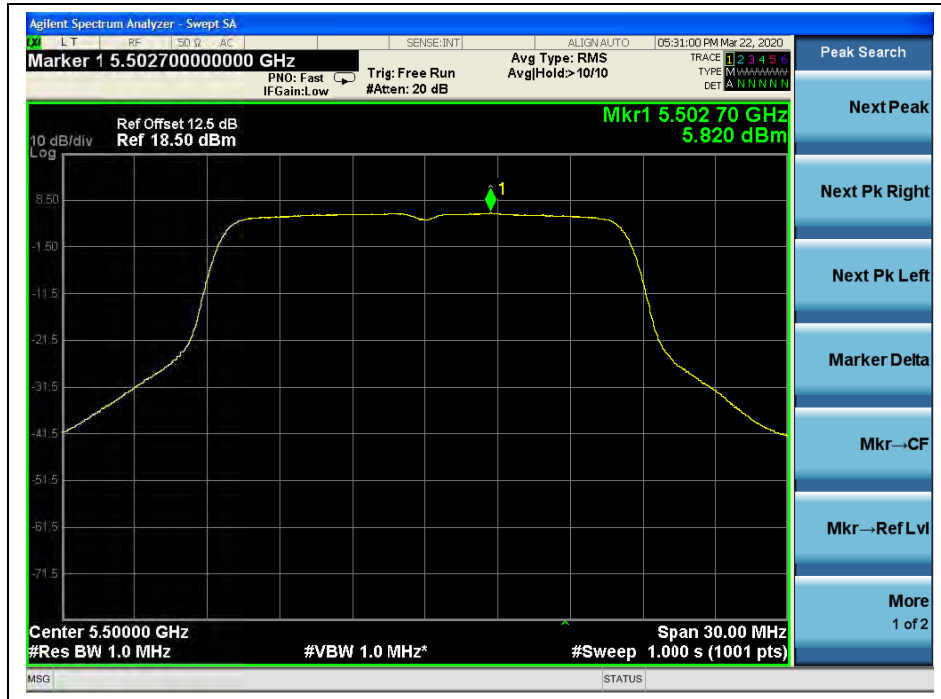

(Channel 100,5500MHz, 802.11a, ANT 0)

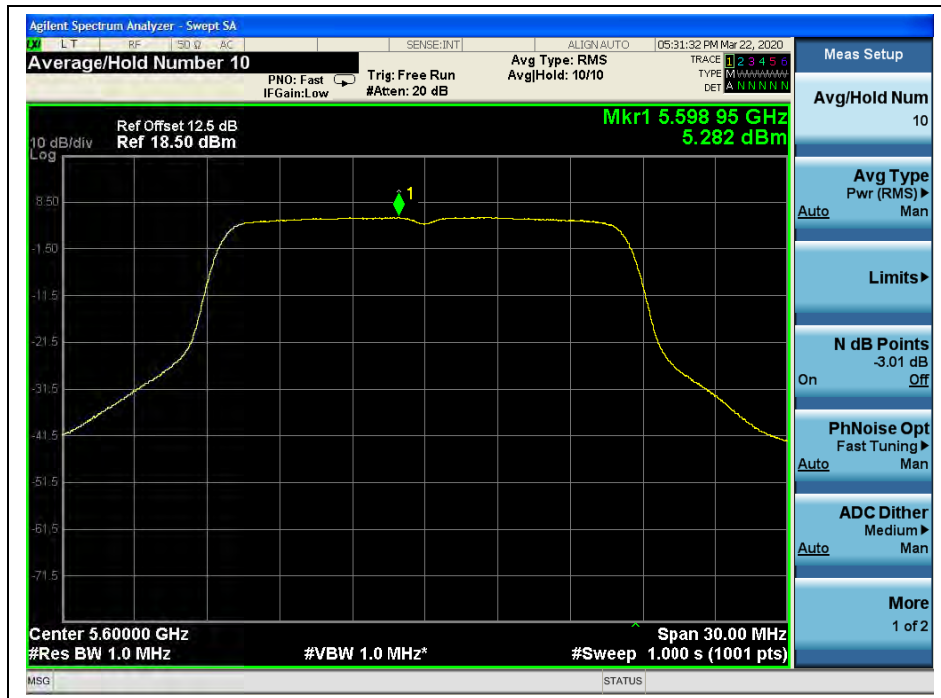

(Channel 120, 5600 MHz, 802.11a, ANT 0)

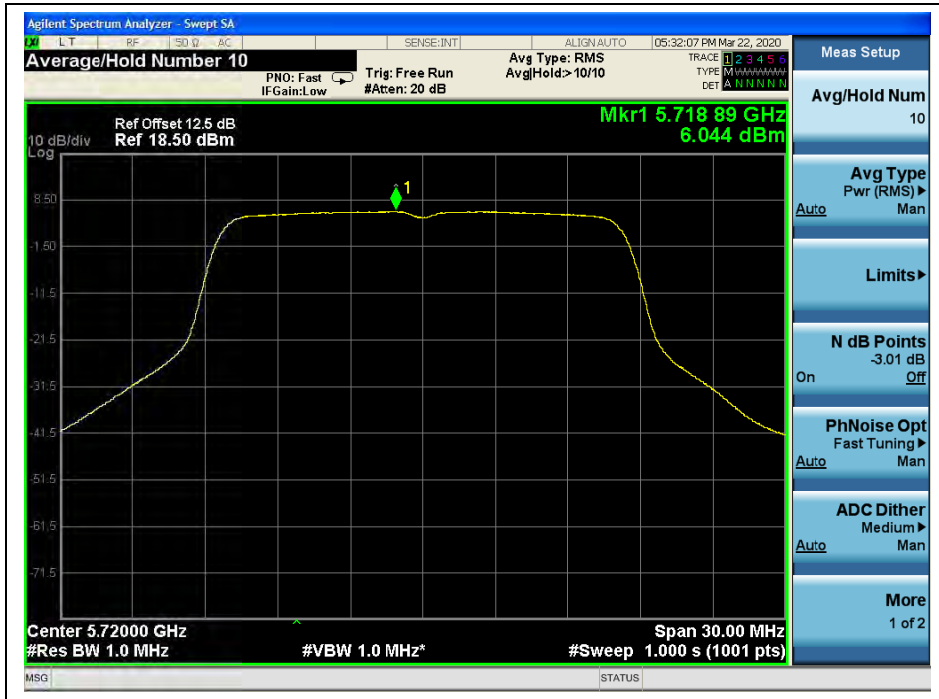

(Channel 144, 5720MHz, 802.11a, ANT 0)



(Channel 144, 5720MHz, 802.11a, ANT 0)




(Channel 149,5745MHz, 802.11a, ANT 0)



(Channel 157,5785MHz, 802.11a, ANT 0)




(Channel 165,5825MHz, 802.11a, ANT 0)

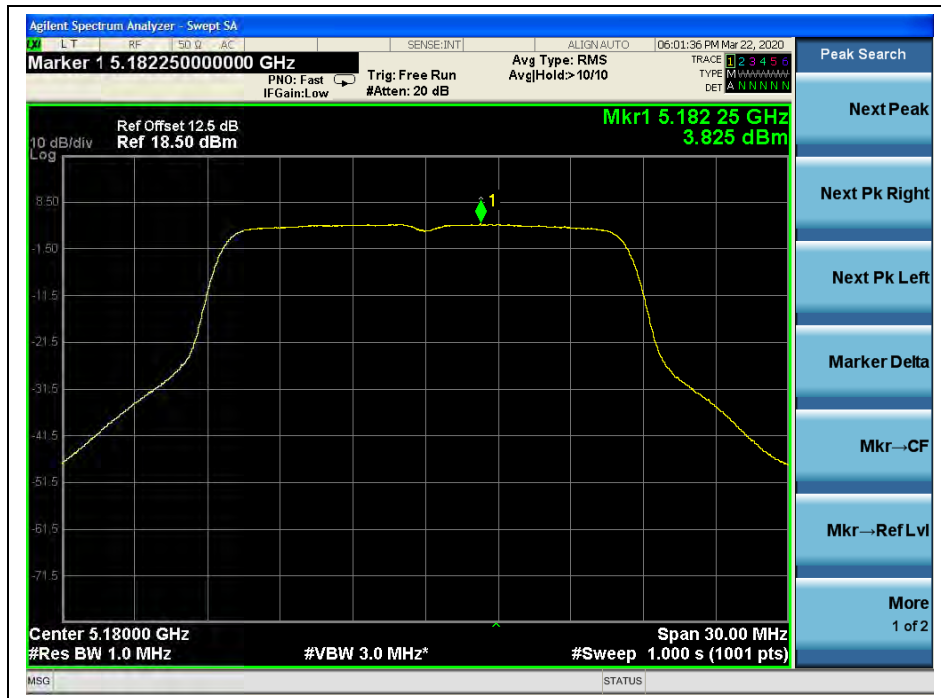

(Channel 36,5180MHz, 802.11a, ANT 1)



(Channel 40, 5200 MHz, 802.11a, ANT 1)

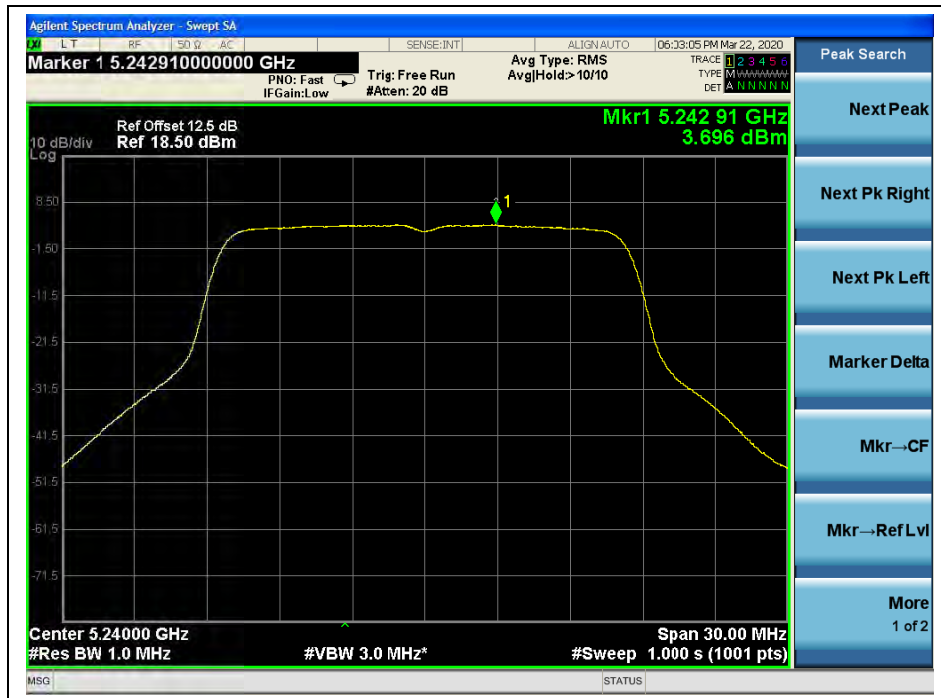


(Channel 48, 5240MHz, 802.11a, ANT 1)



(Channel 52,5260MHz, 802.11a, ANT 1)




(Channel 60, 5300 MHz, 802.11a, ANT 1)

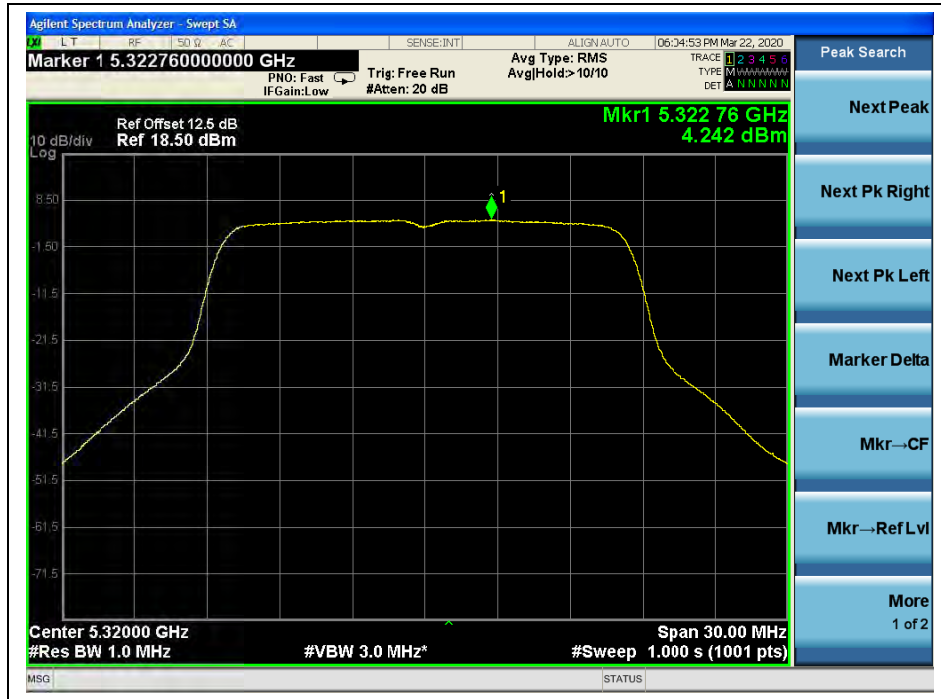


(Channel 64, 5320MHz, 802.11a, ANT 1)



(Channel 100,5500MHz, 802.11a, ANT 1)

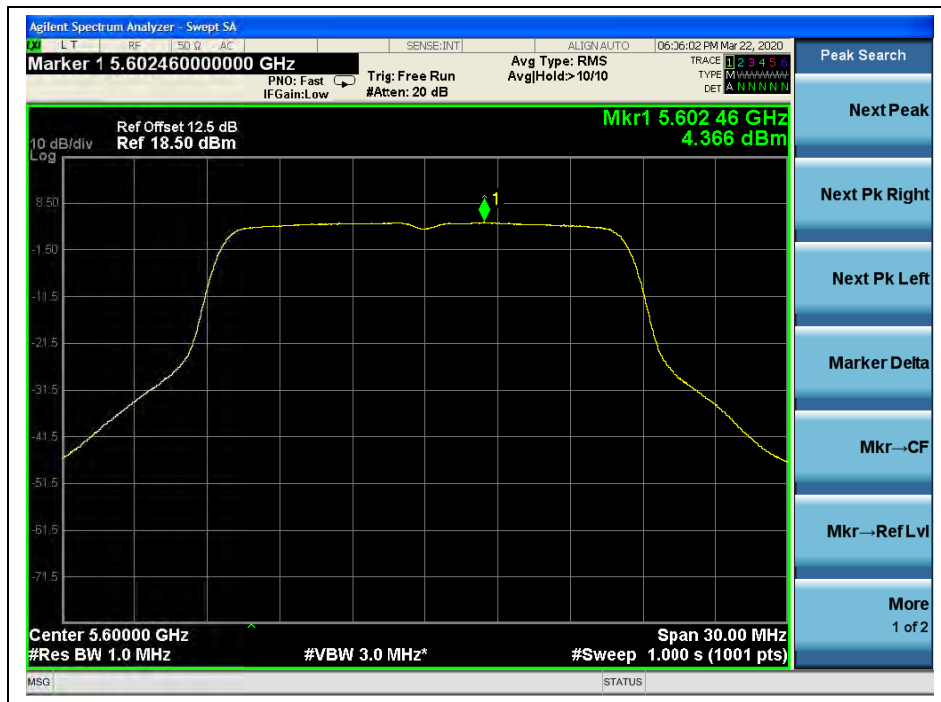


(Channel 120, 5600 MHz, 802.11a, ANT 1)

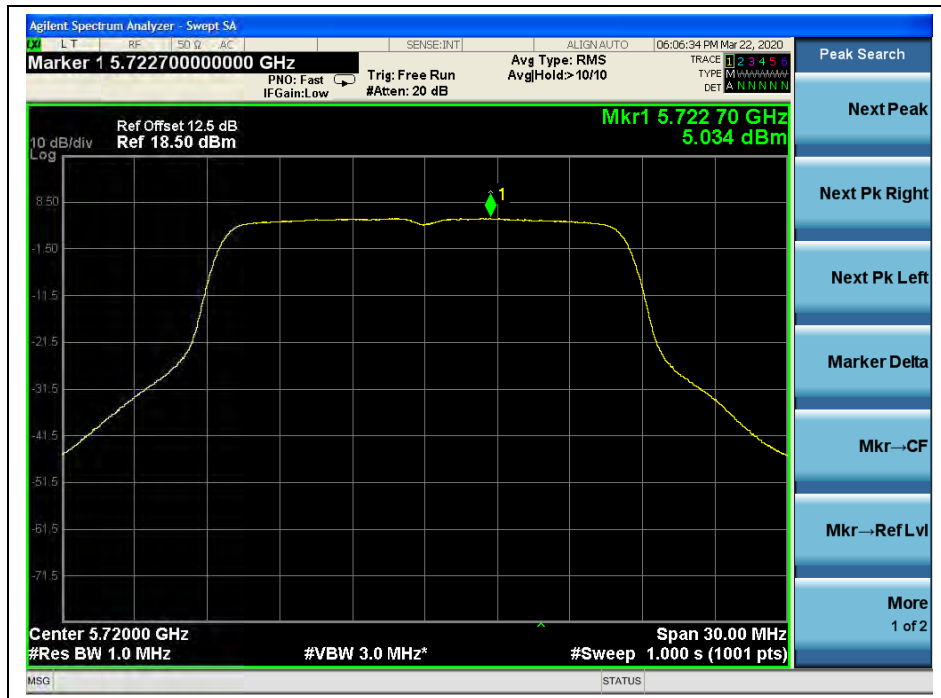

(Channel 144, 5720MHz, 802.11a, ANT 1)




(Channel 144, 5720MHz, 802.11a, ANT 1)

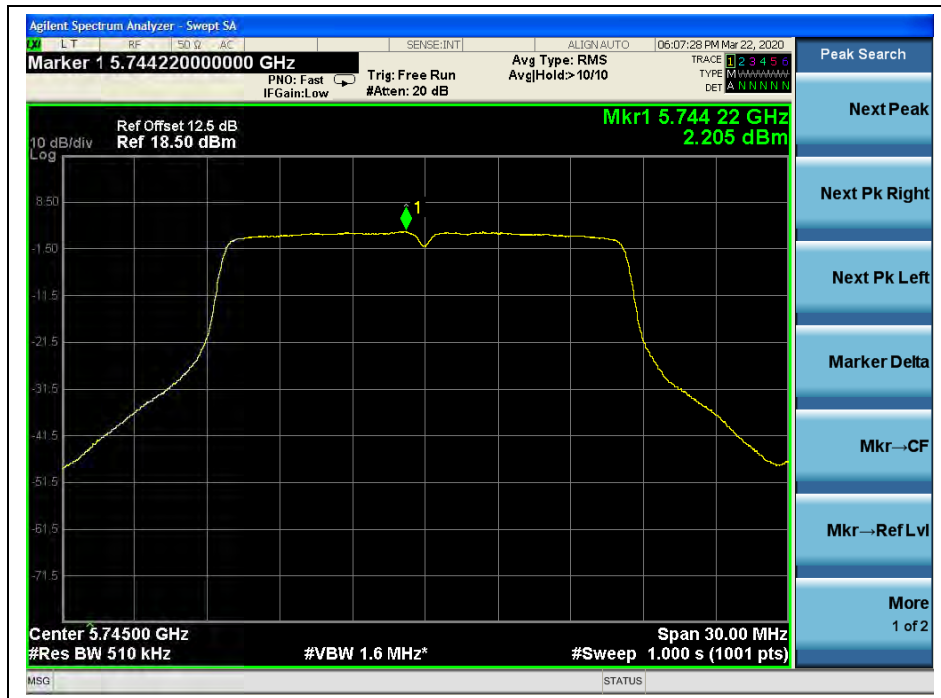

(Channel 149, 5745MHz, 802.11a, ANT 1)



(Channel 157,5785MHz, 802.11a, ANT 1)

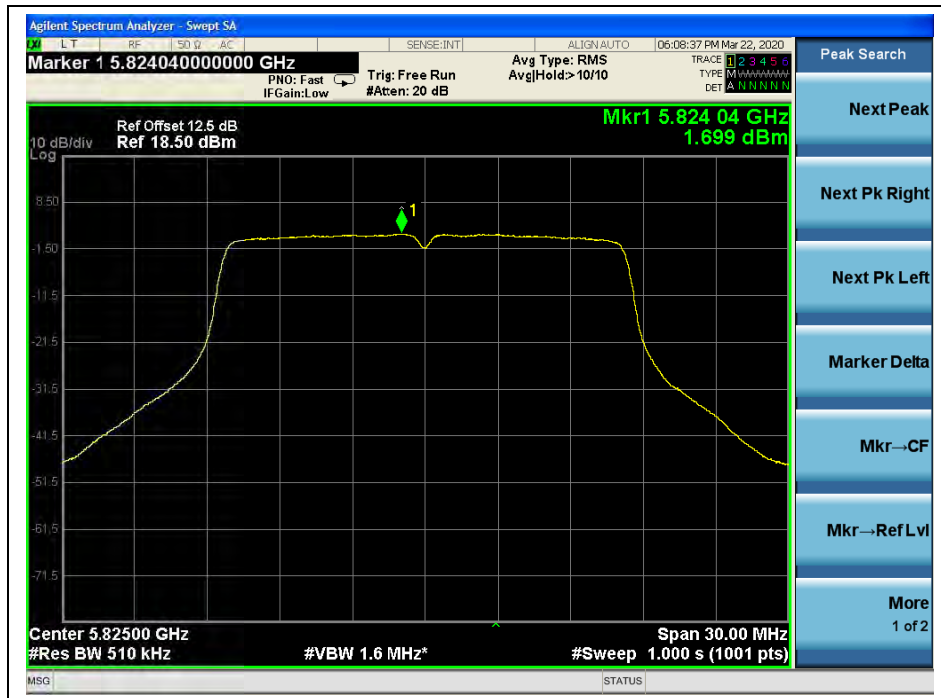

(Channel 165,5825MHz, 802.11a, ANT 1)



802.11n (HT20) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---|-----------------|----------------------------|-------|-------------|----------------------|-----------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 36 | 5180 | 3.83 | 2.49 | 0.06 | 6.28 | 11 | PASS |
| 40 | 5200 | 3.81 | 2.29 | | 6.19 | | |
| 48 | 5240 | 3.83 | 2.50 | | 6.29 | | |
| 52 | 5260 | 3.88 | 2.62 | | 6.37 | | |
| 60 | 5300 | 3.71 | 2.72 | | 6.31 | | |
| 64 | 5320 | 3.54 | 2.87 | | 6.29 | | |
| 100 | 5500 | 4.31 | 3.30 | | 6.90 | | |
| 116 | 5600 | 3.94 | 3.03 | | 6.58 | | |
| 144 | 5720 | 4.65 | 3.81 | | 7.32 | | |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | | Duty Factor | | |
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | 1.77 | 0.88 | 0.06 | 4.42 | 30 | PASS |
| 149 | 5745 | 1.77 | 0.72 | | 4.35 | | |
| 157 | 5785 | 1.33 | 0.54 | | 4.02 | | |
| 165 | 5825 | 1.05 | 0.35 | | 3.78 | | |
| <p>Note: Directional gain = $1.38\text{dBi} + 10\log(2) = 4.39\text{dBi} < 6\text{dBi}$, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.</p> | | | | | | | |



B. Test Plots



(Channel 36,5180MHz, 802.11 n (HT20), ANT0)



(Channel 40, 5200 MHz, 802.11 n (HT20), ANT0)



(Channel 48, 5240MHz, 802.11 n (HT20), ANT0)



(Channel 52, 5260MHz, 802.11 n (HT20) , ANT0)




(Channel 60, 5300 MHz, 802.11 n (HT20) , ANT0)



(Channel 64, 5320MHz, 802.11 n (HT20) , ANT0)



(Channel 100,5500MHz, 802.11 n (HT20) , ANT0)

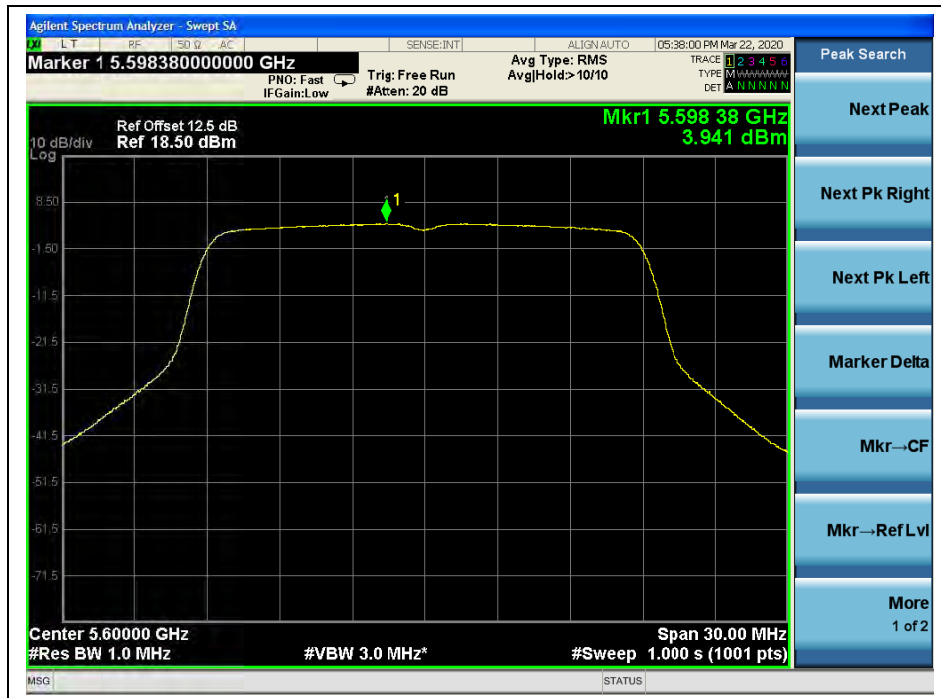

(Channel 120, 5600 MHz, 802.11 n (HT20) , ANT0)




(Channel 144, 5720MHz, 802.11 n (HT20) , ANTO)



(Channel 144, 5720MHz, 802.11 n (HT20) , ANTO)



(Channel 149,5745MHz, 802.11 n (HT20), ANT0)

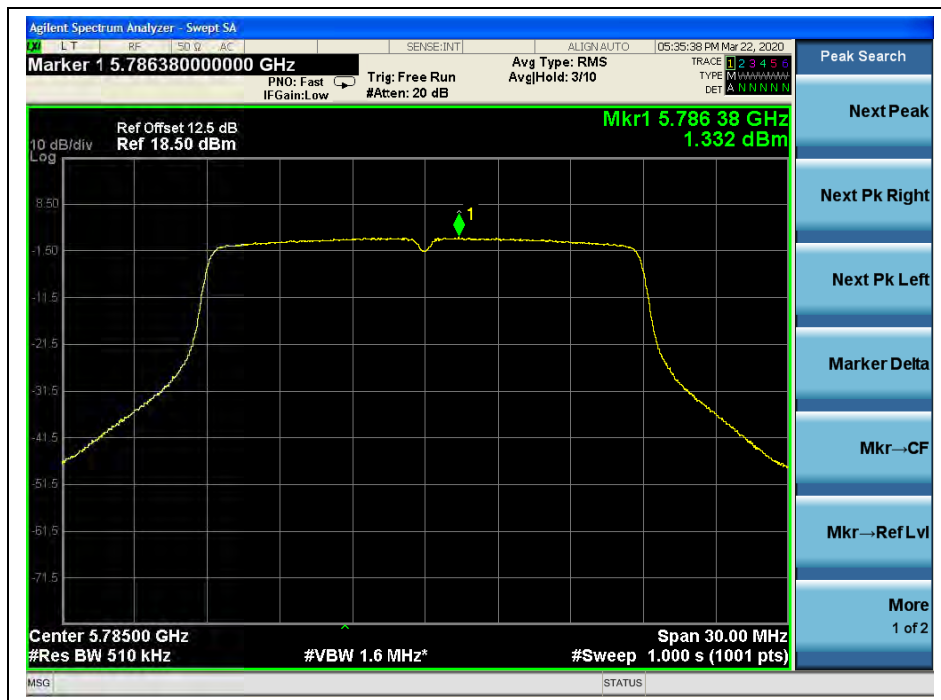

(Channel 157,5785MHz, 802.11 n (HT20), ANT0)



(Channel 165,5825MHz, 802.11 n (HT20), ANT0)



(Channel 36,5180MHz, 802.11 n (HT20), ANT1)




(Channel 40, 5200 MHz, 802.11 n (HT20), ANT1)



(Channel 48, 5240MHz, 802.11 n (HT20), ANT1)



(Channel 52, 5260MHz, 802.11 n (HT20) , ANT1)

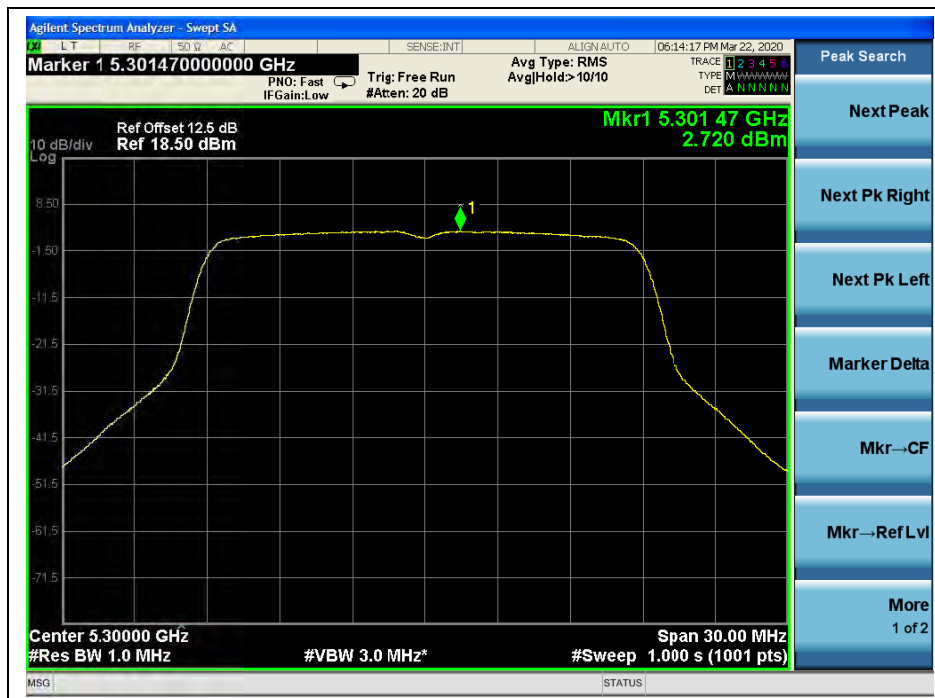

(Channel 60, 5300 MHz, 802.11 n (HT20) , ANT1)



(Channel 64, 5320MHz, 802.11 n (HT20) , ANT1)



(Channel 100,5500MHz, 802.11 n (HT20) , ANT1)



(Channel 144, 5720MHz, 802.11 n (HT20) , ANT1)



(Channel 149,5745MHz, 802.11 n (HT20), ANT1)



(Channel 157,5785MHz, 802.11 n (HT20), ANT1)



(Channel 165,5825MHz, 802.11 n (HT20), ANT1)



802.11 ac(VHT20) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---|-----------------|----------------------------|-------|-------------|----------------------|-----------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 36 | 5180 | 1.75 | 0.51 | 0.06 | 4.24 | 11 | PASS |
| 40 | 5200 | 1.63 | 0.41 | | 4.13 | | |
| 48 | 5240 | 1.88 | 0.47 | | 4.30 | | |
| 52 | 5260 | 1.86 | 0.54 | | 4.32 | | |
| 60 | 5300 | 1.75 | 0.53 | | 4.25 | | |
| 64 | 5320 | 1.62 | 0.92 | | 4.35 | | |
| 100 | 5500 | 2.34 | 1.35 | | 4.94 | | |
| 120 | 5600 | 1.89 | 1.08 | | 4.57 | | |
| 144 | 5720 | 2.66 | 1.74 | | 5.29 | | |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | | Duty Factor | | |
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | -0.18 | -1.08 | 0.06 | 2.46 | 30 | PASS |
| 149 | 5745 | -0.22 | -1.20 | | 2.39 | | |
| 157 | 5785 | -0.56 | -1.49 | | 2.07 | | |
| 165 | 5825 | -0.92 | -1.68 | | 1.79 | | |
| <p>Note: Directional gain = $1.38\text{dBi} + 10\log(2) = 4.39\text{dBi} < 6\text{dBi}$, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.</p> | | | | | | | |



B. Test Plots



(Channel 36,5180MHz, 802.11 ac(VHT20), ANT0)



(Channel 40, 5200 MHz, 802.11 ac(VHT20), ANT0)



(Channel 48, 5240MHz, 802.11 ac(VHT20), ANT0)



(Channel 52, 5260MHz, 802.11 ac (VHT20), ANT0)



(Channel 60, 5300 MHz, 802.11 ac (VHT20), ANT0)



(Channel 64, 5320MHz, 802.11 ac (VHT20), ANT0)




(Channel 100,5500MHz, 802.11 ac (VHT20), ANTO)



(Channel 120, 5600 MHz, 802.11 ac (VHT20), ANTO)



(Channel 144, 5720MHz, 802.11 ac (VHT20), ANT0)

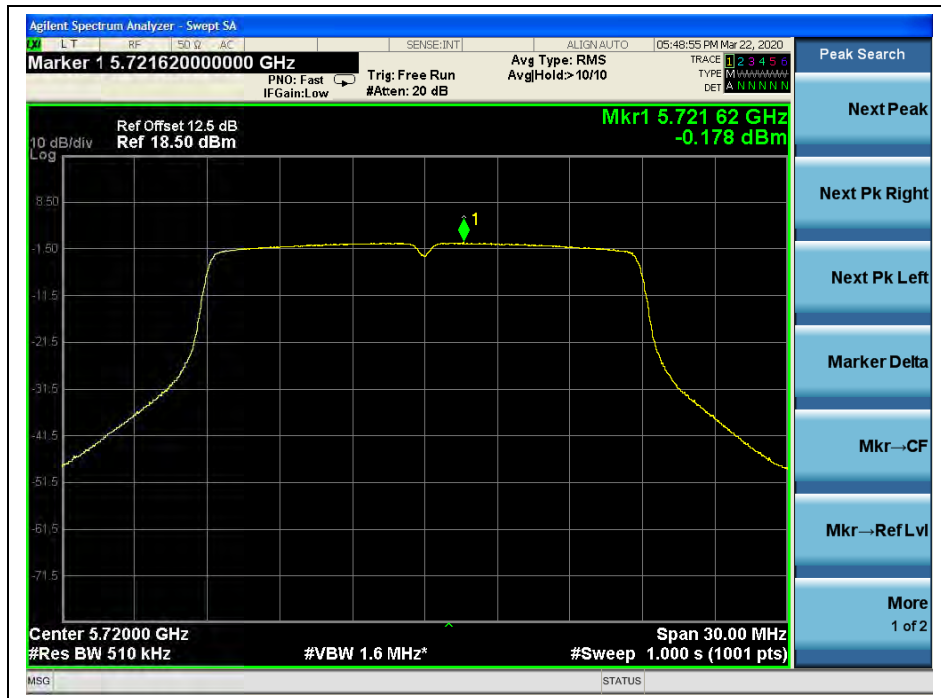


(Channel 144, 5720MHz, 802.11 ac (VHT20), ANT0)




(Channel 149,5745MHz, 802.11 ac(VHT20), ANT0)



(Channel 157,5785MHz, 802.11 ac(VHT20), ANT0)

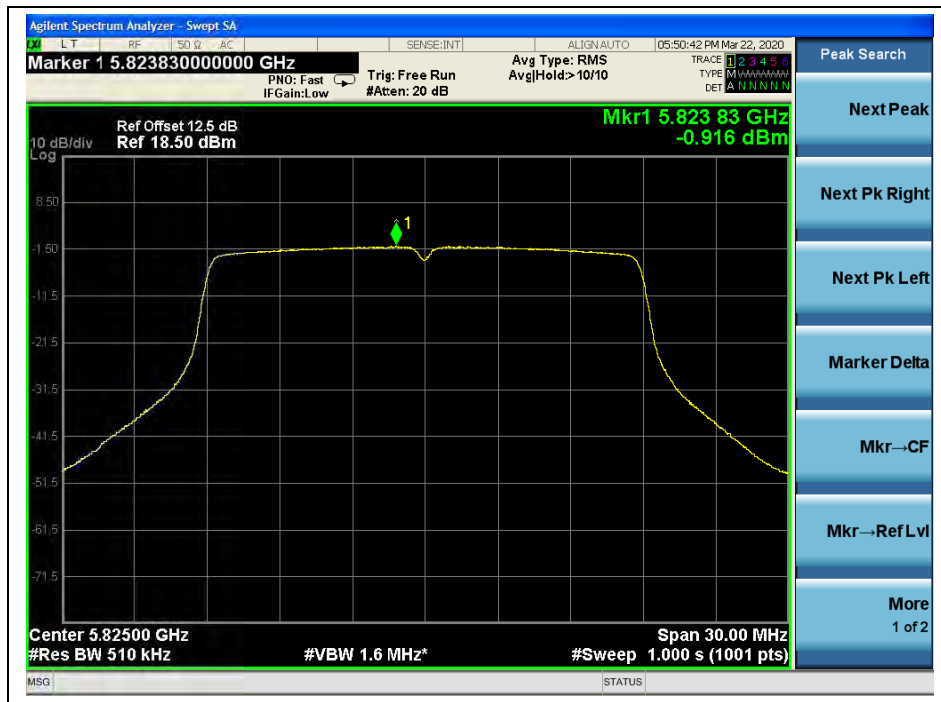

(Channel 165,5825MHz, 802.11 ac(VHT20), ANT0)

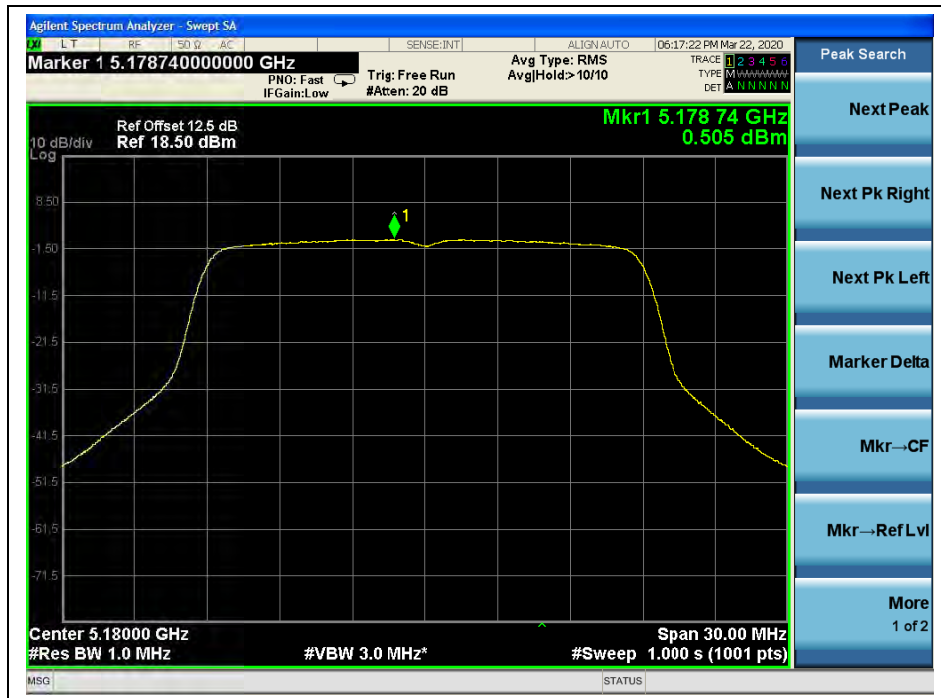

(Channel 36,5180MHz, 802.11 ac(VHT20), ANT1)




(Channel 64, 5320MHz, 802.11 ac (VHT20), ANT1)



(Channel 100,5500MHz, 802.11 ac (VHT20), ANT1)



(Channel 120, 5600 MHz, 802.11 ac (VHT20), ANT1)

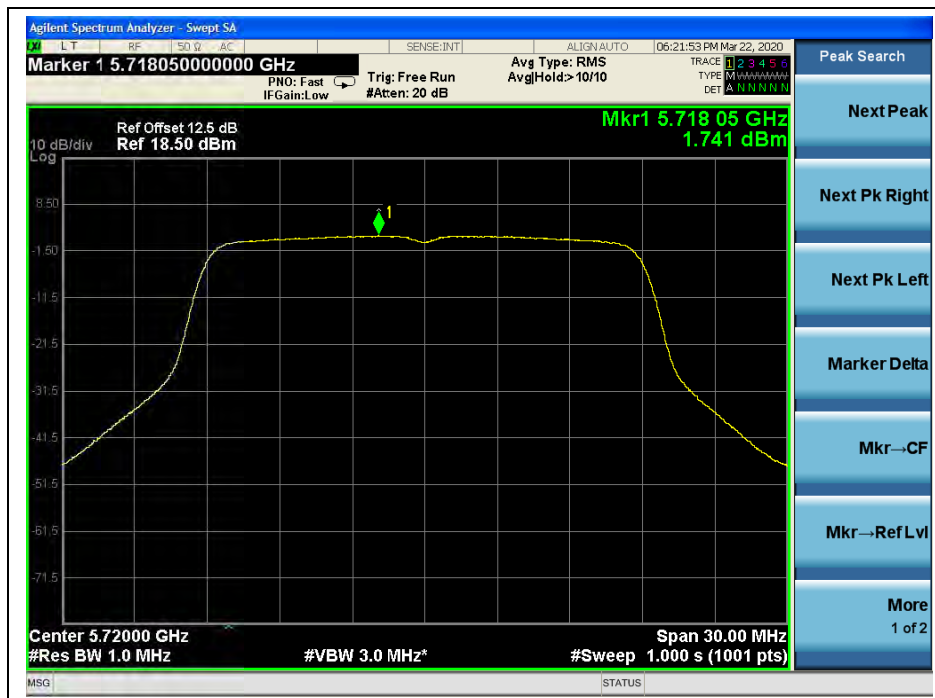

(Channel 144, 5720MHz, 802.11 ac (VHT20), ANT1)




(Channel 144, 5720MHz, 802.11 ac (VHT20), ANT1)



(Channel 149, 5745MHz, 802.11 ac(VHT20), ANT1)



(Channel 157,5785MHz, 802.11 ac(VHT20), ANT1)

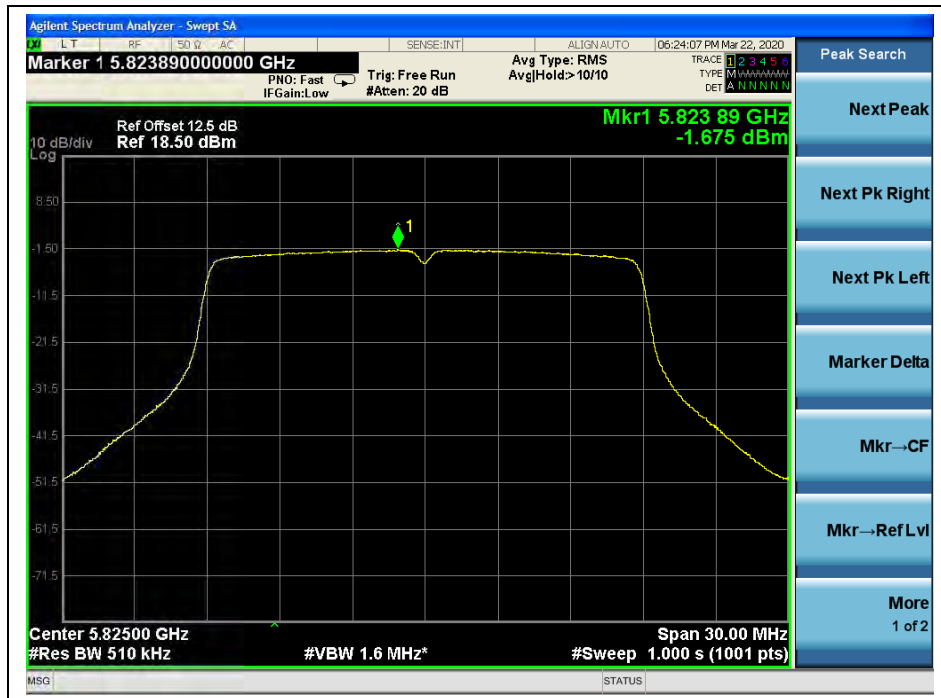

(Channel 165,5825MHz, 802.11 ac(VHT20), ANT1)



802.11 ax (HEW20_RU26) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|-------|-------------|-------------------------|--------------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | 3.58 | 3.77 | 0.07 | 6.76 | 11 | PASS |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Total PPSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | 0.93 | 1.02 | 0.07 | 4.06 | 30 | PASS |
| 149 | 5745 | 0.49 | 0.77 | | 3.71 | | |

Note: Directional gain = 1.38dBi + 10log(2) = 4.39dBi < 6dBi, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.


B. Test Plots



(Channel 144,5720MHz, 802.11ax (HEW20_RU26), ANT0)



(Channel 144,5720MHz, 802.11ax (HEW20_RU26), ANT0)

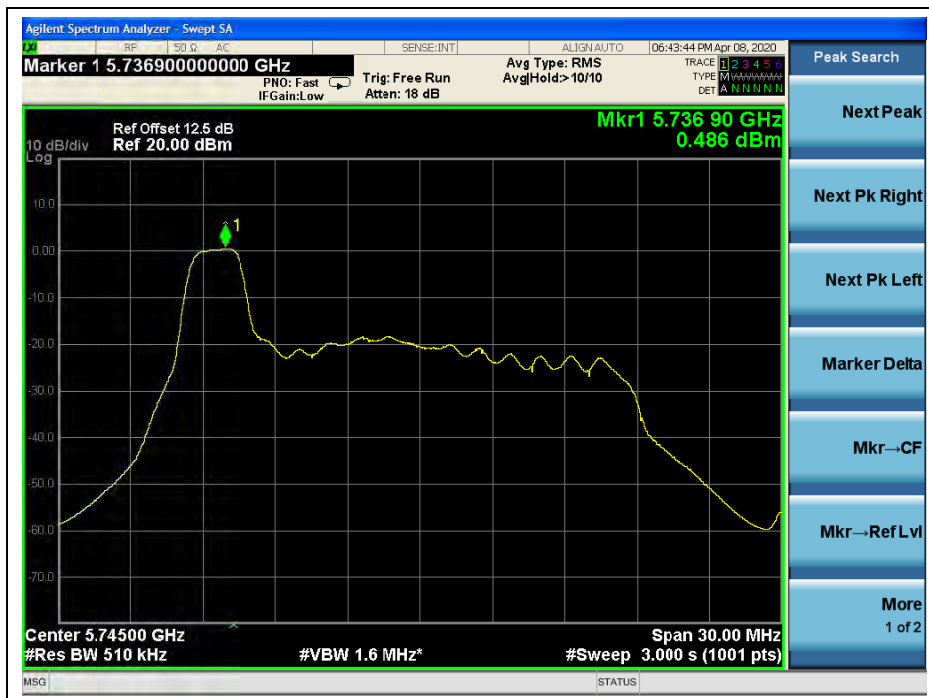


(Channel 149,5745MHz, 802.11ax (HEW20_RU26), ANT0)



(Channel 144,5720MHz, 802.11ax (HEW20_RU26), ANT1)



(Channel 144,5720MHz, 802.11ax (HEW20_RU26), ANT1)

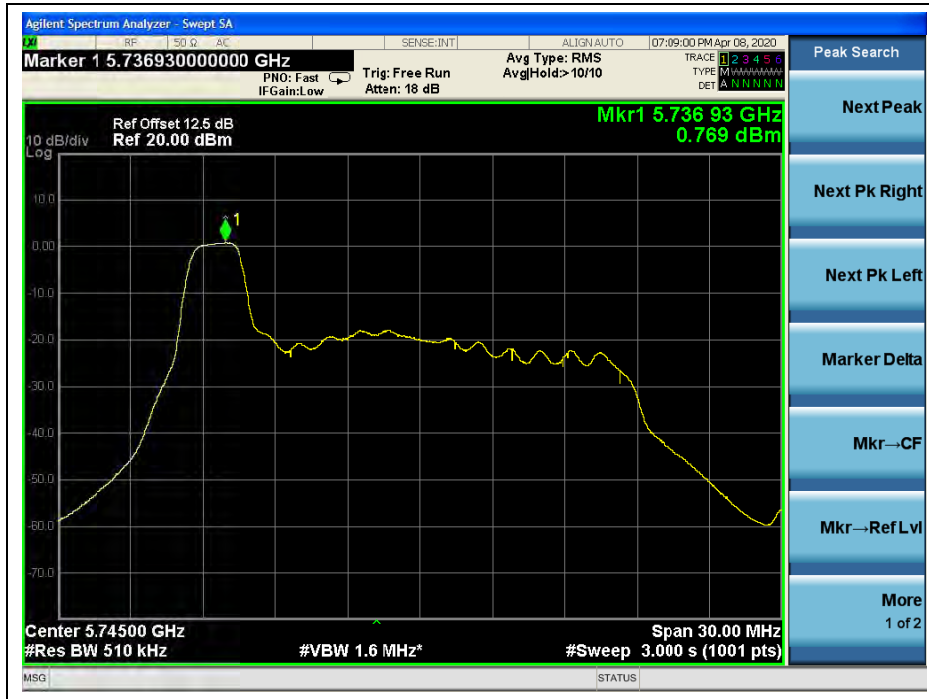

(Channel 149,5745MHz, 802.11ax (HEW20_RU26), ANT1)

802.11 ax (HEW20_RU52) Test mode

A. Test Verdict:


| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|-------|-------------|-------------------------|--------------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | 1.77 | 1.85 | 0.07 | 1.92 | 11 | PASS |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Total PPSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | -1.00 | -1.02 | 0.07 | -0.95 | 30 | PASS |
| 149 | 5745 | -1.43 | -1.19 | | -1.12 | | |

Note: Directional gain = 1.38dBi +10log(2) = 4.39dBi<6dBi, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.


B. Test Plots



(Channel 144,5720MHz, 802.11ax (HEW20_RU52), ANT0)

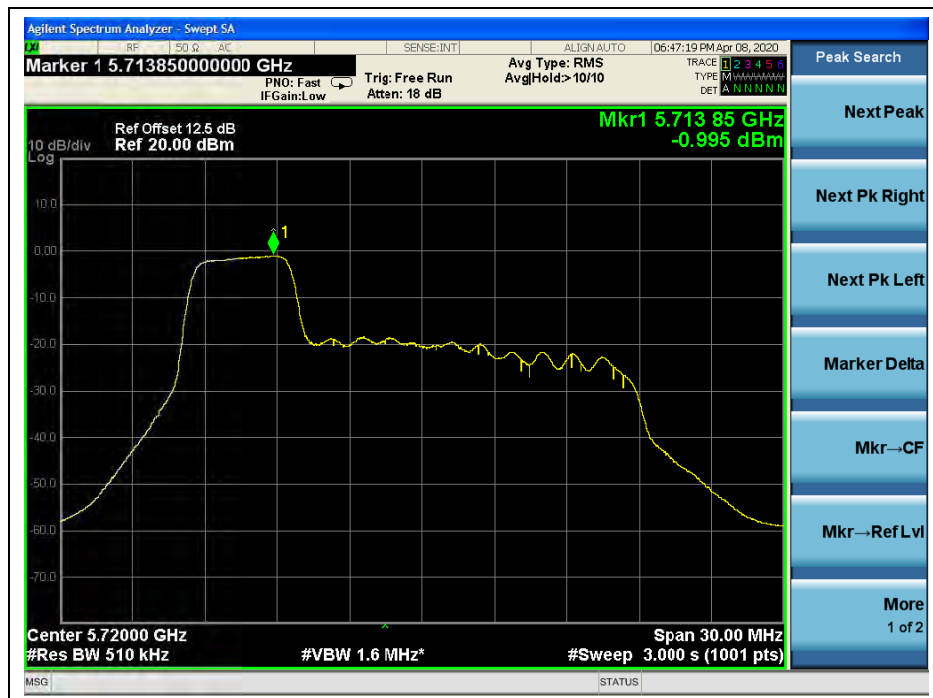


(Channel 144,5720MHz, 802.11ax (HEW20_RU52), ANT0)

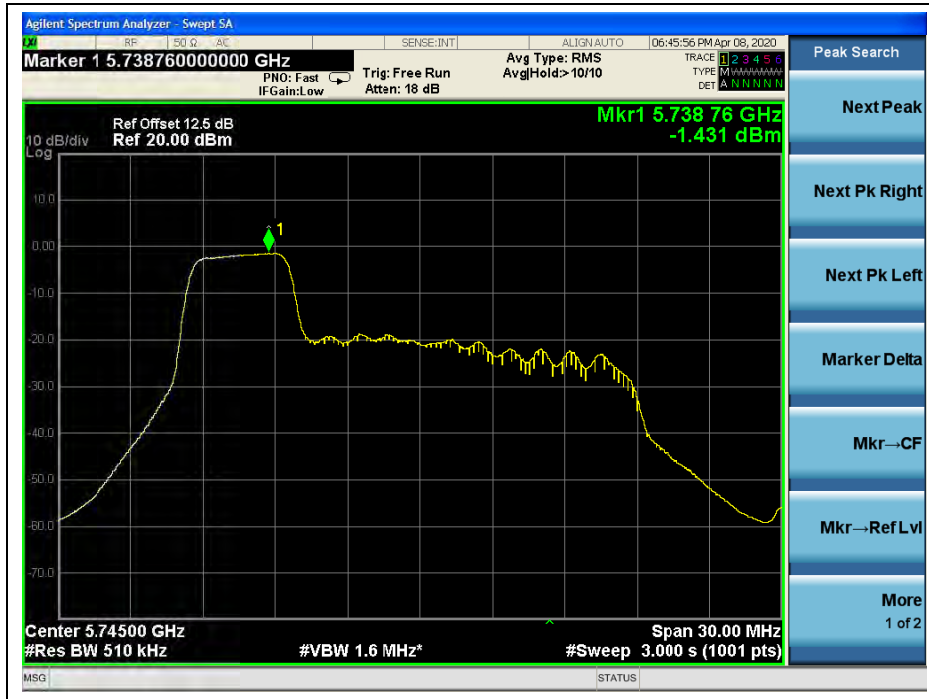


(Channel 149,5745MHz, 802.11ax (HEW20_RU52), ANT0)



(Channel 144,5720MHz, 802.11ax (HEW20_RU52), ANT1)

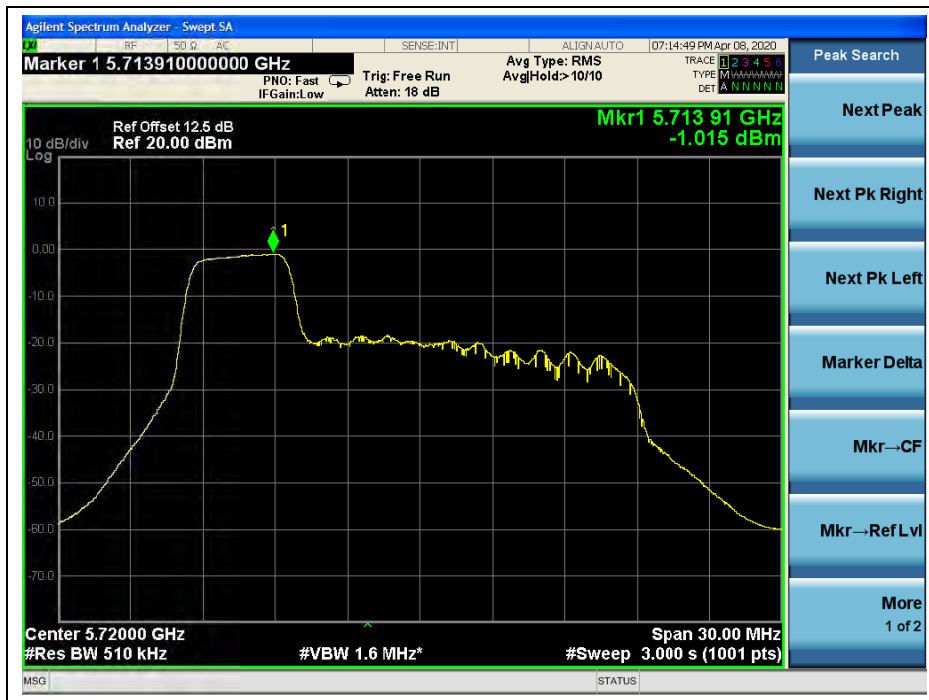

(Channel 144,5720MHz, 802.11ax (HEW20_RU52), ANT1)

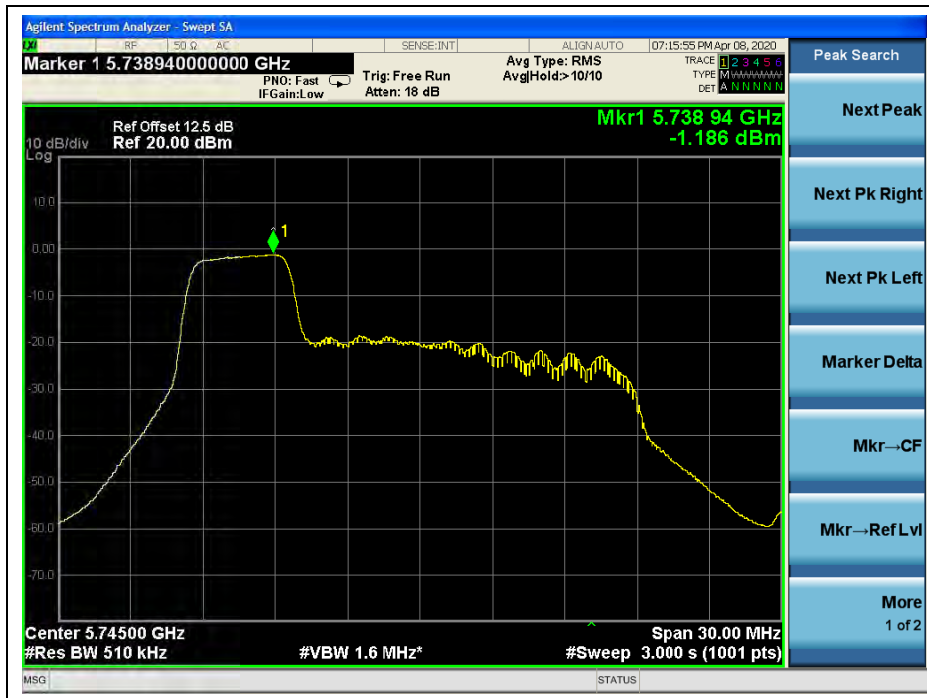

(Channel 149,5745MHz, 802.11ax (HEW20_RU52), ANT1)




802.11 ax (HEW20_RU106) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|-------|-------------|-------------------------|--------------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | -0.53 | -0.49 | 0.07 | 2.57 | 11 | PASS |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Total PPSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | -3.41 | -3.40 | 0.07 | -0.32 | 30 | PASS |
| 149 | 5745 | -3.80 | -3.52 | | -0.58 | | |

Note: Directional gain = 1.38dBi + 10log(2) = 4.39dBi < 6dBi, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.


B. Test Plots

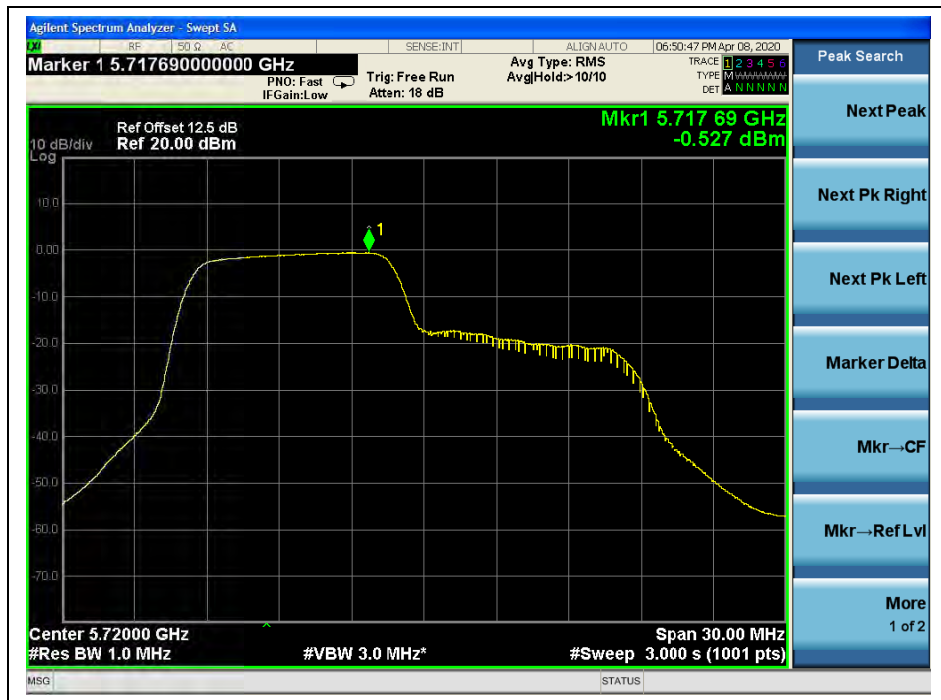

(Channel 144,5720MHz, 802.11ax (HEW20_RU106), ANT0)



(Channel 144,5720MHz, 802.11ax (HEW20_RU106), ANT0)

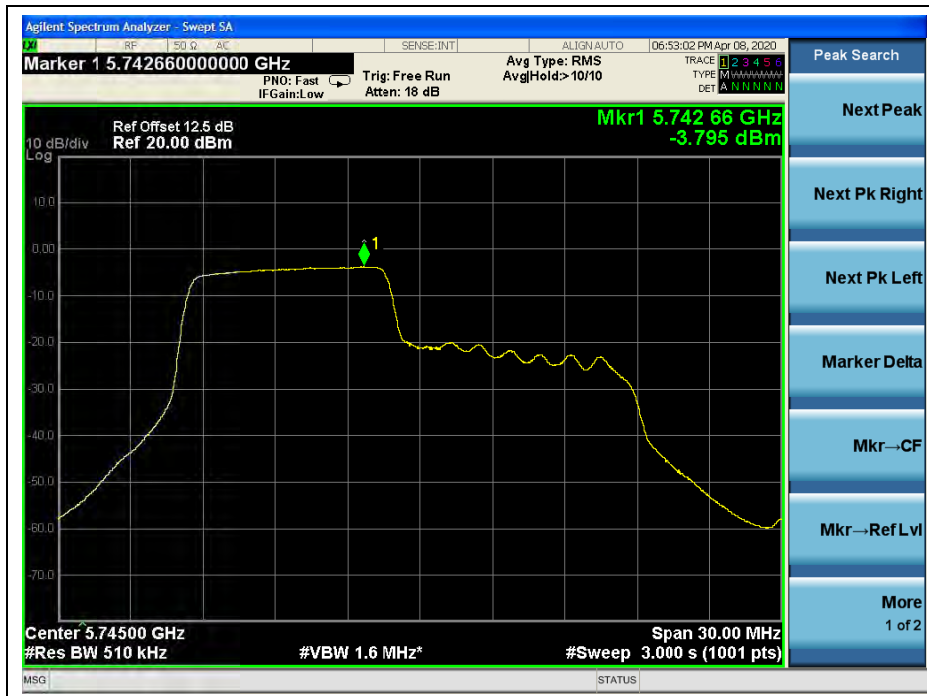

(Channel 149,5745MHz, 802.11ax (HEW20_RU106), ANT0)



(Channel 144,5720MHz, 802.11ax (HEW20_RU106), ANT1)



(Channel 144,5720MHz, 802.11ax (HEW20_RU106), ANT1)



(Channel 149,5745MHz, 802.11ax (HEW20_RU106), ANT1)



802.11 ax (HEW20_RU242) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|-------|-------------|-------------------------|--------------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | -10.70 | -3.80 | 0.07 | -2.92 | 11 | PASS |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Total PPSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | | | |
| 144 | 5720 | -13.65 | -6.79 | 0.07 | -5.91 | 30 | PASS |
| 149 | 5745 | -14.23 | -7.02 | | -6.19 | | |

Note: Directional gain = 1.38dBi + 10log(2) = 4.39dBi < 6dBi, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.


B. Test Plots



(Channel 144, 5720MHz, 802.11ax (HEW20_RU242), ANT0)




(Channel 144, 5720MHz, 802.11ax (HEW20_RU242), ANT0)

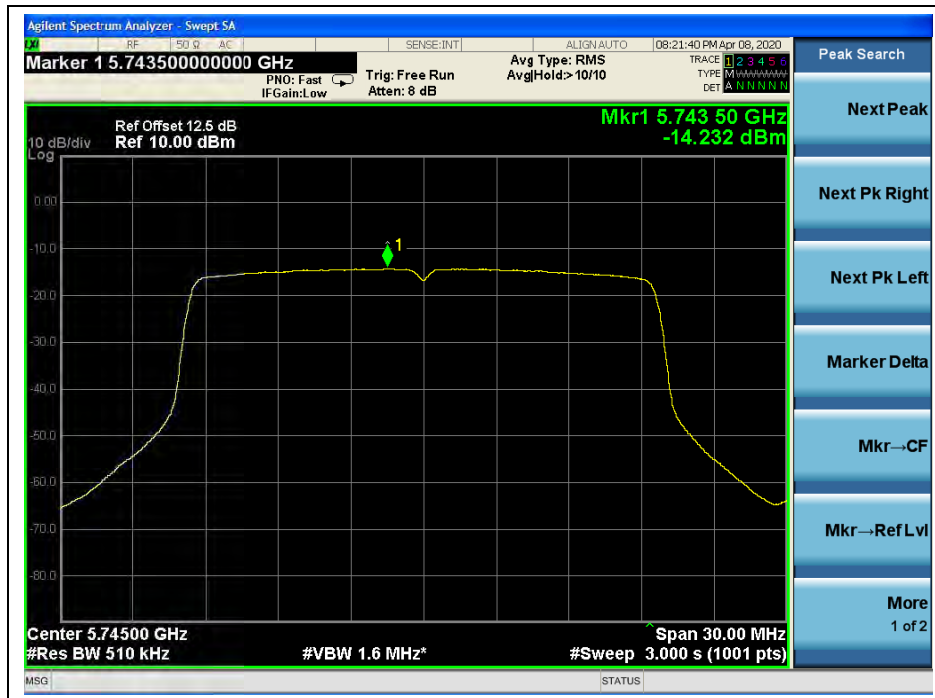

(Channel 149,5745MHz, 802.11ax (HEW20_RU242), ANT0)



(Channel 144, 5720MHz, 802.11ax (HEW20_RU242), ANT1)

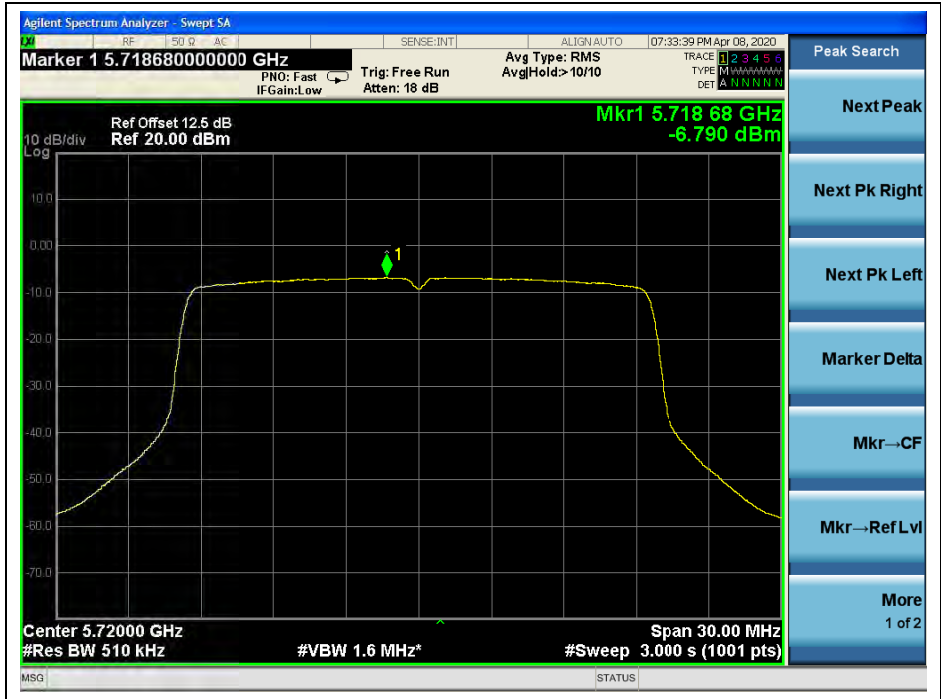

(Channel 144, 5720MHz, 802.11ax (HEW20_RU242), ANT1)



(Channel 149,5745MHz, 802.11ax (HEW20_RU242),ANT1)

802.11 ax (HEW40_RU484) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|-------|-------------|-------------------------|--------------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 142 | 5710 | -13.04 | -6.31 | 0.07 | -5.40 | 11 | PASS |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Total PPSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | | | |
| 142 | 5710 | -15.92 | -9.31 | 0.07 | -8.38 | 30 | PASS |
| 151 | 5755 | -16.81 | -9.53 | | | | |
| 159 | 5795 | -17.43 | -9.72 | | | | |

Note: Directional gain = 1.38dBi + 10log(2) = 4.39dBi < 6dBi, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.

B. Test Plots:



(Channel 142, 5710MHz, 802.11ax (HEW40_RU484), ANT0)




(Channel 142, 5710MHz, 802.11ax (HEW40_RU484), ANT0)




(Channel 151,5755MHz, 802.11ax (HEW40_RU484), ANT0)




(Channel 159,5795MHz, 802.11ax (HEW40_RU484), ANT0)

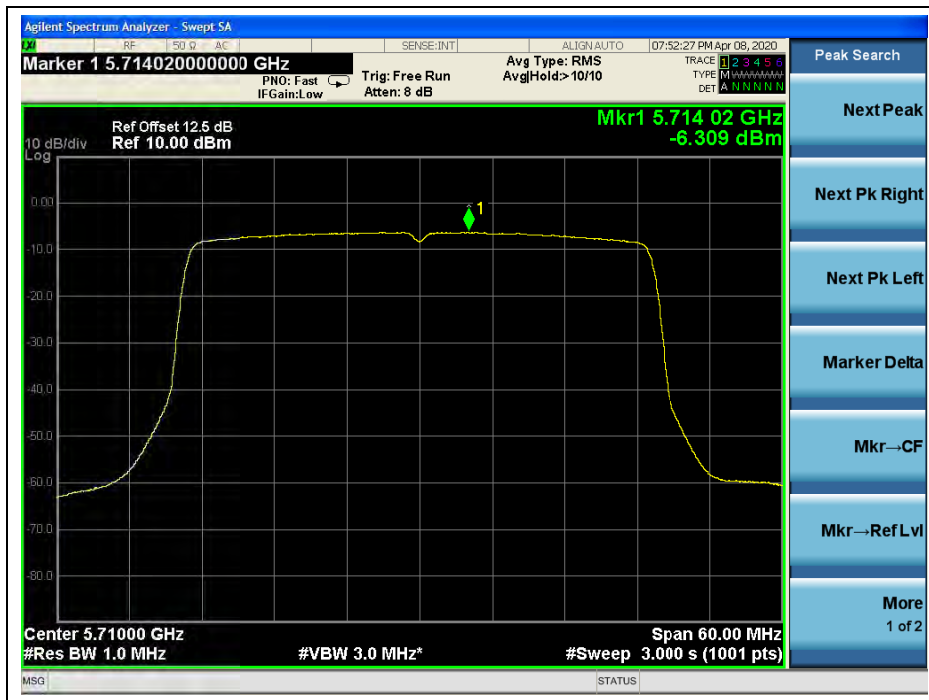

(Channel 142, 5710MHz, 802.11ax (HEW40_RU484), ANT1)

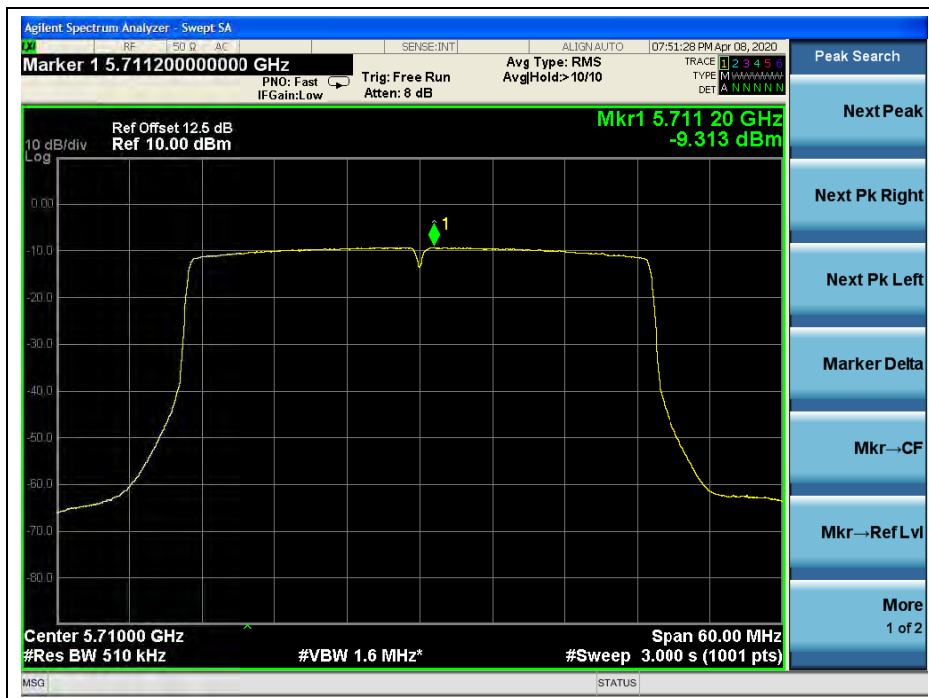

(Channel 142, 5710MHz, 802.11ax (HEW40_RU484), ANT1)

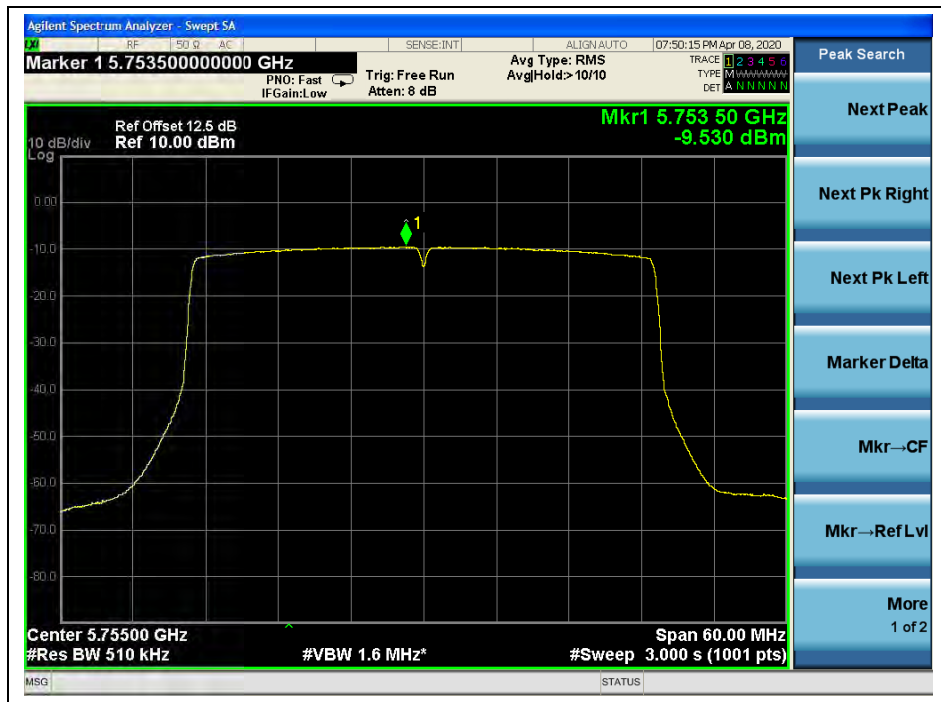

(Channel 151,5755MHz, 802.11ax (HEW40_RU484), ANT1)



(Channel 159,5795MHz, 802.11ax (HEW40_RU484), ANT1)



802.11 ax (HEW80_RU996) Test mode

A. Test Verdict:

| Channel | Frequency (MHz) | Measured PPSD (dBm/MHz) | | Duty Factor | Total PPSD (dBm/MHz) | Limit (dBm/MHz) | Verdict |
|---------|-----------------|----------------------------|--------|-------------|-------------------------|--------------------|---------|
| | | ANT 0 | ANT 1 | | | | |
| 138 | 5690 | -9.61 | -9.22 | 0.06 | -6.34 | 11 | PASS |
| Channel | Frequency (MHz) | Measured PPSD (dBm/500KHz) | | Duty Factor | Total PPSD (dBm/500KHz) | Limit (dBm/500KHz) | Verdict |
| | | ANT 0 | ANT 1 | | | | |
| 138 | 5690 | -12.55 | -12.17 | 0.06 | -9.28 | 30 | PASS |
| 155 | 5775 | -13.02 | -12.83 | | -9.85 | | |

Note: Directional gain = 1.38dBi + 10log(2) = 4.39dBi < 6dBi, so the limit shall be 11 dBm/MHz for 5.18-5.24 GHz, 5.260-5.320 GHz, 5.500-5.720 GHz band and 30 dBm/500KHz for 5.745-5.825 GHz band.

B. Test Plots:



(Channel 138, 5690MHz, 802.11ax (HEW80_RU996), ANT0)



(Channel 155,5775MHz, 802.11ax (HEW80_RU996), ANT1)



2.6. Frequency Stability

2.6.1. Requirement

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

2.6.2. Test Procedure

The EUT was placed inside of an environmental chamber as the temperature in the chamber was varied between 5°C to 40°C. The temperature was incremented by 10° intervals and the unit was allowed to stabilize at each temperature before each measurement. The center frequency of the transmitting channel was evaluated at each temperature and the frequency deviation from the channel's center frequency was recorded. Data for the worst case channel is shown below.

2.6.3. Test Result

| U-NII-1 (Ch. 36) 5180MHz | | | | |
|-----------------------------|-------------|-----------|----------------|-----------------|
| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | Freq Dev. (Hz) | Deviation (ppm) |
| 100% | 3.87 | +20(Ref) | 31 | 0.004 |
| 100% | | -30 | 55 | 0.010 |
| 100% | | -20 | 34 | 0.009 |
| 100% | | -10 | 32 | 0.007 |
| 100% | | 0 | 34 | 0.006 |
| 100% | | +10 | 32 | 0.005 |
| 100% | | +20 | 37 | 0.005 |
| 100% | | +30 | 44 | 0.007 |
| 100% | | +40 | 49 | 0.008 |
| 100% | | +50 | 51 | 0.009 |
| 85% | | 3.30 | +20 | 25 |
| 115% | 4.45 | +20 | 28 | 0.008 |



| U-NII-2A (Ch. 52) | | | | |
|--------------------------|-------------|-----------|----------------|-----------------|
| 5260MHz | | | | |
| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | Freq Dev. (Hz) | Deviation (ppm) |
| 100% | 3.87 | +20(Ref) | 32 | 0.006 |
| 100% | | -30 | 23 | 0.010 |
| 100% | | -20 | 18 | 0.009 |
| 100% | | -10 | 33 | 0.007 |
| 100% | | 0 | 42 | 0.006 |
| 100% | | +10 | 22 | 0.006 |
| 100% | | +20 | 49 | 0.007 |
| 100% | | +30 | 51 | 0.008 |
| 100% | | +40 | 25 | 0.009 |
| 100% | | +50 | 41 | 0.011 |
| 85% | 3.30 | +20 | 36 | 0.006 |
| 115% | 4.45 | +20 | 28 | 0.006 |

| U-NII-2C (Ch. 100) | | | | |
|---------------------------|-------------|-----------|----------------|-----------------|
| 5500MHz | | | | |
| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | Freq Dev. (Hz) | Deviation (ppm) |
| 100% | 3.87 | +20(Ref) | 25 | 0.004 |
| 100% | | -30 | 23 | 0.009 |
| 100% | | -20 | 18 | 0.007 |
| 100% | | -10 | 21 | 0.005 |
| 100% | | 0 | 25 | 0.004 |
| 100% | | +10 | 18 | 0.003 |
| 100% | | +20 | 42 | 0.004 |
| 100% | | +30 | 22 | 0.005 |
| 100% | | +40 | 49 | 0.006 |
| 100% | | +50 | 51 | 0.009 |
| 85% | 3.30 | +20 | 22 | 0.005 |
| 115% | 4.45 | +20 | 32 | 0.007 |



| U-NII-3 (Ch. 149) | | | | |
|--------------------------|-------------|-----------|----------------|-----------------|
| 5745MHz | | | | |
| VOLTAGE (%) | POWER (VDC) | TEMP (°C) | Freq Dev. (Hz) | Deviation (ppm) |
| 100% | 3.87 | +20(Ref) | 19 | 0.004 |
| 100% | | -30 | 49 | 0.009 |
| 100% | | -20 | 36 | 0.008 |
| 100% | | -10 | 25 | 0.007 |
| 100% | | 0 | 23 | 0.006 |
| 100% | | +10 | 18 | 0.004 |
| 100% | | +20 | 21 | 0.005 |
| 100% | | +30 | 25 | 0.004 |
| 100% | | +40 | 33 | 0.007 |
| 100% | | +50 | 42 | 0.007 |
| 85% | 3.30 | +20 | 22 | 0.009 |
| 115% | 4.45 | +20 | 32 | 0.006 |

2.7. Conducted Emission

2.7.1. Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 Ω line impedance stabilization network (LISN).


| Frequency range (MHz) | Conducted Limit (dB μ V) | |
|-----------------------|------------------------------|----------|
| | Quai-peak | Average |
| 0.15 - 0.50 | 66 to 56 | 56 to 46 |
| 0.50 - 5 | 56 | 46 |
| 5 - 30 | 60 | 50 |

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 - 0.50MHz.

2.7.2. Test Description

Test Setup:

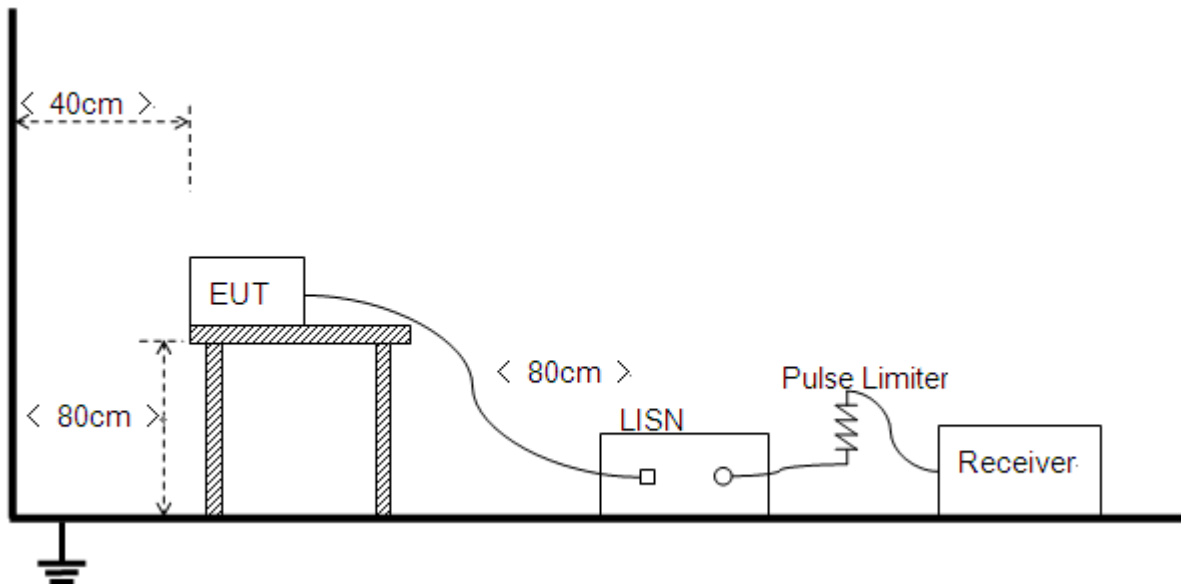

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.



2.7.3. Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

Note: Both of the test voltage AC 120V/60Hz and AC 230V/50Hz were considered and tested respectively, only the results of the worst case AC 120V/60Hz were recorded in this report.

A. Test setup:

Test Mode: EUT + USB Cable + Adapter + Earphone + WIFI TX

Test Voltage: AC 120V/60Hz


The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V]} = U_R + L_{\text{Cable loss}} \text{ [dB]} + A_{\text{Factor}}$$

U_R : Receiver Reading


A_{Factor} : Voltage division factor of LISN

B. Test Plots:

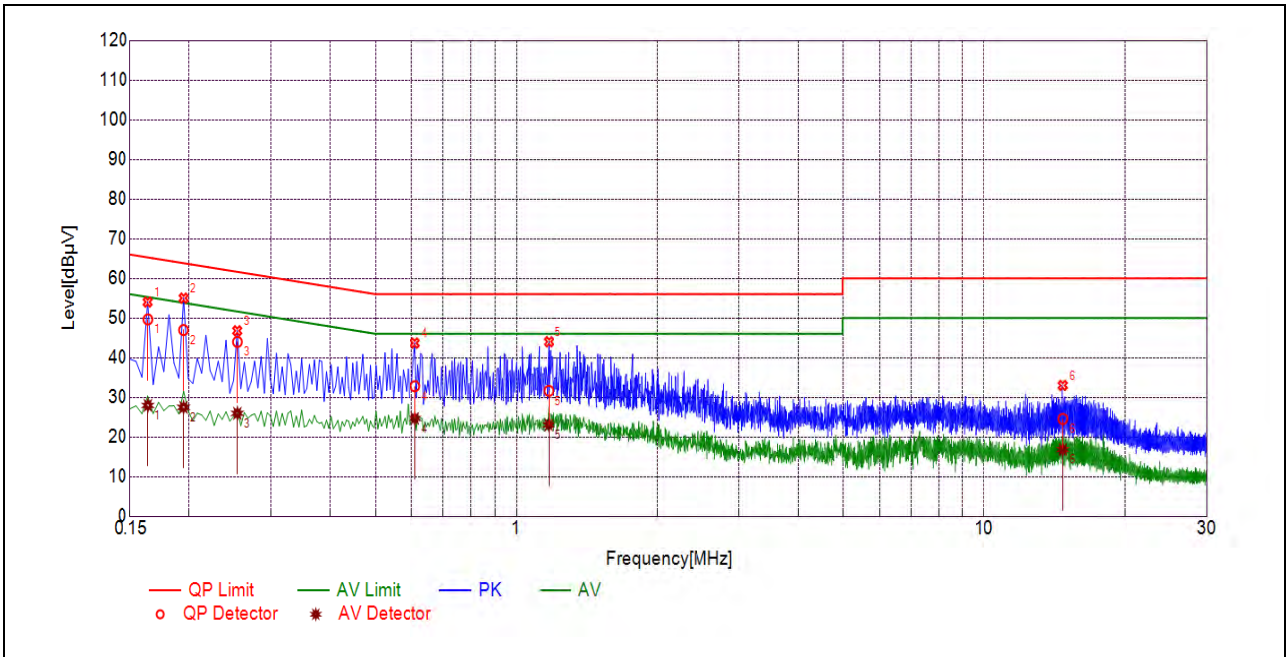

(L Phase)

| NO. | Fre. (MHz) | Emission Level (dBµV) | | Limit (dBµV) | | Power-line | Verdict |
|-----|------------|-----------------------|---------|--------------|---------|------------|---------|
| | | Quai-peak | Average | Quai-peak | Average | | |
| 1 | 0.1637 | 49.64 | 27.95 | 65.28 | 55.28 | Line | PASS |
| 2 | 0.1949 | 46.97 | 27.46 | 63.83 | 53.83 | | PASS |
| 3 | 0.2537 | 43.97 | 25.95 | 61.64 | 51.64 | | PASS |
| 4 | 0.6093 | 32.80 | 24.67 | 56.00 | 46.00 | | PASS |
| 5 | 1.1705 | 31.63 | 23.04 | 56.00 | 46.00 | | PASS |
| 6 | 14.7454 | 24.55 | 16.82 | 60.00 | 50.00 | | PASS |

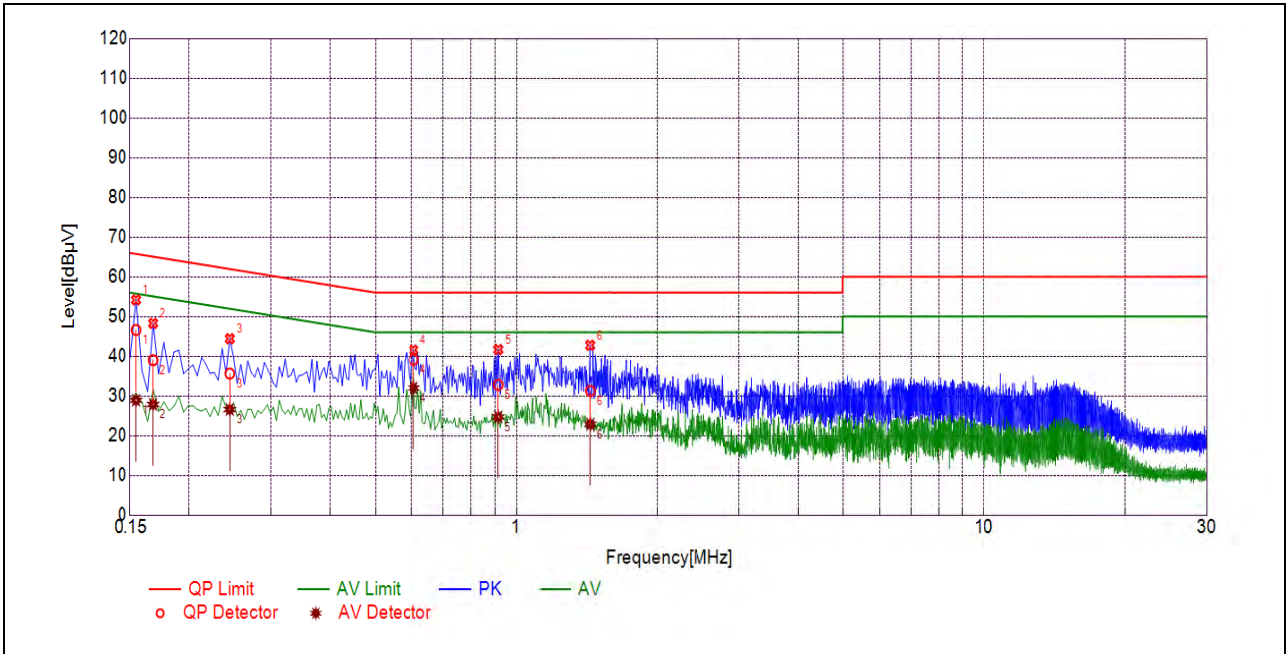

(N Phase)

| NO. | Fre. (MHz) | Emission Level (dBμV) | | Limit (dBμV) | | Power-line | Verdict |
|-----|------------|-----------------------|---------|--------------|---------|------------|---------|
| | | Quai-peak | Average | Quai-peak | Average | | |
| 1 | 0.1545 | 46.60 | 28.90 | 65.75 | 55.75 | Neutral | PASS |
| 2 | 0.1679 | 39.00 | 27.86 | 65.06 | 55.06 | | PASS |
| 3 | 0.2444 | 35.62 | 26.58 | 61.95 | 51.95 | | PASS |
| 4 | 0.6049 | 39.10 | 31.99 | 56.00 | 46.00 | | PASS |
| 5 | 0.9145 | 32.75 | 24.70 | 56.00 | 46.00 | | PASS |
| 6 | 1.4429 | 31.27 | 22.86 | 56.00 | 46.00 | | PASS |


2.8. Restricted Frequency Bands

2.8.1. Requirement

According to FCC section 15.407(b)(7), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

2.8.2. Test Description

Test Setup

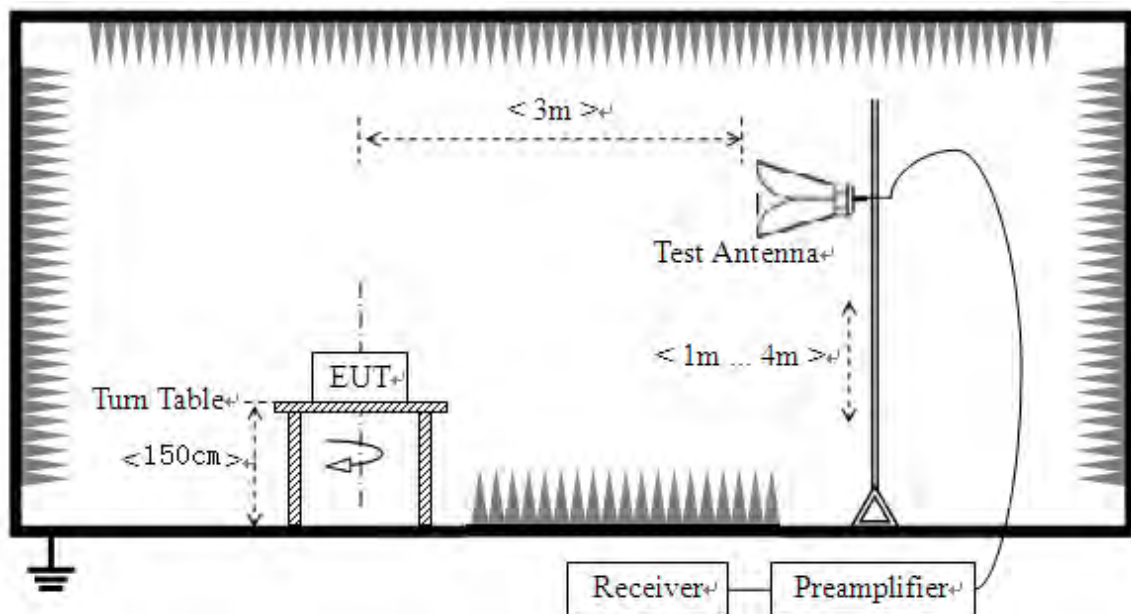

The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

KDB 789033 Section H) 3)5)6(d)) was used in order to prove compliance

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.



2.8.3. Test Result

The lowest and highest channels are tested to verify Restricted Frequency Bands.

The measurement results are obtained as below:

$$E \text{ [dB}\mu\text{V/m]} = U_R + A_T + A_{\text{Factor}} \text{ [dB]}; A_T = L_{\text{Cable loss}} \text{ [dB]} - G_{\text{preamp}} \text{ [dB]}$$

A_T : Total correction Factor except Antenna; U_R : Receiver Reading

G_{preamp} : Preamplifier Gain; A_{Factor} : Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.


802.11a Test mode

A. Test Verdict:


| Channel | Frequency (MHz) | Detector | Receiver Reading | A_T (dB) | A_{Factor} (dB@3m) | Max. Emission E (dB μ V/m) | Limit (dB μ V/m) | Verdict |
|---------|-----------------|----------|--------------------|------------|-----------------------------|--------------------------------|----------------------|---------|
| | | PK/ AV | U_R (dB μ V) | | | | | |
| 36 | 5146.68 | PK | 50.53 | -26.92 | 32.20 | 55.81 | 74 | PASS |
| 36 | 5150.00 | AV | 35.96 | -26.92 | 32.20 | 41.24 | 54 | PASS |
| 64 | 5350.52 | PK | 55.07 | -26.80 | 32.20 | 60.47 | 74 | PASS |
| 64 | 5351.50 | AV | 34.55 | -26.80 | 32.20 | 39.95 | 54 | PASS |
| 100 | 5468.69 | PK | 48.43 | -26.64 | 32.20 | 53.99 | 68.23 | PASS |
| 100 | 5467.16 | AV | 34.71 | -26.64 | 32.20 | 40.27 | 54 | PASS |
| 144 | 5729.00 | PK | 54.16 | -26.64 | 32.20 | 59.72 | 68.23 | PASS |
| 144 | 5727.00 | AV | 37.38 | -26.64 | 32.20 | 42.94 | 54 | PASS |
| 149 | 5725.00 | PK | 62.02 | -26.23 | 32.20 | 67.99 | 122.23 | PASS |
| 149 | 5725.00 | AV | 45.20 | -26.23 | 32.20 | 51.17 | 54 | PASS |
| 165 | 5850.00 | PK | 56.31 | -26.23 | 32.20 | 62.28 | 122.23 | PASS |
| 165 | 5850.00 | AV | 40.50 | -26.23 | 32.20 | 46.47 | 54 | PASS |




B. Test Plots:

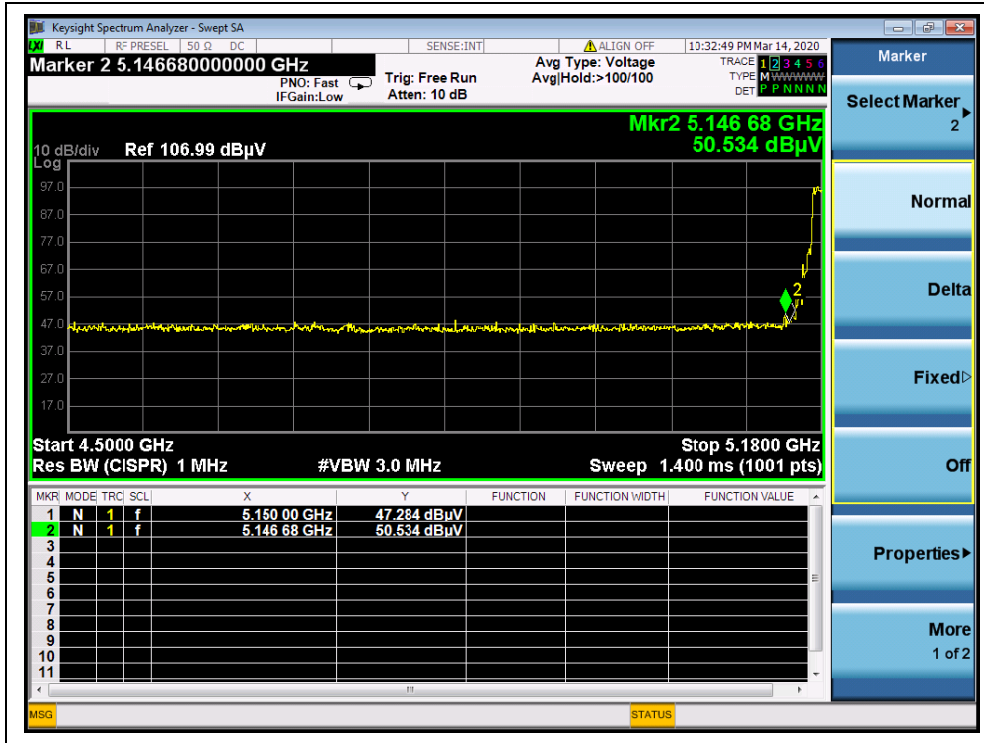


(Channel 36, PEAK, 802.11a)

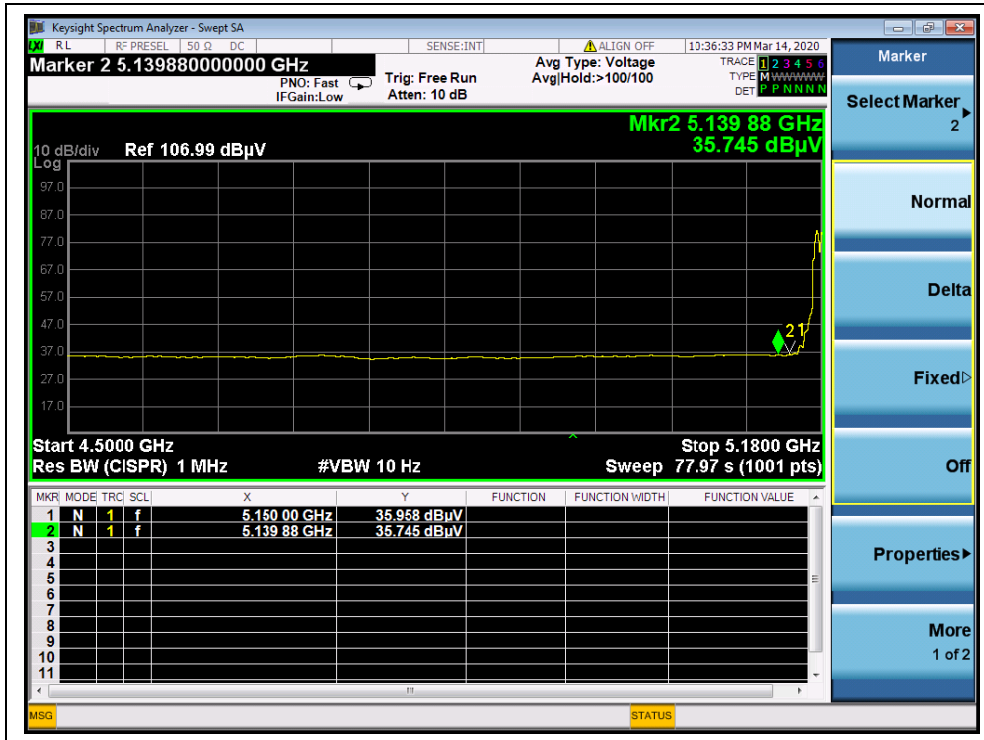


(Channel 36, AVG, 802.11a)

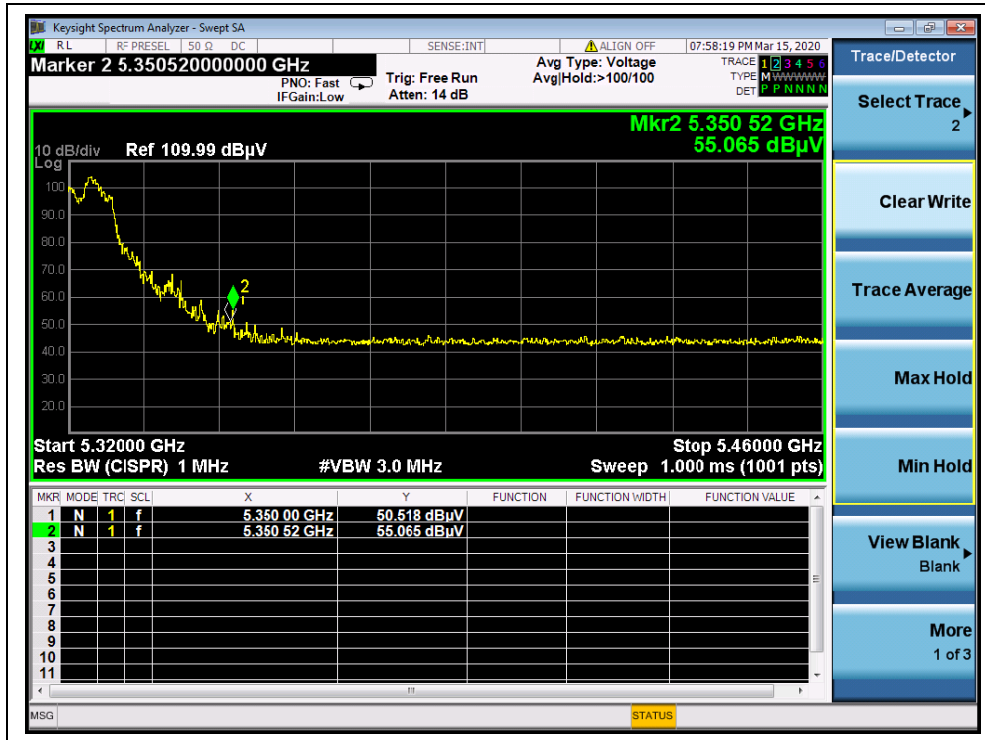


(Channel 64, PEAK, 802.11a)

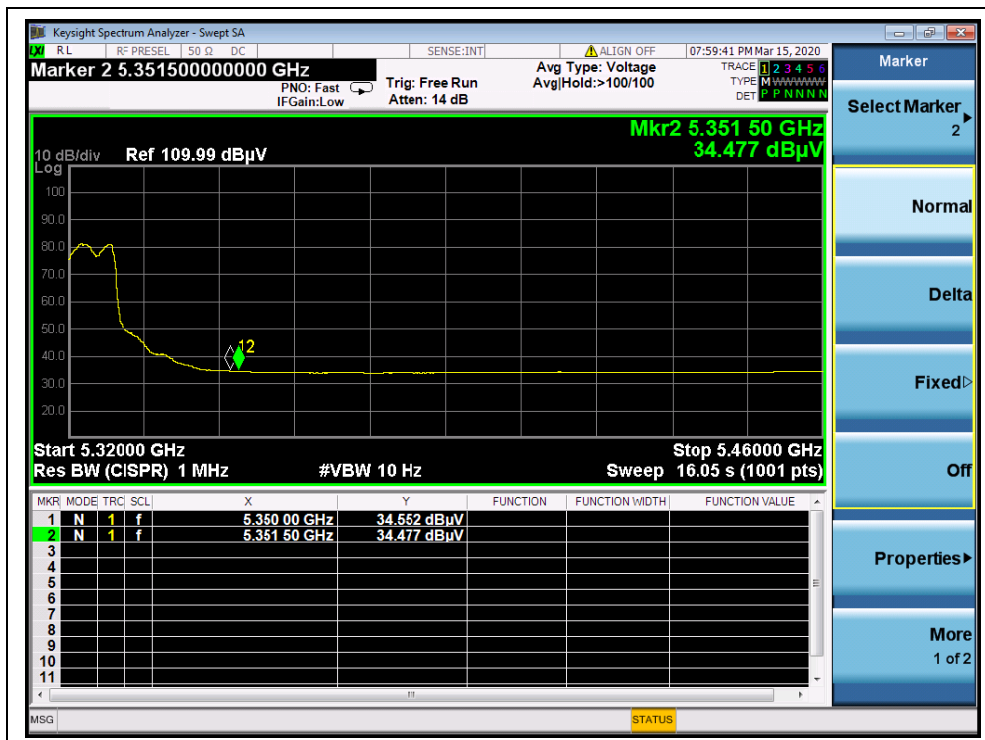


(Channel 64, AVG, 802.11a)

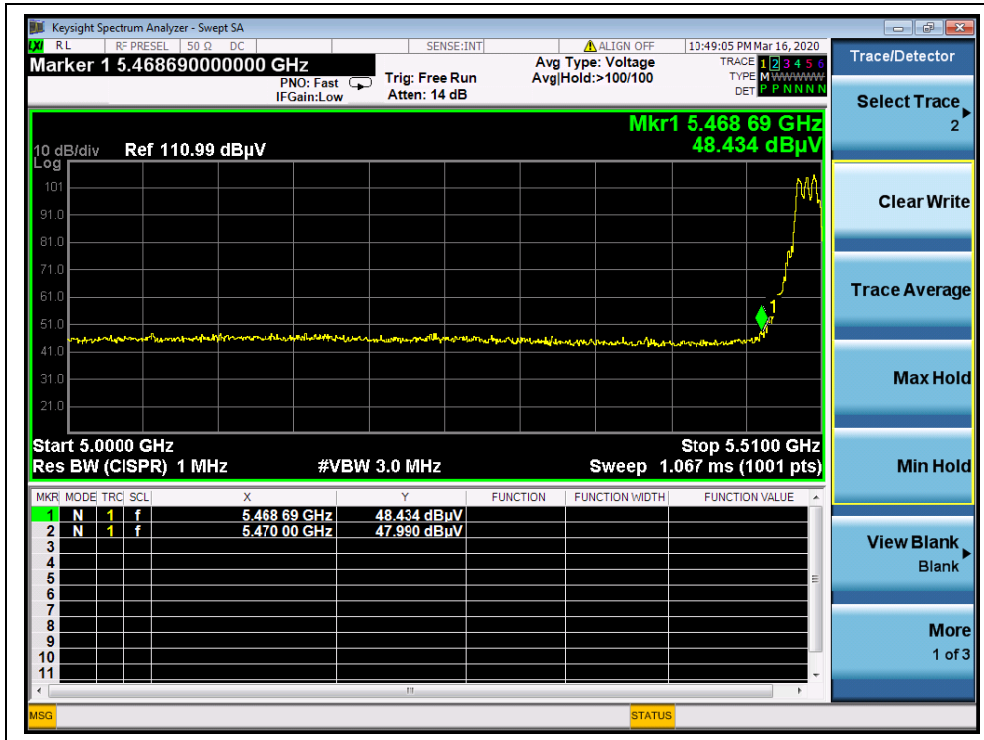


(Channel 100, PEAK, 802.11a)

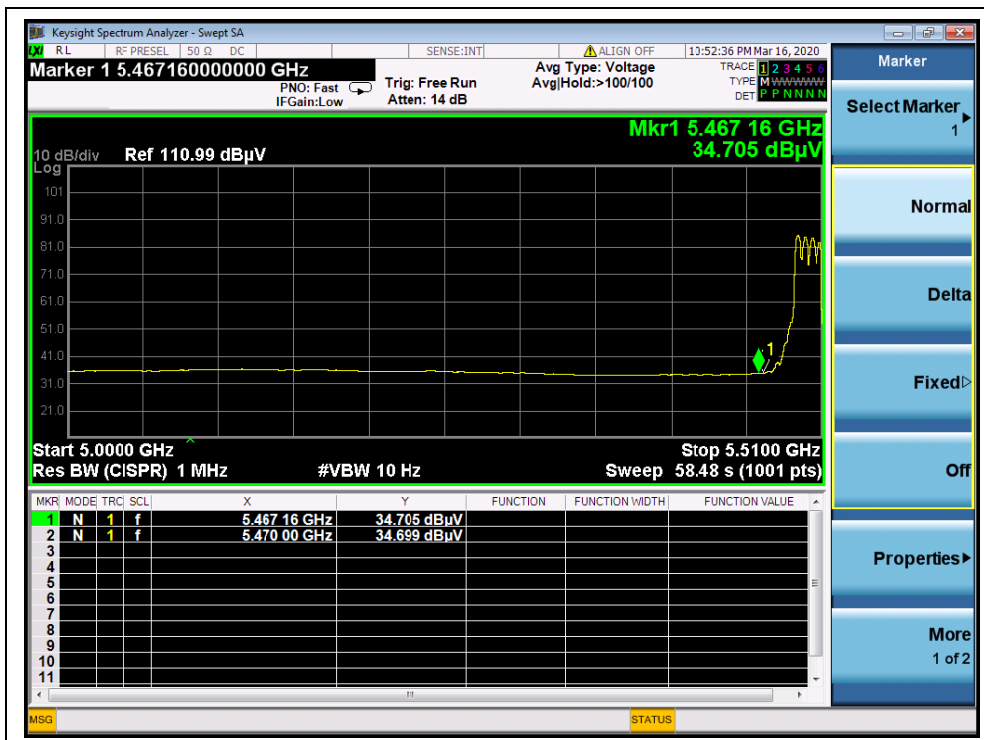

(Channel 100, AVG, 802.11a)

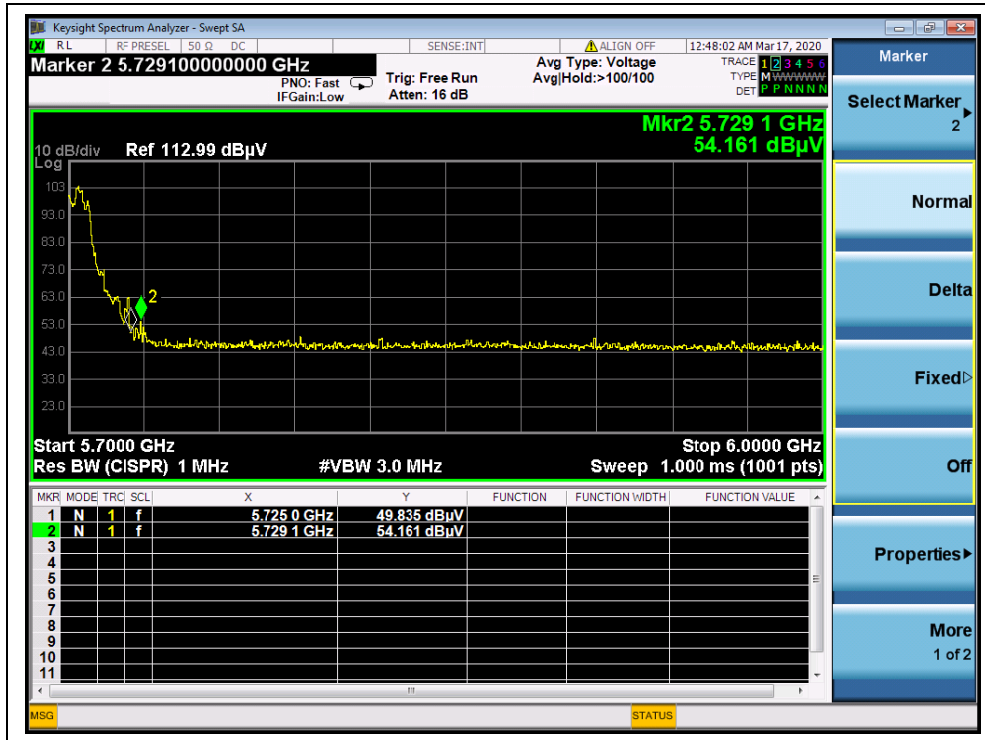

(Channel 144, PEAK, 802.11a)

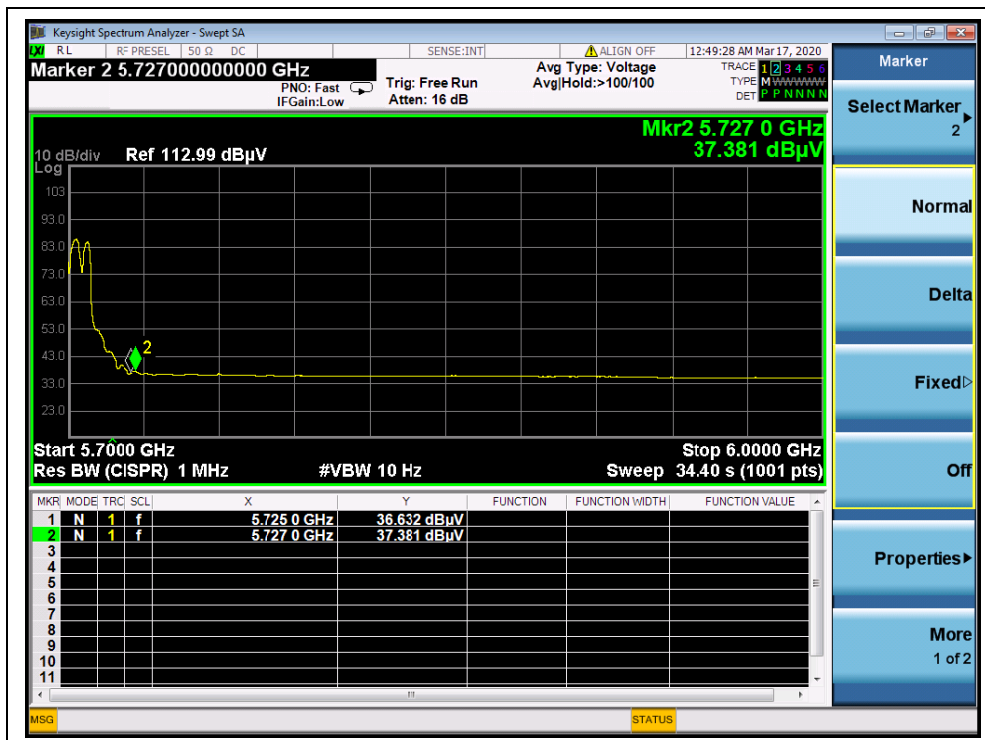

(Channel 144, AVG, 802.11a)