

TEST REPORT

Product : Portable PC
Trade mark : CHUWI
Model/Type reference : CoreBook Pro
Serial Number : N/A
Report Number : EED32M00265303
FCC ID : 2AHLZ-COREBOOKPRO
Date of Issue : Oct. 29, 2020
Test Standards : 47 CFR Part 15Subpart C
Test result : PASS

Prepared for:

CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
2 Floor Building 3 LiJinCheng Industrial park
the east of Gongye road LongHua, Shenzhen, China

Prepared by:

Centre Testing International Group Co., Ltd.
Hongwei Industrial Zone, Bao'an 70 District,
Shenzhen, Guangdong, China
TEL: +86-755-3368 3668
FAX: +86-755-3368 3385

Compiled by:

Sunlight Sun

Sunlight Sun

Reviewed by:

Jok Yang

Jok Yang

Approved by:

Sam Chuang

Sam Chuang

Date:

Oct. 29, 2020



Check No: 4762123665

2 Version

Version No.	Date	Description
00	Oct. 29, 2020	Original

3 Test Summary

Test Item	Test Requirement	Test method	Result
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013	PASS
Band-edge for RF Conducted Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
Radiated Spurious Emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Restricted bands around fundamental frequency (Radiated Emission)	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

Remark:

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

Company Name and Address shown on Report, the sample(s) and sample Information was/ were provided by the applicant who should be responsible for the authenticity which CTI hasn't verified.


4 Content

1 COVER PAGE	1
2 VERSION	2
3 TEST SUMMARY	3
4 CONTENT	4
5 TEST REQUIREMENT	5
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
6 GENERAL INFORMATION	8
6.1 CLIENT INFORMATION.....	8
6.2 GENERAL DESCRIPTION OF EUT.....	8
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	8
6.4 DESCRIPTION OF SUPPORT UNITS.....	10
6.5 TEST LOCATION.....	10
6.6 DEVIATION FROM STANDARDS.....	10
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	10
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	10
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, $K=2$).....	10
7 EQUIPMENT LIST	11
8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION	14
Appendix A): Conducted Peak Output Power.....	39
Appendix B): 6dB Occupied Bandwidth.....	53
Appendix C): Band-edge for RF Conducted Emissions.....	70
Appendix D): RF Conducted Spurious Emissions.....	77
Appendix E): Power Spectral Density.....	102
Appendix F): Antenna Requirement.....	116
Appendix G): AC Power Line Conducted Emission.....	117
Appendix H): Restricted bands around fundamental frequency (Radiated).....	120
Appendix I): Radiated Spurious Emissions.....	201
PHOTOGRAPHS OF TEST SETUP	218
PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS	221

5 Test Requirement

5.1 Test setup

5.1.1 For Conducted test setup

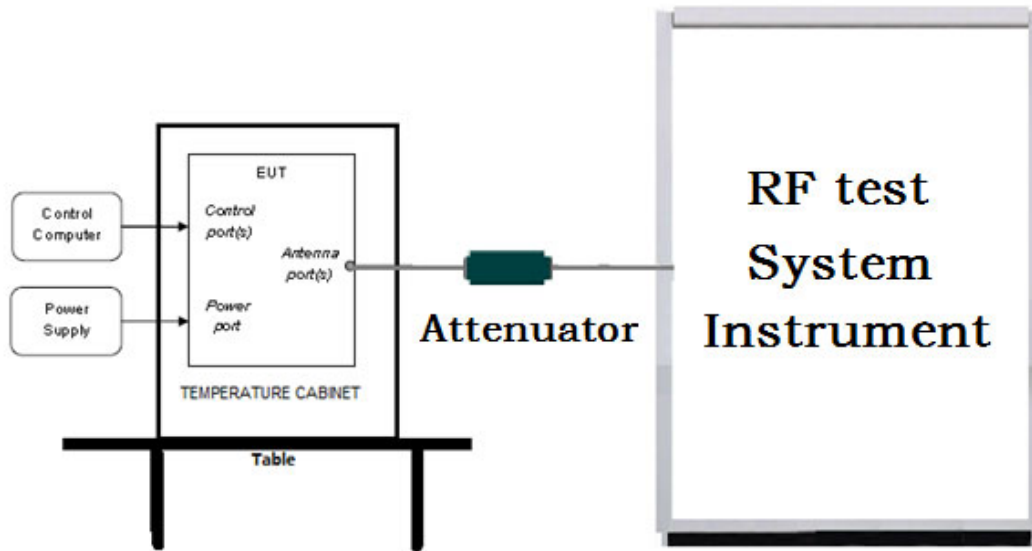

5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

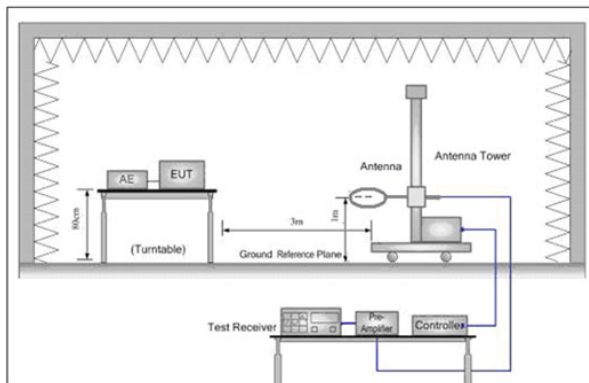


Figure 1. Below 30MHz

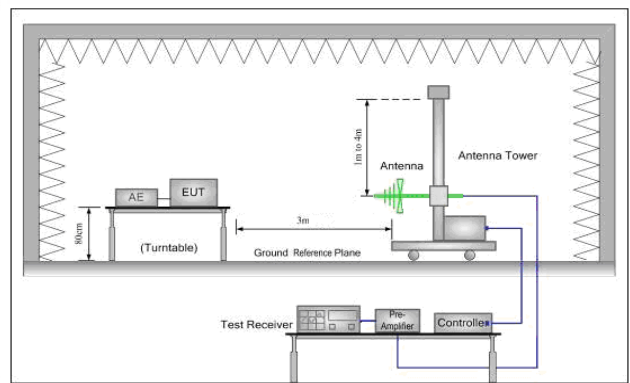


Figure 2. 30MHz to 1GHz


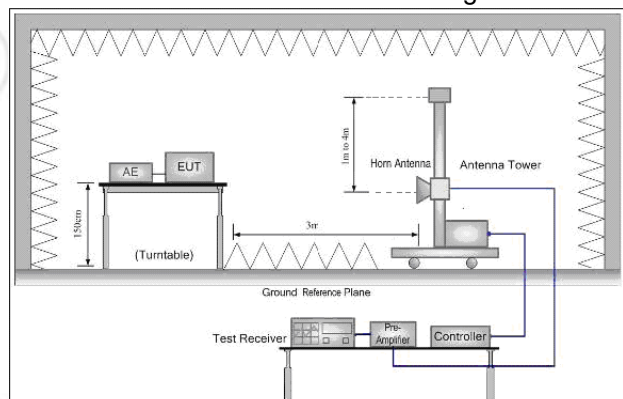


Figure 3. Above 1GHz

**5.1.3 For Conducted Emissions test setup
Conducted Emissions setup**

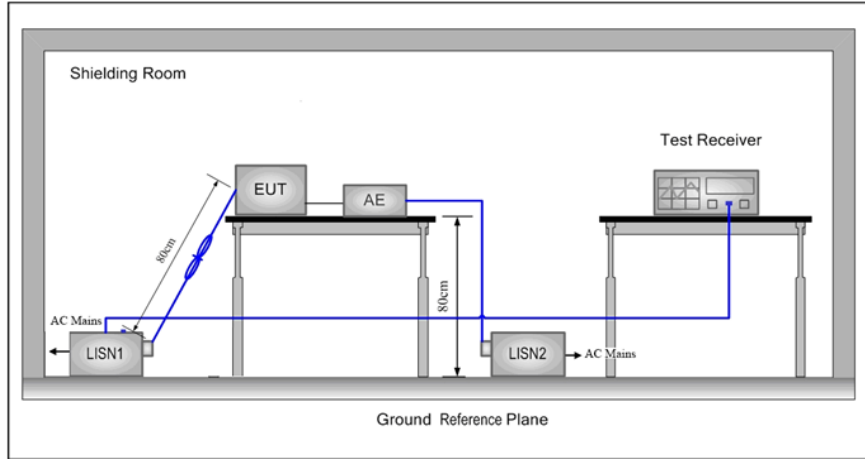

5.2 Test Environment

Operating Environment:	
Temperature:	24.0 °C
Humidity:	54 % RH
Atmospheric Pressure:	1010mbar

5.3 Test Condition

Test channel:

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
802.11b/g/n(HT20)	2412MHz ~2462 MHz	Channel 1	Channel 6	Channel11
		2412MHz	2437MHz	2462MHz
802.11n(HT40)	2422MHz ~2452 MHz	Channel 3	Channel 6	Channel 9
		2422MHz	2437MHz	2452MHz
Transmitting mode:	Keep the EUT in transmitting mode with all kind of modulation and all kind of data rate.			

Test mode:

Pre-scan under all rate at lowest channel

Mode	802.11b				X				
Data Rate	1Mbps	2Mbps	5.5Mbps	11Mbps					
Power(dBm)	15.59	15.56	15.52	15.48					
Mode	802.11g								
Data Rate	6Mbps	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	
Power(dBm)	14.33	14.31	14.29	14.26	14.25	14.23	14.21	14.18	
Mode	802.11n (HT20)								
Data Rate	6.5Mbps	13Mbps	19.5Mbps	26Mbps	39Mbps	52Mbps	58.5Mbps	65Mbps	
Power(dBm)	13.73	13.71	13.68	13.66	13.64	13.62	13.60	13.58	
Mode	802.11n (HT40)								
Data Rate	13.5Mbps	27Mbps	40.5Mbps	54Mbps	81Mbps	108Mbps	121.5Mbps	135Mbps	
Power(dBm)	13.44	13.41	13.37	13.34	13.31	13.27	13.25	13.22	

Through Pre-scan, 1Mbps of rate is the worst case of 802.11b; 6Mbps of rate is the worst case of 802.11g; 6.5Mbps of rate is the worst case of 802.11n(HT20); 13.5Mbps of rate is the worst case of 802.11n(HT40).

6 General Information

6.1 Client Information

Applicant:	CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
Address of Applicant:	2 Floor Building 3 LiJinCheng Industrial park the east of Gongye road LongHua, Shenzhen, China
Manufacturer:	CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
Address of Manufacturer:	2 Floor Building 3 LiJinCheng Industrial park the east of Gongye road LongHua, Shenzhen, China
Factory:	JIANGSU LUCKYSTAR INTELLIGENT & TECHNOLOGY CO., LTD
Address of Factory:	Inelligent Terminal Pioneer Park (D) ,Yanlong Street Office, Yandu District, Yancheng City, Jiangsu Province

6.2 General Description of EUT

Product Name:	Portable PC	
Model No.(EUT):	CoreBook Pro	
Trade mark:	CHUWI	
Frequency Range of Operation:	IEEE 802.11b/g/n(HT20)(HT40): 2400MHz to 2483.5MHz	
Power Supply:	Adapter	Model:A653-1903420D Input:100-240V~50/60Hz1.5A Output:19.0V---3.42A 65.0W
	Battery	Model Name:505979-3S1P 3ICP5/59/79 Rating:11.55V---4000mAh 46.2 Wh
Sample Received Date:	Aug. 28, 2020	
Sample tested Date:	Aug. 28, 2020 to Oct.15, 2020	

6.3 Product Specification subjective to this standard

Operation Frequency:	IEEE 802.11b/g/n(HT20): 2412MHz to 2462MHz IEEE 802.11n(HT40): 2422MHz to 2452MHz
Channel Numbers:	IEEE 802.11b/g, IEEE 802.11n HT20: 11 Channels IEEE 802.11n HT40: 7 Channels
Channel Separation:	5MHz
Type of Modulation:	IEEE for 802.11b: DSSS(CCK,DQPSK,DBPSK) IEEE for 802.11g :OFDM(64QAM, 16QAM, QPSK, BPSK) IEEE for 802.11n(HT20 and HT40) : OFDM (64QAM, 16QAM,QPSK,BPSK)
Test Power Grade:	Default
Test Software of EUT:	DRTU
Antenna Type and Gain:	Type: FPC antenna Gain: Antenna 1 :2.81dBi; Antenna 2: 1.70 dBi
Test Voltage:	Battery 11.55V

Operation Frequency each of channel(802.11b/g/n HT20)							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2412MHz	4	2427MHz	7	2442MHz	10	2457MHz
2	2417MHz	5	2432MHz	8	2447MHz	11	2462MHz
3	2422MHz	6	2437MHz	9	2452MHz		
Operation Frequency each of channel(802.11n HT40)							
Channel	Frequency	Channel	Frequency	Channel	Frequency		
3	2422MHz	6	2437MHz	9	2452MHz		
4	2427MHz	7	2442MHz				
5	2432MHz	8	2447MHz				

6.4 Description of Support Units

The EUT has been tested independently

6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd
Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, China
Telephone: +86 (0) 755 33683668 Fax:+86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

6.6 Deviation from Standards

None.

6.7 Abnormalities from Standard Conditions

None.

6.8 Other Information Requested by the Customer

None.

6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	7.9×10^{-8}
2	RF power, conducted	0.46dB (30MHz-1GHz)
		0.55dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.3dB (30MHz-1GHz)
		4.5dB (1GHz-12.75GHz)
4	Conduction emission	3.5dB (9kHz to 150kHz)
		3.1dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	3.8%
7	DC power voltages	0.026%

7 Equipment List

RF test system					
Equipment	Manufacturer	Mode No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Spectrum Analyzer	Keysight	N9010A	MY54510339	02-17-2020	02-16-2021
Signal Generator	Keysight	N5182B	MY53051549	02-17-2020	02-16-2021
Temperature/ Humidity Indicator	biaozhi	HM10	1804186	06-29-2020	06-28-2021
High-pass filter	Sinoscite	FL3CX03WG18N M12-0398-002	---	---	---
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	---	---
DC Power	Keysight	E3642A	MY56376072	02-17-2020	02-16-2021
PC-1	Lenovo	R4960d	---	---	---
BT&WI-FI Automatic control	R&S	OSP120	101374	02-17-2020	02-16-2021
RF control unit	JS Tonscend	JS0806-2	158060006	02-17-2020	02-16-2021
BT&WI-FI Automatic test software	JS Tonscend	JS1120-3	---	---	---

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100435	04-28-2020	04-27-2021
Temperature/ Humidity Indicator	Defu	TH128	/	---	---
LISN	R&S	ENV216	100098	03-05-2020	03-04-2021
Barometer	changchun	DYM3	1188	---	---

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	05-24-2019	05-23-2022
TRILOG Broadband Antenna	Schwarzbeck	VULB9163	9163-618	05-16-2020	05-15-2021
Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-076	04-25-2018	04-24-2021
Receiver	R&S	ESCI7	100938-003	10-21-2019	10-20-2020
Multi device Controller	matturo	NCD/070/107 11112	---	---	---
Temperature/ Humidity Indicator	Shanghai qixiang	HM10	1804298	06-29-2020	06-28-2021
Cable line	Fulai(7M)	SF106	5219/6A	---	---
Cable line	Fulai(6M)	SF106	5220/6A	---	---
Cable line	Fulai(3M)	SF106	5216/6A	---	---
Cable line	Fulai(3M)	SF106	5217/6A	---	---

3M full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
RSE Automatic test software	JS Tonscend	JS36-RSE	10166	---	---
Receiver	Keysight	N9038A	MY57290136	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9020B	MY57111112	03-05-2020	03-04-2021
Spectrum Analyzer	Keysight	N9030B	MY57140871	03-05-2020	03-04-2021
TRILOG Broadband Antenna	Schwarzbeck	VULB 9163	9163-1148	04-25-2018	04-24-2021
Horn Antenna	Schwarzbeck	BBHA 9170	9170-832	04-25-2018	04-24-2021
Horn Antenna	ETS-LINDGREN	3117	00057407	07-10-2018	07-09-2021
Preamplifier	EMCI	EMC184055SE	980596	05-20-2020	05-19-2021
Preamplifier	EMCI	EMC001330	980563	04-22-2020	04-21-2021
Preamplifier	JS Tonscend	980380	EMC051845 SE	01-09-2020	01-08-2021
Temperature/ Humidity Indicator	biaozhi	GM1360	EE1186631	04-27-2020	04-26-2021
Fully Anechoic Chamber	TDK	FAC-3	---	01-17-2018	01-16-2021
Filter bank	JS Tonscend	JS0806-F	188060094	04-10-2018	04-09-2021
Cable line	Times	SFT205-NMSM-2.50M	394812-0001	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0002	---	---
Cable line	Times	SFT205-NMSM-2.50M	394812-0003	---	---
Cable line	Times	SFT205-NMSM-2.50M	393495-0001	---	---
Cable line	Times	EMC104-NMNM-1000	SN160710	---	---
Cable line	Times	SFT205-NMSM-3.00M	394813-0001	---	---
Cable line	Times	SFT205-NMNM-1.50M	381964-0001	---	---
Cable line	Times	SFT205-NMSM-7.00M	394815-0001	---	---
Cable line	Times	HF160-KMKM-3.00M	393493-0001	---	---

8 Radio Technical Requirements Specification

Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices


Test Results List:


Test Requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (b)(3)	ANSI C63.10	Conducted Peak Output Power	PASS	Appendix A)
Part15C Section 15.247 (a)(2)	ANSI C63.10	6dB Occupied Bandwidth	PASS	Appendix B)
Part15C Section 15.247(d)	ANSI C63.10	Band-edge for RF Conducted Emissions	PASS	Appendix C)
Part15C Section 15.247(d)	ANSI C63.10	RF Conducted Spurious Emissions	PASS	Appendix D)
Part15C Section 15.247 (e)	ANSI C63.10	Power Spectral Density	PASS	Appendix E)
Part15C Section 15.203/15.247 (c)	ANSI C63.10	Antenna Requirement	PASS	Appendix F)
Part15C Section 15.207	ANSI C63.10	AC Power Line Conducted Emission	PASS	Appendix G)
Part15C Section 15.205/15.209	ANSI C63.10	Restricted bands around fundamental frequency (Radiated Emission)	PASS	Appendix H)
Part15C Section 15.205/15.209	ANSI C63.10	Radiated Spurious Emissions	PASS	Appendix I)


EUT DUTY CYCLE


Result Table


Test Case: Duty Cycle	
Mode: 11B	Ant: Ant1
Channel: LCH	Voltage: VN
Temperature: TN	Result: PASS Value:98.53%
Start Time: 2020/9/10 17:04:10	End Time: 2020/9/10 17:04:18

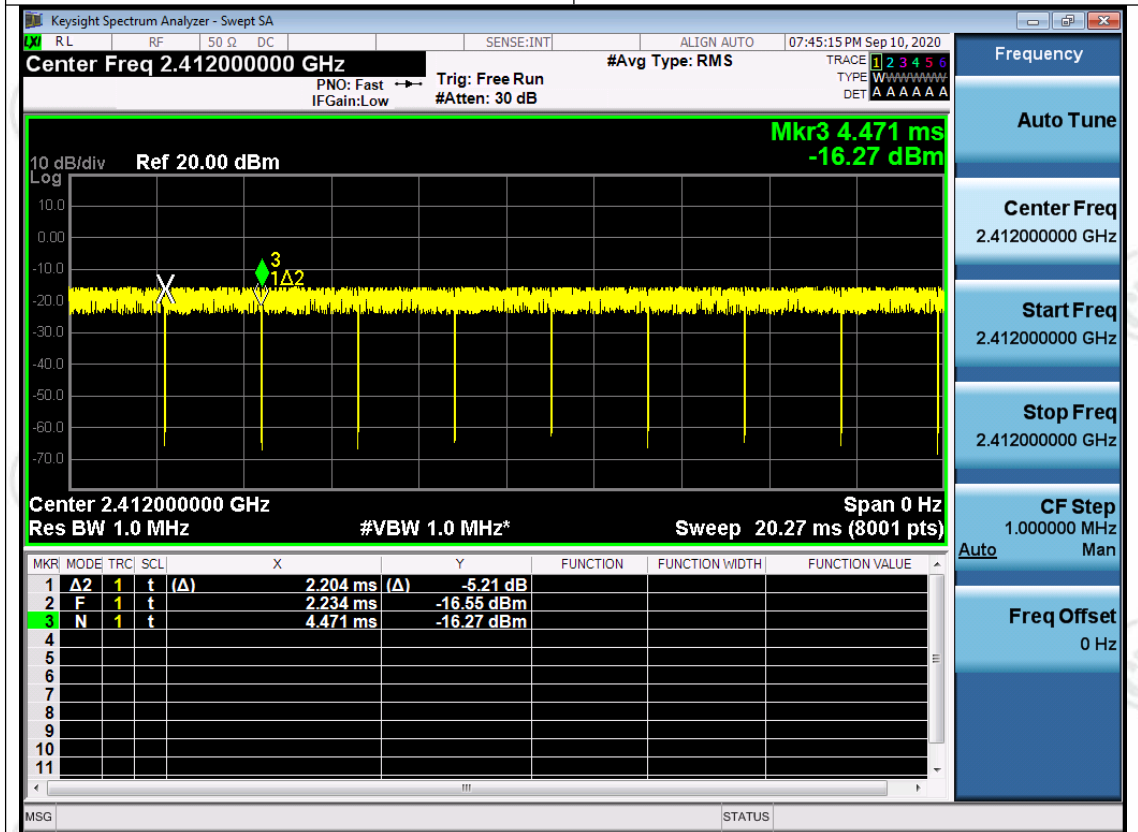


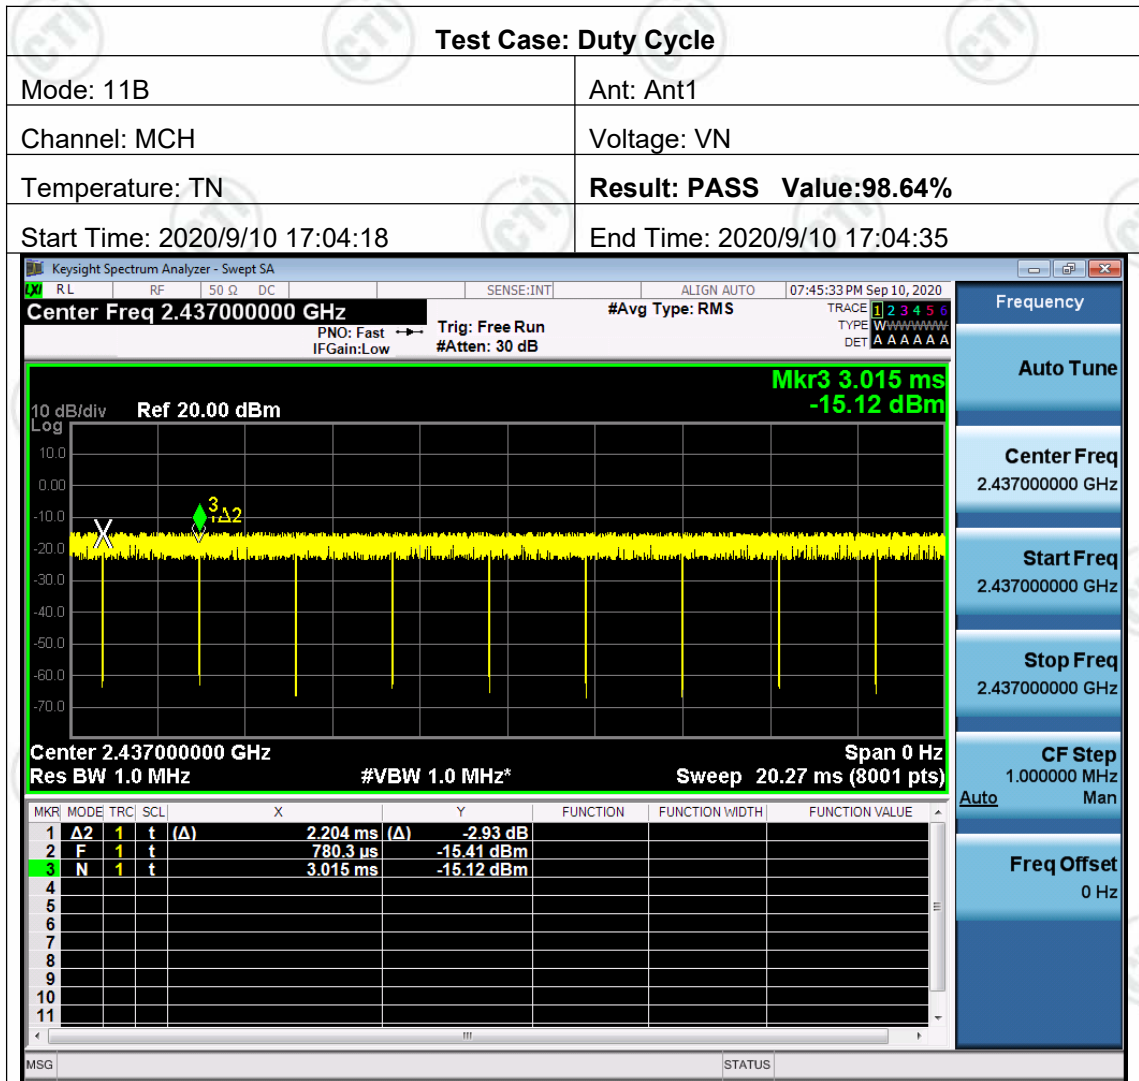


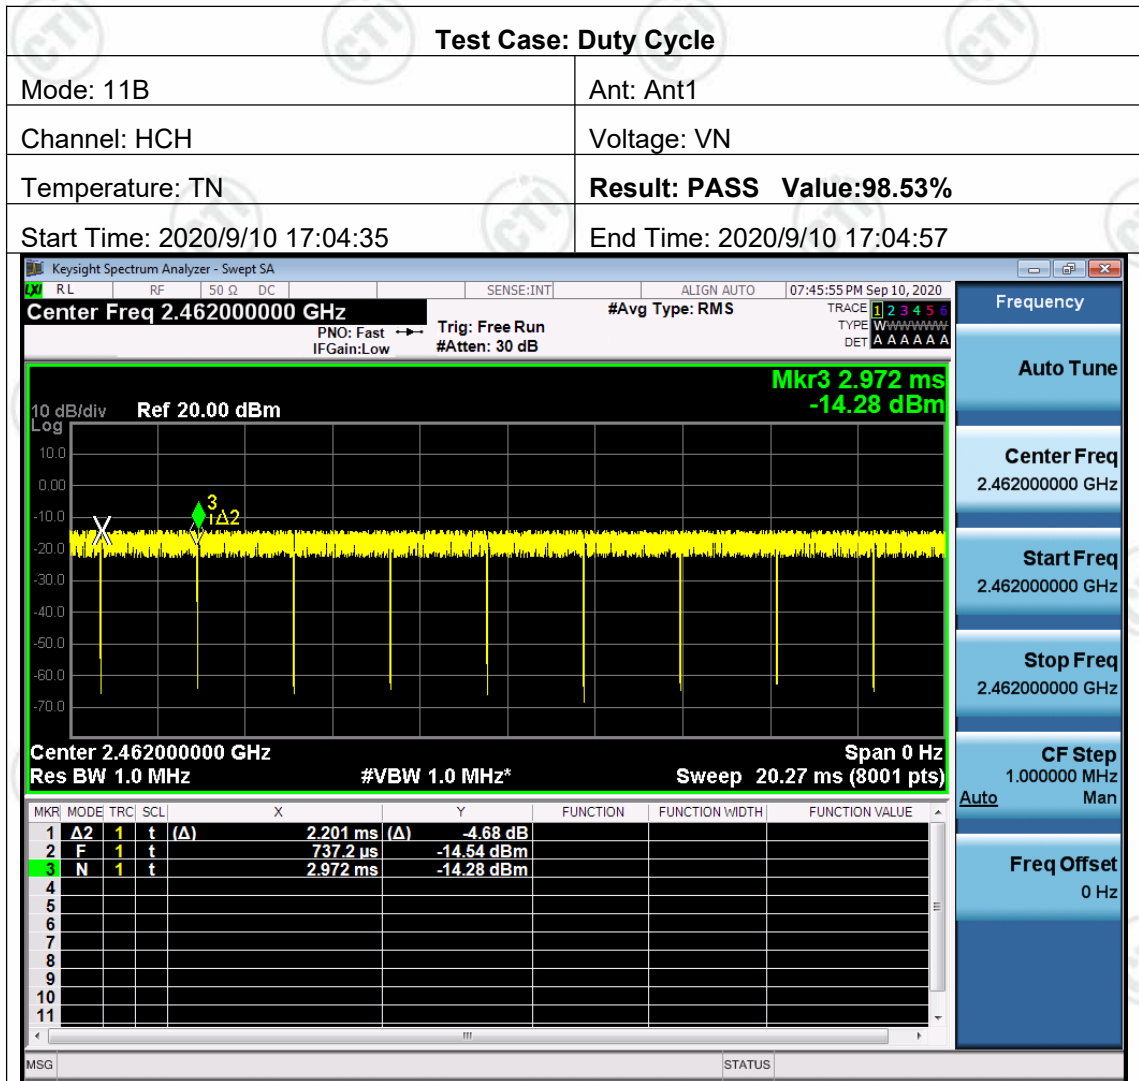


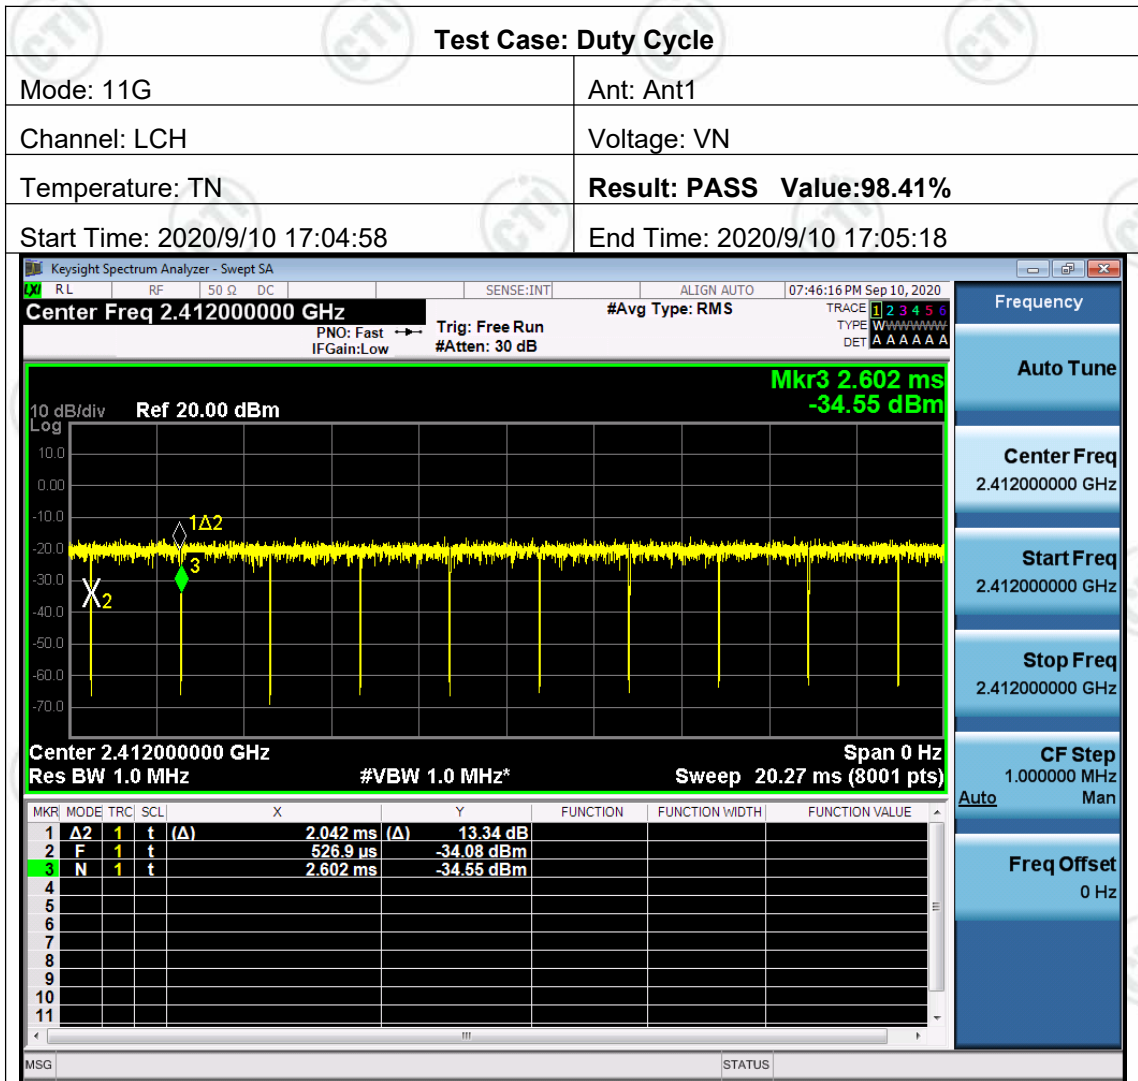


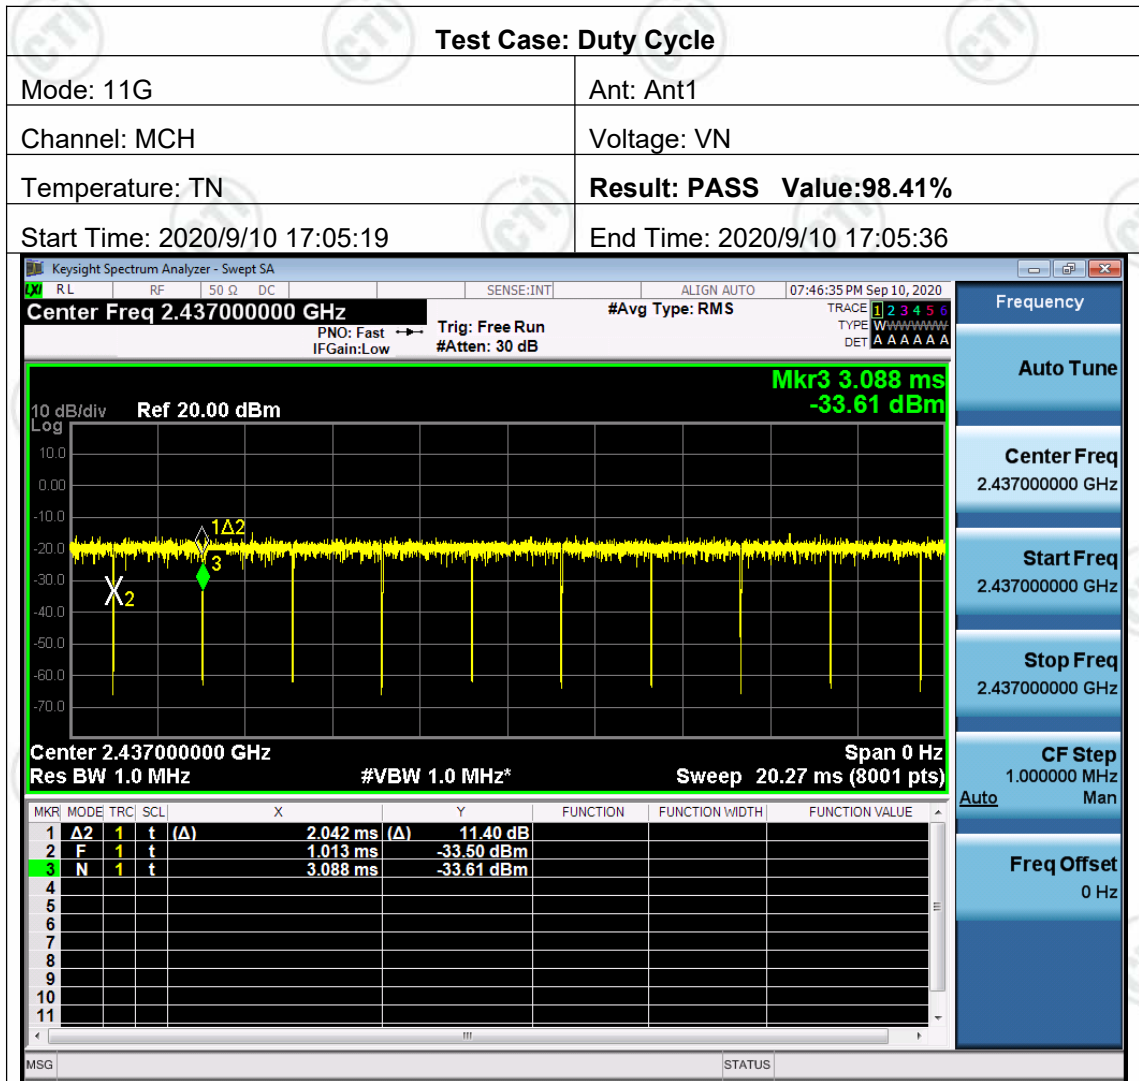


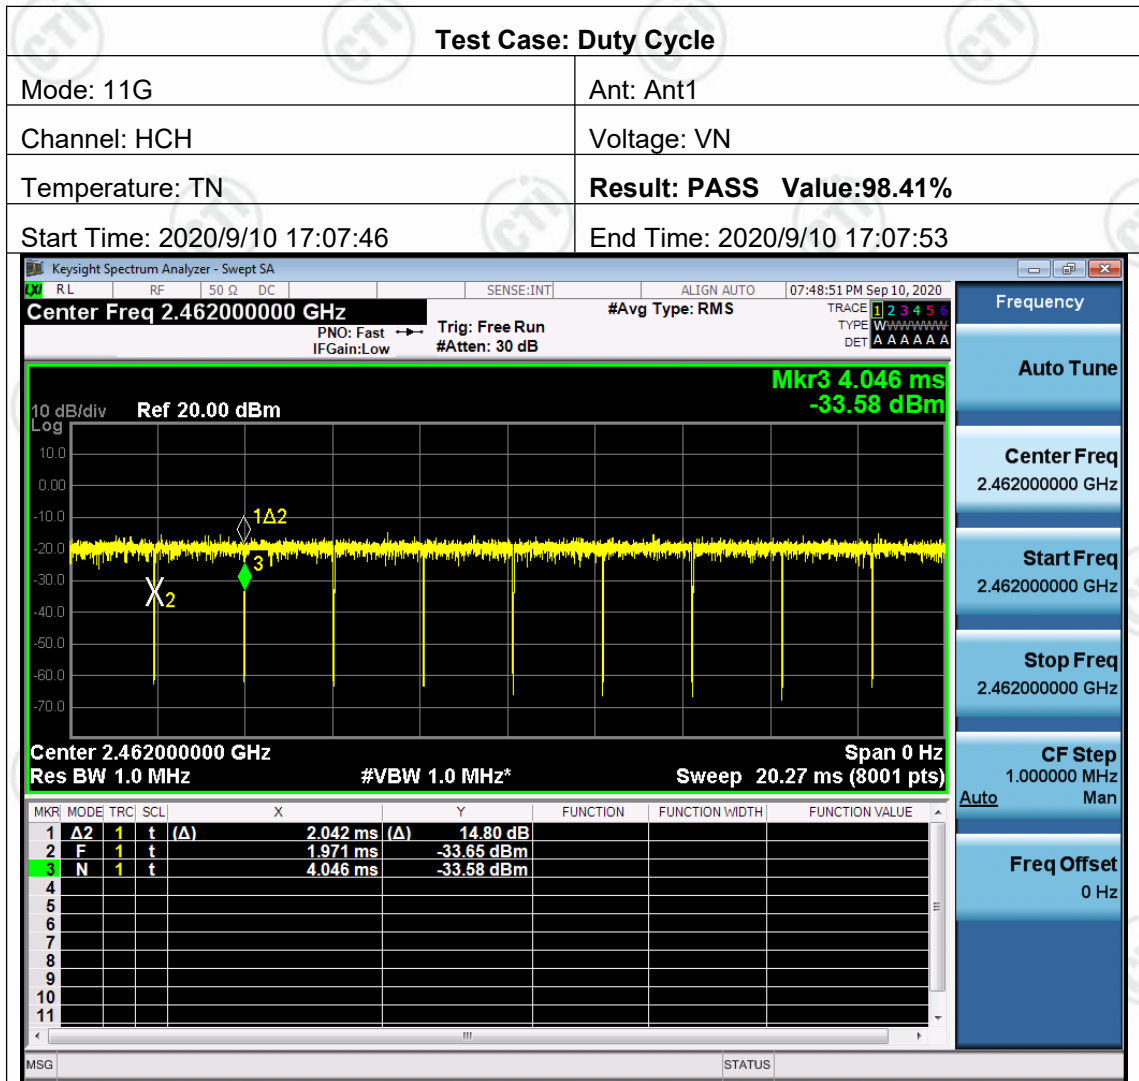


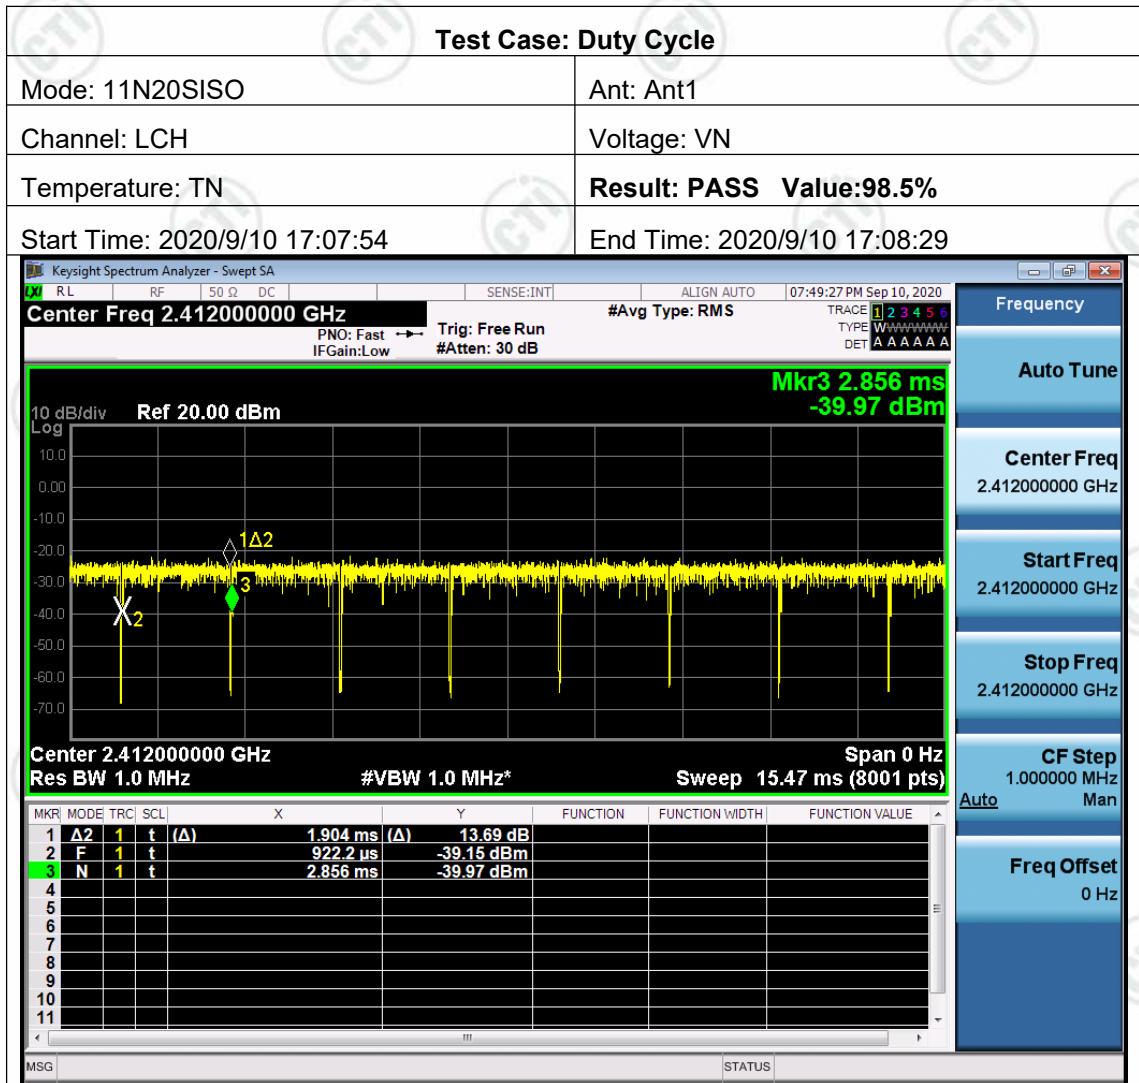


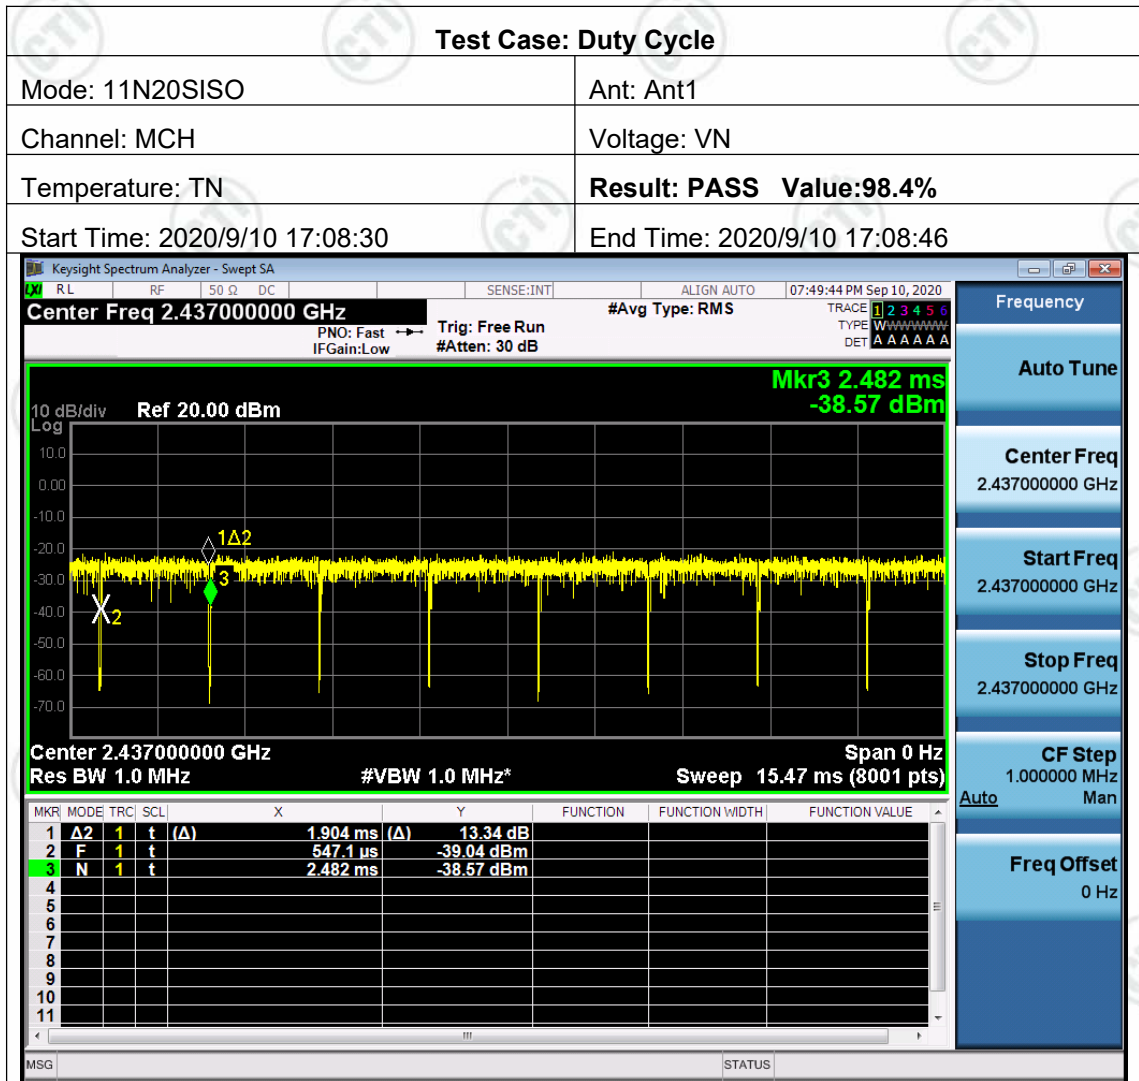


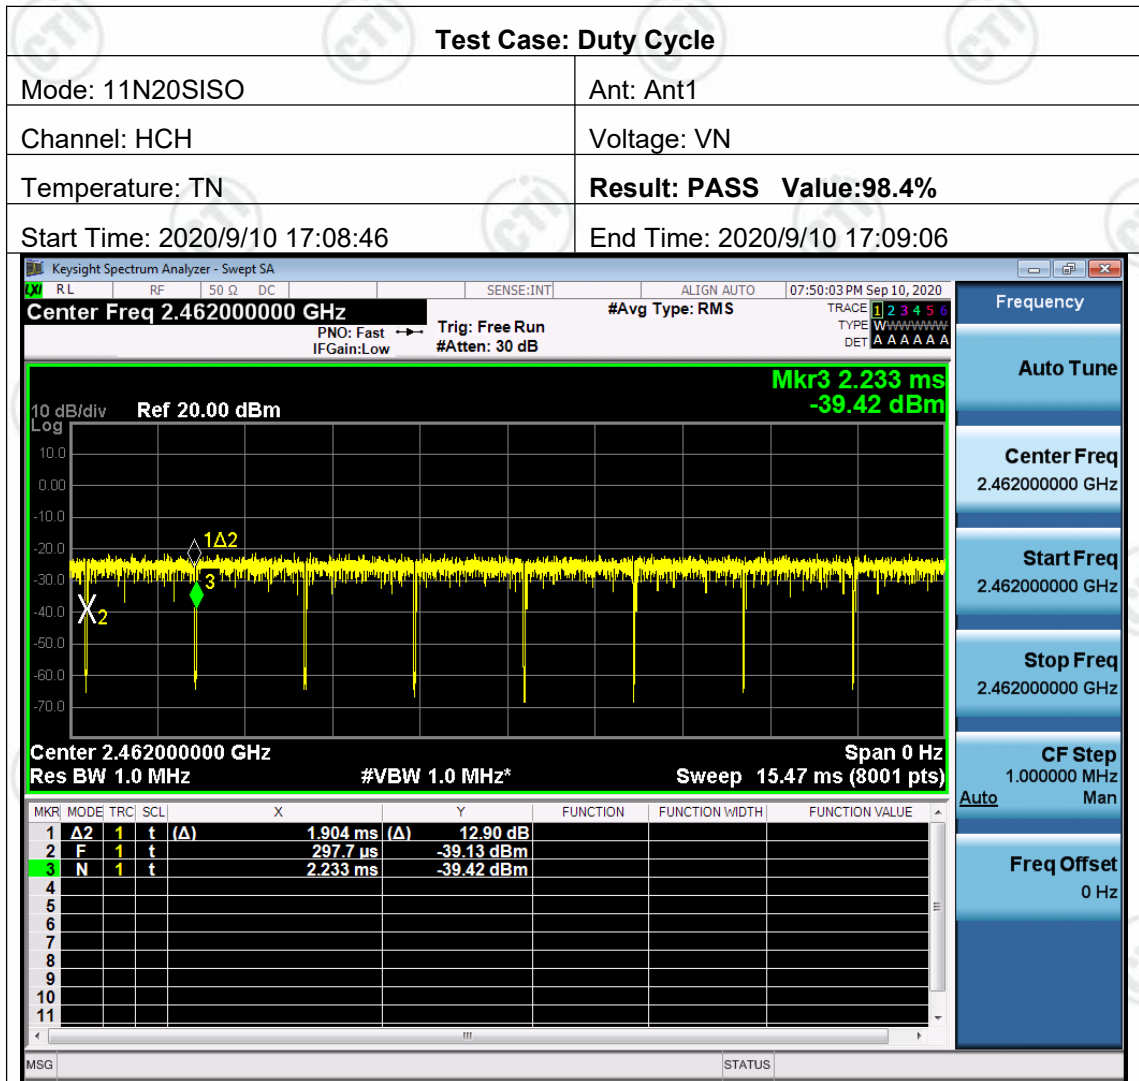


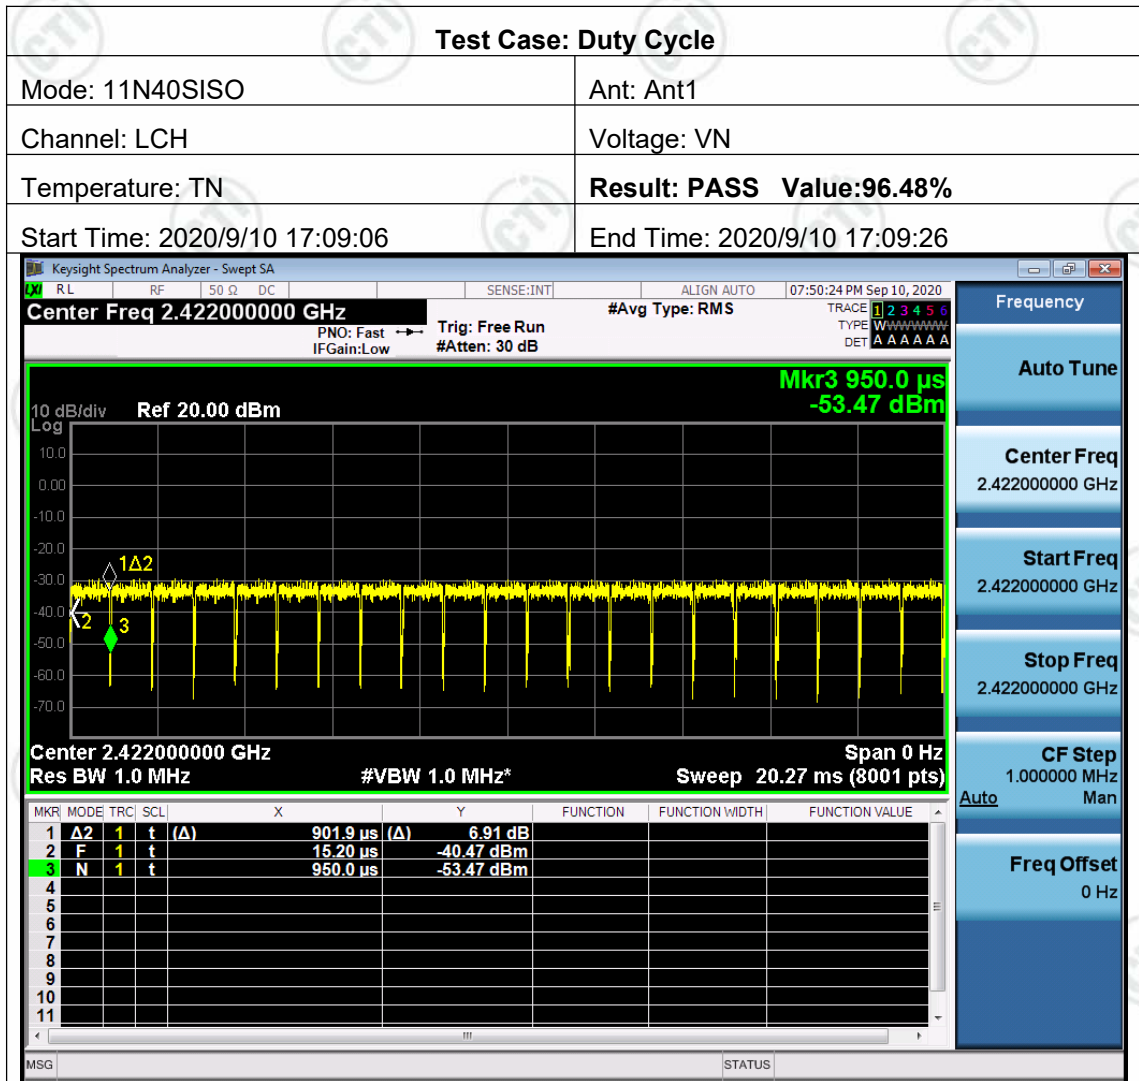


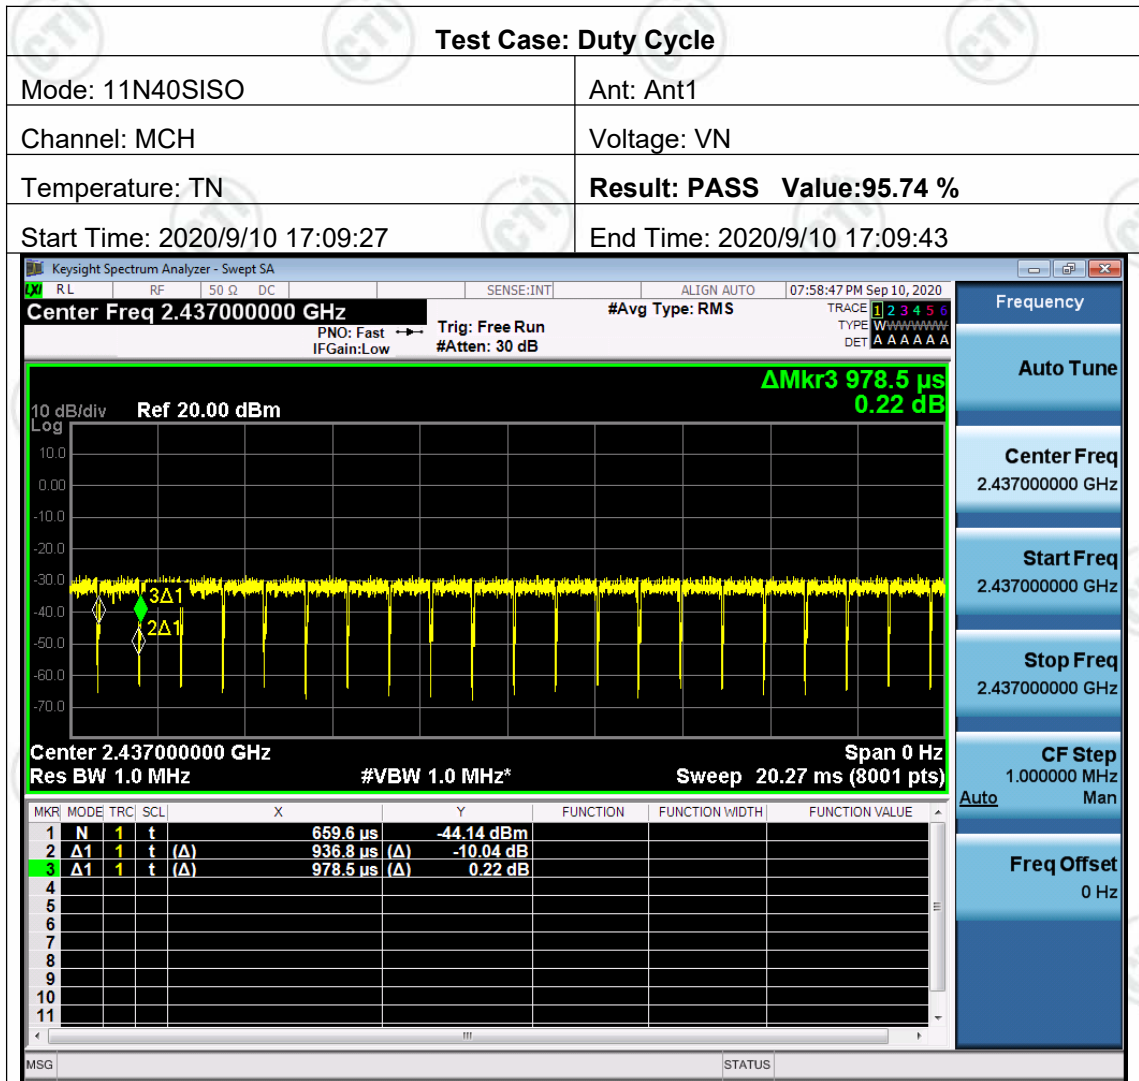


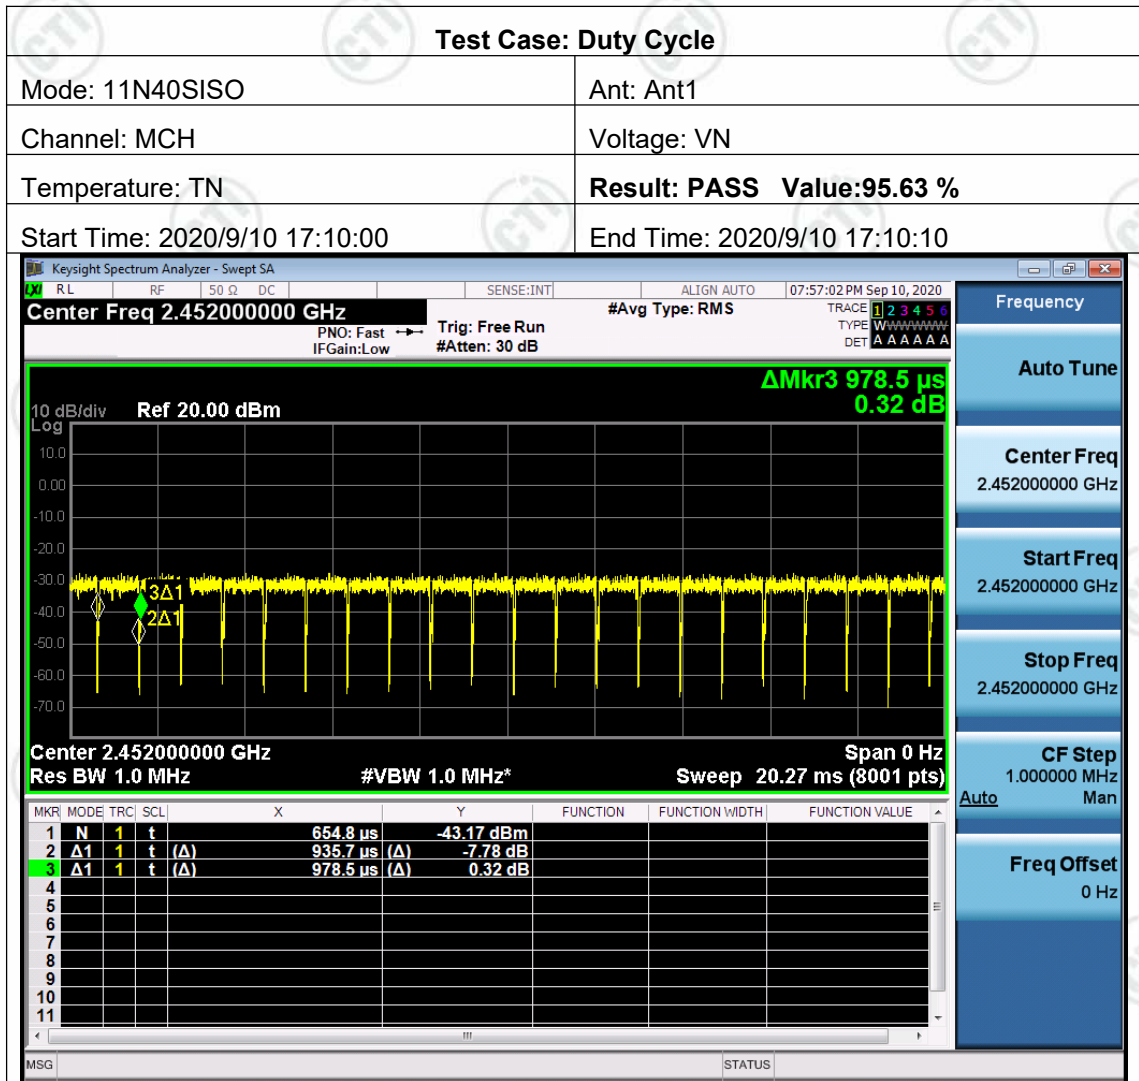


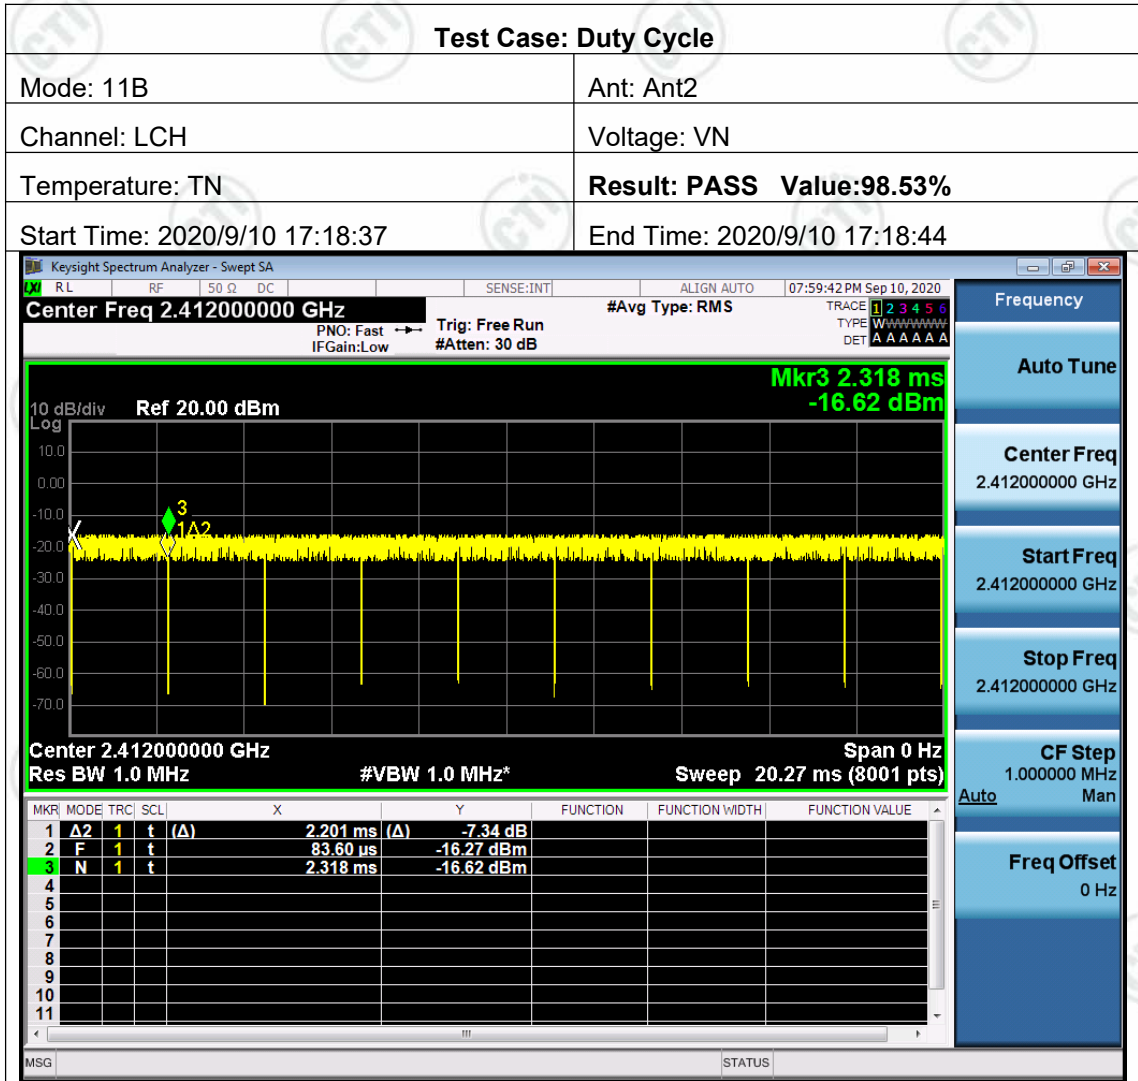


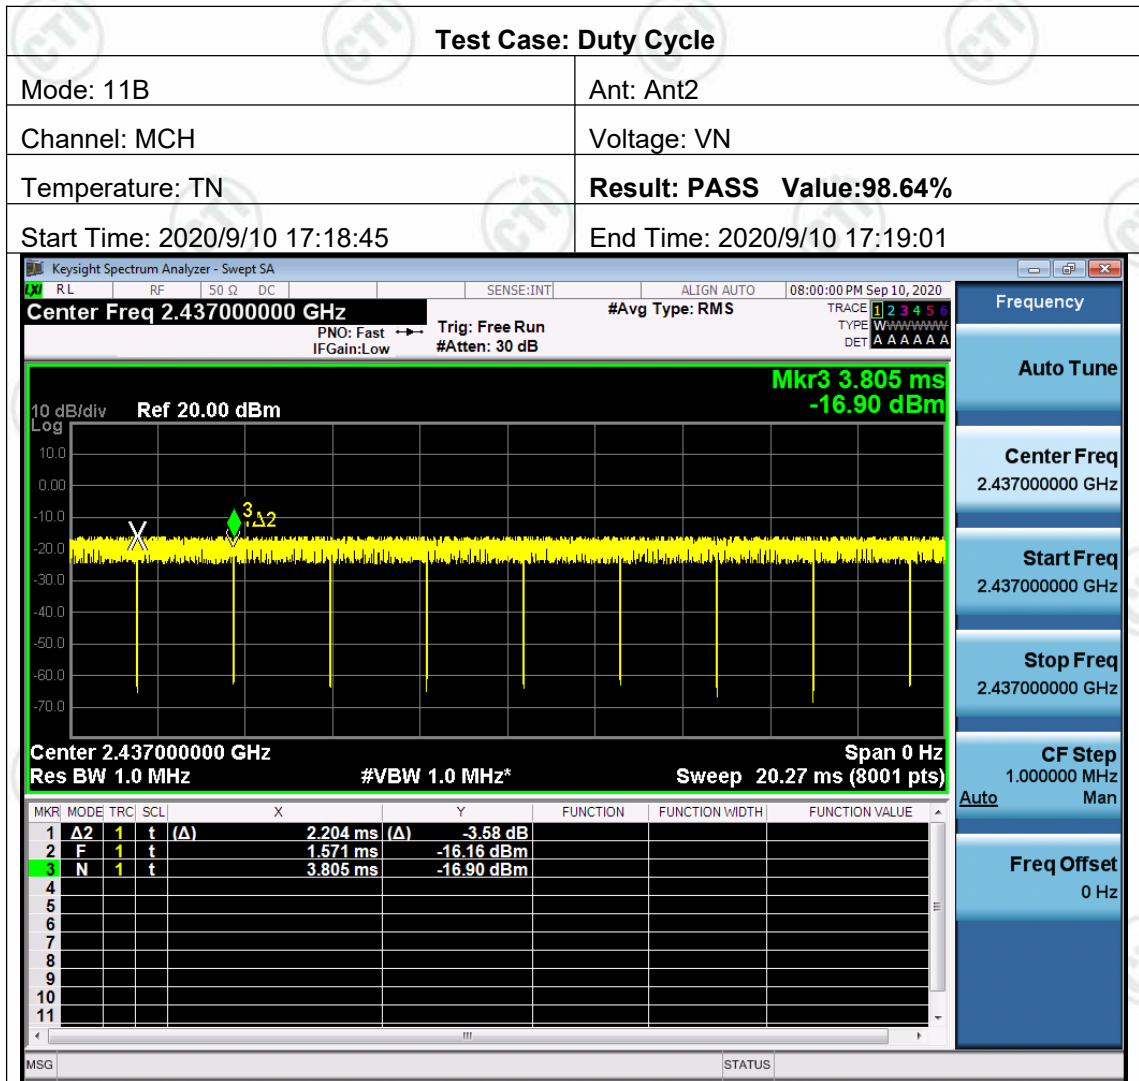


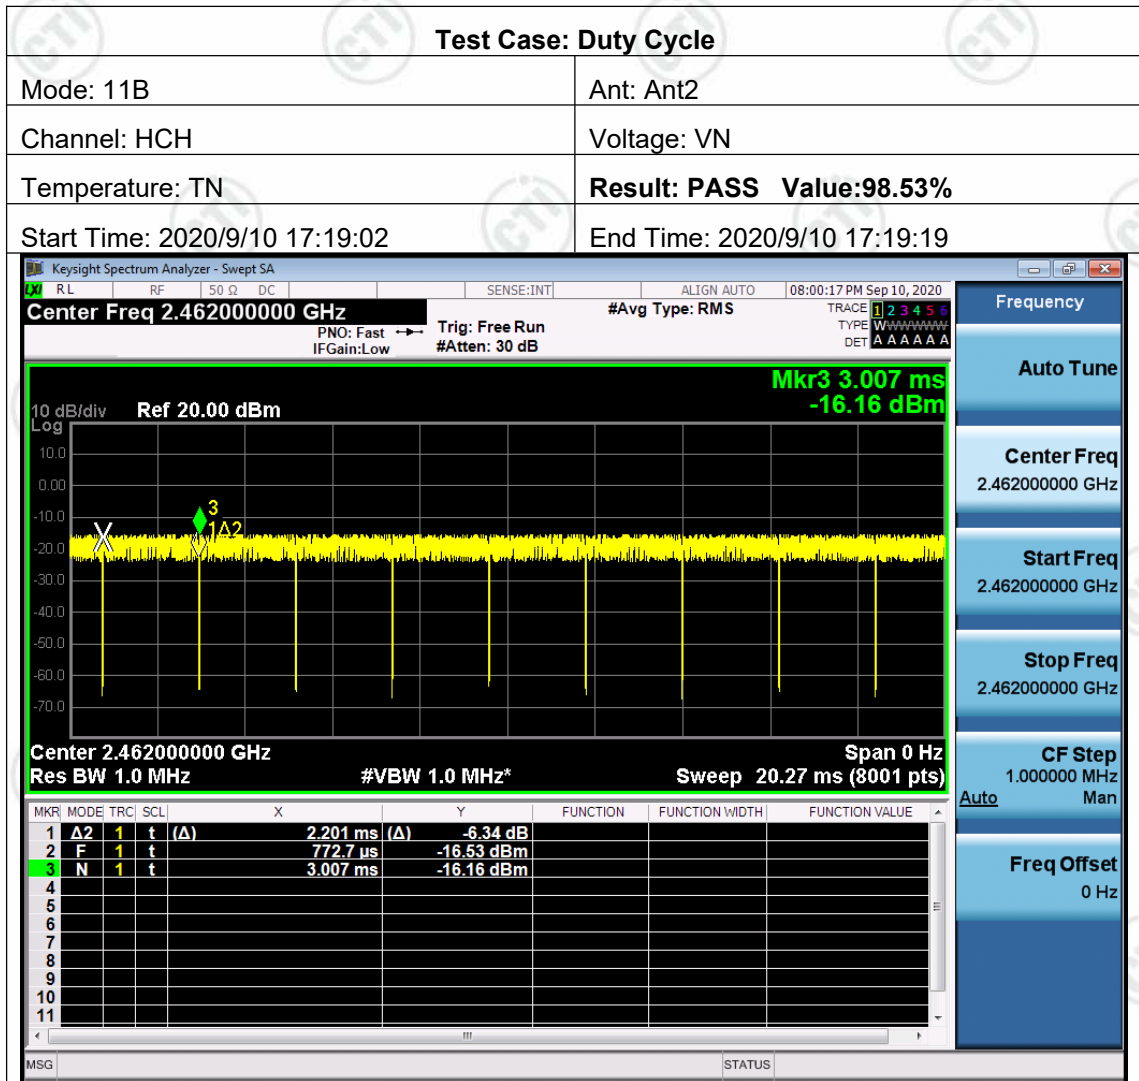


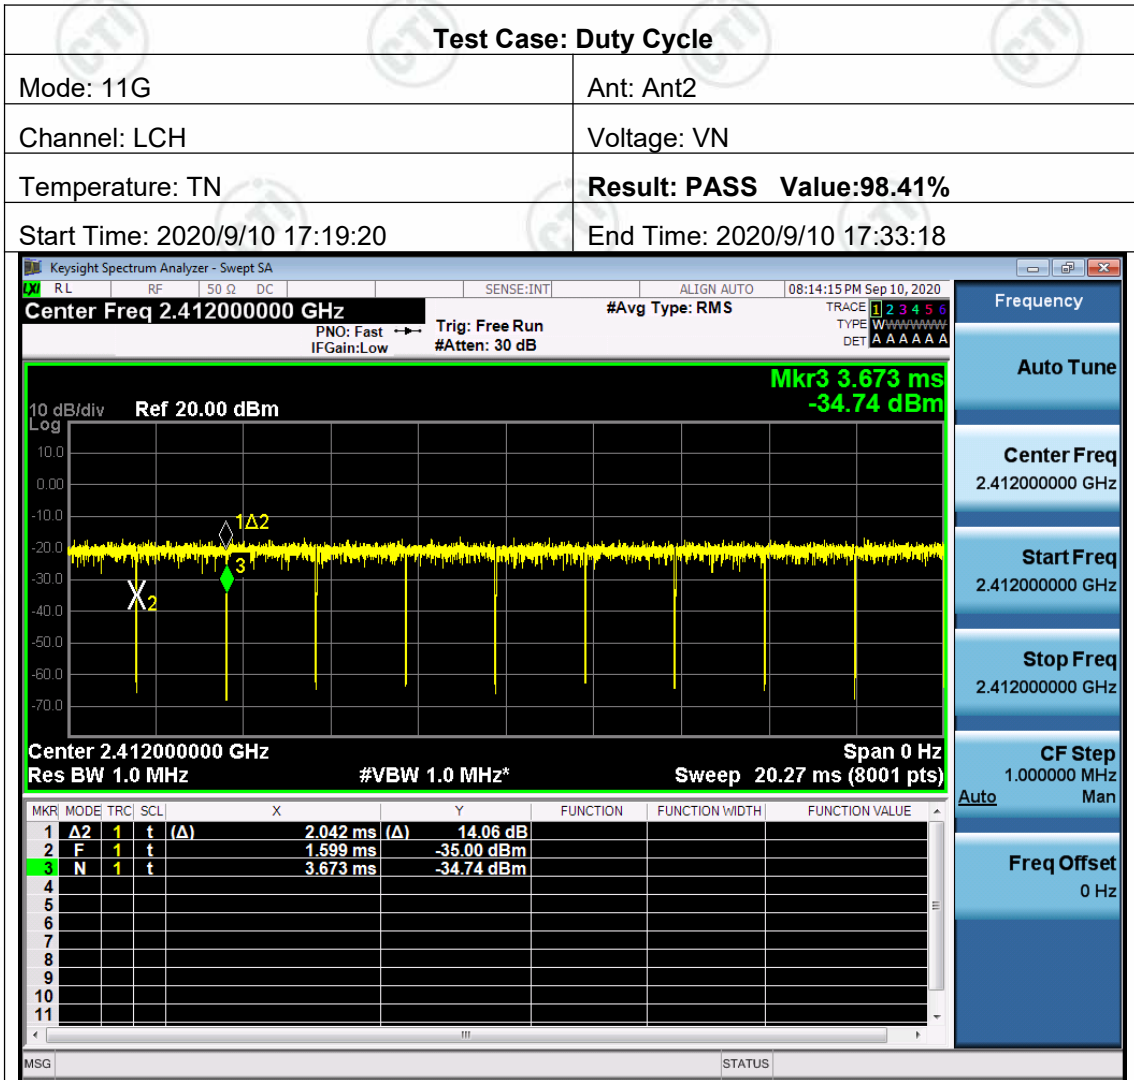


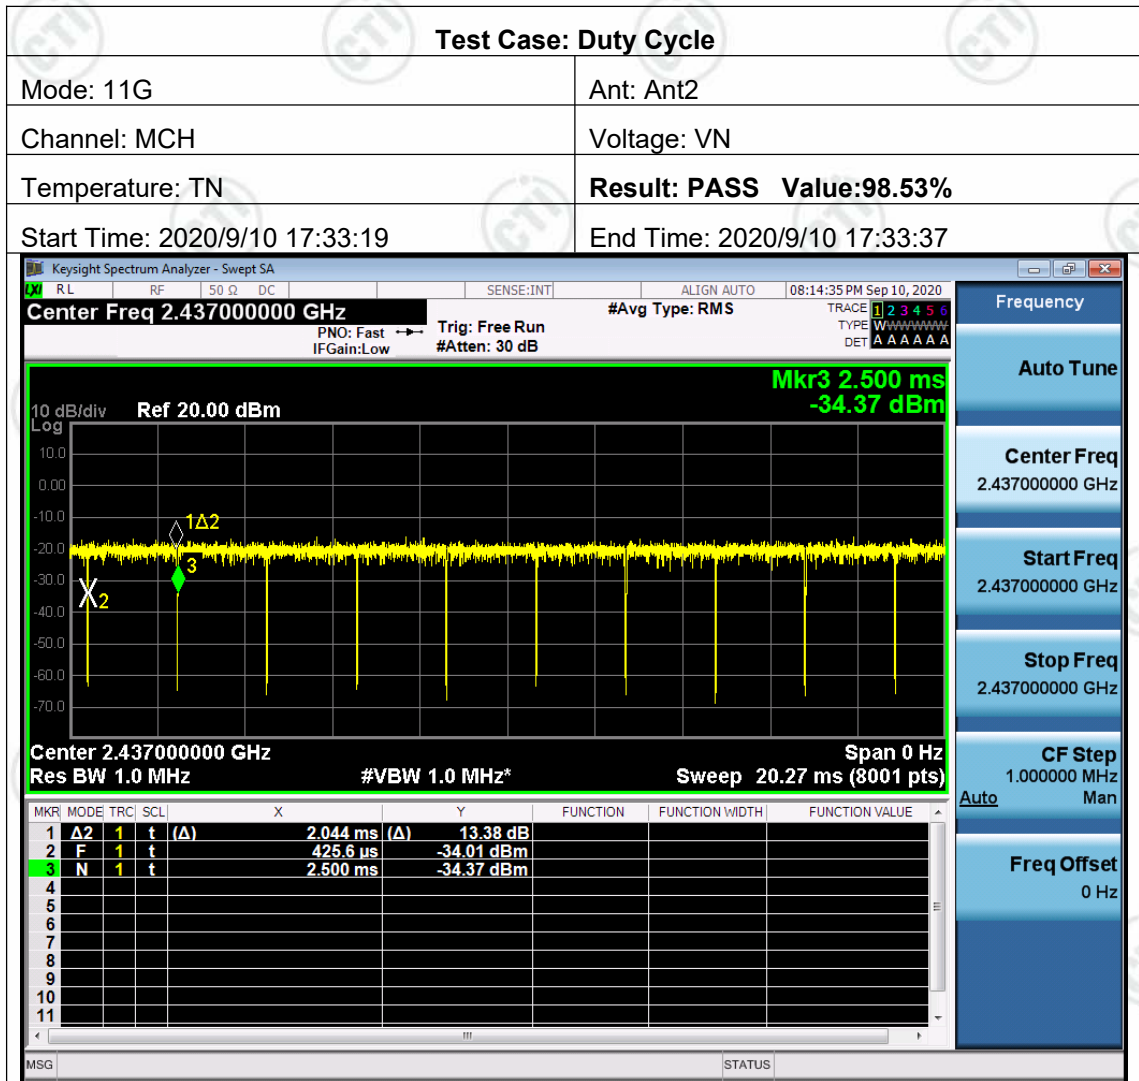


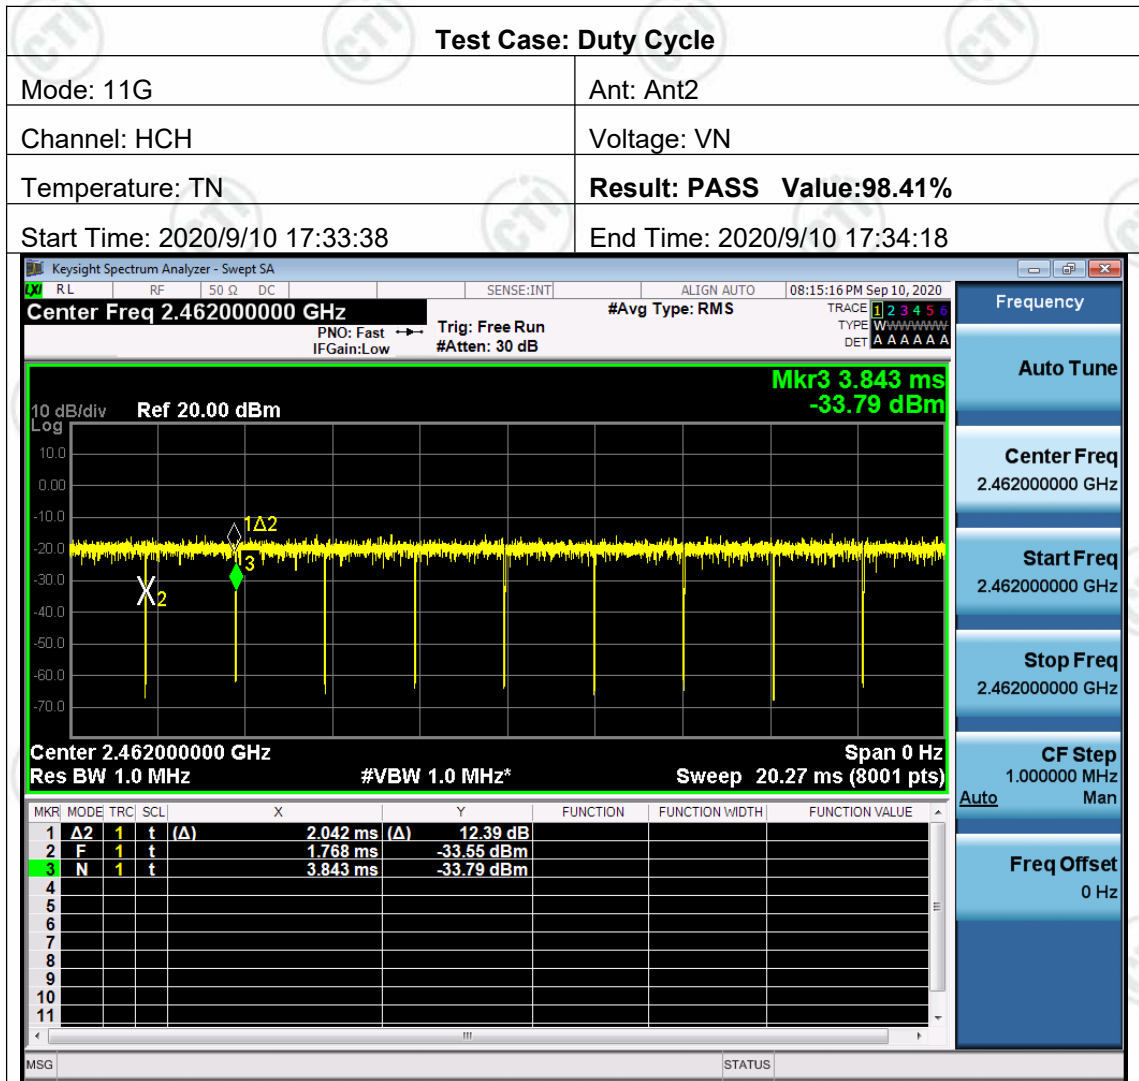


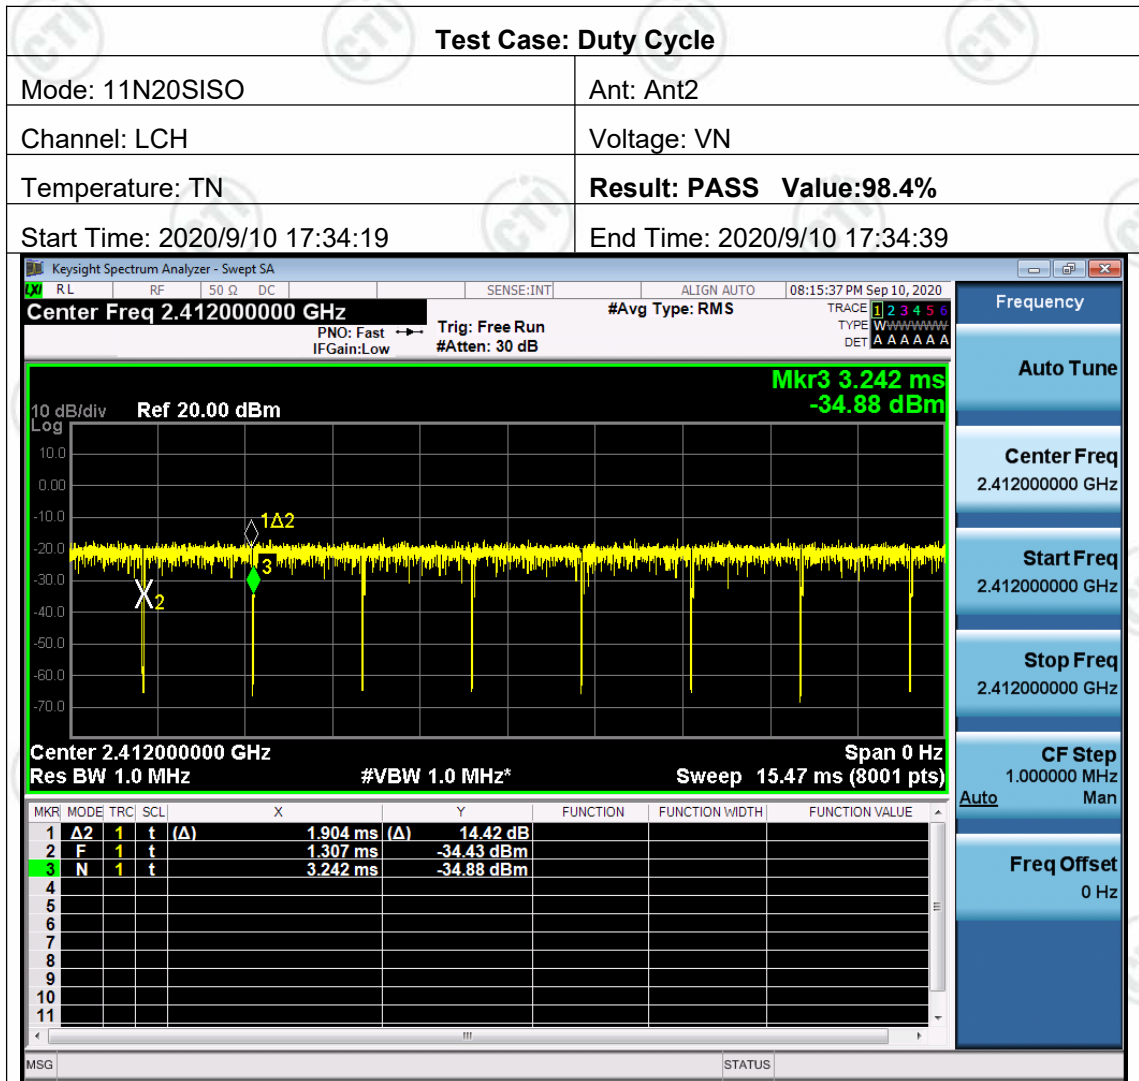


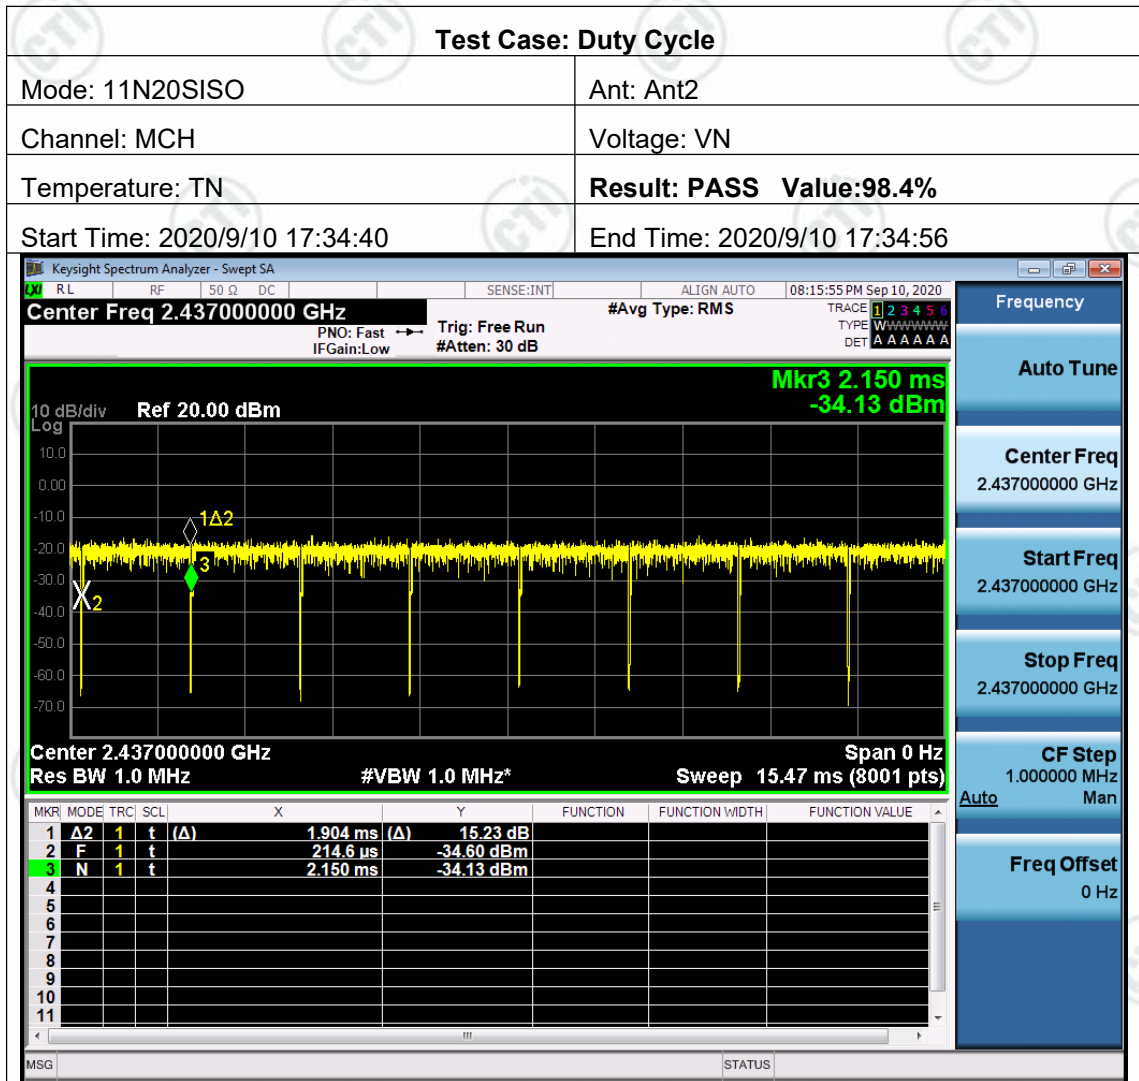

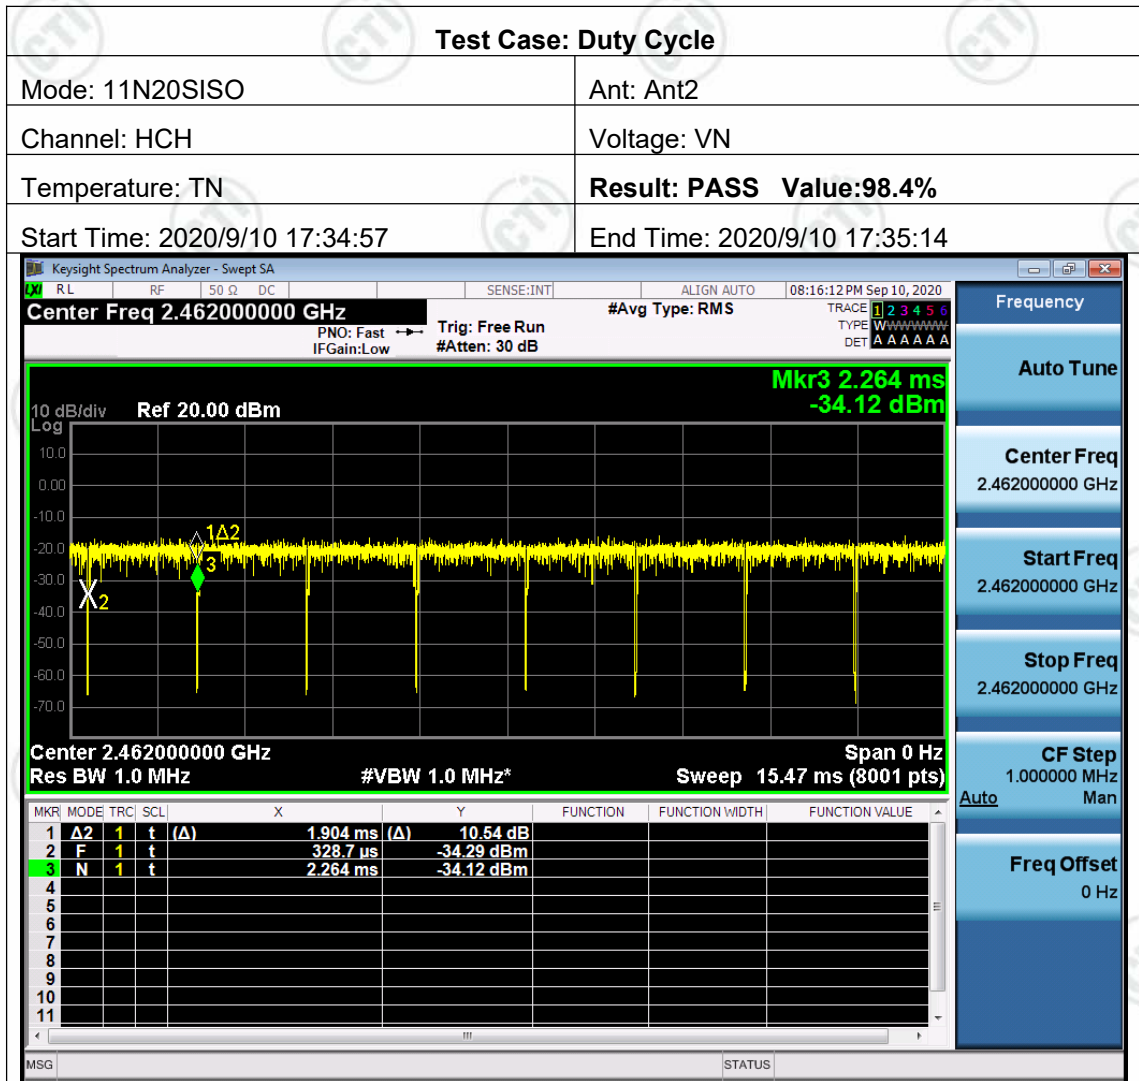

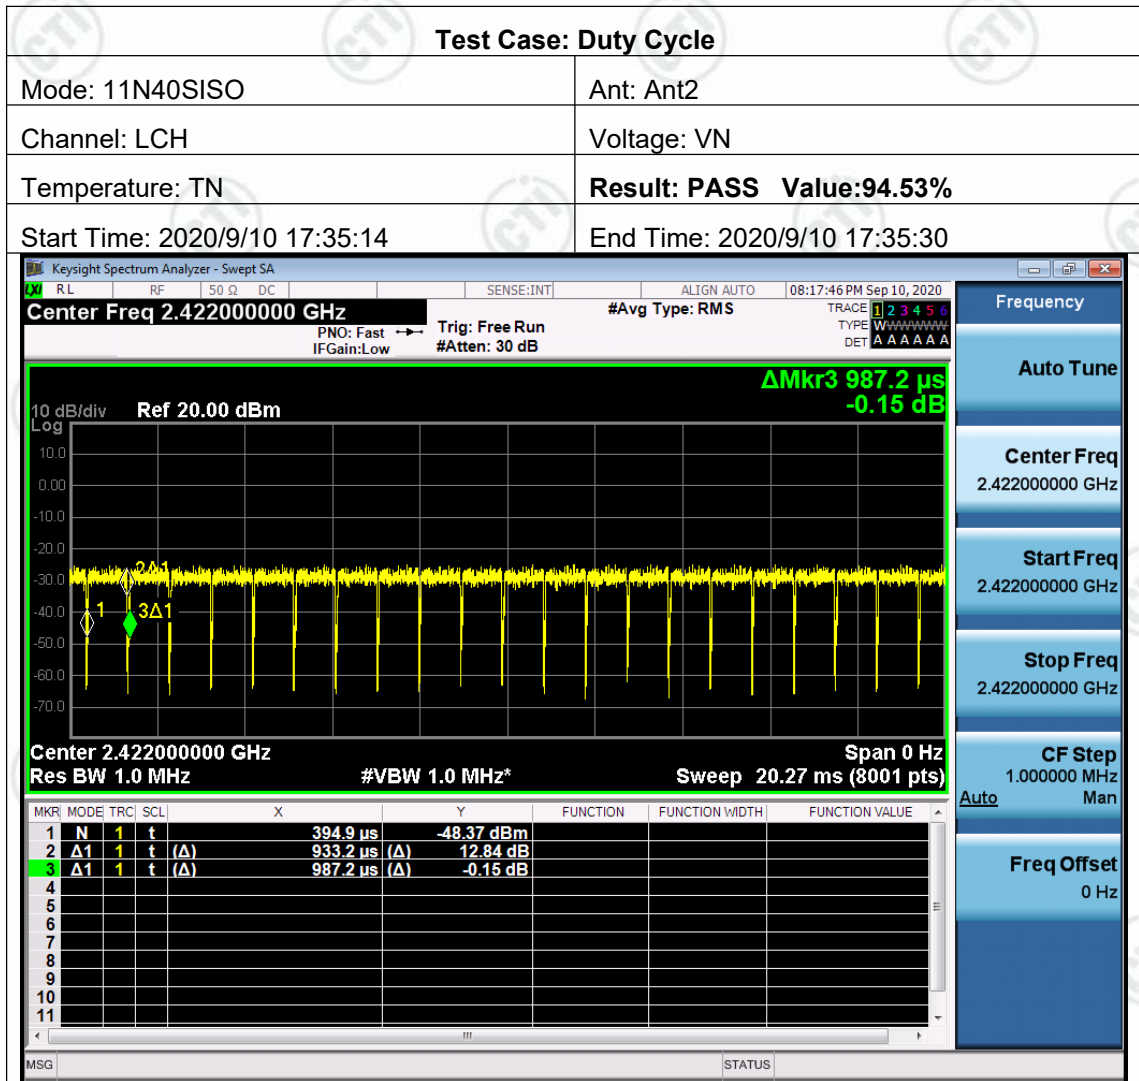

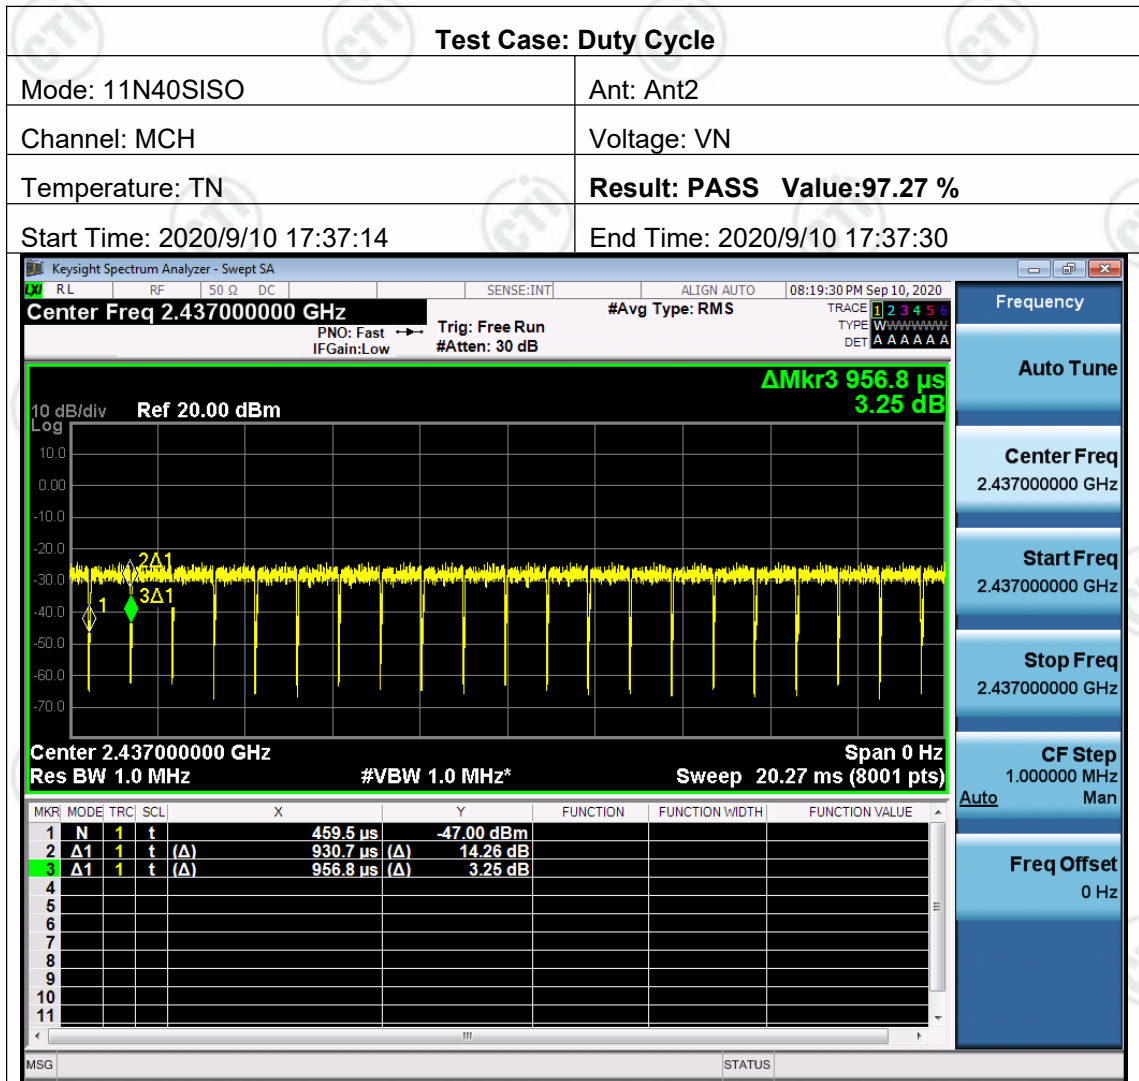

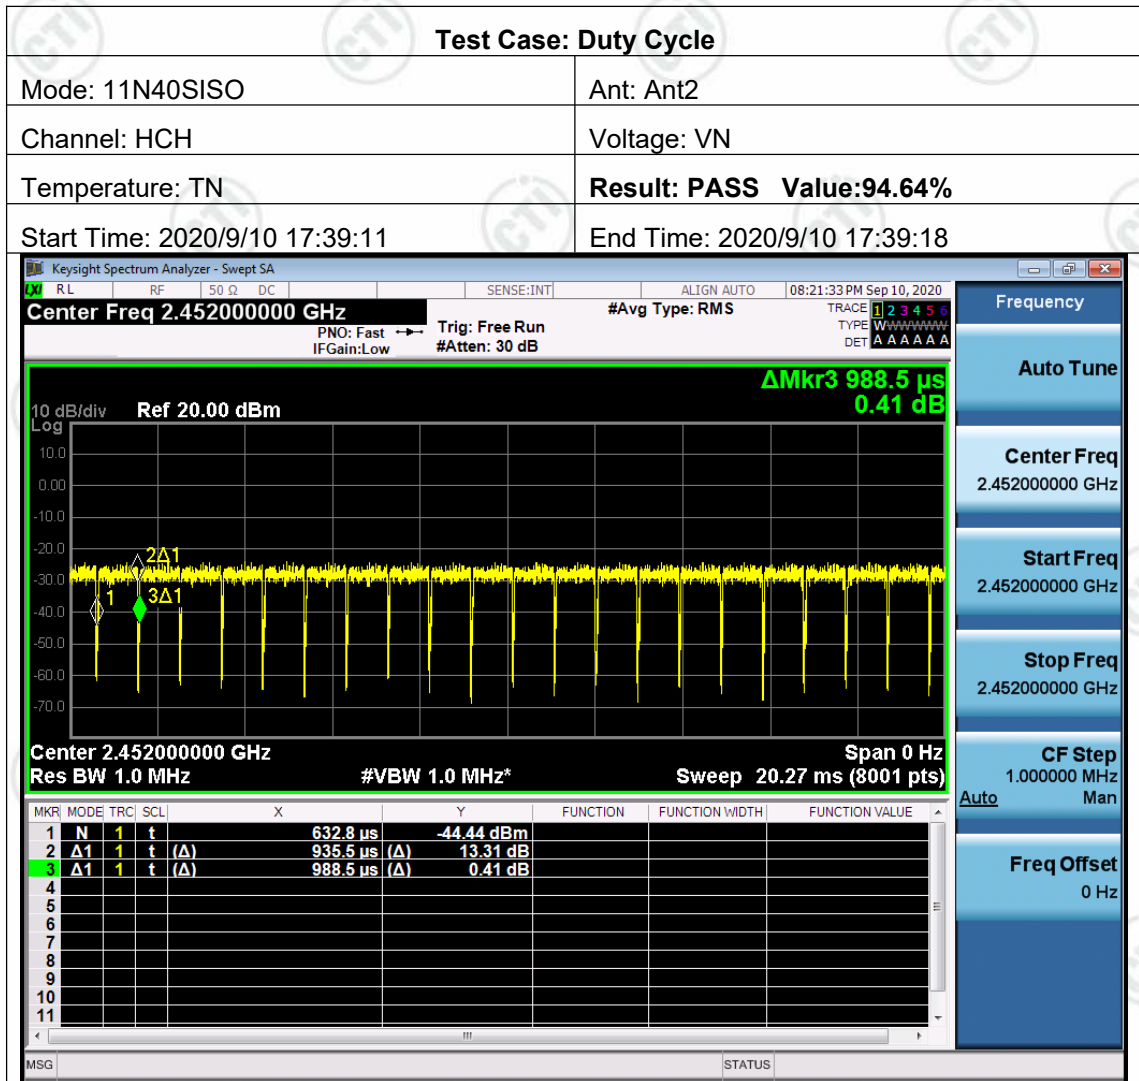



**Appendix A): Conducted Peak Output Power
 Result Table**

Mode	Antenna	Channel	Conducted Peak Output Power [dBm]	Verdict
11B	Ant1	LCH	15.59	PASS
11B	Ant2	LCH	15.51	PASS
11B	Ant1	MCH	15	PASS
11B	Ant2	MCH	15.45	PASS
11B	Ant1	HCH	15.41	PASS
11B	Ant2	HCH	15.48	PASS
11G	Ant1	LCH	14.33	PASS
11G	Ant2	LCH	14.32	PASS
11G	Ant1	MCH	14.39	PASS
11G	Ant2	MCH	14.04	PASS
11G	Ant1	HCH	14.43	PASS
11G	Ant2	HCH	14.24	PASS
11N20SISO	Ant1	LCH	13.73	PASS
11N20SISO	Ant2	LCH	14.2	PASS
11N20SISO	Ant1	MCH	14.25	PASS
11N20SISO	Ant2	MCH	13.95	PASS
11N20SISO	Ant1	HCH	14.38	PASS
11N20SISO	Ant2	HCH	14.62	PASS
11N20MIMO	Ant1	LCH	9.74	PASS
11N20MIMO	Ant2	LCH	11.04	PASS
11N20MIMO	Ant1+2	LCH	13.45	PASS
11N20MIMO	Ant1	MCH	9.77	PASS
11N20MIMO	Ant2	MCH	10.35	PASS
11N20MIMO	Ant1+2	MCH	13.08	PASS
11N20MIMO	Ant1	HCH	9.98	PASS
11N20MIMO	Ant2	HCH	10.11	PASS
11N20MIMO	Ant1+2	HCH	13.06	PASS
11N40SISO	Ant1	LCH	13.44	PASS
11N40SISO	Ant2	LCH	13.39	PASS
11N40SISO	Ant1	MCH	13.41	PASS
11N40SISO	Ant2	MCH	13.94	PASS
11N40SISO	Ant1	HCH	13.5	PASS

11N40SISO	Ant2	HCH	13.08	PASS
11N40MIMO	Ant1	LCH	9.32	PASS
11N40MIMO	Ant2	LCH	10.29	PASS
11N40MIMO	Ant1+2	LCH	12.84	PASS
11N40MIMO	Ant1	MCH	9.77	PASS
11N40MIMO	Ant2	MCH	9.35	PASS
11N40MIMO	Ant1+2	MCH	12.58	PASS
11N40MIMO	Ant1	HCH	10.32	PASS
11N40MIMO	Ant2	HCH	10.48	PASS
11N40MIMO	Ant1+2	HCH	13.41	PASS


Test Graph

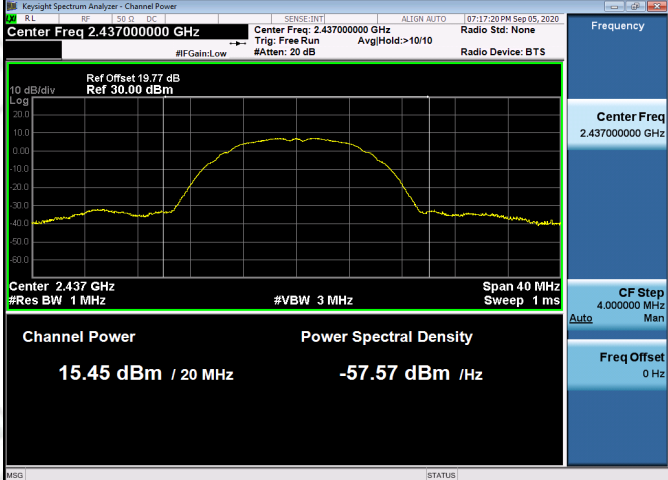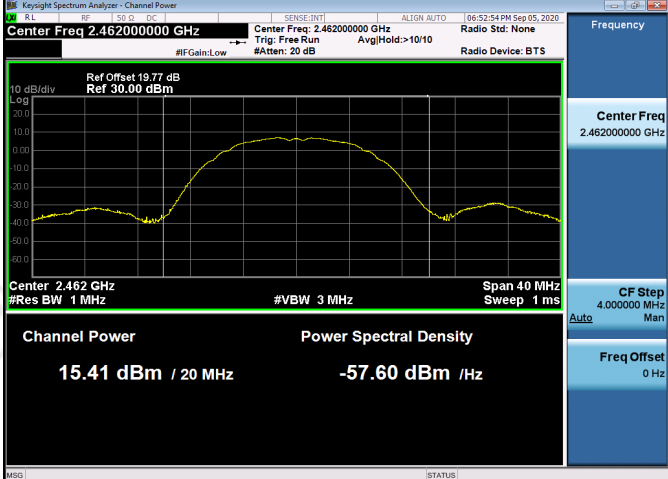

<p>11B/MCH_Ant2</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Channel Power: 15.45 dBm / 20 MHz</p> <p>Power Spectral Density: -57.57 dBm / Hz</p>
<p>11B/HCH_Ant1</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Channel Power: 15.41 dBm / 20 MHz</p> <p>Power Spectral Density: -57.60 dBm / Hz</p>
<p>11B/HCH_Ant2</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Channel Power: 15.53 dBm / 20 MHz</p> <p>Power Spectral Density: -57.48 dBm / Hz</p>

<p>11G/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref: 20.00 dBm</p> <p>Channel Power: 14.33 dBm / 20 MHz</p> <p>Power Spectral Density: -58.68 dBm / Hz</p>
<p>11G/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref: 20.00 dBm</p> <p>Channel Power: 14.32 dBm / 20 MHz</p> <p>Power Spectral Density: -58.69 dBm / Hz</p>
<p>11G/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 20.00 dBm</p> <p>Channel Power: 14.39 dBm / 20 MHz</p> <p>Power Spectral Density: -58.62 dBm / Hz</p>

<p>11G/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 20.00 dBm</p> <p>Channel Power: 14.04 dBm / 20 MHz</p> <p>Power Spectral Density: -58.97 dBm / Hz</p>
<p>11G/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 20.00 dBm</p> <p>Channel Power: 14.43 dBm / 20 MHz</p> <p>Power Spectral Density: -58.58 dBm / Hz</p>
<p>11G/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 20.00 dBm</p> <p>Channel Power: 14.24 dBm / 20 MHz</p> <p>Power Spectral Density: -58.77 dBm / Hz</p>
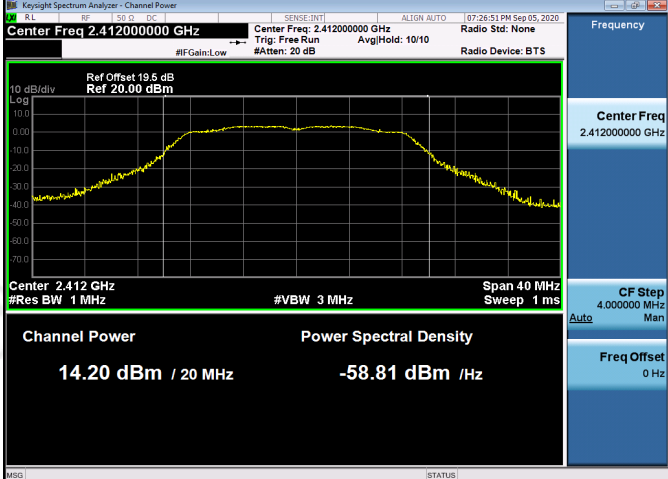
<p>11N20SISO/LCH_Ant1</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset: 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 13.73 dBm / 20 MHz</p> <p>Power Spectral Density: -59.28 dBm / Hz</p>
<p>11N20SISO/LCH_Ant2</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset: 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 14.20 dBm / 20 MHz</p> <p>Power Spectral Density: -58.81 dBm / Hz</p>
<p>11N20SISO/MCH_Ant1</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 14.25 dBm / 20 MHz</p> <p>Power Spectral Density: -58.76 dBm / Hz</p>




<p>11N20SISO/MCH_Ant2</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 13.95 dBm / 20 MHz</p> <p>Power Spectral Density: -59.06 dBm / Hz</p>
<p>11N20SISO/HCH_Ant1</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 14.38 dBm / 20 MHz</p> <p>Power Spectral Density: -58.63 dBm / Hz</p>
<p>11N20SISO/HCH_Ant2</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.462 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 14.62 dBm / 20 MHz</p> <p>Power Spectral Density: -58.39 dBm / Hz</p>

<p>11N20MIMO/LCH_Ant1</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 9.74 dBm / 20 MHz</p> <p>Power Spectral Density: -63.27 dBm / Hz</p>
<p>11N20MIMO/LCH_Ant2</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 20.00 dBm</p> <p>Center 2.412 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 11.04 dBm / 20 MHz</p> <p>Power Spectral Density: -61.97 dBm / Hz</p>
<p>11N20MIMO/MCH_Ant1</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz</p> <p>#VBW 3 MHz</p> <p>Span 40 MHz Sweep 1 ms</p> <p>Channel Power: 9.77 dBm / 20 MHz</p> <p>Power Spectral Density: -63.24 dBm / Hz</p>

<p>11N20MIMO/MCH_Ant2</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 10.35 dBm / 20 MHz</p> <p>Power Spectral Density: -62.66 dBm / Hz</p>
<p>11N20MIMO/HCH_Ant1</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 9.98 dBm / 20 MHz</p> <p>Power Spectral Density: -63.03 dBm / Hz</p>
<p>11N20MIMO/HCH_Ant2</p>	<p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 10.11 dBm / 20 MHz</p> <p>Power Spectral Density: -62.90 dBm / Hz</p>

<p>11N40SISO/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 13.44 dBm / 40 MHz</p> <p>Power Spectral Density: -62.58 dBm / Hz</p>
<p>11N40SISO/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.422000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 13.39 dBm / 40 MHz</p> <p>Power Spectral Density: -62.63 dBm / Hz</p>
<p>11N40SISO/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 13.41 dBm / 40 MHz</p> <p>Power Spectral Density: -62.61 dBm / Hz</p>

<p>11N40SISO/MCH_Ant2</p>	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.77 dBm</p> <p>Center 2.437 GHz #Res BW 1 MHz</p> <p>Channel Power: 13.94 dBm / 40 MHz</p> <p>Power Spectral Density: -62.08 dBm / Hz</p>
<p>11N40SISO/HCH_Ant1</p>	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 1 MHz</p> <p>Channel Power: 13.50 dBm / 40 MHz</p> <p>Power Spectral Density: -62.52 dBm / Hz</p>
<p>11N40SISO/HCH_Ant2</p>	 <p>Keyight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Center 2.452 GHz #Res BW 1 MHz</p> <p>Channel Power: 13.08 dBm / 40 MHz</p> <p>Power Spectral Density: -62.94 dBm / Hz</p>
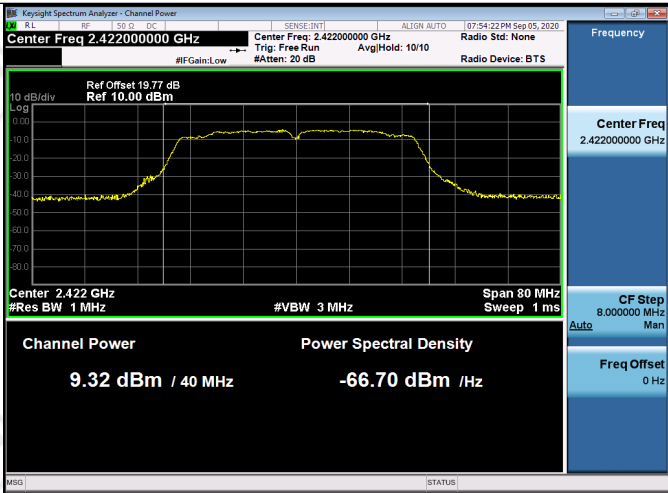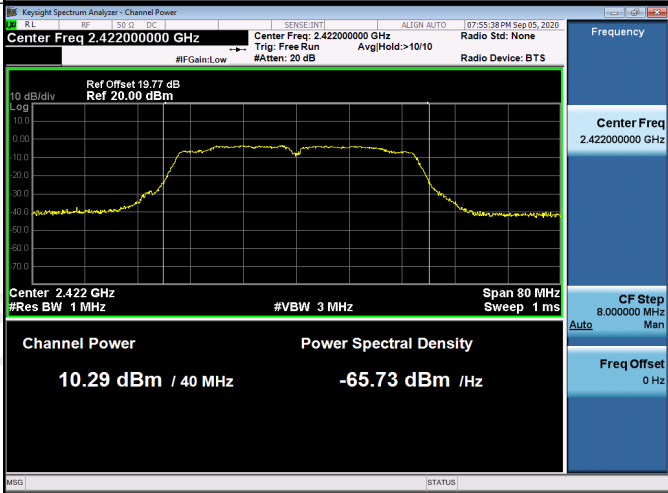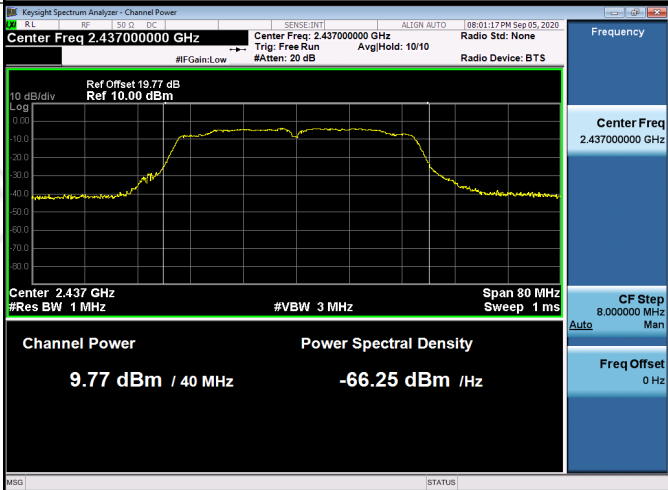
<p>11N40MIMO/LCH_Ant1</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 10.00 dBm</p> <p>Channel Power: 9.32 dBm / 40 MHz</p> <p>Power Spectral Density: -66.70 dBm / Hz</p>
<p>11N40MIMO/LCH_Ant2</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.42200000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 20.00 dBm</p> <p>Channel Power: 10.29 dBm / 40 MHz</p> <p>Power Spectral Density: -65.73 dBm / Hz</p>
<p>11N40MIMO/MCH_Ant1</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq: 2.43700000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 10.00 dBm</p> <p>Channel Power: 9.77 dBm / 40 MHz</p> <p>Power Spectral Density: -66.25 dBm / Hz</p>

<p>11N40MIMO/MCH_Ant2</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 10.00 dBm</p> <p>Channel Power: 9.35 dBm / 40 MHz</p> <p>Power Spectral Density: -66.67 dBm / Hz</p>
<p>11N40MIMO/HCH_Ant1</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 10.32 dBm / 40 MHz</p> <p>Power Spectral Density: -65.70 dBm / Hz</p>
<p>11N40MIMO/HCH_Ant2</p>	 <p>Keysight Spectrum Analyzer - Channel Power</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 20.00 dBm</p> <p>Channel Power: 10.48 dBm / 40 MHz</p> <p>Power Spectral Density: -65.54 dBm / Hz</p>


Appendix B): 6dB Occupied Bandwidth

Result Table

Mode	Antenna	Channel	6dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
11B	Ant1	LCH	9.541	12.918	PASS
11B	Ant2	LCH	9.112	12.630	PASS
11B	Ant1	MCH	9.567	13.080	PASS
11B	Ant2	MCH	9.117	12.603	PASS
11B	Ant1	HCH	9.129	12.911	PASS
11B	Ant2	HCH	9.132	12.662	PASS
11G	Ant1	LCH	15.13	16.722	PASS
11G	Ant2	LCH	15.12	16.624	PASS
11G	Ant1	MCH	15.12	16.759	PASS
11G	Ant2	MCH	14.21	16.647	PASS
11G	Ant1	HCH	15.06	16.772	PASS
11G	Ant2	HCH	15.06	16.640	PASS
11N20SISO	Ant1	LCH	14.98	17.832	PASS
11N20SISO	Ant2	LCH	15.13	17.771	PASS
11N20SISO	Ant1	MCH	15.12	17.926	PASS
11N20SISO	Ant2	MCH	15.12	17.772	PASS
11N20SISO	Ant1	HCH	15.06	17.909	PASS
11N20SISO	Ant2	HCH	13.88	17.809	PASS
11N40SISO	Ant1	LCH	35.11	36.200	PASS
11N40SISO	Ant2	LCH	35.12	36.182	PASS
11N40SISO	Ant1	MCH	35.09	36.220	PASS
11N40SISO	Ant2	MCH	35.12	36.139	PASS
11N40SISO	Ant1	HCH	35.07	36.204	PASS
11N40SISO	Ant2	HCH	35.09	36.117	PASS

Test Graph

6dB Bandwidth

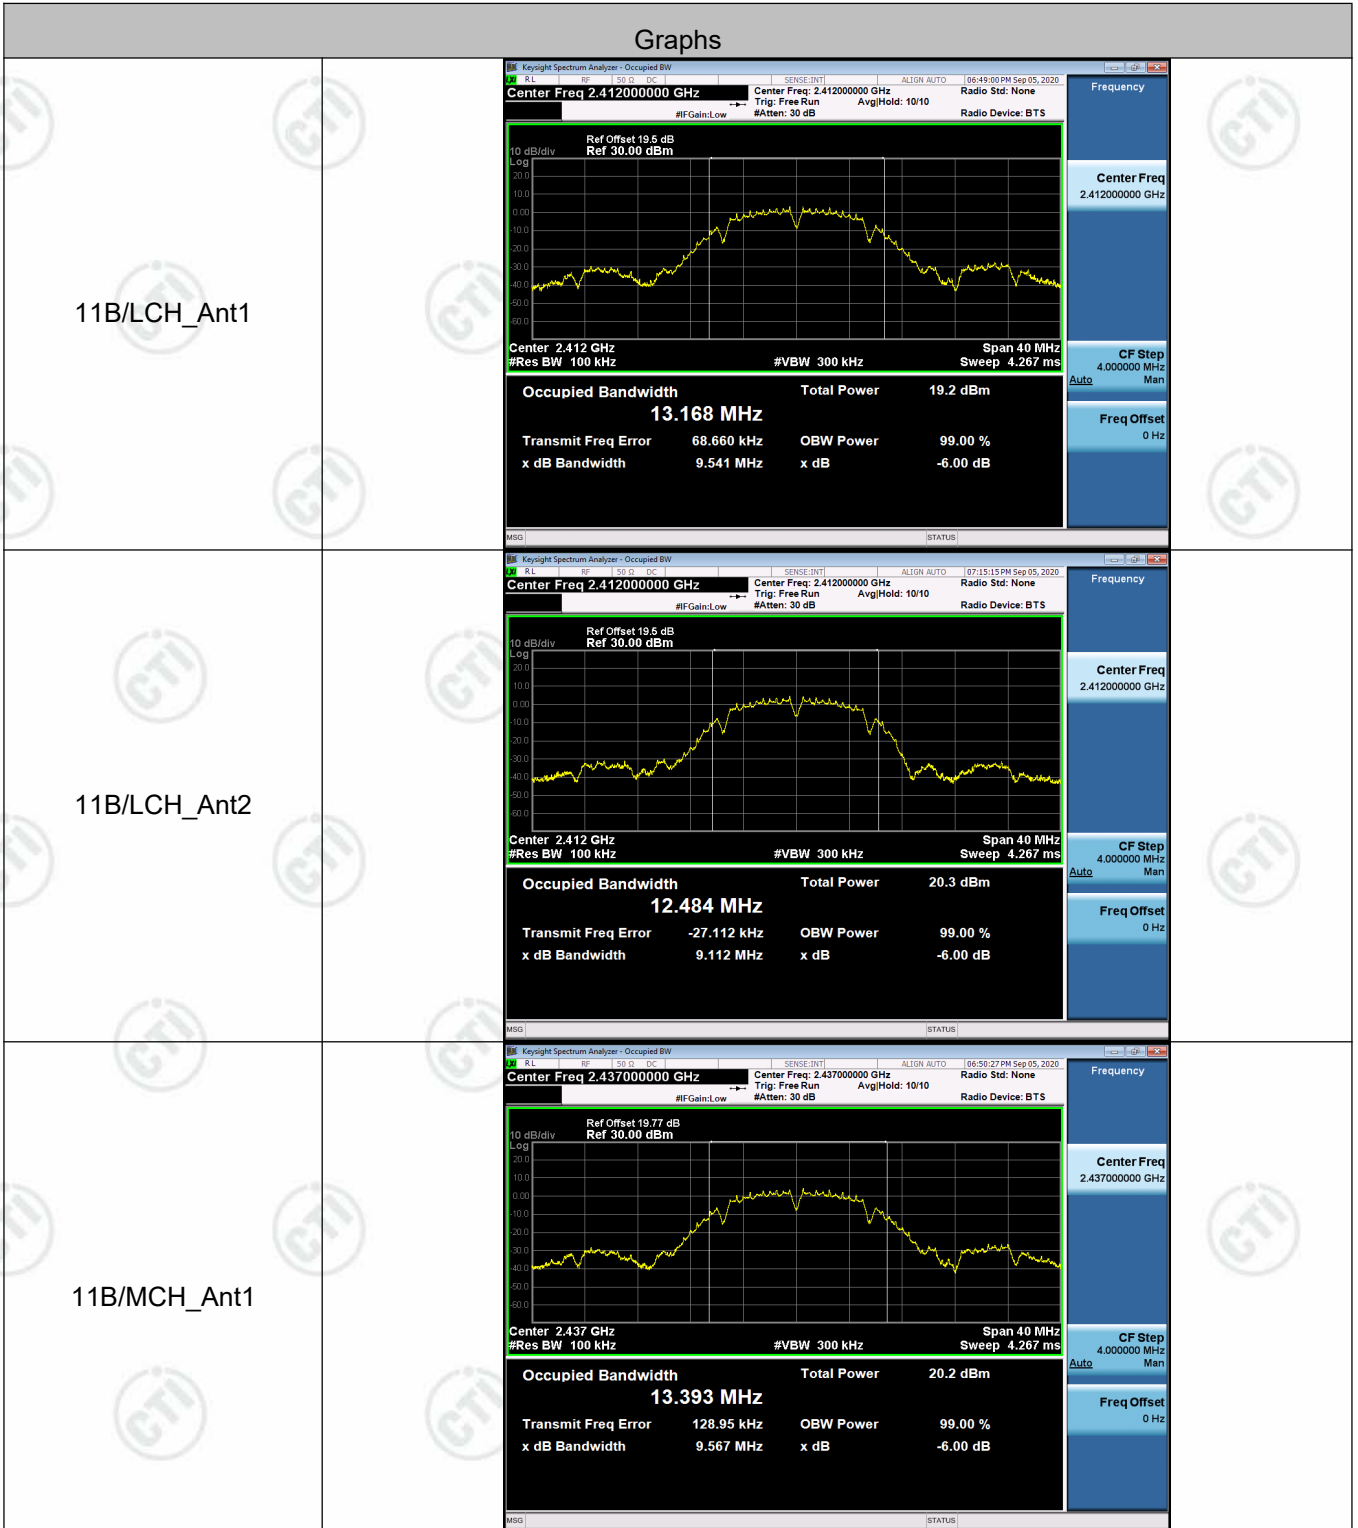

<p>11B/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.437000000 GHz #FGain: Low #Atten: 30 dB Avg/Hold: 10/10 Ref Offset: 19.77 dB Ref 30.00 dBm Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 12.510 MHz Total Power 18.6 dBm Transmit Freq Error 15.127 kHz OBW Power 99.00 % x dB Bandwidth 9.117 MHz x dB -6.00 dB</p>
<p>11B/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz #FGain: Low #Atten: 30 dB Avg/Hold: 10/10 Ref Offset: 19.77 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 12.819 MHz Total Power 18.9 dBm Transmit Freq Error 13.716 kHz OBW Power 99.00 % x dB Bandwidth 9.129 MHz x dB -6.00 dB</p>
<p>11B/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW Center Freq: 2.462000000 GHz #FGain: Low #Atten: 30 dB Avg/Hold: 10/10 Ref Offset: 19.77 dB Ref 30.00 dBm Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 40 MHz Sweep 4.267 ms Occupied Bandwidth 12.577 MHz Total Power 19.2 dBm Transmit Freq Error -989 Hz OBW Power 99.00 % x dB Bandwidth 9.132 MHz x dB -6.00 dB</p>

<p>11G/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.409 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error 17.698 kHz</p> <p>x dB Bandwidth 15.13 MHz</p>
<p>11G/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.373 MHz</p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error -17.437 kHz</p> <p>x dB Bandwidth 15.12 MHz</p>
<p>11G/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 16.444 MHz</p> <p>Total Power 13.1 dBm</p> <p>Transmit Freq Error 16.662 kHz</p> <p>x dB Bandwidth 15.12 MHz</p>

<p>11G/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 16.404 MHz</p> <p>Total Power: 12.6 dBm</p> <p>Transmit Freq Error: -2.896 kHz</p> <p>x dB Bandwidth: 14.21 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>11G/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 16.439 MHz</p> <p>Total Power: 13.1 dBm</p> <p>Transmit Freq Error: -7.023 kHz</p> <p>x dB Bandwidth: 15.06 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>11G/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth: 16.368 MHz</p> <p>Total Power: 13.4 dBm</p> <p>Transmit Freq Error: -6.913 kHz</p> <p>x dB Bandwidth: 15.06 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>


<p>11N20SISO/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 17.613 MHz</p> <p>Total Power 12.5 dBm</p> <p>Transmit Freq Error 14.388 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 14.98 MHz</p> <p>x dB -6.00 dB</p>
<p>11N20SISO/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 17.568 MHz</p> <p>Total Power 12.9 dBm</p> <p>Transmit Freq Error -13.675 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.13 MHz</p> <p>x dB -6.00 dB</p>
<p>11N20SISO/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 17.632 MHz</p> <p>Total Power 13.0 dBm</p> <p>Transmit Freq Error 10.225 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 15.12 MHz</p> <p>x dB -6.00 dB</p>

<p>11N20SISO/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 17.580 MHz</p> <p>Total Power 12.6 dBm</p> <p>Transmit Freq Error -379 Hz</p> <p>x dB Bandwidth 15.12 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11N20SISO/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 17.626 MHz</p> <p>Total Power 13.1 dBm</p> <p>Transmit Freq Error -16.534 kHz</p> <p>x dB Bandwidth 15.06 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11N20SISO/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 17.598 MHz</p> <p>Total Power 13.3 dBm</p> <p>Transmit Freq Error -6.748 kHz</p> <p>x dB Bandwidth 13.88 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

<p>11N40SISO/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 19.77 dB, Ref: 30.00 dBm</p> <p>Center 2.422 GHz, #Res BW 100 kHz, #VBW 300 kHz, Span 80 MHz, Sweep 8 ms</p> <p>Occupied Bandwidth: 36.012 MHz</p> <p>Total Power: 12.0 dBm</p> <p>Transmit Freq Error: 65.828 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 35.11 MHz, x dB: -6.00 dB</p>
<p>11N40SISO/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 19.77 dB, Ref: 30.00 dBm</p> <p>Center 2.422 GHz, #Res BW 100 kHz, #VBW 300 kHz, Span 80 MHz, Sweep 8 ms</p> <p>Occupied Bandwidth: 36.037 MHz</p> <p>Total Power: 11.9 dBm</p> <p>Transmit Freq Error: -10.787 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 35.12 MHz, x dB: -6.00 dB</p>
<p>11N40SISO/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB, Ref: 30.00 dBm</p> <p>Center 2.437 GHz, #Res BW 100 kHz, #VBW 300 kHz, Span 80 MHz, Sweep 8 ms</p> <p>Occupied Bandwidth: 36.016 MHz</p> <p>Total Power: 12.0 dBm</p> <p>Transmit Freq Error: 58.954 kHz</p> <p>OBW Power: 99.00 %</p> <p>x dB Bandwidth: 35.09 MHz, x dB: -6.00 dB</p>

<p>11N40SISO/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.990 MHz</p> <p>Total Power 11.6 dBm</p> <p>Transmit Freq Error 13.648 kHz</p> <p>x dB Bandwidth 35.12 MHz</p>
<p>11N40SISO/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 36.001 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error 23.567 kHz</p> <p>x dB Bandwidth 35.07 MHz</p>
<p>11N40SISO/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.452000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>Occupied Bandwidth 35.971 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error 20.519 kHz</p> <p>x dB Bandwidth 35.09 MHz</p>

99% OBW

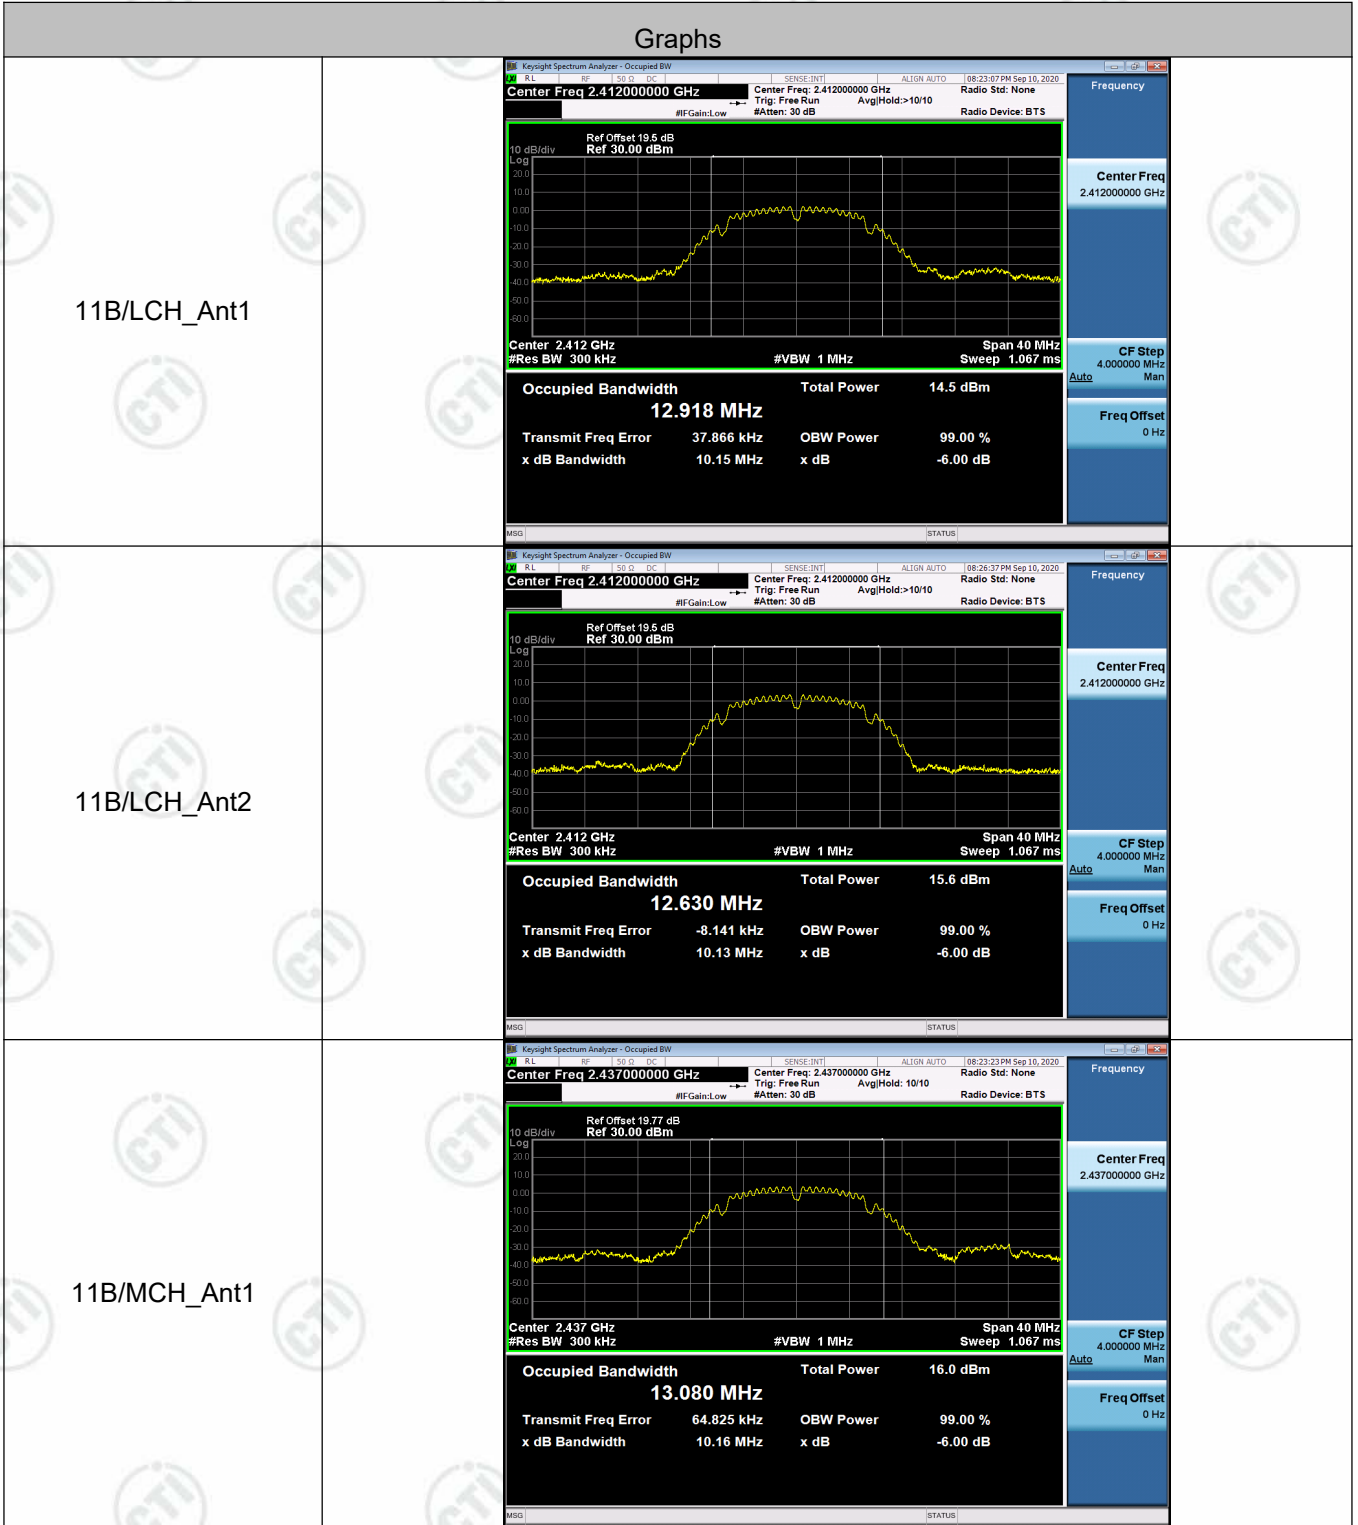

<p>11B/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth: 12.603 MHz</p> <p>Total Power: 16.3 dBm</p> <p>Transmit Freq Error: 38.847 kHz x dB Bandwidth: 10.12 MHz</p> <p>OBW Power: 99.00 % x dB: -6.00 dB</p>
<p>11B/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth: 12.911 MHz</p> <p>Total Power: 15.6 dBm</p> <p>Transmit Freq Error: 31.002 kHz x dB Bandwidth: 10.15 MHz</p> <p>OBW Power: 99.00 % x dB: -6.00 dB</p>
<p>11B/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth: 12.662 MHz</p> <p>Total Power: 16.8 dBm</p> <p>Transmit Freq Error: 17.361 kHz x dB Bandwidth: 10.12 MHz</p> <p>OBW Power: 99.00 % x dB: -6.00 dB</p>

<p>11G/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 19.6 dB Ref: 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth: 16.722 MHz</p> <p>Total Power: 12.5 dBm</p> <p>Transmit Freq Error: 62.952 kHz</p> <p>x dB Bandwidth: 16.08 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>11G/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 19.6 dB Ref: 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth: 16.624 MHz</p> <p>Total Power: 13.0 dBm</p> <p>Transmit Freq Error: -25.827 kHz</p> <p>x dB Bandwidth: 16.02 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>
<p>11G/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref: 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth: 16.759 MHz</p> <p>Total Power: 13.5 dBm</p> <p>Transmit Freq Error: 58.780 kHz</p> <p>x dB Bandwidth: 16.18 MHz</p> <p>OBW Power: 99.00 %</p> <p>x dB: -6.00 dB</p>

<p>11G/MCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth 16.647 MHz</p> <p>Total Power 13.7 dBm</p> <p>Transmit Freq Error 31.077 kHz</p> <p>x dB Bandwidth 16.12 MHz</p>
<p>11G/HCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth 16.772 MHz</p> <p>Total Power 13.7 dBm</p> <p>Transmit Freq Error -5.486 kHz</p> <p>x dB Bandwidth 16.12 MHz</p>
<p>11G/HCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.462 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth 16.640 MHz</p> <p>Total Power 14.4 dBm</p> <p>Transmit Freq Error -16.603 kHz</p> <p>x dB Bandwidth 16.04 MHz</p>

<p>11N20SISO/LCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth 17.832 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error 61.926 kHz</p> <p>x dB Bandwidth 17.36 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11N20SISO/LCH_Ant2</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset: 19.5 dB Ref 30.00 dBm</p> <p>Center 2.412 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth 17.771 MHz</p> <p>Total Power 12.9 dBm</p> <p>Transmit Freq Error -5.549 kHz</p> <p>x dB Bandwidth 17.22 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>11N20SISO/MCH_Ant1</p>	<p>KeySight Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset: 19.77 dB Ref 30.00 dBm</p> <p>Center 2.437 GHz #Res BW 300 kHz</p> <p>Occupied Bandwidth 17.926 MHz</p> <p>Total Power 14.1 dBm</p> <p>Transmit Freq Error 65.600 kHz</p> <p>x dB Bandwidth 17.40 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>