

# Test Report

FCC ID: 2AHLZ-HI9AIR

Date of issue: July 25, 2018

Report Number:	MTi180724E139
Sample Description:	Tablet PC
Model(s):	Hi9 Air-CWI546
Applicant:	CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED
Address:	2 Floor Building 3 LiJinCheng Industrial park the east of Gongye road LongHua Shenzhen China
Date of Test:	Apr. 25, 2018 to July 25, 2018

Shenzhen Microtest Co., Ltd.  
<http://www.mtitest.com>

## Table of Contents

<b>1</b>	<b>General description</b>	<b>4</b>
1.1	Feature of equipment under test (EUT)	4
1.2	Test frequency channel	5
1.3	EUT operation mode	5
1.4	Test conditions	5
1.5	Testing site	5
1.6	Ancillary equipment list	5
1.7	Measurement uncertainty	6
<b>2</b>	<b>Summary of Test Result</b>	<b>7</b>
<b>3</b>	<b>Test facilities and accreditations</b>	<b>8</b>
3.1	Test laboratory	8
3.2	Environmental conditions	8
3.3	Measurement uncertainty	8
3.4	Test software	8
<b>4</b>	<b>List of test equipment</b>	<b>9</b>
<b>5</b>	<b>Test Result</b>	<b>10</b>
5.1	Maximum output power and peak to average ratio	10
5.2	Peak to average power ratio(PAPR)	19
5.3	Occupied bandwidth	25
5.4	Conducted spurious emissions	32
5.5	Band edge	38
5.6	Radiated spurious emission	44
5.7	Frequency stability	55
	<b>Photographs of the Test Setup</b>	<b>59</b>
	<b>Photographs of the EUT</b>	<b>60</b>

## Test Result Certification

Applicant's name: CHUWI TECHNOLOGY (ShenZhen) CO., LIMITED

Address: 2 Floor Building 3 LiJinCheng Industrial park the east of Gongye road LongHua Shenzhen China

Manufacture's Name: Shenzhen Sunty Technology Co., Ltd.

Address: F7-8, Building 7, ZhongYunTai Industry Park, Songbai Road, Shiyang Street, Bao'an District, Shenzhen, China.

Product name: Tablet PC

Trademark: CHUWI

Model name: Hi9 Air-CWI546

Standards: FCC Part 22 Subpart H  
FCC Part 24 Subpart E  
FCC Part 27

Test Procedure: FCC Part 2  
ANSI/TIA-603-E-2016  
ANSI C63.26:2015  
KDB 971168 D01 Power Meas License Digital Systems v03r01

*This device described above has been tested by Shenzhen Microtest Co., Ltd. and the test results show that the equipment under test (EUT) compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.*

Tested by: Leo Su  
Leo Su                      July 25, 2018

Reviewed by: Blue Zheng  
Blue Zheng                      July 25, 2018

Approved by: Smith Chen  
Smith Chen                      July 25, 2018

## 1 General description

### 1.1 Feature of equipment under test (EUT)

Product name:	Tablet PC
Trade name	CHUWI
Model name:	Hi9 Air-CWI546
Difference in series models:	N/A
Frequency range:	GSM850: TX824.2MHz~848.8MHz /RX869.2MHz~893.8MHz; PCS1900: TX1850.2MHz~1909.8MHz /RX1930.2MHz~1989.8MHz; WCDMA Band II: TX1852.4MHz~1907.6MHz RX1932.4MHz~1987.6MHz; WCDMA Band IV: TX1710-1755 MHz RX2110-2155 MHz WCDMA Band V: TX826.4MHz~846.6MHz RX871.4MHz~891.6MHz;
Modulation type:	GMSK for GSM/GPRS; 8PSK for EGPRS; QPSK for WCDMA bands;
Power class:	Multi-Class12 Only 4 timeslots are used for GPRS
SIM card:	The Tablet PC has Two SIM Card socket
Antenna Type	Integral Antenna
Antenna gain:	GSM 850 Gain: -4dBi GSM 1900 Gain: -2dBi WCDMA Band II:-2dBi WCDMA Band IV:-2dBi WCDMA Band V:-4dBi
Hardware version	X970-97WCB
Software version	V1.0
Power supply:	DC 3.8V from Battery or DC 5V from adapter
Battery:	DC 3.8V 8000mAh
Adapter information:	Model:JHD-AP013U-050200BB-B Input:100-240V~ 50/60Hz 0.35A Output:5V 2A

## 1.2 Test frequency channel

Frequency Band	Frequency	Channel	Frequency(MHz)
GSM 850	Low	128	824.2
	Middle	190	836.6
	High	251	848.8
GSM 1900	Low	512	1850.2
	Middle	661	1880
	High	810	1909.8
WCDMA Band II	Low	9262	1852.4
	Middle	9400	1880
	High	9538	1907.6
WCDMA Band IV	Low	1312	1712.4
	Middle	1450	1740.0
	High	1513	1752.6
WCDMA Band V	Low	4132	826.4
	Middle	4183	836.6
	High	4233	846.6

## 1.3 EUT operation mode

During testing, RF test program provided by the manufacture to control the Tx operation followed the test requirement. The EUT is configured to transmit continuously (duty cycle > 98 %) at the maximum power control level.

## 1.4 Test conditions

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 20°C~30°C
- Humidity: 30%~70%
- Atmospheric pressure: 98kPa~101kPa

## 1.5 Testing site

Test Site	Shenzhen Microtest Co., Ltd.
Test Site Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	448573

## 1.6 Ancillary equipment list

Equipment	Model	S/N	Manufacturer	Certificate type
DC power supply	QJ3020E	015170	QJE	/

## 1.7 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2xUc(y)$

RF frequency	$1 \times 10^{-7}$
RF power, conducted	$\pm 1$ dB
Conducted emission(150kHz~30MHz)	$\pm 2.5$ dB
Radiated emission(30MHz~1GHz)	$\pm 4.2$ dB
Radiated emission (above 1GHz)	$\pm 4.3$ dB
Temperature	$\pm 1$ degree
Humidity	$\pm 5$ %

## 2 Summary of Test Result

Item	FCC Part No.	Description of Test	Result
1	2.1046, 22.913(a); 24.232(c) 27.50(d) (4)	Maximum output power	Pass
2	2.1046, 22.913(a); 24.232(c) 27.50(d)(5)	Peak to average power ratio(PAPR)	Pass
3	2.1046, 22.913(a); 24.232(c) 27.50(d)(4)	Transmitter Radiated Power (EIRP/ERP)	Pass
4	2.1049; 22.917(b); 24.238(b) 27.53(h)	Occupied Bandwidth	Pass
5	2.1051; 22.917(a); 24.238(a) 27.53(h)	Conducted spurious emissions	Pass
6	2.1051; 22.917(b); 24.238(b) 27.53(h)	Spurious emissions at band edge	Pass
7	2.1053; 22.917(a); 24.238(a) 27.53(h)	Radiated spurious emissions	Pass
8	2.1055; 22.355; 24.235 27.54	Frequency Stability	Pass

### 3 Test facilities and accreditations

#### 3.1 Test laboratory

Test Laboratory	Shenzhen Microtest Co., Ltd
Location	No.102A & 302A, East Block, Hengfang Industrial Park, Xingye Road, Xixiang, Bao'an District, Shenzhen, Guangdong, China
FCC Registration No.:	FCC Registration No.: 448573

#### 3.2 Environmental conditions

Temperature:	20°C~30°C
Humidity	30%~70%
Atmospheric pressure	98kPa~101kPa

#### 3.3 Measurement uncertainty

Measurement Uncertainty for a Level of Confidence of 95 %,  $U=2xUc(y)$

RF frequency	$1 \times 10^{-7}$
RF power, conducted	$\pm 1$ dB
Conducted emission(150kHz~30MHz)	$\pm 2.5$ dB
Radiated emission(30MHz~1GHz)	$\pm 4.2$ dB
Radiated emission (above 1GHz)	$\pm 4.3$ dB
Temperature	$\pm 1$ degree
Humidity	$\pm 5$ %

#### 3.4 Test software

Software Name	Manufacturer	Model	Version
RF Test System	Farad	LZ-RF	Lz_Rf 3A3



#### 4 List of test equipment

Equipment No.	Equipment Name	Manufacturer	Model	Serial No.	Calibration date	Due date
MTI-E001	Spectrum Analyzer	Agilent	E4407B	MY41441082	2017/09/18	2018/09/17
MTI-E002	CMU 200 universal radio communication tester	Rohde&schwarz	CMU 200	114587	2017/09/18	2018/09/17
MTI-E004	EMI Test Receiver	Rohde&schwarz	ESPI	1000314	2017/09/18	2018/09/17
MTI-E006	Broadband antenna	schwarabeck	VULB9163	872	2017/09/18	2018/09/17
MTI-E007	Horn antenna	schwarabeck	BBHA9120D	1201	2017/09/18	2018/09/17
MTI-E014	amplifier	America	8447D	3113A06150	2017/09/18	2018/09/17
MTI-E015	Conduction Immunity Signal Generator	Schloder	CDG6000	126A1343/2015	2017/09/18	2018/09/17
MTI-E016	Coupled decoupling network	Schloder	CDA M2/M3	A2210332/2015	2017/09/18	2018/09/17
MTI-E032	Comprehensive test instrument	Rohde&schwarz	CMW500	124192	2017/09/13	2018/09/12
MTI-E034	amplifier	Agilent	8449B	3008A02400	2017/08/22	2018/08/21
MTI-E040	Spectrum analyzer	Agilent	N9020A	MY49100060	2017/09/05	2018/09/04
MTI-E041	Signal generator	Agilent	N5182A	MY49060455	2017/09/23	2018/09/22
MTI-E042	Analog signal generator	Agilent	E4421B	GB40051240	2017/09/23	2018/09/22
MTI-E043	Power probe	Dare Instruments	RPR3006W	16I00054SN016	2017/09/29	2018/09/28
MTI-E047	10dB attenuator	Mini-Circuits	UNAT-10+	15542	2017/09/24	2018/09/23
MTI-E049	spectrum analyzer	Rohde&schwarz	FSP-38	100019	2017/09/18	2018/09/17
MTI-E050	PSG Signal generator	Agilent	E8257D	MY46520873	2017/09/24	2018/09/23
MTI-E051	Active Loop Antenna 9kHz - 30MHz	Schwarzbeek	FMZB 1519 B	00044	2017/09/26	2018/09/25
MTI-E052	18-40GHz amplifier	Chengdu step Micro Technology	ZLNA-18-40G-21	1608001	2017/09/18	2018/09/17
MTI-E053	15-40G Antenna	Schwarzbeek	BBHA9170	BBHA9170582	2017/09/18	2018/09/17
MTI-B046	DC power supply	QJE	QJ3020E	015170	2017/09/18	2018/09/17

Note: the calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

## 5 Test Result

### 5.1 Maximum output power and peak to average ratio

#### 5.1.1 Limit

For FCC 22.913: The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

For FCC 24.234: Mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13dB.

#### 5.1.2 Test method

##### For Conducted output power:

1. Use a universal radio communication tester, the output power of EUT was measured at the antenna terminal. The path loss was calibrated and entered as an offset into the test equipment.
2. The EUT was configured to transmit on maximum power by the radio communication tester.
3. Measured the peak and average powers.

##### For EIRP & ERP:

1. In many cases, the RF output power limits for licensed digital transmission devices is specified in terms of effective radiated power (ERP) or equivalent isotropic radiated power (EIRP). Typically, ERP is specified when the operating frequency is less than or equal to 1 GHz and EIRP is specified when the operating frequency is greater than 1 GHz. Both are determined by adding the transmit antenna gain to the conducted RF output power with the primary difference between the two being that when determining the ERP, the transmit antenna gain is referenced to a dipole antenna (i.e., dBd) whereas when determining the EIRP, the transmit antenna gain is referenced to an isotropic antenna (dBi).

2. The relevant equation for determining the ERP or EIRP from the conducted RF output power measured using the guidance provided above is:

$$\text{ERP/EIRP} = P_{\text{Meas}} + \text{GT} - \text{LC}$$

where:

ERP/EIRP = effective or equivalent radiated power, respectively (expressed in the same units as  $P_{\text{Meas}}$ , typically dBW or dBm);

$P_{\text{Meas}}$  = measured transmitter output power or PSD, in dBm or dBW;

GT = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

dBd (ERP) = dBi (EIRP) - 2.15 dB

LC = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

For devices utilizing multiple antennas, KDB 662911 provides guidance for determining the effective array transmit antenna gain term to be used in the above equation.

5.1.3 Test Result

For Conducted output power:

Output Power for GSM850

Mode	Frequency(MHz)	Maximum Burst average Power
GSM850	824.2	32.37
	836.6	32.24
	848.8	32.22

Mode	Frequency(MHz)	Maximum Burst average Power
GPRS850 (1 Slot)	824.2	31.61
	836.6	31.69
	848.8	31.68
GPRS850 (2 Slot)	824.2	31.57
	836.6	31.52
	848.8	31.51
GPRS850 (3 Slot)	824.2	29.82
	836.6	29.75
	848.8	29.76
GPRS850 (4 Slot)	824.2	28.61
	836.6	28.62
	848.8	28.64

Mode	Frequency(MHz)	Maximum Burst average Power
EGPRS850 (1 Slot)	824.2	27.51
	836.6	27.34
	848.8	27.32
EGPRS850 (2 Slot)	824.2	26.27
	836.6	26.14
	848.8	25.98
EGPRS850 (3 Slot)	824.2	23.97
	836.6	23.95
	848.8	23.86
EGPRS850 (4 Slot)	824.2	22.94
	836.6	22.92
	848.8	22.87

Output Power for PCS1900

Mode	Frequency(MHz)	Maximum conducted Power
GSM1900	1850.2	30.57
	1880	30.49
	1909.8	30.47

Mode	Frequency(MHz)	Maximum conducted Power
GPRS1900 (1 Slot)	1850.2	30.46
	1880	30.45
	1909.8	30.15
GPRS1900 (2 Slot)	1850.2	29.52
	1880	29.44
	1909.8	29.17
GPRS1900 (3 Slot)	1850.2	27.77
	1880	27.74
	1909.8	27.35
GPRS1900 (4 Slot)	1850.2	26.83
	1880	26.81
	1909.8	26.78

Mode	Frequency(MHz)	Maximum conducted Power
EGPRS1900 (1 Slot)	1850.2	26.98
	1880	27.08
	1909.8	27.21
EGPRS1900 (2 Slot)	1850.2	26.14
	1880	26.25
	1909.8	26.31
EGPRS1900 (3 Slot)	1850.2	24.69
	1880	24.58
	1909.8	24.55
EGPRS1900 (4 Slot)	1850.2	23.52
	1880	23.49
	1909.8	23.47

Output Power for WCDMA BAND II

Mode	Frequency(MHz)	Maximum Average Output Power
WCDMA 1900 RMC	1852.4	21.42
	1880	21.35
	1907.6	21.45
HSDPA Subtest 1	1852.4	20.91
	1880	20.85
	1907.6	20.83
HSDPA Subtest 2	1852.4	20.62
	1880	20.73
	1907.6	20.61
HSDPA Subtest 3	1852.4	20.32
	1880	20.74
	1907.6	20.23
HSDPA Subtest 4	1852.4	20.31
	1880	20.71
	1907.6	20.18
HSUPA Subtest 1	1852.4	20.32
	1880	20.69
	1907.6	20.15
HSUPA Subtest 2	1852.4	20.33
	1880	20.57
	1907.6	20.12
HSUPA Subtest 3	1852.4	20.41
	1880	20.62
	1907.6	20.29
HSUPA Subtest 4	1852.4	20.35
	1880	20.48
	1907.6	20.15
HSUPA Subtest 5	1852.4	20.48
	1880	20.32
	1907.6	20.22

Output Power for WCDMA BAND IV

Mode	Frequency(MHz)	Maximum Average Output Power
WCDMA 1700 RMC	1712.4	21.74
	1732.6	21.75
	1752.6	21.72
HSDPA Subtest 1	1712.4	20.35
	1732.6	20.75
	1752.6	20.36
HSDPA Subtest 2	1712.4	20.32
	1732.6	20.71
	1752.6	20.34
HSDPA Subtest 3	1712.4	20.32
	1732.6	20.64
	1752.6	20.33
HSDPA Subtest 4	1712.4	20.31
	1732.6	20.61
	1752.6	22.17
HSUPA Subtest 1	1712.4	20.32
	1732.6	20.69
	1752.6	20.15
HSUPA Subtest 2	1712.4	20.33
	1732.6	20.57
	1752.6	20.12
HSUPA Subtest 3	1712.4	20.41
	1732.6	20.62
	1752.6	20.19
HSUPA Subtest 4	1712.4	20.35
	1732.6	20.48
	1752.6	20.15
HSUPA Subtest 5	1712.4	20.36
	1732.6	20.32
	1752.6	20.12

Output Power for WCDMA BAND V

Mode	Frequency(MHz)	Maximum Average Output Power
WCDMA 850 RMC	826.4	21.64
	836.6	21.57
	846.6	21.52
HSDPA Subtest 1	826.4	20.84
	836.6	20.27
	846.6	20.65
HSDPA Subtest 2	826.4	20.52
	836.6	20.84
	846.6	20.35
HSDPA Subtest 3	826.4	20.55
	836.6	20.92
	846.6	20.36
HSDPA Subtest 4	826.4	20.54
	836.6	20.92
	846.6	20.27
HSUPA Subtest 1	826.4	20.72
	836.6	20.27
	846.6	20.74
HSUPA Subtest 2	826.4	20.62
	836.6	20.07
	846.6	20.64
HSUPA Subtest 3	826.4	20.73
	836.6	20.24
	846.6	20.63
HSUPA Subtest 4	826.4	20.62
	836.6	20.17
	846.6	20.57
HSUPA Subtest 5	826.4	20.74
	836.6	20.15
	846.6	20.52

**For EIRP & ERP:**

**For GSM 850**

Frequency (MHz)	Polarization	SG	Pcl (dB)	Ga Antenna Gain (dB)	Correction (dB)	ERP (dBm)	ERP (W)
		Level (dBm)					
824.2	H	32.86	0.39	1	2.15	31.32	1.3552
836.6	H	32.68	0.35	1.1	2.15	31.28	1.3428
848.8	H	32.74	0.32	1.2	2.15	31.47	1.4028
824.2	V	32.54	0.39	1	2.15	31	1.2589
836.6	V	32.63	0.35	1.1	2.15	31.23	1.3274
848.8	V	32.71	0.32	1.2	2.15	31.44	1.3932

**For GPRS 850**

Frequency (MHz)	Polarization	SG	Pcl (dB)	Ga Antenna Gain (dB)	Correction (dB)	ERP (dBm)	ERP (W)
		Level (dBm)					
824.2	H	31.28	0.39	1	2.15	29.74	0.9419
836.6	H	31.36	0.35	1.1	2.15	29.96	0.9908
848.8	H	31.46	0.32	1.2	2.15	30.19	1.0447
824.2	V	31.52	0.39	1	2.15	29.98	0.9954
836.6	V	31.36	0.35	1.1	2.15	29.96	0.9908
848.8	V	31.41	0.32	1.2	2.15	30.14	1.0328

**For EGPRS 850**

Frequency (MHz)	Polarization	SG	Pcl (dB)	Ga Antenna Gain (dB)	Correction (dB)	ERP (dBm)	ERP (W)
		Level (dBm)					
824.2	H	29.89	0.39	1	2.15	28.35	0.6839
836.6	H	29.79	0.35	1.1	2.15	28.39	0.6902
848.8	H	29.63	0.32	1.2	2.15	28.36	0.6855
824.2	V	29.57	0.39	1	2.15	28.03	0.6353
836.6	V	29.46	0.35	1.1	2.15	28.06	0.6397
848.8	V	29.59	0.32	1.2	2.15	28.32	0.6792

**For GSM 1900**

Frequency (MHz)	Polarization	SG	Pcl (dB)	Ga Antenna Gain (dB)	EIRP (dBm)	EIRP (W)
		Level (dBm)				
1850.2	H	30.2	0.47	1.58	29.73	0.9397
1880	H	30.08	0.47	1.72	29.61	0.9141
1909.8	H	29.85	0.46	1.85	29.39	0.8690
1850.2	V	30.2	0.47	1.58	29.73	0.9397
1880	V	30.08	0.47	1.72	29.61	0.9141
1909.8	V	29.85	0.46	1.85	29.39	0.8690



For GPRS 1900

Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	29.34	0.47	1.58	28.87	0.7709
1880	H	29.26	0.47	1.72	28.79	0.7568
1909.8	H	29.28	0.46	1.85	28.82	0.7621
1850.2	V	29.56	0.47	1.58	29.09	0.8110
1880	V	29.24	0.47	1.72	28.77	0.7534
1909.8	V	29.16	0.46	1.85	28.7	0.7413

For EGPRS 1900

Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1850.2	H	28.54	0.47	1.58	28.07	0.6412
1880	H	28.47	0.47	1.72	28	0.6310
1909.8	H	28.17	0.46	1.85	27.71	0.5902
1850.2	V	28.61	0.47	1.58	28.14	0.6516
1880	V	28.49	0.47	1.72	28.02	0.6339
1909.8	V	28.63	0.46	1.85	28.17	0.6561

For WCDMA BAND II

Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1852.4	H	22.57	0.47	1.59	23.44	0.2208
1880	H	22.32	0.47	1.72	22.88	0.1941
1907.6	H	21.89	0.46	1.84	22.49	0.1774
1852.4	V	22.24	0.47	1.59	23.44	0.2208
1880	V	22.31	0.47	1.72	22.88	0.1941
1907.6	V	21.92	0.46	1.84	22.49	0.1774

For WCDMA BAND IV

Frequency	Polarization	SG Level	Pcl	Ga Antenna Gain	EIRP	EIRP
(MHz)		(dBm)	(dB)	(dB)	(dBm)	(W)
1712.4	H	21.82	0.39	1	22.43	0.1750
1740	H	21.76	0.35	1.1	22.51	0.1782
1752.6	H	21.64	0.32	1.2	22.52	0.1786
1712.4	V	21.25	0.39	1	21.86	0.1535
1740	V	21.21	0.35	1.1	21.96	0.1570
1752.6	V	21.18	0.32	1.2	22.06	0.1607

For WCDMA BAND V

Radiated Power (ERP) for UMTS band V							
Frequency	Polarization	SG Level	Pcl	Ga	Correction	(ERP)	ERP
(MHz)		(dBm)	(dB)	(dB)	(dBi)	(dBm)	(W)
826.4	H	22.42	0.39	1	2.15	20.88	0.1225
836.6	H	22.36	0.35	1.1	2.15	20.96	0.1247
846.6	H	22.34	0.32	1.2	2.15	21.07	0.1279
826.4	V	22.15	0.39	1	2.15	20.61	0.1151
836.6	V	22.12	0.35	1.1	2.15	20.72	0.1180
846.6	V	22.08	0.32	1.2	2.15	20.81	0.1205

## 5.2 Peak to average power ratio(PAPR)

### 5.2.1 Limit

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB. The PAPR measurements should be made using either an instrument with complementary cumulative distribution function (CCDF) capabilities to determine that PAPR will not exceed 13 dB for more than 0.1 percent of the time or other Commission approved procedure. The measurement must be performed using a signal corresponding to the highest PAPR expected during periods of continuous transmission.

### 5.2.2 Test method

The EUT was connected to Spectrum Analyzer and Base Station via power divider.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.

Set the number of counts to a value that stabilizes the measured CCDF curve.

Set the measurement interval to 1 ms.

Record the maximum PAPR level associated with a probability of 0.1%.

- a) Refer to instrument's analyzer instruction manual for details on how to use the power statistics/CCDF function;
- b) Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth;
- c) Set the number of counts to a value that stabilizes the measured CCDF curve;
- d) Set the measurement interval as follows:
  - 1) for continuous transmissions, set to 1 ms,
  - 2) for burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst to stabilize and set the measurement interval to a time that is less than or equal to the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

5.2.3 Test Result

Cellular Band						
Modes	GSM850			GSM1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.29	9.37	8.64	9.42	9.87	9.84

Cellular Band						
Modes	GPRS850			GPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.12	9.15	8.61	9.37	9.84	9.82

Cellular Band						
Modes	EGPRS850			EGPRS1900		
Channel	128 (Low)	190 (Mid)	251 (High)	512 (Low)	661 (Mid)	810 (High)
Frequency(MHz)	824.2	836.6	848.8	1850.2	1880	1909.8
Peak-to-Average Ratio (dB)	9.02	9.05	8.54	9.32	9.76	9.76

Cellular Band						
Modes	WCDMA BAND II			WCDMA BAND IV		
Channel	128 (Low)	190 (Mid)	251 (High)	1312 (Low)	1450 (Mid)	1513 (High)
Frequency(MHz)	824.2	836.6	848.8	1712.4	1740.0	1752.6
Peak-to-Average Ratio (dB)	2.75	2.88	2.82	1.72	1.69	1.78

Cellular Band						
Modes	WCDMA BAND V					
Channel	9262 (Low)	9400 (Mid)	9538 (High)			
Frequency(MHz)	1852.4	1880	1907.6			
Peak-to-Average Ratio (dB)	3.16	2.90	3.01			



**Test plot**

(GSM850)

(GSM1900)



Peak-to-Average Ratio on channel 128

Peak-to-Average Ratio on channel 512

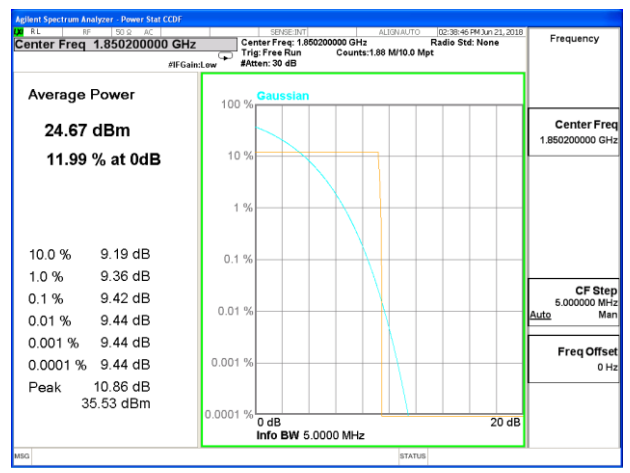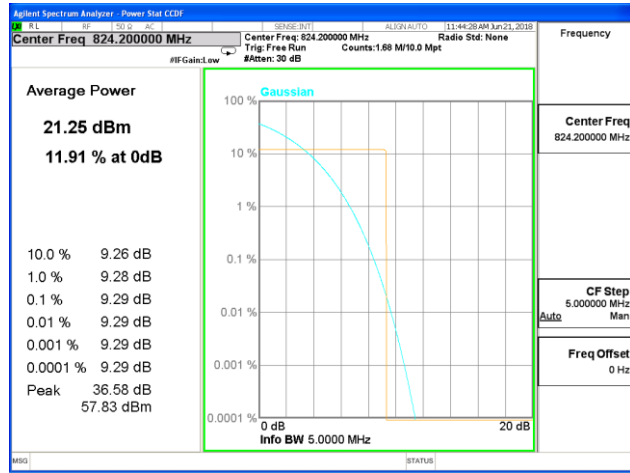



Peak-to-Average Ratio on channel 190

Peak-to-Average Ratio on channel 661

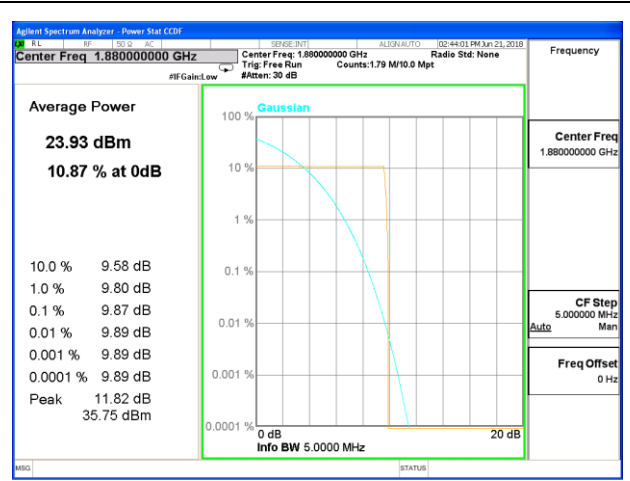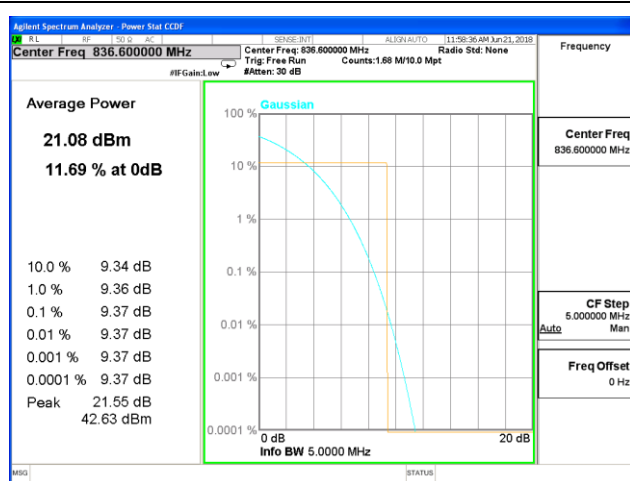

Peak-to-Average Ratio on channel 251

Peak-to-Average Ratio on channel 810

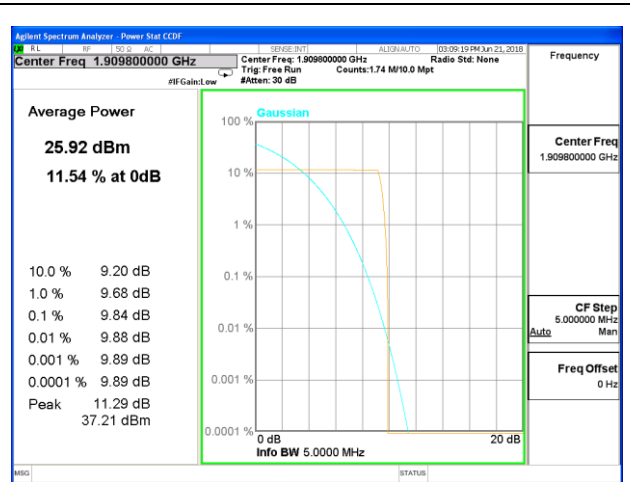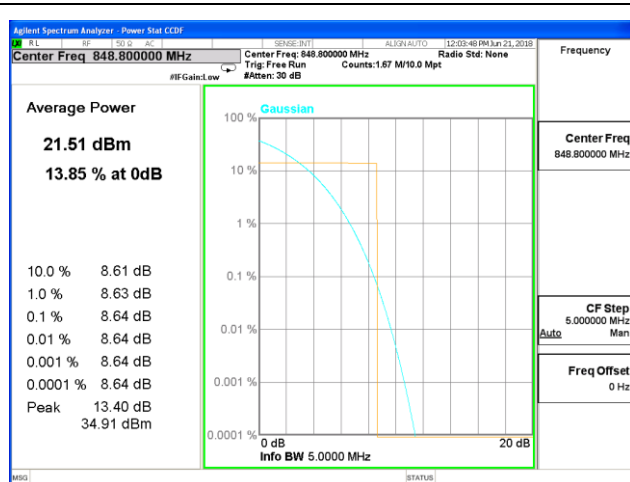



**Test plot**

(WCDMA BAND II)

(WCDMA BAND IV)



Peak-to-Average Ratio on channel 9262

Peak-to-Average Ratio on channel 1312

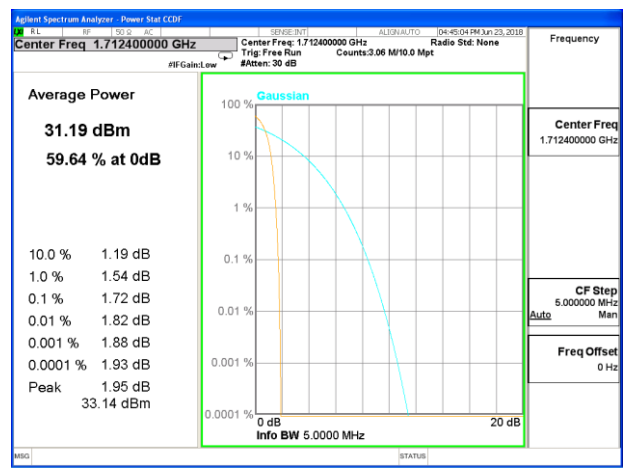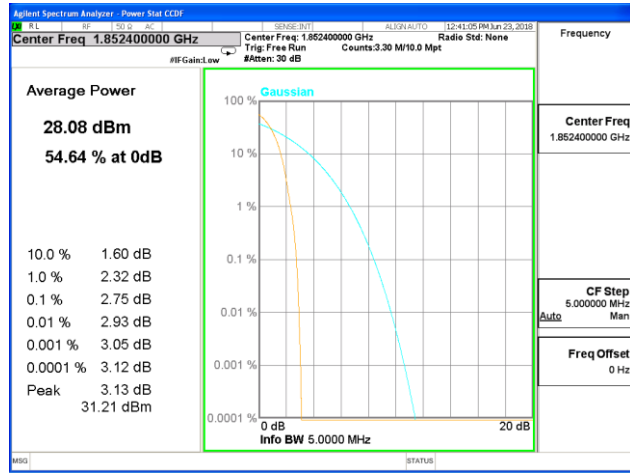



Peak-to-Average Ratio on channel 9400

Peak-to-Average Ratio on channel 1450

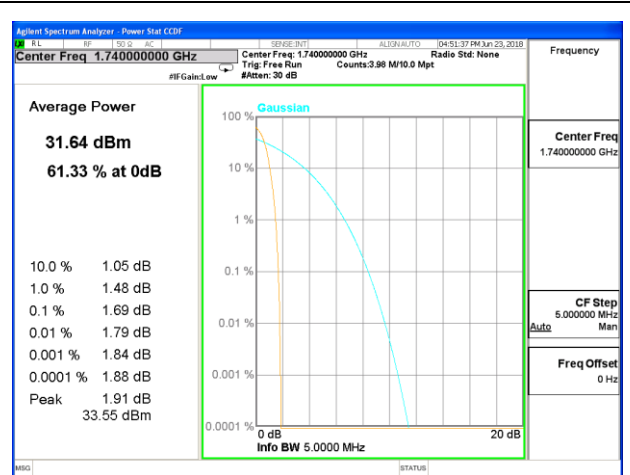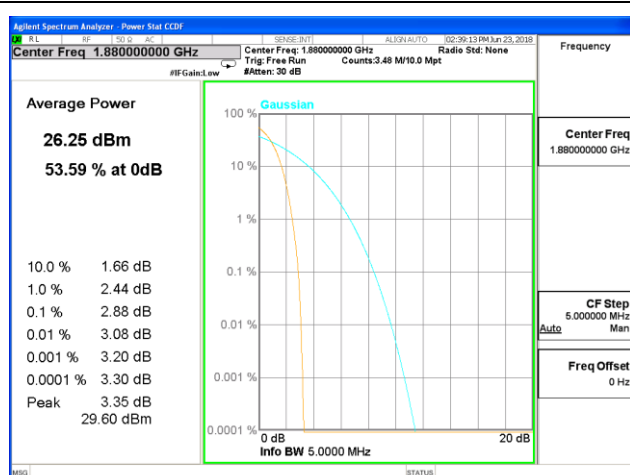

Peak-to-Average Ratio on channel 9538

Peak-to-Average Ratio on channel 1513

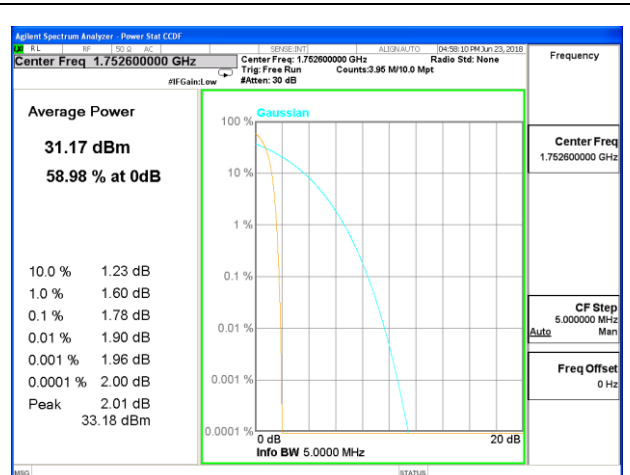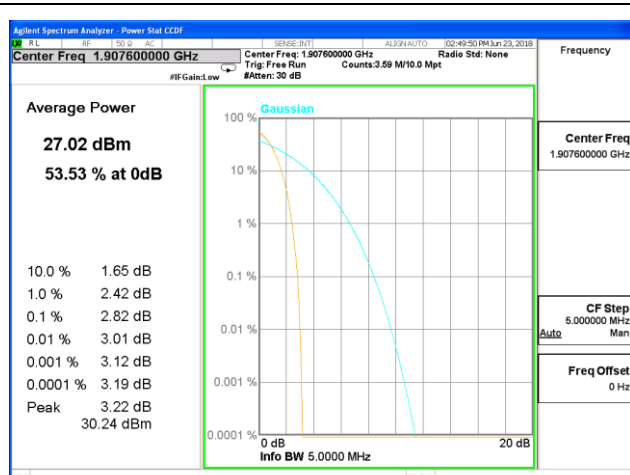

<b>Test plot</b>																	
(WCDMA BAND V)																	
Peak-to-Average Ratio on channel 4132																	
<p><b>Average Power</b> 31.53 dBm 52.40 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.79 dB</td></tr> <tr><td>1.0 %</td><td>2.68 dB</td></tr> <tr><td>0.1 %</td><td>3.16 dB</td></tr> <tr><td>0.01 %</td><td>3.35 dB</td></tr> <tr><td>0.001 %</td><td>3.49 dB</td></tr> <tr><td>0.0001 %</td><td>3.67 dB</td></tr> <tr><td>Peak</td><td>3.72 dB</td></tr> <tr><td></td><td>35.25 dBm</td></tr> </table> <p>Center Freq: 826.400000 MHz Info BW: 5.0000 MHz Peak: 35.25 dBm</p>	10.0 %	1.79 dB	1.0 %	2.68 dB	0.1 %	3.16 dB	0.01 %	3.35 dB	0.001 %	3.49 dB	0.0001 %	3.67 dB	Peak	3.72 dB		35.25 dBm	<p>Frequency</p> <p>Center Freq 826.400000 MHz</p> <p>CF Step 5.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
10.0 %	1.79 dB																
1.0 %	2.68 dB																
0.1 %	3.16 dB																
0.01 %	3.35 dB																
0.001 %	3.49 dB																
0.0001 %	3.67 dB																
Peak	3.72 dB																
	35.25 dBm																
Peak-to-Average Ratio on channel 4182																	
<p><b>Average Power</b> 31.73 dBm 53.03 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.76 dB</td></tr> <tr><td>1.0 %</td><td>2.52 dB</td></tr> <tr><td>0.1 %</td><td>2.90 dB</td></tr> <tr><td>0.01 %</td><td>3.05 dB</td></tr> <tr><td>0.001 %</td><td>3.13 dB</td></tr> <tr><td>0.0001 %</td><td>3.17 dB</td></tr> <tr><td>Peak</td><td>3.23 dB</td></tr> <tr><td></td><td>34.96 dBm</td></tr> </table> <p>Center Freq: 836.600000 MHz Info BW: 5.0000 MHz Peak: 34.96 dBm</p>	10.0 %	1.76 dB	1.0 %	2.52 dB	0.1 %	2.90 dB	0.01 %	3.05 dB	0.001 %	3.13 dB	0.0001 %	3.17 dB	Peak	3.23 dB		34.96 dBm	<p>Frequency</p> <p>Center Freq 836.600000 MHz</p> <p>CF Step 5.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
10.0 %	1.76 dB																
1.0 %	2.52 dB																
0.1 %	2.90 dB																
0.01 %	3.05 dB																
0.001 %	3.13 dB																
0.0001 %	3.17 dB																
Peak	3.23 dB																
	34.96 dBm																
Peak-to-Average Ratio on channel 4233																	
<p><b>Average Power</b> 31.70 dBm 53.35 % at 0dB</p> <table border="1"> <tr><td>10.0 %</td><td>1.74 dB</td></tr> <tr><td>1.0 %</td><td>2.56 dB</td></tr> <tr><td>0.1 %</td><td>3.01 dB</td></tr> <tr><td>0.01 %</td><td>3.20 dB</td></tr> <tr><td>0.001 %</td><td>3.31 dB</td></tr> <tr><td>0.0001 %</td><td>3.39 dB</td></tr> <tr><td>Peak</td><td>3.48 dB</td></tr> <tr><td></td><td>35.18 dBm</td></tr> </table> <p>Center Freq: 846.600000 MHz Info BW: 5.0000 MHz Peak: 35.18 dBm</p>	10.0 %	1.74 dB	1.0 %	2.56 dB	0.1 %	3.01 dB	0.01 %	3.20 dB	0.001 %	3.31 dB	0.0001 %	3.39 dB	Peak	3.48 dB		35.18 dBm	<p>Frequency</p> <p>Center Freq 846.600000 MHz</p> <p>CF Step 5.000000 MHz Auto Man</p> <p>Freq Offset 0 Hz</p>
10.0 %	1.74 dB																
1.0 %	2.56 dB																
0.1 %	3.01 dB																
0.01 %	3.20 dB																
0.001 %	3.31 dB																
0.0001 %	3.39 dB																
Peak	3.48 dB																
	35.18 dBm																

Note: all modes of EUT have been tested; only the data of worst case mode is reported.



### 5.3 Occupied bandwidth


#### 5.3.1 Test method

1. The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.
2. The resolution bandwidth of the Spectrum Analyzer is set to at least 1% of the occupied bandwidth.
3. The low, middle and the high channels are selected to perform tests respectively.
4. Set the frequency range of the Spectrum Analyzer suitably to capture the waveform; search peak; make a line whose value is 26dB lower than the peak; mark two points which the line intersected the waveform at; finally record the delta of the two points as the occupied bandwidth and the plot.
5. Set the Spectrum Analyzer Occupied bandwidth function to measure the 99% occupied bandwidth.


#### 5.3.2 Test result

Channel	Channel Frequency (MHz)	26dB emission bandwidth (MHz)	99% occupied bandwidth (MHz)
<b>GSM 850</b>			
128	824.2	0.3085	0.24668
190	836.6	0.3129	0.24597
251	848.8	0.3179	0.24435
<b>GPRS 850</b>			
128	824.2	0.3185	0.24727
190	836.6	0.3124	0.24227
251	848.8	0.3165	0.24389
<b>EGPRS 850</b>			
128	824.2	0.3867	0.27842
190	836.6	0.3689	0.27461
251	848.8	0.3692	0.27745
<b>GSM 1900</b>			
512	1850.2	0.3168	0.24639
661	1880	0.3167	0.24777
810	1909.8	0.3117	0.24384
<b>GPRS 1900</b>			
512	1850.2	0.3201	0.24390
661	1880	0.3122	0.24514
810	1909.8	0.3177	0.24320
<b>EGPRS 1900</b>			
512	1850.2	0.3217	0.24863
661	1880	0.3199	0.24919
810	1909.8	0.3177	0.24783


WCDMA Band II			
9262	1852.4	4.722	4.1618
9400	1880	4.677	4.1572
9538	1907.6	4.702	4.1559
WCDMA Band VI			
1312	1712.4	5.553	4.2114
1450	1740.0	5.872	4.2459
1513	1752.6	4.809	4.1983
WCDMA Band V			
4132	826.4	4.674	4.1517
4183	836.4	4.680	4.1579
4233	846.6	4.681	4.1512

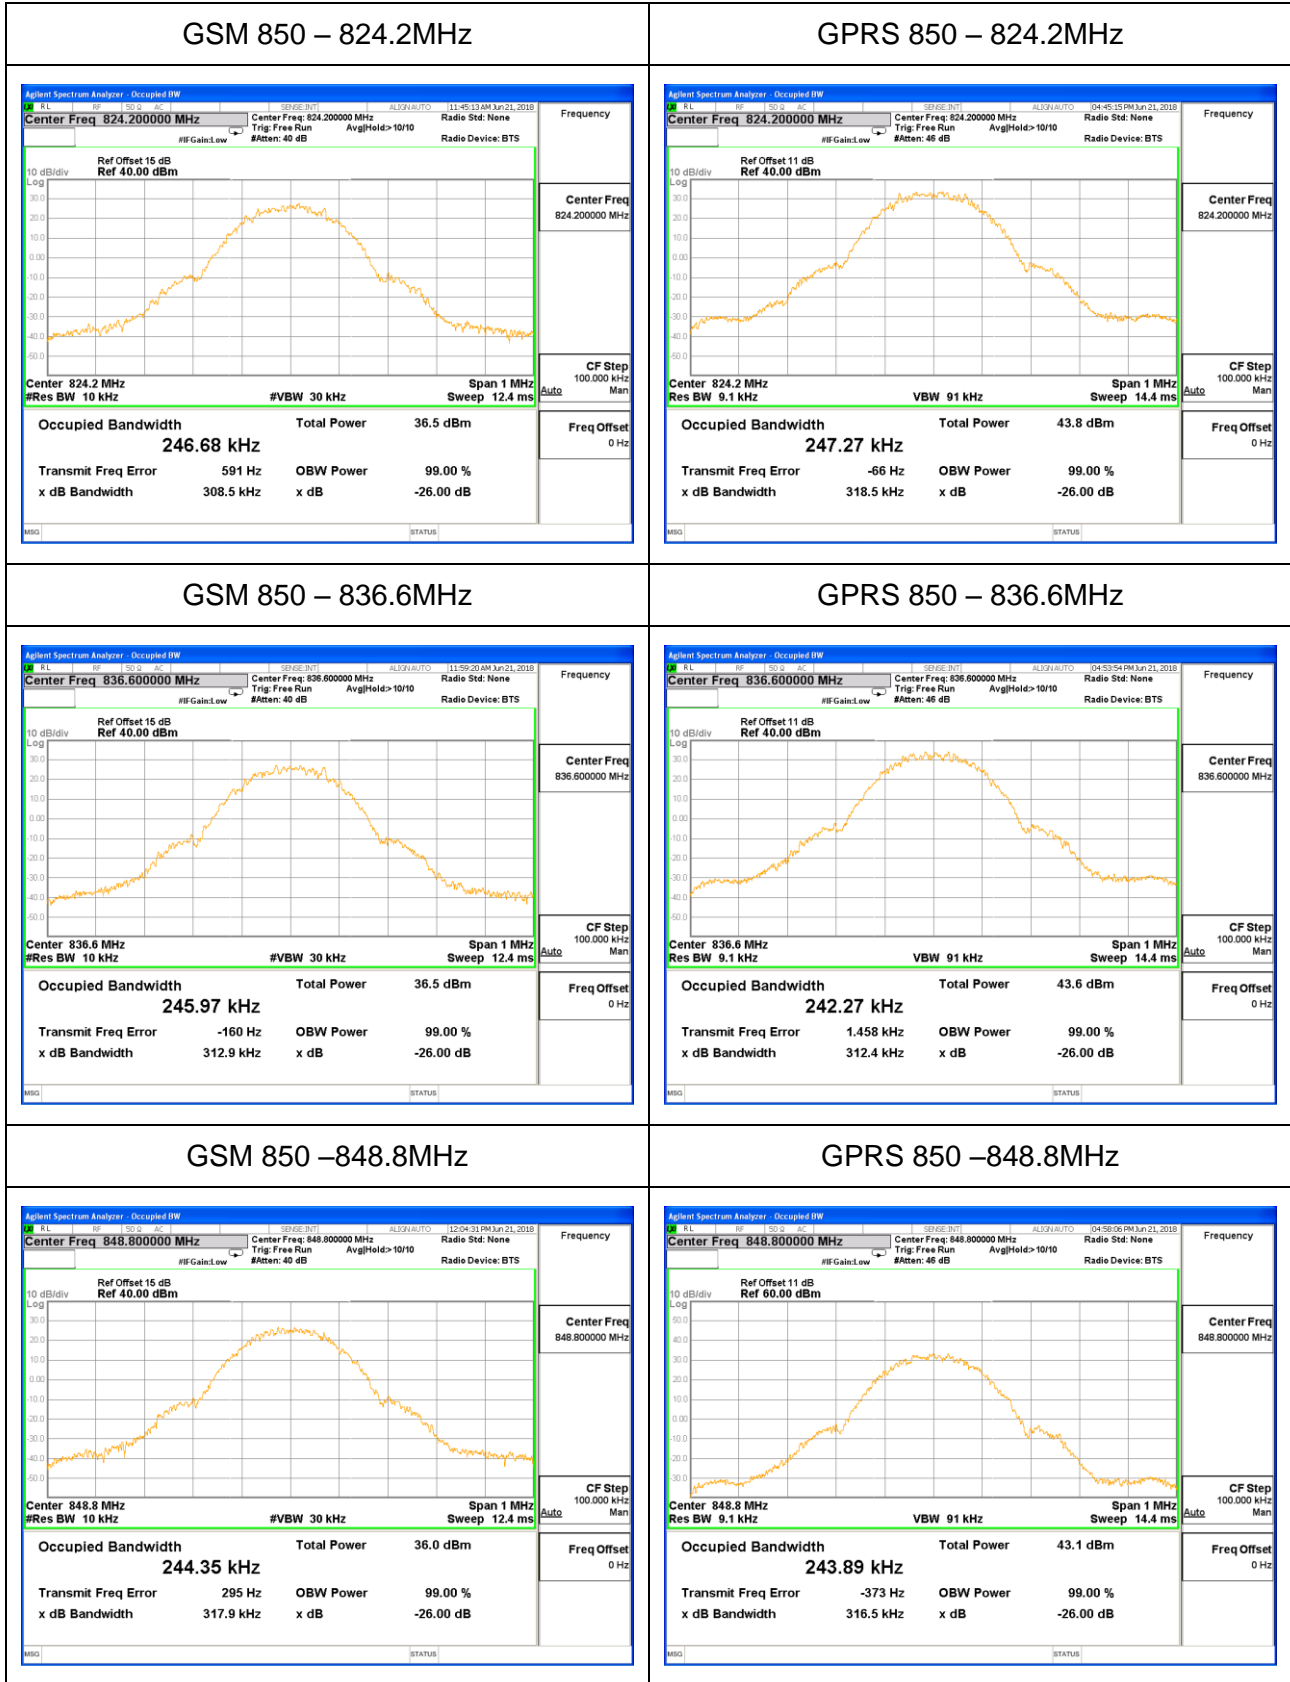


**EGPRS 850 – 824.2MHz**

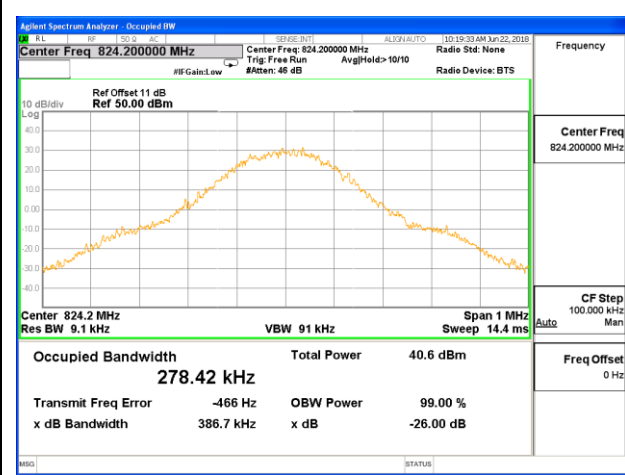


**GSM 1900 - 1850MHz**

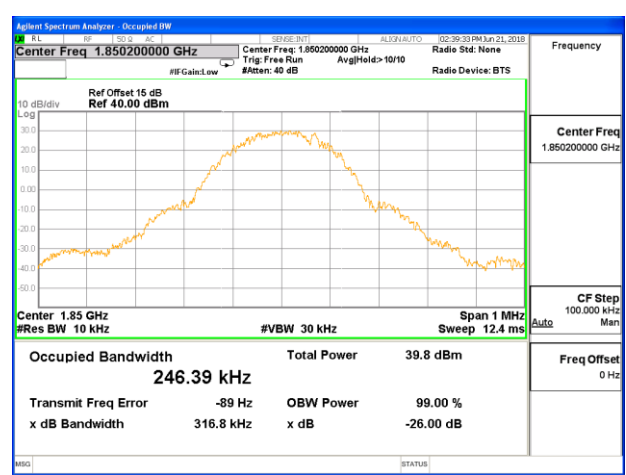


**EGPRS 850 – 836.6MHz**

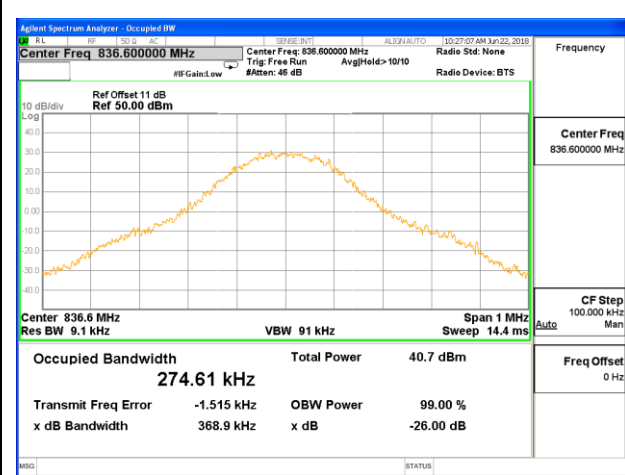


**GSM 1900 - 1880MHz**

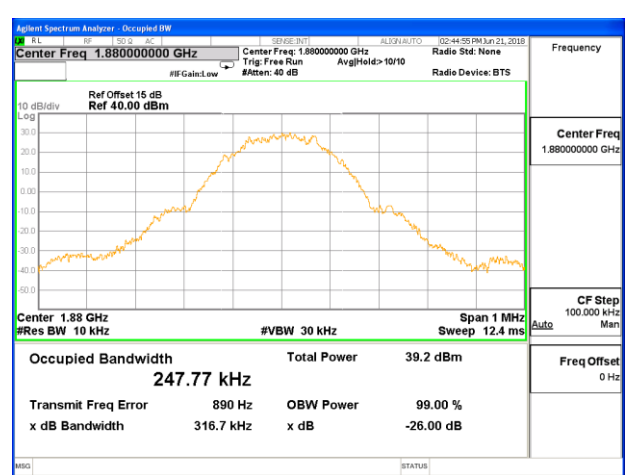


**EGPRS 850 – 848.8MHz**

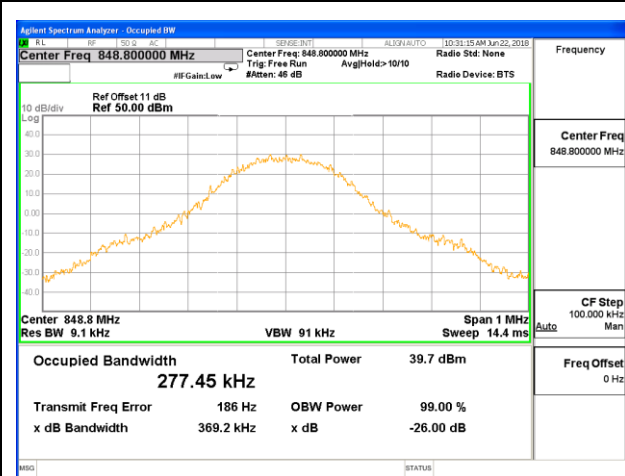


**GSM 1900 - 1909.8MHz**

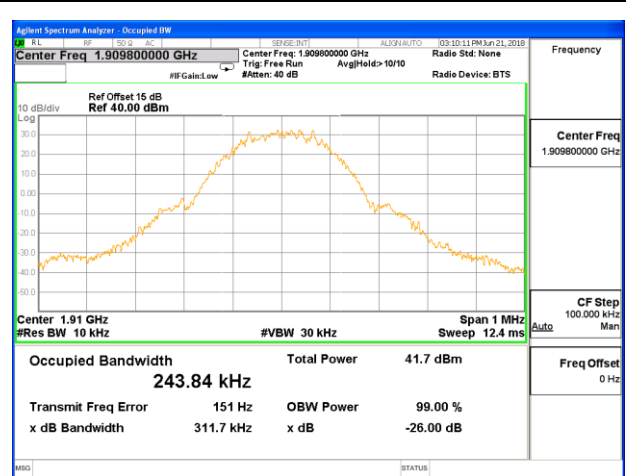

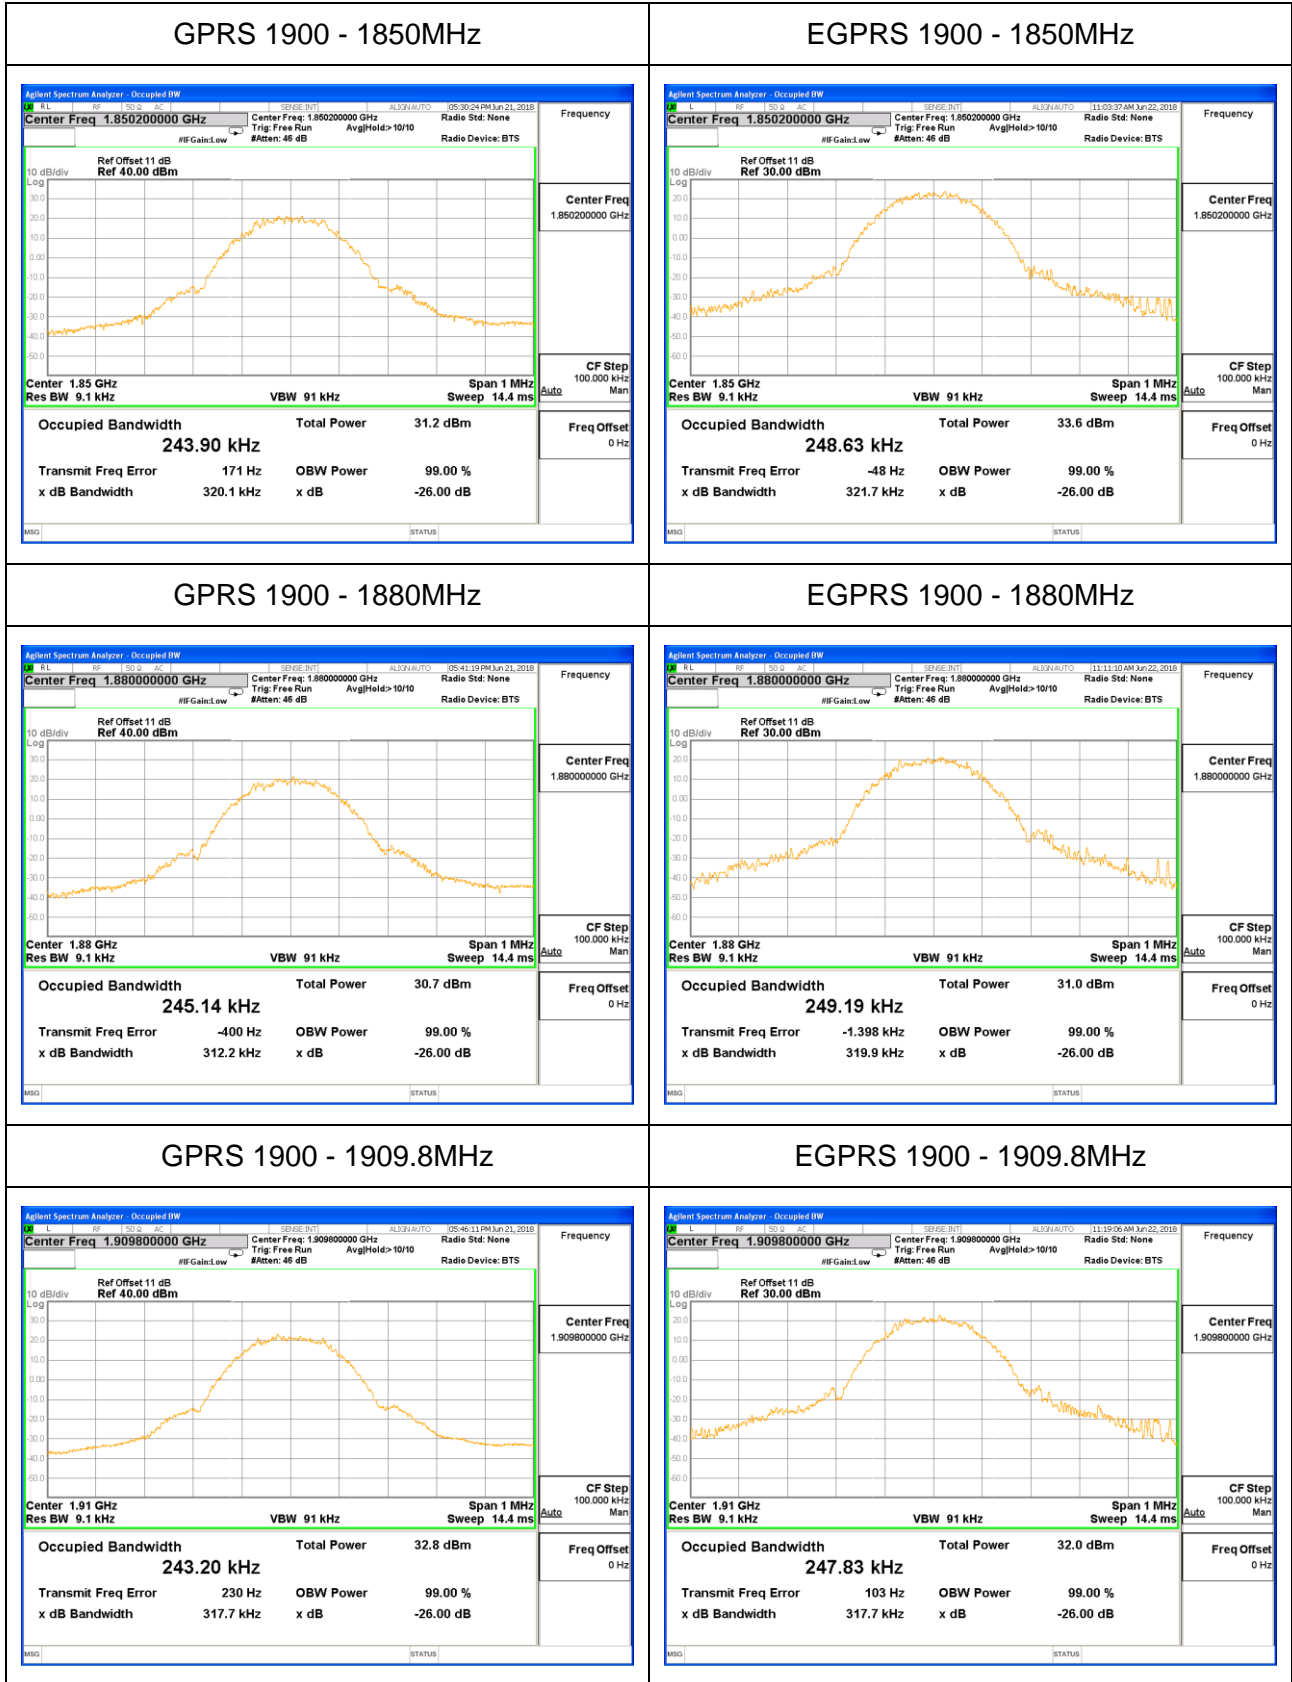



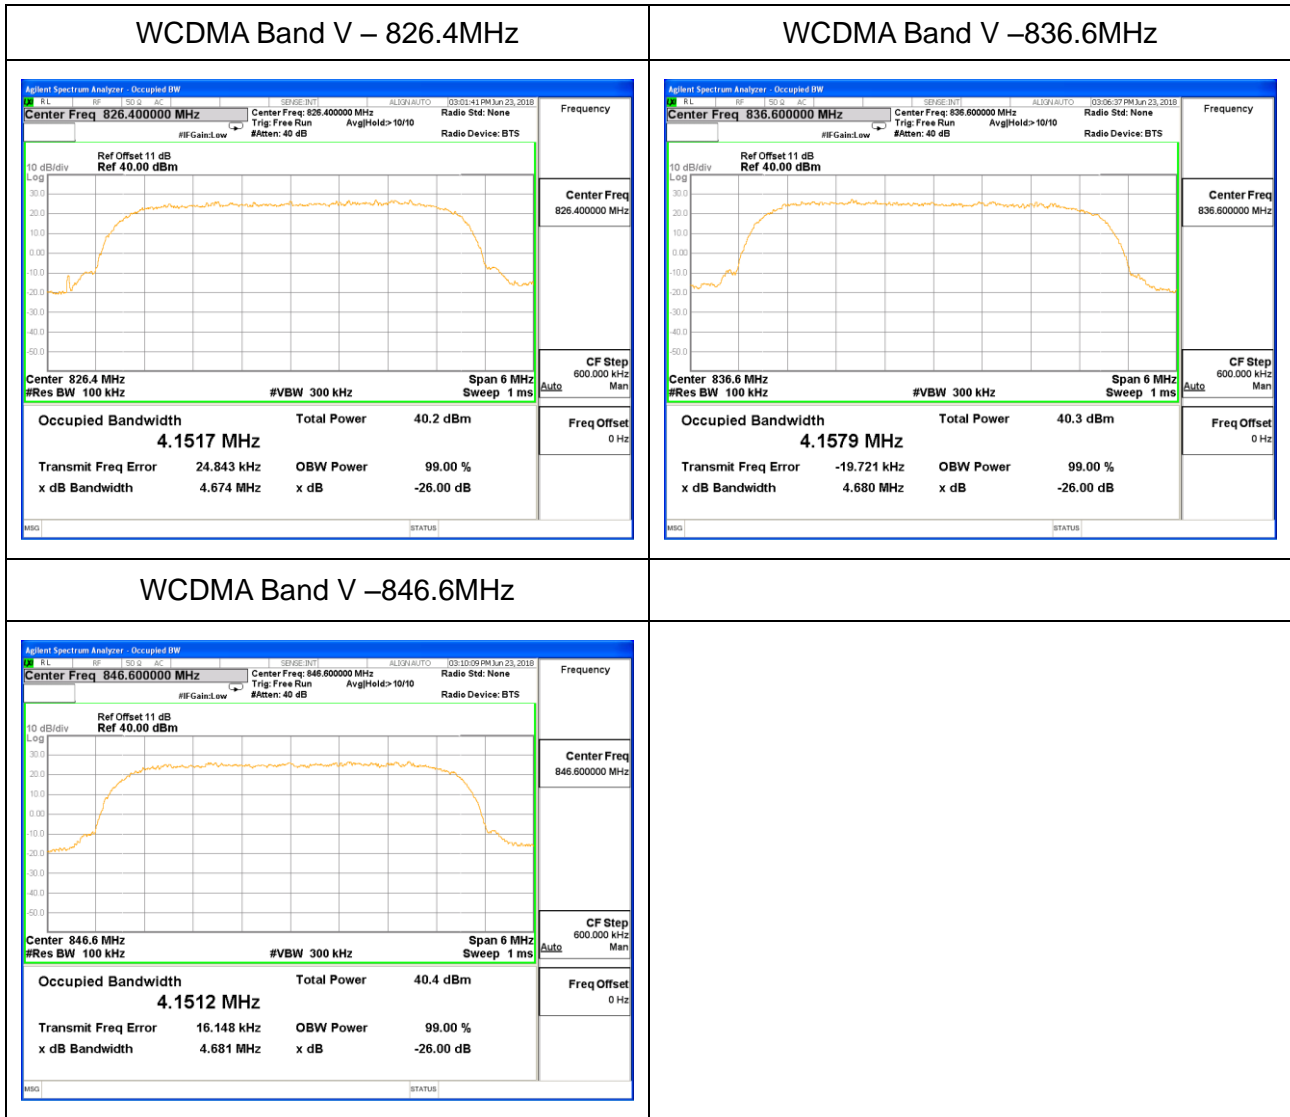

Note: all modes of EUT have been tested; only the data of worst case mode is reported.

## 5.4 Conducted spurious emissions

### 5.4.1 Limits

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB

### 5.4.2 Test method

1, The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.

2, Spectrum Setting:

Frequency bellow 1 GHz: RBW=100 kHz, VBW=300 kHz.


Frequency above 1 GHz: RBW=1 MHz, VBW=3 MHz.

3, The low, middle and high channels of each band and mode's spurious emissions for 30 MHz to 10<sup>th</sup> Harmonic were measured by Spectrum analyzer.

### 5.4.3 Test result



**GSM 850**

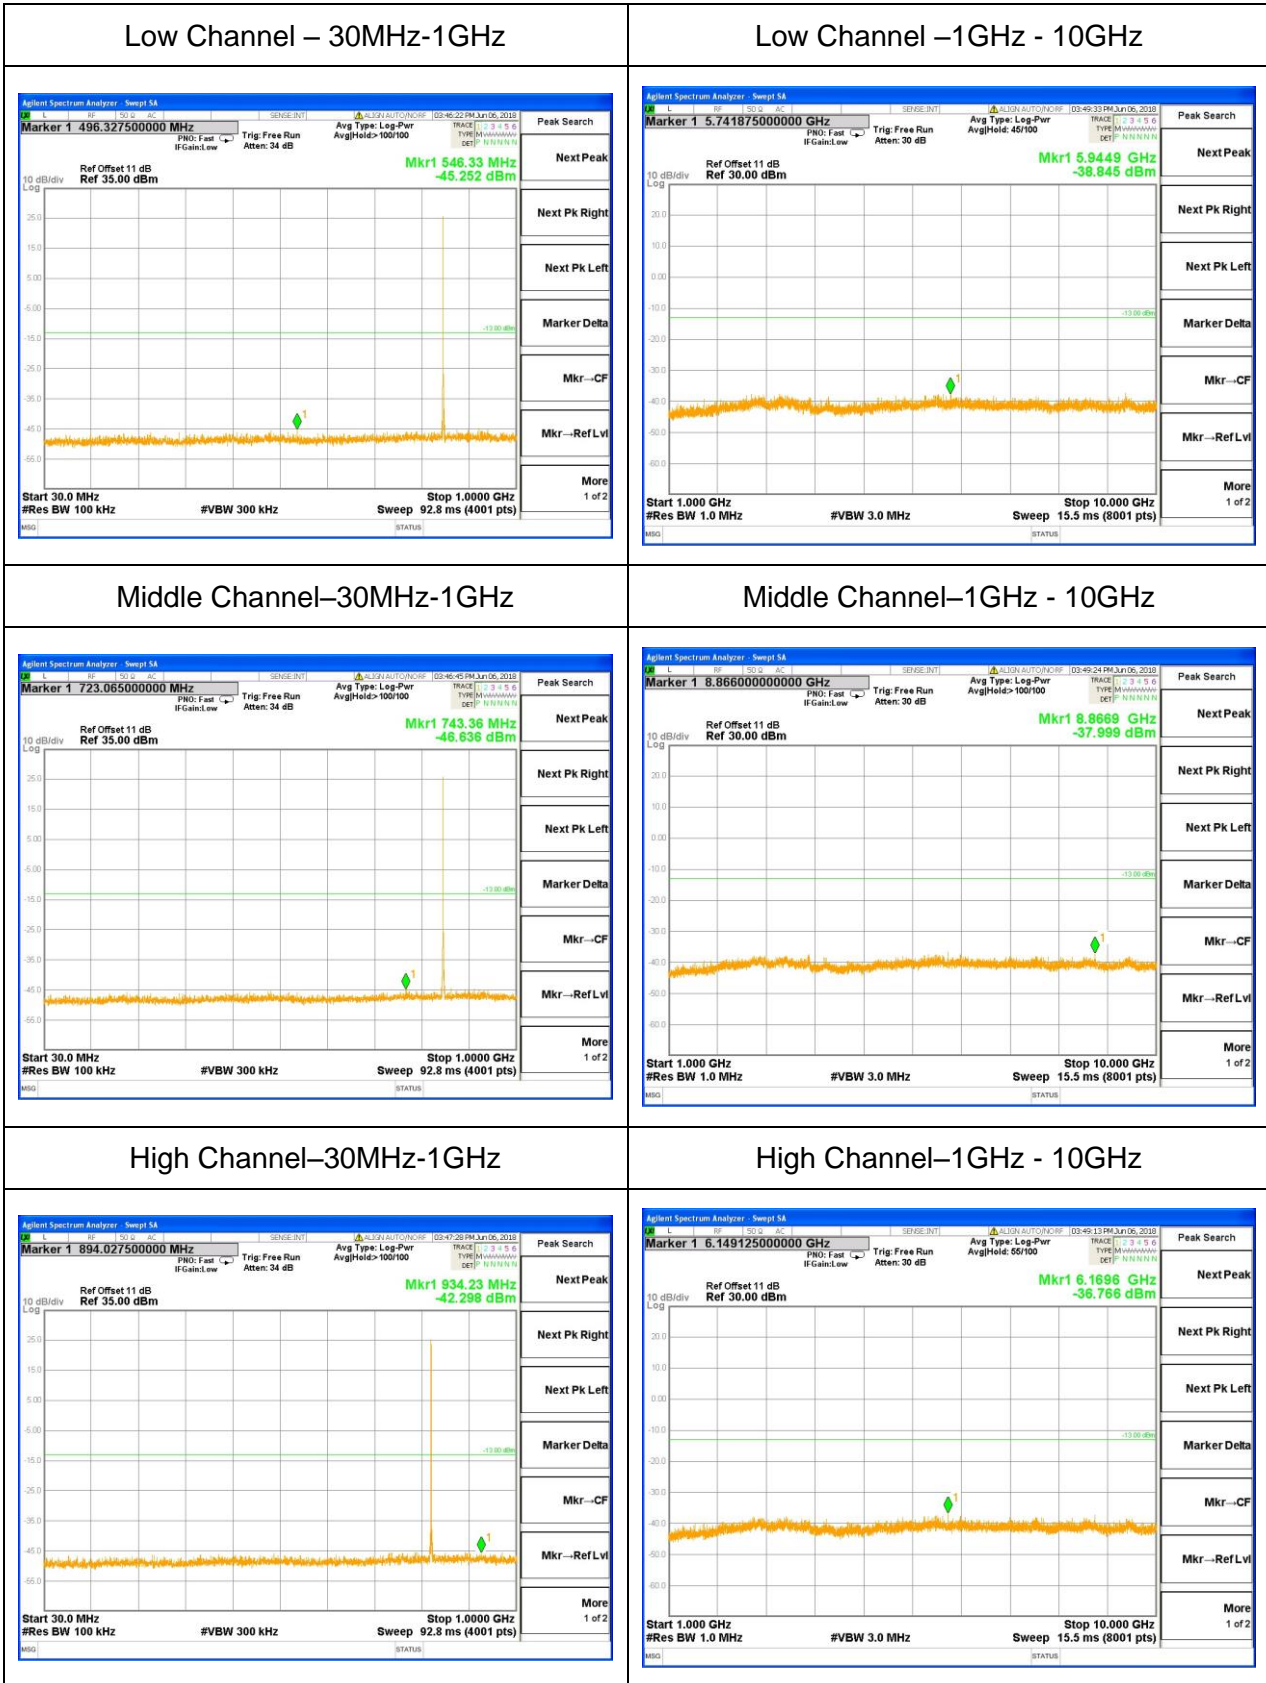

**GSM 1900**



WCDMA Band II



WCDMA Band IV



WCDMA Band V



Note: all modes of EUT have been tested; only the data of worst case mode is reported.

## 5.5 Band edge

### 5.5.1 Limits

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB, for all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm

### 5.5.2 Test method

1. The EUT was directly connected to the spectrum analyzer and Base station via power splitter as show in the block diagram above.

2. Spectrum Setting:

For GSM system:

RBW=3 kHz

VBW=10 kHz

Span 1 MHz

Detector: Peak Mode

For WCDMA:

RBW=100 kHz

VBW=300 kHz


Span 5 MHz

Detector: Peak Mode


3. The band edges of low and high channels for the highest RF powers were measured.

### 5.5.3 Test result

GSM 850 – Left band

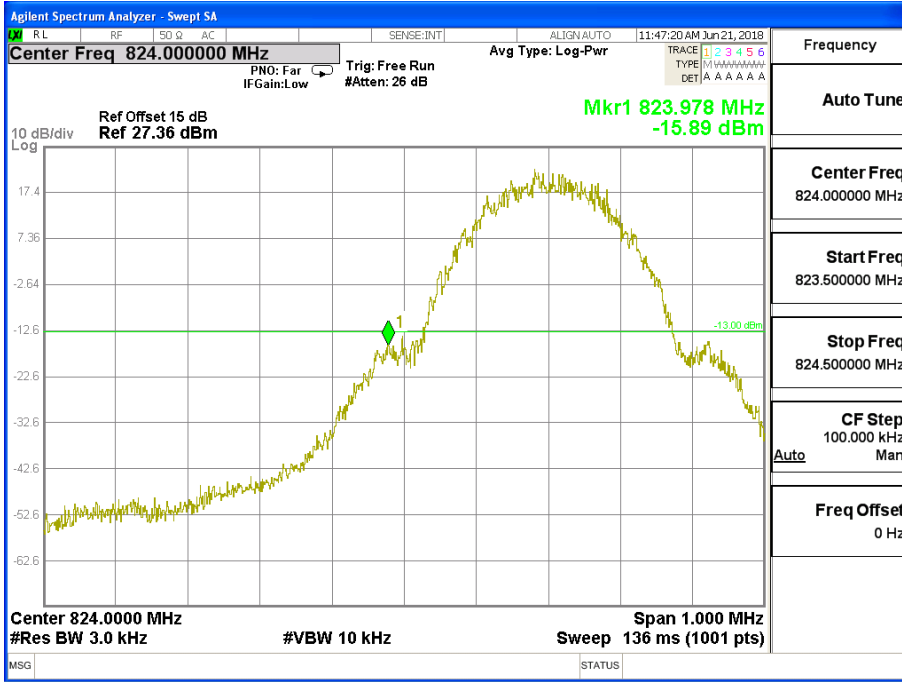


GSM 850 – Right band

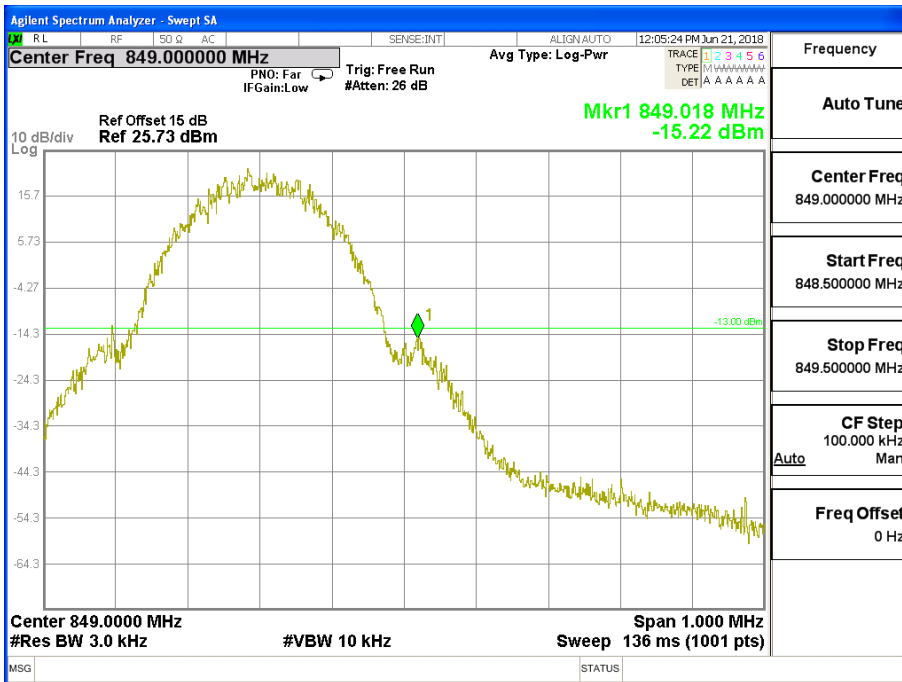




GSM 1900 – Left band

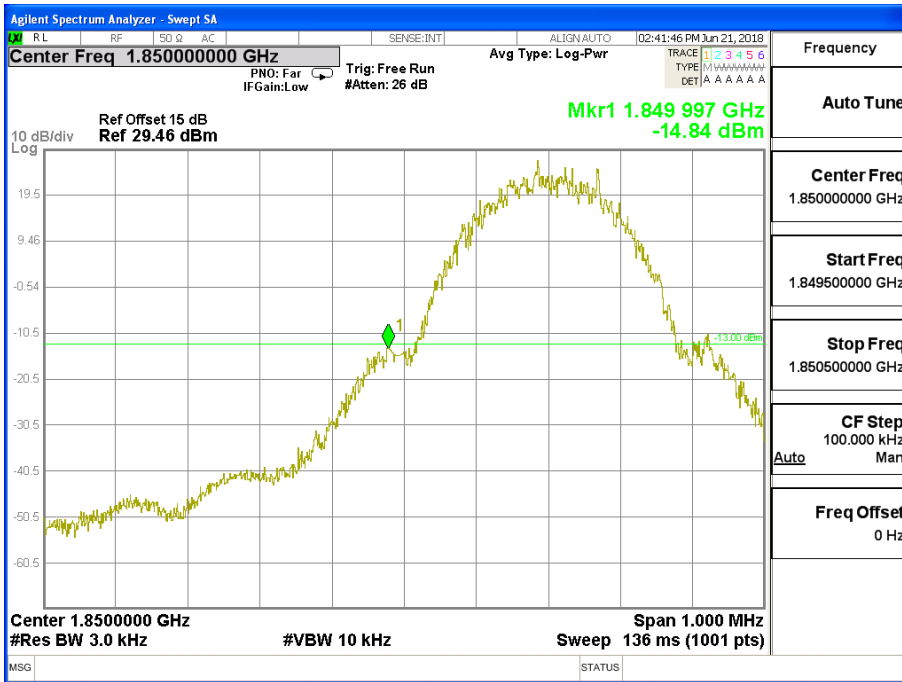


GSM 1900 – Right band

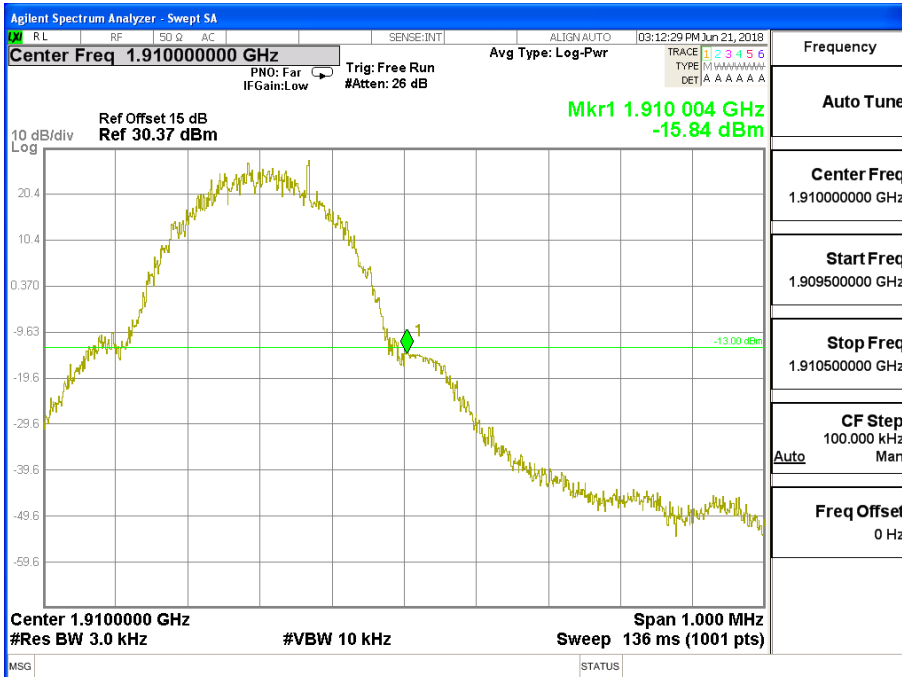





WCDMA Band II – Left band

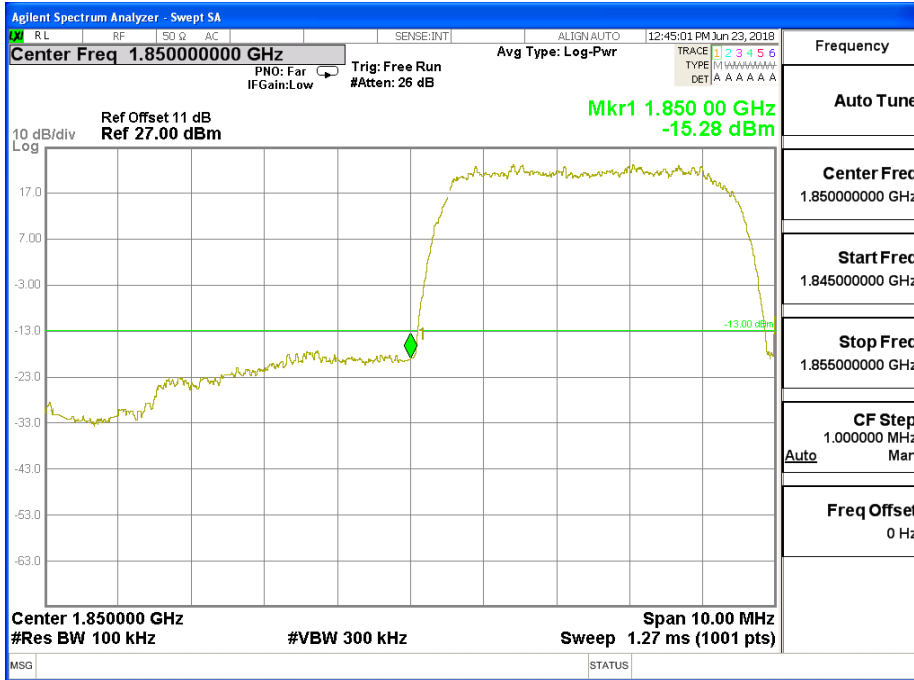


WCDMA Band II – Right band

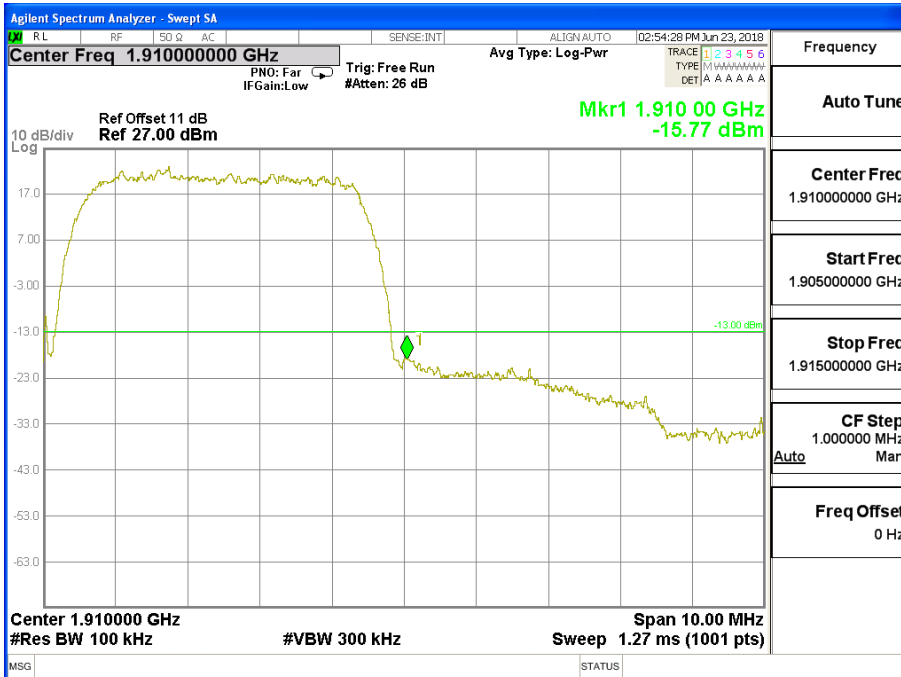


WCDMA Band IV – Left band

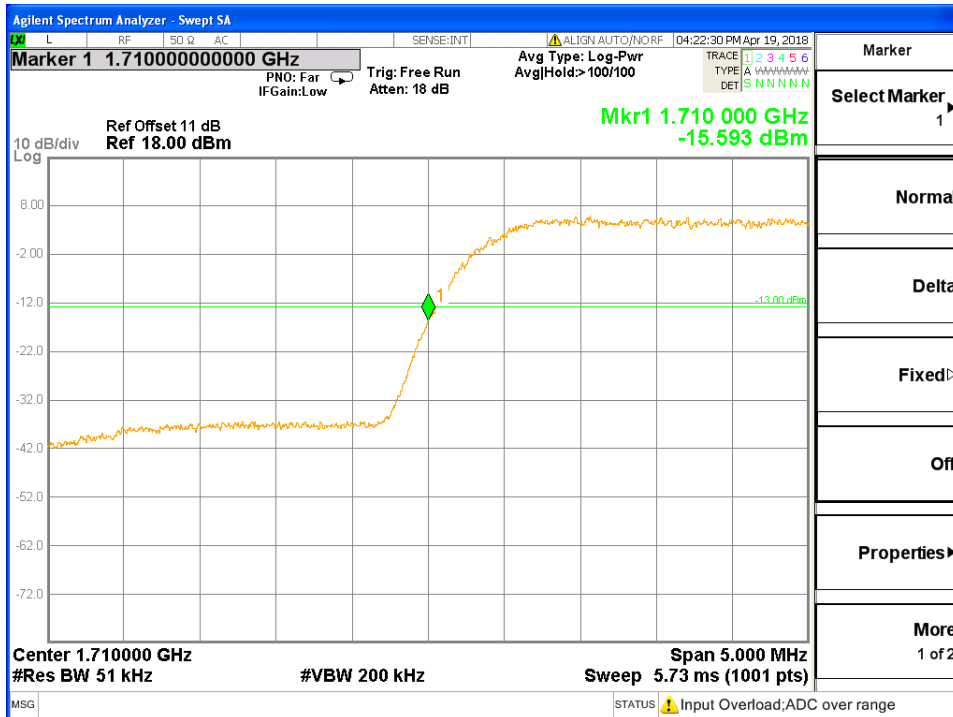


WCDMA Band IV– Right band

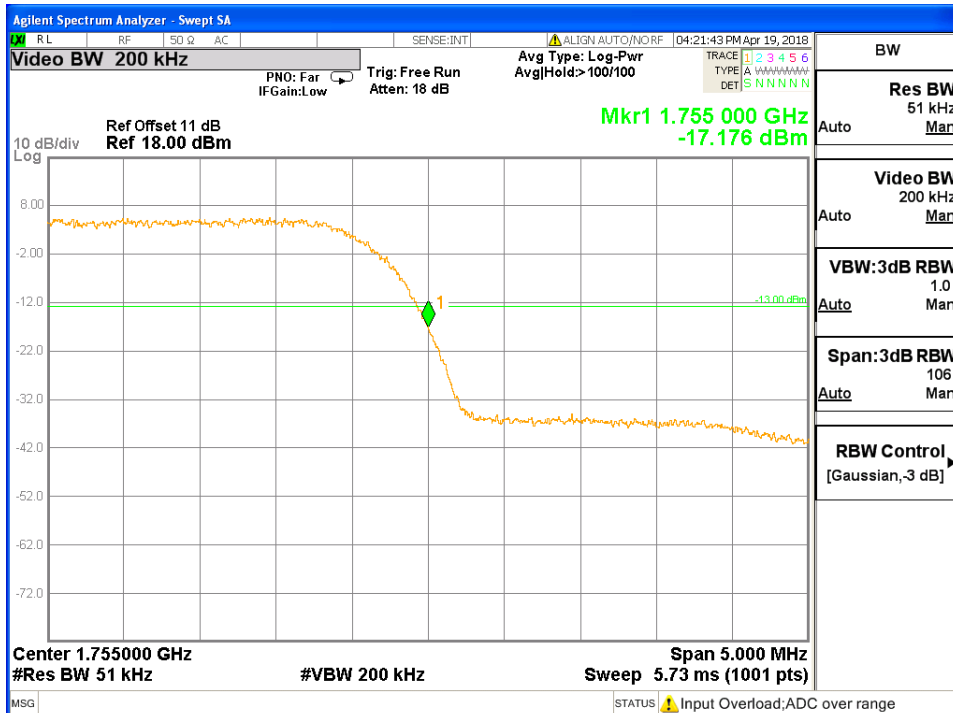

WCDMA Band V – Left band

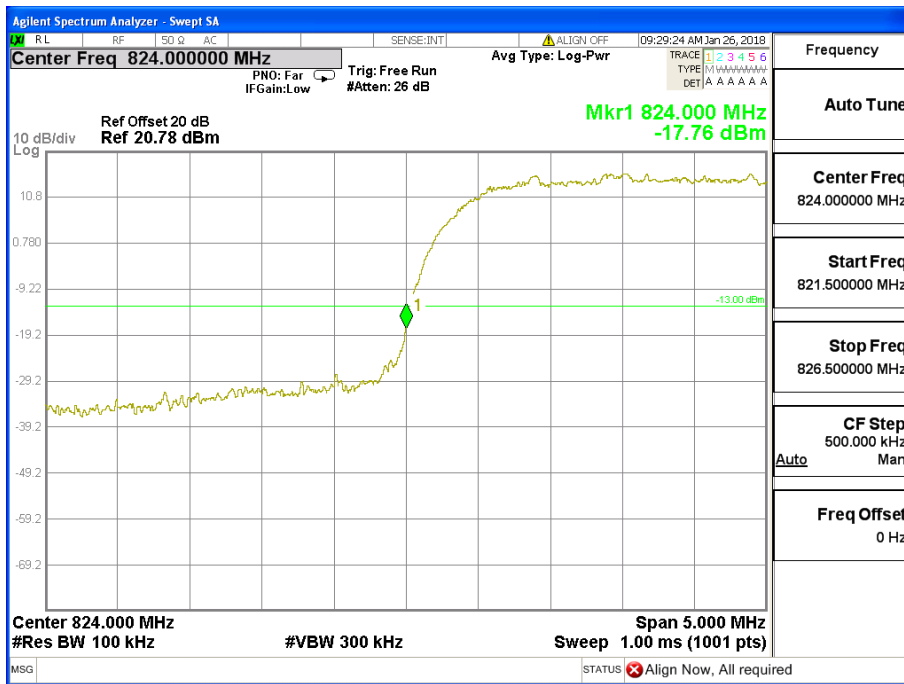

WCDMA Band V – Right band

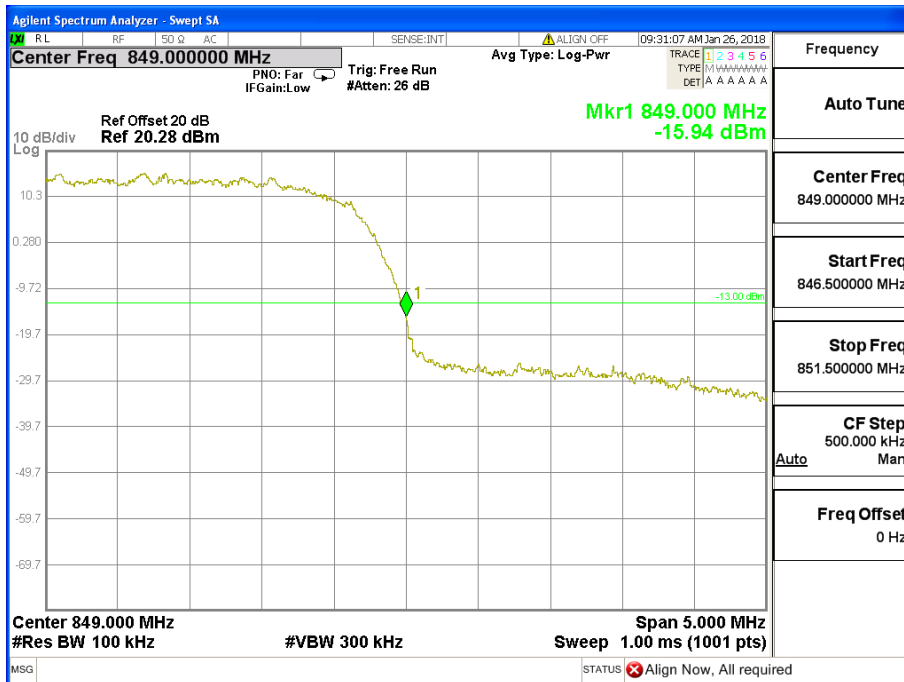

Note: all modes of EUT have been tested; only the data of worst case mode is reported.

## 5.6 Radiated spurious emission

### 5.6.1 Limit

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43+10\log(P)$  dB

### 5.6.2 Test method


1. The test system setup as show in the block diagram above.
2. The EUT was placed on an non-conductive rotating platform in an anechoic chamber. The radiated spurious emissions from 30MHz to 10<sup>th</sup> harmonious of fundamental frequency were measured at 3 m with a test antenna and a spectrum analyzer with RBW=1 MHz, VBW=1 MHz, peak detector settings.
3. During the measurement, the EUT was enforced in maximum power and linked with a base station. All the spurious emissions at 3m were measured by rotation of the turntable and the test antenna raised and lowered over a range from 1 to 4 meters in both horizontally and vertically polarized orientations.
4. When found the maximum level of emissions from the EUT. Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in dB= $10 \log(\text{TX power in Watts}/0.001)$ -the absolute level


Spurious attenuation limit in dB= $43+10 \log(\text{power out in Watts})$ .

### 5.6.3 Test setup


#### Radiated emission test-up frequency below 30MHz

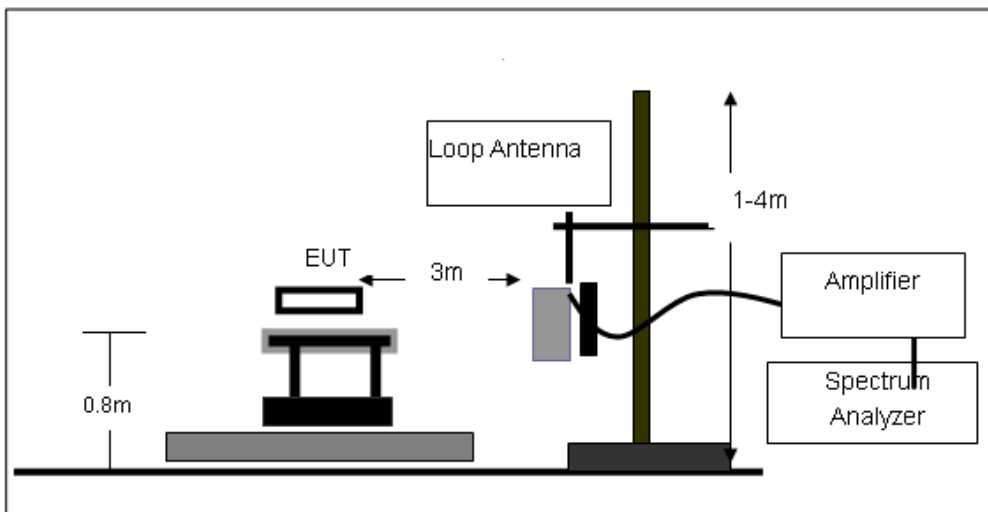

Radiated emission test-up frequency 30MHz~1GHz

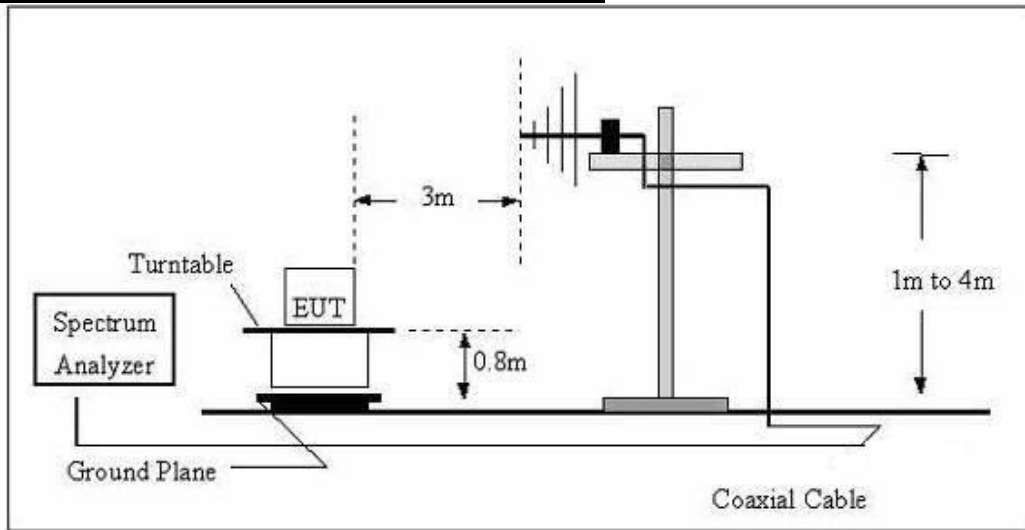

Radiated emission test-up frequency above 1GHz

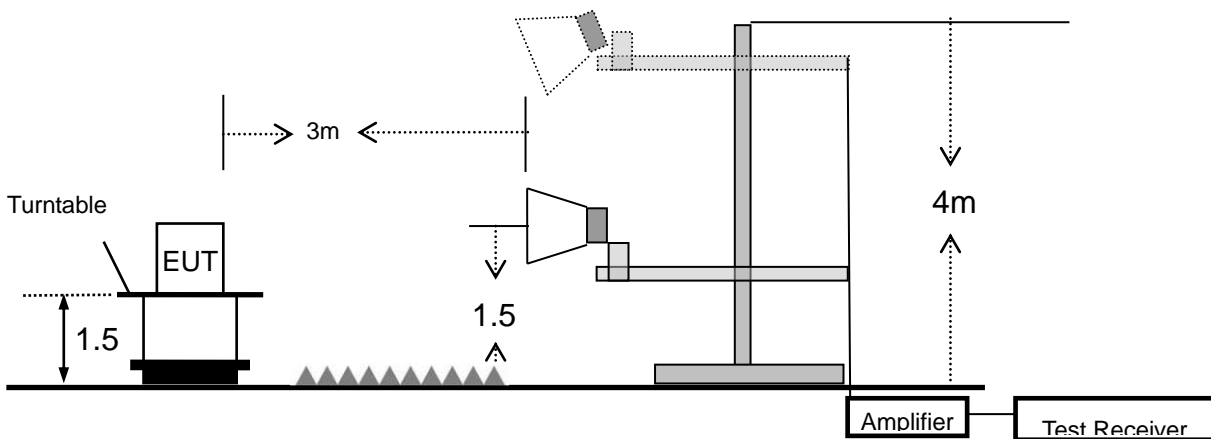

5.6.4 Test Result

Note: All the configuration was tested and only the worse case was reported

**For GSM850(30MHz – 9GHz)**

<b>GSM850_ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1648.4	-42.07	5.98	3	9.11	-38.94	-13	-25.94	H
2472.6	-46.45	6.84	3	9.56	-43.73	-13	-30.73	H
1648.4	-37.50	5.98	3	9.11	-34.37	-13	-21.37	V
2472.6	-42.42	6.84	3	9.56	-39.70	-13	-26.70	V
<b>GSM850_ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1673.2	-39.68	5.98	3	9.11	-36.55	-13	-23.55	H
2509.8	-42.03	6.84	3	9.56	-39.31	-13	-26.31	H
1673.2	-35.07	5.98	3	9.11	-31.94	-13	-18.94	V
2509.8	-37.68	6.84	3	9.56	-34.96	-13	-21.96	V
<b>GSM850_ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1697.6	-45.66	5.98	3	9.11	-42.53	-13	-29.53	H
2546.4	-50.26	6.84	3	9.56	-47.54	-13	-34.54	H
1697.6	-41.51	5.98	3	9.11	-38.38	-13	-25.38	V
2546.4	-45.40	6.84	3	9.56	-42.68	-13	-29.68	V

<b>GPRS850_Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1648.4	-49.20	3.86	3	8.56	-44.50	-13	-31.50	H
2472.6	-52.95	4.29	3	6.98	-50.26	-13	-37.26	H
1648.4	-44.15	3.86	3	8.56	-39.45	-13	-26.45	V
2472.6	-51.30	4.29	3	6.98	-48.61	-13	-35.61	V
<b>GPRS850_Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1673.2	-47.17	3.9	3	8.58	-42.49	-13	-29.49	H
2509.8	-51.91	4.32	3	6.8	-49.43	-13	-36.43	H
1673.2	-41.46	3.9	3	8.58	-36.78	-13	-23.78	V
2509.8	-49.30	4.32	3	6.8	-46.82	-13	-33.82	V
<b>GPRS850_High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1697.6	-53.51	3.91	3	9.06	-48.36	-13	-35.36	H
2546.4	-55.48	4.32	3	6.65	-53.15	-13	-40.15	H
1697.6	-50.89	3.91	3	9.06	-45.74	-13	-32.74	V
2546.4	-51.83	4.32	3	6.65	-49.50	-13	-36.50	V

<b>EGPRS850_Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1648.4	-51.58	3.86	3	8.56	-46.88	-13	-33.88	H
2472.6	-52.99	4.29	3	6.98	-50.30	-13	-37.30	H
1648.4	-48.96	3.86	3	8.56	-44.26	-13	-31.26	V
2472.6	-49.57	4.29	3	6.98	-46.88	-13	-33.88	V
<b>EGPRS850_Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1673.2	-51.68	3.9	3	8.58	-47.00	-13	-34.00	H
2509.8	-53.03	4.32	3	6.8	-50.55	-13	-37.55	H
1673.2	-49.15	3.9	3	8.58	-44.47	-13	-31.47	V
2509.8	-49.55	4.32	3	6.8	-47.07	-13	-34.07	V
<b>EGPRS850_High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1697.6	-51.65	3.91	3	9.06	-46.50	-13	-33.50	H
2546.4	-53.08	4.32	3	6.65	-50.75	-13	-37.75	H
1697.6	-48.70	3.91	3	9.06	-43.55	-13	-30.55	V
2546.4	-49.82	4.32	3	6.65	-47.49	-13	-34.49	V



<b>GSM1900_ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3700.4	-43.11	5.26	3	9.88	-38.49	-13	-25.49	H
5550.6	-47.29	6.11	3	11.36	-42.04	-13	-29.04	H
3700.4	-45.21	5.26	3	9.88	-40.59	-13	-27.59	V
5550.6	-49.29	6.11	3	11.36	-44.04	-13	-31.04	V
<b>GSM1900_ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3760	-40.22	5.32	3	10.03	-35.51	-13	-22.51	H
5640	-44.88	6.19	3	11.41	-39.66	-13	-26.66	H
3760	-43.27	5.32	3	10.03	-38.56	-13	-25.56	V
5640	-47.34	6.19	3	11.41	-42.12	-13	-29.12	V
<b>GSM1900_ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3819.6	-46.96	5.36	3	9.62	-42.70	-13	-29.70	H
5729.4	-51.43	6.24	3	11.46	-46.21	-13	-33.21	H
3819.6	-49.29	5.36	3	9.62	-45.03	-13	-32.03	V
5729.4	-55.35	6.24	3	11.46	-50.13	-13	-37.13	V

<b>GPRS1900_ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3700.4	-51.47	5.26	3	9.88	-46.85	-13	-33.85	H
5550.6	-57.93	6.11	3	11.36	-52.68	-13	-39.68	H
3700.4	-54.41	5.26	3	9.88	-49.79	-13	-36.79	V
5550.6	-62.49	6.11	3	11.36	-57.24	-13	-44.24	V
<b>GPRS1900_ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	EIRP(dBm)	(dBm)	(dB)	
3760	-47.09	5.32	3	10.03	-42.38	-13	-29.38	H
5640	-56.42	6.19	3	11.41	-51.20	-13	-38.20	H
3760	-49.73	5.32	3	10.03	-45.02	-13	-32.02	V
5640	-58.35	6.19	3	11.41	-53.13	-13	-40.13	V
<b>GPRS1900_ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3819.6	-58.94	5.36	3	9.62	-54.68	-13	-41.68	H
5729.4	-61.70	6.24	3	11.46	-56.48	-13	-43.48	H
3819.6	-60.52	5.36	3	9.62	-56.26	-13	-43.26	V
5729.4	-64.07	6.24	3	11.46	-58.85	-13	-45.85	V

<b>EGPRS1900_ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)	(m)	(dBi)	(dBm)	(dBm)	(dB)	
3700.4	-57.38	5.26	3	9.88	-52.76	-13	-39.76	H
5550.6	-48.75	6.11	3	11.36	-43.50	-13	-30.50	H
3700.4	-57.25	5.26	3	9.88	-52.63	-13	-39.63	V
5550.6	-50.22	6.11	3	11.36	-44.97	-13	-31.97	V
<b>EGPRS1900_ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)	(m)	(dBi)	EIRP(dBm)	(dBm)	(dB)	
3760	-56.02	5.32	3	10.03	-51.31	-13	-38.31	H
5640	-51.25	6.19	3	11.41	-46.03	-13	-33.03	H
3760	-50.36	5.32	3	10.03	-45.65	-13	-32.65	V
5640	-52.58	6.19	3	11.41	-47.36	-13	-34.36	V
<b>EGPRS1900_ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)	(m)	(dBi)	(dBm)	(dBm)	(dB)	
3819.6	-51.35	5.36	3	9.62	-47.09	-13	-34.09	H
5729.4	-45.35	6.24	3	11.46	-40.13	-13	-27.13	H
3819.6	-40.15	5.36	3	9.62	-35.89	-13	-22.89	V
5729.4	-38.25	6.24	3	11.46	-33.03	-13	-20.03	V

<b>WCDMA Band II _ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3704.8	-44.87	5.26	3	9.88	-40.25	-13	-27.25	H
5557.2	-49.11	6.11	3	11.36	-43.86	-13	-30.86	H
3704.8	-50.23	5.26	3	9.88	-45.61	-13	-32.61	V
5557.2	-55.74	6.11	3	11.36	-50.49	-13	-37.49	V
<b>WCDMA Band II _ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3760	-39.02	5.32	3	10.03	-34.31	-13	-21.31	H
5640	-48.24	6.19	3	11.41	-43.02	-13	-30.02	H
3760	-46.91	5.32	3	10.03	-42.20	-13	-29.20	V
5640	-54.25	6.19	3	11.41	-49.03	-13	-36.03	V
<b>WCDMA Band II _ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
3815.2	-49.50	5.36	3	9.62	-45.24	-13	-32.24	H
5722.8	-54.61	6.24	3	11.46	-49.39	-13	-36.39	H
3815.2	-53.53	5.36	3	9.62	-49.27	-13	-36.27	V
5722.8	-57.30	6.24	3	11.46	-52.08	-13	-39.08	V

<b>WCDMA Band IV _ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1946.4	-45.73	3.86	3	8.56	-41.03	-13	-28.03	H
3424.8	-48.38	4.29	3	6.98	-45.69	-13	-32.69	H
1946.4	-42.82	3.86	3	8.56	-38.12	-13	-25.12	V
3424.8	-42.61	4.29	3	6.98	-39.92	-13	-26.92	V
<b>WCDMA Band IV _ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1982.4	-43.71	3.9	3	8.58	-39.03	-13	-26.03	H
3480	-45.02	4.32	3	6.8	-42.54	-13	-29.54	H
1982.4	-38.92	3.9	3	8.58	-34.24	-13	-21.24	V
3480	-42.50	4.32	3	6.8	-40.02	-13	-27.02	V
<b>WCDMA Band IV _ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
2015.2	-47.82	3.91	3	9.06	-42.67	-13	-29.67	H
3505.2	-48.26	4.32	3	6.65	-45.93	-13	-32.93	H
2015.2	-44.14	3.91	3	9.06	-38.99	-13	-25.99	V
3505.2	-44.52	4.32	3	6.65	-42.19	-13	-29.19	V

<b>WCDMA Band V _ Low Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1652.8	-46.72	3.86	3	8.56	-42.02	-13	-29.02	H
2479.2	-48.35	4.29	3	6.98	-45.66	-13	-32.66	H
1652.8	-42.06	3.86	3	8.56	-37.36	-13	-24.36	V
2479.2	-42.01	4.29	3	6.98	-39.32	-13	-26.32	V
<b>WCDMA Band V _ Middle Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1672.8	-44.29	3.9	3	8.58	-39.61	-13	-26.61	H
2509.2	-45.33	4.32	3	6.8	-42.85	-13	-29.85	H
1672.8	-38.39	3.9	3	8.58	-33.71	-13	-20.71	V
2509.2	-42.92	4.32	3	6.8	-40.44	-13	-27.44	V
<b>WCDMA Band V _ High Channel</b>								
Frequency	SG Level	Cable Loss	Diatance	Antenna Gain	Absolute Level	Limit	Margin	Polarization
(MHz)	(dBm)	(dB)		(dB)	(dBm)	(dBm)	(dB)	
1693.2	-47.34	3.91	3	9.06	-42.19	-13	-29.19	H
2539.8	-48.82	4.32	3	6.65	-46.49	-13	-33.49	H
1693.2	-43.93	3.91	3	9.06	-38.78	-13	-25.78	V
2539.8	-44.88	4.32	3	6.65	-42.55	-13	-29.55	V

## 5.7 Frequency stability

### 5.7.1 Limit

For FCC part 22.355: the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances 2.5ppm for mobile  $\leq$  3W condition.

For FCC part 24.235: The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

### 5.7.2 Test method

#### Test Procedures for Temperature Variation:

- 1, The EUT was set up in the thermal chamber and connected with the base station.
- 2, With power off, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 3, With power off, the temperature was raised in  $10^{\circ}\text{C}$  set up to  $50^{\circ}\text{C}$  and the EUT was stabilized for three hours. Power was applied and the maximum change in frequency was recorded within one minute.
- 4, measure the carrier frequency error.

#### Test Procedures for Voltage Variation:

- 1, The EUT was placed in a temperature chamber at  $25\pm 5^{\circ}\text{C}$  and connected with the base station.
- 2, Reduce the primary supply voltage to the battery operating end point.
- 3, measure the carrier frequency error.

### 5.7.3 Test Result

Band	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
GSM 850	4.26	22	0.0263
	3.8	17	0.0203
	3.15	12	0.0143

Band	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
GSM 850	-30	24	0.0287
	-20	18	0.0215
	-10	21	0.0251
	0	17	0.0203
	10	12	0.0143
	20	25	0.0299
	30	13	0.0155
	40	26	0.0311
	50	31	0.0371

Band	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
GSM 1900	4.26	37	0.0197
	3.8	31	0.0165
	3.15	27	0.0144

Band	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
GSM 1900	-30	35	0.0186
	-20	32	0.0170
	-10	30	0.0160
	0	31	0.0165
	10	22	0.0117
	20	26	0.0138
	30	34	0.0181
	40	22	0.0117
	50	21	0.0112



Band	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
WCDMA Band II	4.26	11	0.0059
	3.8	18	0.0096
	3.15	25	0.0133

Band	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
WCDMA Band II	-30	37	0.0197
	-20	15	0.0080
	-10	16	0.0085
	0	32	0.0170
	10	19	0.0101
	20	17	0.0090
	30	24	0.0128
	40	18	0.0096
	50	23	0.0122

Band	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
WCDMA Band IV	4.26	15.28	0.009
	3.8	20.91	0.012
	3.15	19.33	0.011

Band	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
WCDMA Band IV	-30	16.52	0.009
	-20	19.20	0.011
	-10	14.64	0.008
	0	19.79	0.011
	10	25.87	0.015
	20	19.07	0.011
	30	15.93	0.009
	40	16.28	0.009
	50	13.94	0.008

Band	Voltage (V)	Frequency Error (Hz)	Frequency Error (ppm)
WCDMA Band V	4.26	25	0.0299
	3.8	17	0.0203
	3.15	18	0.0215


Band	Temperature (°C)	Frequency Error (Hz)	Frequency Error (ppm)
WCDMA Band V	-30	33	0.0395
	-20	31	0.0371
	-10	26	0.0311
	0	25	0.0299
	10	21	0.0251
	20	19	0.0227
	30	14	0.0167
	40	26	0.0311
	50	19	0.0227

Note:

1. Normal Voltage = 3.8V; Battery End Point (BEP) = 3.15V; Maximum Voltage =4.26V
2. All modes of EUT have been tested; only the data of worst case mode is reported.

### Photographs of the Test Setup

Radiated emission

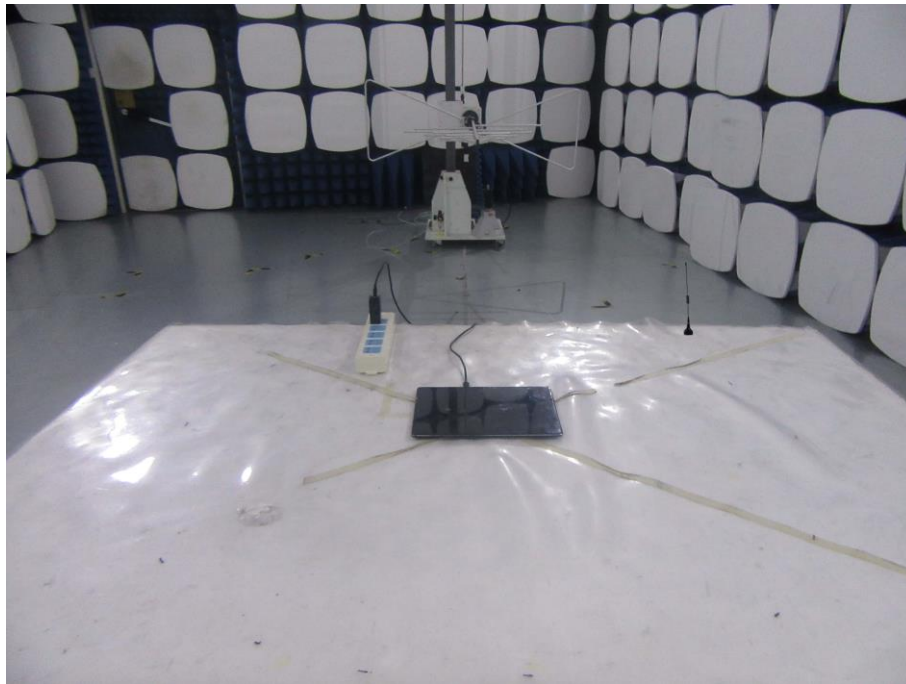

## **Photographs of the EUT**

See the APPENDIX 1: EUT PHOTO in the report No.: MTi180724E135-1.

**----END OF REPORT----**