



# TEST REPORT

**Test report  
On Behalf of  
Shenzhen Ai-Thinker Technology Co., Ltd.  
For  
Wi-Fi Module  
Model No.: ESP-13  
FCC ID: 2AHMR-ESP-13**

**Prepared for : Shenzhen Ai-Thinker Technology Co., Ltd.  
6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district,  
Shenzhen China**

**Prepared By : Shenzhen HUAKE Testing Technology Co., Ltd.  
1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street,  
Bao'an District, Shenzhen City, China**

**Date of Test: Nov. 26, 2019 ~ Dec. 12, 2019  
Date of Report: Dec. 12, 2019  
Report Number: HK1911293052-1E**



## TEST RESULT CERTIFICATION

**Applicant's name .....**: Shenzhen Ai-Thinker Technology Co., Ltd.  
Address.....: 6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen China

**Manufacture's Name .....**: Shenzhen Ai-Thinker Technology Co., Ltd.  
Address.....: 6/F, Block C2, Huafeng Industrial Park, Hangcheng Road, Baoan district, Shenzhen China

### Product description

Trade Mark: N/A  
Product name .....: Wi-Fi Module  
Model and/or type reference .. : ESP-13  
**Standards .....**: FCC Rules and Regulations Part 15 Subpart C Section 15.247  
ANSI C63.10: 2013

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

### Date of Test.....:

Date (s) of performance of tests.....: Nov. 26, 2019 ~ Dec. 12, 2019

Date of Issue.....: Dec. 12, 2019

Test Result.....: **Pass**


Testing Engineer : 

(Gary Qian)

Technical Manager : 

(Eden Hu)

Authorized Signatory :



(Jason Zhou)



## TABLE OF CONTENTS

<b>1. Test Result Summary.....</b>	<b>4</b>
1.1. TEST PROCEDURES AND RESULTS .....	4
1.2. TEST FACILITY .....	4
1.3. MEASUREMENT UNCERTAINTY .....	5
<b>2. EUT Description.....</b>	<b>6</b>
2.1. GENERAL DESCRIPTION OF EUT.....	6
2.2. CARRIER FREQUENCY OF CHANNELS.....	7
2.3. OPERATION OF EUT DURING TESTING.....	7
2.4. DESCRIPTION OF TEST SETUP .....	7
<b>3. Genera Information .....</b>	<b>8</b>
3.1. TEST ENVIRONMENT AND MODE .....	8
3.2. DESCRIPTION OF SUPPORT UNITS .....	9
<b>4. Test Results and Measurement Data .....</b>	<b>10</b>
4.1. CONDUCTED EMISSION .....	10
4.2. MAXIMUM CONDUCTED OUTPUT POWER .....	14
4.3. EMISSION BANDWIDTH.....	16
4.4. POWER SPECTRAL DENSITY.....	21
4.5. CONDUCTED BAND EDGE AND SPURIOUS EMISSION MEASUREMENT .....	26
4.6. RADIATED SPURIOUS EMISSION MEASUREMENT.....	31
4.7. ANTENNA REQUIREMENT.....	52
4.8. PHOTOGRAPH OF TEST .....	53



## 1. Test Result Summary

### 1.1. TEST PROCEDURES AND RESULTS

Requirement	CFR 47 Section	Result
Antenna requirement	§15.203/§15.247 (c)	PASS
AC Power Line Conducted Emission	§15.207	PASS
Conducted Peak Output Power	§15.247 (b)(3) §2.1046	PASS
6dB Emission Bandwidth	§15.247 (a)(2) §2.1049	PASS
Power Spectral Density	§15.247 (e)	PASS
Band Edge	1§5.247(d) §2.1051, §2.1057	PASS
Spurious Emission	§15.205/§15.209 §2.1053, §2.1057	PASS

**Note:**

1. PASS: *Test item meets the requirement.*
2. Fail: *Test item does not meet the requirement.*
3. N/A: *Test case does not apply to the test object.*
4. *The test result judgment is decided by the limit of test standard.*

### 1.2. TEST FACILITY

Test Firm : Shenzhen HUAK Testing Technology Co., Ltd.

Address 1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China



### 1.3. Measurement Uncertainty

The reported uncertainty of measurement  $y \pm U$ , where expended uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately 95 %.

No.	Item	MU
1	Conducted Emission	$\pm 2.56\text{dB}$
2	RF power, conducted	$\pm 0.12\text{dB}$
3	Spurious emissions, conducted	$\pm 0.11\text{dB}$
4	All emissions, radiated(<1G)	$\pm 3.92\text{dB}$
5	All emissions, radiated(>1G)	$\pm 4.28\text{dB}$
6	Temperature	$\pm 0.1^\circ\text{C}$
7	Humidity	$\pm 1.0\%$



## 2. EUT Description

### 2.1. GENERAL DESCRIPTION OF EUT

Equipment	Wi-Fi Module
Model Name	ESP-13
Serial No.	N/A
Model Difference	N/A
Trade Mark	N/A
Antenna Type	PCB Antenna
Antenna Gain	3dBi
Operation frequency	802.11b/g/n 20:2412~2462MHz
Number of Channels	802.11b/g/n20: 11CH
Modulation Type	CCK/OFDM/DBPSK/DAPSK
Power Source	DC 3.3V
Power Rating	DC 3.3V



## 2.2. Carrier Frequency of Channels

Channel List for 802.11b/802.11g/802.11n (HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

**Note:**

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

## 2.3. Operation of EUT during testing

Operating Mode

The mode is used: **Transmitting mode for 802.11b/802.11g/802.11n (HT20)**


Low Channel: 2412MHz

Middle Channel: 2437MHz

High Channel: 2462MHz

## 2.4. DESCRIPTION OF TEST SETUP

Operation of EUT during conducted testing and Radiation and Above1GHz Radiation testing:





### 3. General Information

#### 3.1. Test environment and mode

<b>Operating Environment:</b>	
Temperature:	25.0 °C
Humidity:	56 % RH
Atmospheric Pressure:	1010 mbar
<b>Test Mode:</b>	
Engineering mode:	Keep the EUT in continuous transmitting by select channel and modulations(The value of duty cycle is 98.46%)
The sample was placed (0.8m below 1GHz, 1.5m above 1GHz) above the ground plane of 3m chamber. Measurements in both horizontal and vertical polarities were performed. During the test, each emission was maximized by: having the EUT continuously working, investigated all operating modes, rotated about all 3 axis (X, Y & Z) and considered typical configuration to obtain worst position, manipulating interconnecting cables, rotating the turntable, varying antenna height from 1m to 4m in both horizontal and vertical polarizations. The emissions worst-case are shown in Test Results of the following pages. For the full battery state and The output power to the maximum state.	

We have verified the construction and function in typical operation. All the test modes were carried out with the EUT in transmitting operation, which was shown in this test report and defined as follows:

#### **Per-scan all kind of data rate in lowest channel, and found the follow list which it was worst case.**

Mode	Data rate
802.11b	1Mbps
802.11g	6Mbps
802.11n(H20)	6.5Mbps

#### **Final Test Mode:**

Operation mode:	Keep the EUT in continuous transmitting with modulation
-----------------	---

1. For WIFI function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.
2. According to ANSI C63.10 standards, the test results are both the “worst case” and “worst setup” 1Mbps for 802.11b, 6Mbps for 802.11g, 6.5Mbps for 802.11n(H20). Duty cycle setting during the transmission is 98.5% with maximum power setting for all modulations.



### 3.2. Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Equipment	Model No.	Serial No.	FCC ID	Trade Name
PC	Inspiron5570	JR4G1A00DP C	/	DELL
AC Adaptor	HA45NM140	CN-00285K-C H200-88V-OE YC-A06	/	DELL

**Note:**

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.
3. For conducted measurements (Output Power, 6dB Emission Bandwidth, Power Spectral Density, Spurious Emissions), the antenna of EUT is connected to the test equipment via temporary antenna connector, the antenna connector is soldered on the antenna port of EUT, and the temporary antenna connector is listed in the Test Instruments.



## 4. Test Results and Measurement Data

### 4.1. Conducted Emission

#### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.207														
<b>Test Method:</b>	ANSI C63.10:2013														
<b>Frequency Range:</b>	150 kHz to 30 MHz														
<b>Receiver setup:</b>	RBW=9 kHz, VBW=30 kHz, Sweep time=auto														
<b>Limits:</b>	<table border="1"><thead><tr><th rowspan="2">Frequency range (MHz)</th><th colspan="2">Limit (dBuV)</th></tr><tr><th>Quasi-peak</th><th>Average</th></tr></thead><tbody><tr><td>0.15-0.5</td><td>66 to 56*</td><td>56 to 46*</td></tr><tr><td>0.5-5</td><td>56</td><td>46</td></tr><tr><td>5-30</td><td>60</td><td>50</td></tr></tbody></table>	Frequency range (MHz)	Limit (dBuV)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dBuV)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													
<b>Test Setup:</b>	<p style="text-align: center;"><b>Reference Plane</b></p> <p><i>Remark: E.U.T: Equipment Under Test LISN: Line Impedance Stabilization Network Test table height=0.8m</i></p>														
<b>Test Mode:</b>	Charging + transmitting with modulation														
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The E.U.T is connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50ohm/50uH coupling impedance for the measuring equipment.</li><li>2. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refer to the block diagram of the test setup and photographs).</li><li>3. Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10: 2013 on conducted measurement.</li></ol>														
<b>Test Result:</b>	PASS														



## Test Instruments

Conducted Emission Shielding Room Test Site (843)				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI 7	HKE-010	Sep. 27, 2020
LISN	R&S	ENV216	HKE-002	Sep. 27, 2020
Conducted test software	Tonscend	TS+ Rev 2.5.0.0	HKE-081	N/A

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## Test data

Remark: We tested three Channels in AC 120V/60Hz and AC 230V/50Hz, the worst case was recorded.

Please refer to following diagram for individual

Conducted Emission on Line Terminal of the power line (150 kHz to 30MHz)

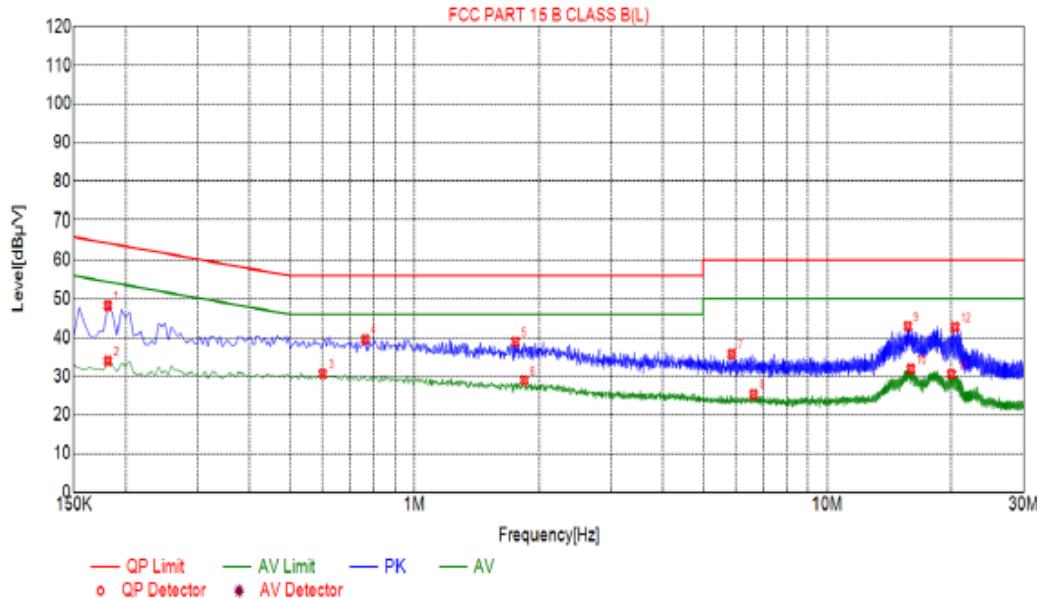


Suspected List						
NO.	Freq. [MHz]	Level [dB $\mu$ V]	Factor [dB]	Limit [dB $\mu$ V]	Margin [dB]	Detector
1	0.1815	48.27	10.06	64.42	16.15	PK
2	0.1815	33.96	10.06	54.42	20.46	AV
3	0.6000	30.62	10.05	46.00	15.38	AV
4	0.7620	39.59	10.05	56.00	16.41	PK
5	1.7610	38.90	10.14	56.00	17.10	PK
6	1.8510	28.94	10.14	46.00	17.06	AV
7	5.8695	35.74	10.24	60.00	24.26	PK
8	6.6390	25.34	10.21	50.00	24.66	AV
9	15.7020	42.92	9.97	60.00	17.08	PK
10	15.9630	31.88	9.98	50.00	18.12	AV
11	20.0265	30.49	10.10	50.00	19.51	AV
12	20.3955	42.70	10.12	60.00	17.30	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.

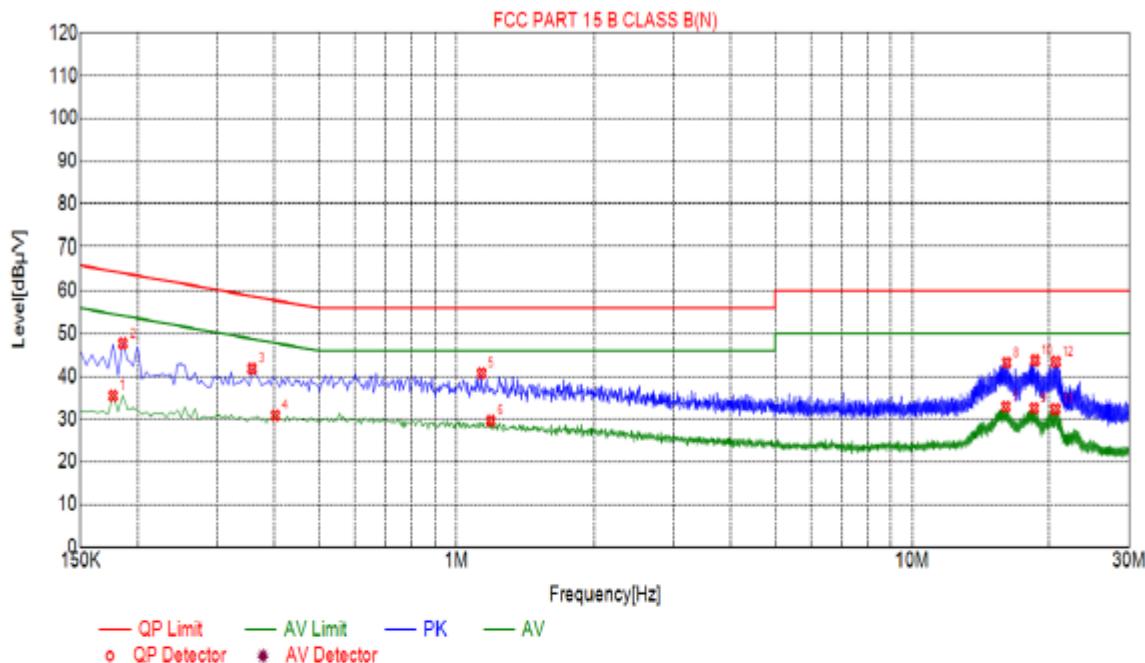**Conducted Emission on Neutral Terminal of the power line (150 kHz to 30MHz)**

Suspected List						
NO.	Freq. [MHz]	Level [dB $\mu$ V]	Factor [dB]	Limit [dB $\mu$ V]	Margin [dB]	Detector
1	0.1770	35.51	10.05	54.63	19.12	AV
2	0.1860	47.75	10.05	64.21	16.46	PK
3	0.3570	41.82	10.03	58.80	16.98	PK
4	0.4020	30.85	10.04	47.81	16.96	AV
5	1.1355	40.71	10.09	56.00	15.29	PK
6	1.1895	29.60	10.09	46.00	16.40	AV
7	16.0800	32.89	9.98	50.00	17.11	AV
8	16.1475	43.22	9.98	60.00	16.78	PK
9	18.5640	32.52	10.05	50.00	17.48	AV
10	18.6585	43.75	10.06	60.00	16.25	PK
11	20.6260	32.29	10.12	50.00	17.71	AV
12	20.6655	43.43	10.13	60.00	16.57	PK

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

**Notes:**

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Final Level = Receiver Read level + LISN Factor + Cable Loss.
4. If the average limit is met when using a quasi-peak detector receiver, the EUT shall be deemed to meet both limits and measurement with the average detector receiver is unnecessary.



## 4.2. Maximum Conducted Output Power

### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (b)(3)
<b>Test Method:</b>	KDB 558074, April 2017
<b>Limit:</b>	30dBm
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. A green rectangular box labeled "Power meter" has two ports. One port is connected via a short grey line to a small white rectangular component labeled "attenuator". The other port is connected via another short grey line to a yellow rectangular box labeled "EUT".</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v04.</li><li>2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Measure the output power and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Power meter	Agilent	E4417B	HKE-107	Sep. 27, 2020
Power Sensor	Agilent	E9327A	HKE-113	Sep. 27, 2020
RF cable	Times	1-40G	HKE-034	Sep. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## Test Data

<b>TX 802.11b Mode</b>			
Test Channel	Frequency	Maximum Conducted Output Power	LIMIT
	(MHz)	(dBm)	dBm
CH01	2412	14.825	30
CH06	2437	14.951	30
CH11	2462	15.006	30

<b>TX 802.11g Mode</b>			
CH01	2412	12.944	30
CH06	2437	12.4	30
CH11	2462	12.494	30

<b>TX 802.11n20 Mode</b>			
CH01	2412	11.972	30
CH06	2437	12.014	30
CH11	2462	11.665	30



### 4.3. Emission Bandwidth

#### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (a)(2)
<b>Test Method:</b>	KDB 558074, April 2017
<b>Limit:</b>	>500kHz
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) through a grey cable. Both the analyzer and the EUT have black ground connections.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v04.</li><li>2. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>3. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.</li><li>4. Measure and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

#### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Sep. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**

Test channel	6dB Emission Bandwidth (MHz)		
	802.11b	802.11g	802.11n(H20)
Lowest	8.5733	16.3051	16.2748
Middle	8.0939	16.0498	15.777
Highest	8.5486	16.2896	16.2661
Limit:	>500k		
Test Result:	PASS		


Test channel	99% Occupied Bandwidth (MHz)		
	802.11b	802.11g	802.11n(H20)
Lowest	11.2008	16.3261	17.3782
Middle	11.138	16.3315	17.3479
Highest	11.1199	16.3188	17.3452
Limit:	>500k		
Test Result:	PASS		

**Test plots as follows:**




## 802.11b Modulation


### Lowest channel

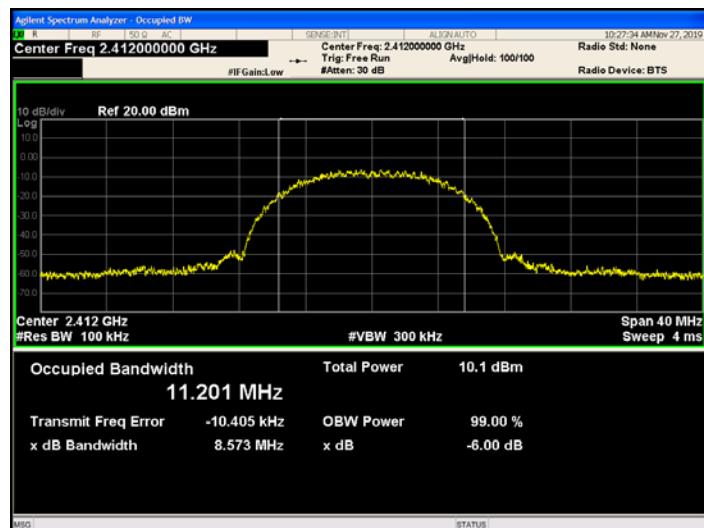

### Middle channel

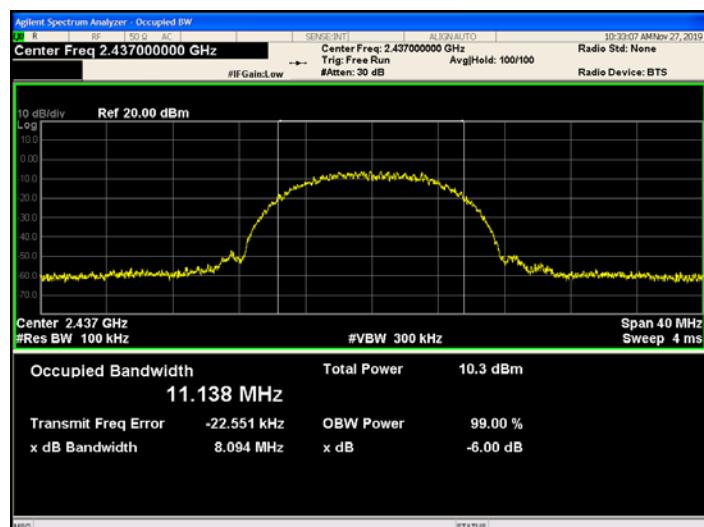


### Highest channel

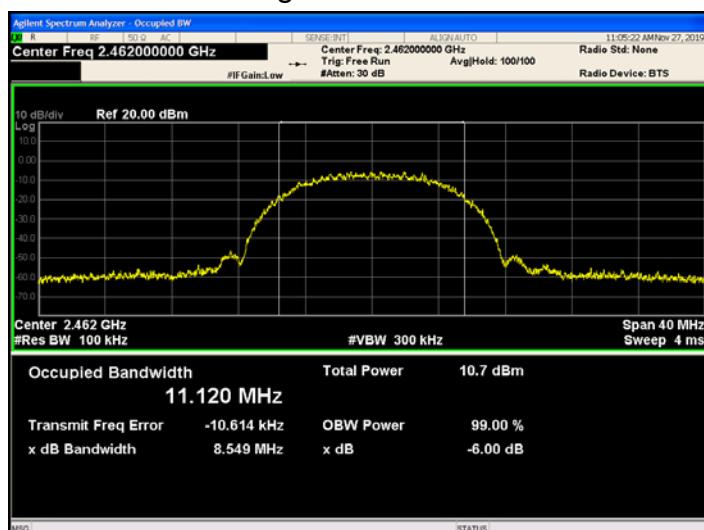




## 802.11g Modulation


## Lowest channel



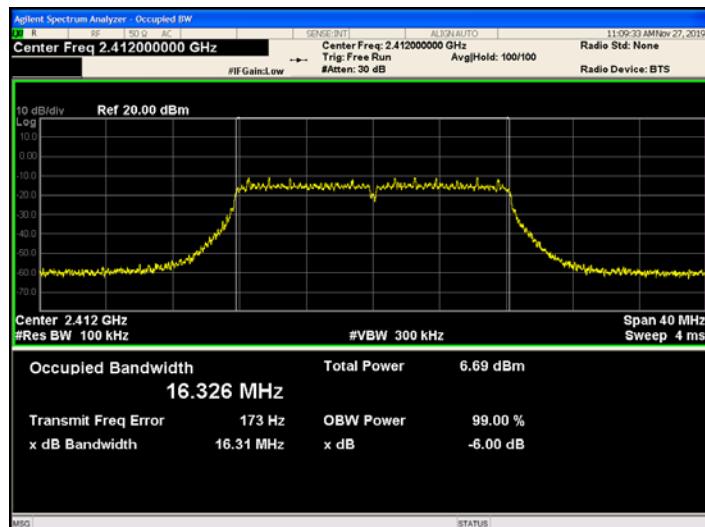


## Middle channel

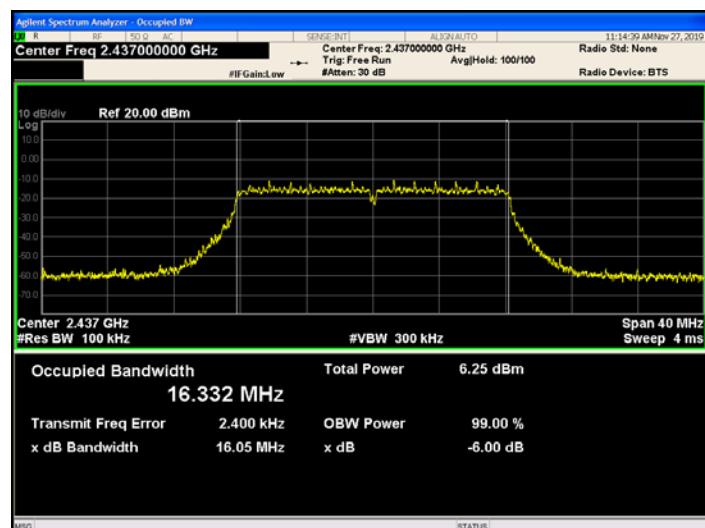

## Highest channel

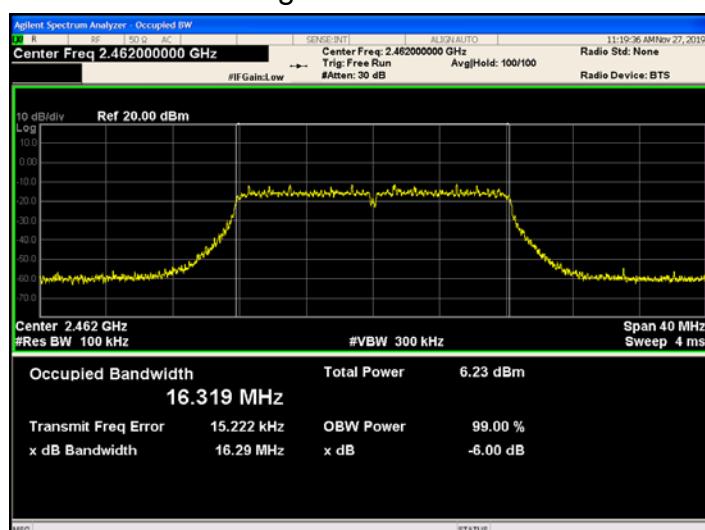

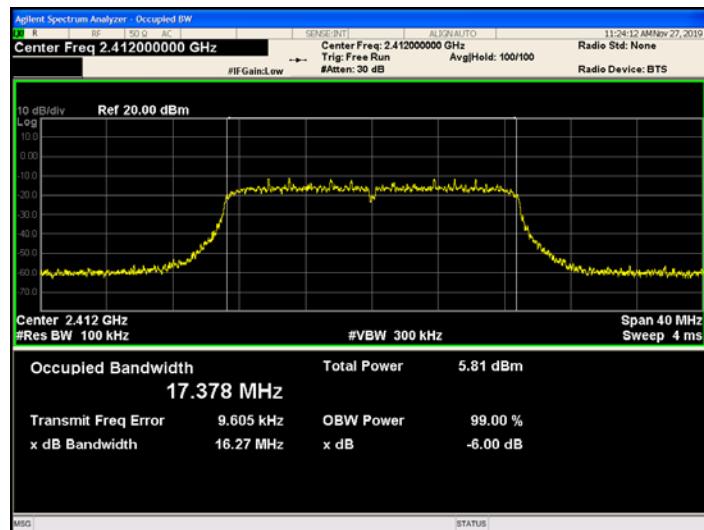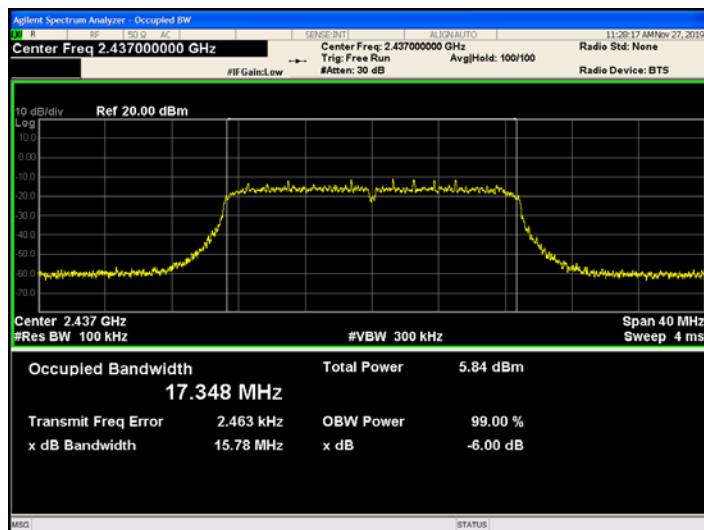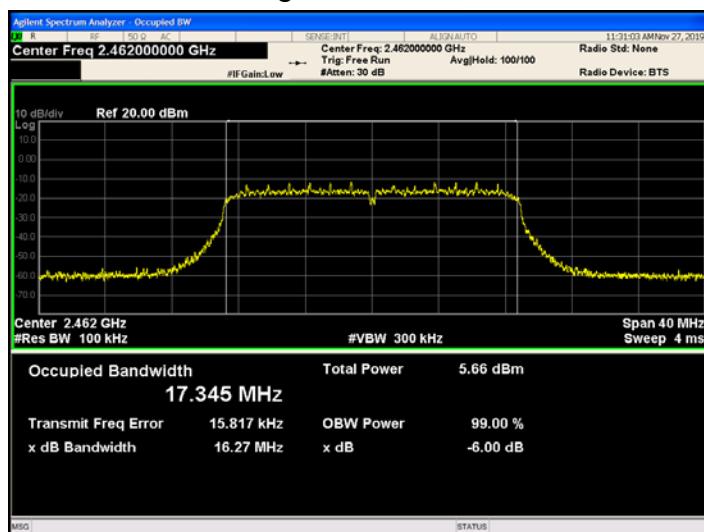**802.11n (HT20) Modulation****Lowest channel****Middle channel****Highest channel**



## Power Spectral Density

### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (e)
<b>Test Method:</b>	KDB 558074, April 2017
<b>Limit:</b>	The average power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) through a grey 'RF cable'. A small white rectangular component, labeled 'Attenuator', is placed between the spectrum analyzer and the EUT. The connection points are marked with red dots.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows Measurement procedure 10.2 method PKPSD of FCC KDB Publication No.558074 D01 DTS Meas. Guidance v04</li><li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW): <math>3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}</math>. Video bandwidth VBW <math>\geq 3 \times \text{RBW}</math>. Set the span to at least 1.5 times the OBW.</li><li>5. Detector = RMS, Sweep time = auto couple.</li><li>6. Employ trace averaging (RMS) mode over a minimum of 100 traces. Use the peak marker function to determine the maximum power level.</li><li>7. Measure and record the results in the test report.</li></ol>
<b>Test Result:</b>	PASS

### Test Instruments

RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Sep. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).

**Test data**


Test channel	Power Spectral Density (dBm/3kHz)		
	802.11b	802.11g	802.11n(H20)
Lowest	-15.222	-19.493	-19.607
Middle	-14.798	-19.367	-19.849
Highest	-14.735	-19.561	-19.558
Limit:	8dBm/3kHz		
Test Result:	PASS		

**Test plots as follows:**




## 802.11b Modulation


### Lowest channel

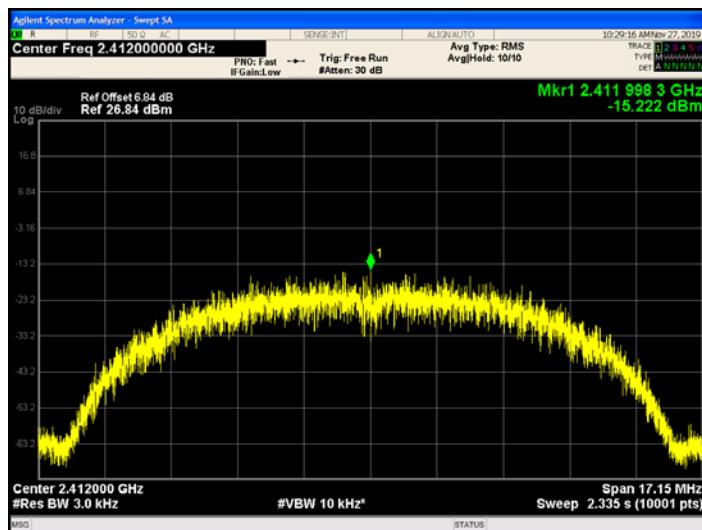

### Middle channel

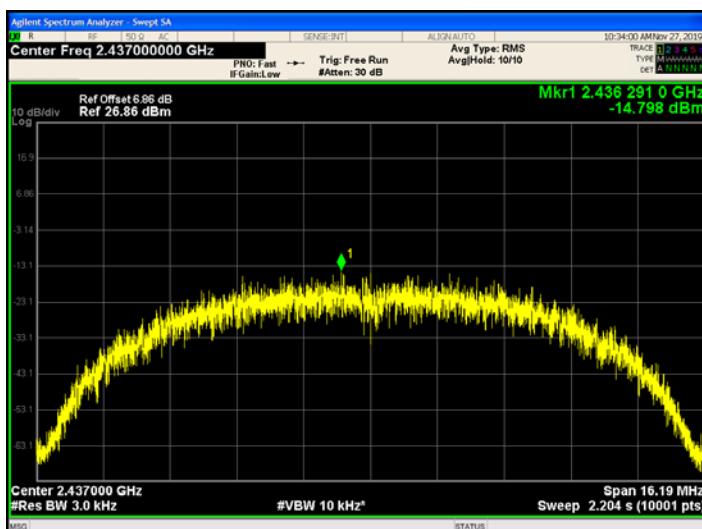


### Highest channel

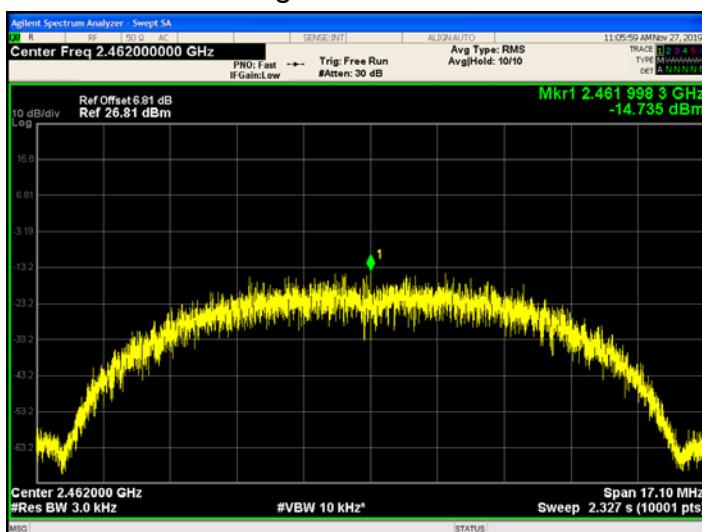




## 802.11g Modulation


## Lowest channel

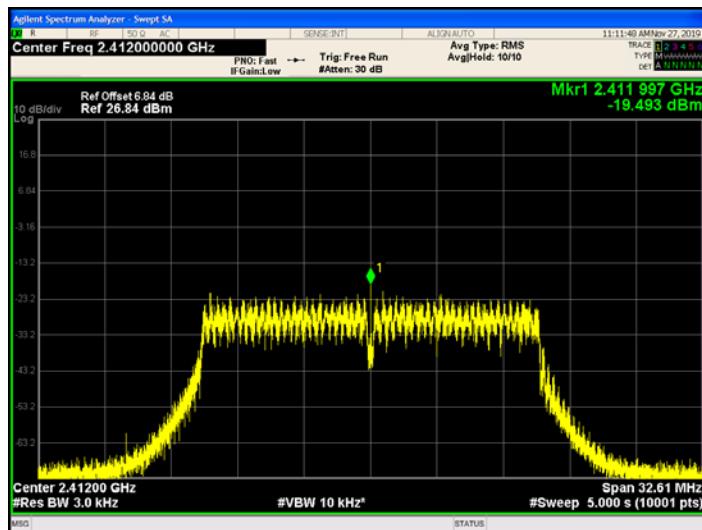

## Middle channel

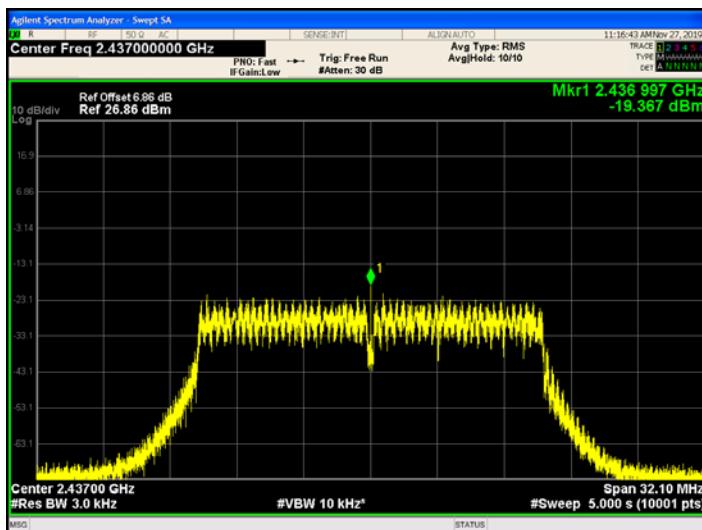


## Highest channel

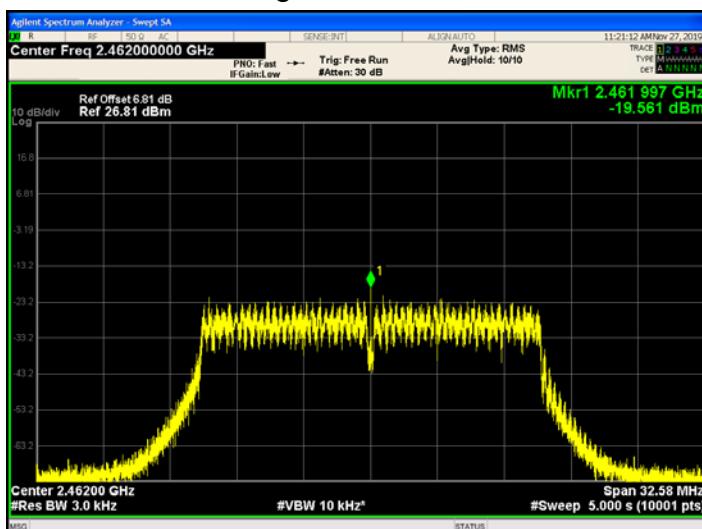




## 802.11n (HT20) Modulation


## Lowest channel

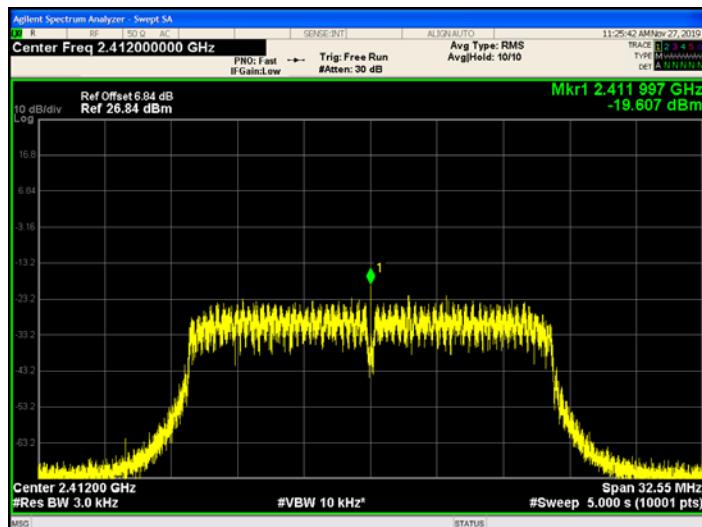

## Middle channel

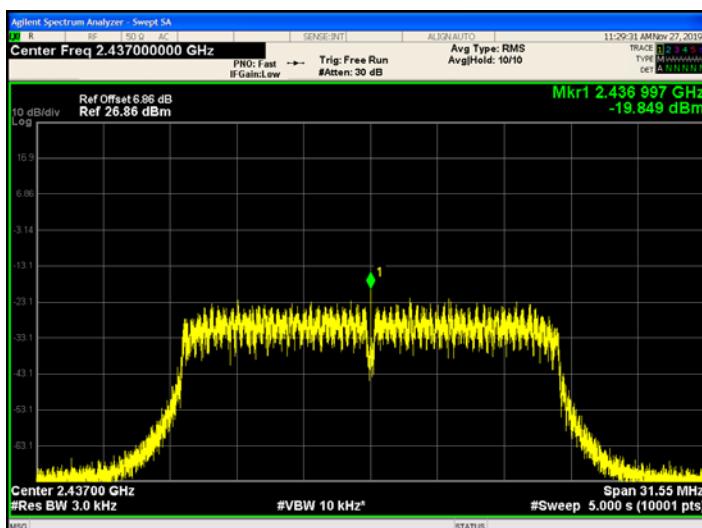

## Highest channel

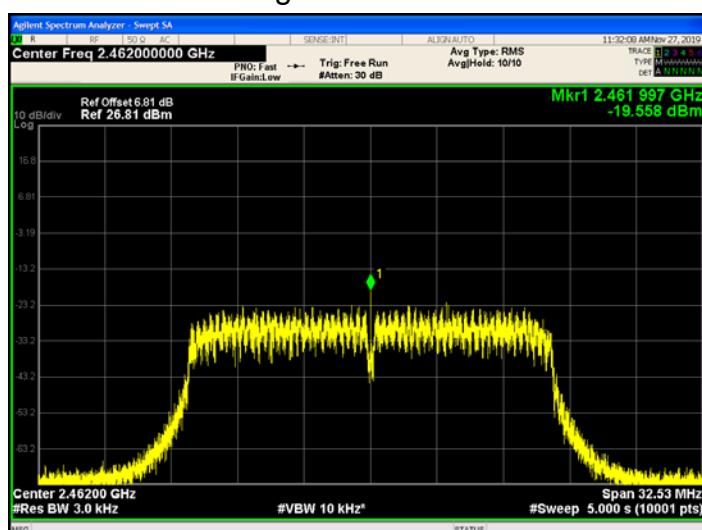



#### 4.4. Conducted Band Edge and Spurious Emission Measurement

##### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.247 (d)
<b>Test Method:</b>	KDB558074, April 2017
<b>Limit:</b>	In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).
<b>Test Setup:</b>	<p>The diagram illustrates the test setup. A green 'Spectrum Analyzer' is connected to a yellow 'EUT' (Equipment Under Test) through a grey RF cable. A small white rectangular component, labeled 'Attenuator', is placed between the spectrum analyzer and the EUT.</p>
<b>Test Mode:</b>	Transmitting mode with modulation
<b>Test Procedure:</b>	<ol style="list-style-type: none"><li>1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v04.</li><li>2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.</li><li>3. Set to the maximum power setting and enable the EUT transmit continuously.</li><li>4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).</li><li>5. Measure and record the results in the test report.</li><li>6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.</li></ol>
<b>Test Result:</b>	PASS



## Test Instruments


RF Test Room				
Equipment	Manufacturer	Model	Serial Number	Calibration Due
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2020
Signal generator	Agilent	N5183A	HKE-071	Sep. 27, 2020
RF Cable (9KHz-26.5GHz)	Tonscend	170660	N/A	Sep. 27, 2020
RF automatic control unit	Tonscend	JS0806-2	HKE-060	Sep. 27, 2020

**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).




## Test Data

### 802.11b Modulation

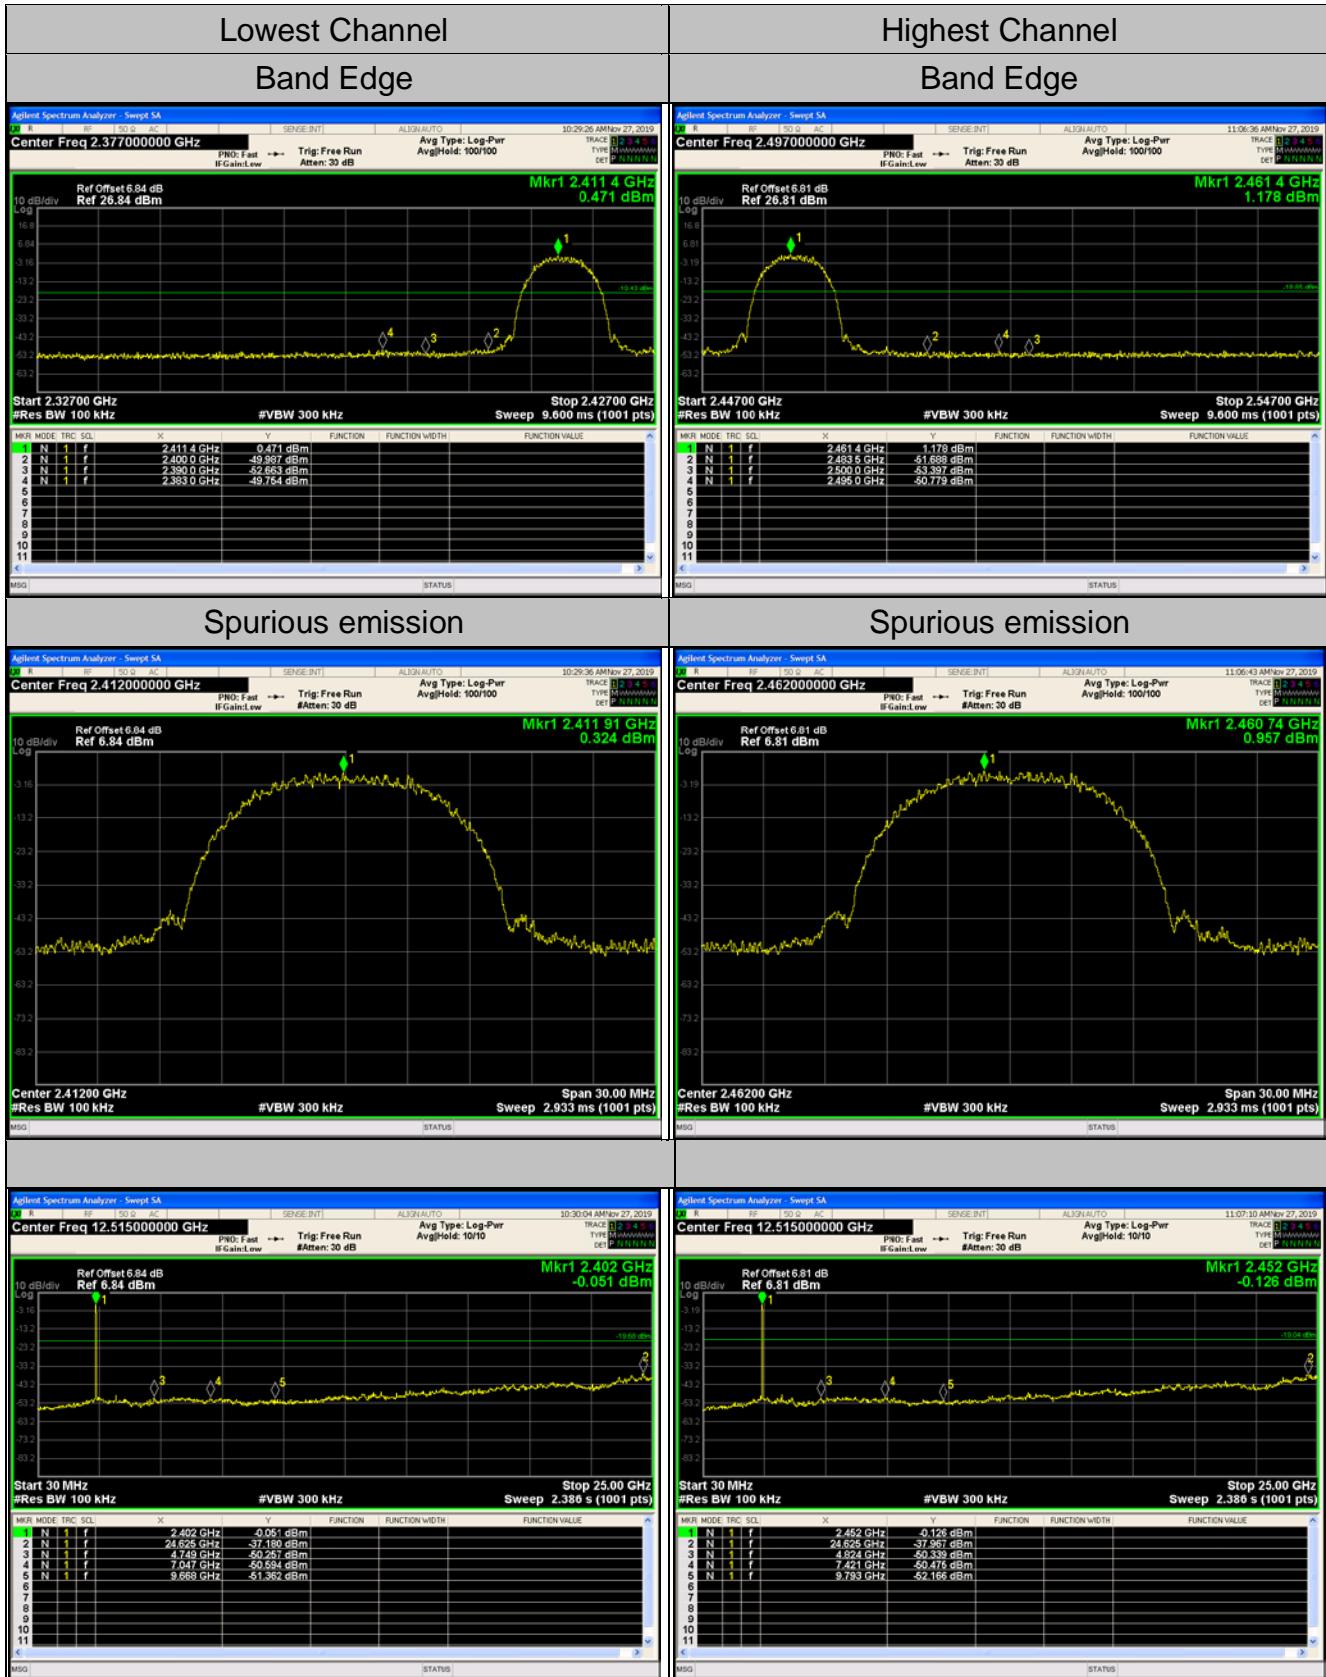




## 802.11g Modulation

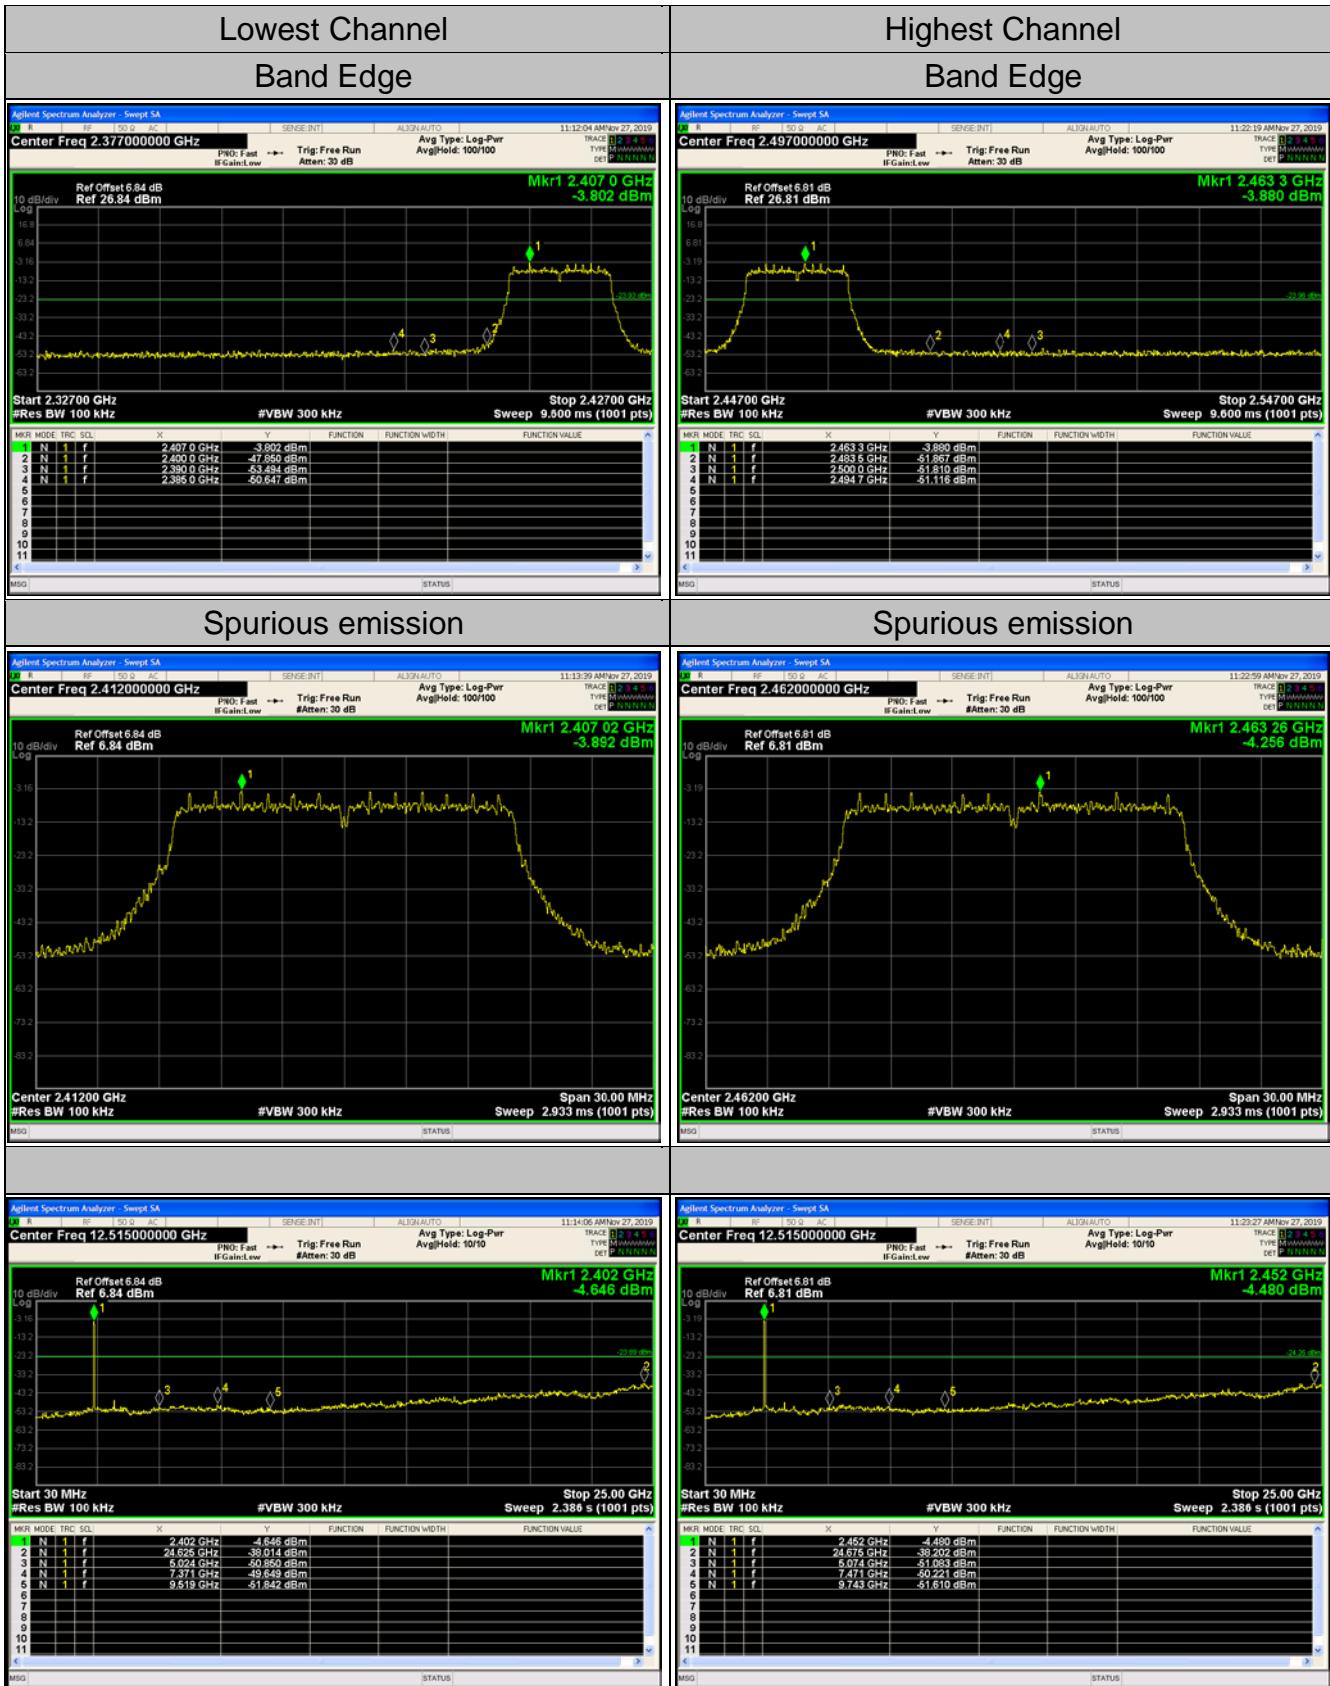




## 802.11n (HT20) Modulation

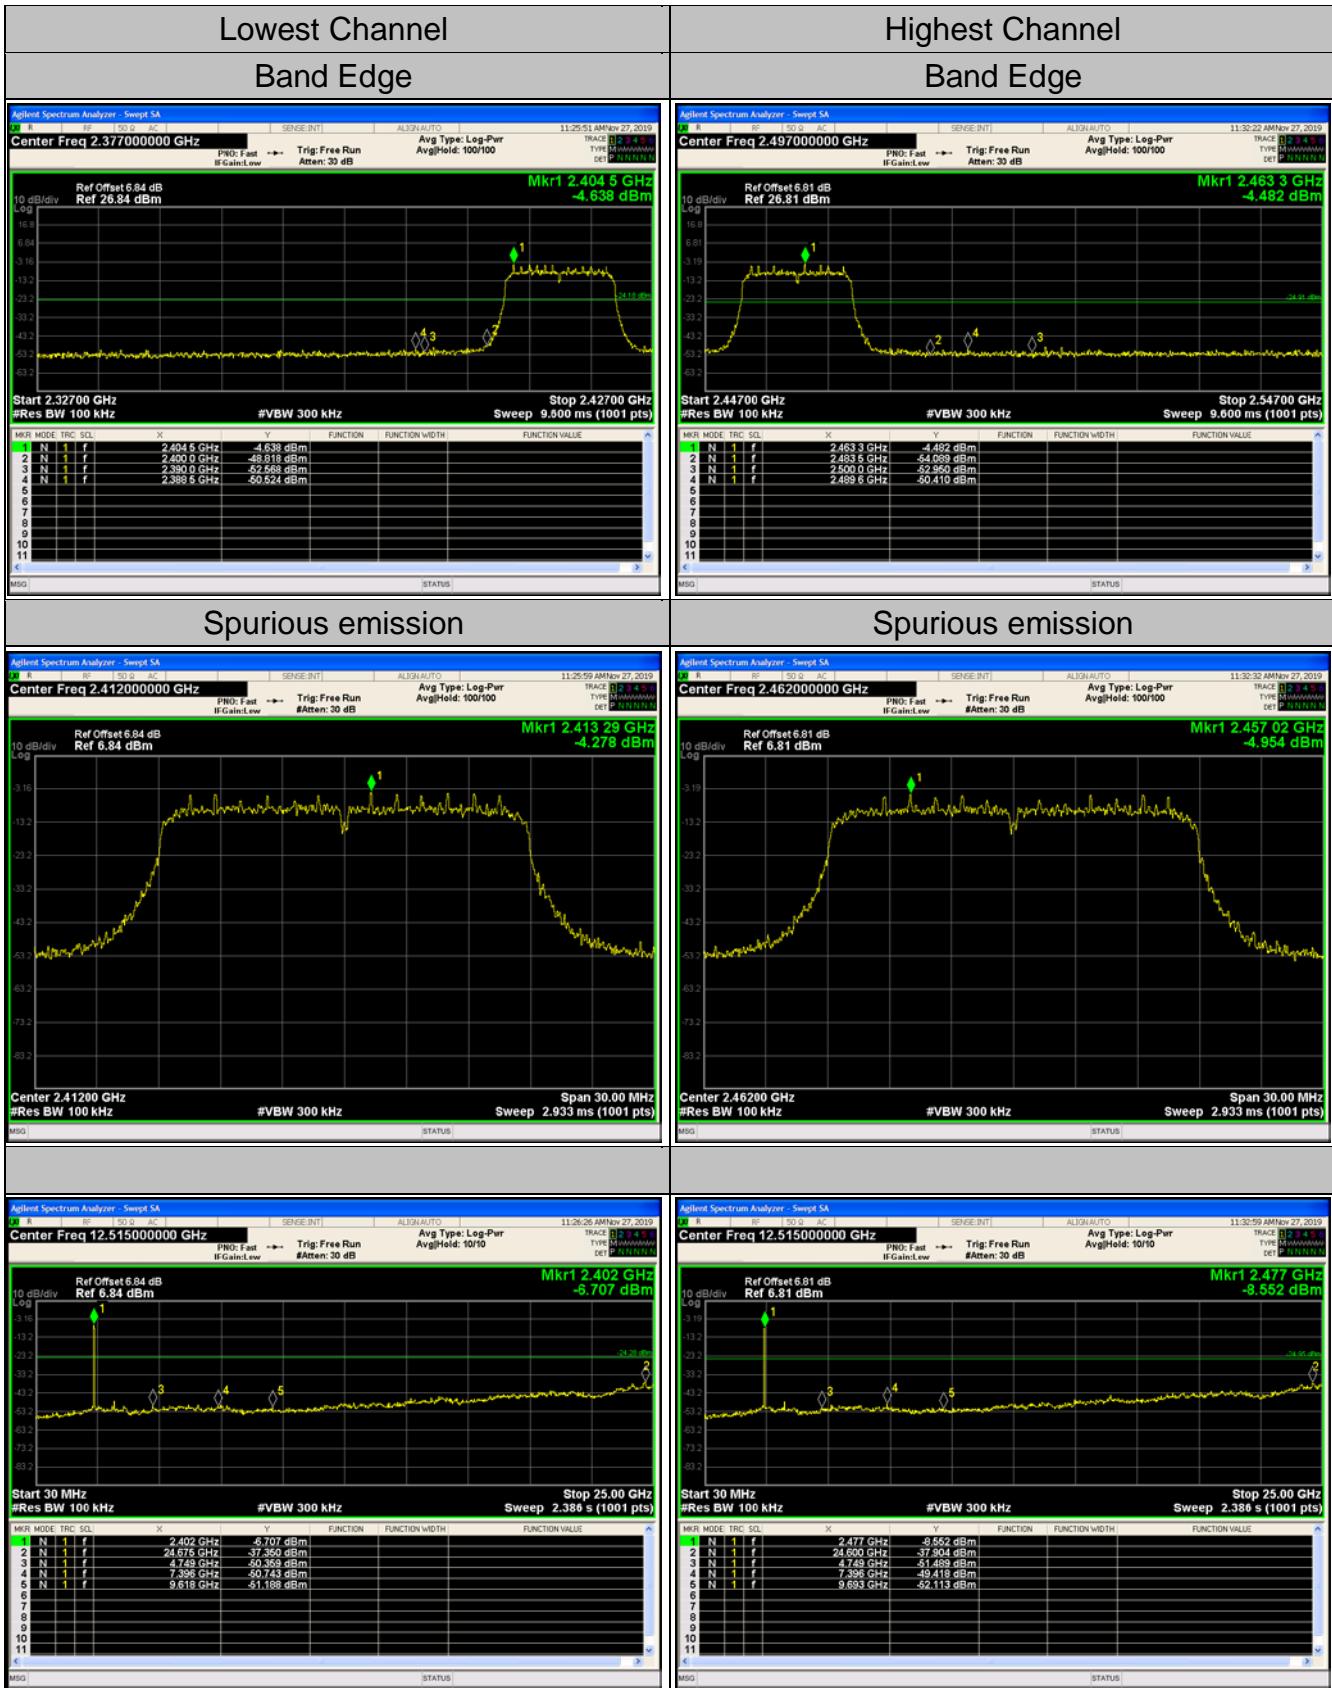


## 4.5. Radiated Spurious Emission Measurement

### Test Specification

<b>Test Requirement:</b>	FCC Part15 C Section 15.209																																															
<b>Test Method:</b>	ANSI C63.10: 2013																																															
<b>Frequency Range:</b>	9 kHz to 25 GHz																																															
<b>Measurement Distance:</b>	3 m																																															
<b>Antenna Polarization:</b>	Horizontal & Vertical																																															
<b>Operation mode:</b>	Transmitting mode with modulation																																															
<b>Receiver Setup:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Detector</th> <th>RBW</th> <th>VBW</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>9kHz- 150kHz</td> <td>Quasi-peak</td> <td>200Hz</td> <td>1kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>150kHz- 30MHz</td> <td>Quasi-peak</td> <td>9kHz</td> <td>30kHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td>30MHz-1GHz</td> <td>Quasi-peak</td> <td>120KHz</td> <td>300KHz</td> <td>Quasi-peak Value</td> </tr> <tr> <td rowspan="2">Above 1GHz</td><td>Peak</td> <td>1MHz</td> <td>3MHz</td> <td>Peak Value</td> </tr> <tr> <td>Peak</td> <td>1MHz</td> <td>10Hz</td> <td>Average Value</td> </tr> </tbody> </table>					Frequency	Detector	RBW	VBW	Remark	9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value	150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value	Above 1GHz	Peak	1MHz	3MHz	Peak Value	Peak	1MHz	10Hz	Average Value														
Frequency	Detector	RBW	VBW	Remark																																												
9kHz- 150kHz	Quasi-peak	200Hz	1kHz	Quasi-peak Value																																												
150kHz- 30MHz	Quasi-peak	9kHz	30kHz	Quasi-peak Value																																												
30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value																																												
Above 1GHz	Peak	1MHz	3MHz	Peak Value																																												
	Peak	1MHz	10Hz	Average Value																																												
<b>Limit:</b>	<table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th></th> </tr> </thead> <tbody> <tr> <td>0.009-0.490</td> <td>2400/F(KHz)</td> <td>300</td> <td></td> </tr> <tr> <td>0.490-1.705</td> <td>24000/F(KHz)</td> <td>30</td> <td></td> </tr> <tr> <td>1.705-30</td> <td>30</td> <td>30</td> <td></td> </tr> <tr> <td>30-88</td> <td>100</td> <td>3</td> <td></td> </tr> <tr> <td>88-216</td> <td>150</td> <td>3</td> <td></td> </tr> <tr> <td>216-960</td> <td>200</td> <td>3</td> <td></td> </tr> <tr> <td>Above 960</td> <td>500</td> <td>3</td> <td></td> </tr> </tbody> </table> <table border="1"> <thead> <tr> <th>Frequency</th> <th>Field Strength (microvolts/meter)</th> <th>Measurement Distance (meters)</th> <th>Detector</th> </tr> </thead> <tbody> <tr> <td rowspan="2">Above 1GHz</td><td>500</td> <td>3</td> <td>Average</td> </tr> <tr> <td>5000</td> <td>3</td> <td>Peak</td> </tr> </tbody> </table>					Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)		0.009-0.490	2400/F(KHz)	300		0.490-1.705	24000/F(KHz)	30		1.705-30	30	30		30-88	100	3		88-216	150	3		216-960	200	3		Above 960	500	3		Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector	Above 1GHz	500	3	Average	5000	3	Peak
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)																																														
0.009-0.490	2400/F(KHz)	300																																														
0.490-1.705	24000/F(KHz)	30																																														
1.705-30	30	30																																														
30-88	100	3																																														
88-216	150	3																																														
216-960	200	3																																														
Above 960	500	3																																														
Frequency	Field Strength (microvolts/meter)	Measurement Distance (meters)	Detector																																													
Above 1GHz	500	3	Average																																													
	5000	3	Peak																																													
<b>Test setup:</b>	<p>For radiated emissions below 30MHz</p> <p>Distance = 3m</p> <p>EUT</p> <p>Turn table</p> <p>Ground Plane</p> <p>Computer</p> <p>Pre -Amplifier</p> <p>Receiver</p> <p>30MHz to 1GHz</p>																																															

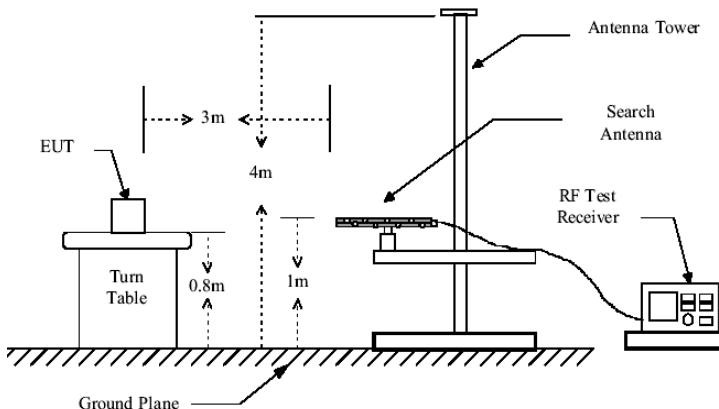

Above 1GHz

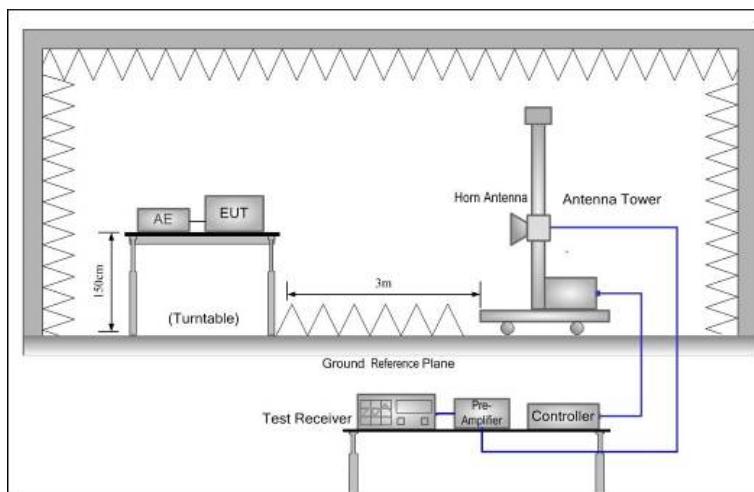

1. For the radiated emission test below 1GHz:  
The EUT was placed on a turntable with 0.8 meter (<1G), 1.5M(>1G)above ground. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high PASS filter are used for the test in order to get better signal level.

For the radiated emission test above 1GHz:  
Place the measurement antenna on a turntable with 1.5 meter above ground, which is away from each area of the EUT determined to be a source of emissions at the specified measurement distance, while keeping the measurement antenna aimed at the source of emissions at each frequency of significant emissions, with polarization oriented for maximum response. The measurement antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final

#### Test Procedure:



	<p>measurement antenna elevation shall be that which maximizes the emissions. The measurement antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane.</p> <p>3. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level</p> <p>4. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.</p> <p>5. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"><li>(1) Span shall wide enough to fully capture the emission being measured;</li><li>(2) Set RBW=100 kHz for <math>f &lt; 1</math> GHz; VBW <math>\geq</math> RBW; Sweep = auto; Detector function = peak; Trace = max hold;</li><li>(3) Set RBW = 1 MHz, VBW= 3MHz for <math>f \geq 1</math> GHz for peak measurement.</li></ul> <p>For average measurement: VBW = 10 Hz, when duty cycle is no less than 98 percent. VBW <math>\geq 1/T</math>, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.</p>
<b>Test results:</b>	PASS



## Test Instruments

Radiated Emission Test Site (966)				
Name of Equipment	Manufacturer	Model	Serial Number	Calibration Due
Receiver	R&S	ESCI-7	HKE-010	Sep. 27, 2020
Spectrum analyzer	Agilent	N9020A	HKE-048	Sep. 27, 2020
Preamplifier	EMCI	EMC051845 SE	HKE-015	Sep. 27, 2020
Preamplifier	Agilent	83051A	HKE-016	Sep. 27, 2020
Loop antenna	Schwarzbeck	FMZB 1519 B	HKE-014	Sep. 26, 2020
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	Sep. 26, 2020
Horn antenna	Schwarzbeck	9120D	HKE-013	Sep. 26, 2020
Antenna Mast	Keleto	CC-A-4M	N/A	N/A
Position controller	Taiwan MF	MF7802	HKE-011	Sep. 27, 2020
Radiated test software	Tonscend	TS+ Rev 2.5.0.0	HKE-082	N/A
RF cable (9KHz-1GHz)	Times	381806-001	N/A	N/A
RF cable	Times	1-40G	HKE-034	Sep. 27, 2020


**Note:** The calibration interval of the above test instruments is 12 months and the calibrations are traceable to international system unit (SI).



## Test Data

Please refer to following diagram for individual  
Below 1GHz


### Horizontal

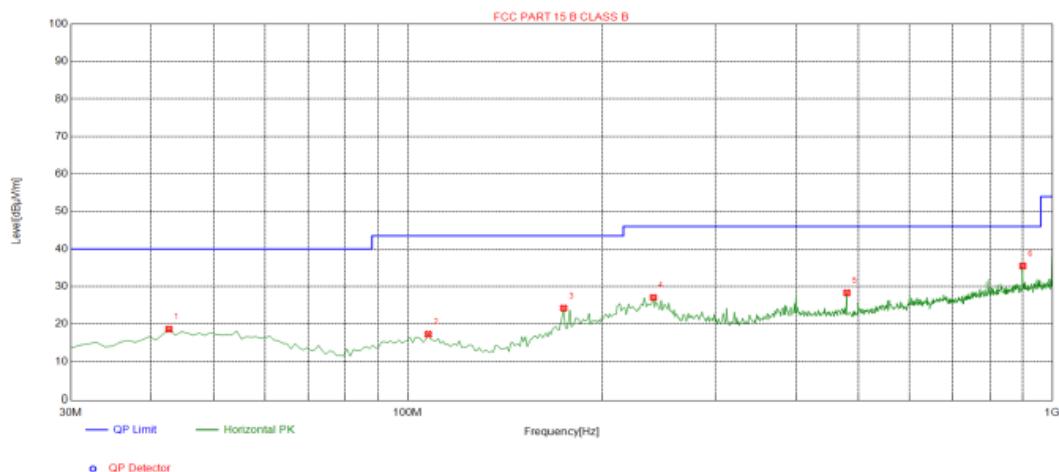

### Suspected List

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	42.6100	18.62	-14.08	40.00	21.38	100	360	Horizontal
2	107.600	17.26	-15.42	43.50	26.24	100	358	Horizontal
3	174.530	24.23	-17.10	43.50	19.27	100	98	Horizontal
4	240.490	27.06	-13.83	46.00	18.94	100	301	Horizontal
5	480.080	28.31	-8.45	46.00	17.69	100	18	Horizontal
6	900.090	35.47	-1.78	46.00	10.53	100	44	Horizontal

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

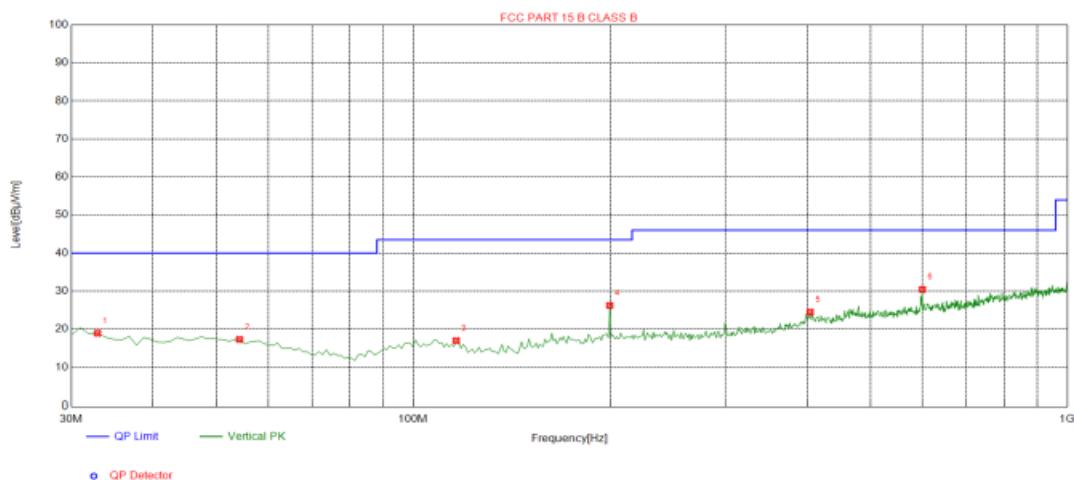**Vertical****Suspected List**

Suspected List								
NO.	Freq. [MHz]	Level [dB $\mu$ V/m]	Factor [dB]	Limit [dB $\mu$ V/m]	Margin [dB]	Height [cm]	Angle [°]	Polarity
1	32.9100	18.93	-16.23	40.00	21.07	100	59	Vertical
2	54.2500	17.30	-14.29	40.00	22.70	100	242	Vertical
3	116.330	16.98	-16.49	43.50	26.52	100	248	Vertical
4	199.750	26.24	-15.08	43.50	17.26	100	277	Vertical
5	404.420	24.48	-10.32	46.00	21.52	100	101	Vertical
6	600.360	30.45	-6.09	46.00	15.55	100	84	Vertical

Remark: Transd = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

**Above 1GHz****RADIATED EMISSION TEST**

LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	64.43	-3.64	60.79	74	-13.21	peak
4824	50.71	-3.64	47.07	54	-6.93	AVG
7236	58.48	-0.95	57.53	74	-16.47	peak
7236	44.29	-0.95	43.34	54	-10.66	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	65.92	-3.64	62.28	74	-11.72	peak
4824	47.43	-3.64	43.79	54	-10.21	AVG
7236	56.27	-0.95	55.32	74	-18.68	peak
7236	44.34	-0.95	43.39	54	-10.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	64.92	-3.51	61.41	74	-12.59	peak
4874	50.77	-3.51	47.26	54	-6.74	AVG
7311	59.67	-0.82	58.85	74	-15.15	peak
7311	43.31	-0.82	42.49	54	-11.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	65.53	-3.51	62.02	74	-11.98	peak
4874	46.84	-3.51	43.33	54	-10.67	AVG
7311	60.18	-0.82	59.36	74	-14.64	peak
7311	43.64	-0.82	42.82	54	-11.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



## HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	63.59	-3.43	60.16	74	-13.84	peak
4924	47.18	-3.43	43.75	54	-10.25	AVG
7386	57.92	-0.75	57.17	74	-16.83	peak
7386	44.34	-0.75	43.59	54	-10.41	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	65.53	-3.43	62.10	74	-11.90	peak
4924	47.42	-3.43	43.99	54	-10.01	AVG
7386	57.24	-0.75	56.49	74	-17.51	peak
7386	41.97	-0.75	41.22	54	-12.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



## LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	64.29	-3.64	60.65	74	-13.35	peak
4824	48.51	-3.64	44.87	54	-9.13	AVG
7236	59.20	-0.95	58.25	74	-15.75	peak
7236	44.07	-0.95	43.12	54	-10.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4824	63.01	-3.64	59.37	74	-14.63	peak
4824	49.01	-3.64	45.37	54	-8.63	AVG
7236	59.38	-0.95	58.43	74	-15.57	peak
7236	42.76	-0.95	41.81	54	-12.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	65.34	-3.51	61.83	74	-12.17	peak
4874	49.44	-3.51	45.93	54	-8.07	AVG
7311	59.14	-0.82	58.32	74	-15.68	peak
7311	43.82	-0.82	43.00	54	-11.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874	64.84	-3.51	61.33	74	-12.67	peak
4874	47.06	-3.51	43.55	54	-10.45	AVG
7311	58.57	-0.82	57.75	74	-16.25	peak
7311	44.02	-0.82	43.20	54	-10.80	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



## HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	64.71	-3.43	61.28	74	-12.72	peak
4924	48.95	-3.43	45.52	54	-8.48	AVG
7386	55.99	-0.75	55.24	74	-18.76	peak
7386	42.63	-0.75	41.88	54	-12.12	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	62.42	-3.43	58.99	74	-15.01	peak
4924	47.12	-3.43	43.69	54	-10.31	AVG
7386	57.15	-0.75	56.40	74	-17.60	peak
7386	44.11	-0.75	43.36	54	-10.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## Remark:

- (1) Measuring frequencies from 1 GHz to the 25 GHz.
- (2) "F" denotes fundamental frequency; "H" denotes spurious frequency. "E" denotes band edge frequency.
- (3) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (4) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (5) The IF bandwidth of EMI Test Receiver between 30MHz to 1GHz was 120KHz, 1 MHz for measuring above 1 GHz, below 30MHz was 10KHz.
- (6) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dB $\mu$ V/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dB $\mu$ V/m(PK Value) <54 dB $\mu$ V/m(AV Limit), the Average Detected not need to completed.



## LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits	Margin (dB)	Detector Type
4824	62.66	-3.64	59.02	74	-14.98	peak
4824	46.61	-3.64	42.97	54	-11.03	AVG
7236	57.46	-0.95	56.51	74	-17.49	peak
7236	44.82	-0.95	43.87	54	-10.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits	Margin (dB)	Detector Type
4824	62.49	-3.64	58.85	74	-15.15	peak
4824	48.14	-3.64	44.50	54	-9.50	AVG
7236	57.19	-0.95	56.24	74	-17.76	peak
7236	41.98	-0.95	41.03	54	-12.97	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874.00	63.42	-3.51	59.91	74.00	-14.09	peak
4874.00	47.02	-3.51	43.51	54.00	-10.49	Avg
7311.00	57.24	-0.82	56.42	74.00	-17.58	peak
7311.00	44.32	-0.82	43.50	54.00	-10.50	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4874.00	64.29	-3.51	60.78	74.00	-13.22	peak
4874.00	46.11	-3.51	42.60	54.00	-11.40	Avg
7311.00	59.09	-0.82	58.27	74.00	-15.73	peak
7311.00	43.96	-0.82	43.14	54.00	-10.86	Avg

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



## HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	62.64	-3.43	59.21	74	-14.79	peak
4924	46.60	-3.43	43.17	54	-10.83	AVG
7386	58.61	-0.75	57.86	74	-16.14	peak
7386	41.27	-0.75	40.52	54	-13.48	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4924	63.60	-3.43	60.17	74	-13.83	peak
4924	47.35	-3.43	43.92	54	-10.08	AVG
7386	57.48	-0.75	56.73	74	-17.27	peak
7386	42.03	-0.75	41.28	54	-12.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

**Test Result of Radiated Spurious at Band edges**

Operation Mode:  
802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	58.76	-5.81	52.95	74	-21.05	peak
2390	/	-5.81	/	54	/	AVG
2399	63.60	-5.84	57.76	74	-16.24	peak
2399	50.52	-5.84	44.68	54	-9.32	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	58.70	-5.81	52.89	74	-21.11	peak
2390	/	-5.81	/	54	/	AVG
2399	63.60	-5.84	57.76	74	-16.24	peak
2399	47.20	-5.84	41.36	54	-12.64	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	58.00	-5.65	52.35	74	-21.65	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	55.93	-5.65	50.28	74	-23.72	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	57.70	-5.81	51.89	74	-22.11	peak
2390	/	-5.81	/	54	/	AVG
2399	63.97	-5.84	58.13	74	-15.87	peak
2399	48.07	-5.84	42.23	54	-11.77	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	56.59	-5.81	50.78	74	-23.22	peak
2390	/	-5.81	/	54	/	AVG
2399	61.74	-5.84	55.90	74	-18.10	peak
2399	48.10	-5.84	42.26	54	-11.74	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	56.42	-5.65	50.77	74	-23.23	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	58.77	-5.65	53.12	74	-20.88	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	56.91	-5.81	51.10	74	-22.90	peak
2390	/	-5.81	/	54	/	AVG
2399	62.78	-5.84	56.94	74	-17.06	peak
2399	49.75	-5.84	43.91	54	-10.09	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2390	58.03	-5.81	52.22	74	-21.78	peak
2390	/	-5.81	/	54	/	AVG
2399	62.60	-5.84	56.76	74	-17.24	peak
2399	49.12	-5.84	43.28	54	-10.72	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits



Operation Mode: TX CH High (2462MHz)

Horizontal

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	58.85	-5.65	53.20	74	-20.80	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
2483.5	57.17	-5.65	51.52	74	-22.48	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



## 4.6. ANTENNA REQUIREMENT

### Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


### Refer to statement below for compliance.

The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### Antenna Connected Construction


The antenna used in this product is a PCB Antenna, The directional gains of antenna used for transmitting is 2dBi.

### WIFI ANTENNA

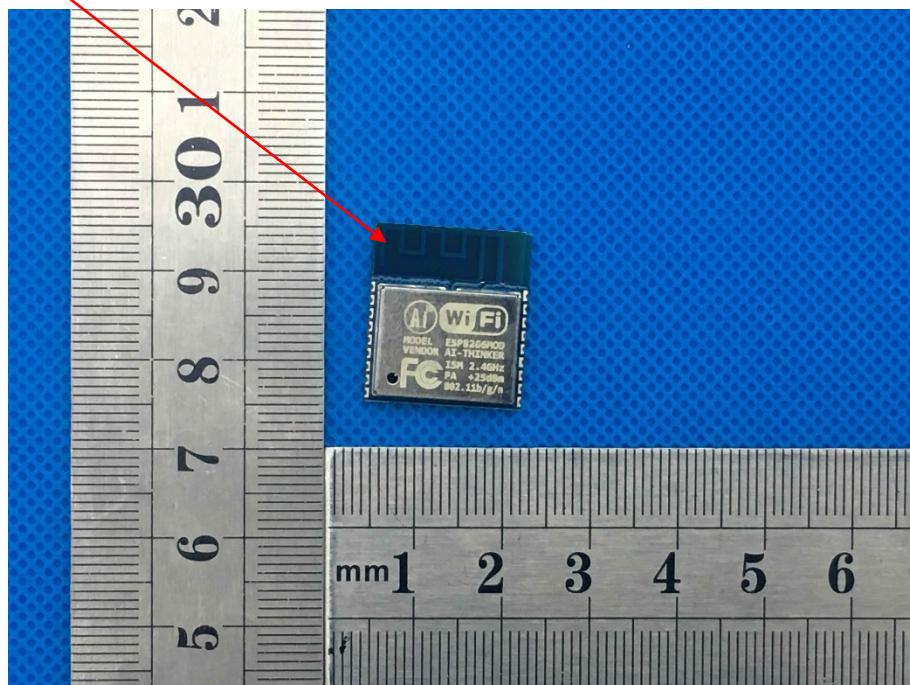

## 4.7. PHOTOGRAPH OF TEST

Radiated Emission

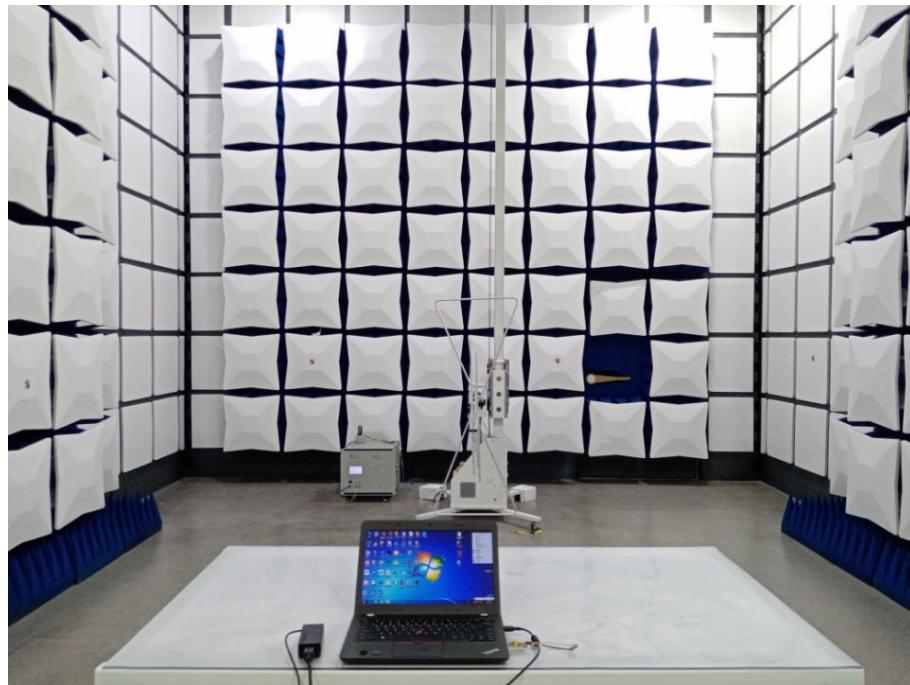



### Conducted Emission



The end