

# TEST REPORT

Product Name: 32 INCH DLED TV  
FCC ID: 2AHU2-JE3223S  
Trademark: JENSEN  
Model Number: JE3223S  
Prepared For: ASA Electronics Shenzhen Limited  
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China  
Manufacturer: ASA Electronics Shenzhen Limited  
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinghe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Jan. 12, 2023  
Sample tested Date: Jan. 12, 2023 to Feb. 07, 2023  
Issue Date: Feb. 07, 2023  
Report No.: CTB230130021RF  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHz band radio test report.  
Compiled by: Reviewed by: Approved by:

ChenZheng

Chen Zheng

Arron Liu

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

| Test Report Declaration                                       | Page |
|---|------|
| <b>1. VERSION</b> .....                                       | 3    |
| <b>2. TEST SUMMARY</b> .....                                  | 4    |
| <b>3. MEASUREMENT UNCERTAINTY</b> .....                       | 5    |
| <b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....            | 6    |
| 4.1 Product Information .....                                 | 6    |
| 4.2 Test Setup Configuration .....                            | 6    |
| 4.3 Support Equipment .....                                   | 6    |
| 4.4 Channel List .....  | 6    |
| 4.5 Test Mode .....   | 7    |
| 4.6 Test Environment .....                                    | 7    |
| <b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....        | 8    |
| 5.1 Test Facility .....                                       | 8    |
| 5.2 Test Instrument Used .....                                | 8    |
| <b>6. AC POWER LINE CONDUCTED EMISSION</b> .....              | 10   |
| 6.1 Block Diagram Of Test Setup .....                         | 10   |
| 6.2 Limit .....   | 10   |
| 6.3 Test procedure .....                                      | 10   |
| 6.4 Test Result .....   | 12   |
| <b>7. RADIATED SPURIOUS EMISSION</b> .....                    | 14   |
| 7.1 Block Diagram Of Test Setup .....                         | 14   |
| 7.2 Limit .....   | 14   |
| 7.3 Test procedure .....                                      | 15   |
| 7.4 Test Result .....   | 16   |
| <b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> ..... | 38   |
| 8.1 Block Diagram Of Test Setup .....                         | 38   |
| 8.2 Limit .....   | 38   |
| 8.3 Test procedure .....                                      | 38   |
| 8.4 Test Result .....   | 39   |
| <b>9. CONDUCTED OUTPUT POWER</b> .....                        | 56   |
| 9.1 Block Diagram Of Test Setup .....                         | 56   |
| 9.2 Limit .....   | 56   |
| 9.3 Test procedure .....                                      | 56   |
| 9.4 Test Result .....   | 57   |
| <b>10. 6DB OCCUPIED BANDWIDTH</b> .....                       | 58   |
| 10.1 Block Diagram Of Test Setup .....                        | 58   |
| 10.2 Limit .....  | 58   |
| 10.3 Test procedure .....                                     | 58   |
| 10.4 Test Result .....  | 59   |
| <b>11. POWER SPECTRAL DENSITY</b> .....                       | 69   |
| 11.1 Block Diagram Of Test Setup .....                        | 69   |
| 11.2 Limit .....  | 69   |
| 11.3 Test procedure .....                                     | 69   |
| 11.4 Test Result .....  | 70   |
| <b>12. ANTENNA REQUIREMENT</b> .....                          | 79   |
| <b>13. EUT PHOTOGRAPHS</b> .....                              | 80   |
| <b>14. EUT TEST SETUP PHOTOGRAPHS</b> .....                   | 81   |

(Note: N/A means not applicable)



1. VERSION

| Report No.     | Issue Date    | Description | Approved |
|----------------|---------------|-------------|----------|
| CTB230130021RF | Feb. 07, 2023 | Original    | Valid    |



## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

| Test Item  | Test Requirement  | Test method                                   | Result |
|--|---|---|--------|
| <b>AC Power Line Conducted Emission</b>              | 47 CFR Part 15 Subpart C Section 15.207                   | ANSI C63.10-2013                              | PASS   |
| <b>Radiated Spurious emissions</b>                   | 47 CFR Part 15 Subpart C Section 15.205/15.209            | ANSI C63.10-2013                              | PASS   |
| <b>Band edge and RF Conducted Spurious Emissions</b> | 47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)      | ANSI C63.10-2013                              | PASS   |
| <b>Conducted Peak Output Power</b>                   | 47 CFR Part 15 Subpart C Section 15.247 (b)(3)            | ANSI C63.10-2013                              | PASS   |
| <b>6dB Occupied Bandwidth</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (a)(2)            | ANSI C63.10-2013                              | PASS   |
| <b>Power Spectral Density</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (e)               | ANSI C63.10-2013/<br>KDB 558074 D01<br>v05r02 | PASS   |
| <b>Antenna Requirement</b>                           | 47 CFR Part 15 Subpart C Section 15.203/15.247 (b)        | /   | PASS   |
| <b>RF Exposure Evaluation</b>                        | 47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091 | KDB447498D01v06                               | PASS   |

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

| Item  | Uncertainty |
|---|-------------|
| Occupancy bandwidth                               | U=±54.3Hz   |
| Conducted output power Above 1G                   | U=±1.0dB    |
| Conducted output power below 1G                   | U=±0.9dB    |
| Power Spectral Density , Conduction               | U=±1.0dB    |
| Conduction spurious emissions                     | U=±2.8dB    |
| Out of band emission                              | U=±54Hz     |
| 3m chamber Radiated spurious emission(9KHz-30MHz) | U=±4.8dB    |
| 3m chamber Radiated spurious emission(30MHz-1GHz) | U=±4.3dB    |
| 3m chamber Radiated spurious emission(1GHz-18GHz) | U=±4.5dB    |
| 3m chamber Radiated spurious emission(1GHz-40GHz) | U=±4.8dB    |
| humidity uncertainty                              | U=±5.3%     |
| Temperature uncertainty                           | U=±0.59°C   |
| Supply voltages                                   | U=±3%       |
| Time  | U=±5%       |
| Conducted Emission (9KHz-30MHz)                   | 3.2 dB      |

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

|                       |   |
|-----------------------|---|
| Model(s):             | JE3223S   |
| Model Description:    | N/A   |
| Wi-Fi Specification:  | IEEE 802.11b/g/n  |
| Hardware Version:     | V1.0  |
| Software Version:     | V1.0  |
| Operation Frequency:  | WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel<br>IEEE 802.11n 40: 2422-2452MHz/ 7 channel |
| Max. RF output power: | WiFi (2.4G) : 16.519dBm   |
| Type of Modulation:   | WiFi: DSSS, OFDM  |
| Antenna installation: | WiFi: Internal antenna  |
| Antenna Gain:         | WiFi (2.4G) : ANT1: 0.92dBi<br>ANT2: 0.92dBi  |
| Ratings:              | AC 120V/60Hz  |

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

##### 4.3 Support Equipment

| Item | Equipment | Mfr/Brand | Model/Type No. | Series No. | Note |
|------|-----------|-----------|----------------|------------|------|
| /    | /         | /         | /              | /          | /    |

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

##### 4.4 Channel List

| CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) | CH | Frequency (MHz) |
|----|-----------------|----|-----------------|----|-----------------|----|-----------------|
| 1  | 2412            | 2  | 2417            | 3  | 2422            | 4  | 2427            |
| 5  | 2432            | 6  | 2437            | 7  | 2442            | 8  | 2447            |
| 9  | 2452            | 10 | 2457            | 11 | 2462            |    |                 |



#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

| Test mode                   | Low channel | Middle channel | High channel |
|-----------------------------|-------------|----------------|--------------|
| Transmitting(802.11b/g/n20) | 2412MHz     | 2437MHz        | 2462MHz      |
| Transmitting(802.11n40)     | 2422MHz     | 2437MHz        | 2452MHz      |

MIMO(ANT 1+ANT 2)

| Test mode               | Low channel | Middle channel | High channel |
|-------------------------|-------------|----------------|--------------|
| Transmitting(802.11n20) | 2412MHz     | 2437MHz        | 2462MHz      |
| Transmitting(802.11n40) | 2422MHz     | 2437MHz        | 2452MHz      |

EUT has two Internal Antenna with Max Antenna Gain 0.92dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain= $10\log(NANT/NSS)$ dB= $10\log(2/1)$ =3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for  $NANT \leq 4$ ,

So the directional gain for Power measurements is 1dBi

NOTE: DutyCycle>98%.

| Test mode  | Rate |
|------------|------|
| 802.11b    | 11M  |
| 802.11g    | 54M  |
| 802.11/n20 | 65M  |
| 802.11/n40 | 65M  |

#### 4.6 Test Environment

|                            |      |
|----------------------------|------|
| Humidity(%):               | 54   |
| Atmospheric Pressure(kPa): | 101  |
| Normal Voltage(AC):        | 120V |
| Normal Temperature(°C)     | 23   |
| Low Temperature(°C)        | 0    |
| High Temperature(°C)       | 50   |

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinhua Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

| Item | Equipment                                 | Manufacturer | Type No.              | Serial No.   | Calibrated until |
|------|---|--------------|-----------------------|--------------|------------------|
| 1    | Spectrum Analyzer                         | Agilent      | N9020A                | MY52090073   | 2023.07.19       |
| 2    | Power Sensor                              | Agilent      | U2021XA               | MY56120032   | 2023.07.19       |
| 3    | Power Sensor                              | Agilent      | U2021XA               | MY56120034   | 2023.07.19       |
| 4    | Communication test set                    | R&S          | CMW500                | 108058       | 2023.07.19       |
| 5    | Spectrum Analyzer                         | KEYSIGHT     | N9020A                | MY51289897   | 2023.07.19       |
| 6    | Signal Generator                          | Agilent      | N5181A                | MY50140365   | 2023.07.19       |
| 7    | Vector signal generator                   | Agilent      | N5182A                | MY47420195   | 2023.07.19       |
| 8    | Communication test set                    | Agilent      | E5515C                | MY50102567   | 2023.07.19       |
| 9    | 2.4 GHz Filter                            | Shenxiang    | MSF2400-2483.5MS-1154 | 20181015001  | 2023.07.19       |
| 10   | 5 GHz Filter                              | Shenxiang    | MSF5150-5850 MS-1155  | 20181015001  | 2023.07.19       |
| 11   | Filter                                    | Xingbo       | XLBLQ-DZA120          | 190821-1-1   | 2023.07.19       |
| 12   | BT&WI-FI Automatic test software          | Microwave    | MTS8000               | Ver. 2.0.0.0 | /                |
| 13   | Rohde & Schwarz SFU Broadcast Test System | R&S          | SFU                   | 101017       | 2023.10.30       |
| 14   | Temperature humidity chamber              | Hongjing     | TH-80CH               | DG-15174     | 2023.07.19       |
| 15   | 234G Automatic test software              | Microwave    | MTS8200               | Ver. 2.0.0.0 | /                |
| 16   | 966 chamber                               | C.R.T.       | 966                   | /            | 2024.08.11       |
| 17   | Receiver                                  | R&S          | ESPI                  | 100362       | 2023.07.19       |
| 18   | Amplifier                                 | HP           | 8447E                 | 2945A02747   | 2023.07.19       |
| 19   | Amplifier                                 | Agilent      | 8449B                 | 3008A01838   | 2023.07.19       |
| 20   | TRILOG Broadband Antenna                  | Schwarzbeck  | VULB 9168             | 00869        | 2023.07.22       |




|    |                                      |             |            |            |            |
|----|--------------------------------------|-------------|------------|------------|------------|
| 21 | Double Ridged Broadband Horn Antenna | Schwarzbeck | BBHA9120D  | 01911      | 2023.07.22 |
| 22 | EMI test software                    | Fala        | EZ-EMC     | FA-03A2 RE | /          |
| 23 | Loop Antenna                         | Schwarzbeck | FMZB 1519B | 1519B-224  | 2023.07.23 |
| 24 | loop antenna                         | ZHINAN      | ZN30900A   | GTS534     | /          |
| 25 | 40G Horn antenna                     | A/H/System  | SAS-574    | 588        | 2024.10.30 |
| 26 | Amplifier                            | AEROFLEX    | Aeroflex   | 097        | 2024.10.30 |

| Radiated emission |                                      |               |                        |            |                  |
|-------------------|--------------------------------------|---------------|------------------------|------------|------------------|
| No.               | Equipment                            | Manufacturer  | Model No.              | Serial No. | Calibrated until |
| 1                 | Double Ridged Broadband Horn Antenna | Schwarzbeck   | BBHA 9120 D            | 01911      | 2023.07.22       |
| 2                 | TRILOG Broadband Antenna             | Schwarzbeck   | VULB 9168              | 00869      | 2023.07.22       |
| 3                 | Amplifier                            | Agilent       | 8449B                  | 3008A01838 | 2023.07.19       |
| 4                 | Amplifier                            | HP            | 8447E                  | 2945A02747 | 2023.07.19       |
| 5                 | EMI TEST RECEIVER                    | ROHDE&SCHWARZ | ESCI                   | 100428/003 | 2023.07.19       |
| 6                 | Coaxial cable                        | ETS           | RFC-SNS-100-NMS-80 NI  | /          | 2023.07.19       |
| 7                 | Coaxial cable                        | ETS           | RFC-SNS-100-NMS-20 NI  | /          | 2023.07.19       |
| 8                 | Coaxial cable                        | ETS           | RFC-SNS-100-SMS-20 NI  | /          | 2023.07.19       |
| 9                 | Coaxial cable                        | ETS           | RFC-NNS-100-NMS-300 NI | /          | 2023.07.19       |
| 10                | Communication test set               | Agilent       | E5515C                 | MY50102567 | 2023.07.19       |
| 11                | Communication test set               | R&S           | CMW500                 | 108058     | 2023.07.19       |
| 12                | EZ-EMC                               | Frad          | EMC-con3A1.1           | /          | /                |

## 6 AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

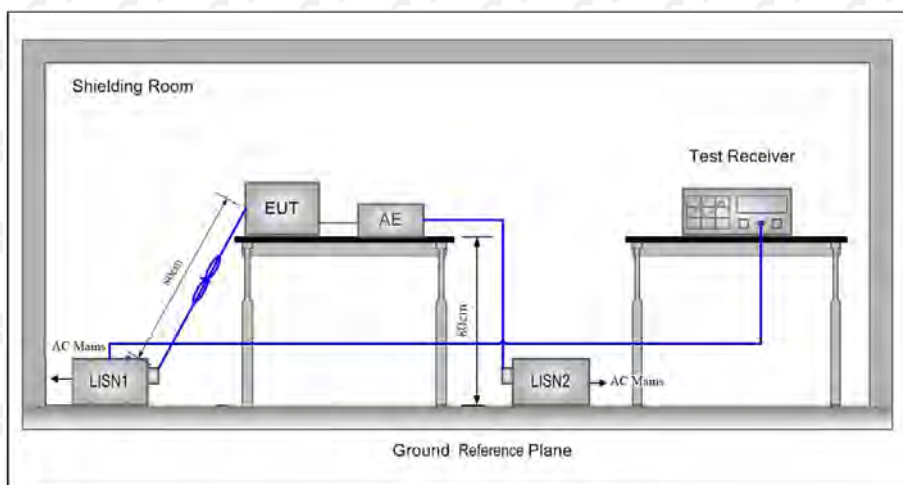

### 6.2 Limit

| Table 4 – AC power-line conducted emissions limits |                              |                            |
|--|------------------------------|----------------------------|
| Frequency (MHz)                                    | Conducted limit (dB $\mu$ V) |                            |
|  | Quasi-peak                   | Average                    |
| 0.15 - 0.5   | 66 to 56 <sup>Note 1</sup>   | 56 to 46 <sup>Note 1</sup> |
| 0.5 - 5  | 56                           | 46                         |
| 5 - 30   | 60                           | 50                         |

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.


This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.



## 6.4 Test Result

Test Specification: Line  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

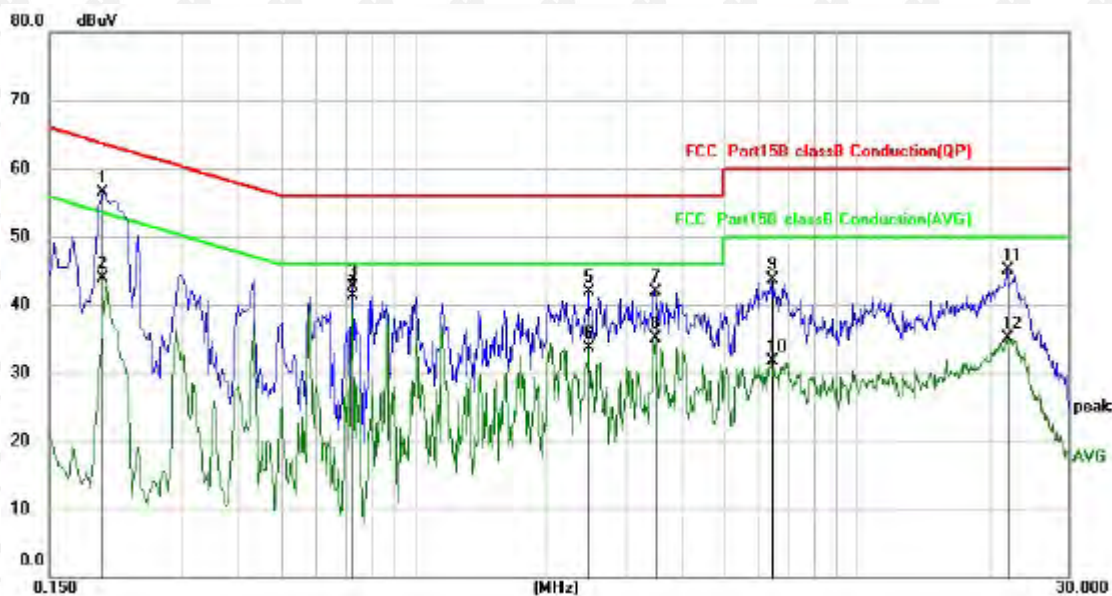


| No. Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|---------|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1       | 0.1980       | 46.48                    | 10.00                   | 56.48                    | 63.69         | -7.21      | QP       |
| 2       | 0.1980       | 33.93                    | 10.00                   | 43.93                    | 53.69         | -9.76      | AVG      |
| 3       | 0.7260       | 32.81                    | 9.97                    | 42.78                    | 56.00         | -13.22     | QP       |
| 4 *     | 0.7260       | 31.24                    | 9.97                    | 41.21                    | 46.00         | -4.79      | AVG      |
| 5       | 2.4820       | 31.76                    | 10.05                   | 41.81                    | 56.00         | -14.19     | QP       |
| 6       | 2.4820       | 23.68                    | 10.05                   | 33.73                    | 46.00         | -12.27     | AVG      |
| 7       | 3.4940       | 31.81                    | 10.10                   | 41.91                    | 56.00         | -14.09     | QP       |
| 8       | 3.4940       | 24.91                    | 10.10                   | 35.01                    | 46.00         | -10.99     | AVG      |
| 9       | 6.4380       | 33.47                    | 10.22                   | 43.69                    | 60.00         | -16.31     | QP       |
| 10      | 6.4380       | 21.58                    | 10.22                   | 31.80                    | 50.00         | -18.20     | AVG      |
| 11      | 21.7860      | 34.58                    | 10.58                   | 45.16                    | 60.00         | -14.84     | QP       |
| 12      | 21.7860      | 24.61                    | 10.58                   | 35.19                    | 50.00         | -14.81     | AVG      |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral  
 AC 120V 60Hz  
 the worst: 802.11b (low channel)

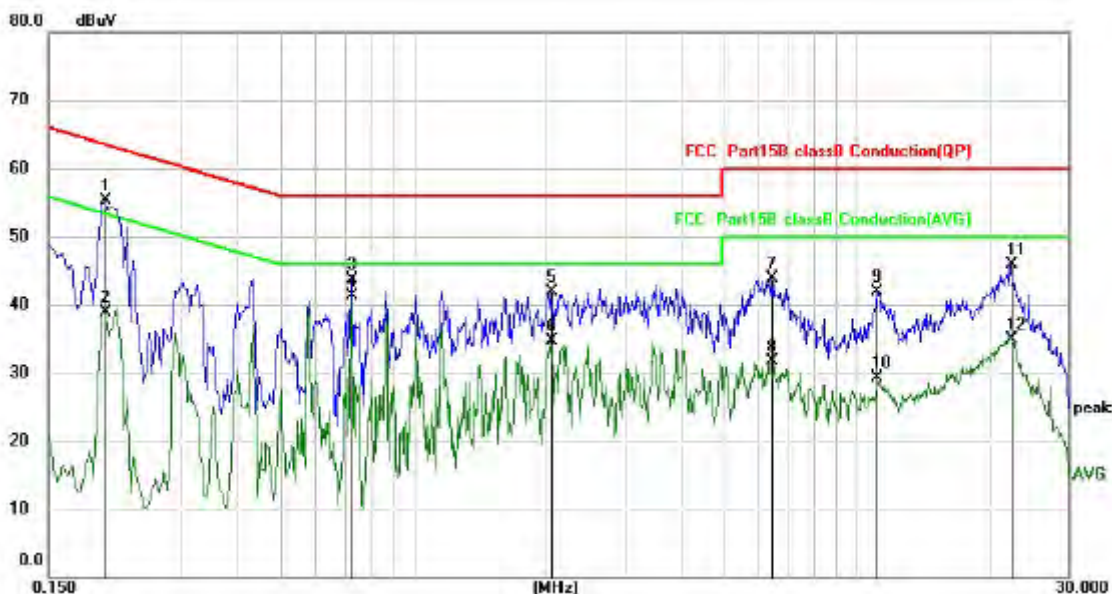

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV | Limit<br>dBuV | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|--------------------------|---------------|------------|----------|
| 1   |     | 0.2020       | 45.26                    | 10.00                   | 55.26                    | 63.53         | -8.27      | QP       |
| 2   |     | 0.2020       | 28.91                    | 10.00                   | 38.91                    | 53.53         | -14.62     | AVG      |
| 3   |     | 0.7260       | 33.79                    | 9.97                    | 43.76                    | 56.00         | -12.24     | QP       |
| 4   | *   | 0.7260       | 31.31                    | 9.97                    | 41.28                    | 46.00         | -4.72      | AVG      |
| 5   |     | 2.0500       | 31.80                    | 10.03                   | 41.83                    | 56.00         | -14.17     | QP       |
| 6   |     | 2.0500       | 24.73                    | 10.03                   | 34.76                    | 46.00         | -11.24     | AVG      |
| 7   |     | 6.4379       | 33.62                    | 10.22                   | 43.84                    | 60.00         | -16.16     | QP       |
| 8   |     | 6.4379       | 21.54                    | 10.22                   | 31.76                    | 50.00         | -18.24     | AVG      |
| 9   |     | 11.0819      | 31.55                    | 10.37                   | 41.92                    | 60.00         | -18.08     | QP       |
| 10  |     | 11.0819      | 18.96                    | 10.37                   | 29.33                    | 50.00         | -20.67     | AVG      |
| 11  |     | 22.2099      | 35.39                    | 10.59                   | 45.98                    | 60.00         | -14.02     | QP       |
| 12  |     | 22.2099      | 24.40                    | 10.59                   | 34.99                    | 50.00         | -15.01     | AVG      |

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

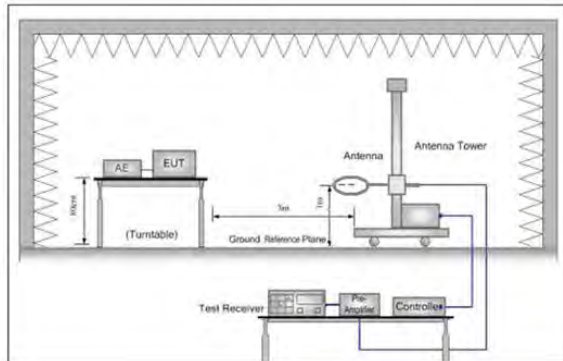


Figure 1. Below 30MHz

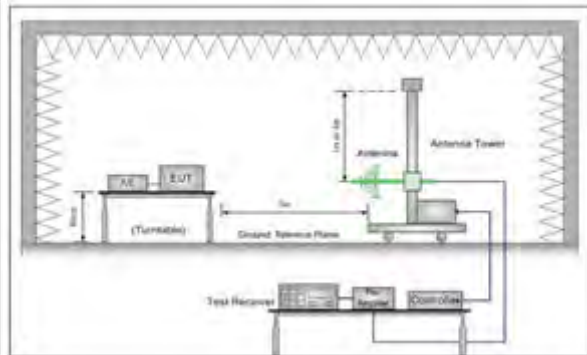


Figure 2. 30MHz to 1GHz

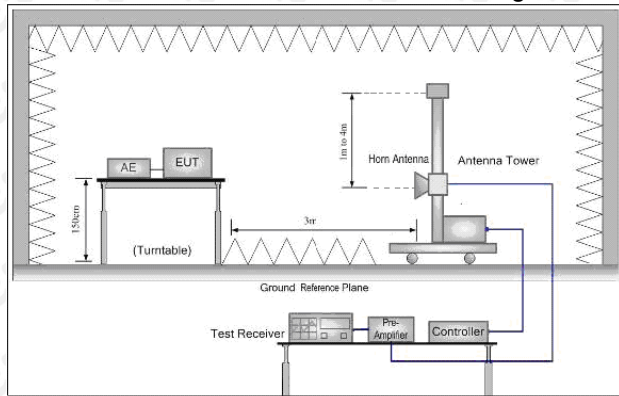


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

| Frequency         | Field strength (microvolt/meter) | Limit (dB $\mu$ V/m ) | Remark     | Measurement distance (m) |
|-------------------|----------------------------------|-----------------------|------------|--------------------------|
| 0.009MHz-0.490MHz | 2400/F(kHz)                      | -                     | -          | 300                      |
| 0.490MHz-1.705MHz | 24000/F(kHz)                     | -                     | -          | 30                       |
| 1.705MHz-30MHz    | 30                               | -                     | -          | 30                       |
| 30MHz-88MHz       | 100                              | 40.0                  | Quasi-peak | 3                        |
| 88MHz-216MHz      | 150                              | 43.5                  | Quasi-peak | 3                        |
| 216MHz-960MHz     | 200                              | 46.0                  | Quasi-peak | 3                        |
| 960MHz-1GHz       | 500                              | 54.0                  | Quasi-peak | 3                        |
| Above 1GHz        | 500                              | 54.0                  | Average    | 3                        |

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.



7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

| Frequency         | Detector   | RBW     | VBW    | Remark     |
|-------------------|------------|---------|--------|------------|
| 0.009MHz-0.090MHz | Peak       | 10kHz   | 30KHz  | Peak       |
| 0.009MHz-0.090MHz | Average    | 10kHz   | 30KHz  | Average    |
| 0.090MHz-0.110MHz | Quasi-peak | 10kHz   | 30KHz  | Quasi-peak |
| 0.110MHz-0.490MHz | Peak       | 10kHz   | 30KHz  | Peak       |
| 0.110MHz-0.490MHz | Average    | 10kHz   | 30KHz  | Average    |
| 0.490MHz -30MHz   | Quasi-peak | 10kHz   | 30kHz  | Quasi-peak |
| 30MHz-1GHz        | Quasi-peak | 120 kHz | 300KHz | Quasi-peak |
| Above 1GHz        | Peak       | 1MHz    | 3MHz   | Peak       |
|                   | Peak       | 1MHz    | 10Hz   | Average    |

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement –X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

### 7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:  
Antenna polarity: H



| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit | Over   | Detector |
|-----|-----|----------|---------------|----------------|-------------|-------|--------|----------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dB/m  | dB     |          |
| 1   |     | 150.5378 | 36.12         | -5.46          | 30.66       | 43.50 | -12.84 | QP       |
| 2   |     | 300.8943 | 44.75         | -5.44          | 39.31       | 46.00 | -6.69  | QP       |
| 3   |     | 377.9211 | 38.48         | -3.26          | 35.22       | 46.00 | -10.78 | QP       |
| 4   | *   | 762.0385 | 38.65         | 5.05           | 43.70       | 46.00 | -2.30  | QP       |
| 5   | !   | 831.8574 | 35.89         | 6.19           | 42.08       | 46.00 | -3.92  | QP       |
| 6   |     | 991.2719 | 34.35         | 8.13           | 42.48       | 54.00 | -11.52 | QP       |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V



| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dB/m | Over<br>dB | Detector |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|---------------|------------|----------|
| 1   |     | 43.7352      | 37.26                    | -6.53                   | 30.73                      | 40.00         | -9.27      | QP       |
| 2   | *   | 149.2239     | 46.54                    | -5.46                   | 41.08                      | 43.50         | -2.42      | QP       |
| 3   |     | 219.4598     | 44.53                    | -8.99                   | 35.54                      | 46.00         | -10.46     | QP       |
| 4   |     | 300.8943     | 42.46                    | -5.44                   | 37.02                      | 46.00         | -8.98      | QP       |
| 5   |     | 606.7221     | 33.58                    | 2.54                    | 36.12                      | 46.00         | -9.88      | QP       |
| 6   |     | 755.3873     | 33.70                    | 4.92                    | 38.62                      | 46.00         | -7.38      | QP       |

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.



Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 64.46                   | -3.64          | 60.82                      | 74                 | -13.18         | peak          |
| 4824               | 49.28                   | -3.64          | 45.64                      | 54                 | -8.36          | AVG           |
| 7236               | 57.11                   | -0.95          | 56.16                      | 74                 | -17.84         | peak          |
| 7236               | 44.83                   | -0.95          | 43.88                      | 54                 | -10.12         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 65.20                   | -3.64          | 61.56                      | 74                 | -12.44         | peak          |
| 4824               | 47.52                   | -3.64          | 43.88                      | 54                 | -10.12         | AVG           |
| 7236               | 56.48                   | -0.95          | 55.53                      | 74                 | -18.47         | peak          |
| 7236               | 43.69                   | -0.95          | 42.74                      | 54                 | -11.26         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4874               | 64.03                         | -3.51          | 60.52                            | 74                       | -13.48         | peak          |
| 4874               | 48.20                         | -3.51          | 44.69                            | 54                       | -9.31          | AVG           |
| 7311               | 59.93                         | -0.82          | 59.11                            | 74                       | -14.89         | peak          |
| 7311               | 45.31                         | -0.82          | 44.49                            | 54                       | -9.51          | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4874               | 63.19                         | -3.51          | 59.68                            | 74                       | -14.32         | peak          |
| 4874               | 49.47                         | -3.51          | 45.96                            | 54                       | -8.04          | AVG           |
| 7311               | 58.59                         | -0.82          | 57.77                            | 74                       | -16.23         | peak          |
| 7311               | 43.30                         | -0.82          | 42.48                            | 54                       | -11.52         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 4924               | 63.21                         | -3.43          | 59.78                            | 74                       | -14.22         | peak             |
| 4924               | 45.95                         | -3.43          | 42.52                            | 54                       | -11.48         | AVG              |
| 7386               | 59.36                         | -0.75          | 58.61                            | 74                       | -15.39         | peak             |
| 7386               | 42.30                         | -0.75          | 41.55                            | 54                       | -12.45         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector<br>Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|------------------|
| 4924               | 63.07                         | -3.43          | 59.64                            | 74                       | -14.36         | peak             |
| 4924               | 46.43                         | -3.43          | 43.00                            | 54                       | -11.00         | AVG              |
| 7386               | 57.93                         | -0.75          | 57.18                            | 74                       | -16.82         | peak             |
| 7386               | 42.31                         | -0.75          | 41.56                            | 54                       | -12.44         | AVG              |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 63.33                   | -3.64          | 59.69                      | 74                 | -14.31         | peak          |
| 4824               | 49.98                   | -3.64          | 46.34                      | 54                 | -7.66          | AVG           |
| 7236               | 57.22                   | -0.95          | 56.27                      | 74                 | -17.73         | peak          |
| 7236               | 45.67                   | -0.95          | 44.72                      | 54                 | -9.28          | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4824               | 63.87                   | -3.64          | 60.23                      | 74                 | -13.77         | peak          |
| 4824               | 49.00                   | -3.64          | 45.36                      | 54                 | -8.64          | AVG           |
| 7236               | 60.26                   | -0.95          | 59.31                      | 74                 | -14.69         | peak          |
| 7236               | 44.05                   | -0.95          | 43.10                      | 54                 | -10.90         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

## ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 4874      | 63.89         | -3.51  | 60.38          | 74             | -13.62 | peak          |
| 4874      | 47.23         | -3.51  | 43.72          | 54             | -10.28 | AVG           |
| 7311      | 58.15         | -0.82  | 57.33          | 74             | -16.67 | peak          |
| 7311      | 44.15         | -0.82  | 43.33          | 54             | -10.67 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 4874      | 63.24         | -3.51  | 59.73          | 74             | -14.27 | peak          |
| 4874      | 48.00         | -3.51  | 44.49          | 54             | -9.51  | AVG           |
| 7311      | 56.32         | -0.82  | 55.50          | 74             | -18.50 | peak          |
| 7311      | 41.68         | -0.82  | 40.86          | 54             | -13.14 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

**ANT2 HIGH CH11 (802.11g Mode)/2462**

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924      | 63.75         | -3.43  | 60.32          | 74       | -13.68 | peak          |
| 4924      | 47.43         | -3.43  | 44.00          | 54       | -10.00 | AVG           |
| 7386      | 58.71         | -0.75  | 57.96          | 74       | -16.04 | peak          |
| 7386      | 42.41         | -0.75  | 41.66          | 54       | -12.34 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924      | 63.58         | -3.43  | 60.15          | 74       | -13.85 | peak          |
| 4924      | 47.51         | -3.43  | 44.08          | 54       | -9.92  | AVG           |
| 7386      | 56.59         | -0.75  | 55.84          | 74       | -18.16 | peak          |
| 7386      | 43.06         | -0.75  | 42.31          | 54       | -11.69 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

**Remark**

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824      | 64.38         | -3.64  | 60.74          | 74       | -13.26 | peak          |
| 4824      | 48.54         | -3.64  | 44.90          | 54       | -9.10  | AVG           |
| 7236      | 57.34         | -0.95  | 56.39          | 74       | -17.61 | peak          |
| 7236      | 44.61         | -0.95  | 43.66          | 54       | -10.34 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4824      | 64.65         | -3.64  | 61.01          | 74       | -12.99 | peak          |
| 4824      | 47.44         | -3.64  | 43.80          | 54       | -10.20 | AVG           |
| 7236      | 60.95         | -0.95  | 60.00          | 74       | -14.00 | peak          |
| 7236      | 46.50         | -0.95  | 45.55          | 54       | -8.45  | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874.00            | 64.06                   | -3.51          | 60.55                      | 74.00              | -13.45         | peak          |
| 4874.00            | 46.59                   | -3.51          | 43.08                      | 54.00              | -10.92         | AVG           |
| 7311.00            | 59.95                   | -0.82          | 59.13                      | 74.00              | -14.87         | peak          |
| 7311.00            | 46.54                   | -0.82          | 45.72                      | 54.00              | -8.28          | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dBμV) | Factor<br>(dB) | Emission Level<br>(dBμV/m) | Limits<br>(dBμV/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------|----------------|----------------------------|--------------------|----------------|---------------|
| 4874.00            | 64.23                   | -3.51          | 60.72                      | 74.00              | -13.28         | peak          |
| 4874.00            | 48.51                   | -3.51          | 45.00                      | 54.00              | -9.00          | AVG           |
| 7311.00            | 59.30                   | -0.82          | 58.48                      | 74.00              | -15.52         | peak          |
| 7311.00            | 43.57                   | -0.82          | 42.75                      | 54.00              | -11.25         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924      | 62.55         | -3.43  | 59.12          | 74       | -14.88 | peak          |
| 4924      | 48.28         | -3.43  | 44.85          | 54       | -9.15  | AVG           |
| 7386      | 59.03         | -0.75  | 58.28          | 74       | -15.72 | peak          |
| 7386      | 43.53         | -0.75  | 42.78          | 54       | -11.22 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4924      | 64.06         | -3.43  | 60.63          | 74       | -13.37 | peak          |
| 4924      | 46.47         | -3.43  | 43.04          | 54       | -10.96 | AVG           |
| 7386      | 57.90         | -0.75  | 57.15          | 74       | -16.85 | peak          |
| 7386      | 43.45         | -0.75  | 42.70          | 54       | -11.30 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844      | 65.24         | -3.63  | 61.61          | 74       | -12.39 | peak          |
| 4844      | 48.44         | -3.63  | 44.81          | 54       | -9.19  | AVG           |
| 7266      | 59.32         | -0.94  | 58.38          | 74       | -15.62 | peak          |
| 7266      | 44.45         | -0.94  | 43.51          | 54       | -10.49 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 4844      | 64.66         | -3.63  | 61.03          | 74       | -12.97 | peak          |
| 4844      | 47.71         | -3.63  | 44.08          | 54       | -9.92  | AVG           |
| 7266      | 59.34         | -0.94  | 58.40          | 74       | -15.60 | peak          |
| 7266      | 44.31         | -0.94  | 43.37          | 54       | -10.63 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 4874      | 63.03         | -3.51  | 59.52          | 74             | -14.48 | peak          |
| 4874      | 48.96         | -3.51  | 45.45          | 54             | -8.55  | AVG           |
| 7311      | 60.76         | -0.82  | 59.94          | 74             | -14.06 | peak          |
| 7311      | 44.15         | -0.82  | 43.33          | 54             | -10.67 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 4874      | 62.33         | -3.51  | 58.82          | 74             | -15.18 | peak          |
| 4874      | 46.52         | -3.51  | 43.01          | 54             | -10.99 | AVG           |
| 7311      | 56.65         | -0.82  | 55.83          | 74             | -18.17 | peak          |
| 7311      | 43.34         | -0.82  | 42.52          | 54             | -11.48 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4904               | 65.04                         | -3.43          | 61.61                            | 74                       | -12.39         | peak          |
| 4904               | 48.59                         | -3.43          | 45.16                            | 54                       | -8.84          | AVG           |
| 7356               | 58.43                         | -0.75          | 57.68                            | 74                       | -16.32         | peak          |
| 7356               | 42.74                         | -0.75          | 41.99                            | 54                       | -12.01         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency<br>(MHz) | Meter Reading<br>(dB $\mu$ V) | Factor<br>(dB) | Emission Level<br>(dB $\mu$ V/m) | Limits<br>(dB $\mu$ V/m) | Margin<br>(dB) | Detector Type |
|--------------------|-------------------------------|----------------|----------------------------------|--------------------------|----------------|---------------|
| 4904               | 63.24                         | -3.43          | 59.81                            | 74                       | -14.19         | peak          |
| 4904               | 47.19                         | -3.43          | 43.76                            | 54                       | -10.24         | AVG           |
| 7356               | 58.63                         | -0.75          | 57.88                            | 74                       | -16.12         | peak          |
| 7356               | 42.62                         | -0.75          | 41.87                            | 54                       | -12.13         | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

**Remark:**

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.



**Restricted bands around fundamental frequency (Radiated)**

Operation Mode:  
ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.05         | -5.81  | 51.24          | 74       | -22.76 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 65.06         | -5.84  | 59.22          | 74       | -14.78 | peak          |
| 2399      | 48.59         | -5.84  | 42.75          | 54       | -11.25 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 56.87         | -5.81  | 51.06          | 74       | -22.94 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 63.48         | -5.84  | 57.64          | 74       | -16.36 | peak          |
| 2399      | 47.79         | -5.84  | 41.95          | 54       | -12.05 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.13         | -5.65  | 51.48          | 74       | -22.52 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.70         | -5.65  | 51.05          | 74       | -22.95 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.73         | -5.81  | 51.92          | 74       | -22.08 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 63.39         | -5.84  | 57.55          | 74       | -16.45 | peak          |
| 2399      | 46.72         | -5.84  | 40.88          | 54       | -13.12 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 57.50         | -5.81  | 51.69          | 74       | -22.31 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 61.44         | -5.84  | 55.60          | 74       | -18.40 | peak          |
| 2399      | 45.20         | -5.84  | 39.36          | 54       | -14.64 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.65         | -5.65  | 52.00          | 74       | -22.00 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.98         | -5.65  | 51.33          | 74       | -22.67 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 56.03         | -5.81  | 50.22          | 74       | -23.78 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 62.53         | -5.84  | 56.69          | 74       | -17.31 | peak          |
| 2399      | 48.46         | -5.84  | 42.62          | 54       | -11.38 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2390      | 56.76         | -5.81  | 50.95          | 74       | -23.05 | peak          |
| 2390      | /             | -5.81  | /              | 54       | /      | AVG           |
| 2399      | 61.54         | -5.84  | 55.70          | 74       | -18.30 | peak          |
| 2399      | 46.97         | -5.84  | 41.13          | 54       | -12.87 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 57.11         | -5.65  | 51.46          | 74       | -22.54 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 55.31         | -5.65  | 49.66          | 74       | -24.34 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.



Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 2390      | 58.08         | -5.81  | 52.27          | 74             | -21.73 | peak          |
| 2390      | /             | -5.81  | /              | 54             | /      | AVG           |
| 2399      | 62.84         | -5.84  | 57.00          | 74             | -17.00 | peak          |
| 2399      | 46.23         | -5.84  | 40.39          | 54             | -13.61 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

| Frequency | Meter Reading | Factor | Emission Level | Limits         | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------------|--------|---------------|
| (MHz)     | (dB $\mu$ V)  | (dB)   | (dB $\mu$ V/m) | (dB $\mu$ V/m) | (dB)   |               |
| 2390      | 57.40         | -5.81  | 51.59          | 74             | -22.41 | peak          |
| 2390      | /             | -5.81  | /              | 54             | /      | AVG           |
| 2399      | 61.85         | -5.84  | 56.01          | 74             | -17.99 | peak          |
| 2399      | 46.79         | -5.84  | 40.95          | 54             | -13.05 | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.60         | -5.65  | 50.95          | 74       | -23.05 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


| Frequency | Meter Reading | Factor | Emission Level | Limits   | Margin | Detector Type |
|-----------|---------------|--------|----------------|----------|--------|---------------|
| (MHz)     | (dBμV)        | (dB)   | (dBμV/m)       | (dBμV/m) | (dB)   |               |
| 2483.5    | 56.76         | -5.65  | 51.11          | 74       | -22.89 | peak          |
| 2483.5    | /             | -5.65  | /              | 54       | /      | AVG           |

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

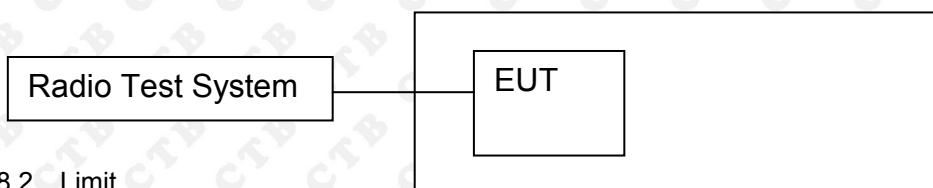

### 8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:

Below 30MHz:

RBW = 100kHz, VBW = 300kHz, Sweep = auto

Detector function = peak, Trace = max hold

Above 30MHz:

RBW = 100KHz, VBW = 300KHz, Sweep = auto

Detector function = peak, Trace = max hold




## 8.4 Test Result

ANT1:



## BAND EDGE Graphs

802.11g/LCH

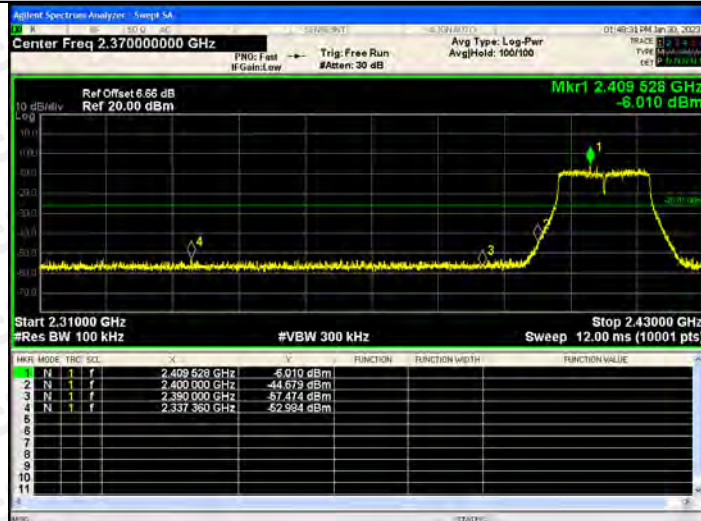


802.11g/HCH





## BAND EDGE Graphs

802.11g/LCH

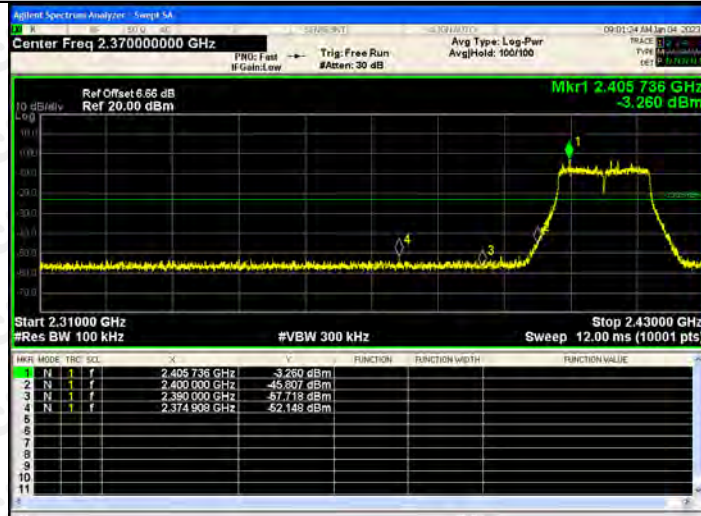


802.11g/HCH






## BAND EDGE Graphs

802.11n(HT20)/L  
CH

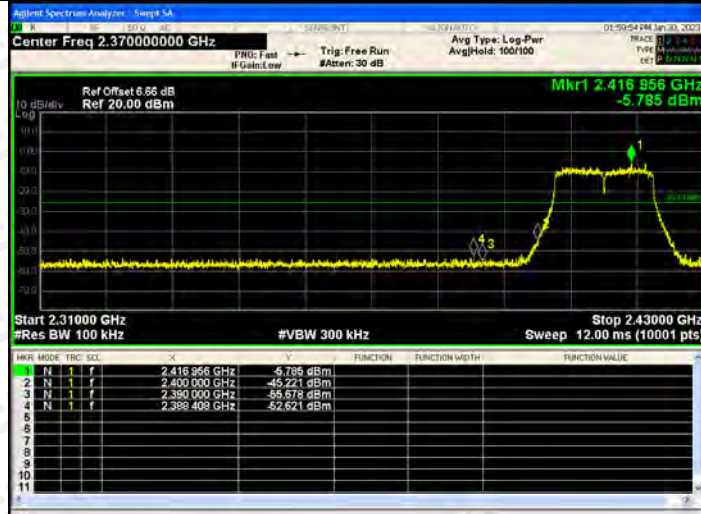


802.11n(HT20)/H  
CH

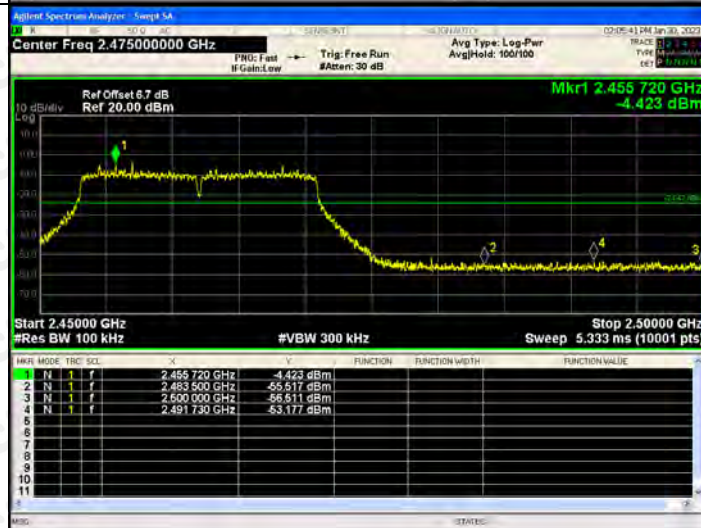

## BAND EDGE Graphs

802.11n(HT40)/L  
CH

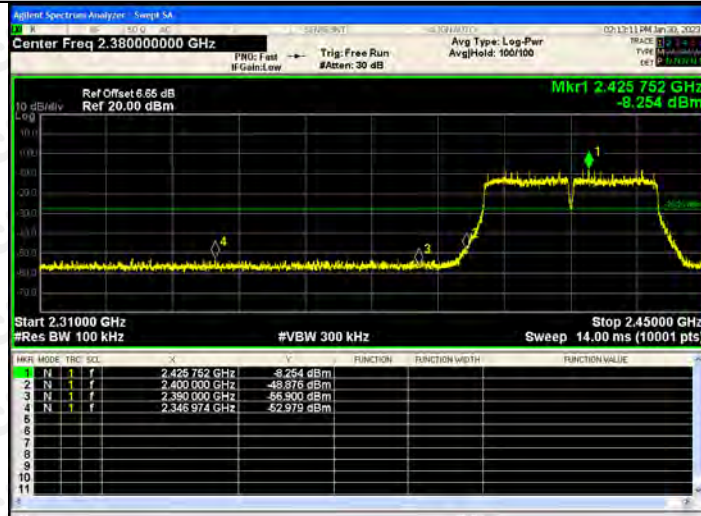

802.11n(HT40)/H  
CH





## RF Conducted Spurious Emissions Graphs






## RF Conducted Spurious Emissions Graphs




## RF Conducted Spurious Emissions Graphs

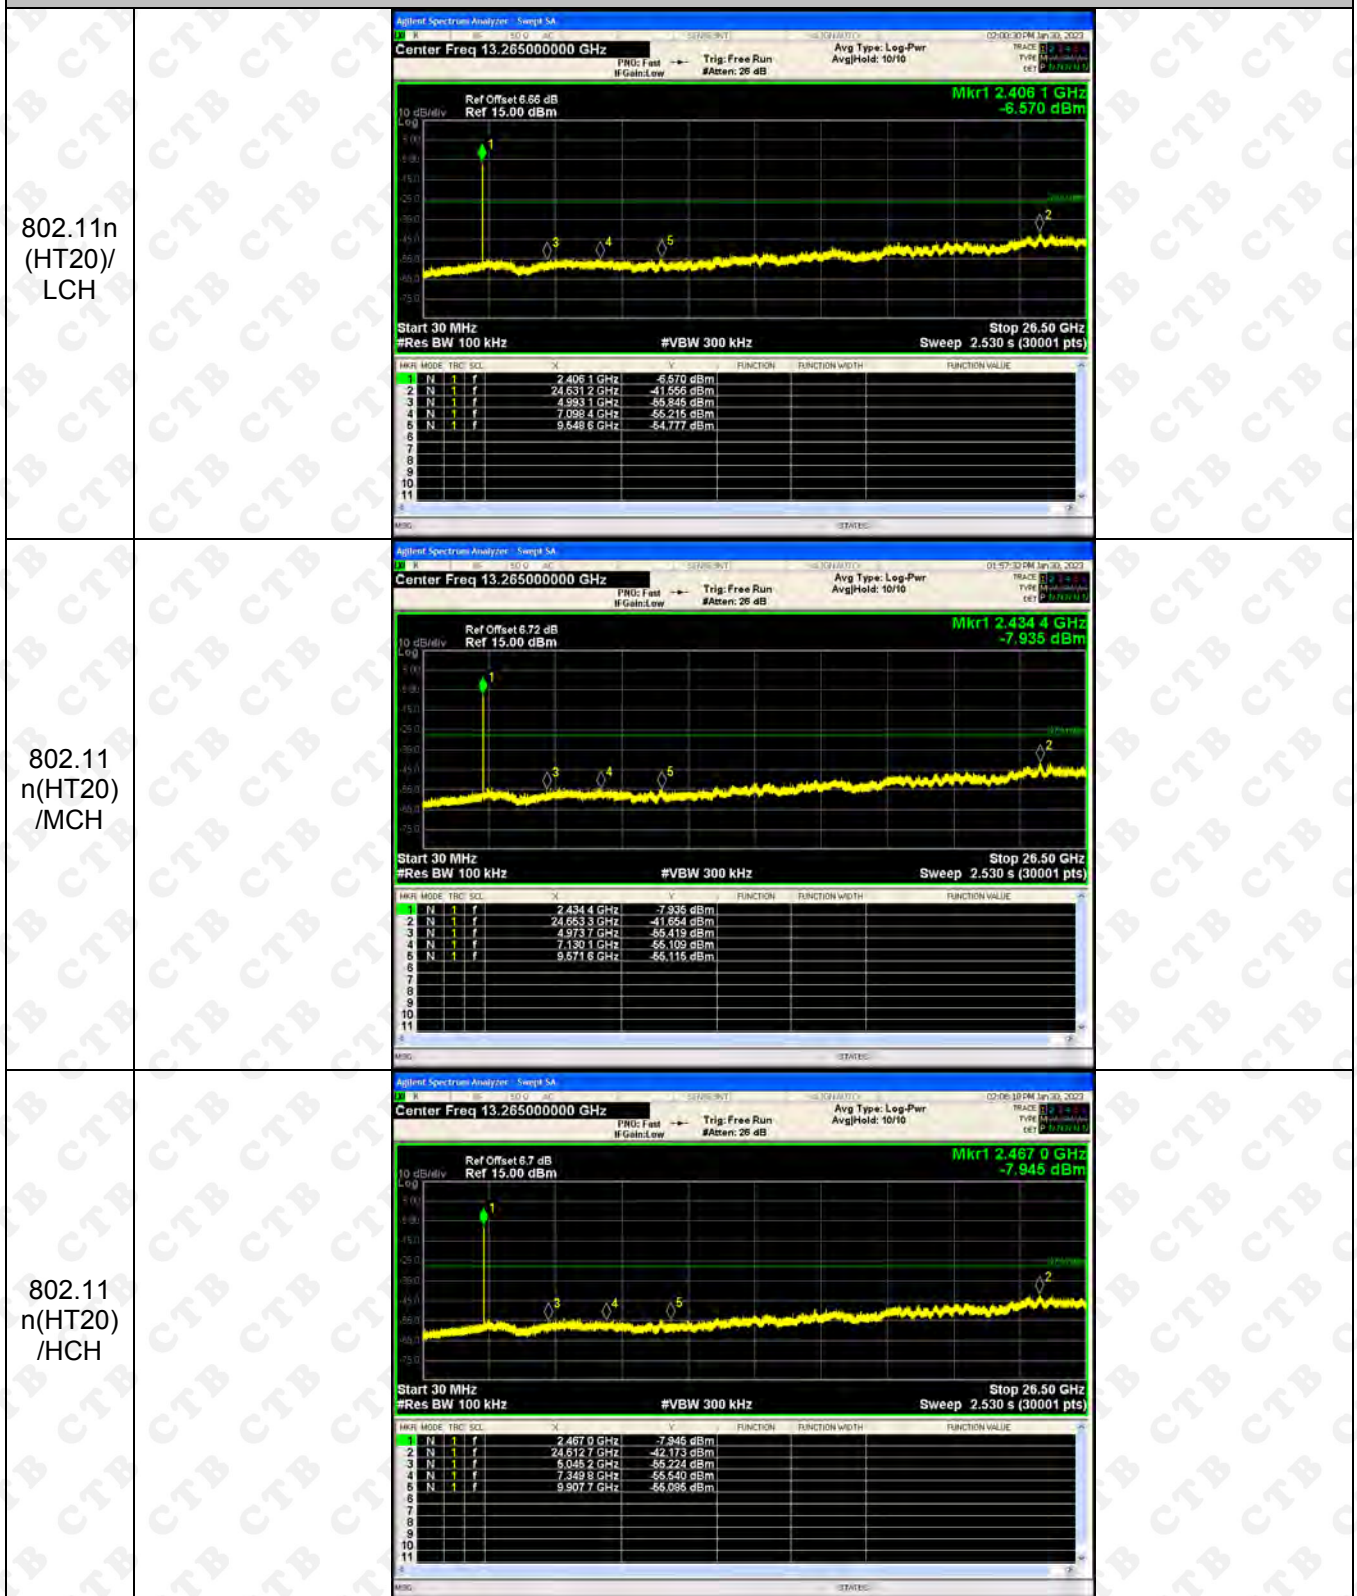





802.11n  
(HT40)/  
LCH

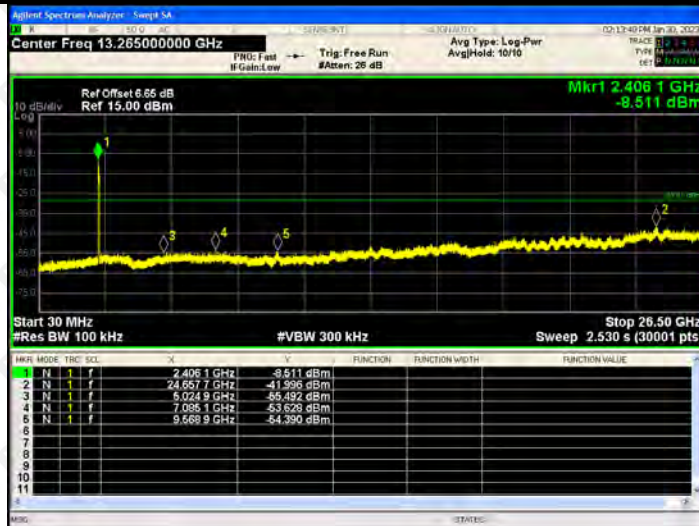

802.11  
n(HT40)  
/MCH

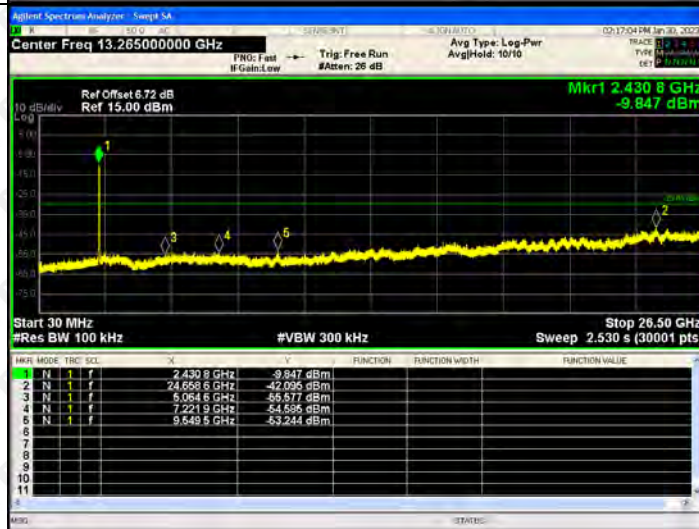

802.11  
n(HT40)  
/HCH

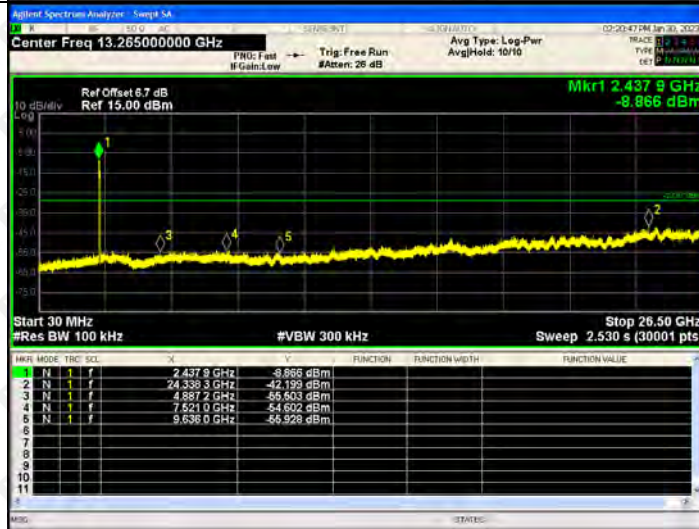





ANT2:

## BAND EDGE Graphs

802.11b/LCH

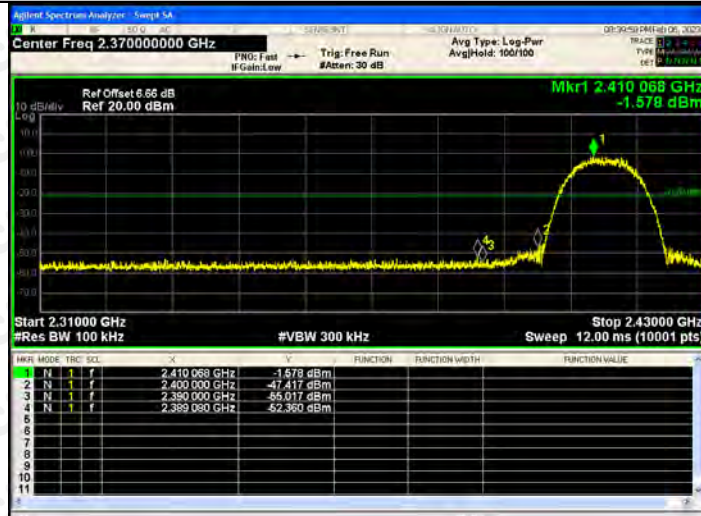


802.11b/HCH

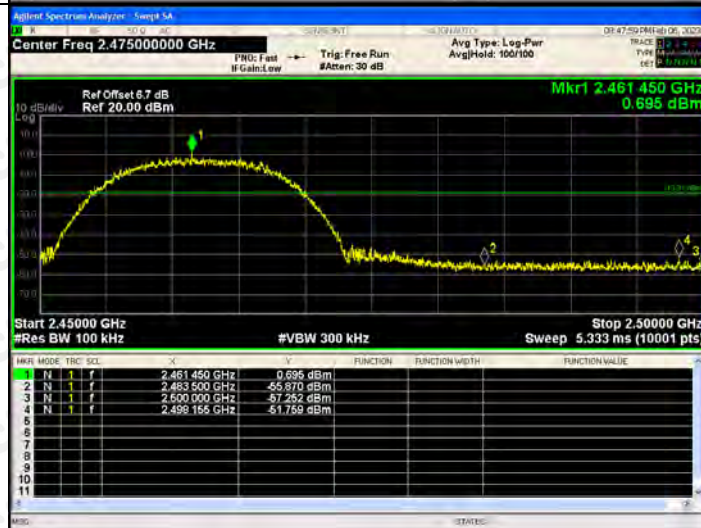

## BAND EDGE Graphs

802.11g/LCH

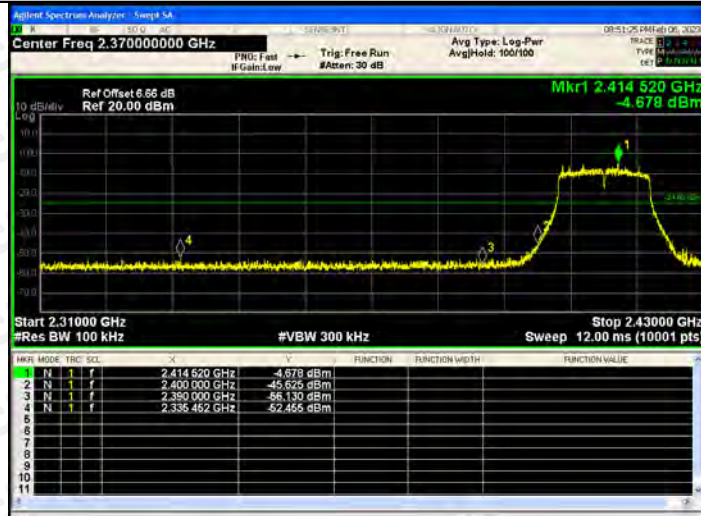


802.11g/HCH






## BAND EDGE Graphs

802.11n(HT20)/L  
CH

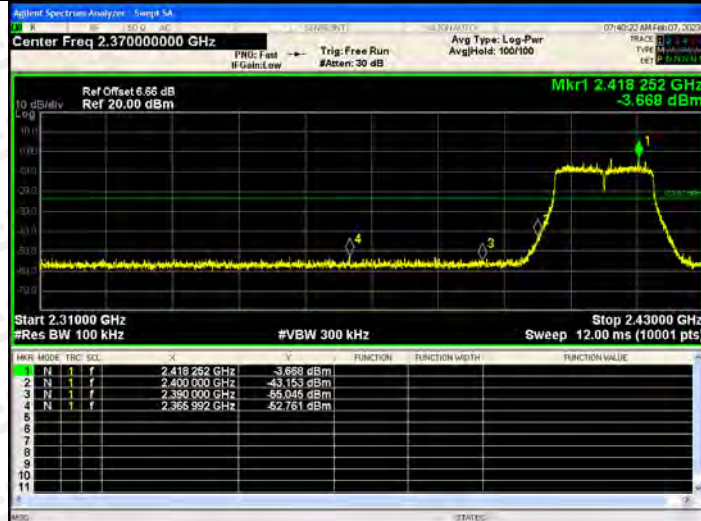


802.11n(HT20)/H  
CH

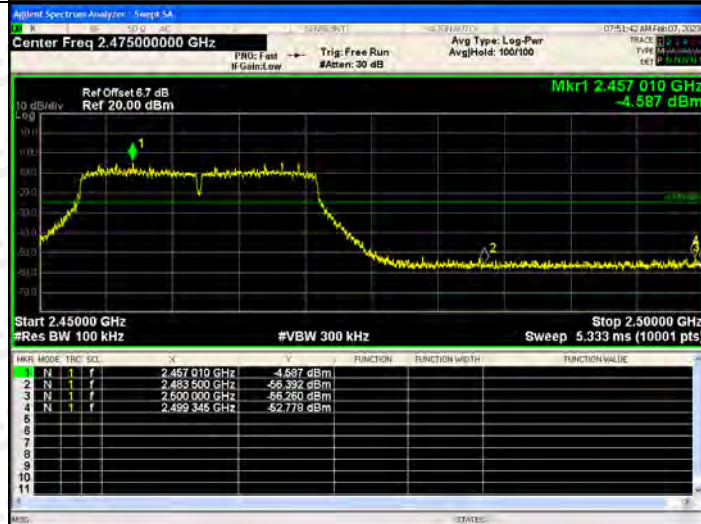



## BAND EDGE Graphs

802.11n(HT40)/L  
CH

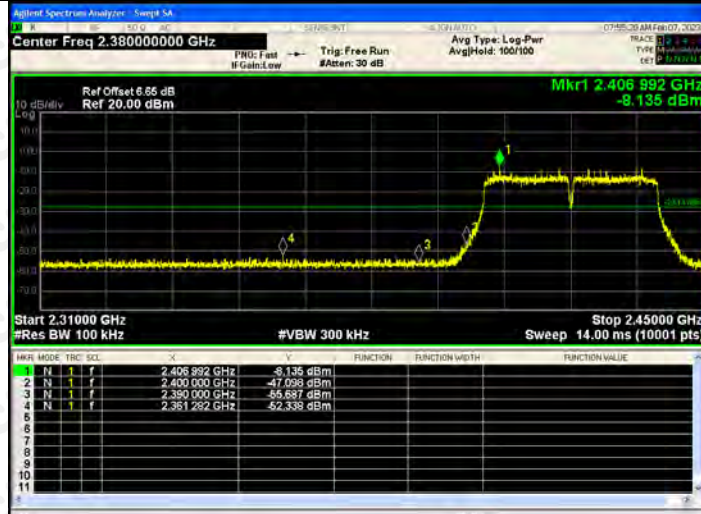

802.11n(HT40)/H  
CH



## RF Conducted Spurious Emissions Graphs






## RF Conducted Spurious Emissions Graphs





## RF Conducted Spurious Emissions Graphs

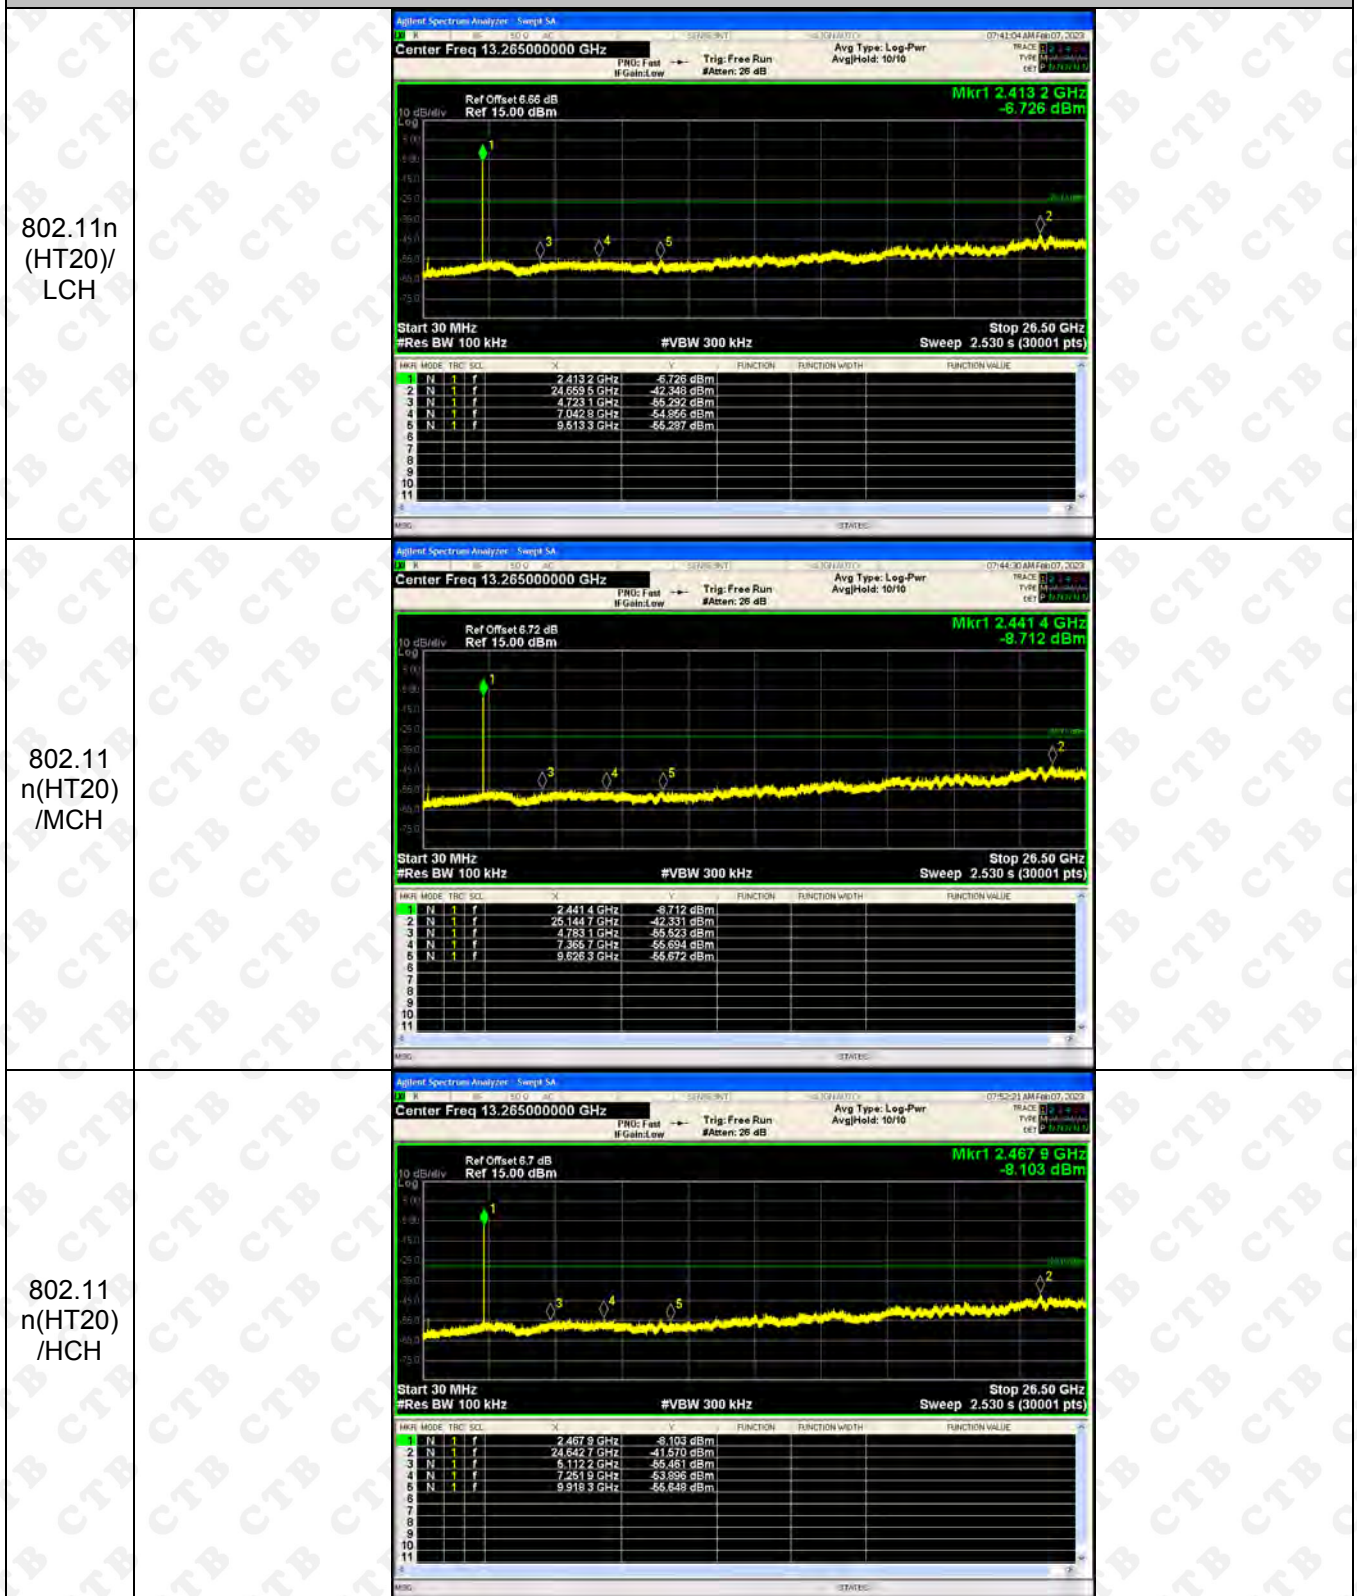


## RF Conducted Spurious Emissions Graphs





**9. COUDUCTED OUTPUT POWER**

9.1 Block Diagram Of Test Setup

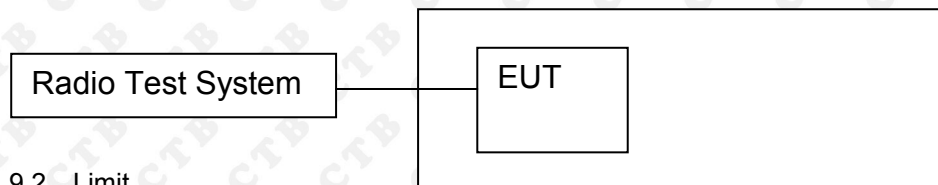

9.2 Limit

| FCC Part15 (15.247) , Subpart C |                   |                 |                       |        |
|---------------------------------|-------------------|-----------------|-----------------------|--------|
| Section                         | Test Item         | Limit           | Frequency Range (MHz) | Result |
| 15.247(b)(3)                    | Peak Output Power | 1 watt or 30dBm | 2400-2483.5           | PASS   |

9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.




## 9.4 Test Result

| Mode          | Channel. | Maximum Output Power [dBm] ant 1 | Maximum Output Power [dBm] ant 2 | Total Power Conducted Output Power(PK) | Limit[dBm] |
|---------------|----------|----------------------------------|----------------------------------|--|------------|
| 802.11b       | LCH      | 14.375                           | 14.436                           | /                                      | 30         |
|               | MCH      | 14.685                           | 14.373                           | /                                      | 30         |
|               | HCH      | 14.175                           | 14.863                           | /                                      | 30         |
| 802.11g       | LCH      | 13.358                           | 13.695                           | /                                      | 30         |
|               | MCH      | 13.321                           | 13.713                           | /                                      | 30         |
|               | HCH      | 13.631                           | 13.675                           | /                                      | 30         |
| 802.11n(HT20) | LCH      | 13.538                           | 13.455                           | 16.507                                 | 30         |
|               | MCH      | 13.171                           | 13.286                           | 16.239                                 | 30         |
|               | HCH      | 13.521                           | 13.496                           | 16.519                                 | 30         |
| 802.11n(HT40) | LCH      | 12.602                           | 12.601                           | 15.612                                 | 30         |
|               | MCH      | 12.519                           | 12.448                           | 15.494                                 | 30         |
|               | HCH      | 12.106                           | 12.203                           | 15.165                                 | 30         |

## 10. 6DB OCCUPIED BANDWIDTH

### 10.1 Block Diagram Of Test Setup

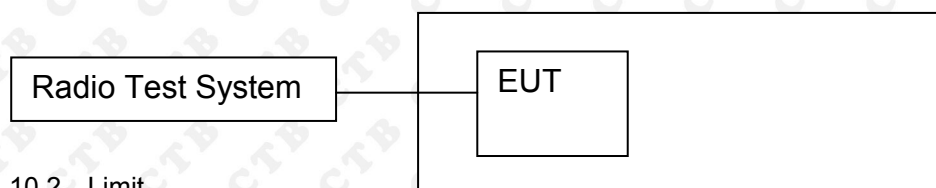

### 10.2 Limit

| FCC Part15 (15.247) , Subpart C |           |   |                       |        |
|---------------------------------|-----------|---|-----------------------|--------|
| Section                         | Test Item | Limit                                   | Frequency Range (MHz) | Result |
| 15.247(a)(2)                    | Bandwidth | $\geq 500\text{KHz}$<br>(6dB bandwidth) | 2400-2483.5           | PASS   |

### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.



10.4 Test Result

ANT1:

| Test Mode     | Frequency | 6dB Bandwidth (MHz) | Limit(kHz) | Result      |
|---------------|-----------|---------------------|------------|-------------|
| 802.11b       | LCH       | 10.126              | 500        | <b>PASS</b> |
|               | MCH       | 10.027              | 500        | <b>PASS</b> |
|               | HCH       | 10.62               | 500        | <b>PASS</b> |
| 802.11g       | LCH       | 16.358              | 500        | <b>PASS</b> |
|               | MCH       | 16.332              | 500        | <b>PASS</b> |
|               | HCH       | 16.367              | 500        | <b>PASS</b> |
| 802.11n(HT20) | LCH       | 16.918              | 500        | <b>PASS</b> |
|               | MCH       | 17.561              | 500        | <b>PASS</b> |
|               | HCH       | 17.172              | 500        | <b>PASS</b> |
| 802.11n(HT40) | LCH       | 35.639              | 500        | <b>PASS</b> |
|               | MCH       | 35.703              | 500        | <b>PASS</b> |
|               | HCH       | 35.476              | 500        | <b>PASS</b> |

ANT2:

| Test Mode     | Frequency | 6dB Bandwidth (MHz) | Limit(kHz) | Result      |
|---------------|-----------|---------------------|------------|-------------|
| 802.11b       | LCH       | 9.821               | 500        | <b>PASS</b> |
|               | MCH       | 10.252              | 500        | <b>PASS</b> |
|               | HCH       | 10.839              | 500        | <b>PASS</b> |
| 802.11g       | LCH       | 15.838              | 500        | <b>PASS</b> |
|               | MCH       | 15.193              | 500        | <b>PASS</b> |
|               | HCH       | 15.461              | 500        | <b>PASS</b> |
| 802.11n(HT20) | LCH       | 17.321              | 500        | <b>PASS</b> |
|               | MCH       | 17.304              | 500        | <b>PASS</b> |
|               | HCH       | 16.929              | 500        | <b>PASS</b> |
| 802.11n(HT40) | LCH       | 35.692              | 500        | <b>PASS</b> |
|               | MCH       | 35.21               | 500        | <b>PASS</b> |
|               | HCH       | 35.119              | 500        | <b>PASS</b> |



ANT1:  
Test Graph:

| Graphs              |   |                    |             |          |                   |  |  |                     |           |         |                |      |          |
|---------------------|---|--------------------|-------------|----------|-------------------|--|--|---------------------|-----------|---------|----------------|------|----------|
| 802.11b /LCH        | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz      Center Freq: 2.412000000 GHz      Radio Std: None</p> <p>Trig: Free Run      Avg/Hold: 100/100</p> <p>Ref Offset: 6.66 dB      Ref: 26.66 dBm      Mkr3 2.417046 GHz</p> <p>-7.2178 dBm</p> <p>Center 2.412 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.6 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>14.811 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 15.6 dBm | <b>14.811 MHz</b> |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power   | 15.6 dBm           |             |          |                   |  |  |                     |           |         |                |      |          |
| <b>14.811 MHz</b>   |   |                    |             |          |                   |  |  |                     |           |         |                |      |          |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |                   |  |  |                     |           |         |                |      |          |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |                   |  |  |                     |           |         |                |      |          |
| 802.11b /MCH        | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz      Center Freq: 2.437000000 GHz      Radio Std: None</p> <p>Trig: Free Run      Avg/Hold: 100/100</p> <p>Ref Offset: 6.72 dB      Ref: 26.72 dBm      Mkr3 2.441984 GHz</p> <p>-7.3930 dBm</p> <p>Center 2.437 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>16.0 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>14.841 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 16.0 dBm | <b>14.841 MHz</b> |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power   | 16.0 dBm           |             |          |                   |  |  |                     |           |         |                |      |          |
| <b>14.841 MHz</b>   |   |                    |             |          |                   |  |  |                     |           |         |                |      |          |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |                   |  |  |                     |           |         |                |      |          |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |                   |  |  |                     |           |         |                |      |          |
| 802.11b/HCH         | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz      Center Freq: 2.462000000 GHz      Radio Std: None</p> <p>Trig: Free Run      Avg/Hold: 100/100</p> <p>Ref Offset: 6.7 dB      Ref: 26.70 dBm      Mkr3 2.467254 GHz</p> <p>-8.5617 dBm</p> <p>Center 2.462 GHz      Span 30 MHz</p> <p>#Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.6 dBm</td> </tr> <tr> <td colspan="3" style="text-align: center;"><b>14.850 MHz</b></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>  | Occupied Bandwidth | Total Power | 15.6 dBm | <b>14.850 MHz</b> |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power   | 15.6 dBm           |             |          |                   |  |  |                     |           |         |                |      |          |
| <b>14.850 MHz</b>   |   |                    |             |          |                   |  |  |                     |           |         |                |      |          |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |                   |  |  |                     |           |         |                |      |          |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |                   |  |  |                     |           |         |                |      |          |

|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|---------------------|---|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|----------------|------|----------|--|--|--|--|--|--|
| <p>802.11g/LCH</p>  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.66 dB<br/>Ref: 26.66 dBm</p> <p>Mkr3: 2.420175 GHz<br/>-10.212 dBm</p> <p>Center: 2.412 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz<br/>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">16.431 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 12.4 dBm | 16.431 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |  |  |  |  |  |  |
| Occupied Bandwidth  | Total Power   | 12.4 dBm           |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| 16.431 MHz          |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| <p>802.11g/MCH</p>  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB<br/>Ref: 26.72 dBm</p> <p>Mkr3: 2.445166 GHz<br/>-10.568 dBm</p> <p>Center: 2.437 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz<br/>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">16.429 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 12.2 dBm | 16.429 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |  |  |  |  |  |  |
| Occupied Bandwidth  | Total Power   | 12.2 dBm           |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| 16.429 MHz          |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| <p>802.11g/HCH</p>  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.7 dB<br/>Ref: 26.70 dBm</p> <p>Mkr3: 2.470176 GHz<br/>-11.456 dBm</p> <p>Center: 2.462 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz<br/>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">16.431 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td></td> </tr> <tr> <td></td> <td></td> <td></td> </tr> </table>  | Occupied Bandwidth | Total Power | 12.5 dBm | 16.431 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |  |  |  |  |  |  |
| Occupied Bandwidth  | Total Power   | 12.5 dBm           |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| 16.431 MHz          |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |
|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |  |  |  |  |  |  |



|                               |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
|-------------------------------|---|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|----------------|------|----------|
| <p>802.11n(HT20)/LC<br/>H</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.412000000 GHz</p> <p>Ref Offset: 6.66 dB<br/>Ref: 26.66 dBm</p> <p>Mkr3: 2.420454 GHz<br/>-10.620 dBm</p> <p>Center: 2.412 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz<br/>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">17.602 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 12.4 dBm | 17.602 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth            | Total Power   | 12.4 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 17.602 MHz                    |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth                | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |
| <p>802.11n(HT20)/MC<br/>H</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB<br/>Ref: 26.72 dBm</p> <p>Mkr3: 2.445774 GHz<br/>-11.032 dBm</p> <p>Center: 2.437 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz<br/>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">17.609 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 12.2 dBm | 17.609 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth            | Total Power   | 12.2 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 17.609 MHz                    |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth                | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |
| <p>802.11n(HT20)/HC<br/>H</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.462000000 GHz</p> <p>Ref Offset: 6.7 dB<br/>Ref: 26.70 dBm</p> <p>Mkr3: 2.470658 GHz<br/>-12.180 dBm</p> <p>Center: 2.462 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 30 MHz<br/>Sweep: 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">17.606 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>  | Occupied Bandwidth | Total Power | 12.6 dBm | 17.606 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth            | Total Power   | 12.6 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 17.606 MHz                    |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth                | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |

|                               |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
|-------------------------------|---|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|----------------|------|----------|
| <p>802.11n(HT40)/LC<br/>H</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 6.65 dB<br/>Ref: 26.65 dBm</p> <p>Mkr3: 2.439806 GHz<br/>-15.269 dBm</p> <p>Center: 2.422 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz<br/>Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">36.018 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 12.2 dBm | 36.018 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth            | Total Power   | 12.2 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 36.018 MHz                    |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth                | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |
| <p>802.11n(HT40)/MC<br/>H</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB<br/>Ref: 26.72 dBm</p> <p>Mkr3: 2.454851 GHz<br/>-15.043 dBm</p> <p>Center: 2.437 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz<br/>Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.0 dBm</td> </tr> <tr> <td colspan="3">36.019 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 12.0 dBm | 36.019 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth            | Total Power   | 12.0 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 36.019 MHz                    |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth                | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |
| <p>802.11n(HT40)/HC<br/>H</p> | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset: 6.7 dB<br/>Ref: 26.70 dBm</p> <p>Mkr3: 2.469703 GHz<br/>-15.174 dBm</p> <p>Center: 2.452 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz<br/>Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.6 dBm</td> </tr> <tr> <td colspan="3">36.082 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>  | Occupied Bandwidth | Total Power | 11.6 dBm | 36.082 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth            | Total Power   | 11.6 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 36.082 MHz                    |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth                | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |







ANT2:  
Test Graph:

| Graphs       |  |
|--------------|--|
| 802.11b /LCH | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz      Center Freq: 2.412000000 GHz      Radio Std: None<br/>         Trig: Free Run      Avg/Hold: 100/100<br/>         #F Gain: Low      #Amen: 30 dB</p> <p>Ref Offset: 6.66 dB      Ref 26.66 dBm      Mkr3 2.416823 GHz<br/>         -7.0300 dBm</p> <p>Center 2.412 GHz      Span 30 MHz<br/>         #Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <p>Occupied Bandwidth      Total Power      16.0 dBm<br/> <b>14.412 MHz</b></p> <p>Transmit Freq Error      OBW Power      99.00 %<br/>         -87.452 kHz      x dB      -6.00 dB<br/>         x dB Bandwidth      9.821 MHz</p> |
| 802.11b /MCH | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz      Center Freq: 2.437000000 GHz      Radio Std: None<br/>         Trig: Free Run      Avg/Hold: 100/100<br/>         #F Gain: Low      #Amen: 30 dB</p> <p>Ref Offset: 6.72 dB      Ref 26.72 dBm      Mkr3 2.442122 GHz<br/>         -8.8324 dBm</p> <p>Center 2.437 GHz      Span 30 MHz<br/>         #Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <p>Occupied Bandwidth      Total Power      15.2 dBm<br/> <b>14.520 MHz</b></p> <p>Transmit Freq Error      OBW Power      99.00 %<br/>         -4.451 kHz      x dB      -6.00 dB<br/>         x dB Bandwidth      10.25 MHz</p>  |
| 802.11b/HCH  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz      Center Freq: 2.462000000 GHz      Radio Std: None<br/>         Trig: Free Run      Avg/Hold: 100/100<br/>         #F Gain: Low      #Amen: 30 dB</p> <p>Ref Offset: 6.7 dB      Ref 26.70 dBm      Mkr3 2.467424 GHz<br/>         -8.1818 dBm</p> <p>Center 2.462 GHz      Span 30 MHz<br/>         #Res BW 100 kHz      #VBW 300 kHz      Sweep 2.933 ms</p> <p>Occupied Bandwidth      Total Power      16.5 dBm<br/> <b>14.327 MHz</b></p> <p>Transmit Freq Error      OBW Power      99.00 %<br/>         4.753 kHz      x dB      -6.00 dB<br/>         x dB Bandwidth      10.84 MHz</p>    |

|                     |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
|---------------------|---|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|----------------|------|----------|
| <p>802.11g/LCH</p>  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Center Freq: 2.412000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3 2.41892 GHz</p> <p>-11.420 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">16.358 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>  | Occupied Bandwidth | Total Power | 12.5 dBm | 16.358 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power   | 12.5 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 16.358 MHz          |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |
| <p>802.11g/MCH</p>  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Center Freq: 2.437000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3 2.444604 GHz</p> <p>-9.5312 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">16.350 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table> | Occupied Bandwidth | Total Power | 12.6 dBm | 16.350 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power   | 12.6 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 16.350 MHz          |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |
| <p>802.11g/HCH</p>  | <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Center Freq: 2.462000000 GHz</p> <p>Trig: Free Run</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.469745 GHz</p> <p>-11.058 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">16.347 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>  | Occupied Bandwidth | Total Power | 12.5 dBm | 16.347 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | x dB Bandwidth | x dB | -6.00 dB |
| Occupied Bandwidth  | Total Power   | 12.5 dBm           |             |          |            |  |  |                     |           |         |                |      |          |
| 16.347 MHz          |   |                    |             |          |            |  |  |                     |           |         |                |      |          |
| Transmit Freq Error | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |                |      |          |
| x dB Bandwidth      | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |                |      |          |

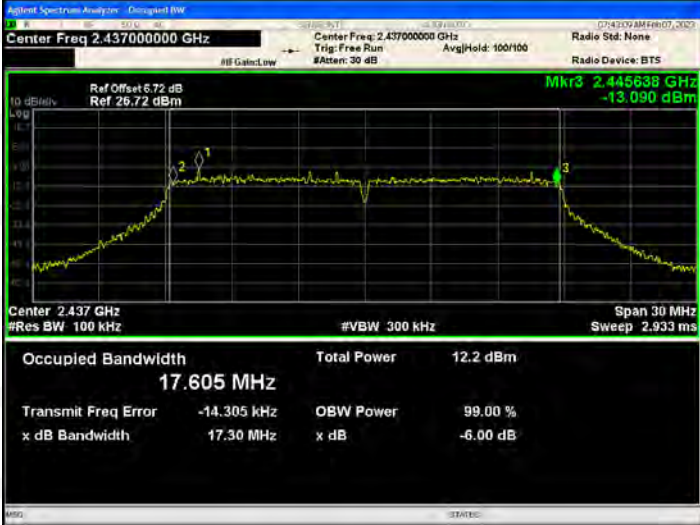


|                               |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
|-------------------------------|--|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|-------------|------|----------|----------------|--|--|-----------|--|--|
| <p>802.11n(HT20)/LC<br/>H</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.412000000 GHz</p> <p>Ref Offset 6.66 dB<br/>Ref 26.66 dBm</p> <p>Mkr3 2.42066 GHz<br/>-12.054 dBm</p> <p>Center 2.412 GHz<br/>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz<br/>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>13.5 dBm</td> </tr> <tr> <td>17.608 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-264 Hz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.32 MHz</td> <td></td> <td></td> </tr> </table>       | Occupied Bandwidth | Total Power | 13.5 dBm | 17.608 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -264 Hz     | x dB | -6.00 dB | x dB Bandwidth |  |  | 17.32 MHz |  |  |
| Occupied Bandwidth            | Total Power  | 13.5 dBm           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 17.608 MHz                    |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| Transmit Freq Error           | OBW Power  | 99.00 %            |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| -264 Hz                       | x dB   | -6.00 dB           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| x dB Bandwidth                |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 17.32 MHz                     |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| <p>802.11n(HT20)/MC<br/>H</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.437000000 GHz</p> <p>Ref Offset 6.72 dB<br/>Ref 26.72 dBm</p> <p>Mkr3 2.445638 GHz<br/>-13.090 dBm</p> <p>Center 2.437 GHz<br/>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz<br/>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td>17.605 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-14.305 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.30 MHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 12.2 dBm | 17.605 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -14.305 kHz | x dB | -6.00 dB | x dB Bandwidth |  |  | 17.30 MHz |  |  |
| Occupied Bandwidth            | Total Power  | 12.2 dBm           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 17.605 MHz                    |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| Transmit Freq Error           | OBW Power  | 99.00 %            |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| -14.305 kHz                   | x dB   | -6.00 dB           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| x dB Bandwidth                |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 17.30 MHz                     |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| <p>802.11n(HT20)/HC<br/>H</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.462000000 GHz</p> <p>Ref Offset 6.7 dB<br/>Ref 26.70 dBm</p> <p>Mkr3 2.47044 GHz<br/>-11.237 dBm</p> <p>Center 2.462 GHz<br/>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz<br/>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.7 dBm</td> </tr> <tr> <td>17.621 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-24.450 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.93 MHz</td> <td></td> <td></td> </tr> </table>  | Occupied Bandwidth | Total Power | 12.7 dBm | 17.621 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -24.450 kHz | x dB | -6.00 dB | x dB Bandwidth |  |  | 16.93 MHz |  |  |
| Occupied Bandwidth            | Total Power  | 12.7 dBm           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 17.621 MHz                    |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| Transmit Freq Error           | OBW Power  | 99.00 %            |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| -24.450 kHz                   | x dB   | -6.00 dB           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| x dB Bandwidth                |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 16.93 MHz                     |  |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |

|                               |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
|-------------------------------|---|--------------------|-------------|----------|------------|--|--|---------------------|-----------|---------|-------------|------|----------|----------------|--|--|-----------|--|--|
| <p>802.11n(HT40)/LC<br/>H</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.422000000 GHz</p> <p>Ref Offset: 6.65 dB<br/>Ref: 26.65 dBm</p> <p>Mkr3: 2.439826 GHz<br/>-14.912 dBm</p> <p>Center: 2.422 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz<br/>Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>36.011 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-19.981 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.69 MHz</td> <td></td> <td></td> </tr> </table>  | Occupied Bandwidth | Total Power | 12.1 dBm | 36.011 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -19.981 kHz | x dB | -6.00 dB | x dB Bandwidth |  |  | 35.69 MHz |  |  |
| Occupied Bandwidth            | Total Power   | 12.1 dBm           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 36.011 MHz                    |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| -19.981 kHz                   | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| x dB Bandwidth                |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 35.69 MHz                     |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| <p>802.11n(HT40)/MC<br/>H</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.437000000 GHz</p> <p>Ref Offset: 6.72 dB<br/>Ref: 26.72 dBm</p> <p>Mkr3: 2.454673 GHz<br/>-12.202 dBm</p> <p>Center: 2.437 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz<br/>Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>36.033 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-32.067 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.21 MHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 12.1 dBm | 36.033 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -32.067 kHz | x dB | -6.00 dB | x dB Bandwidth |  |  | 35.21 MHz |  |  |
| Occupied Bandwidth            | Total Power   | 12.1 dBm           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 36.033 MHz                    |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| -32.067 kHz                   | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| x dB Bandwidth                |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 35.21 MHz                     |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| <p>802.11n(HT40)/HC<br/>H</p> |  <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq: 2.452000000 GHz</p> <p>Ref Offset: 6.7 dB<br/>Ref: 26.70 dBm</p> <p>Mkr3: 2.469537 GHz<br/>-10.291 dBm</p> <p>Center: 2.452 GHz<br/>#Res BW: 100 kHz</p> <p>#VBW: 300 kHz</p> <p>Span: 60 MHz<br/>Sweep: 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>11.6 dBm</td> </tr> <tr> <td>36.038 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-22.744 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>35.12 MHz</td> <td></td> <td></td> </tr> </table> | Occupied Bandwidth | Total Power | 11.6 dBm | 36.038 MHz |  |  | Transmit Freq Error | OBW Power | 99.00 % | -22.744 kHz | x dB | -6.00 dB | x dB Bandwidth |  |  | 35.12 MHz |  |  |
| Occupied Bandwidth            | Total Power   | 11.6 dBm           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 36.038 MHz                    |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| Transmit Freq Error           | OBW Power   | 99.00 %            |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| -22.744 kHz                   | x dB  | -6.00 dB           |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| x dB Bandwidth                |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |
| 35.12 MHz                     |   |                    |             |          |            |  |  |                     |           |         |             |      |          |                |  |  |           |  |  |



## 11. POWER SPECTRAL DENSITY

### 11.1 Block Diagram Of Test Setup

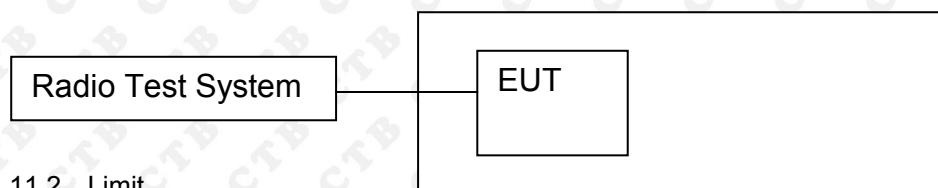

### 11.2 Limit

| FCC Part15 (15.247) , Subpart C |                        |                        |                       |        |
|---------------------------------|------------------------|------------------------|-----------------------|--------|
| Section                         | Test Item              | Limit                  | Frequency Range (MHz) | Result |
| 15.247                          | Power Spectral Density | 8 dBm<br>(in any 3KHz) | 2400-2483.5           | PASS   |

### 11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




## 11.4 Test Result

| Mode           | Channel. | Power Spectral Density [dBm /3KHz] ANT 1 | Power Spectral Density [dBm /3KHz] ANT 2 | Power Spectral Density [dBm /3KHz]Total | Limit(dBm) |
|----------------|----------|--|--|---|------------|
| 802.11b        | LCH      | -15.475                                  | -15.136                                  | /                                       | 8          |
|                | MCH      | -15.171                                  | -15.298                                  | /                                       | 8          |
|                | HCH      | -15.899                                  | -14.728                                  | /                                       | 8          |
| 802.11g        | LCH      | -18.405                                  | -18.916                                  | /                                       | 8          |
|                | MCH      | -18.585                                  | -18.952                                  | /                                       | 8          |
|                | HCH      | -18.262                                  | -18.775                                  | /                                       | 8          |
| 802.11n(H T20) | LCH      | -18.993                                  | -17.735                                  | -15.308                                 | 8          |
|                | MCH      | -19.1                                    | -19.139                                  | -16.109                                 | 8          |
|                | HCH      | -19.214                                  | -18.907                                  | -16.047                                 | 8          |
| 802.11n(H T40) | LCH      | -22.534                                  | -22.534                                  | -19.524                                 | 8          |
|                | MCH      | -22.97                                   | -22.857                                  | -19.903                                 | 8          |
|                | HCH      | -23.475                                  | -23.387                                  | -20.420                                 | 8          |


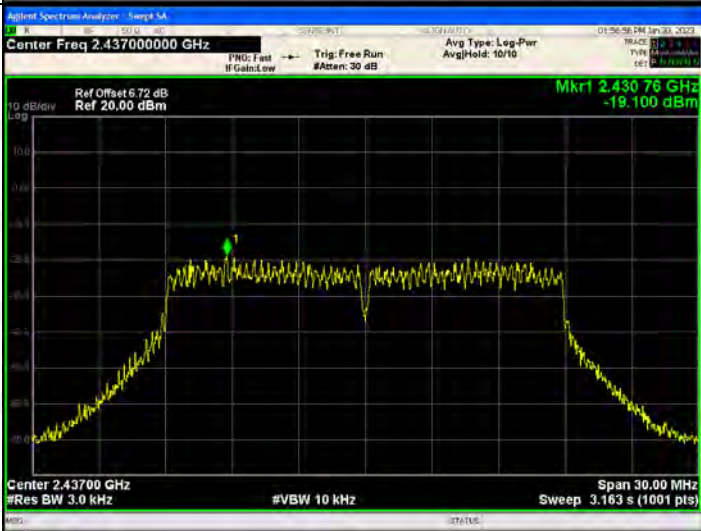



ANT1:  
Test Graph

| Graphs       |  |
|--------------|--|
| 802.11b /LCH |    |
| 802.11b /MCH |   |
| 802.11b/HCH  |  |
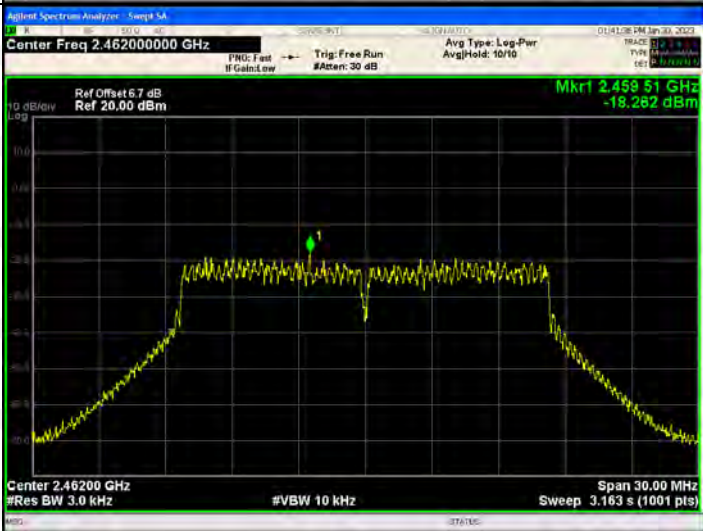
|                    |  |
|--------------------|--|
| <p>802.11g/LCH</p> |    |
| <p>802.11g/MCH</p> |   |
| <p>802.11g/HCH</p> |  |





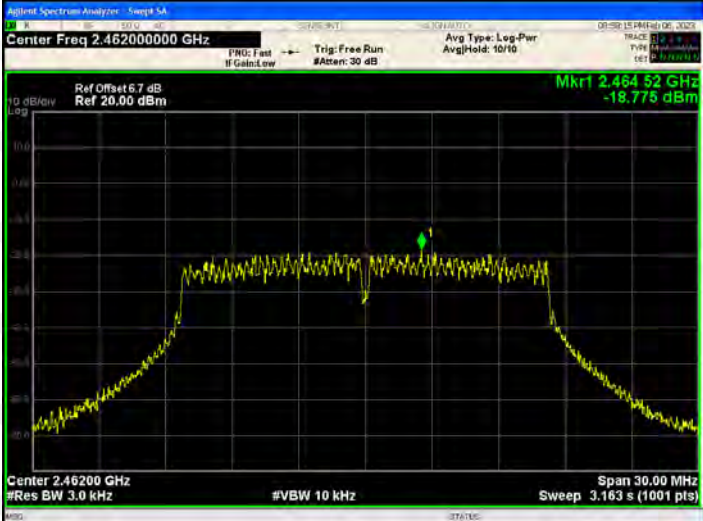
|                               |  |
|-------------------------------|--|
| <p>802.11n(HT20)/LC<br/>H</p> |    |
| <p>802.11n(HT20)/MC<br/>H</p> |   |
| <p>802.11n(HT20)/HC<br/>H</p> |  |

|                               |  |
|-------------------------------|--|
| <p>802.11n(HT40)/LC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.422000000 GHz<br/>Ref Offset 6.65 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.43730 GHz<br/>-22.534 dBm<br/>Center 2.42200 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 60.00 MHz<br/>Sweep 6.326 s (1001 pts)</p> |
| <p>802.11n(HT40)/MC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.437000000 GHz<br/>Ref Offset 6.72 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.45230 GHz<br/>-22.970 dBm<br/>Center 2.43700 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 60.00 MHz<br/>Sweep 6.326 s (1001 pts)</p> |
| <p>802.11n(HT40)/HC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.452000000 GHz<br/>Ref Offset 6.7 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.45014 GHz<br/>-23.476 dBm<br/>Center 2.45200 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 60.00 MHz<br/>Sweep 6.326 s (1001 pts)</p>  |



ANT 2:  
Test Graph

| Graphs       |  |
|--------------|--|
| 802.11b /LCH |  |
| 802.11b /MCH |  |
| 802.11b/HCH  |  |
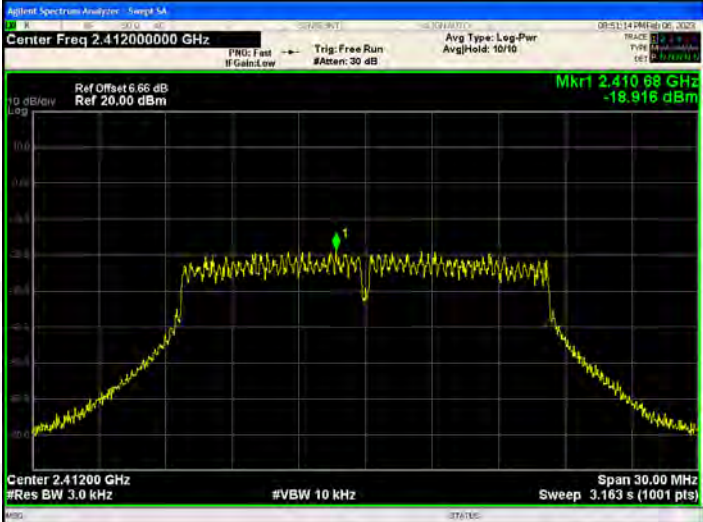
|                    |  |
|--------------------|--|
| <p>802.11g/LCH</p> |    |
| <p>802.11g/MCH</p> |   |
| <p>802.11g/HCH</p> |  |



|                               |   |
|-------------------------------|---|
| <p>802.11n(HT20)/LC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.41200000 GHz<br/>Ref Offset 6.66 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.41827 GHz<br/>-17.738 dBm<br/>Center 2.41200 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 30.00 MHz<br/>Sweep 3.163 s (1001 pts)</p> |
| <p>802.11n(HT20)/MC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.43700000 GHz<br/>Ref Offset 6.72 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.43076 GHz<br/>-18.139 dBm<br/>Center 2.43700 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 30.00 MHz<br/>Sweep 3.163 s (1001 pts)</p> |
| <p>802.11n(HT20)/HC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.46200000 GHz<br/>Ref Offset 6.7 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.46827 GHz<br/>-18.907 dBm<br/>Center 2.46200 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 30.00 MHz<br/>Sweep 3.163 s (1001 pts)</p>  |

|                               |  |
|-------------------------------|--|
| <p>802.11n(HT40)/LC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.422000000 GHz<br/>Ref Offset 6.65 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.43730 GHz<br/>-22.534 dBm<br/>Center 2.42200 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 60.00 MHz<br/>Sweep 6.326 s (1001 pts)</p> |
| <p>802.11n(HT40)/MC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.437000000 GHz<br/>Ref Offset 6.72 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.45230 GHz<br/>-22.857 dBm<br/>Center 2.43700 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 60.00 MHz<br/>Sweep 6.326 s (1001 pts)</p> |
| <p>802.11n(HT40)/HC<br/>H</p> | <p>Agilent Spectrum Analyzer - Sweep SA<br/>Center Freq 2.452000000 GHz<br/>Ref Offset 6.7 dB<br/>Ref 20.00 dBm<br/>Mkr1 2.46730 GHz<br/>-23.387 dBm<br/>Center 2.45200 GHz<br/>#Res BW 3.0 kHz<br/>#VBW 10 kHz<br/>Span 60.00 MHz<br/>Sweep 6.326 s (1001 pts)</p>  |



## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is internal antenna and no consideration of replacement. The best case gain of the antenna is 0.92dBi

**13. EUT PHOTOGRAPHS****External Photos  
EUT Photo 1****EUT Photo 2**



## 14. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission


Below 1G



Above 1G



Conducted Emission

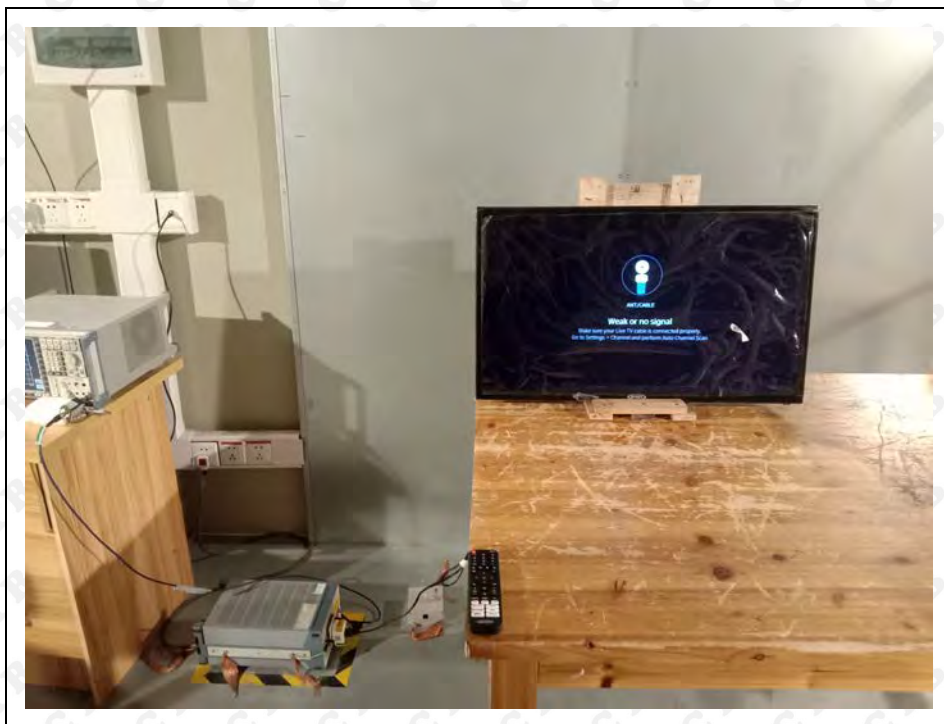

※※※※※ END OF REPORT ※※※※※