

# TEST REPORT

Product Name: 40 INCH DLED TV  
FCC ID: 2AHU2-JE4023S  
Trademark: JENSEN  
Model Number: JE4023S  
Prepared For: ASA Electronics Shenzhen Limited  
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China  
Manufacturer: ASA Electronics Shenzhen Limited  
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China  
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.  
Address: 1&2/F., Building A, No.26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China  
Sample Received Date: Dec. 30, 2022  
Sample tested Date: Dec. 30, 2022 to Jan. 11, 2023  
Issue Date: Jan. 11, 2023  
Report No.: CTB230104037RF  
Test Standards: FCC Part15.247  
ANSI C63.10:2013  
Test Results: PASS  
Remark: This is WIFI-2.4GHZ band radio test report.  
Compiled by: Reviewed by: Approved by:

ChenZheng

Chen Zheng

Arron Liu

Arron Liu



Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "\*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

**TABLE OF CONTENT**

	Page
Test Report Declaration	
<b>1. VERSION</b> .....	3
<b>2. TEST SUMMARY</b> .....	4
<b>3. MEASUREMENT UNCERTAINTY</b> .....	5
<b>4. PRODUCT INFORMATION AND TEST SETUP</b> .....	6
4.1 Product Information .....	6
4.2 Test Setup Configuration .....	6
4.3 Support Equipment .....	6
4.4 Channel List .....	6
4.5 Test Mode .....	7
4.6 Test Environment .....	7
<b>5. TEST FACILITY AND TEST INSTRUMENT USED</b> .....	8
5.1 Test Facility .....	8
5.2 Test Instrument Used .....	8
<b>6. AC POWER LINE CONDUCTED EMISSION</b> .....	10
6.1 Block Diagram Of Test Setup .....	10
6.2 Limit .....	10
6.3 Test procedure .....	10
6.4 Test Result .....	12
<b>7. RADIATED SPURIOUS EMISSION</b> .....	14
7.1 Block Diagram Of Test Setup .....	14
7.2 Limit .....	14
7.3 Test procedure .....	15
7.4 Test Result .....	16
<b>8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS</b> .....	38
8.1 Block Diagram Of Test Setup .....	38
8.2 Limit .....	38
8.3 Test procedure .....	38
8.4 Test Result .....	39
<b>9. CONDUCTED OUTPUT POWER</b> .....	55
9.1 Block Diagram Of Test Setup .....	55
9.2 Limit .....	55
9.3 Test procedure .....	55
9.4 Test Result .....	56
<b>10. 6DB OCCUPIED BANDWIDTH</b> .....	57
10.1 Block Diagram Of Test Setup .....	57
10.2 Limit .....	57
10.3 Test procedure .....	57
10.4 Test Result .....	58
<b>11. POWER SPECTRAL DENSITY</b> .....	68
11.1 Block Diagram Of Test Setup .....	68
11.2 Limit .....	68
11.3 Test procedure .....	68
11.4 Test Result .....	69
<b>12. ANTENNA REQUIREMENT</b> .....	78
<b>13. EUT PHOTOGRAPHS</b> .....	79
<b>14. EUT TEST SETUP PHOTOGRAPHS</b> .....	80

(Note: N/A means not applicable)



1. VERSION

Report No.	Issue Date	Description	Approved
CTB230104037RF	Jan. 11, 2023	Original	Valid

## 2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
<b>Band edge and RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
<b>6dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
<b>Power Spectral Density</b>	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
<b>RF Exposure Evaluation</b>	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

### 3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

#### 4. PRODUCT INFORMATION AND TEST SETUP

##### 4.1 Product Information

Model(s):	JE4023S
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G) : 16.752dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G) : 0.92dBi
Ratings:	AC 120V/60Hz

##### 4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

##### 4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
/	/	/	/	/	/

##### Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

##### 4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

#### 4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 0.92dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 4.01dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 1dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

#### 4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(AC):	120
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

## 5. TEST FACILITY AND TEST INSTRUMENT USED

### 5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

### 5.2 Test Instrument Used

Item	Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	2023.07.19
2	Power Sensor	Agilent	U2021XA	MY56120032	2023.07.19
3	Power Sensor	Agilent	U2021XA	MY56120034	2023.07.19
4	Communication test set	R&S	CMW500	108058	2023.07.19
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	2023.07.19
6	Signal Generator	Agilent	N5181A	MY50140365	2023.07.19
7	Vector signal generator	Agilent	N5182A	MY47420195	2023.07.19
8	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
9	2.4 GHz Filter	Shenxiang	MSF2400-2483.5MS-1154	20181015001	2023.07.19
10	5 GHz Filter	Shenxiang	MSF5150-5850 MS-1155	20181015001	2023.07.19
11	Filter	Xingbo	XBLBQ-DZA120	190821-1-1	2023.07.19
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	2023.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	2023.07.19
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/
16	966 chamber	C.R.T.	966	/	2024.08.11
17	Receiver	R&S	ESPI	100362	2023.07.19
18	Amplifier	HP	8447E	2945A02747	2023.07.19
19	Amplifier	Agilent	8449B	3008A01838	2023.07.19
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22




21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	2023.07.22
22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	2023.07.23
24	loop antenna	ZHINAN	ZN30900A	GTS534	/
25	40G Horn antenna	A/H/System	SAS-574	588	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	2024.10.30

Continuous disturbance					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	2023.07.19
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	2023.07.19
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
4	Coaxial cable	ZDECL	Z302S-NJ-SMA J-12M	18091905	2023.07.19
5	ISN	Schwarzbeck	NTFM8158	183	2023.07.19
6	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
7	Communication test set	R&S	CMW500	108058	2023.07.19
8	EZ-EMC	Frad	EMC-con3A1.1	/	/

Radiated emission					
No.	Equipment	Manufacturer	Model No.	Serial No.	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	2023.07.22
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	2023.07.22
3	Amplifier	Agilent	8449B	3008A01838	2023.07.19
4	Amplifier	HP	8447E	2945A02747	2023.07.19
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	2023.07.19
6	Coaxial cable	ETS	RFC-SNS-100-NMS-80 NI	/	2023.07.19
7	Coaxial cable	ETS	RFC-SNS-100-NMS-20 NI	/	2023.07.19
8	Coaxial cable	ETS	RFC-SNS-100-SMS-20 NI	/	2023.07.19
9	Coaxial cable	ETS	RFC-NNS-100-NMS-300 NI	/	2023.07.19
10	Communication test set	Agilent	E5515C	MY50102567	2023.07.19
11	Communication test set	R&S	CMW500	108058	2023.07.19
12	EZ-EMC	Frad	EMC-con3A1.1	/	/

## 6. AC POWER LINE CONDUCTED EMISSION

### 6.1 Block Diagram Of Test Setup

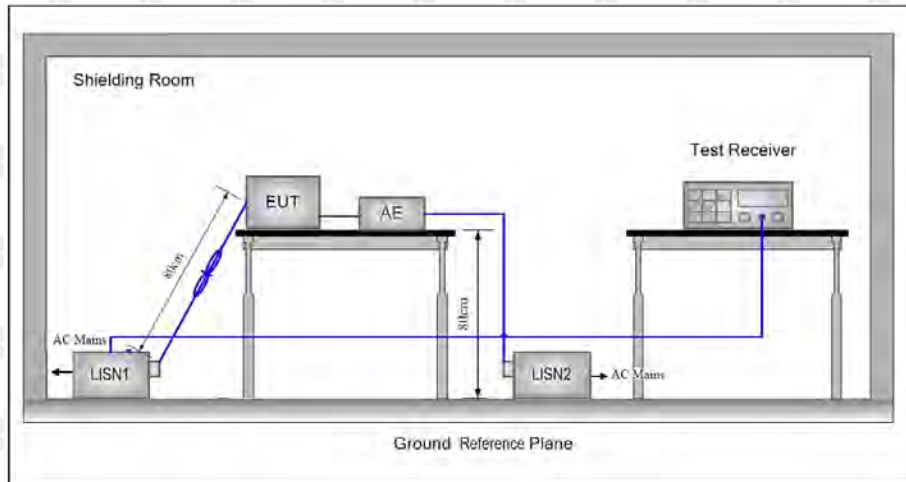

### 6.2 Limit

**Table 4 – AC power-line conducted emissions limits**

Frequency (MHz)	Conducted limit (dB $\mu$ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 <sup>Note 1</sup>	56 to 46 <sup>Note 1</sup>
0.5 - 5	56	46
5 - 30	60	50

**Note 1:** The level decreases linearly with the logarithm of the frequency.

\* Decreasing linearly with the logarithm of the frequency

### 6.3 Test procedure


- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 $\Omega$ /50 $\mu$ H + 5 $\Omega$  linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane.

This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

### 6.4 Test Result


Test Specification: Line  
AC 120V 60Hz

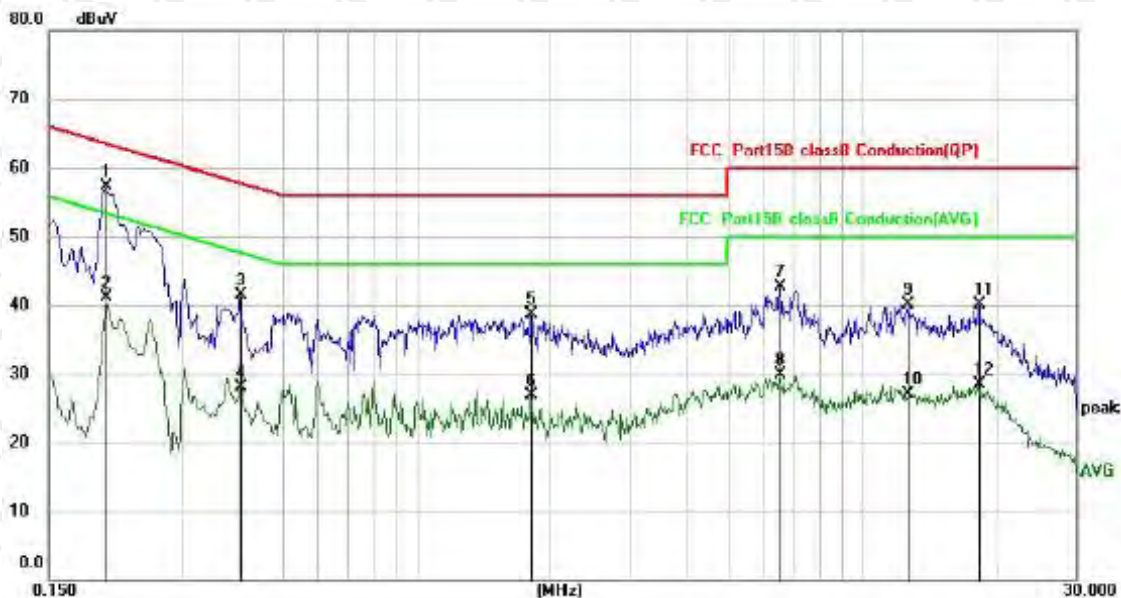

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV	dBuV	dB	
1	*	0.2020	47.22	10.00	57.22	63.53	-6.31	QP
2		0.2020	31.10	10.00	41.10	53.53	-12.43	AVG
3		0.4020	31.50	9.98	41.48	57.81	-16.33	QP
4		0.4020	18.14	9.98	28.12	47.81	-19.69	AVG
5		1.8020	28.60	10.02	38.62	56.00	-17.38	QP
6		1.8020	16.98	10.02	27.00	46.00	-19.00	AVG
7		6.5140	32.44	10.22	42.66	60.00	-17.34	QP
8		6.5140	19.76	10.22	29.98	50.00	-20.02	AVG
9		12.6300	29.70	10.41	40.11	60.00	-19.89	QP
10		12.6300	16.73	10.41	27.14	50.00	-22.86	AVG
11		18.1700	29.67	10.53	40.20	60.00	-19.80	QP
12		18.1700	18.04	10.53	28.57	50.00	-21.43	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

Test Specification: Neutral  
AC 120V 60Hz

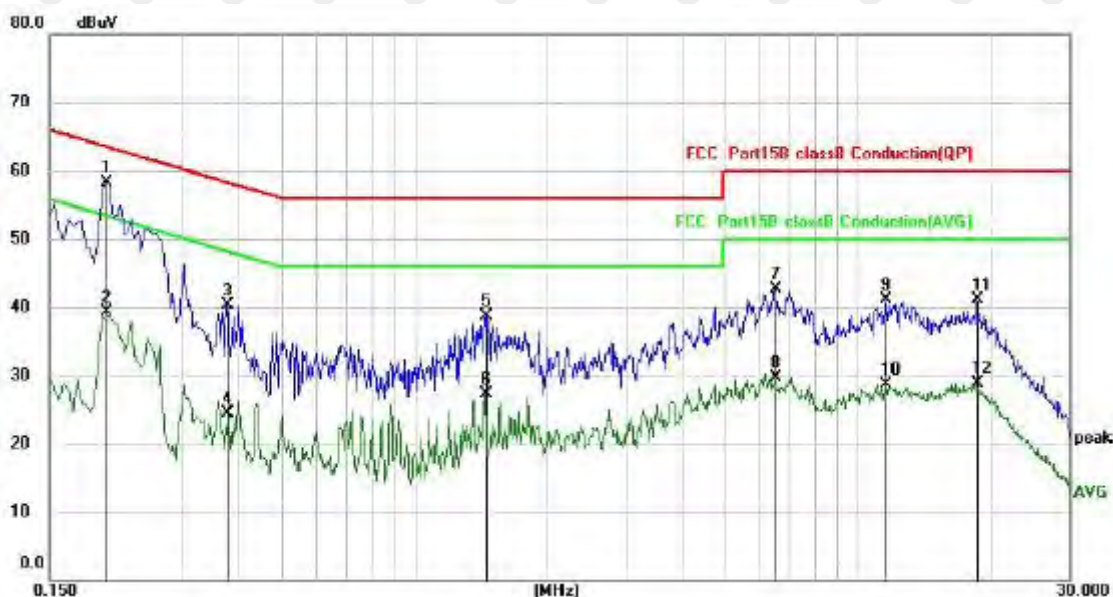

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1	*	0.2020	48.34	10.00	58.34	63.53	-5.19	QP
2		0.2020	29.26	10.00	39.26	53.53	-14.27	AVG
3		0.3780	30.26	9.98	40.24	58.32	-18.08	QP
4		0.3780	14.62	9.98	24.60	48.32	-23.72	AVG
5		1.4500	28.66	10.00	38.66	56.00	-17.34	QP
6		1.4500	17.30	10.00	27.30	46.00	-18.70	AVG
7		6.5380	32.52	10.23	42.75	60.00	-17.25	QP
8		6.5380	19.49	10.23	29.72	50.00	-20.28	AVG
9		11.5659	30.65	10.38	41.03	60.00	-18.97	QP
10		11.5659	18.27	10.38	28.65	50.00	-21.35	AVG
11		18.6100	30.48	10.54	41.02	60.00	-18.98	QP
12		18.6100	18.31	10.54	28.85	50.00	-21.15	AVG

Remark: Factor = Cable loss + LISN factor, Margin = Measurement – Limit

## 7. RADIATED SPURIOUS EMISSION

### 7.1 Block Diagram Of Test Setup

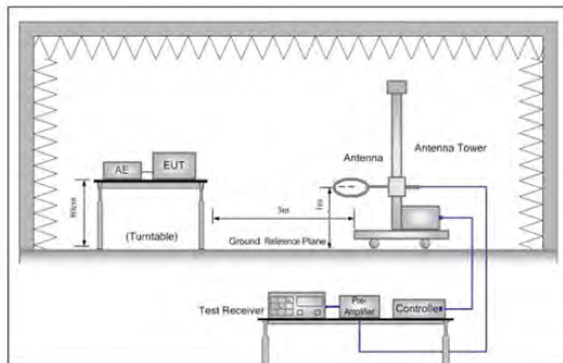


Figure 1. Below 30MHz

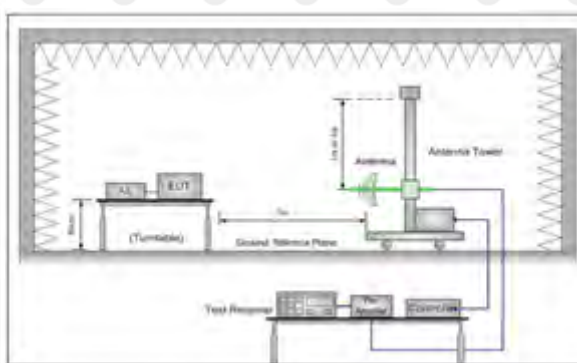


Figure 2. 30MHz to 1GHz

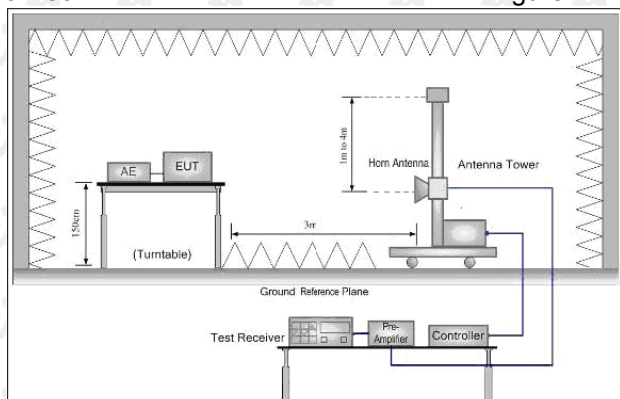


Figure 3. Above 1GHz

### 7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

**Below 1GHz test procedure as below:**

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

**Above 1GHz test procedure as below:**

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:

Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case

Below 1GHz Test Results:  
Antenna polarity: H



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dB/m	Over dB	Detector
1		44.5087	29.53	-6.54	22.99	40.00	-17.01	QP
2		88.1873	35.75	-10.25	25.50	43.50	-18.00	QP
3		147.9214	37.36	-5.47	31.89	43.50	-11.61	QP
4		227.2918	44.69	-8.81	35.88	46.00	-10.12	QP
5		322.7540	42.25	-4.83	37.42	46.00	-8.58	QP
6	*	698.0796	36.88	3.83	40.71	46.00	-5.29	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level



Antenna polarity: V



No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Detector
		MHz	dBuV	dB	dBuV/m	dB/m	dB	
1		44.1202	37.37	-6.53	30.84	40.00	-9.16	QP
2	*	65.4579	45.95	-8.39	37.56	40.00	-2.44	QP
3		225.3080	44.76	-8.85	35.91	46.00	-10.09	QP
4		322.7540	39.82	-4.83	34.99	46.00	-11.01	QP
5		527.3205	35.86	0.69	36.55	46.00	-9.45	QP
6		679.9600	32.59	3.58	36.17	46.00	-9.83	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT2 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	66.52	-3.64	62.88	74	-11.12	peak
4824	48.19	-3.64	44.55	54	-9.45	AVG
7236	56.90	-0.95	55.95	74	-18.05	peak
7236	44.10	-0.95	43.15	54	-10.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	67.22	-3.64	63.58	74	-10.42	peak
4824	49.41	-3.64	45.77	54	-8.23	AVG
7236	58.04	-0.95	57.09	74	-16.91	peak
7236	45.55	-0.95	44.60	54	-9.40	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.92	-3.51	61.41	74	-12.59	peak
4874	49.72	-3.51	46.21	54	-7.79	AVG
7311	58.30	-0.82	57.48	74	-16.52	peak
7311	43.46	-0.82	42.64	54	-11.36	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.70	-3.51	61.19	74	-12.81	peak
4874	49.05	-3.51	45.54	54	-8.46	AVG
7311	59.09	-0.82	58.27	74	-15.73	peak
7311	44.36	-0.82	43.54	54	-10.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## ANT2 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.06	-3.43	58.63	74	-15.37	peak
4924	48.47	-3.43	45.04	54	-8.96	AVG
7386	58.99	-0.75	58.24	74	-15.76	peak
7386	44.53	-0.75	43.78	54	-10.22	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.49	-3.43	60.06	74	-13.94	peak
4924	48.38	-3.43	44.95	54	-9.05	AVG
7386	56.45	-0.75	55.70	74	-18.30	peak
7386	42.24	-0.75	41.49	54	-12.51	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

## Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT2 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.13	-3.64	60.49	74	-13.51	peak
4824	50.35	-3.64	46.71	54	-7.29	AVG
7236	57.23	-0.95	56.28	74	-17.72	peak
7236	44.80	-0.95	43.85	54	-10.15	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.38	-3.64	60.74	74	-13.26	peak
4824	46.73	-3.64	43.09	54	-10.91	AVG
7236	57.94	-0.95	56.99	74	-17.01	peak
7236	44.19	-0.95	43.24	54	-10.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	63.22	-3.51	59.71	74	-14.29	peak
4874	49.60	-3.51	46.09	54	-7.91	AVG
7311	58.68	-0.82	57.86	74	-16.14	peak
7311	45.77	-0.82	44.95	54	-9.05	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	64.50	-3.51	60.99	74	-13.01	peak
4874	46.88	-3.51	43.37	54	-10.63	AVG
7311	57.21	-0.82	56.39	74	-17.61	peak
7311	42.96	-0.82	42.14	54	-11.86	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT2 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.28	-3.43	59.85	74	-14.15	peak
4924	47.74	-3.43	44.31	54	-9.69	AVG
7386	57.20	-0.75	56.45	74	-17.55	peak
7386	43.97	-0.75	43.22	54	-10.78	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	62.47	-3.43	59.04	74	-14.96	peak
4924	48.23	-3.43	44.80	54	-9.20	AVG
7386	58.00	-0.75	57.25	74	-16.75	peak
7386	41.86	-0.75	41.11	54	-12.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark :

(1) Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report

(2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.

(3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.

(4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	64.68	-3.64	61.04	74	-12.96	peak
4824	46.63	-3.64	42.99	54	-11.01	AVG
7236	59.27	-0.95	58.32	74	-15.68	peak
7236	44.07	-0.95	43.12	54	-10.88	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dB $\mu$ V)	(dB)	(dB $\mu$ V/m)	(dB $\mu$ V/m)	(dB)	
4824	62.66	-3.64	59.02	74	-14.98	peak
4824	46.79	-3.64	43.15	54	-10.85	AVG
7236	60.40	-0.95	59.45	74	-14.55	peak
7236	42.92	-0.95	41.97	54	-12.03	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



ANT1+ANT2 MID CH6 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	64.17	-3.51	60.66	74.00	-13.34	peak
4874.00	50.06	-3.51	46.55	54.00	-7.45	AVG
7311.00	58.48	-0.82	57.66	74.00	-16.34	peak
7311.00	45.21	-0.82	44.39	54.00	-9.61	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874.00	62.84	-3.51	59.33	74.00	-14.67	peak
4874.00	47.27	-3.51	43.76	54.00	-10.24	AVG
7311.00	57.63	-0.82	56.81	74.00	-17.19	peak
7311.00	42.64	-0.82	41.82	54.00	-12.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH11 (802.11n/H20 Mode)/2462

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	63.35	-3.43	59.92	74	-14.08	peak
4924	48.15	-3.43	44.72	54	-9.28	AVG
7386	58.72	-0.75	57.97	74	-16.03	peak
7386	41.07	-0.75	40.32	54	-13.68	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4924	64.11	-3.43	60.68	74	-13.32	peak
4924	44.96	-3.43	41.53	54	-12.47	AVG
7386	58.65	-0.75	57.90	74	-16.10	peak
7386	42.55	-0.75	41.80	54	-12.20	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.83	-3.63	62.20	74	-11.80	peak
4844	49.14	-3.63	45.51	54	-8.49	AVG
7266	59.19	-0.94	58.25	74	-15.75	peak
7266	46.09	-0.94	45.15	54	-8.85	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4844	65.67	-3.63	62.04	74	-11.96	peak
4844	48.65	-3.63	45.02	54	-8.98	AVG
7266	58.93	-0.94	57.99	74	-16.01	peak
7266	45.51	-0.94	44.57	54	-9.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.94	-3.51	59.43	74	-14.57	peak
4874	48.11	-3.51	44.60	54	-9.40	AVG
7311	59.22	-0.82	58.40	74	-15.60	peak
7311	46.17	-0.82	45.35	54	-8.65	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
4874	62.32	-3.51	58.81	74	-15.19	peak
4874	46.48	-3.51	42.97	54	-11.03	AVG
7311	56.63	-0.82	55.81	74	-18.19	peak
7311	43.28	-0.82	42.46	54	-11.54	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4904	63.64	-3.43	60.21	74	-13.79	peak
4904	48.42	-3.43	44.99	54	-9.01	AVG
7356	58.19	-0.75	57.44	74	-16.56	peak
7356	41.62	-0.75	40.87	54	-13.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB $\mu$ V)	Factor (dB)	Emission Level (dB $\mu$ V/m)	Limits (dB $\mu$ V/m)	Margin (dB)	Detector Type
4904	64.15	-3.43	60.72	74	-13.28	peak
4904	46.67	-3.43	43.24	54	-10.76	AVG
7356	58.12	-0.75	57.37	74	-16.63	peak
7356	42.49	-0.75	41.74	54	-12.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) \* denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown “---” in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

**Restricted bands around fundamental frequency (Radiated)**

Operation Mode:  
ANT 2 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.64	-5.81	51.83	74	-22.17	peak
2390	/	-5.81	/	54	/	AVG
2399	63.44	-5.84	57.60	74	-16.40	peak
2399	48.21	-5.84	42.37	54	-11.63	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.49	-5.81	51.68	74	-22.32	peak
2390	/	-5.81	/	54	/	AVG
2399	63.44	-5.84	57.60	74	-16.40	peak
2399	47.27	-5.84	41.43	54	-12.57	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,  
Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode: ANT2 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.98	-5.65	50.33	74	-23.67	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.98	-5.65	51.33	74	-22.67	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT2 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.50	-5.81	52.69	74	-21.31	peak
2390	/	-5.81	/	54	/	AVG
2399	62.73	-5.84	56.89	74	-17.11	peak
2399	47.11	-5.84	41.27	54	-12.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.77	-5.81	51.96	74	-22.04	peak
2390	/	-5.81	/	54	/	AVG
2399	61.48	-5.84	55.64	74	-18.36	peak
2399	47.11	-5.84	41.27	54	-12.73	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits



Operation Mode: ANT2 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.04	-5.65	51.39	74	-22.61	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.68	-5.65	52.03	74	-21.97	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.23	-5.81	51.42	74	-22.58	peak
2390	/	-5.81	/	54	/	AVG
2399	62.56	-5.84	56.72	74	-17.28	peak
2399	47.65	-5.84	41.81	54	-12.19	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.58	-5.81	51.77	74	-22.23	peak
2390	/	-5.81	/	54	/	AVG
2399	61.09	-5.84	55.25	74	-18.75	peak
2399	46.71	-5.84	40.87	54	-13.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.08	-5.65	51.43	74	-22.57	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.67	-5.65	51.02	74	-22.98	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.90	-5.81	53.09	74	-20.91	peak
2390	/	-5.81	/	54	/	AVG
2399	63.43	-5.84	57.59	74	-16.41	peak
2399	46.66	-5.84	40.82	54	-13.18	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.87	-5.81	52.06	74	-21.94	peak
2390	/	-5.81	/	54	/	AVG
2399	61.06	-5.84	55.22	74	-18.78	peak
2399	45.94	-5.84	40.10	54	-13.90	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode: ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.09	-5.65	51.44	74	-22.56	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.22	-5.65	49.57	74	-24.43	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

## 8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

### 8.1 Block Diagram Of Test Setup

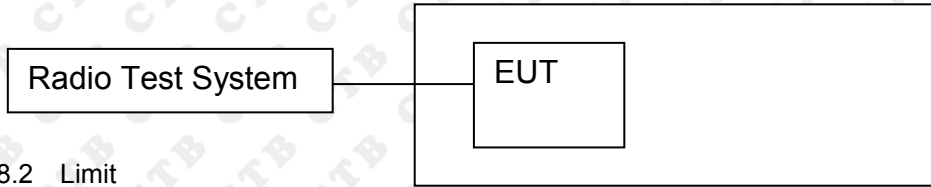

### 8.2 Limit


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

### 8.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
  - Below 30MHz:
    - RBW = 100kHz, VBW = 300kHz, Sweep = auto
    - Detector function = peak, Trace = max hold
  - Above 30MHz:
    - RBW = 100KHz, VBW = 300KHz, Sweep = auto
    - Detector function = peak, Trace = max hold


## 8.4 Test Result

ANT1:

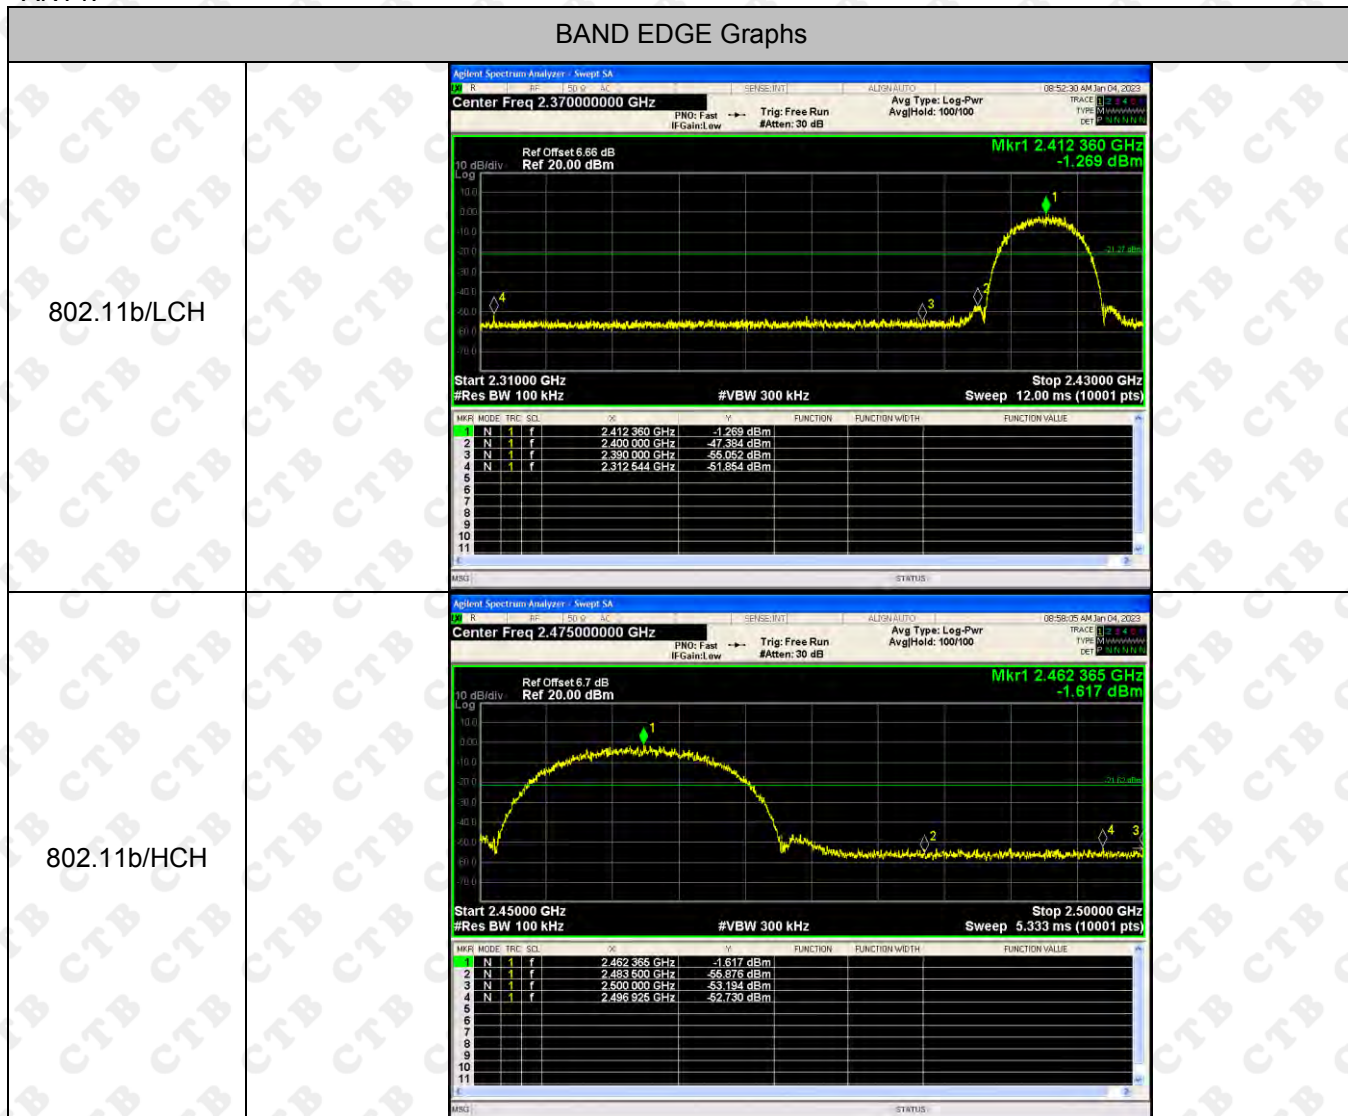


## BAND EDGE Graphs

802.11g/LCH

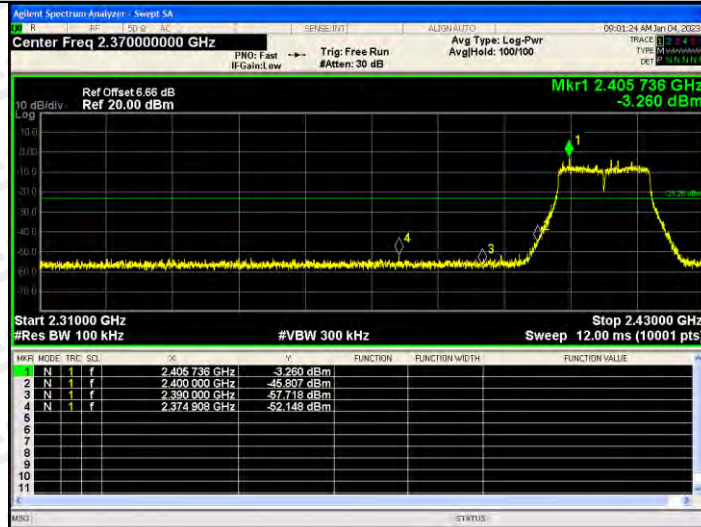


802.11g/HCH

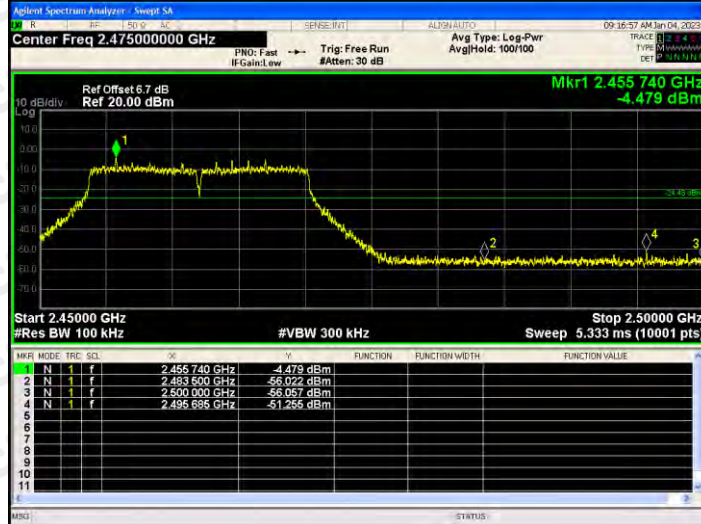




## BAND EDGE Graphs

802.11n(HT20)/L  
CH

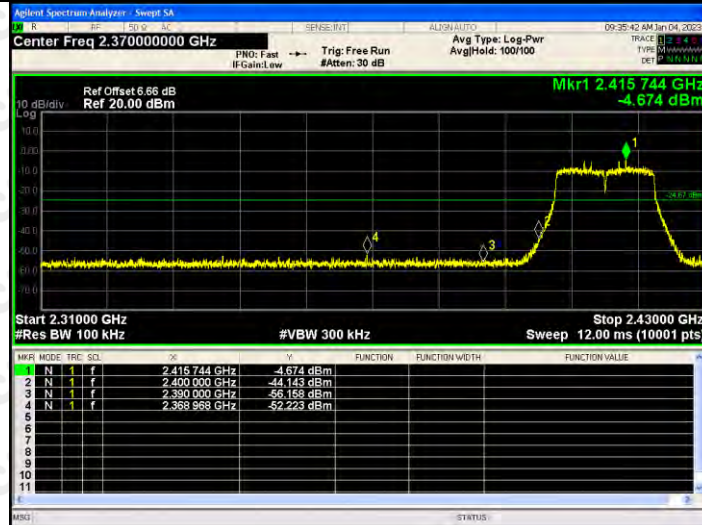


802.11n(HT20)/H  
CH

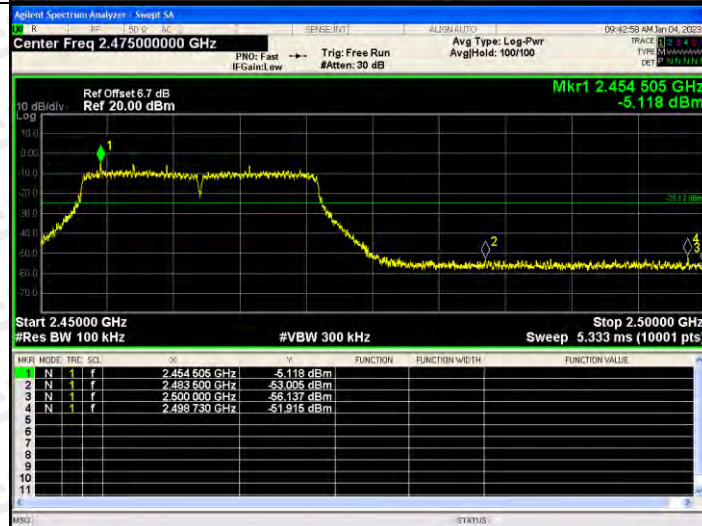


## BAND EDGE Graphs

802.11n(HT40)/L  
CH

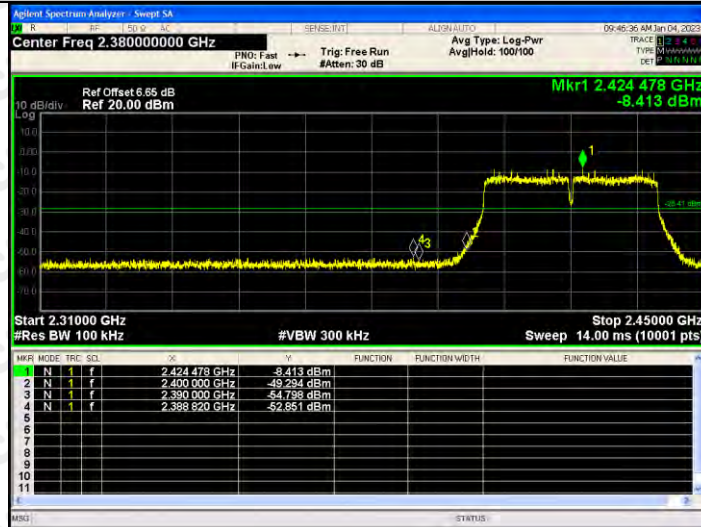


802.11n(HT40)/H  
CH

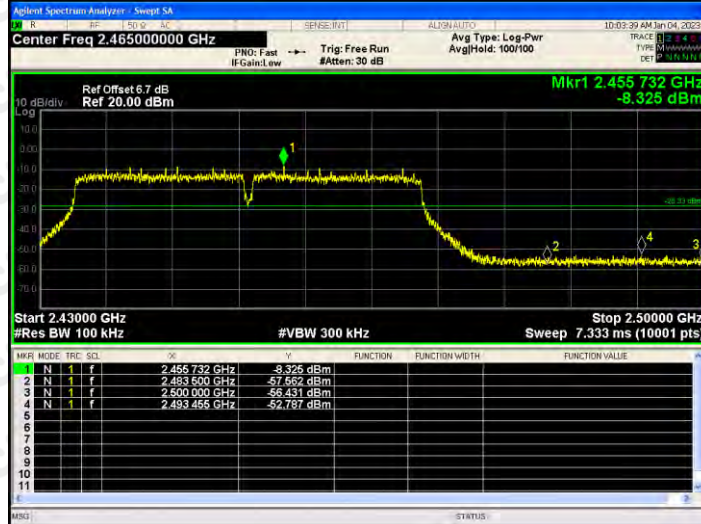


## RF Conducted Spurious Emissions Graphs


802.11b  
/LCH

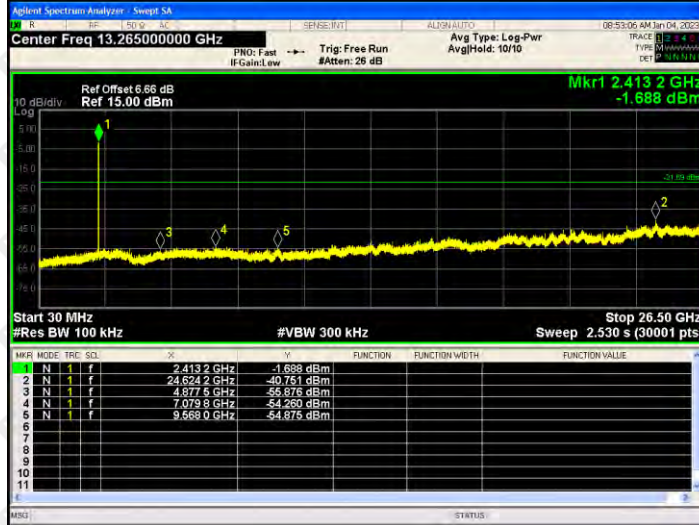

802.11b  
/MCH

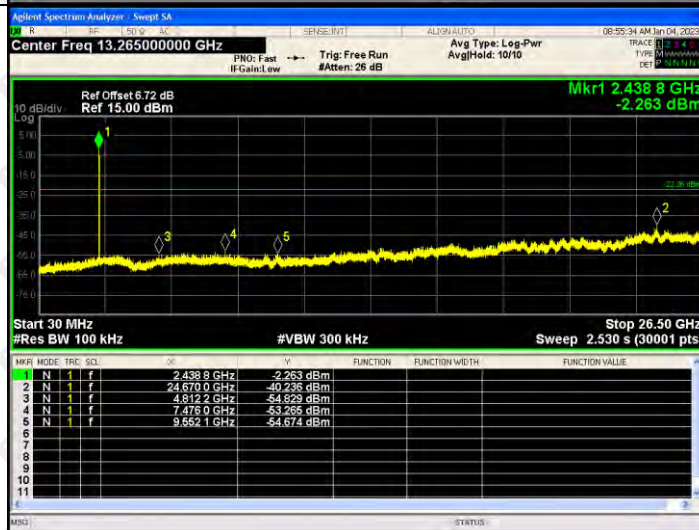

802.11b  
/HCH



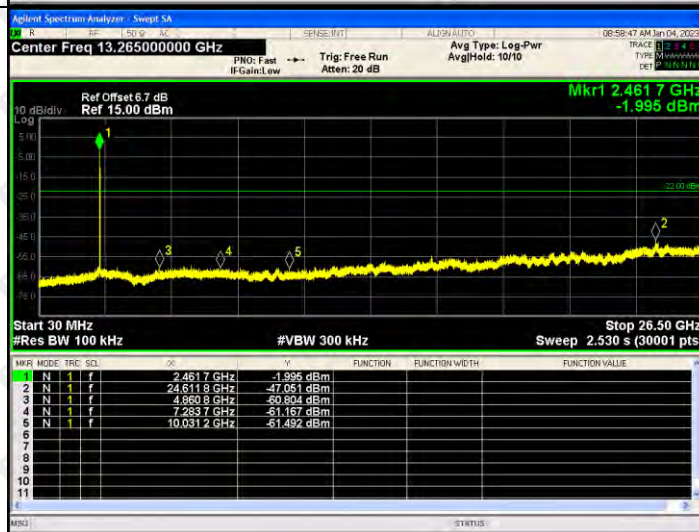


## RF Conducted Spurious Emissions Graphs




## RF Conducted Spurious Emissions Graphs

<p>802.11n (HT20)/ LCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 6.66 dB Ref 15.00 dBm Mkr1 2.407 0 GHz -4.413 dBm</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.407 0 GHz</td> <td>-4.413 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.895 9 GHz</td> <td>-40.967 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.978 1 GHz</td> <td>-54.805 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.221 2 GHz</td> <td>-54.331 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.522 1 GHz</td> <td>-54.737 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.407 0 GHz	-4.413 dBm				2	N	1	f	24.895 9 GHz	-40.967 dBm				3	N	1	f	4.978 1 GHz	-54.805 dBm				4	N	1	f	7.221 2 GHz	-54.331 dBm				5	N	1	f	9.522 1 GHz	-54.737 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.407 0 GHz	-4.413 dBm																																																			
2	N	1	f	24.895 9 GHz	-40.967 dBm																																																			
3	N	1	f	4.978 1 GHz	-54.805 dBm																																																			
4	N	1	f	7.221 2 GHz	-54.331 dBm																																																			
5	N	1	f	9.522 1 GHz	-54.737 dBm																																																			
<p>802.11 n(HT20) /MCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 6.72 dB Ref 15.00 dBm Mkr1 2.432 6 GHz -8.542 dBm</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.432 6 GHz</td> <td>-8.542 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>25.068 2 GHz</td> <td>-41.628 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.710 8 GHz</td> <td>-55.172 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.229 0 GHz</td> <td>-54.891 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.563 6 GHz</td> <td>-55.000 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.432 6 GHz	-8.542 dBm				2	N	1	f	25.068 2 GHz	-41.628 dBm				3	N	1	f	4.710 8 GHz	-55.172 dBm				4	N	1	f	7.229 0 GHz	-54.891 dBm				5	N	1	f	9.563 6 GHz	-55.000 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.432 6 GHz	-8.542 dBm																																																			
2	N	1	f	25.068 2 GHz	-41.628 dBm																																																			
3	N	1	f	4.710 8 GHz	-55.172 dBm																																																			
4	N	1	f	7.229 0 GHz	-54.891 dBm																																																			
5	N	1	f	9.563 6 GHz	-55.000 dBm																																																			
<p>802.11 n(HT20) /HCH</p>	<p>Agilent Spectrum Analyzer - Sweep SA Center Freq 13.26500000 GHz Ref Offset 6.7 dB Ref 15.00 dBm Mkr1 2.467 0 GHz -5.487 dBm</p> <table border="1"> <thead> <tr> <th>MNR</th> <th>MODE</th> <th>TRF</th> <th>SQL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.467 0 GHz</td> <td>-5.487 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.864 7 GHz</td> <td>-42.330 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.117 5 GHz</td> <td>-54.307 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.349 0 GHz</td> <td>-55.154 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.566 0 GHz</td> <td>-55.006 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.467 0 GHz	-5.487 dBm				2	N	1	f	24.864 7 GHz	-42.330 dBm				3	N	1	f	5.117 5 GHz	-54.307 dBm				4	N	1	f	7.349 0 GHz	-55.154 dBm				5	N	1	f	9.566 0 GHz	-55.006 dBm				
MNR	MODE	TRF	SQL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.467 0 GHz	-5.487 dBm																																																			
2	N	1	f	24.864 7 GHz	-42.330 dBm																																																			
3	N	1	f	5.117 5 GHz	-54.307 dBm																																																			
4	N	1	f	7.349 0 GHz	-55.154 dBm																																																			
5	N	1	f	9.566 0 GHz	-55.006 dBm																																																			

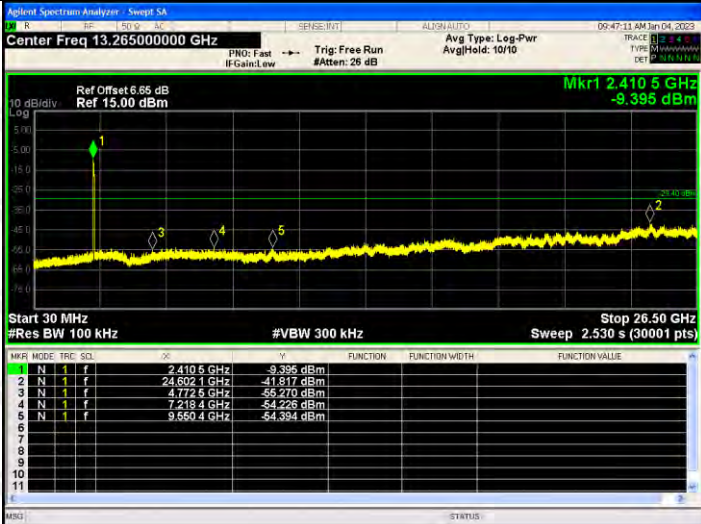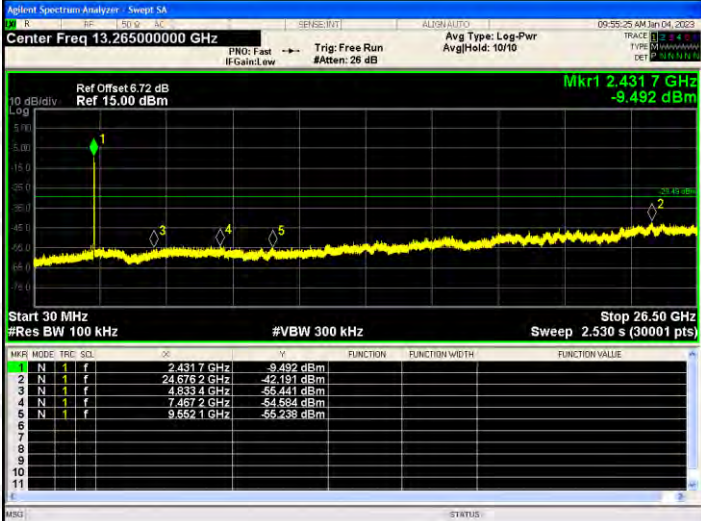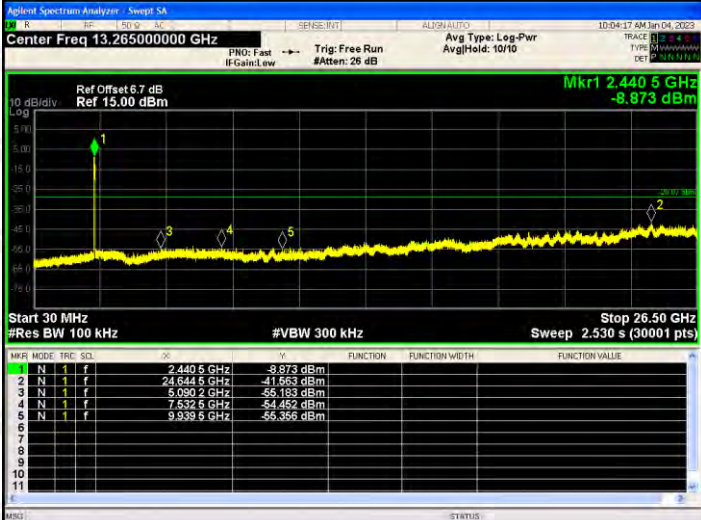
<p>802.11n (HT40)/ LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>dBm</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.410 5 GHz</td> <td>-9.395 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.602 1 GHz</td> <td>-41.817 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.772 5 GHz</td> <td>-55.220 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.218 4 GHz</td> <td>-54.226 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.650 4 GHz</td> <td>-54.394 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.410 5 GHz	-9.395 dBm				2	N	1	f	24.602 1 GHz	-41.817 dBm				3	N	1	f	4.772 5 GHz	-55.220 dBm				4	N	1	f	7.218 4 GHz	-54.226 dBm				5	N	1	f	9.650 4 GHz	-54.394 dBm				
MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.410 5 GHz	-9.395 dBm																																																			
2	N	1	f	24.602 1 GHz	-41.817 dBm																																																			
3	N	1	f	4.772 5 GHz	-55.220 dBm																																																			
4	N	1	f	7.218 4 GHz	-54.226 dBm																																																			
5	N	1	f	9.650 4 GHz	-54.394 dBm																																																			
<p>802.11 n(HT40) /MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>dBm</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.431 7 GHz</td> <td>-9.492 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.678 2 GHz</td> <td>-42.191 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.833 4 GHz</td> <td>-55.441 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.467 2 GHz</td> <td>-54.584 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.652 1 GHz</td> <td>-56.238 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.431 7 GHz	-9.492 dBm				2	N	1	f	24.678 2 GHz	-42.191 dBm				3	N	1	f	4.833 4 GHz	-55.441 dBm				4	N	1	f	7.467 2 GHz	-54.584 dBm				5	N	1	f	9.652 1 GHz	-56.238 dBm				
MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.431 7 GHz	-9.492 dBm																																																			
2	N	1	f	24.678 2 GHz	-42.191 dBm																																																			
3	N	1	f	4.833 4 GHz	-55.441 dBm																																																			
4	N	1	f	7.467 2 GHz	-54.584 dBm																																																			
5	N	1	f	9.652 1 GHz	-56.238 dBm																																																			
<p>802.11 n(HT40) /HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>dBm</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.440 5 GHz</td> <td>-8.873 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.644 5 GHz</td> <td>-41.563 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.090 2 GHz</td> <td>-55.153 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.532 5 GHz</td> <td>-54.452 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.939 5 GHz</td> <td>-56.356 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.440 5 GHz	-8.873 dBm				2	N	1	f	24.644 5 GHz	-41.563 dBm				3	N	1	f	5.090 2 GHz	-55.153 dBm				4	N	1	f	7.532 5 GHz	-54.452 dBm				5	N	1	f	9.939 5 GHz	-56.356 dBm				
MKR	MODE	TRC	SOL	F	dBm	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.440 5 GHz	-8.873 dBm																																																			
2	N	1	f	24.644 5 GHz	-41.563 dBm																																																			
3	N	1	f	5.090 2 GHz	-55.153 dBm																																																			
4	N	1	f	7.532 5 GHz	-54.452 dBm																																																			
5	N	1	f	9.939 5 GHz	-56.356 dBm																																																			

ANT2:

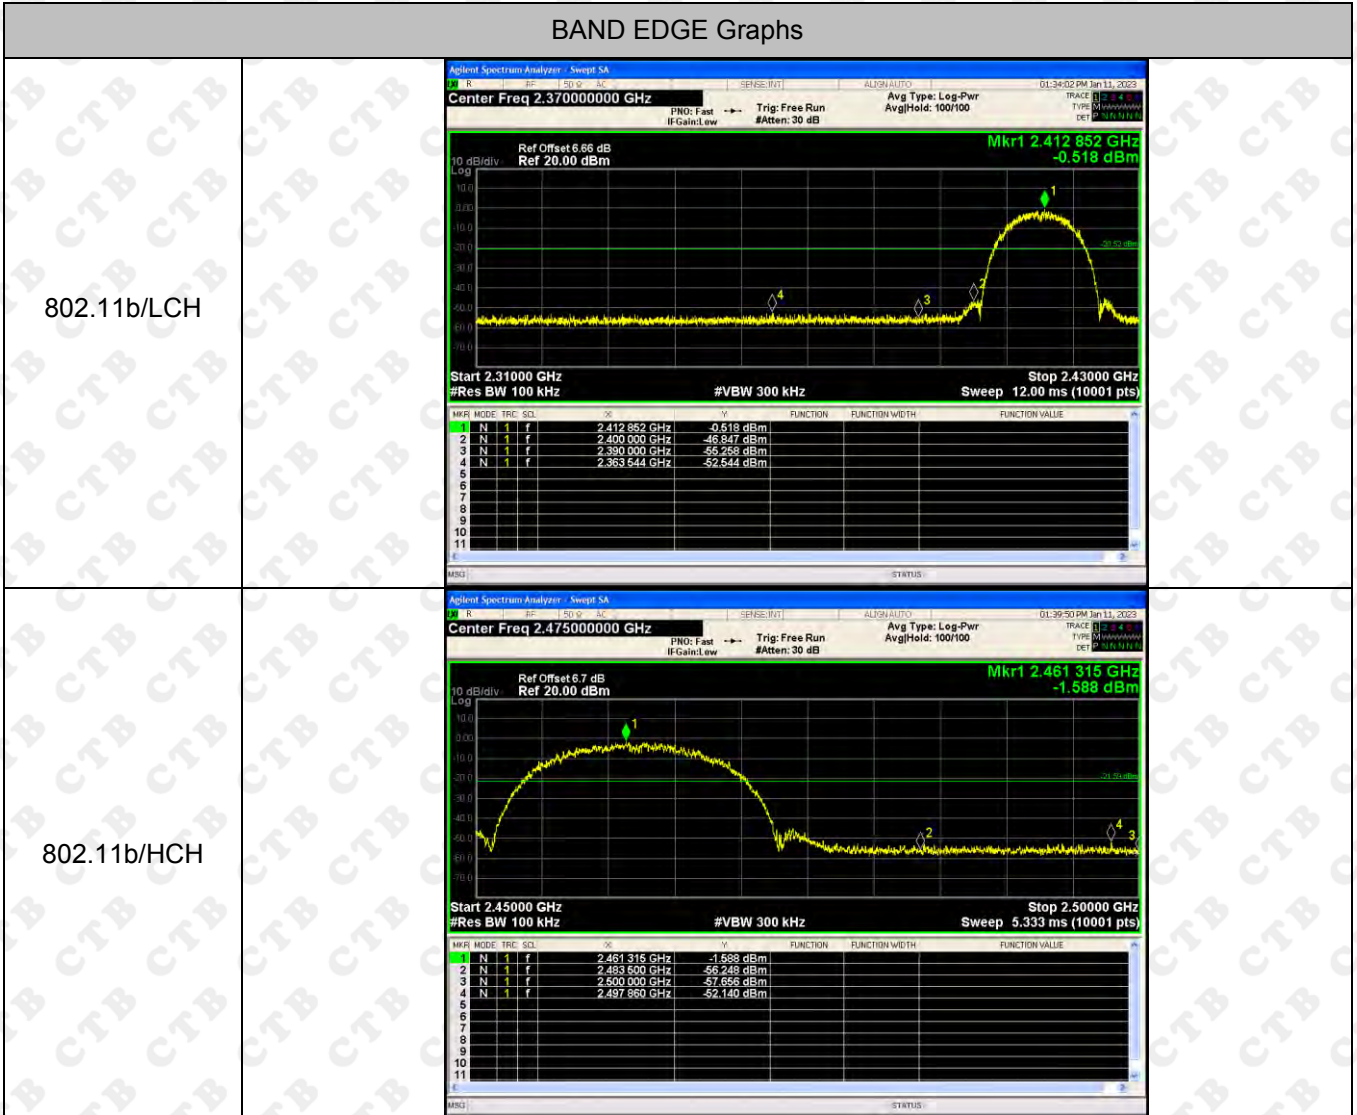


## BAND EDGE Graphs

802.11g/LCH

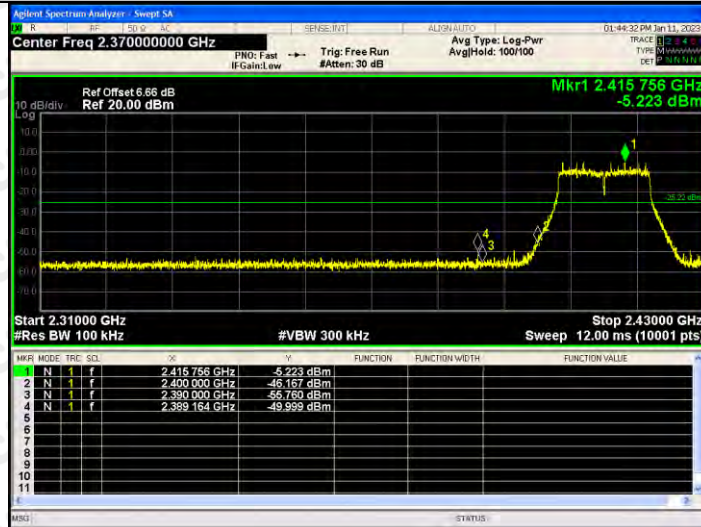


802.11g/HCH

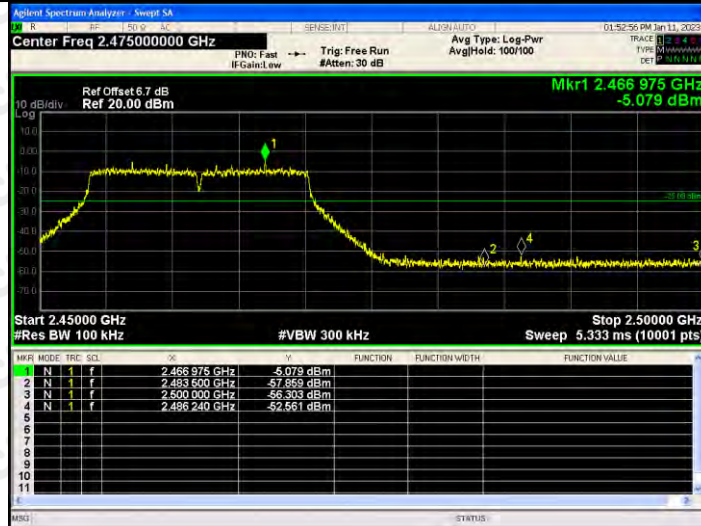




## BAND EDGE Graphs

802.11n(HT20)/L  
CH

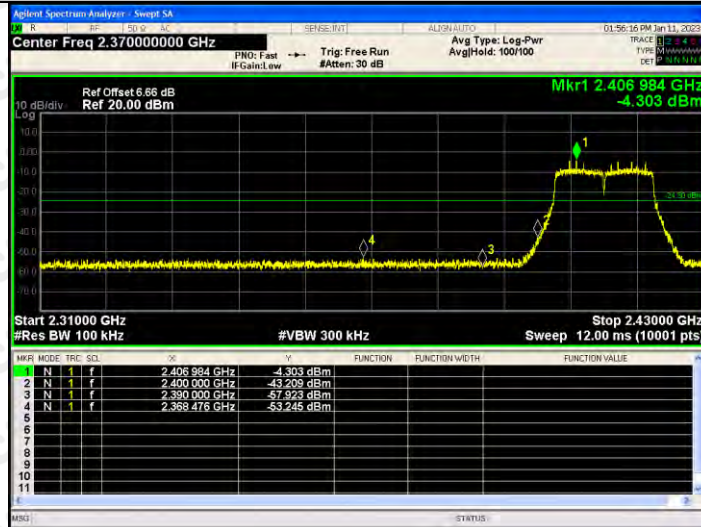


802.11n(HT20)/H  
CH

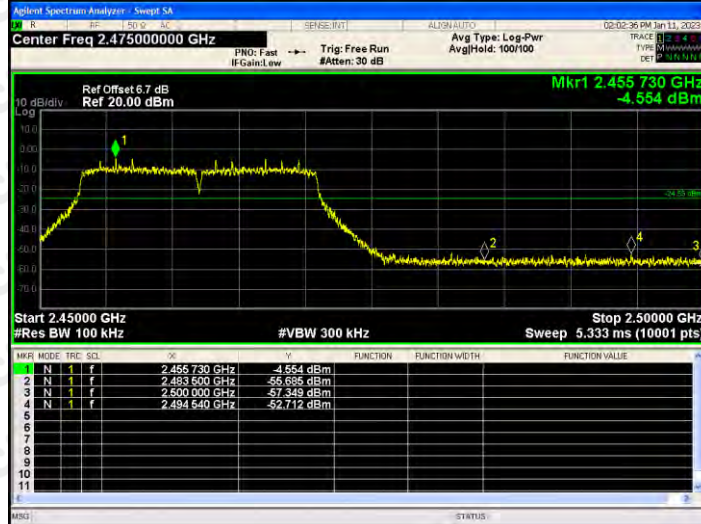


## BAND EDGE Graphs

802.11n(HT40)/L  
CH

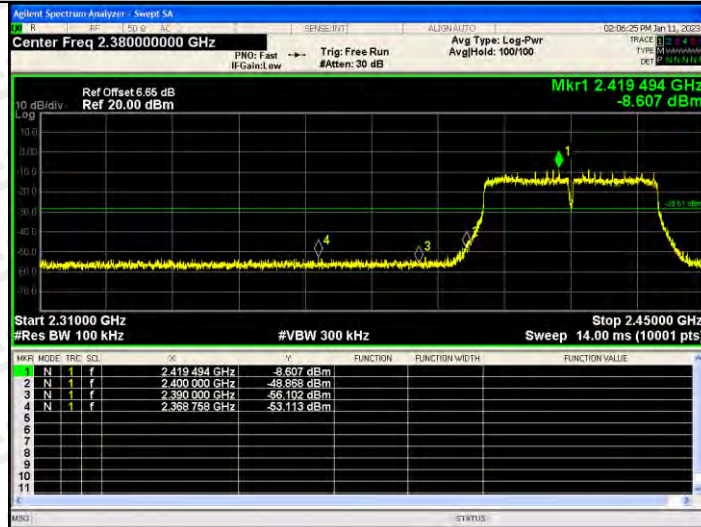

802.11n(HT40)/H  
CH

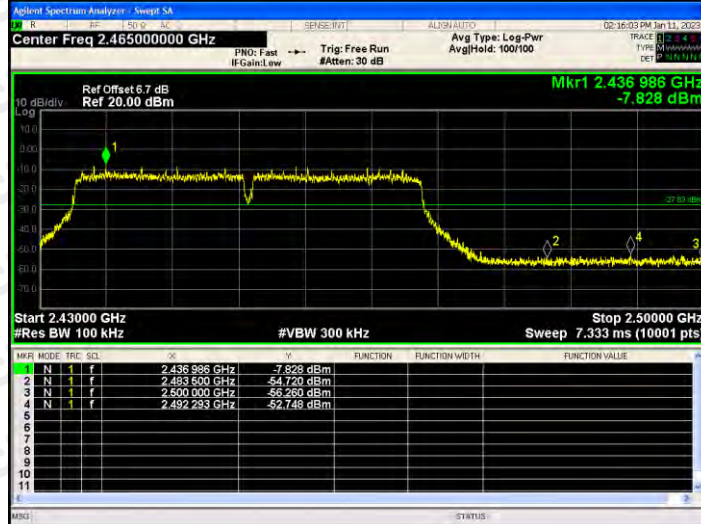


## RF Conducted Spurious Emissions Graphs



## RF Conducted Spurious Emissions Graphs




## RF Conducted Spurious Emissions Graphs

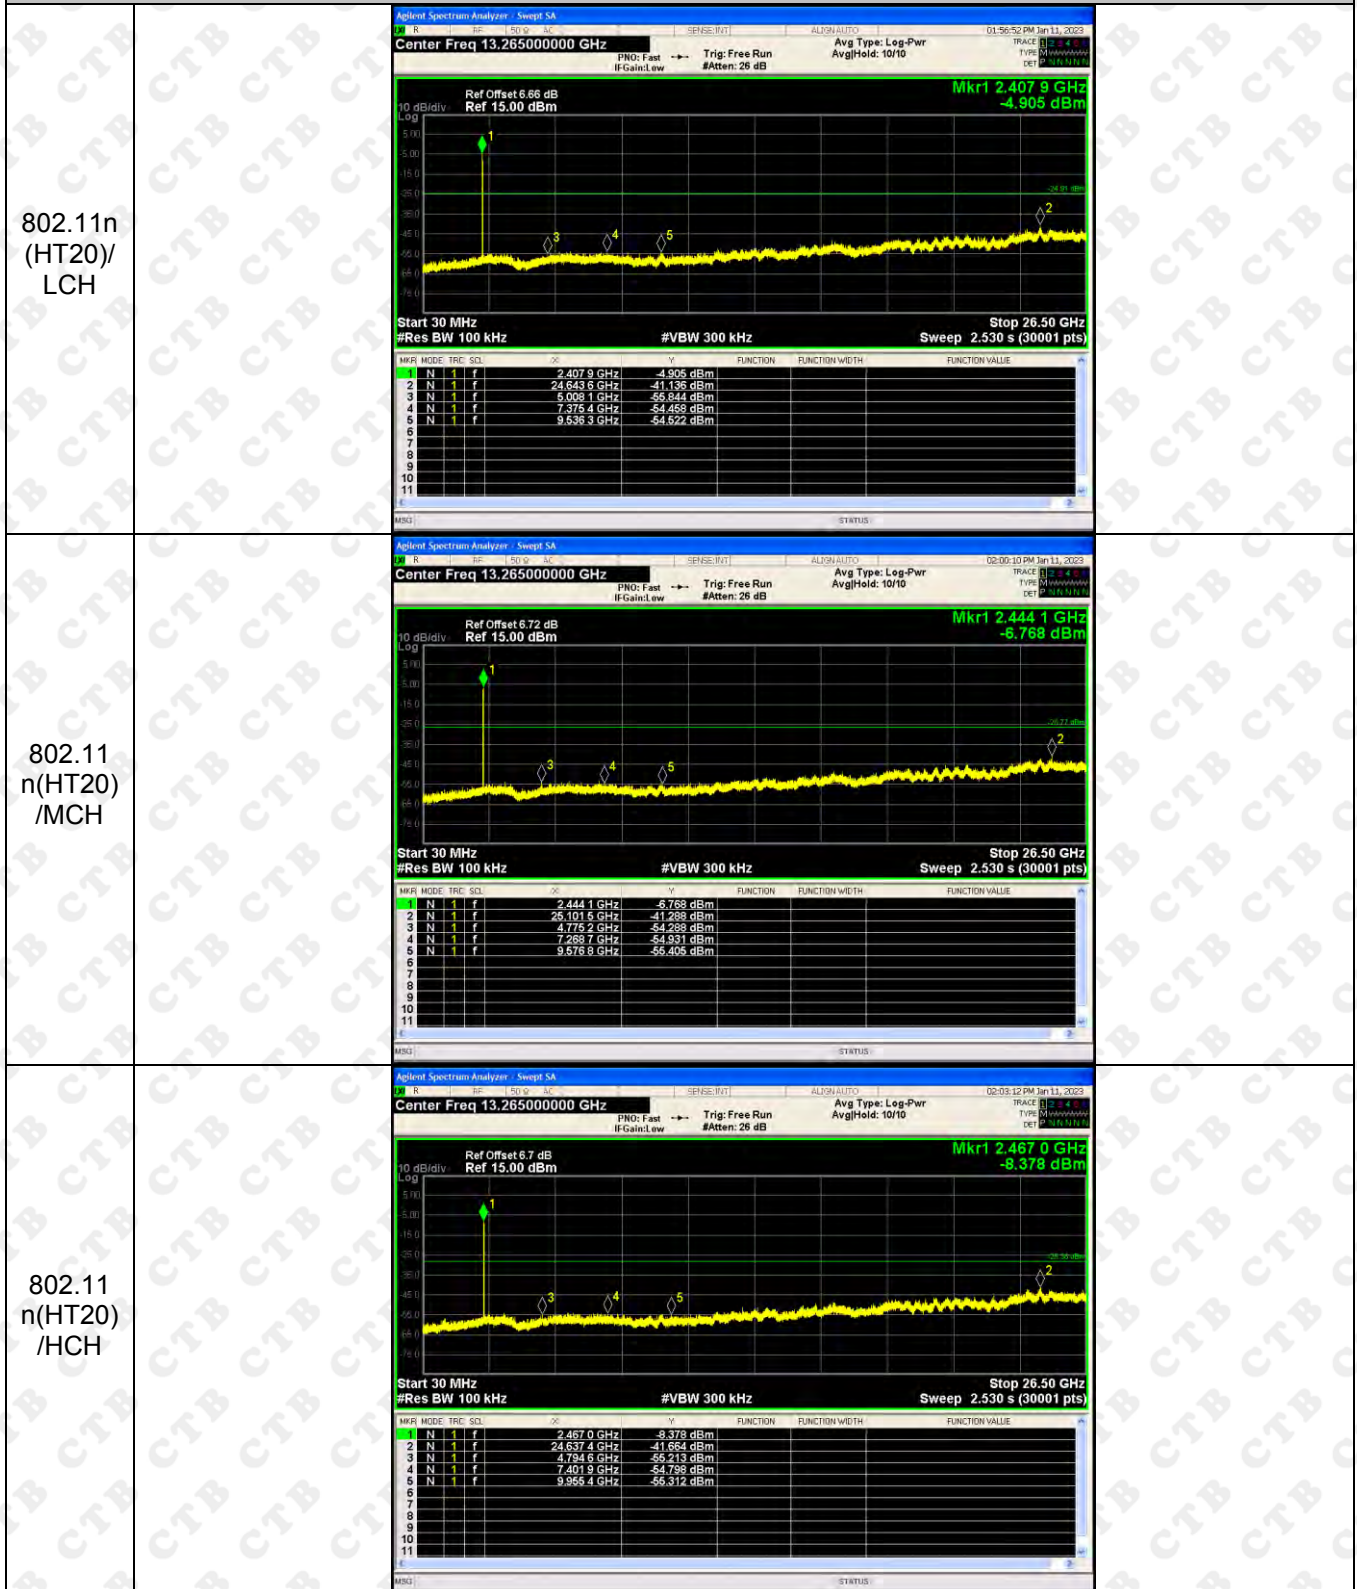


## RF Conducted Spurious Emissions Graphs


802.11  
n(HT40)  
/LCH

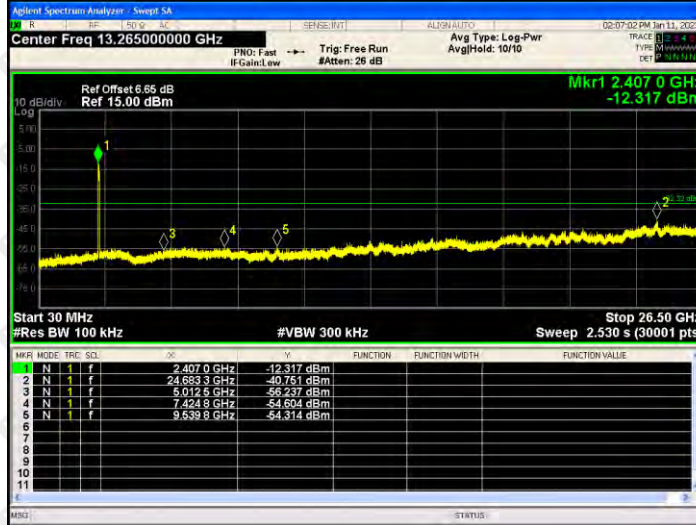

802.11  
n(HT40)  
/MCH

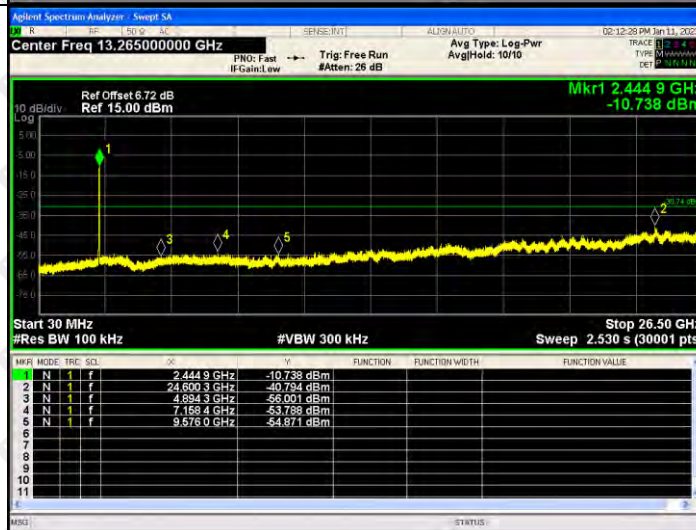


802.11  
n(HT40)  
/HCH

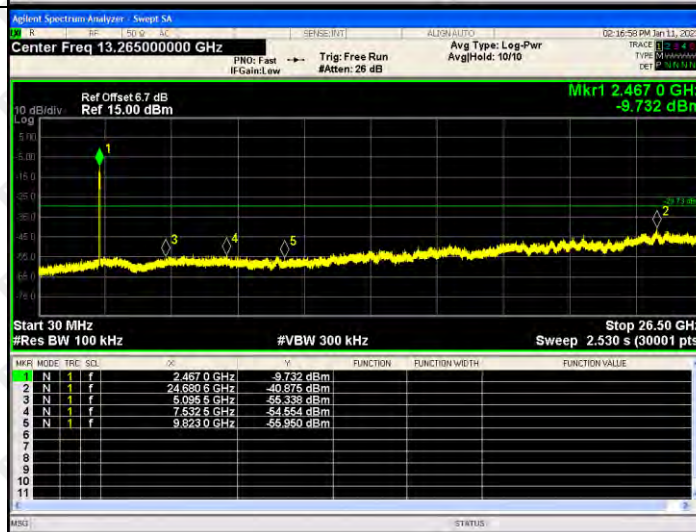

### 9. COUDUCTED OUTPUT POWER

#### 9.1 Block Diagram Of Test Setup

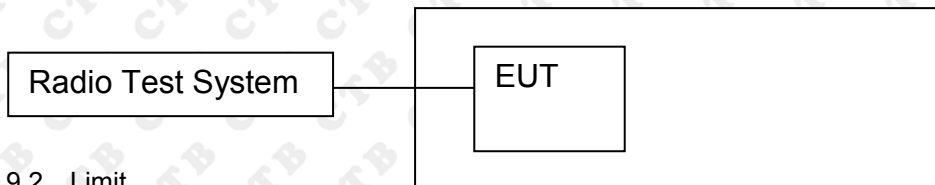

#### 9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Peak Output Power	1 watt or 30dBm	2400-2483.5	PASS

#### 9.3 Test procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Channel power function is used
3. Keep the EUT in transmitting at lowest, middle and highest channel individually. Record the max value.


## 9.4 Test Result

Mode	Channel.	Maximum Output Power [dBm] ant 1	Maximum Output Power [dBm] ant 2	Total Power Conducted Output Power(PK)	Limit[dBm]
802.11b	LCH	14.554	14.345	/	30
	MCH	14.442	14.417	/	30
	HCH	14.238	14.454	/	30
802.11g	LCH	13.338	13.293	/	30
	MCH	13.496	13.684	/	30
	HCH	13.357	13.426	/	30
802.11n(HT20)	LCH	13.653	13.829	16.752	30
	MCH	13.476	13.612	16.555	30
	HCH	13.214	13.364	16.300	30
802.11n(HT40)	LCH	12.78	12.205	15.512	30
	MCH	12.63	12.731	15.691	30
	HCH	12.541	12.818	15.692	30



### 10. 6DB OCCUPIED BANDWIDTH

#### 10.1 Block Diagram Of Test Setup

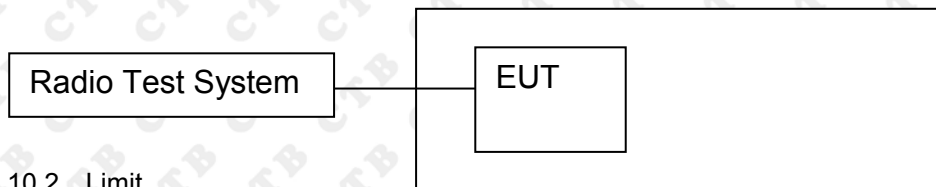

#### 10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

#### 10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW)  $\geq 3 \times$  RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.067	500	<b>PASS</b>
	MCH	10.178	500	<b>PASS</b>
	HCH	10.615	500	<b>PASS</b>
802.11g	LCH	16.326	500	<b>PASS</b>
	MCH	16.306	500	<b>PASS</b>
	HCH	16.367	500	<b>PASS</b>
802.11n(HT20)	LCH	17.574	500	<b>PASS</b>
	MCH	17.529	500	<b>PASS</b>
	HCH	17.627	500	<b>PASS</b>
802.11n(HT40)	LCH	35.122	500	<b>PASS</b>
	MCH	35.158	500	<b>PASS</b>
	HCH	35.679	500	<b>PASS</b>

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.631	500	<b>PASS</b>
	MCH	10.751	500	<b>PASS</b>
	HCH	10.716	500	<b>PASS</b>
802.11g	LCH	16.408	500	<b>PASS</b>
	MCH	16.35	500	<b>PASS</b>
	HCH	16.334	500	<b>PASS</b>
802.11n(HT20)	LCH	16.903	500	<b>PASS</b>
	MCH	17.568	500	<b>PASS</b>
	HCH	17.032	500	<b>PASS</b>
802.11n(HT40)	LCH	35.632	500	<b>PASS</b>
	MCH	35.601	500	<b>PASS</b>
	HCH	35.455	500	<b>PASS</b>

ANT1:  
Test Graph:


Graphs	
<p>802.11b /LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.417507 GHz -9.0059 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.886 MHz Total Power 15.8 dBm</p> <p>Transmit Freq Error -26.448 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 11.07 MHz x dB -6.00 dB</p>
<p>802.11b /MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.442055 GHz -7.3344 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.825 MHz Total Power 15.9 dBm</p> <p>Transmit Freq Error -33.980 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 10.18 MHz x dB -6.00 dB</p>
<p>802.11b/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.467267 GHz -7.8047 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 14.869 MHz Total Power 15.7 dBm</p> <p>Transmit Freq Error -40.747 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 10.61 MHz x dB -6.00 dB</p>

<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3 2.420159 GHz -10.332 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>16.469 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-4.311 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.33 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	16.469 MHz			Transmit Freq Error	OBW Power	99.00 %	-4.311 kHz	x dB	-6.00 dB	x dB Bandwidth			16.33 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
16.469 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-4.311 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.33 MHz																			
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3 2.445132 GHz -10.142 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td>16.435 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-20.755 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.31 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	16.435 MHz			Transmit Freq Error	OBW Power	99.00 %	-20.755 kHz	x dB	-6.00 dB	x dB Bandwidth			16.31 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
16.435 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-20.755 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.31 MHz																			
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3 2.470172 GHz -10.255 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td>16.465 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-11.438 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>16.37 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	16.465 MHz			Transmit Freq Error	OBW Power	99.00 %	-11.438 kHz	x dB	-6.00 dB	x dB Bandwidth			16.37 MHz		
Occupied Bandwidth	Total Power	12.3 dBm																	
16.465 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-11.438 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
16.37 MHz																			

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB Ref: 26.66 dBm</p> <p>Mkr3 2.420786 GHz -10.933 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td>17.626 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.117 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.57 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.626 MHz			Transmit Freq Error	OBW Power	99.00 %	-1.117 kHz	x dB	-6.00 dB	x dB Bandwidth			17.57 MHz		
Occupied Bandwidth	Total Power	12.6 dBm																	
17.626 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-1.117 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.57 MHz																			
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3 2.445758 GHz -11.191 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td>17.607 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-6.330 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.53 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	17.607 MHz			Transmit Freq Error	OBW Power	99.00 %	-6.330 kHz	x dB	-6.00 dB	x dB Bandwidth			17.53 MHz		
Occupied Bandwidth	Total Power	12.4 dBm																	
17.607 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-6.330 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.53 MHz																			
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3 2.470807 GHz -13.531 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.1 dBm</td> </tr> <tr> <td>17.610 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-6.899 kHz</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>x dB Bandwidth</td> <td></td> <td></td> </tr> <tr> <td>17.63 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	12.1 dBm	17.610 MHz			Transmit Freq Error	OBW Power	99.00 %	-6.899 kHz	x dB	-6.00 dB	x dB Bandwidth			17.63 MHz		
Occupied Bandwidth	Total Power	12.1 dBm																	
17.610 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-6.899 kHz	x dB	-6.00 dB																	
x dB Bandwidth																			
17.63 MHz																			

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.65 dB</p> <p>Ref: 26.65 dBm</p> <p>Mkr3 2.439547 GHz</p> <p>-10.511 dBm</p> <p>Center 2.422 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.046 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -13.965 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.12 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr3 2.454543 GHz</p> <p>-12.762 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.047 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error -35.794 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.16 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.469807 GHz</p> <p>-16.155 dBm</p> <p>Center 2.452 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz</p> <p>Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.024 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -32.632 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 35.68 MHz</p> <p>x dB -6.00 dB</p>

ANT2:  
Test Graph:

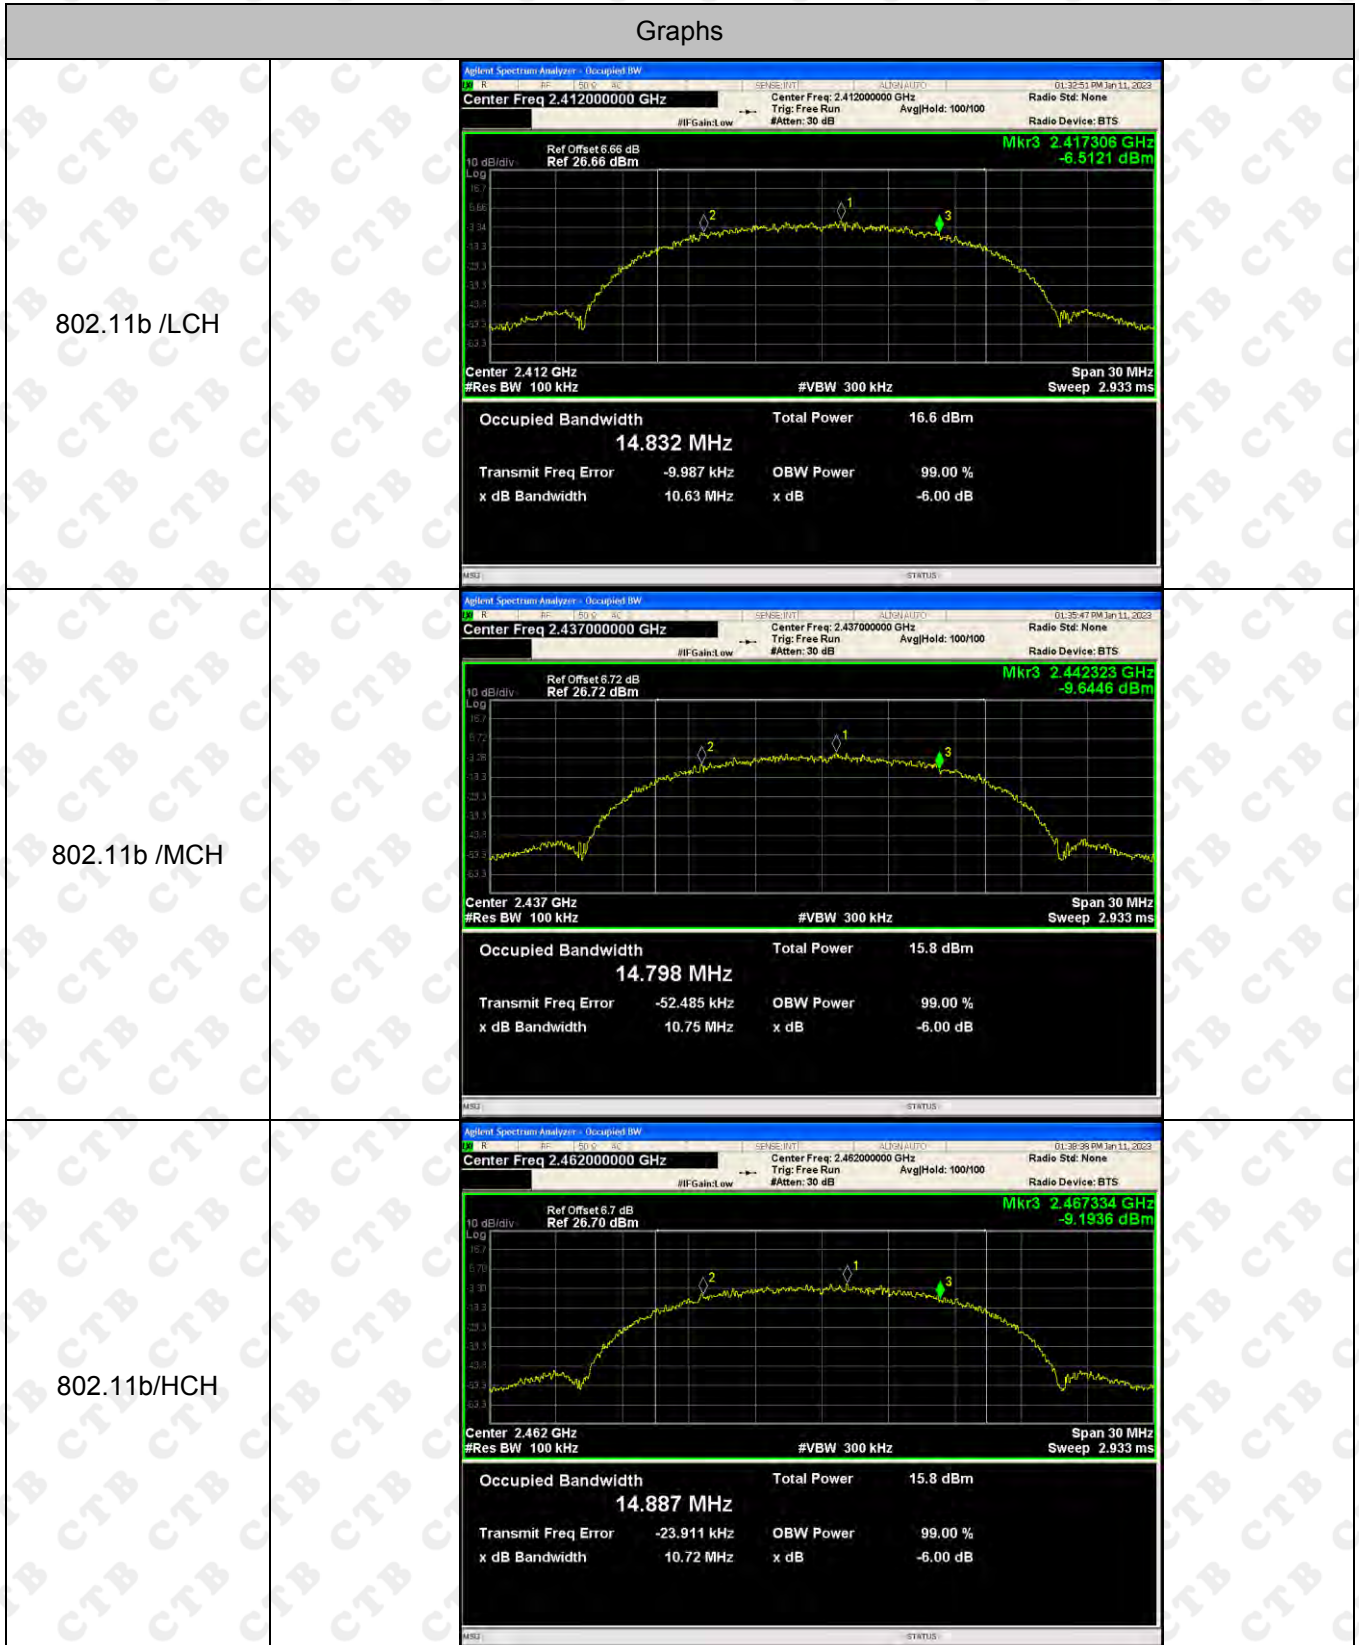




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Ref Offset 6.66 dB Ref 26.66 dBm</p> <p>Mkr3 2.420195 GHz -12.331 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.454 MHz</p> <p>Total Power 12.1 dBm</p> <p>Transmit Freq Error -8.757 kHz</p> <p>x dB Bandwidth 16.41 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 6.72 dB Ref 26.72 dBm</p> <p>Mkr3 2.445159 GHz -10.771 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.433 MHz</p> <p>Total Power 12.6 dBm</p> <p>Transmit Freq Error -15.853 kHz</p> <p>x dB Bandwidth 16.35 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Ref Offset 6.7 dB Ref 26.70 dBm</p> <p>Mkr3 2.47016 GHz -11.038 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.469 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -7.372 kHz</p> <p>x dB Bandwidth 16.33 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.66 dB</p> <p>Ref: 26.66 dBm</p> <p>Mkr3 2.420441 GHz</p> <p>-11.222 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.8 dBm</td> </tr> <tr> <td colspan="3">17.612 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.8 dBm	17.612 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.8 dBm											
17.612 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.72 dB</p> <p>Ref: 26.72 dBm</p> <p>Mkr1 2.437 GHz</p> <p>-19.301 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">17.609 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	17.609 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.5 dBm											
17.609 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 6.7 dB</p> <p>Ref: 26.70 dBm</p> <p>Mkr3 2.470506 GHz</p> <p>-10.986 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">17.596 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	17.596 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.4 dBm											
17.596 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset: 6.65 dB Ref: 26.65 dBm</p> <p>Mkr3 2.439812 GHz -15.769 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.034 MHz</p> <p>Total Power 11.7 dBm</p> <p>Transmit Freq Error -3.585 kHz</p> <p>x dB Bandwidth 35.63 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset: 6.72 dB Ref: 26.72 dBm</p> <p>Mkr3 2.454771 GHz -14.183 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 35.986 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -29.475 kHz</p> <p>x dB Bandwidth 35.60 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Ref Offset: 6.7 dB Ref: 26.70 dBm</p> <p>Mkr3 2.469689 GHz -15.192 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.063 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -38.239 kHz</p> <p>x dB Bandwidth 35.45 MHz</p> <p>OBW Power 99.00 %</p> <p>x dB -6.00 dB</p>

### 11. POWER SPECTRAL DENSITY

#### 11.1 Block Diagram Of Test Setup

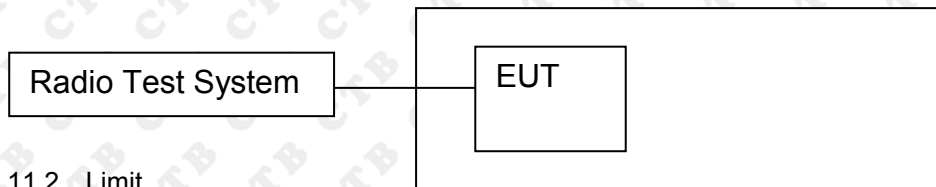

#### 11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

#### 11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to:  $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$ .
4. Set the VBW  $\geq 3 \times \text{RBW}$ .
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.




11.4 Test Result

Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-14.965	-14.638	/	8
	MCH	-14.896	-15.267	/	8
	HCH	-15.141	-15.271	/	8
802.11g	LCH	-18.716	-18.141	/	8
	MCH	-18.136	-17.916	/	8
	HCH	-18.112	-18.756	/	8
802.11n(H T20)	LCH	-17.792	-18.393	-15.072	8
	MCH	-19.085	-19.725	-16.383	8
	HCH	-18.256	-19.665	-15.893	8
802.11n(H T40)	LCH	-22.571	-22.105	-19.321	8
	MCH	-22.773	-21.929	-19.320	8
	HCH	-22.546	-22.269	-19.395	8

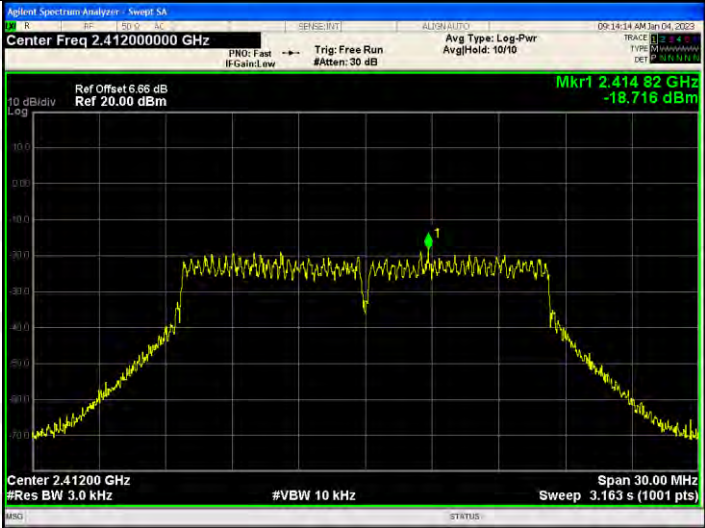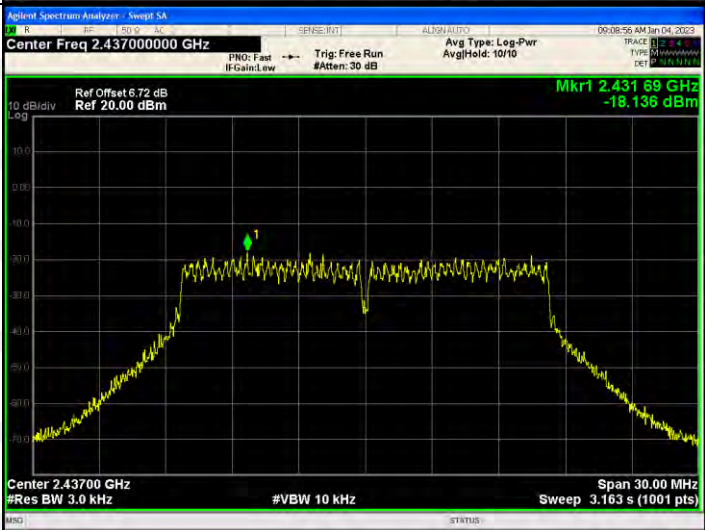


ANT1:  
Test Graph

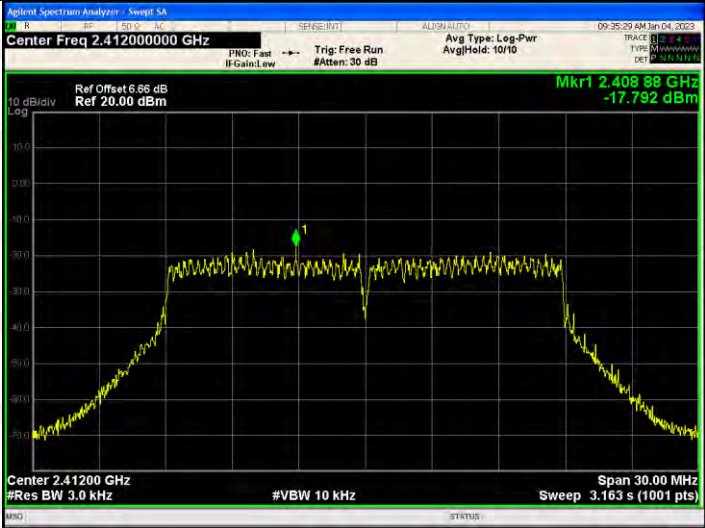Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.412000000 GHz Ref Offset 6.86 dB Ref 20.00 dBm Mkr1 2.413 77 GHz -14.965 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.438 77 GHz -14.996 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.463 77 GHz -15.141 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

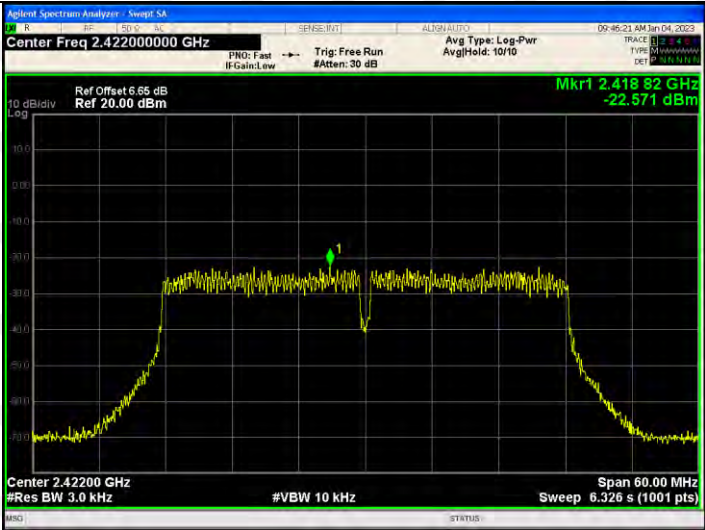


<p>802.11n(HT20)/LC H</p>		
<p>802.11n(HT20)/MC H</p>		
<p>802.11n(HT20)/HC H</p>		






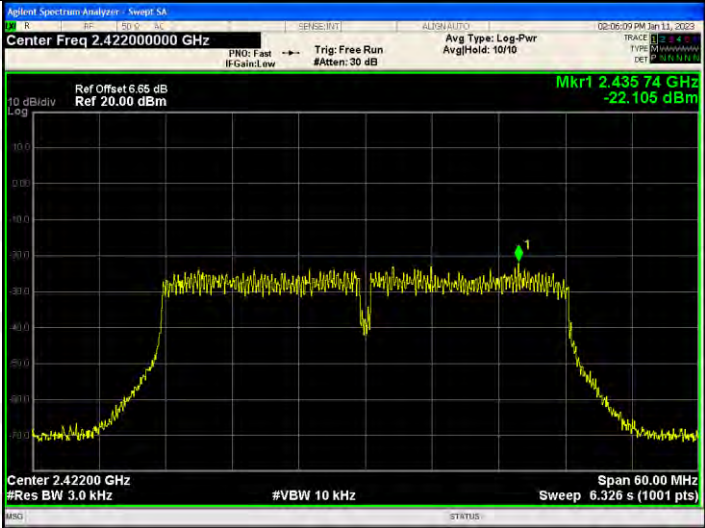

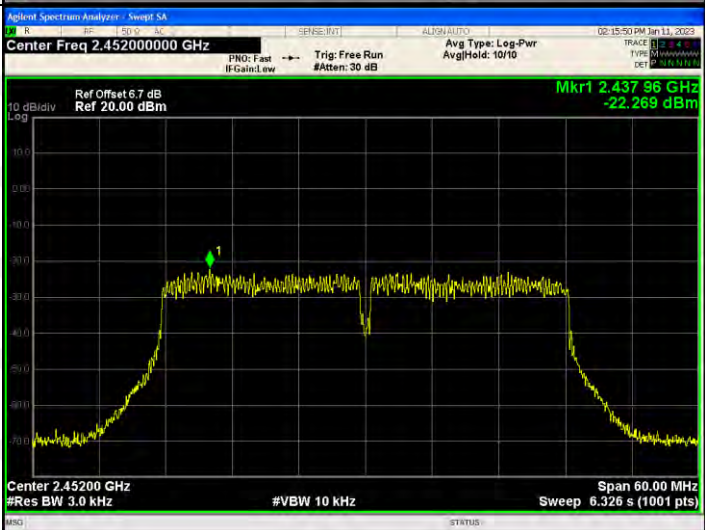
<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

ANT 2:  
Test Graph

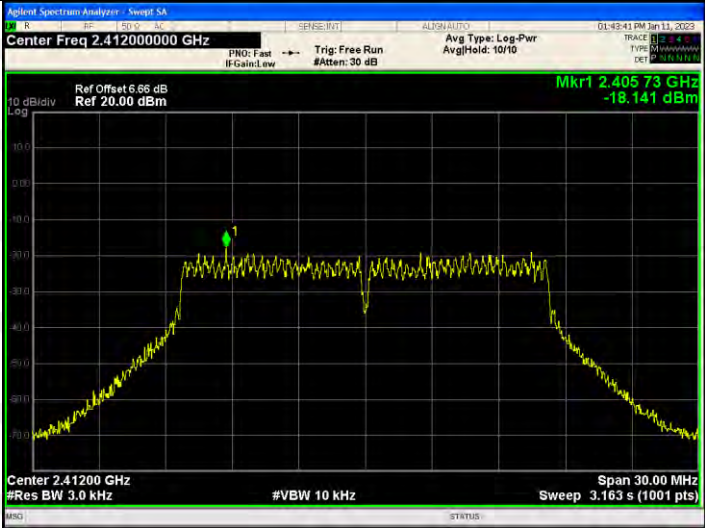Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 6.56 dB Ref 20.00 dBm Mkr1 2.413 77 GHz -14.638 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 6.72 dB Ref 20.00 dBm Mkr1 2.438 77 GHz -15.267 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 6.7 dB Ref 20.00 dBm Mkr1 2.460 77 GHz -15.271 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	
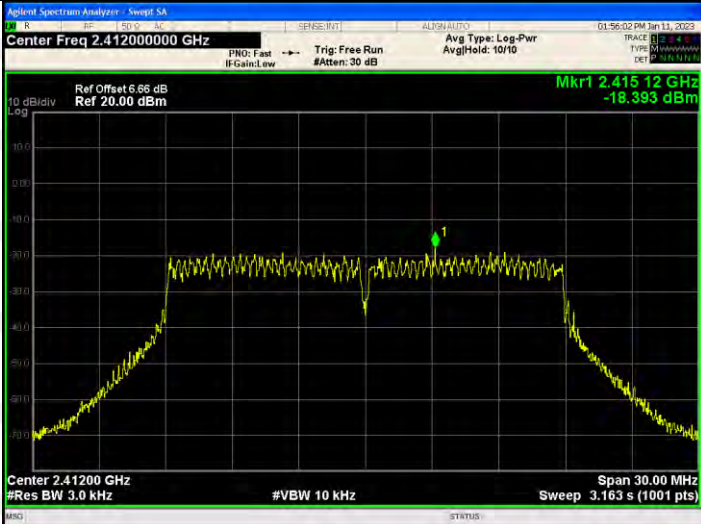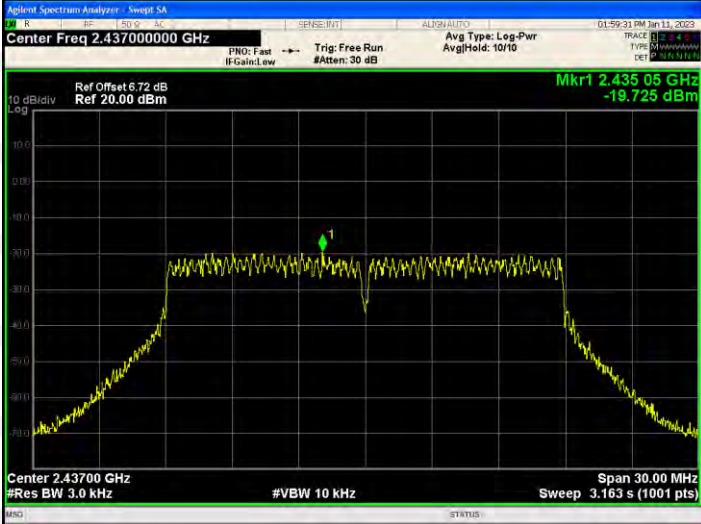
<p>802.11n(HT20)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset: 6.86 dB Ref 20.00 dBm Mkr1 2.41512 GHz -18.393 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset: 6.72 dB Ref 20.00 dBm Mkr1 2.43505 GHz -19.725 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11n(HT20)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset: 6.7 dB Ref 20.00 dBm Mkr1 2.45639 GHz -19.665 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11n(HT40)/LC H</p>		
<p>802.11n(HT40)/MC H</p>		
<p>802.11n(HT40)/HC H</p>		

## 12. ANTENNA REQUIREMENT

### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is 0.92dBi.

### 13. EUT PHOTOGRAPHS

#### External Photos EUT Photo 1



#### EUT Photo 2



## 14. EUT TEST SETUP PHOTOGRAPHS

### Radiated Emission

Below 1G



Above 1G





## Conducted Emission



※※※※※ END OF REPORT ※※※※※