



TEST REPORT

Product Name: 24 INCH ELED TV
FCC ID: 2AHU2JTV2423DCS
Trademark: JENSEN
Model Number: JTV2423DCS
Prepared For: ASA Electronics Shenzhen Limited
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China
Manufacturer: ASA Electronics Shenzhen Limited
Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen 518057, China
Prepared By: Shenzhen CTB Testing Technology Co., Ltd.
Address: 1&2/F., Building A, No.26, Xinhe Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China
Sample Received Date: Mar. 18, 2024
Sample tested Date: Mar. 18, 2024 to Apr. 02, 2024
Issue Date: Apr. 02, 2024
Report No.: CTB240325036RFX
Test Standards: FCC Part15.247
ANSI C63.10:2013
Test Results: PASS
Remark: This is WIFI-2.4GHZ band radio test report.

Compiled by:

Reviewed by:

Approved by:

Zhou kui

Arron Liu



Zhou Kui

Arron Liu

Bin Mei / Director

Note: If there is any objection to the inspection results in this report, please submit a written report to the company within 15 days from the date of receiving the report. The test report is effective only with both signature and specialized stamp. This result(s) shown in this report refer only to the sample(s) tested. Without written approval of Shenzhen CTB Testing Technology Co., Ltd. this report can't be reproduced except in full. The tested sample(s) and the sample information are provided by the client. "*" indicates the testing items were fulfilled by subcontracted lab. "#" indicates the items are not in CNAS accreditation scope.

TABLE OF CONTENT

Test Report Declaration	Page
1. VERSION	3
2. TEST SUMMARY	4
3. MEASUREMENT UNCERTAINTY	5
4. PRODUCT INFORMATION AND TEST SETUP	6
4.1 Product Information	6
4.2 Test Setup Configuration	6
4.3 Support Equipment	6
4.4 Channel List	7
4.5 Test Mode	7
4.6 Test Environment	7
5. TEST FACILITY AND TEST INSTRUMENT USED	8
5.1 Test Facility	8
5.2 Test Instrument Used	8
6. AC POWER LINE CONDUCTED EMISSION	10
6.1 Block Diagram Of Test Setup	10
6.2 Limit	10
6.3 Test procedure	10
6.4 Test Result	12
7. RADIATED SPURIOUS EMISSION	14
7.1 Block Diagram Of Test Setup	14
7.2 Limit	14
7.3 Test procedure	15
7.4 Test Result	16
8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS	38
8.1 Block Diagram Of Test Setup	38
8.2 Limit	38
8.3 Test procedure	38
9. CONDUCTED OUTPUT POWER	55
9.1 Block Diagram Of Test Setup	55
9.2 Limit	55
9.3 Test procedure	55
9.4 Test Result	56
10. 6DB OCCUPIED BANDWIDTH	57
10.1 Block Diagram Of Test Setup	57
10.2 Limit	57
10.3 Test procedure	57
10.4 Test Result	58
11. POWER SPECTRAL DENSITY	68
11.1 Block Diagram Of Test Setup	68
11.2 Limit	68
11.3 Test procedure	68
11.4 Test Result	69
12. ANTENNA REQUIREMENT	78
13. EUT TEST SETUP PHOTOGRAPHS	79

(Note: N/A means not applicable)

1. VERSION

Report No.	Issue Date	Description	Approved
CTB240325036RFX	Apr. 02, 2024	Original	Valid

2. TEST SUMMARY

The Product has been tested according to the following specifications:

Test Item	Test Requirement	Test method	Result
AC Power Line Conducted Emission	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
Radiated Spurious emissions	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS
Band edge and RF Conducted Spurious Emissions	47 CFR Part 15 Subpart C Section 15.247(d)/15.205(a)	ANSI C63.10-2013	PASS
Conducted Peak Output Power	47 CFR Part 15 Subpart C Section 15.247 (b)(3)	ANSI C63.10-2013	PASS
6dB Occupied Bandwidth	47 CFR Part 15 Subpart C Section 15.247 (a)(2)	ANSI C63.10-2013	PASS
Power Spectral Density	47 CFR Part 15 Subpart C Section 15.247 (e)	ANSI C63.10-2013/ KDB 558074 D01 v05r02	PASS
Antenna Requirement	47 CFR Part 15 Subpart C Section 15.203/15.247 (b)	/	PASS
RF Exposure Evaluation	47 CFR Part 15 Subpart C Section 15.247 (i)/1.1310/2.1091	KDB447498D01v06	PASS

Remark:

Test according to ANSI C63.10-2013.

3. MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

Item	Uncertainty
Occupancy bandwidth	U=±54.3Hz
Conducted output power Above 1G	U=±1.0dB
Conducted output power below 1G	U=±0.9dB
Power Spectral Density , Conduction	U=±1.0dB
Conduction spurious emissions	U=±2.8dB
Out of band emission	U=±54Hz
3m chamber Radiated spurious emission(9KHz-30MHz)	U=±4.8dB
3m chamber Radiated spurious emission(30MHz-1GHz)	U=±4.3dB
3m chamber Radiated spurious emission(1GHz-18GHz)	U=±4.5dB
3m chamber Radiated spurious emission(1GHz-40GHz)	U=±4.8dB
humidity uncertainty	U=±5.3%
Temperature uncertainty	U=±0.59°C
Supply voltages	U=±3%
Time	U=±5%
Conducted Emission (9KHz-30MHz)	3.2 dB

4. PRODUCT INFORMATION AND TEST SETUP

4.1 Product Information

Model(s):	JTV2423DCS
Model Description:	N/A
Wi-Fi Specification:	IEEE 802.11b/g/n
Hardware Version:	V1.0
Software Version:	V1.0
Operation Frequency:	WiFi: IEEE 802.11b/g/n 20: 2412-2462MHz/ 11 channel IEEE 802.11n 40: 2422-2452MHz/ 7 channel
Max. RF output power:	WiFi (2.4G): 16.357dBm
Type of Modulation:	WiFi: DSSS, OFDM
Antenna installation:	WiFi: Internal antenna
Antenna Gain:	WiFi (2.4G): Ant1: 0.92dBi Ant2: 0.92dBi
Ratings:	DC 12V---3A

4.2 Test Setup Configuration

See test photographs attached in EUT TEST SETUP PHOTOGRAPHS for the actual connections between Product and support equipment

4.3 Support Equipment

Item	Equipment	Mfr/Brand	Model/TypeNo.	SeriesNo.	Note
1	Keyboard	DELL	KB216t	N/A	N/A
2	Mouse	DELL	MS116c	N/A	N/A
3	Monitor	DELL	SE2218HV	N/A	N/A
4	PC	DELL	Inspiron 3670	N/A	N/A
5	Battery	JUXIANG	6-QW-45(430)-C	/	/

Notes:

1. All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test.
2. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

4.4 Channel List

CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)	CH	Frequency (MHz)
1	2412	2	2417	3	2422	4	2427
5	2432	6	2437	7	2442	8	2447
9	2452	10	2457	11	2462		

4.5 Test Mode

All test mode(s) and condition(s) mentioned were considered and evaluated respectively by performing full tests, the worst data were recorded and reported.

ANT 1, ANT 2

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11b/g/n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

MIMO(ANT 1+ANT 2)

Test mode	Low channel	Middle channel	High channel
Transmitting(802.11n20)	2412MHz	2437MHz	2462MHz
Transmitting(802.11n40)	2422MHz	2437MHz	2452MHz

EUT has two Internal Antenna with Max Antenna Gain 0.92dBi on every antenna, CDD device with two spatial streams, according to KDB662911 D01 v02r01,

Directional gain= GANT + Array Gain, where Array Gain is as follows.

1) For power spectral density(PSD) measurements,

Array Gain=10log(NANT/NSS)dB=10log(2/1)=3.01dB,

So the directional gain for PSD is 3.93dBi

2) For power measurements,

The Array gain=0 dB for NANT≤4,

So the directional gain for Power measurements is 0.92dBi

NOTE: DutyCycle>98%.

Test mode	Rate
802.11b	11M
802.11g	54M
802.11/n20	65M
802.11/n40	65M

4.6 Test Environment

Humidity(%):	54
Atmospheric Pressure(kPa):	101
Normal Voltage(DC):	12V
Normal Temperature(°C)	23
Low Temperature(°C)	0
High Temperature(°C)	50

5. TEST FACILITY AND TEST INSTRUMENT USED

5.1 Test Facility

All measurement facilities used to collect the measurement data are located at 1&2F., Building A, No. 26, Xinh Road, Xinqiao, Xinqiao Street, Bao'an District, Shenzhen, Guangdong, China. The site and apparatus are constructed in conformance with the requirements of ANSI C63.4 and CISPR 16-1-1 other equivalent standards.

5.2 Test Instrument Used

No.	Equipment	Manufacturer	Type No.	Serial No.	Firmware Version	Calibrated until
1	Spectrum Analyzer	Agilent	N9020A	MY52090073	A.14.16	2024.07.05
2	Power Sensor	Agilent	U2021XA	MY56120032	/	2024.07.05
3	Power Sensor	Agilent	U2021XA	MY56120034	/	2024.07.05
4	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
5	Spectrum Analyzer	KEYSIGHT	N9020A	MY51289897	A.14.16	2024.07.05
6	Signal Generator	Agilent	N5181A	MY50140365	A.01.60	2024.07.05
7	Vector signal generator	Agilent	N5182A	MY47420195	A.01.87	2024.07.05
8	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.06
9	2.4 GHz Filter	Shenxiang	MSF2400-24 83.5MS-1154	20181015001	/	2024.07.05
10	5 GHz Filter	Shenxiang	MSF5150-58 50MS-1155	20181015001	/	2024.07.06
11	Filter	Xingbo	XBLBQ-DZA 120	190821-1-1	/	2024.07.06
12	BT&WI-FI Automatic test software	Microwave	MTS8000	Ver. 2.0.0.0	/	/
13	Rohde & Schwarz SFU Broadcast Test System	R&S	SFU	101017	/	2024.10.30
14	Temperature humidity chamber	Hongjing	TH-80CH	DG-15174	/	2024.07.05
15	234G Automatic test software	Microwave	MTS8200	Ver. 2.0.0.0	/	/
16	966 chamber	C.R.T.	966	/	/	2024.08.11
17	Receiver	R&S	ESPI	100362	RF_ATTEN_7 (104489/003)	2024.07.05
18	Amplifier	HP	8447E	2945A02747	/	2024.07.05
19	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
20	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
21	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA9120D	01911	/	2024.07.08

22	EMI test software	Fala	EZ-EMC	FA-03A2 RE	/	/
23	Loop Antenna	Schwarzbeck	FMZB 1519B	1519B-224	/	2024.07.08
24	loop antenna	ZHINAN	ZN30900A	GTS534	/	/
25	40G Horn antenna	A/H/System	SAS-574	588	/	2024.10.30
26	Amplifier	AEROFLEX	Aeroflex	097	/	2024.07.05
27	Power Metter	KEYSIGHT	N1912AP	N/A	A.05.00	2024.07.05

Continuous disturbance


No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	LISN	ROHDE&SCHWARZ	ESH3-Z5	100318	/	2024.07.05
2	Pulse limiter	ROHDE&SCHWARZ	ESH3Z2	357881052	/	2024.07.05
3	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
4	Coaxial cable	ZDECL	Z302S-NJ-SM AJ-12M	18091905	/	2024.07.05
5	ISN	Schwarzbeck	NTFM8158	183	/	2024.07.05
6	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
7	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
8	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

Radiated emission

No.	Equipment	Manufacturer	Model No.	Serial No.	Firmware Version	Calibrated until
1	Double Ridged Broadband Horn Antenna	Schwarzbeck	BBHA 9120 D	01911	/	2024.07.08
2	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	00869	/	2024.07.08
3	Amplifier	Agilent	8449B	3008A01838	/	2024.07.05
4	Amplifier	HP	8447E	2945A02747	/	2024.07.05
5	EMI TEST RECEIVER	ROHDE&SCHWARZ	ESCI	100428/003	V4.42.SP3	2024.07.05
6	Coaxial cable	ETS	RFC-SNS-100-N MS-80 NI	/	/	2024.07.05
7	Coaxial cable	ETS	RFC-SNS-100-N MS-20 NI	/	/	2024.07.05
8	Coaxial cable	ETS	RFC-SNS-100-S MS-20 NI	/	/	2024.07.05
9	Coaxial cable	ETS	RFC-NNS-100- NMS-300 NI	/	/	2024.07.05
10	Communication test set	Agilent	E5515C	MY50102567	B.19.07 (E1962B)	2024.07.05
11	Communication test set	R&S	CMW500	108058	V3.5.80	2024.07.05
12	EZ-EMC	Frad	EMC-con3A1.1	/	/	/

6. AC POWER LINE CONDUCTED EMISSION

6.1 Block Diagram Of Test Setup

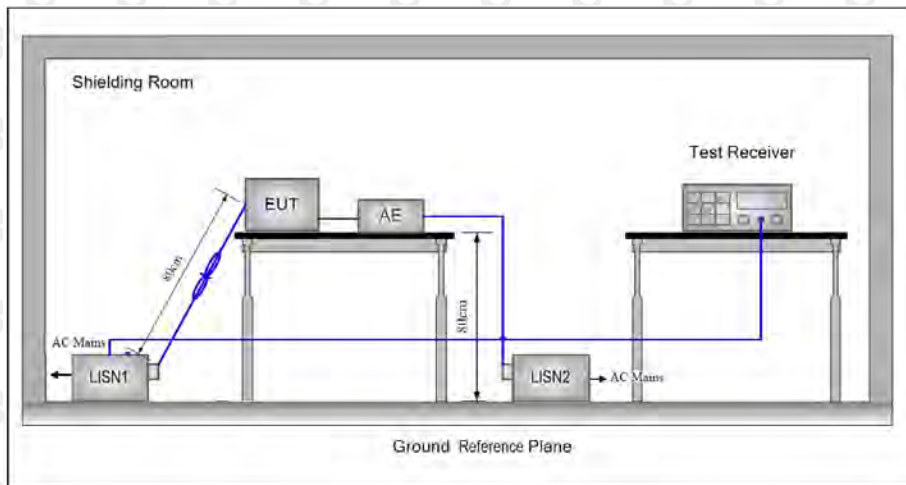

6.2 Limit

Table 4 - AC power-line conducted emissions limits		
Frequency (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5 - 5	56	46
5 - 30	60	50

Note 1: The level decreases linearly with the logarithm of the frequency.

* Decreasing linearly with the logarithm of the frequency


6.3 Test procedure

- 1) The mains terminal disturbance voltage test was conducted in a shielded room.
- 2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a 50 Ω /50 μ H + 5 Ω linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
- 3) The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,
- 4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0,4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0,8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0,8 m from the LISN 2.

- 5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.

6.4 Test Result

Test Specification: Line
 AC 120V 60Hz
 the worst: 802.11b (low channel)

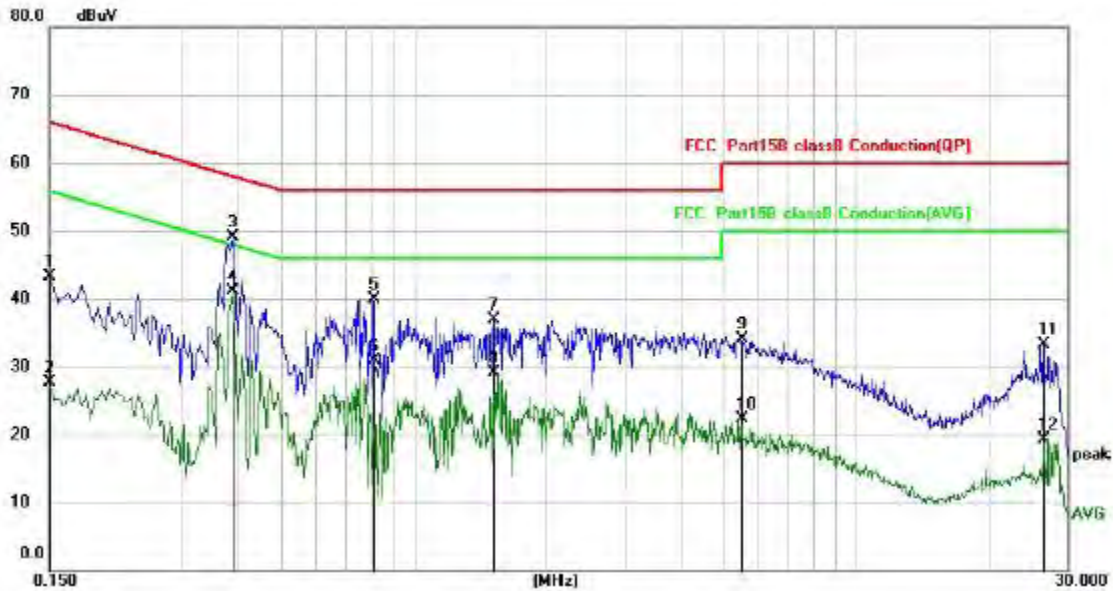


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	33.29	9.95	43.24	66.00	-22.76	QP
2		0.1500	17.71	9.95	27.66	56.00	-28.34	AVG
3		0.3899	39.03	9.98	49.01	58.07	-9.06	QP
4	*	0.3899	31.14	9.98	41.12	48.07	-6.95	AVG
5		0.8100	29.98	10.02	40.00	56.00	-16.00	QP
6		0.8100	20.97	10.02	30.99	46.00	-15.01	AVG
7		1.5140	26.87	10.05	36.92	56.00	-19.08	QP
8		1.5140	19.02	10.05	29.07	46.00	-16.93	AVG
9		5.4940	23.72	10.41	34.13	60.00	-25.87	QP
10		5.4940	11.86	10.41	22.27	50.00	-27.73	AVG
11		26.5500	22.26	11.14	33.40	60.00	-26.60	QP
12		26.5500	8.07	11.14	19.21	50.00	-30.79	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit



Test Specification: Neutral
 AC 120V 60Hz
 the worst: 802.11b (low channel)

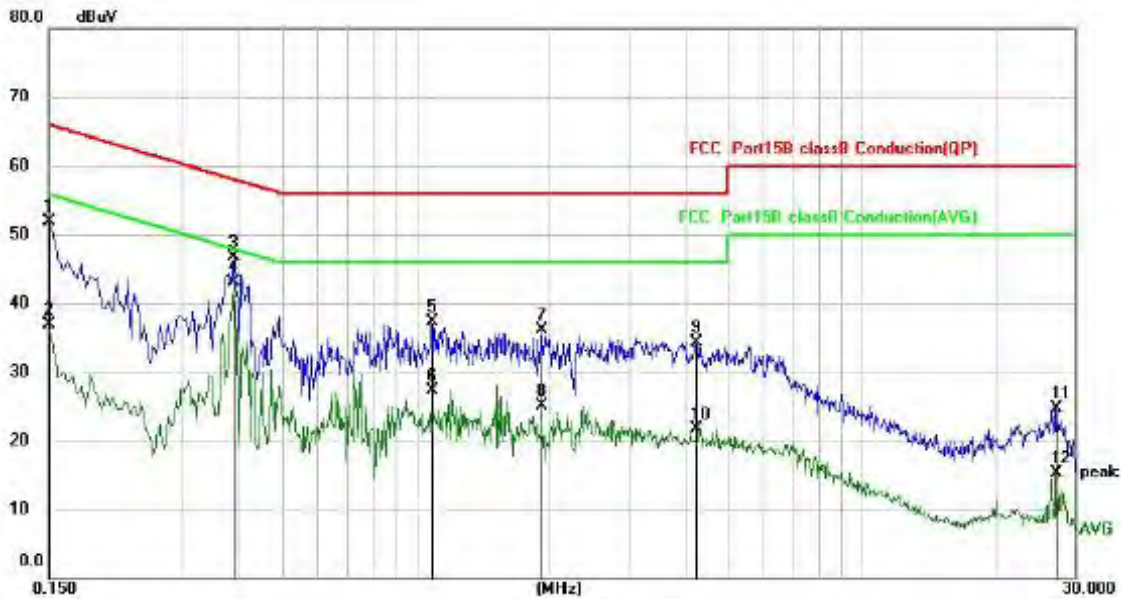

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Over dB	Detector
1		0.1500	41.89	9.95	51.84	66.00	-14.16	QP
2		0.1500	26.87	9.95	36.82	56.00	-19.18	AVG
3		0.3899	36.80	9.98	46.78	58.07	-11.29	QP
4	*	0.3899	33.17	9.98	43.15	48.07	-4.92	AVG
5		1.0859	27.24	10.02	37.26	56.00	-18.74	QP
6		1.0859	17.30	10.02	27.32	46.00	-18.68	AVG
7		1.9140	25.94	10.08	36.02	56.00	-19.98	QP
8		1.9140	14.95	10.08	25.03	46.00	-20.97	AVG
9		4.2300	24.08	10.31	34.39	56.00	-21.61	QP
10		4.2300	11.41	10.31	21.72	46.00	-24.28	AVG
11		27.1620	13.50	11.20	24.70	60.00	-35.30	QP
12		27.1620	4.08	11.20	15.28	50.00	-34.72	AVG

Remark:

Factor = Cable loss + LISN factor, Margin = Measurement – Limit

7. RADIATED SPURIOUS EMISSION

7.1 Block Diagram Of Test Setup

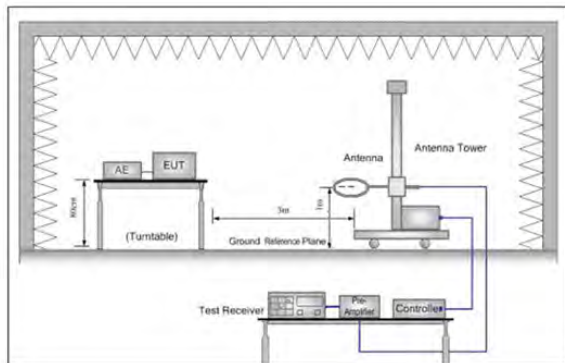


Figure 1. Below 30MHz

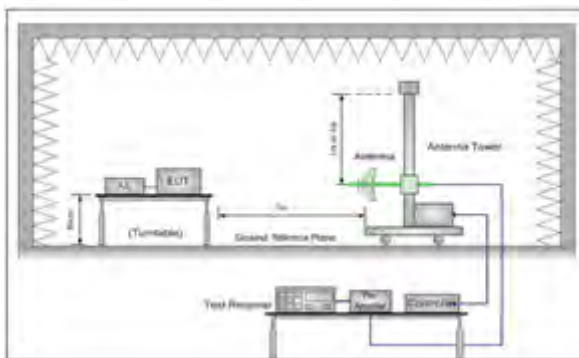


Figure 2. 30MHz to 1GHz

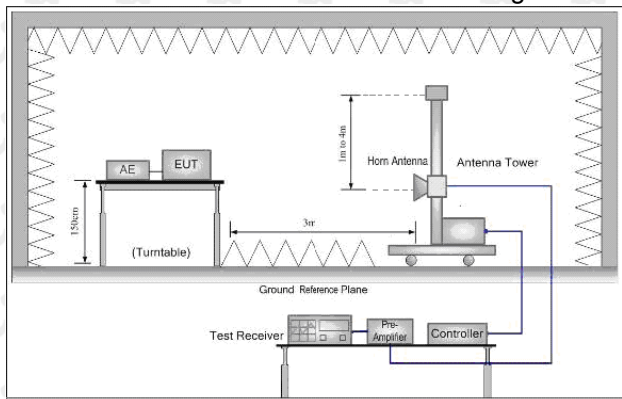


Figure 3. Above 1GHz

7.2 Limit

Spurious Emissions:

Frequency	Field strength (microvolt/meter)	Limit (dB μ V/m)	Remark	Measurement distance (m)
0.009MHz-0.490MHz	2400/F (kHz)	-	-	300
0.490MHz-1.705MHz	24000/F (kHz)	-	-	30
1.705MHz-30MHz	30	-	-	30
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	54.0	Average	3

Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.

7.3 Test procedure

Below 1GHz test procedure as below:

- a.The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b.The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c.The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d.For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rota table table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e.The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f.If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

- g.Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter(Above 18GHz the distance is 1 meter and table is 1.5 meter).
- h.Test the EUT in the lowest channel ,the middle channel ,the Highest channel
- j.Repeat above procedures until all frequencies measured was complete.

Receiver set:


Frequency	Detector	RBW	VBW	Remark
0.009MHz-0.090MHz	Peak	10kHz	30KHz	Peak
0.009MHz-0.090MHz	Average	10kHz	30KHz	Average
0.090MHz-0.110MHz	Quasi-peak	10kHz	30KHz	Quasi-peak
0.110MHz-0.490MHz	Peak	10kHz	30KHz	Peak
0.110MHz-0.490MHz	Average	10kHz	30KHz	Average
0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
30MHz-1GHz	Quasi-peak	120 kHz	300KHz	Quasi-peak
Above 1GHz	Peak	1MHz	3MHz	Peak
	Peak	1MHz	10Hz	Average

The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement -X, Y, and Z-plane. The X-plane results were found as the worst case and were shown in this report.

7.4 Test Result

After pre-scanning three directions, the report recorded the worst case


Below 1GHz Test Results:
Antenna polarity: H

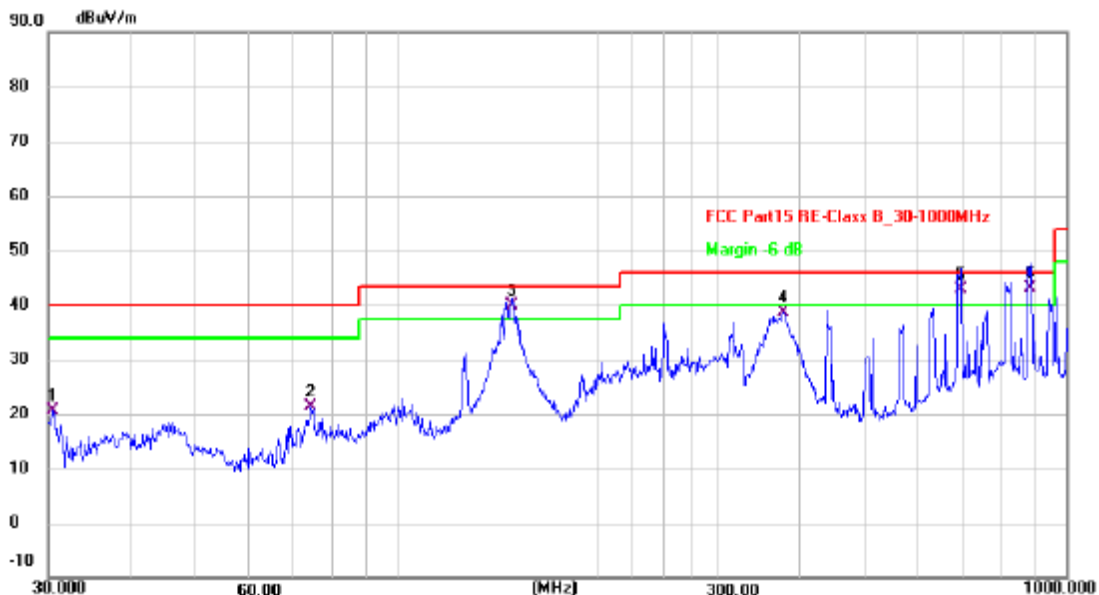

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1	30.4237	34.69	-14.03	20.66	40.00	-19.34	QP
2	74.1350	39.81	-18.36	21.45	40.00	-18.55	QP
3 !	147.9214	52.66	-12.80	39.86	43.50	-3.64	QP
4	377.2591	50.56	-11.85	38.71	46.00	-7.29	QP
5 !	696.8567	47.04	-4.16	42.88	46.00	-3.12	QP
6 *	885.9499	42.21	1.04	43.25	46.00	-2.75	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

Antenna polarity: V

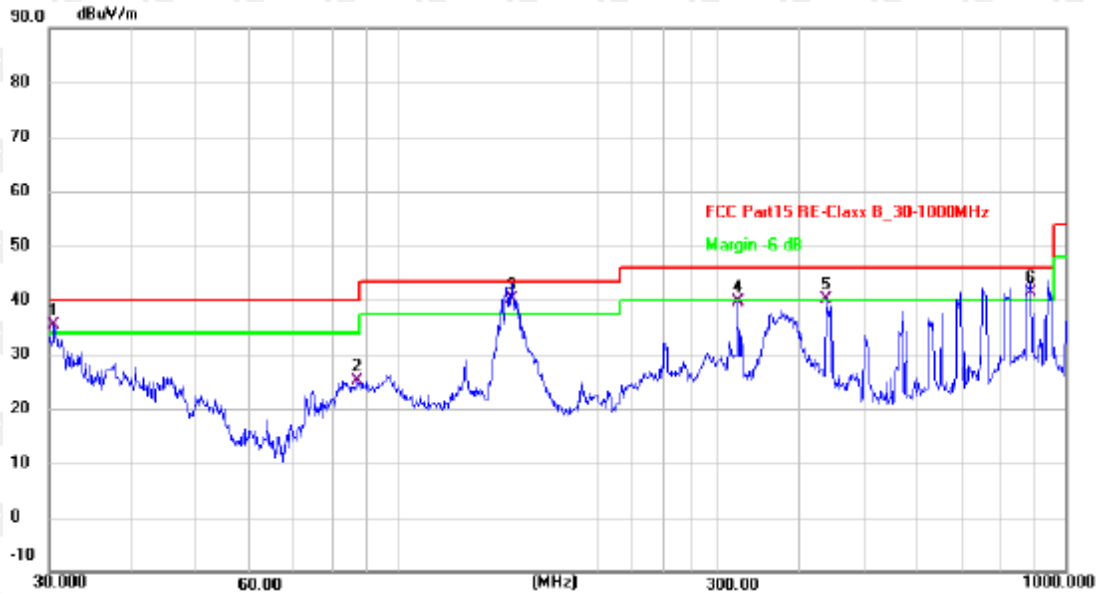

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector
1 !	30.5306	49.50	-14.02	35.48	40.00	-4.52	QP
2	86.8067	43.67	-18.44	25.23	40.00	-14.77	QP
3 *	147.9214	52.85	-12.80	40.05	43.50	-3.45	QP
4	323.3203	52.29	-12.65	39.64	46.00	-6.36	QP
5 !	437.1200	50.35	-10.31	40.04	46.00	-5.96	QP
6 !	887.6099	40.19	1.08	41.27	46.00	-4.73	QP

Remark: Factor = Cable lose + Antenna factor - Pre-amplifier; Margin = Limit – Level

1. The margin of 9K-30MH measurement exceeds 20dB, so the test chart is not included.
2. All modes have been tested, and the test results show that ANT2 b-mode data is the worst, only ANT2 b-mode test chart is put.

Above 1 GHz Test Results:

ANT1 LOW CH1 (802.11b Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.04	-3.64	61.40	74	-12.60	peak
4824	50.81	-3.64	47.17	54	-6.83	AVG
7236	57.97	-0.95	57.02	74	-16.98	peak
7236	45.53	-0.95	44.58	54	-9.42	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.47	-3.64	60.83	74	-13.17	peak
4824	48.90	-3.64	45.26	54	-8.74	AVG
7236	56.96	-0.95	56.01	74	-17.99	peak
7236	43.19	-0.95	42.24	54	-11.76	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1 MID CH6 (802.11b Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detect Type
4874	65.26	-3.51	61.75	74	-12.25	peak
4874	49.16	-3.51	45.65	54	-8.35	AVG
7311	58.62	-0.82	57.80	74	-16.20	peak
7311	43.74	-0.82	42.92	54	-11.08	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detect Type
4874	65.16	-3.51	61.65	74	-12.35	peak
4874	47.89	-3.51	44.38	54	-9.62	AVG
7311	57.88	-0.82	57.06	74	-16.94	peak
7311	42.96	-0.82	42.14	54	-11.86	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11b Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	62.21	-3.43	58.78	74	-15.22	peak
4924	47.81	-3.43	44.38	54	-9.62	AVG
7386	59.22	-0.75	58.47	74	-15.53	peak
7386	43.26	-0.75	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	65.29	-3.43	61.86	74	-12.14	peak
4924	46.28	-3.43	42.85	54	-11.15	AVG
7386	58.14	-0.75	57.39	74	-16.61	peak
7386	42.10	-0.75	41.35	54	-12.65	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1 LOW CH1 (802.11g Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.32	-3.64	60.68	74	-13.32	peak
4824	48.72	-3.64	45.08	54	-8.92	AVG
7236	58.68	-0.95	57.73	74	-16.27	peak
7236	45.52	-0.95	44.57	54	-9.43	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	64.84	-3.64	61.20	74	-12.80	peak
4824	49.09	-3.64	45.45	54	-8.55	AVG
7236	58.91	-0.95	57.96	74	-16.04	peak
7236	43.91	-0.95	42.96	54	-11.04	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

ANT1 MID CH6 (802.11g Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	66.33	-3.51	62.82	74	-11.18	peak
4874	48.58	-3.51	45.07	54	-8.93	AVG
7311	58.65	-0.82	57.83	74	-16.17	peak
7311	44.44	-0.82	43.62	54	-10.38	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	63.55	-3.51	60.04	74	-13.96	peak
4874	48.87	-3.51	45.36	54	-8.64	AVG
7311	59.21	-0.82	58.39	74	-15.61	peak
7311	43.70	-0.82	42.88	54	-11.12	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1 HIGH CH11 (802.11g Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	63.45	-3.43	60.02	74	-13.98	peak
4924	46.08	-3.43	42.65	54	-11.35	AVG
7386	59.56	-0.75	58.81	74	-15.19	peak
7386	45.00	-0.75	44.25	54	-9.75	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detected Type
4924	64.66	-3.43	61.23	74	-12.77	peak
4924	47.69	-3.43	44.26	54	-9.74	AVG
7386	58.76	-0.75	58.01	74	-15.99	peak
7386	42.94	-0.75	42.19	54	-11.81	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Above 1GHz ANT1+ANT2 :

LOW CH1 (802.11n/H20 Mode)/2412

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	66.45	-3.64	62.81	74	-11.19	peak
4824	48.92	-3.64	45.28	54	-8.72	AVG
7236	57.71	-0.95	56.76	74	-17.24	peak
7236	44.28	-0.95	43.33	54	-10.67	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4824	65.41	-3.64	61.77	74	-12.23	peak
4824	46.87	-3.64	43.23	54	-10.77	AVG
7236	58.28	-0.95	57.33	74	-16.67	peak
7236	43.57	-0.95	42.62	54	-11.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor,
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	63.70	-3.51	60.19	74	-13.81	peak
4874	50.04	-3.51	46.53	54	-7.47	AVG
7311	58.50	-0.82	57.68	74	-16.32	peak
7311	44.36	-0.82	43.54	54	-10.46	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detecto Type
4874	64.40	-3.51	60.89	74	-13.11	peak
4874	47.84	-3.51	44.33	54	-9.67	AVG
7311	59.16	-0.82	58.34	74	-15.66	peak
7311	43.86	-0.82	43.04	54	-10.96	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

LOW CH1 (802.11n/H20 Mode)/2462

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detected Type
4924	63.69	-3.43	60.26	74	-13.74	peak
4924	48.74	-3.43	45.31	54	-8.69	AVG
7386	59.17	-0.75	58.42	74	-15.58	peak
7386	42.81	-0.75	42.06	54	-11.94	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detected Type
4924	64.89	-3.43	61.46	74	-12.54	peak
4924	48.19	-3.43	44.76	54	-9.24	AVG
7386	59.03	-0.75	58.28	74	-15.72	peak
7386	43.06	-0.75	42.31	54	-11.69	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "----" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

ANT1+ANT2 LOW CH3 (802.11n/H40 Mode)/2422

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	65.37	-3.63	61.74	74	-12.26	peak
4844	49.22	-3.63	45.59	54	-8.41	AVG
7266	58.53	-0.94	57.59	74	-16.41	peak
7266	45.58	-0.94	44.64	54	-9.36	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Meter Reading + Factor, Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4844	64.15	-3.63	60.52	74	-13.48	peak
4844	49.39	-3.63	45.76	54	-8.24	AVG
7266	58.95	-0.94	58.01	74	-15.99	peak
7266	45.51	-0.94	44.57	54	-9.43	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

ANT1+ANT2 MID CH6 (802.11n/H40 Mode)/2437

Horizontal:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	63.53	-3.51	60.02	74	-13.98	peak
4874	47.87	-3.51	44.36	54	-9.64	AVG
7311	59.38	-0.82	58.56	74	-15.44	peak
7311	46.04	-0.82	45.22	54	-8.78	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dBμV)	Factor (dB)	Emission Level (dBμV/m)	Limits (dBμV/m)	Margin (dB)	Detector Type
4874	62.24	-3.51	58.73	74	-15.27	peak
4874	46.45	-3.51	42.94	54	-11.06	AVG
7311	56.66	-0.82	55.84	74	-18.16	peak
7311	43.33	-0.82	42.51	54	-11.49	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

ANT1+ANT2 HIGH CH9 (802.11n/H40 Mode)/2452

Horizontal:

Frequency (MHz)	Meter Reading (dB μ V)	Correction Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	63.70	-3.43	60.27	74	-13.73	peak
4904	46.99	-3.43	43.56	54	-10.44	AVG
7356	56.74	-0.75	55.99	74	-18.01	peak
7356	41.90	-0.75	41.15	54	-12.85	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Vertical:

Frequency (MHz)	Meter Reading (dB μ V)	Correction Factor (dB)	Emission Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Detector Type
4904	64.15	-3.43	60.72	74	-13.28	peak
4904	48.34	-3.43	44.91	54	-9.09	AVG
7356	58.16	-0.75	57.41	74	-16.59	peak
7356	42.34	-0.75	41.59	54	-12.41	AVG

Remark: Factor = Antenna Factor + Cable Loss - Pre-amplifier. Emission level
Margin = Emission level - Limits

Remark:

- (1). Measuring frequencies from 9KHz to the 25 GHz. The test range is 9K ~10 times the main wave, and other spurious below the limit of 20dB will not be reflected in the report
- (2) * denotes emission frequency which appearing within the Restricted Bands specified in provision of 15.205, then the general radiated emission limits in 15.209 apply.
- (3) Data of measurement within this frequency range shown "---" in the table above means the reading of emissions are attenuated more than 20dB below the permissible limits or the field strength is too small to be measured.
- (4) When the test results of Peak Detected below the limits of Average Detected, the Average Detected is not need completed. For example: Top Channel at Fundamental 73.16dBuV/m(PK Value) <93.98(AV Limit), at harmonic 53.20 dBuV/m(PK Value) <54 dBuV/m(AV Limit), the Average Detected not need to completed.

Restricted bands around fundamental frequency (Radiated)

Operation Mode:

ANT 1 802.11b Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.15	-5.81	52.34	74	-21.66	peak
2390	/	-5.81	/	54	/	AVG
2399	64.58	-5.84	58.74	74	-15.26	peak
2399	49.63	-5.84	43.79	54	-10.21	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.55	-5.81	51.74	74	-22.26	peak
2390	/	-5.81	/	54	/	AVG
2399	62.10	-5.84	56.26	74	-17.74	peak
2399	46.58	-5.84	40.74	54	-13.26	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

When the peak value is smaller than the AVG limit, AVG is not reflected.

Operation Mode:

ANT1 802.11b Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.53	-5.65	51.88	74	-22.12	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.80	-5.65	51.15	74	-22.85	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1 802.11g Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	59.67	-5.81	53.86	74	-20.14	peak
2390	/	-5.81	/	54	/	AVG
2399	63.46	-5.84	57.62	74	-16.38	peak
2399	46.95	-5.84	41.11	54	-12.89	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.91	-5.81	51.10	74	-22.90	peak
2390	/	-5.81	/	54	/	AVG
2399	62.09	-5.84	56.25	74	-17.75	peak
2399	46.13	-5.84	40.29	54	-13.71	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1 802.11g Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	57.61	-5.65	51.96	74	-22.04	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.31	-5.65	50.66	74	-23.34	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH Low (2412MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	56.15	-5.81	50.34	74	-23.66	peak
2390	/	-5.81	/	54	/	AVG
2399	62.76	-5.84	56.92	74	-17.08	peak
2399	47.46	-5.84	41.62	54	-12.38	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	57.60	-5.81	51.79	74	-22.21	peak
2390	/	-5.81	/	54	/	AVG
2399	61.39	-5.84	55.55	74	-18.45	peak
2399	46.84	-5.84	41.00	54	-13.00	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H20 Mode TX CH High (2462MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	55.71	-5.65	50.06	74	-23.94	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.43	-5.65	50.78	74	-23.22	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH Low (2422MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.25	-5.81	52.44	74	-21.56	peak
2390	/	-5.81	/	54	/	AVG
2399	62.24	-5.84	56.40	74	-17.60	peak
2399	46.38	-5.84	40.54	54	-13.46	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2390	58.68	-5.81	52.87	74	-21.13	peak
2390	/	-5.81	/	54	/	AVG
2399	61.89	-5.84	56.05	74	-17.95	peak
2399	46.71	-5.84	40.87	54	-13.13	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Operation Mode:

ANT1+ANT2 802.11n/H40 Mode TX CH High (2452MHz)

Horizontal

Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.43	-5.65	50.78	74	-23.22	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Vertical:


Frequency	Meter Reading	Factor	Emission Level	Limits	Margin	Detector Type
(MHz)	(dBμV)	(dB)	(dBμV/m)	(dBμV/m)	(dB)	
2483.5	56.99	-5.65	51.34	74	-22.66	peak
2483.5	/	-5.65	/	54	/	AVG

Remark: Factor = Antenna Factor + Cable Loss – Pre-amplifier. Emission level = Reading Result + Factor, Margin = Emission level - Limits

Remark: All the other emissions not reported were too low to read and deemed to comply with FCC limit.

8. BAND EDGE AND RF CONDUCTED SPURIOUS EMISSIONS

8.1 Block Diagram Of Test Setup

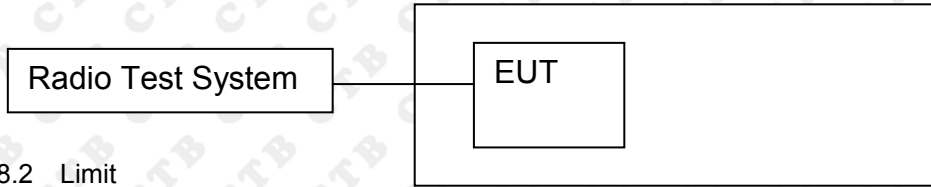

8.2 Limit

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.3 Test procedure


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer:
 Below 30MHz:
 RBW = 100kHz, VBW = 300kHz, Sweep = auto
 Detector function = peak, Trace = max hold
 Above 30MHz:
 RBW = 100KHz, VBW = 300KHz, Sweep = auto
 Detector function = peak, Trace = max hold

8.4 Test Result
ANT1:




BAND EDGE Graphs

802.11g/LCH

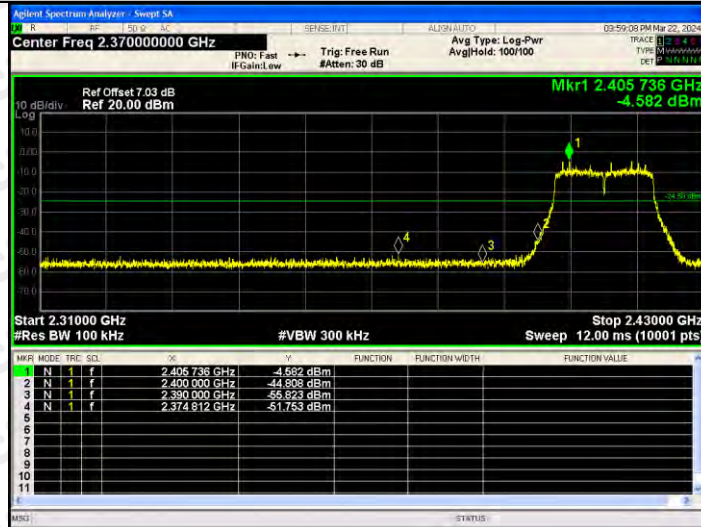


802.11g/HCH

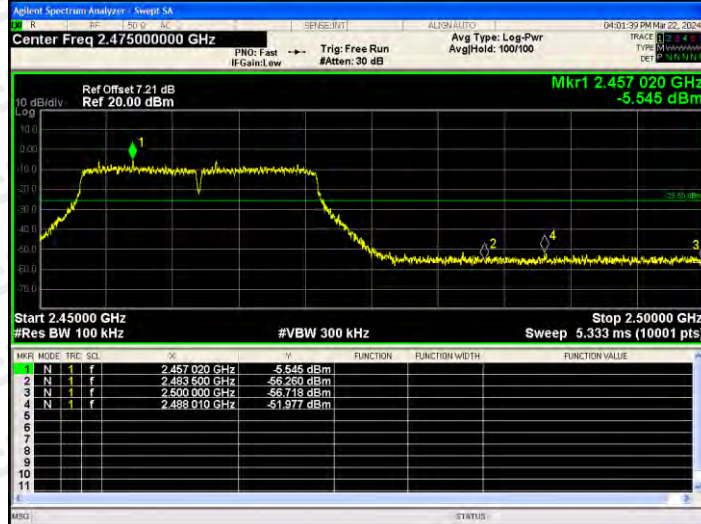


BAND EDGE Graphs

802.11n(HT20)/L
CH

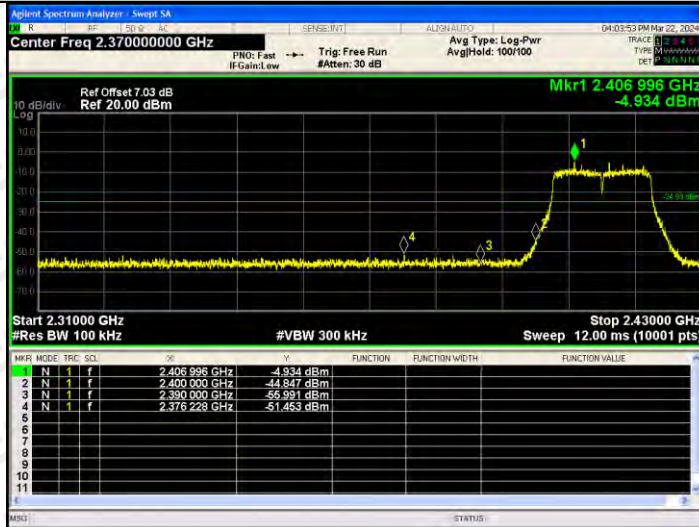


802.11n(HT20)/H
CH

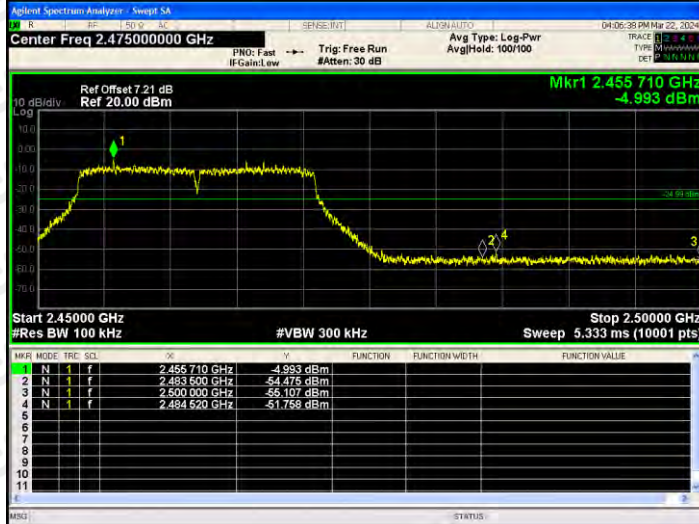


BAND EDGE Graphs


802.11n(HT40)/L
CH

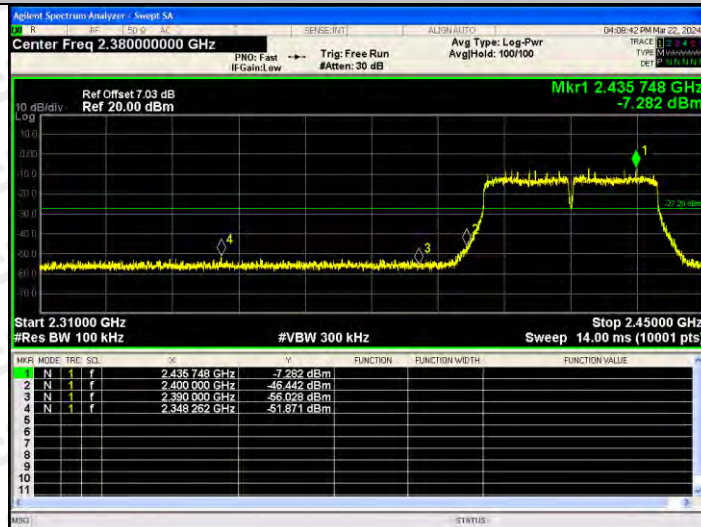


802.11n(HT40)/H
CH

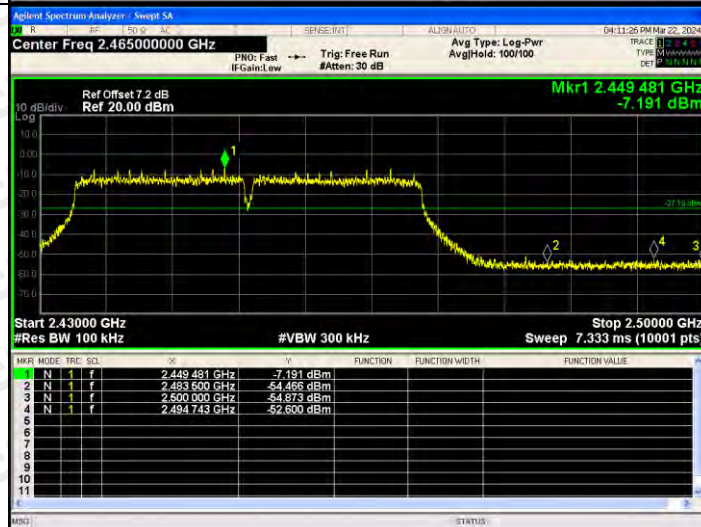


RF Conducted Spurious Emissions Graphs



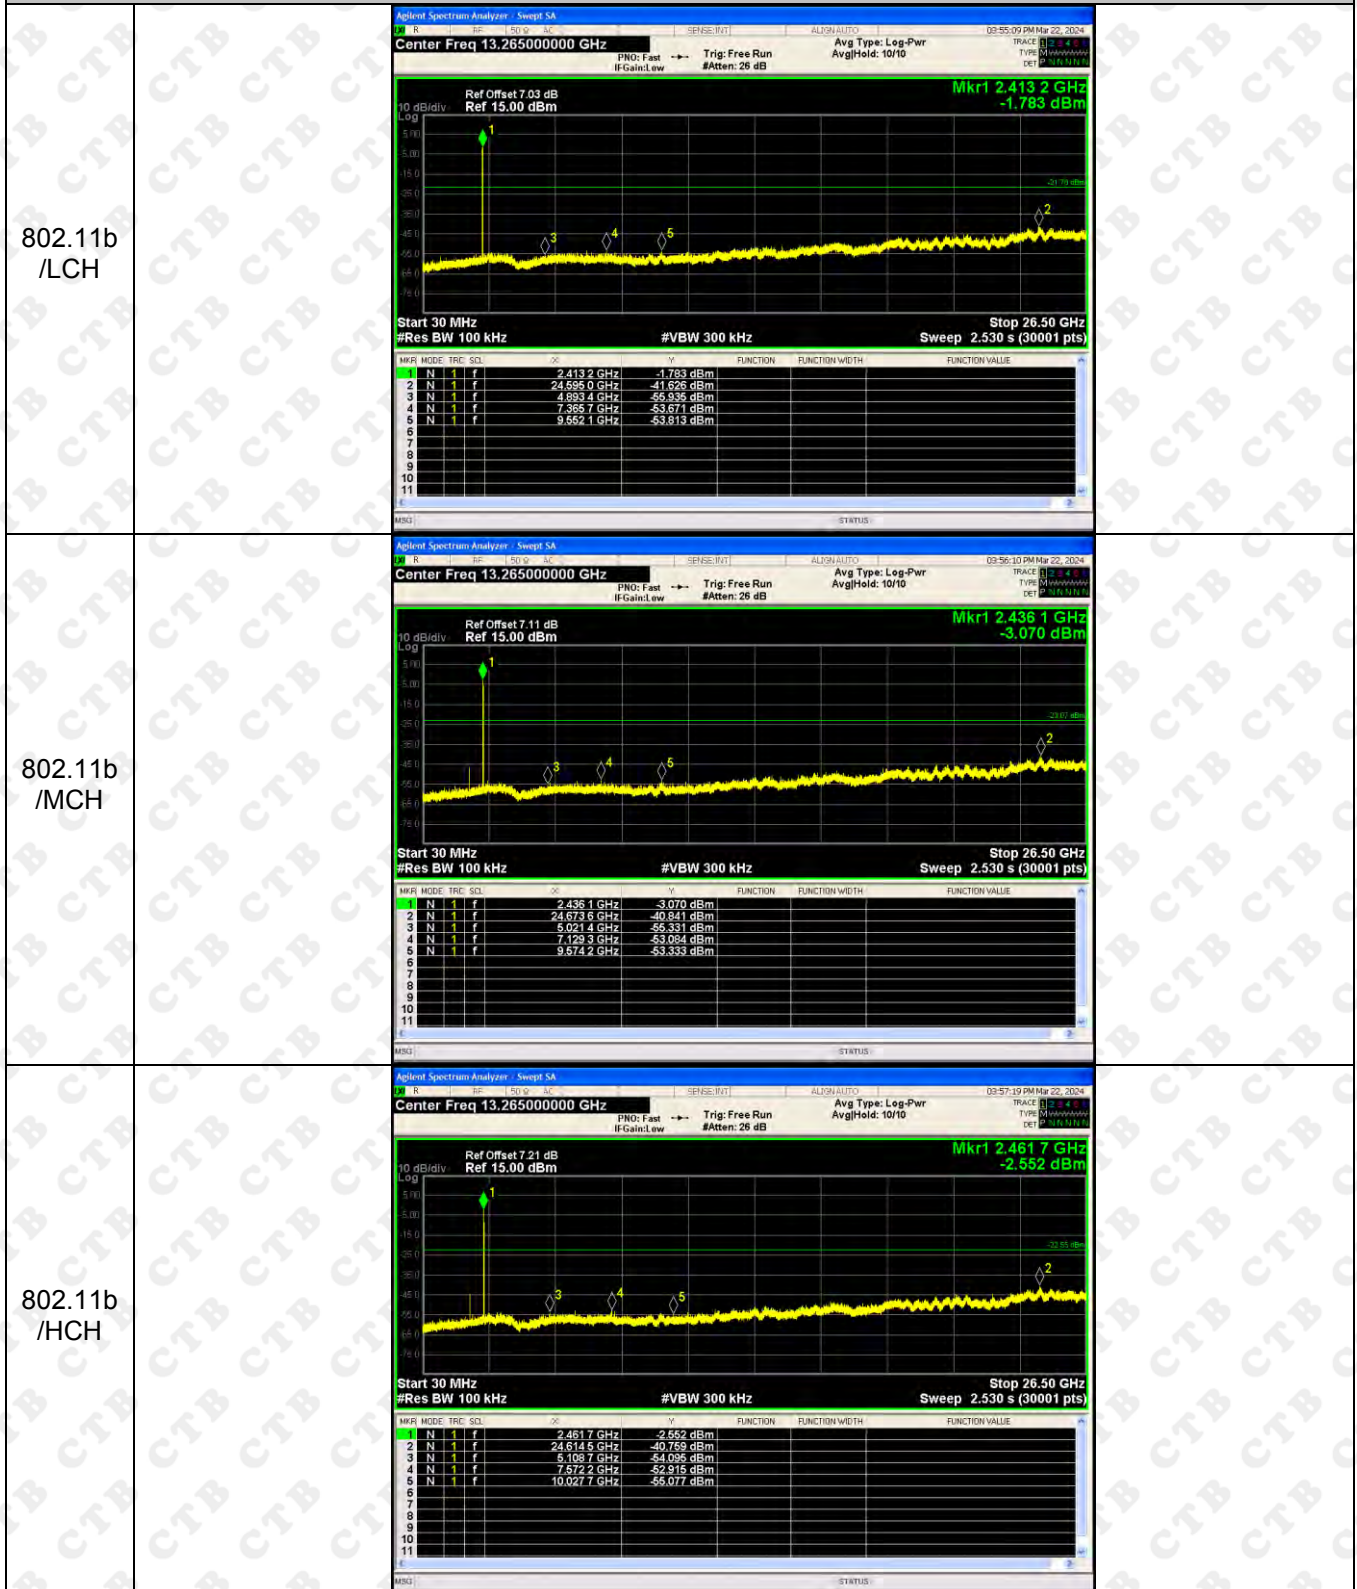


RF Conducted Spurious Emissions Graphs

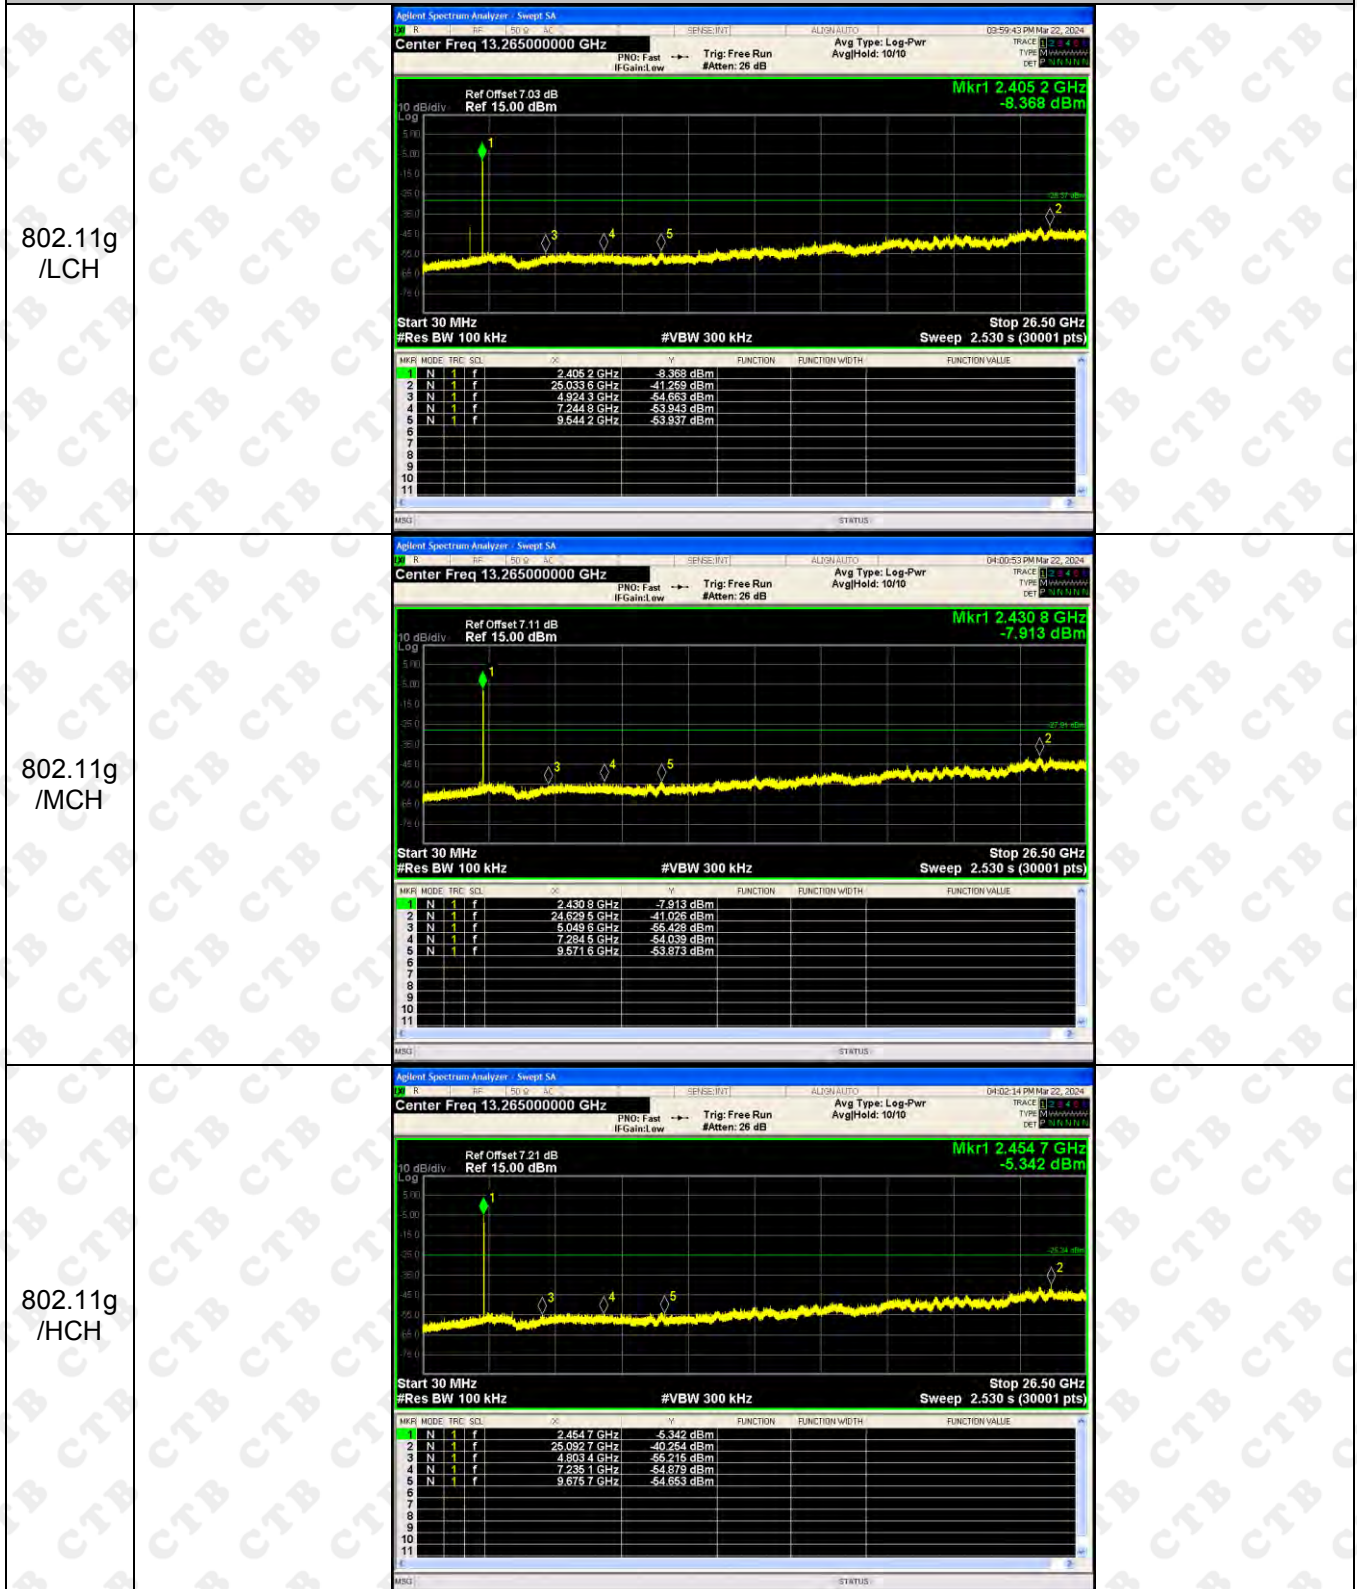

RF Conducted Spurious Emissions Graphs

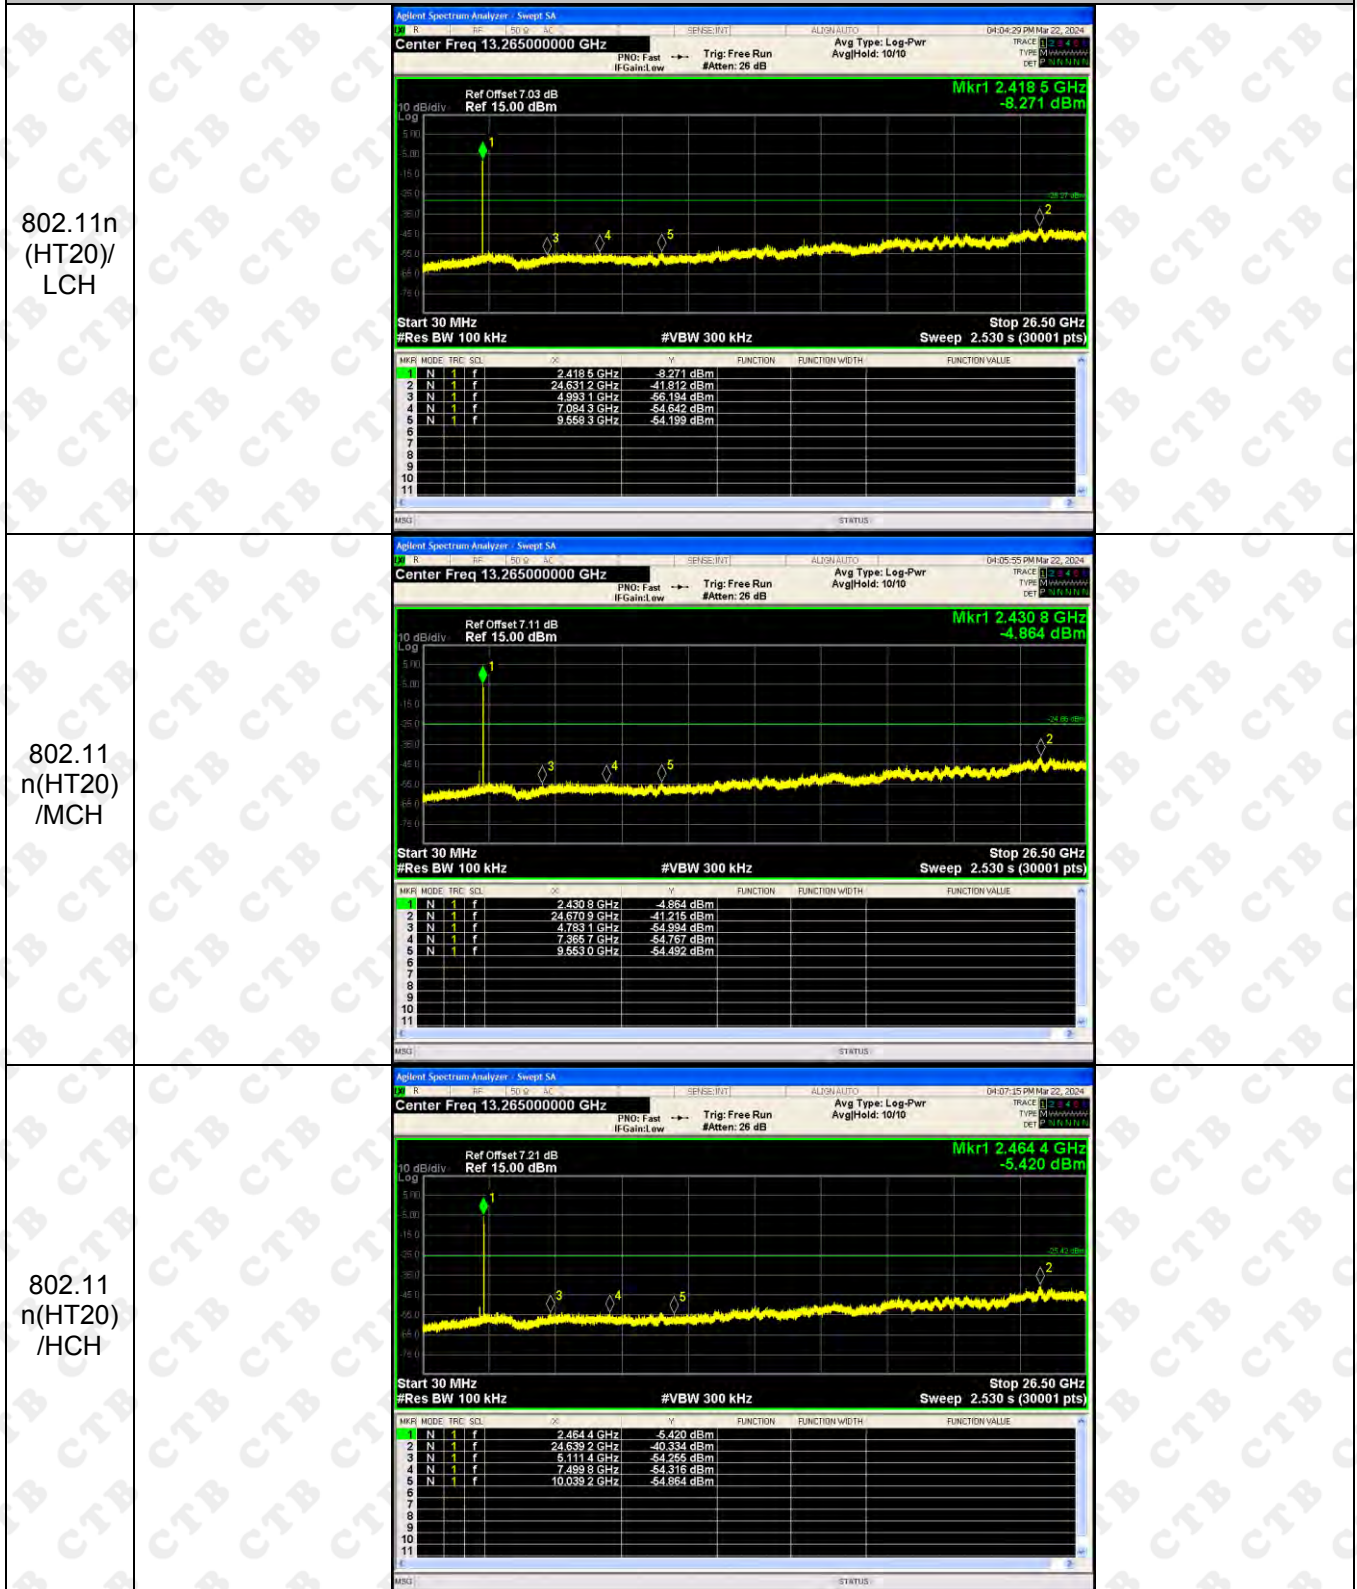

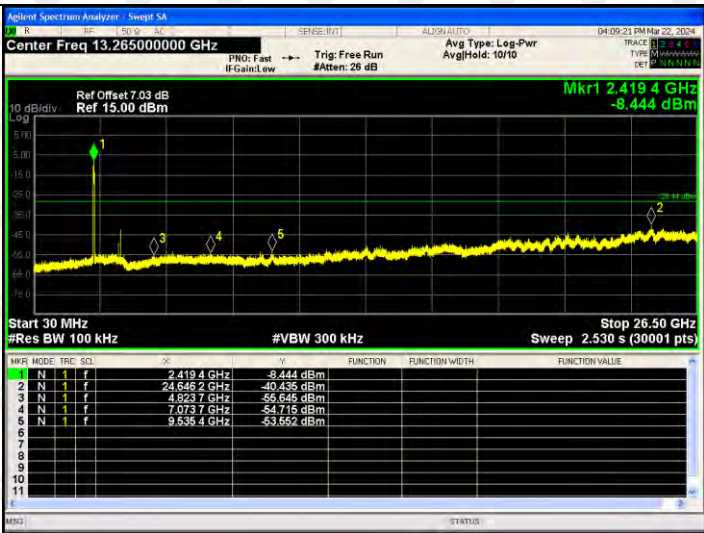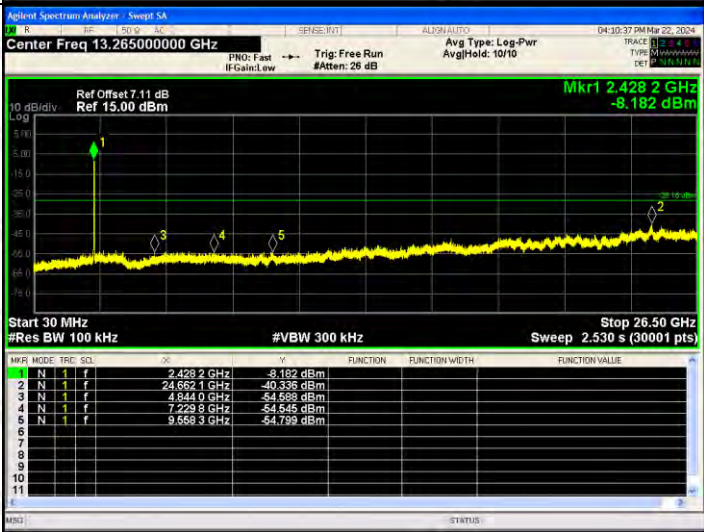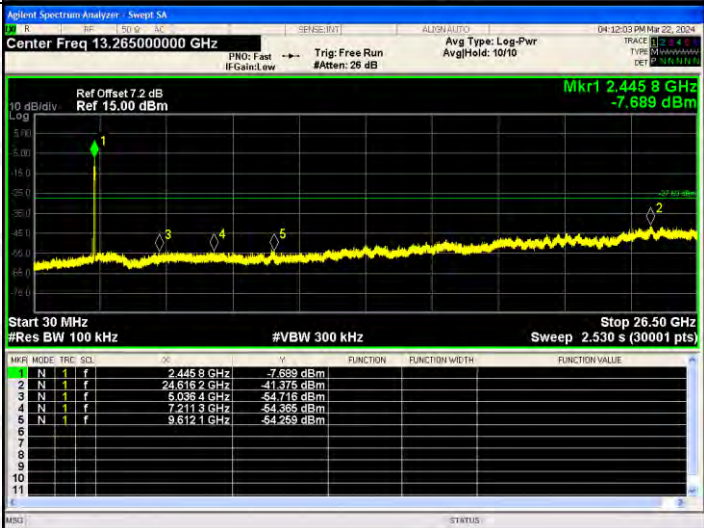
<p>802.11n (HT40)/ LCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.419 4 GHz</td> <td>-8.444 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.648 2 GHz</td> <td>-40.436 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.623 7 GHz</td> <td>-56.646 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.073 7 GHz</td> <td>-54.716 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.636 4 GHz</td> <td>-53.552 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.419 4 GHz	-8.444 dBm				2	N	1	f	24.648 2 GHz	-40.436 dBm				3	N	1	f	4.623 7 GHz	-56.646 dBm				4	N	1	f	7.073 7 GHz	-54.716 dBm				5	N	1	f	9.636 4 GHz	-53.552 dBm				
MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.419 4 GHz	-8.444 dBm																																																			
2	N	1	f	24.648 2 GHz	-40.436 dBm																																																			
3	N	1	f	4.623 7 GHz	-56.646 dBm																																																			
4	N	1	f	7.073 7 GHz	-54.716 dBm																																																			
5	N	1	f	9.636 4 GHz	-53.552 dBm																																																			
<p>802.11 n(HT40) /MCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.428 2 GHz</td> <td>-8.182 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.662 1 GHz</td> <td>-40.336 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>4.844 0 GHz</td> <td>-54.598 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.229 8 GHz</td> <td>-54.546 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.668 3 GHz</td> <td>-54.799 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.428 2 GHz	-8.182 dBm				2	N	1	f	24.662 1 GHz	-40.336 dBm				3	N	1	f	4.844 0 GHz	-54.598 dBm				4	N	1	f	7.229 8 GHz	-54.546 dBm				5	N	1	f	9.668 3 GHz	-54.799 dBm				
MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.428 2 GHz	-8.182 dBm																																																			
2	N	1	f	24.662 1 GHz	-40.336 dBm																																																			
3	N	1	f	4.844 0 GHz	-54.598 dBm																																																			
4	N	1	f	7.229 8 GHz	-54.546 dBm																																																			
5	N	1	f	9.668 3 GHz	-54.799 dBm																																																			
<p>802.11 n(HT40) /HCH</p>	 <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRC</th> <th>SOL</th> <th>F</th> <th>P</th> <th>FUNCTION</th> <th>FUNCTION WIDTH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>N</td> <td>1</td> <td>f</td> <td>2.445 8 GHz</td> <td>-7.689 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>2</td> <td>N</td> <td>1</td> <td>f</td> <td>24.616 2 GHz</td> <td>-41.376 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>3</td> <td>N</td> <td>1</td> <td>f</td> <td>5.038 4 GHz</td> <td>-54.716 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>4</td> <td>N</td> <td>1</td> <td>f</td> <td>7.211 9 GHz</td> <td>-54.366 dBm</td> <td></td> <td></td> <td></td> </tr> <tr> <td>5</td> <td>N</td> <td>1</td> <td>f</td> <td>9.612 1 GHz</td> <td>-54.269 dBm</td> <td></td> <td></td> <td></td> </tr> </tbody> </table>	MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE	1	N	1	f	2.445 8 GHz	-7.689 dBm				2	N	1	f	24.616 2 GHz	-41.376 dBm				3	N	1	f	5.038 4 GHz	-54.716 dBm				4	N	1	f	7.211 9 GHz	-54.366 dBm				5	N	1	f	9.612 1 GHz	-54.269 dBm				
MKR	MODE	TRC	SOL	F	P	FUNCTION	FUNCTION WIDTH	FUNCTION VALUE																																																
1	N	1	f	2.445 8 GHz	-7.689 dBm																																																			
2	N	1	f	24.616 2 GHz	-41.376 dBm																																																			
3	N	1	f	5.038 4 GHz	-54.716 dBm																																																			
4	N	1	f	7.211 9 GHz	-54.366 dBm																																																			
5	N	1	f	9.612 1 GHz	-54.269 dBm																																																			

ANT2:




BAND EDGE Graphs

802.11g/LCH

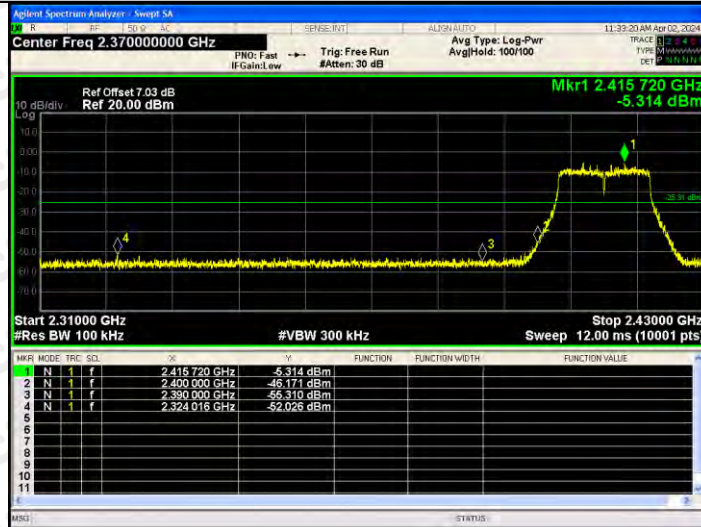


802.11g/HCH

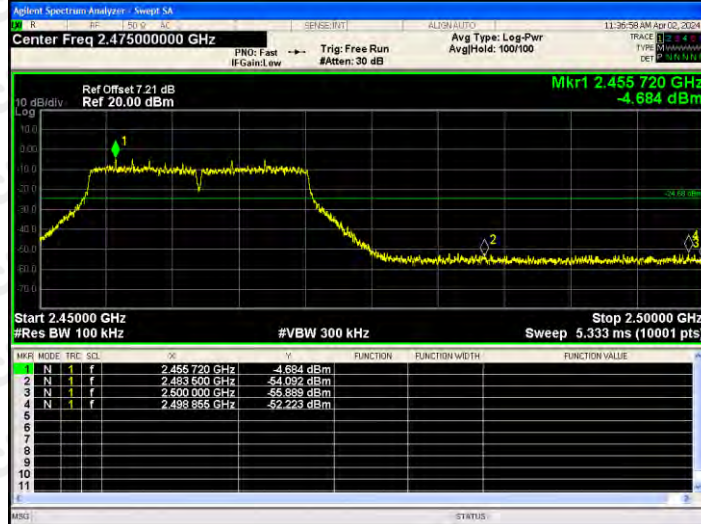


BAND EDGE Graphs

802.11n(HT20)/L
CH

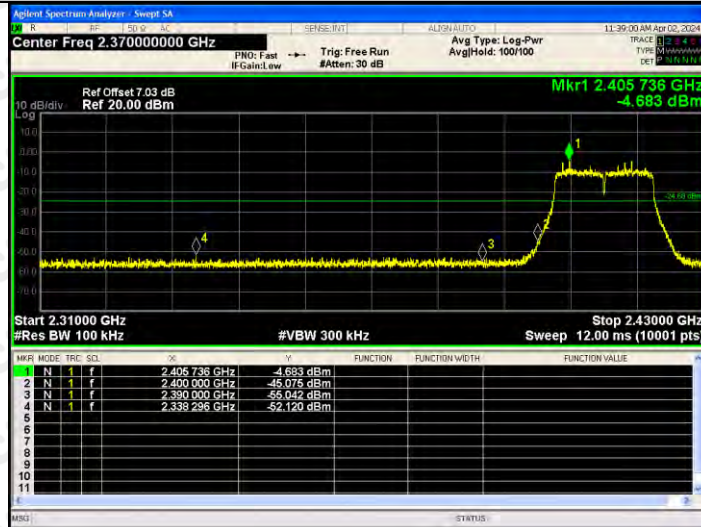

802.11n(HT20)/H
CH

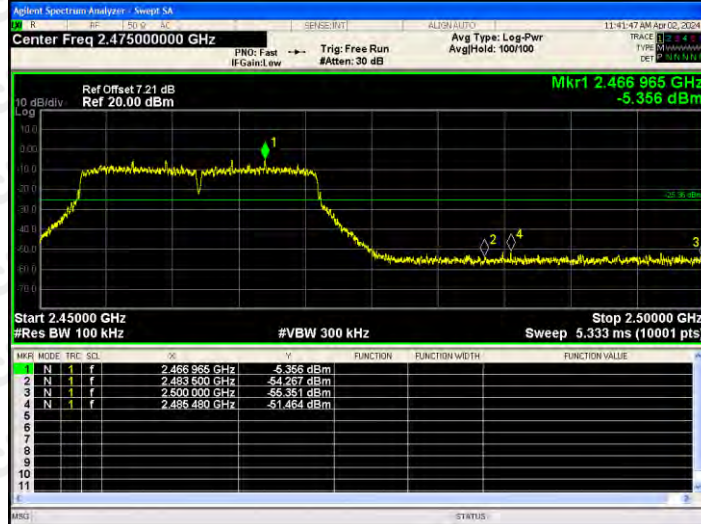


BAND EDGE Graphs

802.11n(HT40)/L
CH




802.11n(HT40)/H
CH

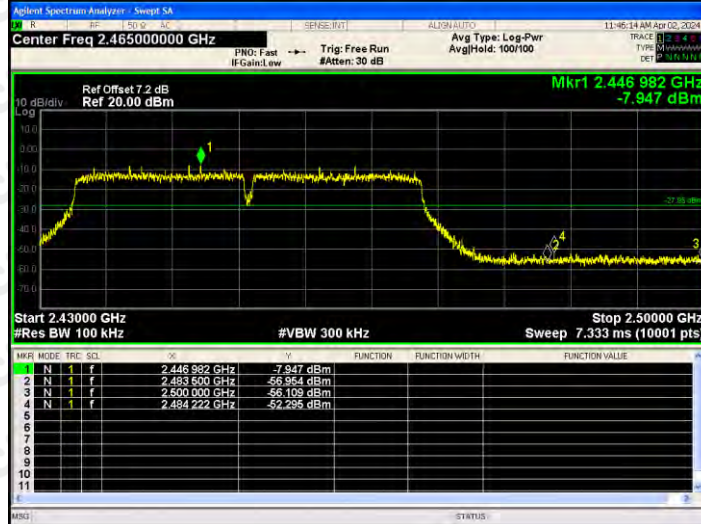


RF Conducted Spurious Emissions Graphs



RF Conducted Spurious Emissions Graphs

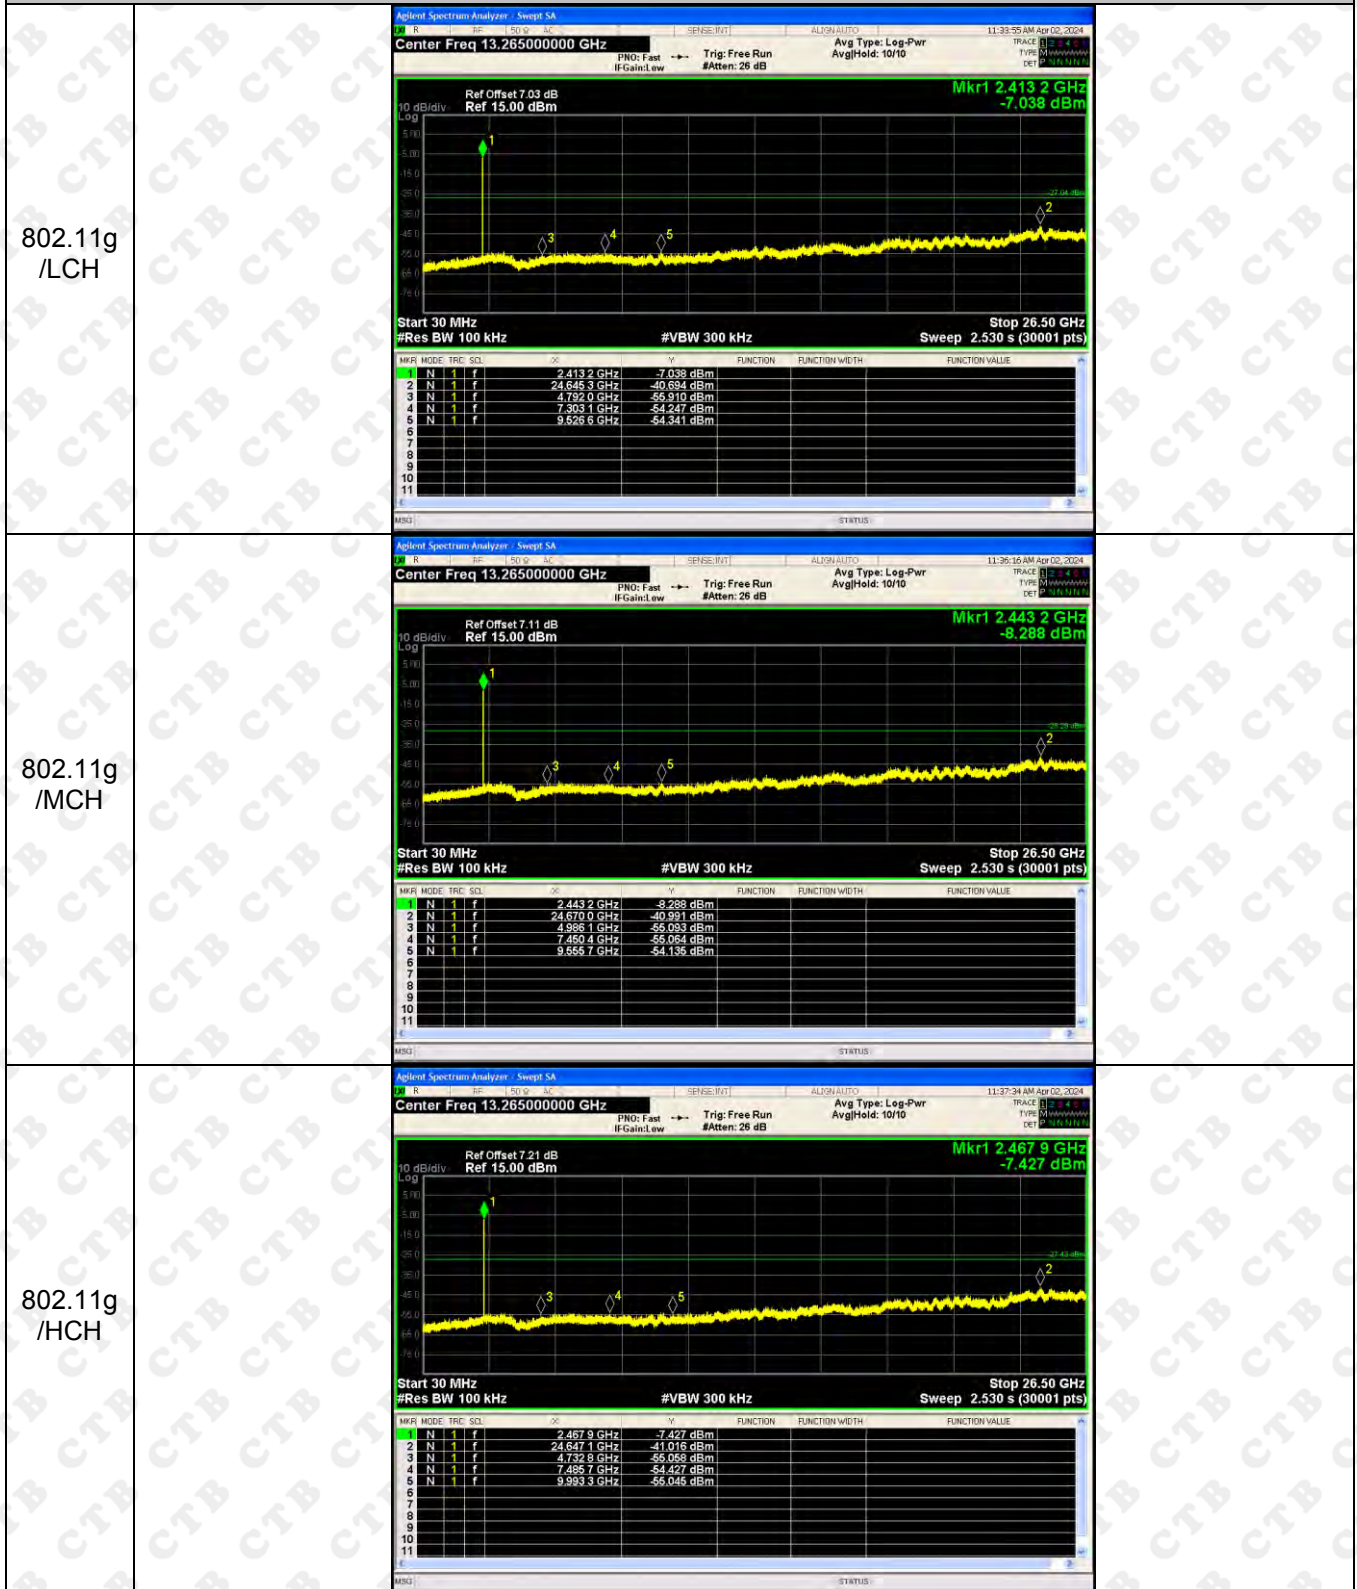


RF Conducted Spurious Emissions Graphs

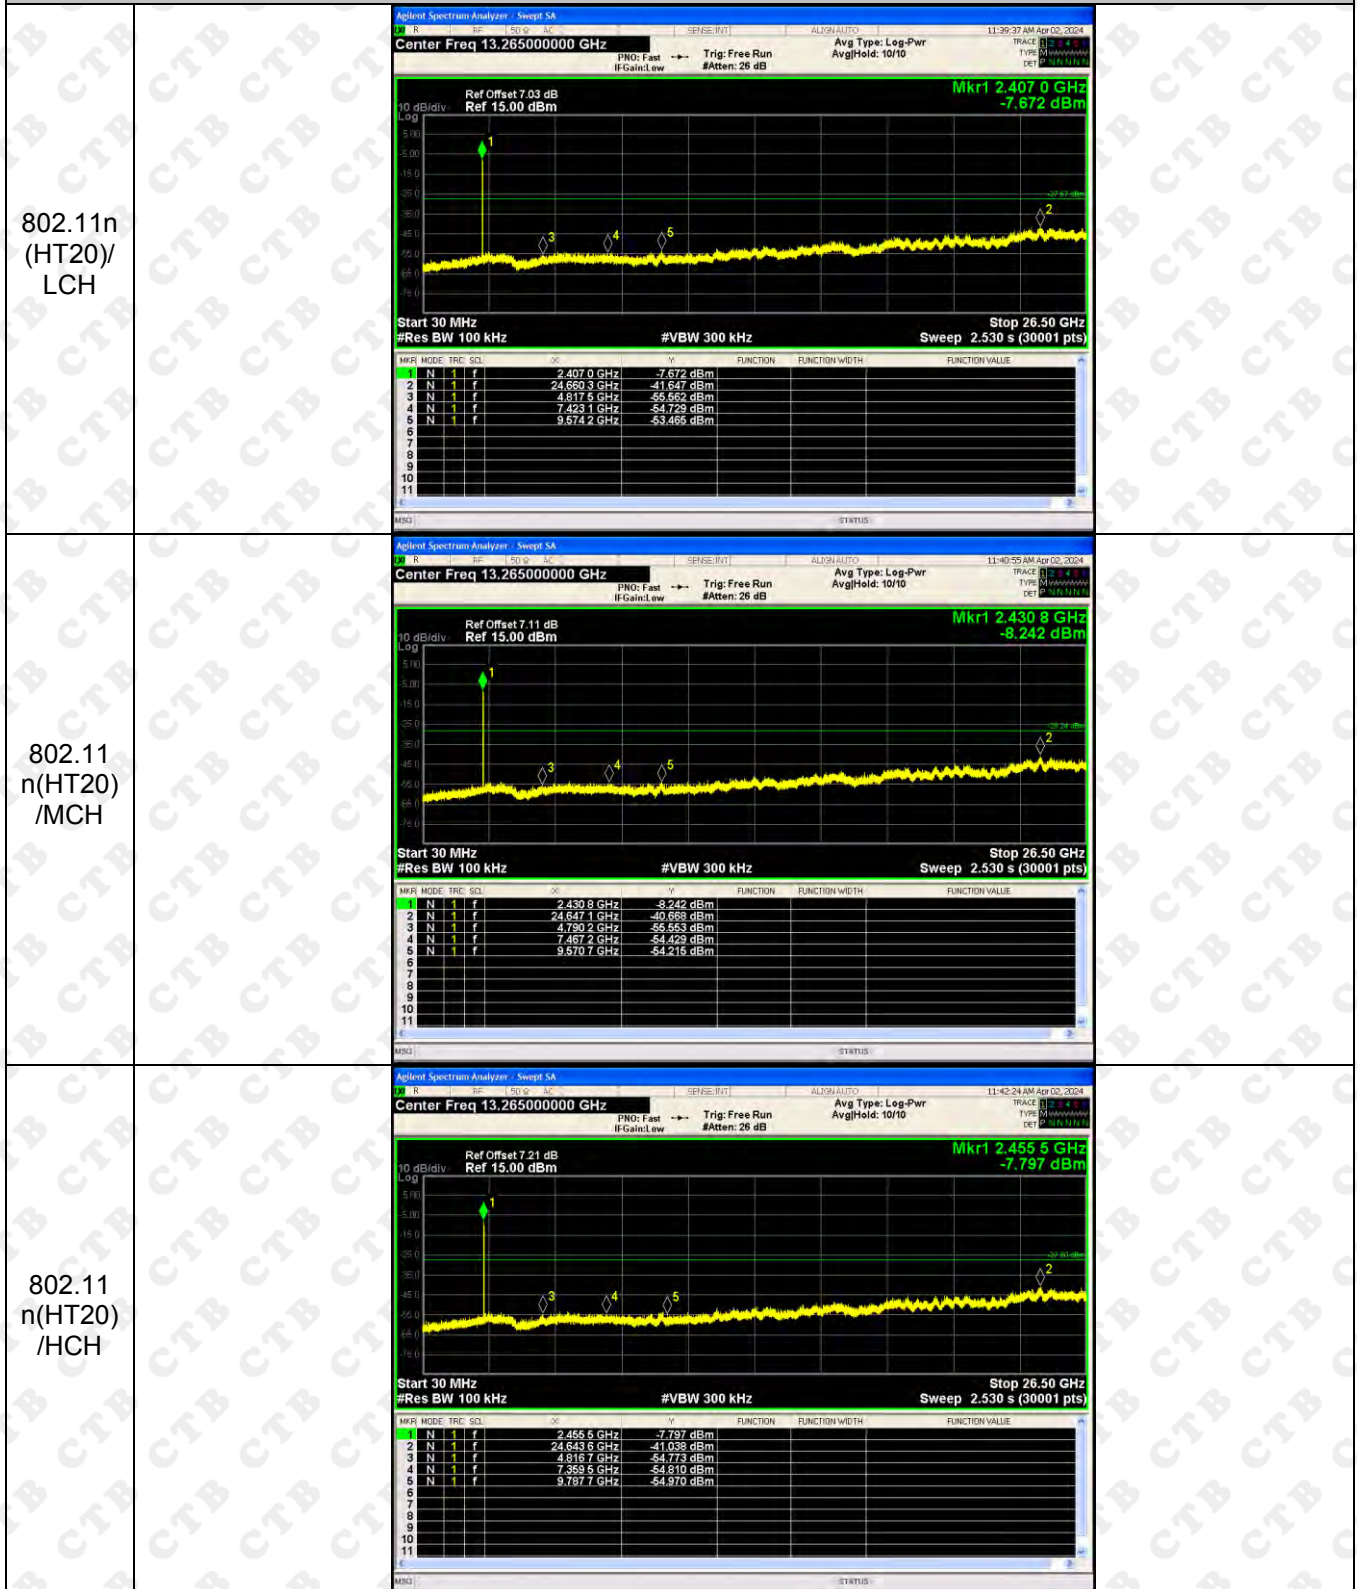


RF Conducted Spurious Emissions Graphs


802.11
n(HT40)
/LCH

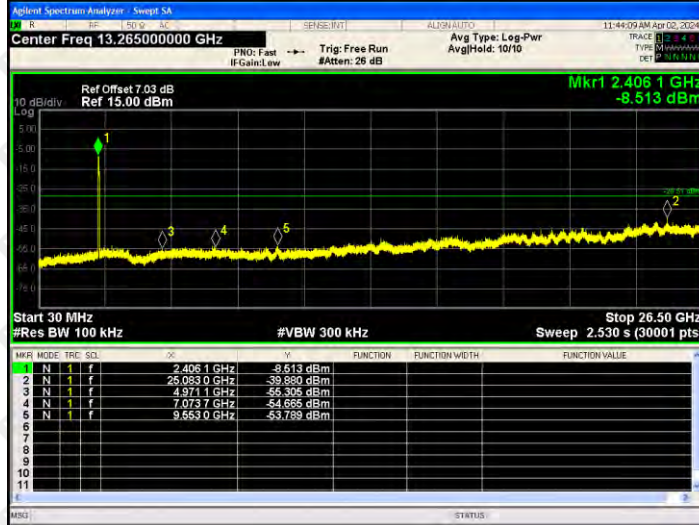

802.11
n(HT40)
/MCH

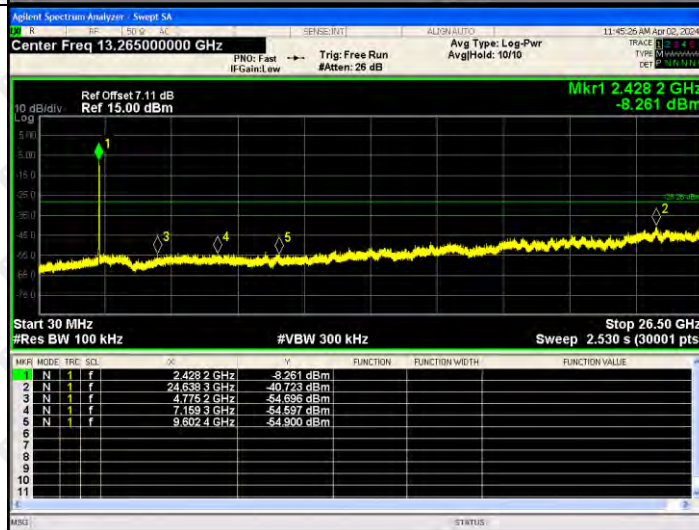

802.11
n(HT40)
/HCH

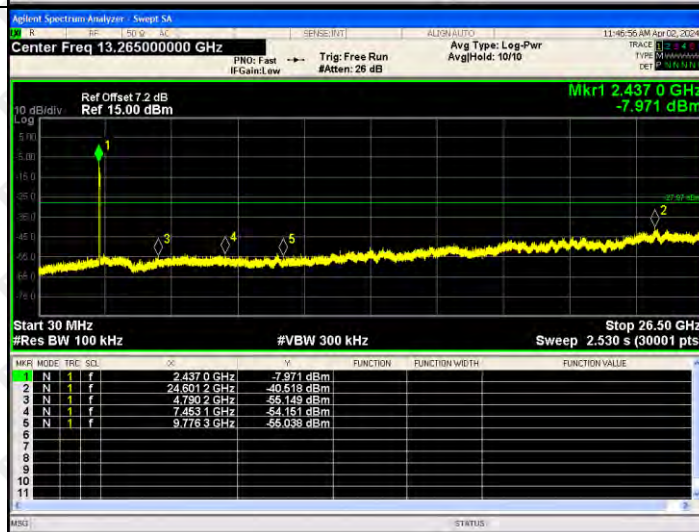

9. COUDUCTED OUTPUT POWER

9.1 Block Diagram Of Test Setup



9.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(b)(3)	Maximum Conducted Output Power	1 watt or 30dBm	2400-2483.5	PASS

9.3 Test procedure


1. The EUT was directly connected to the Power meter

9.4 Test Result

Mode	Channel.	Maximum Peak Power [dBm] ant 1	Maximum Peak Power [dBm] ant 2	Total Power Peak Output Power(dBm)	Limit[dBm]
802.11b	LCH	14.031	14.005	/	30
	MCH	14.055	14.534	/	30
	HCH	13.715	14.23	/	30
802.11g	LCH	13.434	13.462	/	30
	MCH	13.687	13.667	/	30
	HCH	13.334	13.373	/	30
802.11n(HT20)	LCH	13.288	13.214	16.261	30
	MCH	13.397	13.224	16.322	30
	HCH	13.304	12.758	16.050	30
802.11n(HT40)	LCH	13.422	12.703	16.088	30
	MCH	13.543	13.141	16.357	30
	HCH	13.501	12.995	16.266	30

10. 6DB OCCUPIED BANDWIDTH

10.1 Block Diagram Of Test Setup

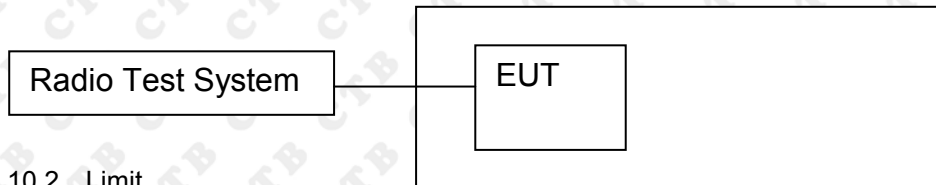

10.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247(a)(2)	Bandwidth	$\geq 500\text{KHz}$ (6dB bandwidth)	2400-2483.5	PASS

10.3 Test procedure

1. Rem1. Set RBW = 100 kHz.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

10.4 Test Result

ANT1:




Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	10.515	500	PASS
	MCH	11.063	500	PASS
	HCH	10.789	500	PASS
802.11g	LCH	16.722	500	PASS
	MCH	17.3	500	PASS
	HCH	17.555	500	PASS
802.11n(HT20)	LCH	17.553	500	PASS
	MCH	17.575	500	PASS
	HCH	17.084	500	PASS
802.11n(HT40)	LCH	35.666	500	PASS
	MCH	35.355	500	PASS
	HCH	35.191	500	PASS

ANT2:

Test Mode	Frequency	6dB Bandwidth (MHz)	Limit(kHz)	Result
802.11b	LCH	11.121	500	PASS
	MCH	10.306	500	PASS
	HCH	10.234	500	PASS
802.11g	LCH	16.116	500	PASS
	MCH	16.362	500	PASS
	HCH	16.386	500	PASS
802.11n(HT20)	LCH	17.577	500	PASS
	MCH	17.041	500	PASS
	HCH	16.849	500	PASS
802.11n(HT40)	LCH	35.786	500	PASS
	MCH	35.82	500	PASS
	HCH	35.48	500	PASS

ANT1:
Test Graph:

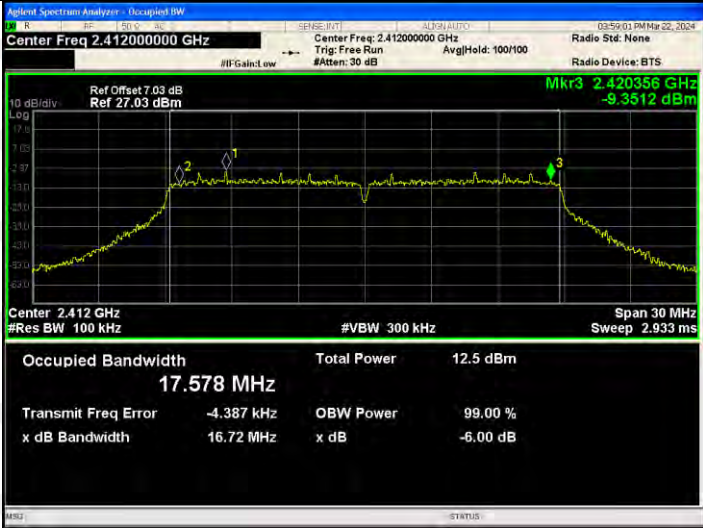Graphs																			
802.11b /LCH	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.41200000 GHz Center Freq: 2.41200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.03 dB Ref 27.03 dBm Mkr3 2.417273 GHz -7.3261 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.5 dBm</td> </tr> <tr> <td>14.822 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>15.454 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.52 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.5 dBm	14.822 MHz			Transmit Freq Error	OBW Power	99.00 %	15.454 kHz			x dB Bandwidth	x dB	-6.00 dB	10.52 MHz		
Occupied Bandwidth	Total Power	15.5 dBm																	
14.822 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
15.454 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.52 MHz																			
802.11b /MCH	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.43700000 GHz Center Freq: 2.43700000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.11 dB Ref 27.11 dBm Mkr3 2.44253 GHz -8.8564 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.5 dBm</td> </tr> <tr> <td>14.818 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-1.922 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>11.06 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.5 dBm	14.818 MHz			Transmit Freq Error	OBW Power	99.00 %	-1.922 kHz			x dB Bandwidth	x dB	-6.00 dB	11.06 MHz		
Occupied Bandwidth	Total Power	15.5 dBm																	
14.818 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-1.922 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
11.06 MHz																			
802.11b/HCH	<p>Agilent Spectrum Analyzer - Occupied BW Center Freq 2.46200000 GHz Center Freq: 2.46200000 GHz Trig: Free Run #Atten: 30 dB Avg/Hold: 100/100 Radio Std: None Radio Device: BTS</p> <p>Ref Offset 7.21 dB Ref 27.21 dBm Mkr3 2.467305 GHz -10.689 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>15.1 dBm</td> </tr> <tr> <td>14.886 MHz</td> <td></td> <td></td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>-89.105 kHz</td> <td></td> <td></td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td>10.79 MHz</td> <td></td> <td></td> </tr> </table>	Occupied Bandwidth	Total Power	15.1 dBm	14.886 MHz			Transmit Freq Error	OBW Power	99.00 %	-89.105 kHz			x dB Bandwidth	x dB	-6.00 dB	10.79 MHz		
Occupied Bandwidth	Total Power	15.1 dBm																	
14.886 MHz																			
Transmit Freq Error	OBW Power	99.00 %																	
-89.105 kHz																			
x dB Bandwidth	x dB	-6.00 dB																	
10.79 MHz																			

<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3 2.420356 GHz -9.3512 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">17.578 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>16.72 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	17.578 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			16.72 MHz
Occupied Bandwidth	Total Power	12.5 dBm														
17.578 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		16.72 MHz														
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB Ref: 27.11 dBm</p> <p>Mkr3 2.445642 GHz -11.254 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">17.609 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.30 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	17.609 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.30 MHz
Occupied Bandwidth	Total Power	12.6 dBm														
17.609 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.30 MHz														
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB Ref: 27.21 dBm</p> <p>Mkr3 2.470761 GHz -11.467 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3">17.597 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.56 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.597 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.56 MHz
Occupied Bandwidth	Total Power	12.3 dBm														
17.597 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.56 MHz														

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3 2.420776 GHz -11.813 dBm</p> <p>Center 2.412 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">17.608 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.55 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	17.608 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.55 MHz
Occupied Bandwidth	Total Power	12.2 dBm														
17.608 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.55 MHz														
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB Ref: 27.11 dBm</p> <p>Mkr3 2.44579 GHz -12.300 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.5 dBm</td> </tr> <tr> <td colspan="3">17.613 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.58 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.5 dBm	17.613 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.58 MHz
Occupied Bandwidth	Total Power	12.5 dBm														
17.613 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.58 MHz														
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB Ref: 27.21 dBm</p> <p>Mkr3 2.47052 GHz -11.399 dBm</p> <p>Center 2.462 GHz #Res BW 100 kHz #VBW 300 kHz Span 30 MHz Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3">17.619 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.08 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.619 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.08 MHz
Occupied Bandwidth	Total Power	12.3 dBm														
17.619 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.08 MHz														




<p>802.11n(HT40)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3 2.439851 GHz -13.925 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.048 MHz Total Power 12.9 dBm</p> <p>Transmit Freq Error 18.150 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 35.67 MHz x dB -6.00 dB</p>
<p>802.11n(HT40)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB Ref: 27.11 dBm</p> <p>Mkr3 2.454699 GHz -13.638 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 35.991 MHz Total Power 13.1 dBm</p> <p>Transmit Freq Error 21.128 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 35.36 MHz x dB -6.00 dB</p>
<p>802.11n(HT40)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.2 dB Ref: 27.20 dBm</p> <p>Mkr3 2.469585 GHz -13.495 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <p>Occupied Bandwidth 36.018 MHz Total Power 13.2 dBm</p> <p>Transmit Freq Error -10.836 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 35.19 MHz x dB -6.00 dB</p>

ANT2:
Test Graph:




<p>802.11g/LCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420048 GHz</p> <p>-11.437 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.435 MHz</p> <p>Total Power 12.3 dBm</p> <p>Transmit Freq Error -9.508 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.12 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/MCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445178 GHz</p> <p>-11.433 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.450 MHz</p> <p>Total Power 12.4 dBm</p> <p>Transmit Freq Error -2.903 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.36 MHz</p> <p>x dB -6.00 dB</p>
<p>802.11g/HCH</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470177 GHz</p> <p>-12.217 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <p>Occupied Bandwidth 16.427 MHz</p> <p>Total Power 12.2 dBm</p> <p>Transmit Freq Error -15.984 kHz</p> <p>OBW Power 99.00 %</p> <p>x dB Bandwidth 16.39 MHz</p> <p>x dB -6.00 dB</p>

<p>802.11n(HT20)/LC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.41200000 GHz</p> <p>Center Freq: 2.41200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB</p> <p>Ref: 27.03 dBm</p> <p>Mkr3 2.420785 GHz</p> <p>-11.639 dBm</p> <p>Center 2.412 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">17.607 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.58 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	17.607 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.58 MHz
Occupied Bandwidth	Total Power	12.2 dBm														
17.607 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.58 MHz														
<p>802.11n(HT20)/MC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB</p> <p>Ref: 27.11 dBm</p> <p>Mkr3 2.445521 GHz</p> <p>-11.032 dBm</p> <p>Center 2.437 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">17.601 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>17.04 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	17.601 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			17.04 MHz
Occupied Bandwidth	Total Power	12.4 dBm														
17.601 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		17.04 MHz														
<p>802.11n(HT20)/HC H</p>	<p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.46200000 GHz</p> <p>Center Freq: 2.46200000 GHz</p> <p>Trig: Free Run</p> <p>#Atten: 30 dB</p> <p>Avg/Hold: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.21 dB</p> <p>Ref: 27.21 dBm</p> <p>Mkr3 2.470407 GHz</p> <p>-11.069 dBm</p> <p>Center 2.462 GHz</p> <p>#Res BW 100 kHz</p> <p>#VBW 300 kHz</p> <p>Span 30 MHz</p> <p>Sweep 2.933 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.3 dBm</td> </tr> <tr> <td colspan="3">17.595 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> <tr> <td></td> <td></td> <td>16.85 MHz</td> </tr> </table>	Occupied Bandwidth	Total Power	12.3 dBm	17.595 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB			16.85 MHz
Occupied Bandwidth	Total Power	12.3 dBm														
17.595 MHz																
Transmit Freq Error	OBW Power	99.00 %														
x dB Bandwidth	x dB	-6.00 dB														
		16.85 MHz														
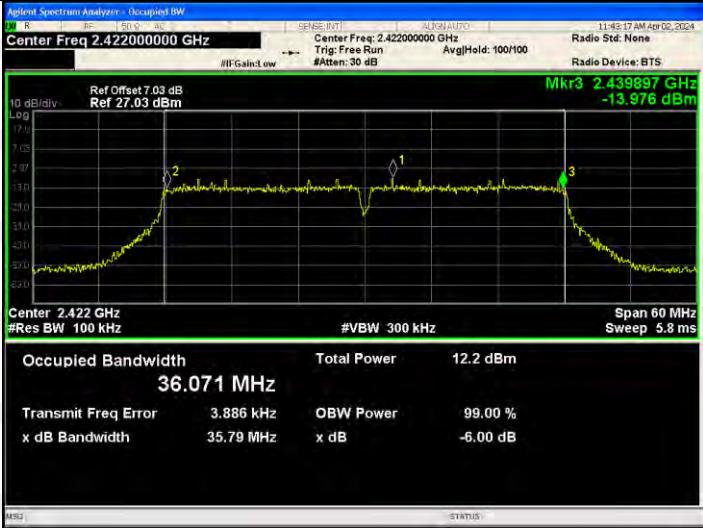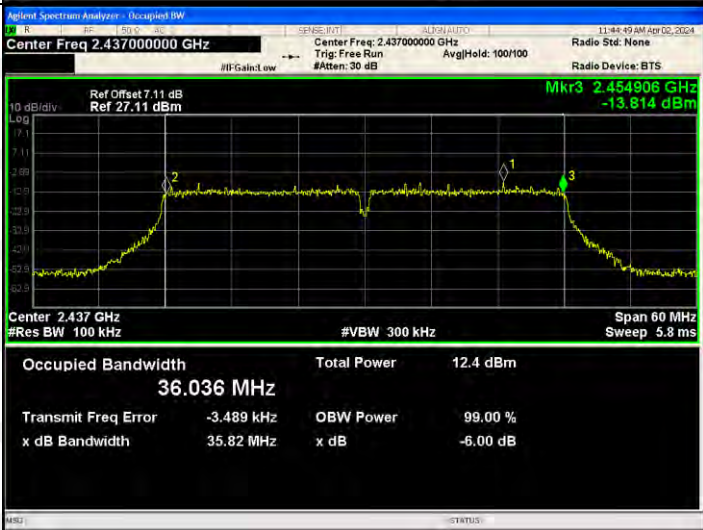
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.42200000 GHz</p> <p>Center Freq: 2.42200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.03 dB Ref: 27.03 dBm</p> <p>Mkr3 2.439897 GHz -13.976 dBm</p> <p>Center 2.422 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.2 dBm</td> </tr> <tr> <td colspan="3">36.071 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.2 dBm	36.071 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.2 dBm											
36.071 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.43700000 GHz</p> <p>Center Freq: 2.43700000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.11 dB Ref: 27.11 dBm</p> <p>Mkr3 2.454906 GHz -13.814 dBm</p> <p>Center 2.437 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.4 dBm</td> </tr> <tr> <td colspan="3">36.036 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.4 dBm	36.036 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.4 dBm											
36.036 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Occupied BW</p> <p>Center Freq 2.45200000 GHz</p> <p>Center Freq: 2.45200000 GHz</p> <p>Trig: Free Run #Atten: 30 dB AvgHld: 100/100</p> <p>Radio Std: None</p> <p>Radio Device: BTS</p> <p>Ref Offset: 7.2 dB Ref: 27.20 dBm</p> <p>Mkr3 2.468721 GHz -14.113 dBm</p> <p>Center 2.452 GHz #Res BW 100 kHz #VBW 300 kHz Span 60 MHz Sweep 5.8 ms</p> <table border="1"> <tr> <td>Occupied Bandwidth</td> <td>Total Power</td> <td>12.6 dBm</td> </tr> <tr> <td colspan="3">36.037 MHz</td> </tr> <tr> <td>Transmit Freq Error</td> <td>OBW Power</td> <td>99.00 %</td> </tr> <tr> <td>x dB Bandwidth</td> <td>x dB</td> <td>-6.00 dB</td> </tr> </table>	Occupied Bandwidth	Total Power	12.6 dBm	36.037 MHz			Transmit Freq Error	OBW Power	99.00 %	x dB Bandwidth	x dB	-6.00 dB
Occupied Bandwidth	Total Power	12.6 dBm											
36.037 MHz													
Transmit Freq Error	OBW Power	99.00 %											
x dB Bandwidth	x dB	-6.00 dB											

11. POWER SPECTRAL DENSITY

11.1 Block Diagram Of Test Setup

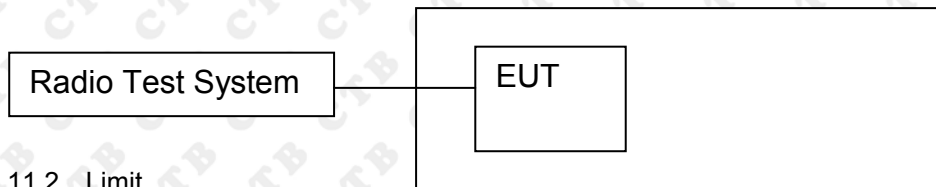

11.2 Limit

FCC Part15 (15.247) , Subpart C				
Section	Test Item	Limit	Frequency Range (MHz)	Result
15.247	Power Spectral Density	8 dBm (in any 3KHz)	2400-2483.5	PASS

11.3 Test procedure




1. Set analyzer center frequency to DTS channel center frequency.
2. Set the span to 1.5 times the DTS bandwidth.
3. Set the RBW to: $3\text{ kHz} \leq \text{RBW} \leq 100\text{ kHz}$.
4. Set the VBW $\geq 3 \times \text{RBW}$.
5. Detector = Peak.
6. Sweep time = auto couple.
7. Trace mode = max hold.
8. Allow trace to fully stabilize.
9. Use the peak marker function to determine the maximum amplitude level within the RBW.
10. If measured value exceeds limit, reduce RBW (no less than 3 kHz) and repeat.



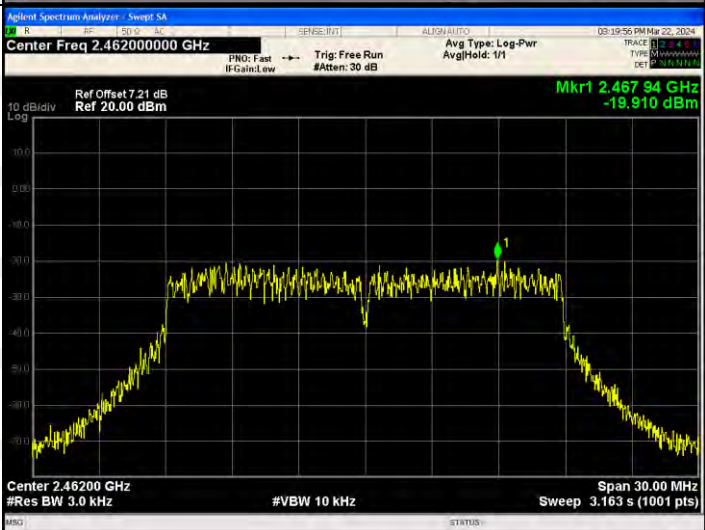
11.4 Test Result



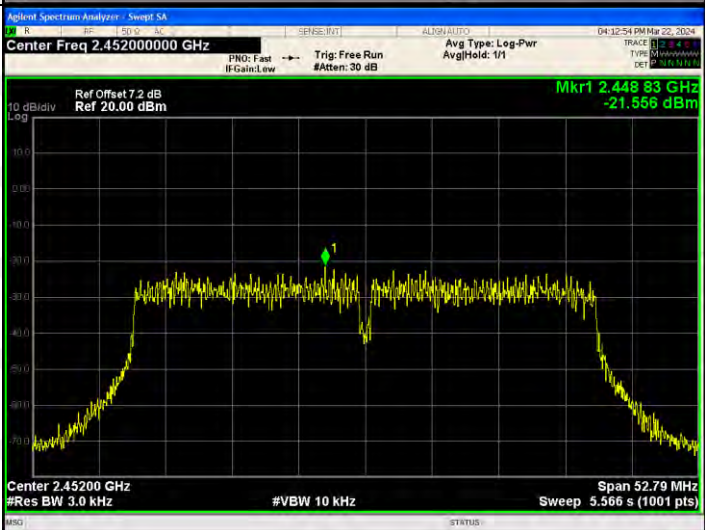
Mode	Channel.	Power Spectral Density [dBm /3KHz] ANT 1	Power Spectral Density [dBm /3KHz] ANT 2	Power Spectral Density [dBm /3KHz]Total	Limit(dBm)
802.11b	LCH	-15.852	-15.34	/	8
	MCH	-14.937	-16.764	/	8
	HCH	-14.717	-16.343	/	8
802.11g	LCH	-18.906	-18.374	/	8
	MCH	-22.892	-18.268	/	8
	HCH	-19.322	-19.55	/	8
802.11n(H T20)	LCH	-18.641	-18.927	-15.771	8
	MCH	-22.466	-19.595	-17.787	8
	HCH	-19.91	-19.346	-16.609	8
802.11n(H T40)	LCH	-21.918	-22.214	-19.053	8
	MCH	-22.335	-21.723	-19.008	8
	HCH	-21.556	-21.887	-18.708	8

**ANT1:
Test Graph**




Graphs	
802.11b /LCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.41035 GHz -15.852 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.43685 GHz -14.937 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	<p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.46077 GHz -14.717 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

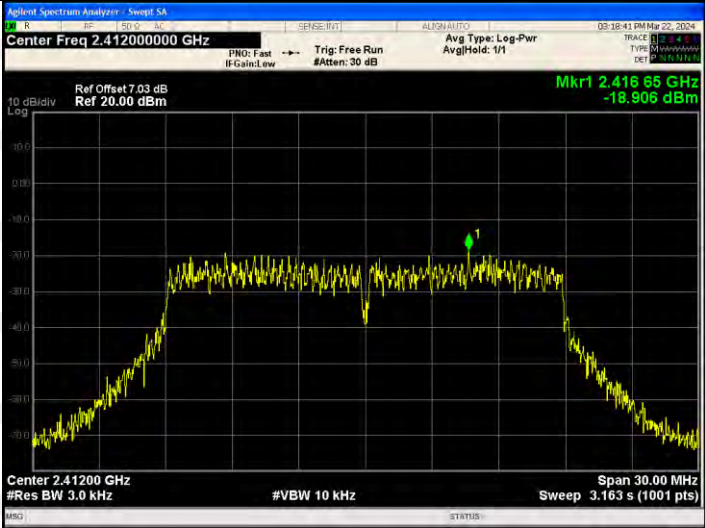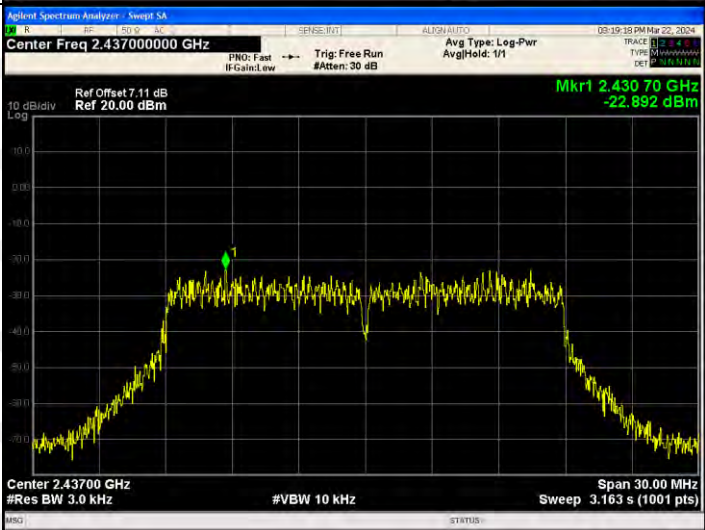

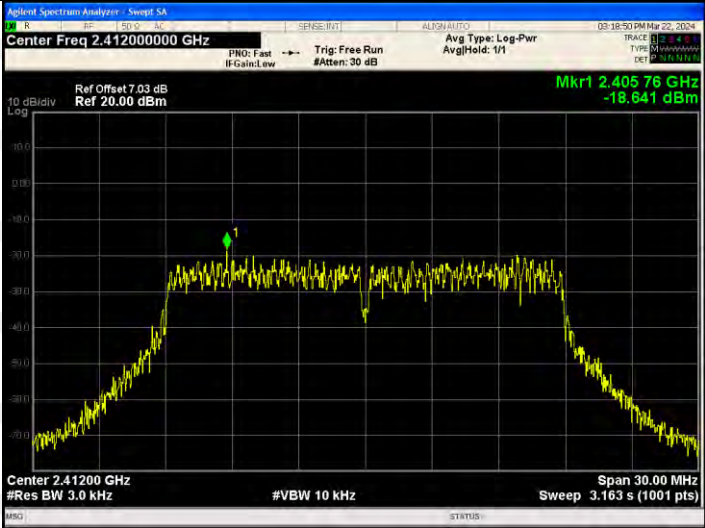
<p>802.11g/LCH</p>	
<p>802.11g/MCH</p>	
<p>802.11g/HCH</p>	

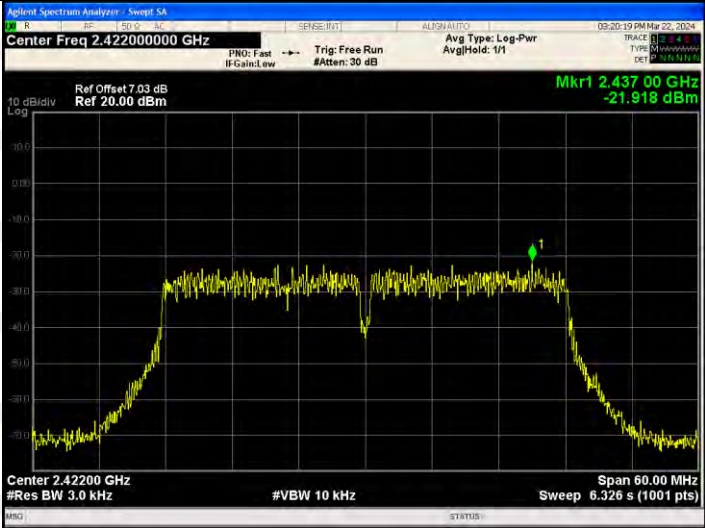


<p>802.11n(HT20)/LC H</p>	
<p>802.11n(HT20)/MC H</p>	
<p>802.11n(HT20)/HC H</p>	

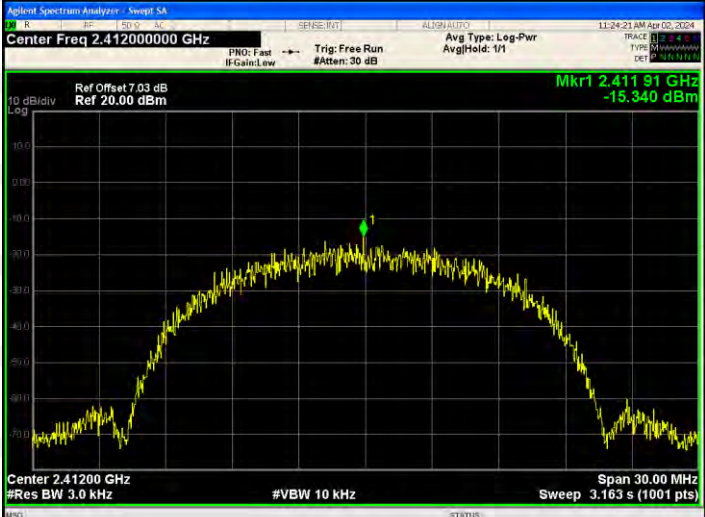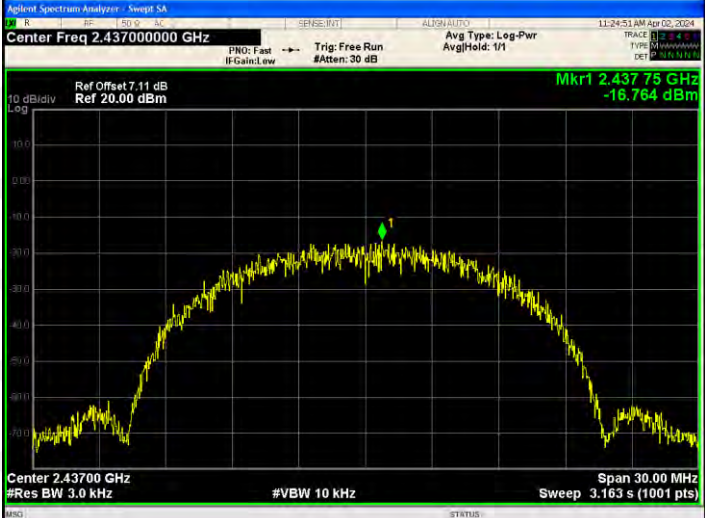

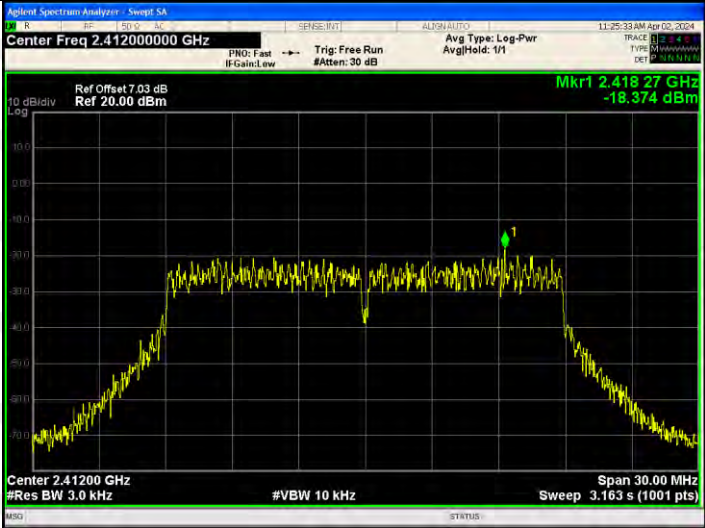
<p>802.11n(HT40)/LC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.42200000 GHz</p> <p>Ref Offset 7.03 dB Ref 20.00 dBm</p> <p>Mkr1 2.437 00 GHz -21.918 dBm</p> <p>Center 2.42200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/MC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.43700000 GHz</p> <p>Ref Offset 7.11 dB Ref 20.00 dBm</p> <p>Mkr1 2.438 26 GHz -22.335 dBm</p> <p>Center 2.43700 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 60.00 MHz Sweep 6.326 s (1001 pts)</p>
<p>802.11n(HT40)/HC H</p>	 <p>Agilent Spectrum Analyzer - Swept SA</p> <p>Center Freq 2.45200000 GHz</p> <p>Ref Offset 7.2 dB Ref 20.00 dBm</p> <p>Mkr1 2.448 83 GHz -21.566 dBm</p> <p>Center 2.45200 GHz #Res BW 3.0 kHz</p> <p>#VBW 10 kHz</p> <p>Span 52.79 MHz Sweep 5.566 s (1001 pts)</p>

**ANT 2:
Test Graph**

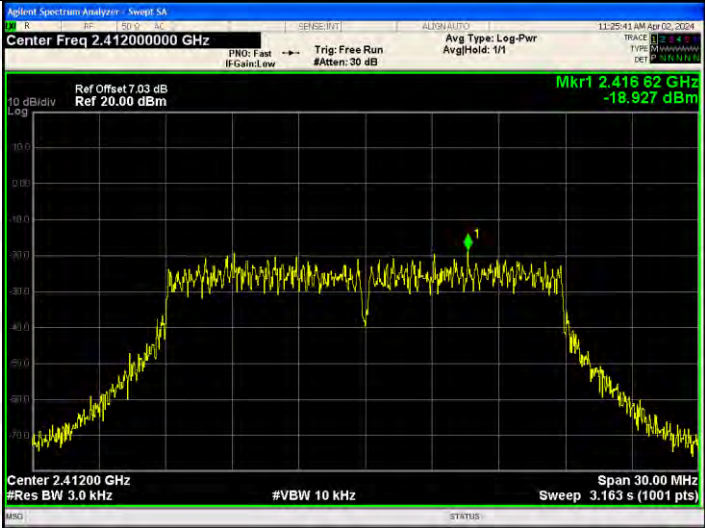Graphs	
802.11b /LCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.411 91 GHz -15.340 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b /MCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.437000000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.437 75 GHz -16.764 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
802.11b/HCH	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.462000000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.461 22 GHz -16.343 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>

<p>802.11g/LCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.41200000 GHz Ref Offset 7.03 dB Ref 20.00 dBm Mkr1 2.418 27 GHz -18.374 dBm Center 2.41200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/MCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.43700000 GHz Ref Offset 7.11 dB Ref 20.00 dBm Mkr1 2.443 27 GHz -18.268 dBm Center 2.43700 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
<p>802.11g/HCH</p>	 <p>Agilent Spectrum Analyzer - Swept SA Center Freq 2.46200000 GHz Ref Offset 7.21 dB Ref 20.00 dBm Mkr1 2.455 76 GHz -19.550 dBm Center 2.46200 GHz #Res BW 3.0 kHz #VBW 10 kHz Span 30.00 MHz Sweep 3.163 s (1001 pts)</p>
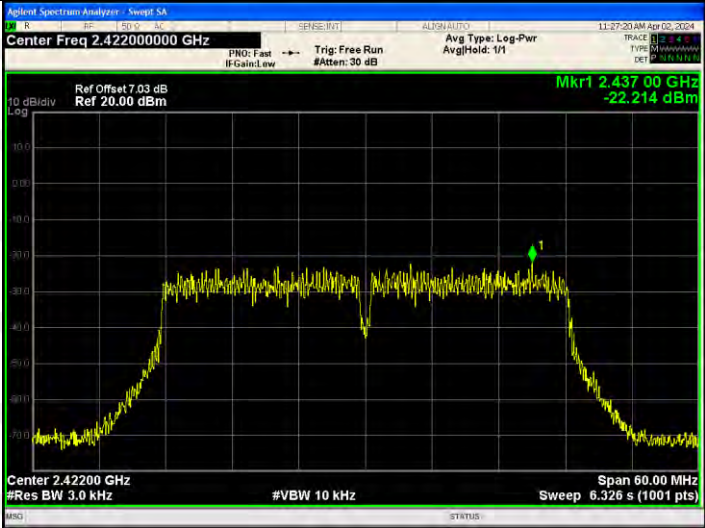
<p>802.11n(HT20)/LC H</p>	
<p>802.11n(HT20)/MC H</p>	
<p>802.11n(HT20)/HC H</p>	

<p>802.11n(HT40)/LC H</p>	
<p>802.11n(HT40)/MC H</p>	
<p>802.11n(HT40)/HC H</p>	

12. ANTENNA REQUIREMENT

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

EUT Antenna:

The antenna is Internal antenna and no consideration of replacement. The best case gain of the antenna is 0.92dBi.

13. EUT TEST SETUP PHOTOGRAPHS

Radiated Emission

Below 1G



Above 1G



Conducted Emission



***** END OF REPORT *****