





**FCC PART 22/24/27 TEST REPORT**

**FCC Part 22 /Part 24/ Part 27**

Report Reference No.:	HK1809111026E
FCC ID:	2AHZ5KINGKONG3
Compiled by ( position+printed name+signature) :	File administrators Gary Qian 
Supervised by ( position+printed name+signature) :	Technique principal Eden Hu 
Approved by ( position+printed name+signature) :	Manager Jason Zhou 
Date of issue :	Oct. 15, 2018
Testing Laboratory Name :	Shenzhen HUAK Testing Technology Co., Ltd.
Address :	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Heping Community, Fuhai Street, Bao'an District, Shenzhen, China
Applicant's name :	Shenzhen Huafurui Technology Co., Ltd.
Address :	Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China
Standard :	FCC Part 22: PUBLIC MOBILE SERVICES FCC Part 24: PERSONAL COMMUNICATIONS SERVICES FCC Part 27: MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES
Shenzhen HUAK Testing Technology Co., Ltd. All rights reserved. This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen HUAK Testing Technology Co., Ltd. is acknowledged as copyright owner and source of the material. Shenzhen HUAK Testing Technology Co., Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.	
Test item description :	Smart Phone
Brand Name :	CUBOT
Model	KINGKONG 3
Ratings :	DC 3.85V From Battery; DC9V/2A
Modulation :	GSM / GPRS :GMSK EGPRS: 8PSK HSDPA:QPSK/16QAM; HSUPA:BPSK; WCDMA:QPSK
GPRS/EGPRS	Supported
Hardware version :	A756_MAIN_PCB_V1.2
Software version :	CUBOT_KING_KONG_3_8091C_V04+20180816
Frequency	GSM 850MHz; PCS 1900MHz; UMTS Band II;UMTS Band V; UMTS Band IV
Result :	PASS

**TEST REPORT**

<b>Test Report No. :</b>	<b>HK1809111026E</b>	Oct. 15, 2018 Date of issue
--------------------------	----------------------	--------------------------------

Equipment under Test : Smart Phone

Model /Type : KINGKONG 3

**Applicant** : Shenzhen Huafurui Technology Co., Ltd.

Address : Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China

**Manufacturer** : Shenzhen Huafurui Technology Co., Ltd.

Address : Unit 1401 &1402, 14/F, Jin qi zhi gu mansion (No. 4 building of Chong wen Garden), Crossing of the Liu xian street and Tang ling road, Tao yuan street, Nan shan district, Shenzhen,P.R. China

<b>Test Result:</b>	<b>PASS</b>
---------------------	-------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.



Revision	Issue Date	Revisions	Revised By
V1.0	Sep. 26, 2018	Initial Issue	Jason Zhou
V1.1	Oct. 15, 2018	Revise Report	Jason Zhou



## TABLE OF CONTENTS

<b>1. TEST STANDARDS</b> .....	<b>6</b>
2.1 PRODUCT DESCRIPTION.....	7
2.2 RELATED SUBMITTAL(S) / GRANT (S).....	9
2.3 TEST METHODOLOGY .....	9
2.4 TEST FACILITY .....	10
2.6 SPECIAL ACCESSORIES .....	11
2.7 EQUIPMENT MODIFICATIONS .....	11
<b>3. SYSTEM TEST CONFIGURATION</b> .....	<b>12</b>
3.1 EUT CONFIGURATION.....	12
3.2 EUT EXERCISE.....	12
3.3 CONFIGURATION OF EUT SYSTEM .....	12
<b>4. SUMMARY OF TEST RESULTS</b> .....	<b>13</b>
<b>5. DESCRIPTION OF TEST MODES</b> .....	<b>14</b>
<b>6. OUTPUT POWER</b> .....	<b>15</b>
6.1 CONDUCTED OUTPUT POWER.....	15
6.2 RADIATED OUTPUT POWER.....	22
6.2.1 MEASUREMENT METHOD .....	22
6.2.2 PROVISIONS APPLICABLE.....	23
6.3. PEAK-TO-AVERAGE RATIO .....	26
6.3.1 MEASUREMENT METHOD .....	26
6.3.2 PROVISIONS APPLICABLE.....	26
6.3.3 MEASUREMENT RESULT .....	27
<b>7. OCCUPIED BANDWIDTH</b> .....	<b>29</b>
7.1 MEASUREMENT METHOD .....	29
7.2 PROVISIONS APPLICABLE.....	29
7.3 MEASUREMENT RESULT .....	30
<b>8. BAND EDGE</b> .....	<b>37</b>
8.1 MEASUREMENT METHOD .....	37
8.2 PROVISIONS APPLICABLE.....	37
8.3 MEASUREMENT RESULT .....	38
<b>9. SPURIOUS EMISSION</b> .....	<b>41</b>
9.1 CONDUCTED SPURIOUS EMISSION .....	41
9.2 RADIATED SPURIOUS EMISSION.....	59
9.2.2 TEST SETUP.....	60
<b>10. FREQUENCY STABILITY</b> .....	<b>65</b>
10.1 MEASUREMENT METHOD .....	65
10.2 PROVISIONS APPLICABLE.....	66



10.3 MEASUREMENT RESULT .....	67
<b>APPENDIX A: PHOTOGRAPHS OF TEST SETUP .....</b>	<b>76</b>



## 1. TEST STANDARDS

The tests were performed according to following standards:

[FCC Part 22 \(10-12-18 Edition\)](#): PUBLIC MOBILE SERVICES

[FCC Part 24\(10-12-18 Edition\)](#): PRIVATE LAND MOBILE RADIO SERVICES

[FCC Part 27\(10-12-18 Edition\)](#): MISCELLANEOUS WIRELESS COMMUNICATIONS SERVICES

[TIA/EIA 603 D June 2010](#): Land Mobile FM or PM Communications Equipment Measurement and Performance Standards.



## 2. SUMMARY

### 2.1 PRODUCT DESCRIPTION

A major technical description of EUT is described as following:

Product Designation:	Smart Phone
Frequency Bands:	<input checked="" type="checkbox"/> GSM 850 <input checked="" type="checkbox"/> PCS1900 (U.S. Bands) <input checked="" type="checkbox"/> GSM 900 <input checked="" type="checkbox"/> DCS 1800 (Non-U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band II <input checked="" type="checkbox"/> UMTS FDD Band IV <input checked="" type="checkbox"/> UMTS FDD Band V (U.S. Bands) <input checked="" type="checkbox"/> UMTS FDD Band I <input checked="" type="checkbox"/> UMTS FDD Band VIII (Non-U.S. Bands)
Antenna Type	PIFA Antenna
Type of Modulation	GSM / GPRS :GMSK EGPRS: GMSK/8PSK WCDMA : QPSK
Antenna gain	GSM850:1.36dBi; PCS1900: 1.20dBi; WCDMA850: 1.22dBi; WCDMA 1700:1.10dBi; WCDMA1900:1.12dBi;
Power Supply:	DC 3.85V by battery
Battery parameter:	DC3.85V/6000mAh
Dual Card:	GSM /WCDMA/LTE Card Slot
GPRS Class	12
Extreme Vol. Limits:	DC3.4 V to 4.4 V (Normal: DC3.85 V)
Extreme Temp. Tolerance	-10°C to +50°C
*** Note: 1. The High Voltage DC4.4V and Low Voltage DC3.4V were declared by manufacturer 2. The EUT couldn't be operating normally with higher or lower voltage.	

\*\*\* **Note:**1.The maximum power levels are GSM for MCS-4: GMSK link, and RMC 12.2kbps mode for WCDMA band II, WCDMA band V, WCDMA band IV, only these modes were used for all tests.  
2. We found out the test mode with the highest power level after we analyze all the data rates. So we chose worst cases as a representative.

**GSM/WCDMA Card1 Slot :**

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.87	32.46	31.27
PCS 1900	27.94	29.23	28.77
UMTS BAND II	21.87	23.39	22.32
UMTS BAND V	21.29	23.54	21.51
UMTS BAND IV	20.59	23.18	20.98

**GSM Card2 Slot :**

	Maximum ERP/EIRP (dBm)	Max. Conducted Power (dBm)	Max. Average Burst Power (dBm)
GSM 850	30.52	31.56	30.76
PCS 1900	27.36	28.74	28.13





## **2.2 RELATED SUBMITTAL(S) / GRANT (S)**

This submittal(s) (test report) is intended for **FCC ID:2AHZ5KINGKONG3**, filing to comply with the FCC Part 22H&24E&27L requirements.

## **2.3 TEST METHODOLOGY**

The radiated emission testing was performed according to the procedures of ANSI/TIA-603-E-2016, and KDB 971168 D01 Power Means License Digital Systems V03R01.

**2.4 TEST FACILITY**

<b>Site</b>	Shenzhen HUAKE Testing Technology Co., Ltd.
<b>Location</b>	1F, B2 Building, Junfeng Zhongcheng Zhizao Innovation Park, Fuhai Street, Bao'an District, Shenzhen City, China
<b>Designation Number</b>	CN1229
Test Firm Registration Number : 616276	

**ALL TEST EQUIPMENT LIST**

<b>Equipment</b>	<b>Manufacturer</b>	<b>Model</b>	<b>S/N</b>	<b>Cal. Date</b>	<b>Cal. Due</b>
Receiver	R&S	ESCI 7	HKE-010	2017/12/28	2018/12/27
LISN	R&S	ENV216	HKE-002	2017/12/28	2018/12/27
Spectrum analyzer	Agilent	N9020A	HKE-048	2017/12/28	2018/12/27
Horn antenna	Schwarzbeck	9120D	HKE-013	2017/12/28	2019/12/26
Preamplifier	EMCI	EMC051845SE	HKE-015	2017/12/28	2018/12/27
Double-Ridged Waveguide Horn	ETS LINDGREN	3117	HKE-087	2017/12/28	2018/12/27
Broadband antenna	Schwarzbeck	VULB 9163	HKE-012	2017/12/28	2019/12/26
Spectrum analyzer	Agilent	N9020A	HKE-048	2017/12/28	2018/12/27
Power Sensor	Agilent	E9300A	HKE-086	2017/12/28	2018/12/27
Wireless Communication Test Set	R&S	CMU200	HKE-026	2017/12/28	2018/12/27



## **2.6 SPECIAL ACCESSORIES**

The battery was supplied by the applicant and was used as accessories and being tested with EUT intended for FCC grant together.

## **2.7 EQUIPMENT MODIFICATIONS**

Not available for this EUT intended for grant.



### 3. SYSTEM TEST CONFIGURATION

#### 3.1 EUT CONFIGURATION

The EUT configuration for testing is installed on RF field strength measurement to meet the Commission's requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

#### 3.2 EUT EXERCISE

The Transmitter was operated in the maximum output power mode through Communication Tester. The TX frequency was fixed which was for the purpose of the measurements.

#### 3.3 CONFIGURATION OF EUT SYSTEM

Fig. 2-1 Configuration of EUT System



Table 2-1 Equipment Used in EUT System

Item	Equipment	Model No.	ID or Specification	Remark
1	Smart Phone	KINGKONG 3	2AHZ5KINGKONG3	EUT
2	Adapter	KINGKONG 3	DC 9.0V 2A	Accessory
3	Battery	KINGKONG 3	DC3.85V/ 6000mAh	Accessory
4	USB	N/A	N/A	Accessory

\*\*\*Note: All the accessories have been used during the test. The following "EUT" in setup diagram means EUT system.



**4. SUMMARY OF TEST RESULTS**

Item Number	Item Description		FCC Rules	Result
1	Conducted Output Power		2.1046	Pass
2	Radiated Output Power		22.913(a) (2)	Pass
			24.232 (c)	Pass
			27.50(d)(4)	Pass
3	Peak-to-Average Ratio	Peak-to-Average Ratio	24.232(d)	Pass
4	Spurious Emission	Conducted Band Edge/ Spurious Emission	2.1051/22.917(a)/24.238(a)/27.53(h)	Pass
		Radiated Spurious Emission	2.1053/22.917(a)/24.238(a)/27.53(h)	
5	Frequency Stability		2.1055/22.355/24.235/27.54	Pass
6	Occupied Bandwidth		2.1049	Pass



## 5. DESCRIPTION OF TEST MODES

During the testing, the EUT was controlled via Rhode & Schwarz Digital Radio Communication Tester (CMU 200) to ensure max power transmission and proper modulation. Three channels (The top channel, the middle channel and the bottom channel) were chosen for testing on both GSM and PCS frequency band.

**\*\*\*Note:** GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS 1900, WCDMA/HSPA band II, WCDMA/HSPA band V, WCDMA/HSPA band IV, mode have been tested during the test.

The worst condition was recorded in the test report if no other modes test data.



## 6. OUTPUT POWER

### 6.1 CONDUCTED OUTPUT POWER

#### 6.1.1 MEASUREMENT METHOD

The transmitter output port was connected to base station.

The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator.

The path loss was compensated to the results for each measurement.

Measure the maximum burst average power and average power for other modulation signal.

The EUT was setup for the max output power with pseudo random data modulation. Power was measured with Spectrum Analyzer. The measurements were performed on all modes(GSM/GPRS/EGPRS 850, GSM/GPRS/EGPRS1900, WCDMA/HSPA band II,WCDMA/HSPA band V, WCDMA/HSPA band IV)at 3 typical channels(the Top Channel, the Middle Channel and the Bottom Channel) for each band.

#### 6.1.2 MEASUREMENT RESULT

Conducted Output Power Limits for GPRS/EDGE 850 band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	33 dBm (2W)	- 2
EDGE	27 dBm(0.5W)	±2
Conducted Output Power Limits for GPRS/EDGE 1900band		
Mode	Nominal Peak Power	Tolerance(dB)
GSM	30 dBm (1W)	- 2
EDGE	26 dBm (0.4W)	±2
Conducted Output Power Limits for UMTS band II		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band V		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24dBm (0.25W)	- 2
Conducted Output Power Limits for UMTS band IV		
Mode	Nominal Peak Power	Tolerance(dB)
WCDMA	24dBm (0.25W)	- 2



**GSM 850:**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM850	824.2	33	32.44	-0.56	31.12	-9	22.12
	836.6	33	32.25	-0.75	31.25	-9	22.25
	848.8	33	<b>32.46</b>	-0.54	<b>31.27</b>	-9	22.27
GPRS850 (1 Slot)	824.2	33	32.12	-0.88	31.05	-9	22.05
	836.6	33	32.20	-0.80	31.11	-9	22.11
	848.8	33	32.11	-0.89	31.12	-9	22.12
GPRS850 (2 Slot)	824.2	30	29.19	-0.81	28.86	-6	22.86
	836.6	30	29.33	-0.67	28.75	-6	22.75
	848.8	30	29.18	-0.82	28.69	-6	22.69
GPRS850 (3 Slot)	824.2	28.23	27.20	-1.03	26.46	-4.26	22.20
	836.6	28.23	27.28	-0.95	26.53	-4.26	22.27
	848.8	28.23	27.46	-0.77	26.47	-4.26	22.21
GPRS850 (4 Slot)	824.2	27	26.33	-0.67	25.33	-3	22.33
	836.6	27	26.28	-0.72	25.28	-3	22.28
	848.8	27	26.37	-0.63	25.26	-3	22.26

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	128	824.2	28.76	25.65
	190	836.6	28.39	25.88
	251	848.8	28.99	25.39
EDGE (2 Slot)	128	824.2	24.25	22.47
	190	836.6	24.11	22.36
	251	848.8	24.64	22.42
EDGE (3 Slot)	128	824.2	23.23	21.84
	190	836.6	23.08	21.37
	251	848.8	23.57	21.43
EDGE (4 Slot)	128	824.2	22.64	19.19
	190	836.6	22.38	19.27
	251	848.8	22.44	19.44





**PCS 1900:**

Mode	Frequency (MHz)	Reference Power	Peak Power	Tolerance	Avg.Burst Power	Duty cycle Factor(dB)	Frame Power(dBm)
GSM1900	1850.2	30	29.05	-0.95	<b>28.77</b>	-9	19.77
	1880	30	29.04	-0.96	28.69	-9	19.69
	1909.8	30	<b>29.23</b>	-0.77	28.59	-9	19.59
GPRS1900 (1 Slot)	1850.2	30	28.23	-1.77	27.11	-9	18.11
	1880	30	28.06	-1.94	27.46	-9	18.46
	1909.8	30	28.05	-1.95	27.53	-9	18.53
GPRS1900 (2 Slot)	1850.2	27	25.22	-1.78	24.34	-6	18.34
	1880	27	25.70	-1.30	24.49	-6	18.49
	1909.8	27	25.40	-1.60	24.52	-6	18.52
GPRS1900 (3 Slot)	1850.2	25.23	24.12	-1.11	23.58	-4.26	19.32
	1880	25.23	24.25	-0.98	23.79	-4.26	19.53
	1909.8	25.23	24.33	-0.90	23.73	-4.26	19.47
GPRS1900 (4 Slot)	1850.2	24	23.63	-0.37	22.69	-3	19.69
	1880	24	23.69	-0.31	22.77	-3	19.77
	1909.8	24	23.24	-0.76	22.64	-3	19.64

Mode	Channel	Frequency (MHz)	Peak Power (dBm)	Avg.Burst Power (dBm)
EDGE (1 Slot)	512	1850.2	26.36	24.24
	661	1880	26.42	24.36
	810	1909.8	26.28	24.13
EDGE (2 Slot)	512	1850.2	23.31	21.28
	661	1880	23.26	21.44
	810	1909.8	23.15	21.18
EDGE (3 Slot)	512	1850.2	23.36	21.70
	661	1880	23.42	21.26
	810	1909.8	23.36	21.39
EDGE (4 Slot)	512	1850.2	22.19	20.74
	661	1880	22.88	20.28
	810	1909.8	22.37	20.64



**UMTS BAND II**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA1900 RMC	1852.4	24	23.08	-0.92	22.23
	1880	24	<b>23.39</b>	-0.61	<b>22.32</b>
	1907.6	24	22.82	-1.18	22.22
WCDMA1900 AMR	1852.4	24	23.09	-0.91	22.12
	1880	24	23.28	-0.72	22.13
	1907.6	24	22.91	-1.09	21.97
HSDPA Subtest 1	1852.4	24	21.40	-2.60	20.93
	1880	24	21.30	-2.70	20.92
	1907.6	24	20.92	-3.08	20.87
HSDPA Subtest 2	1852.4	24	22.22	-1.78	20.31
	1880	24	22.46	-1.54	20.13
	1907.6	24	22.59	-1.41	20.46
HSDPA Subtest 3	1852.4	24	22.41	-1.59	20.22
	1880	24	22.20	-1.80	19.93
	1907.6	24	21.98	-2.02	20.24
HSDPA Subtest 4	1852.4	24	22.57	-1.43	20.28
	1880	24	22.66	-1.34	20.73
	1907.6	24	22.51	-1.49	20.28
HSUPA Subtest 1	1852.4	24	22.31	-1.69	20.55
	1880	24	21.09	-2.91	20.31
	1907.6	24	22.30	-1.70	20.22
HSUPA Subtest 2	1852.4	24	22.07	-1.93	20.91
	1880	24	22.56	-1.44	21.48
	1907.6	24	22.63	-1.37	21.45
HSUPA Subtest 3	1852.4	24	22.55	-1.45	21.62
	1880	24	22.32	-1.68	21.07
	1907.6	24	21.60	-2.40	21.39
HSUPA Subtest 4	1852.4	24	22.57	-1.43	21.41
	1880	24	22.28	-1.72	21.26
	1907.6	24	22.42	-1.58	21.98
HSUPA Subtest 5	1852.4	24	22.77	-1.23	21.23
	1880	24	22.30	-1.70	21.62
	1907.6	24	22.58	-1.42	21.83



**UMTS BAND V**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA850 RMC	826.4	24	23.25	-0.75	<b>21.51</b>
	836.4	24	<b>23.54</b>	-0.46	20.89
	846.6	24	23.35	-0.65	21.28
WCDMA850 AMR	826.4	24	22.93	-1.07	20.97
	836.4	24	22.82	-1.18	21.07
	846.6	24	23.20	-0.80	20.71
HSDPA Subtest 1	826.4	24	22.08	-1.92	19.65
	836.4	24	22.56	-1.44	19.90
	846.6	24	22.52	-1.48	20.31
HSDPA Subtest 2	826.4	24	22.40	-1.60	19.51
	836.4	24	22.28	-1.72	19.64
	846.6	24	22.33	-1.67	19.66
HSDPA Subtest 3	826.4	24	21.32	-2.68	20.37
	836.4	24	21.35	-2.65	20.00
	846.6	24	21.84	-2.16	20.01
HSDPA Subtest 4	826.4	24	22.30	-1.70	20.98
	836.4	24	22.76	-1.24	20.57
	846.6	24	22.72	-1.28	20.55
HSUPA Subtest 1	826.4	24	22.26	-1.74	20.58
	836.4	24	22.59	-1.41	20.75
	846.6	24	22.49	-1.51	20.32
HSUPA Subtest 2	826.4	24	22.45	-1.55	20.99
	836.4	24	22.51	-1.49	21.08
	846.6	24	22.59	-1.41	21.16
HSUPA Subtest 3	826.4	24	22.25	-1.75	21.01
	836.4	24	22.39	-1.61	20.71
	846.6	24	22.32	-1.68	20.95
HSUPA Subtest 4	826.4	24	22.54	-1.46	20.96
	836.4	24	22.22	-1.78	20.31
	846.6	24	22.36	-1.64	20.83
HSUPA Subtest 5	826.4	24	22.71	-1.29	20.93
	836.4	24	22.60	-1.40	20.46
	846.6	24	22.79	-1.21	20.42



**UMTS BAND IV**

Mode	Frequency (MHz)	Reference power	Peak Power	Tolerance	Avg.Burst Power
WCDMA 1700 RMC	1712.4	24	<b>23.18</b>	-0.82	20.81
	1732.4	24	22.64	-1.36	<b>20.98</b>
	1752.6	24	23.10	-0.92	20.56
WCDMA 1700 AMR	1712.4	24	22.89	-1.11	20.49
	1732.4	24	22.89	-1.11	20.73
	1752.6	24	22.95	-1.05	20.59
HSDPA Subtest 1	1712.4	24	22.43	-1.57	20.00
	1732.4	24	22.66	-1.34	20.16
	1752.6	24	22.50	-1.50	19.56
HSDPA Subtest 2	1712.4	24	21.94	-2.06	19.32
	1732.4	24	22.17	-1.83	19.96
	1752.6	24	22.24	-1.76	19.35
HSDPA Subtest 3	1712.4	24	21.83	-2.17	19.29
	1732.4	24	22.14	-1.86	19.80
	1752.6	24	22.37	-1.63	19.50
HSDPA Subtest 4	1712.4	24	22.49	-0.51	20.85
	1732.4	24	22.99	-1.01	20.91
	1752.6	24	23.08	-0.92	20.60
HSUPA Subtest 1	1712.4	24	22.57	-1.43	20.54
	1732.4	24	22.89	-1.11	20.83
	1752.6	24	22.98	-1.02	20.50
HSUPA Subtest 2	1712.4	24	23.03	-0.97	20.63
	1732.4	24	22.21	-1.79	20.86
	1752.6	24	22.38	-1.62	20.17
HSUPA Subtest 3	1712.4	24	22.66	-1.34	20.39
	1732.4	24	22.71	-1.29	20.75
	1752.6	24	22.34	-1.66	20.60
HSUPA Subtest 4	1712.4	24	22.54	-1.46	19.88
	1732.4	24	22.46	-1.54	20.62
	1752.6	24	22.57	-1.43	20.58
HSUPA Subtest 5	1712.4	24	22.89	-1.11	20.63
	1732.4	24	22.92	-1.08	20.89
	1752.6	24	22.70	-1.30	20.43



According to 3GPP 25.101 sub-clause 6.2.2 , the maximum output power is allowed to be reduced by following the table.

Table 6.1aA: UE maximum output power with HS-DPCCH and E-DCH

UE Transmit Channel Configuration	CM(db)	MPR(db)
For all combinations of ,DPDCH,DPCCH HS-DPDCH,E-DPDCH and E-DPCCH	$0 \leq CM \leq 3.5$	$\text{MAX}(CM-1,0)$

Note: CM=1 for  $\beta_{d}/\beta_{c}=12/15, \beta_{hs}/\beta_{c}=24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

The device supports MPR to solve linearity issues (ACLR or SEM) due to the higher peak-to average ratios (PAR) of the HSUPA signal. This prevents saturating the full range of the TX DAC inside of device and provides a reduced power output to the RF transceiver chip according to the Cubic Metric (a function of the combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH).

When E-DPDCH channels are present the beta gains on those channels are reduced firsts to try to get the power under the allowed limit. If the beta gains are lowered as far as possible, then a hard limiting is applied at the maximum allowed level.

The SW currently recalculates the cubic metric every time the beta gains on the E-DPDCH are reduced. The cubic metric will likely get lower each time this is done .However, there is no reported reduction of maximum output power in the HSUPA mode since the device also provides a compensate for the power back-off by increasing the gain of TX\_AGC in the transceiver (PA) device.

The end effect is that the DUT output power is identical to the case where there is no MPR in the device.



## 6.2 RADIATED OUTPUT POWER

### 6.2.1 MEASUREMENT METHOD

The measurements procedures specified in ANSI/TIA-603-E-2016 were applied.

1. Effective Radiated Power (ERP) and Equivalent Isotropic Radiated Power (EIRP) measurements are performed using the substitution method described in ANSI/TIA-603-E-2016 with the EUT transmitting into an integral antenna. Measurements on signal operating below 1GHz are performed using dipole antennas. Measurements on signals operating above 1GHz are performed using broadband horn antennas. All measurements are performed as RMS average measurements while the EUT operating at its maximum duty cycle, at maximum power, and at the approximate frequencies.
2. In an anechoic antenna test chamber, a half-wave dipole antenna for the frequency band of interest is placed at the reference centre of the chamber. An RF Signal source for the frequency band of interest is connected to the dipole with a cable that has been constructed to not interfere with the radiation pattern of the antenna. A known (measured) power ( $P_{in}$ ) is applied to the input of the dipole, and the power received ( $P_r$ ) at the chamber's probe antenna is recorded.
3. The substitution method is used. Substitution values at each frequency are measured before and saved to the test software. A "reference path loss" is established as  $AR_{pl} = P_{in} + 2.15 - P_r$ . The  $AR_{pl}$  is the attenuation of "reference path loss", and including the gain of receive antenna, the cable loss and the air loss. The measurement results are obtained as described below:  $Power = P_{Mea} + AR_{pl}$
4. The EUT is substituted for the dipole at the reference centre of the chamber and a scan is performed to obtain the radiation pattern.
5. From the radiation pattern, the co-ordinates where the maximum antenna gain occurs are identified.
6. The EUT is then put into continuously transmitting mode at its maximum power level.
7. Power mode measurements are performed with the receiving antenna placed at the coordinates determined in Step 3 to determine the output power as defined in Rule 24.232 (b) and (c). The "reference path loss" from Step 1 is added to this result.
8. This value is EIRP since the measurement is calibrated using a half-wave dipole antenna of known gain (2.15 dBi) and known input power ( $P_{in}$ ).
9. ERP can be calculated from EIRP by subtracting the gain of the dipole,  $ERP = EIRP - 2.15 \text{ dBi} \dots$

**6.2.2 PROVISIONS APPLICABLE**

<b>Mode</b>	<b>FCC Part Section(s)</b>	<b>Nominal Peak Power</b>
GSM/EDGE 850	22.913(a)(2)	$\leq 38.45\text{dBm}$ (7W). ERP
GSM/EDGE 1900	24.232(c)	$\leq 33\text{dBm}$ (2W). EIRP
UMTS BAND II	24.232(c)	$\leq 33\text{dBm}$ (2W).EIRP
UMTS BANDV	22.913(a)(2)	$\leq 38.45\text{dBm}$ (7W).ERP
UMTS BAND IV	27.50(d)(4)	$\leq 30\text{dBm}$ (1W). EIRP



**6.2.3 MEASUREMENT RESULT**

<b>Radiated Power (ERP) for GSM/EDGE 850</b>				
<b>Mode</b>	<b>Frequency</b>	<b>Result</b>		<b>Conclusion</b>
		<b>Max. Peak ERP (dBm)</b>	<b>Polarization Of Max. ERP</b>	
GSM	824.2	30.78	Horizontal	Pass
	836.6	<b>30.87</b>	Horizontal	Pass
	848.8	30.66	Horizontal	Pass
	824.2	28.69	Vertical	Pass
	836.6	28.44	Vertical	Pass
	848.8	28.36	Vertical	Pass
EDGE	824.2	25.58	Horizontal	Pass
	836.6	25.57	Horizontal	Pass
	848.8	25.66	Horizontal	Pass
	824.2	23.42	Vertical	Pass
	836.6	23.89	Vertical	Pass
	848.8	23.47	Vertical	Pass

<b>Radiated Power (E.I.R.P) for GSM/EDGE 1900</b>				
<b>Mode</b>	<b>Frequency</b>	<b>Result</b>		<b>Conclusion</b>
		<b>Max. Peak E.I.R.P.(dBm)</b>	<b>Polarization Of Max. E.I.R.P.</b>	
GSM	1850.2	<b>27.94</b>	Horizontal	Pass
	1880.0	27.68	Horizontal	Pass
	1909.8	27.58	Horizontal	Pass
	1850.2	24.33	Vertical	Pass
	1880.0	24.28	Vertical	Pass
	1909.8	24.64	Vertical	Pass
EDGE	1850.2	23.35	Horizontal	Pass
	1880.0	23.28	Horizontal	Pass
	1909.8	23.44	Horizontal	Pass
	1850.2	21.36	Vertical	Pass
	1880.0	21.46	Vertical	Pass
	1909.8	21.29	Vertical	Pass





Radiated Power (E.I.R.P) for UMTS band II				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P (dBm)	Polarization Of Max. E.I.R.P	
UMTS	1852.4	<b>21.87</b>	Horizontal	Pass
	1880	21.59	Horizontal	Pass
	1907.6	21.66	Horizontal	Pass
	1852.4	19.25	Vertical	Pass
	1880	19.43	Vertical	Pass
	1907.6	19.28	Vertical	Pass

Radiated Power (ERP) for UMTS band V				
Mode	Frequency	Result		Conclusion
		Max. Peak ERP (dBm)	Polarization Of Max. ERP	
UMTS	826.4	21.23	Horizontal	Pass
	836.4	21.12	Horizontal	Pass
	846.6	<b>21.29</b>	Horizontal	Pass
	826.4	19.52	Vertical	Pass
	836.4	19.49	Vertical	Pass
	846.6	19.55	Vertical	Pass

Radiated Power (E.I.R.P) for UMTS band IV				
Mode	Frequency	Result		Conclusion
		Max. Peak E.I.R.P. (dBm)	Polarization Of Max. E.I.R.P.	
UMTS	1712.4	20.52	Horizontal	Pass
	1732.4	20.42	Horizontal	Pass
	1752.6	<b>20.59</b>	Horizontal	Pass
	1712.4	19.46	Vertical	Pass
	1732.4	19.66	Vertical	Pass
	1752.6	19.58	Vertical	Pass

Note: Above is the worst mode data.



### **6.3. PEAK-TO-AVERAGE RATIO**

#### **6.3.1 MEASUREMENT METHOD**

Use one of the procedures presented in 4.1 to measure the total peak power and record as PPk. Use one of the applicable procedures presented 4.2 to measure the total average power and record as PAvg. Both the peak and average power levels must be expressed in the same logarithmic units (e.g., dBm). Determine the PAPR from:

$$\text{PAPR (dB)} = \text{PPk (dBm)} - \text{PAvg (dBm)}.$$

#### **6.3.2 PROVISIONS APPLICABLE**

This is the test for the Peak-to-Average Ratio from the EUT.

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.



**6.3.3 MEASUREMENT RESULT**

Modes	GSM850(GSM)		
Channel	128	190	251
	(Low)	(Mid)	(High)
Frequency (MHz)	824.2	836.6	848.8
Peak-To-Average Ratio (dB)/GSM	1.44	1.42	1.36
Peak-To-Average Ratio (dB)/EDGE	1.25	1.21	1.28

Modes	PCS1900 (GSM)		
Channel	512	661	810
	(Low)	(Mid)	(High)
Frequency (MHz)	1850.2	1880	1909.8
Peak-To-Average Ratio (dB)/GSM	1.10	0.99	1.04
Peak-To-Average Ratio (dB)/EDGE	1.33	1.21	1.07

Modes	UMTS BAND II		
Channel	9262	9400	9538
	(Low)	(Mid)	(High)
Frequency (MHz)	1852.4	1880	1907.6
Peak-To-Average Ratio (dB)	1.42	1.38	1.27

Modes	UMTS BAND V		
Channel	4132	4182	4233
	(Low)	(Mid)	(High)
Frequency (MHz)	826.4	836.4	846.6
Peak-To-Average Ratio (dB)	1.25	1.54	1.17



<b>Modes</b>	<b>UMTS BAND IV</b>		
<b>Channel</b>	<b>8562</b>	<b>8662</b>	<b>8763</b>
	<b>(Low)</b>	<b>(Mid)</b>	<b>(High)</b>
<b>Frequency (MHz)</b>	<b>1712.4</b>	<b>1732.4</b>	<b>1752.6</b>
<b>Peak-To-Average Ratio (dB)</b>	<b>1.87</b>	<b>1.74</b>	<b>1.69</b>



## **7. OCCUPIED BANDWIDTH**

### **7.1 MEASUREMENT METHOD**

1. The Occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper Frequency limits, the mean power radiated are each equal to 0.5 percent of the total mean power radiated by a given emission shall be measured.
2. RBW=1~5% of the expected OBW, VBW $\geq$ 3 x RBW, Detector=Peak, Trace mode=max hold, Sweep=auto couple, and the trace was allowed to stabilize.

### **7.2 PROVISIONS APPLICABLE**

The emission bandwidth is defined as two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power



### 7.3 MEASUREMENT RESULT

#### Test Results

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM850	GSM	LCH	247.3	307.9	PASS
		MCH	245.06	310.1	PASS
		HCH	244.89	311.1	PASS
	EDGE	LCH	248.19	313.7	PASS
		MCH	245.89	298.7	PASS
		HCH	245.93	304.9	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
GSM1900	GSM	LCH	244.53	311.2	PASS
		MCH	245.69	313.6	PASS
		HCH	246.96	316.1	PASS
	EDGE	LCH	252.06	304.8	PASS
		MCH	247.17	316.8	PASS
		HCH	247.87	309.5	PASS




For GSM

Test Band=GSM850/PCS1900

Test Mode=GSM/EDGE

GSM 850-LCH-GSM

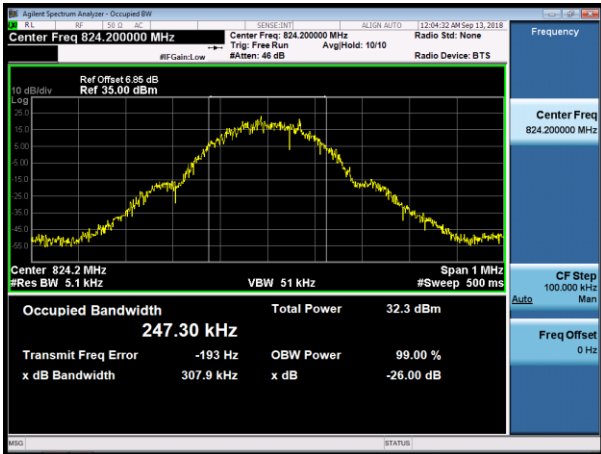


GSM 850-MCH-GSM



GSM 850-HCH-GSM




GSM 850-LCH-EDGE

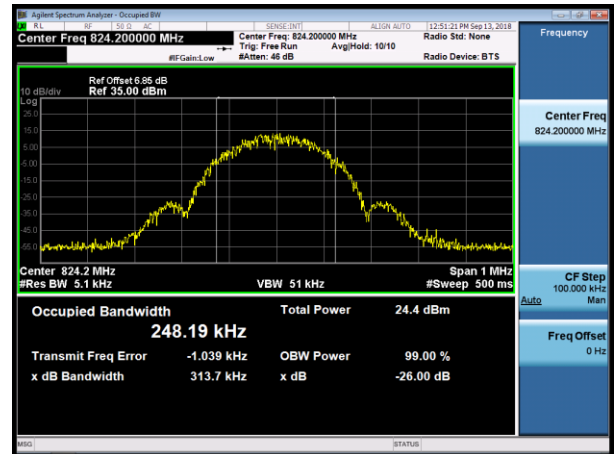





### GSM 850-MCH-EDGE

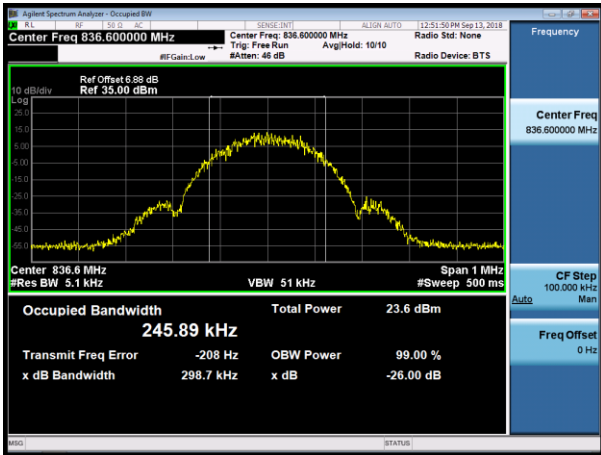


### GSM 850-HCH-EDGE

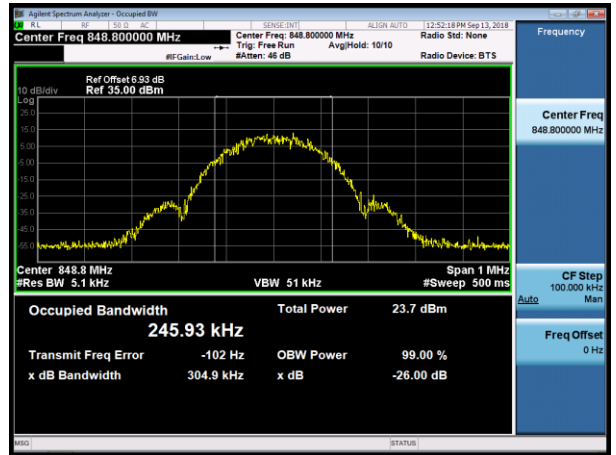


### GSM 1900-LCH-GSM

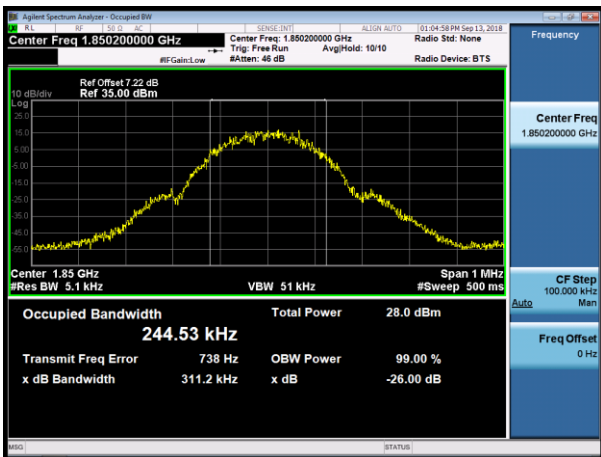


### GSM 1900-MCH-GSM

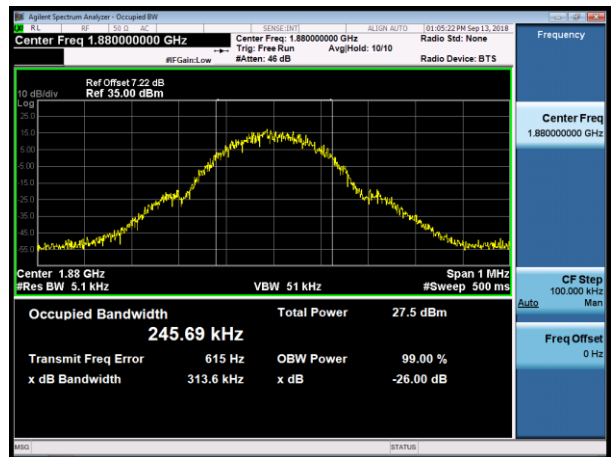

### GSM 1900-HCH-GSM

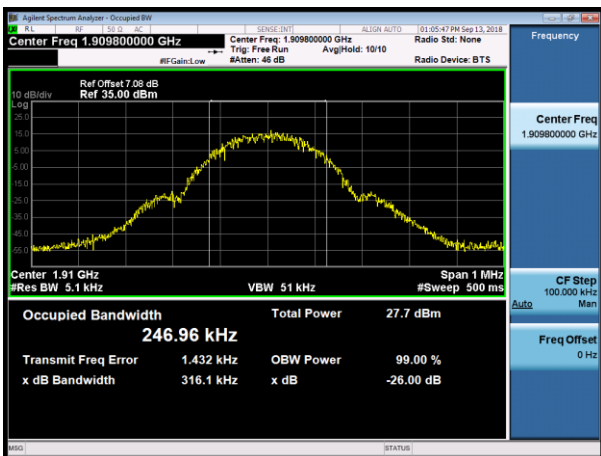

### GSM 1900-LCH-EGPRS

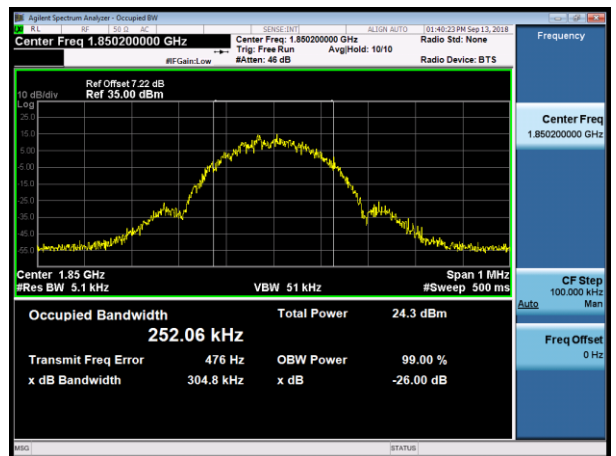






### GSM 1900-MCH-EGPRS

### GSM 1900-HCH-EGPRS

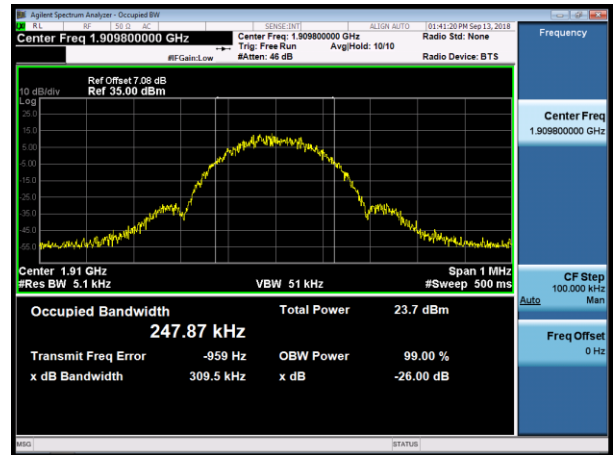



Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 850	UMTS	LCH	4152.6	4695	PASS
		MCH	4170.1	4705	PASS
		HCH	4183.4	4724	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1700	UMTS	LCH	4165.5	4710	PASS
		MCH	4162.8	4728	PASS
		HCH	4160.5	4708	PASS

Test Band	Test Mode	Test Channel	Occupied Bandwidth (KHZ)	Emission Bandwidth (KHZ)	Verdict
WCDMA 1900	UMTS	LCH	4157.9	4723	PASS
		MCH	4181.3	4707	PASS
		HCH	4172.4	4720	PASS




For WCDMA


Test Band=WCDMA850/WCDMA1700/WCDMA1900

Test Mode=UMTS


### WCDMA 850-LCH

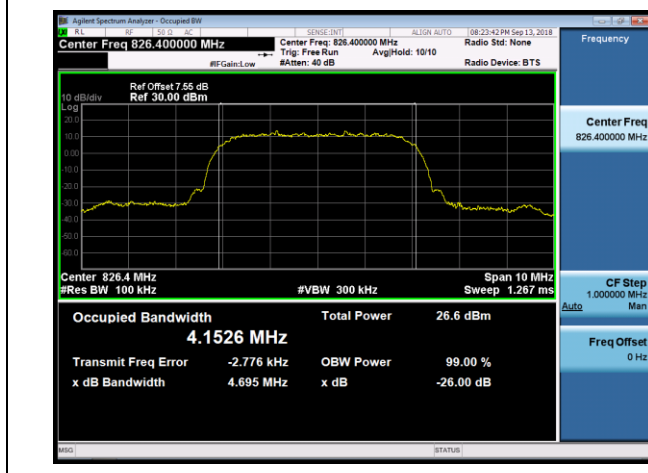


### WCDMA 850-MCH

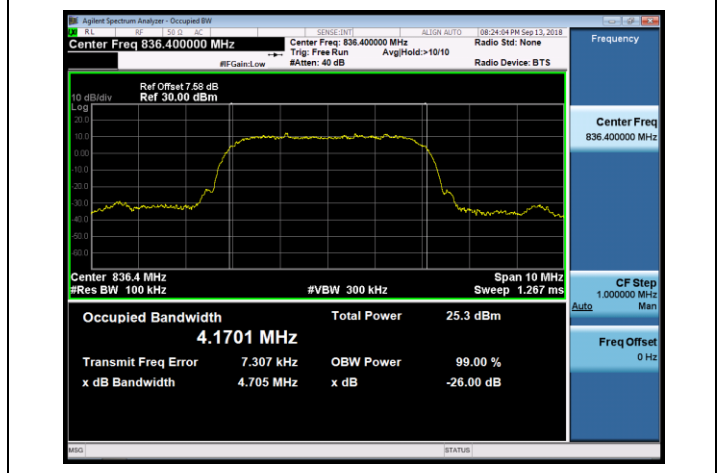

### WCDMA 850-HCH

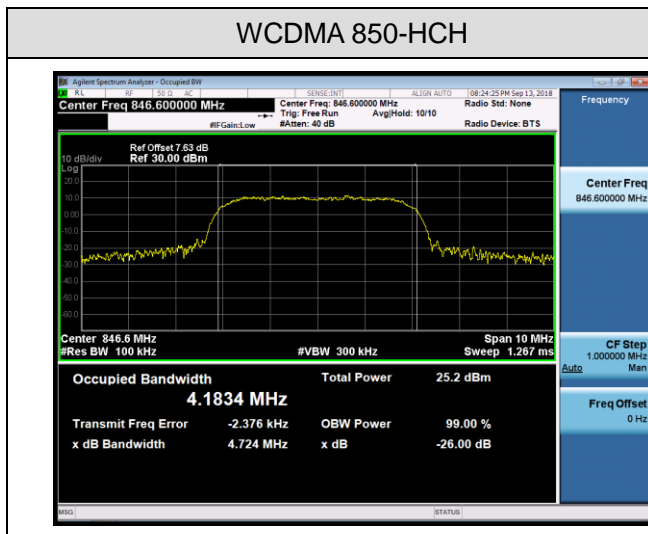


### WCDMA 1700-LCH

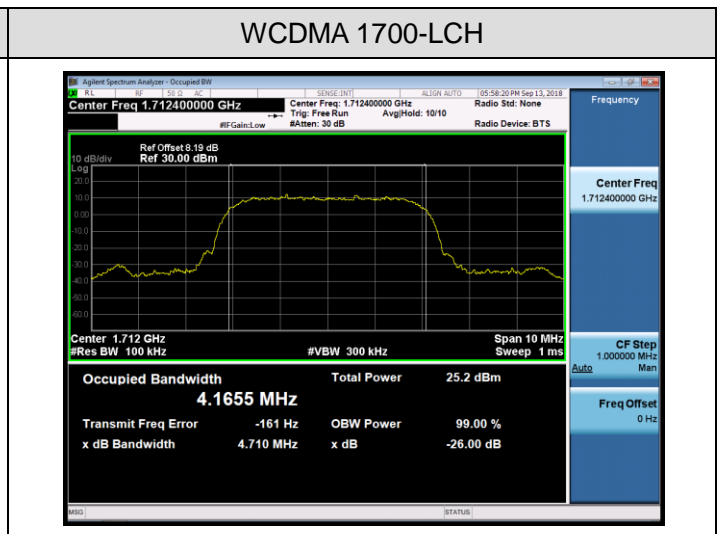





### WCDMA 1700-MCH

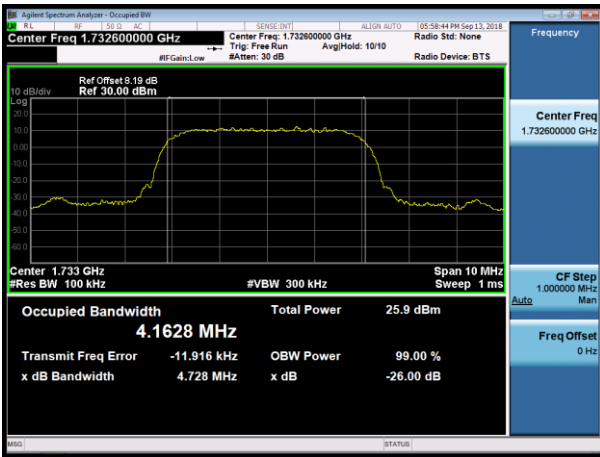


### WCDMA 1700-HCH

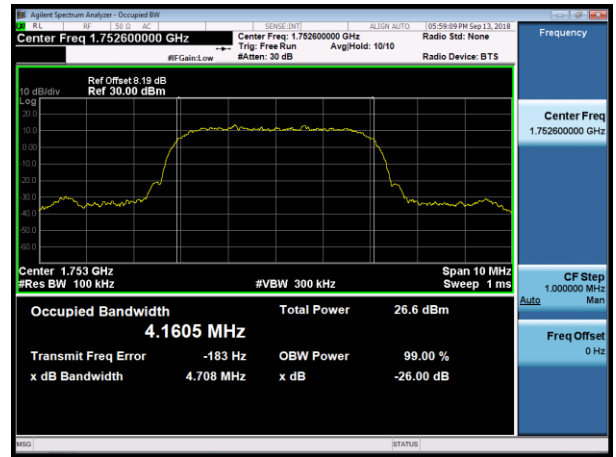


### WCDMA 1900-LCH

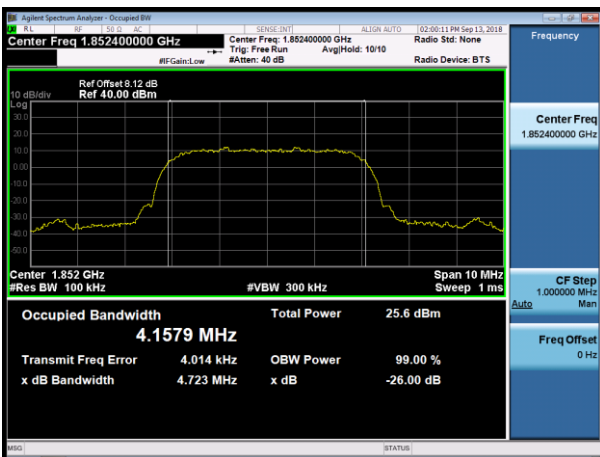

### WCDMA 1900-MCH

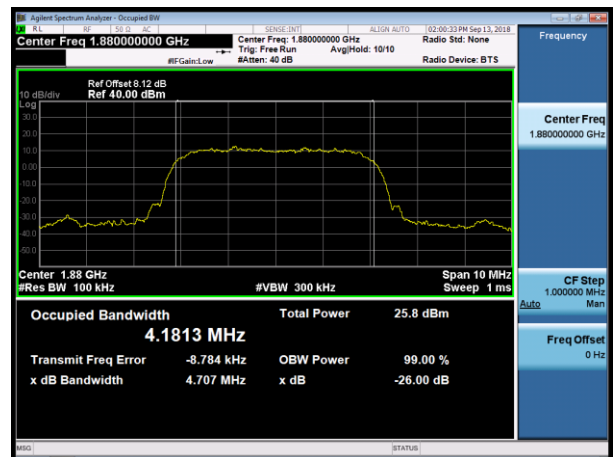

### WCDMA 1900-HCH

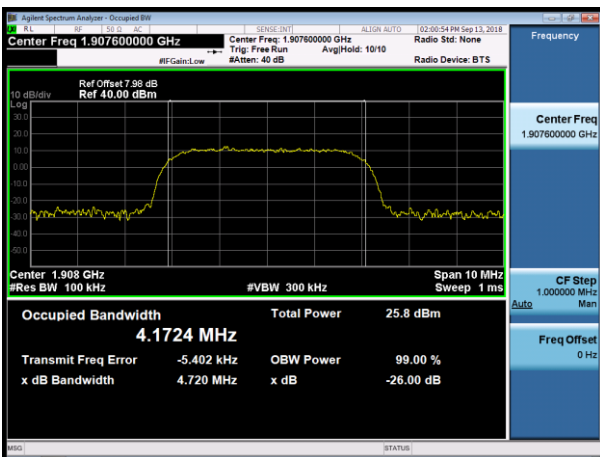



## **8. BAND EDGE**

### **8.1 MEASUREMENT METHOD**

1. All out of band emissions are measured with an analyzer spectrum connected to the antenna terminal of the EUT while the EUT at its maximum duty cycle, at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration
2. The test set up and general procedure is similar to conducted peak output power test. Only different for setting the measurement configuration of the measuring instrument of Spectrum Analyzer.
3. Start and stop frequency were set such that the band edge would be placed in the center of the plot.
4. Span was set large enough so as to capture all out of band emissions near the band edge.
5. RBW > 1% of the emission bandwidth, VBW  $\geq 3 \times$  RBW, Detector=RMS, Number of points  $\geq 2 \times$  Span/RBW, Trace mode=max hold, Sweep time=auto couple, and the trace was allowed to stabilize

### **8.2 PROVISIONS APPLICABLE**

As Specified in FCC rules of 22.917(a), 24.238(a), 27.53(h) and KDB 971168 D1 V03R01.



### 8.3 MEASUREMENT RESULT


#### Test Results

For GSM


Test Band=GSM850/GSM1900

Test Mode=GSM/EDGE


GSM 850-LCH-GSM

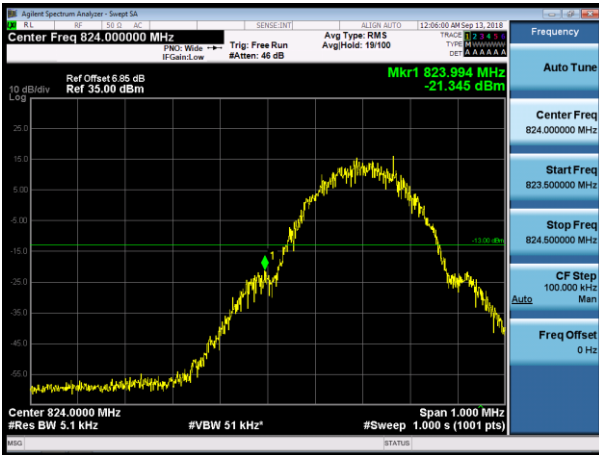


GSM 850-HCH-GSM

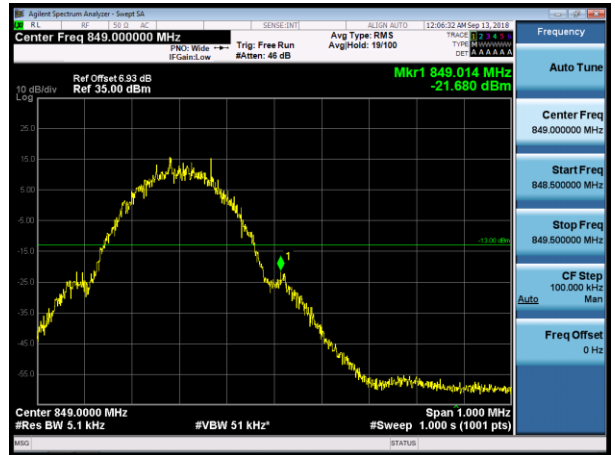

GSM 850-LCH-EDGE

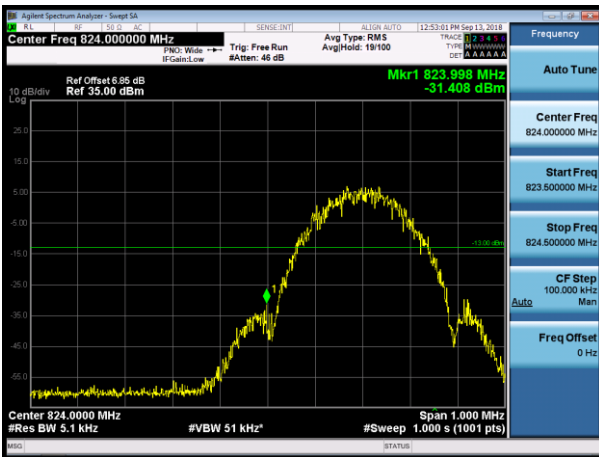


GSM 850-HCH-EDGE

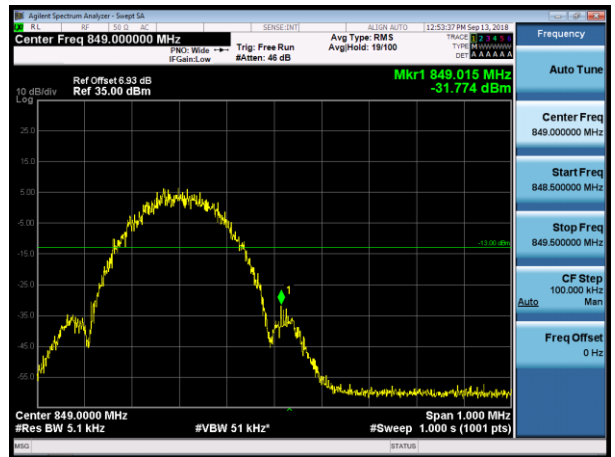





### GSM 1900-LCH-GSM

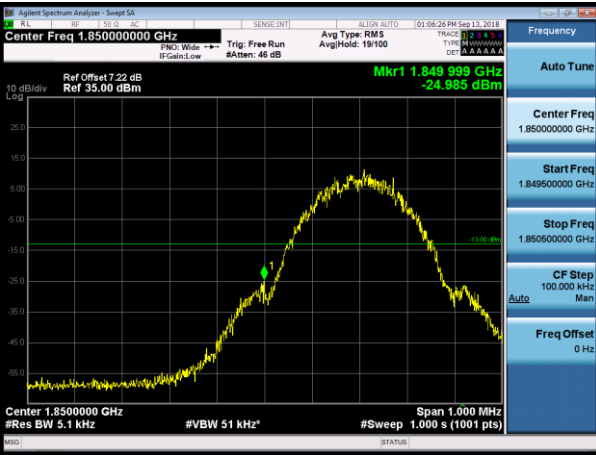


### GSM 1900-HCH-GSM

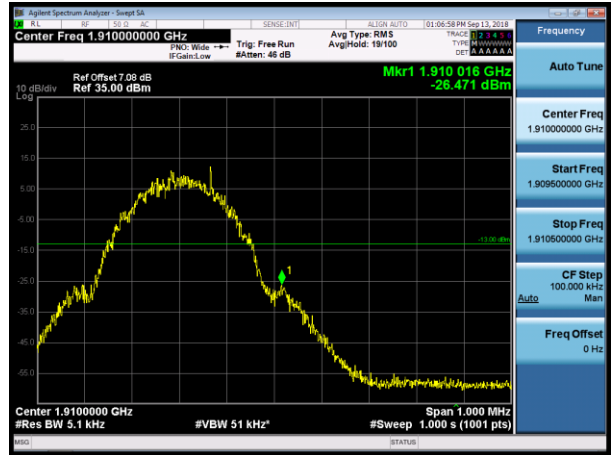

### GSM 1900-LCH-EDGE

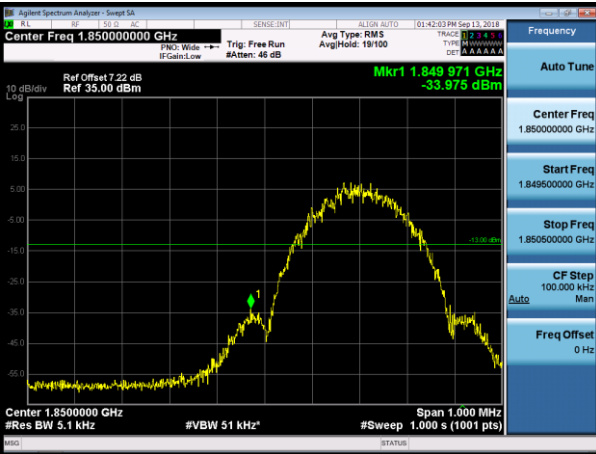

### GSM 1900-HCH-EDGE

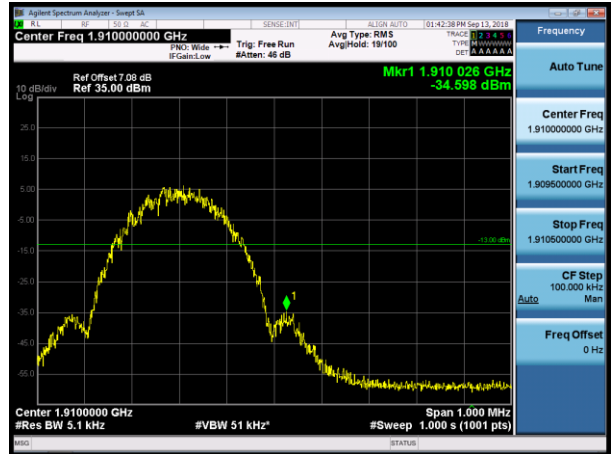




For WCDMA


Test Band=WCDMA850/WCDMA1700/WCDMA1900

Test Mode=UMTS


WCDMA 850-LCH

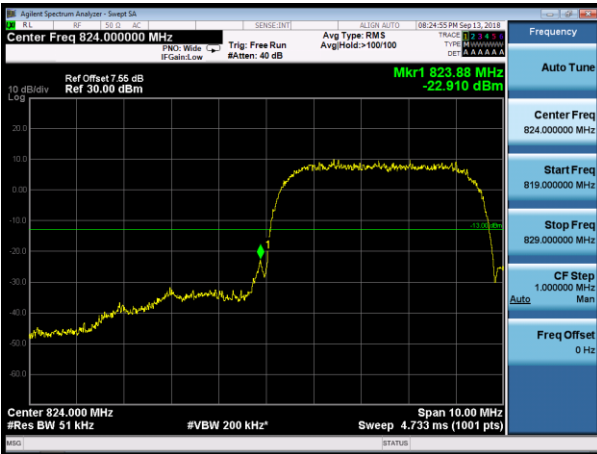

WCDMA 850-HCH

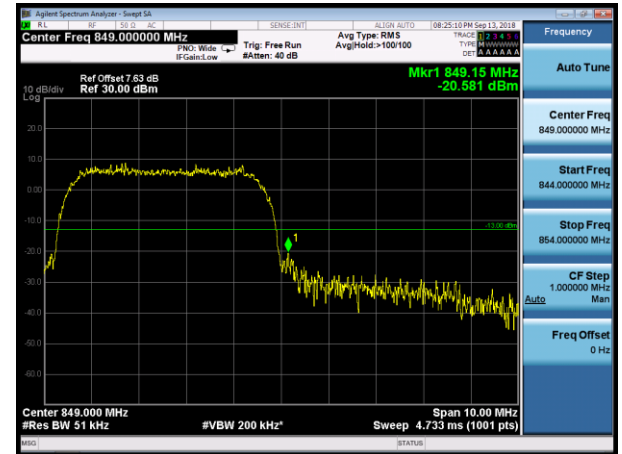


WCDMA 1700-LCH

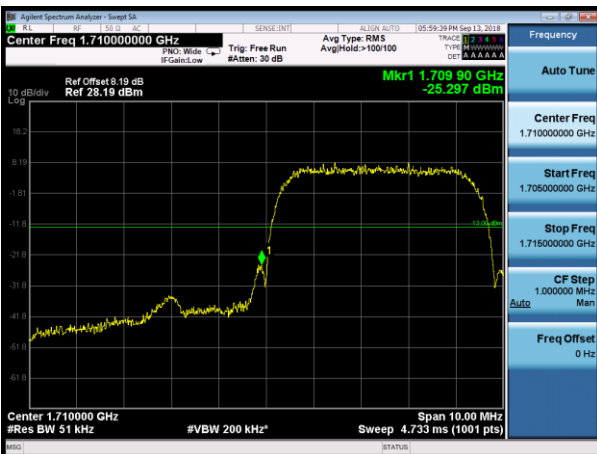


WCDMA 1700-HCH



WCDMA 1900-LCH

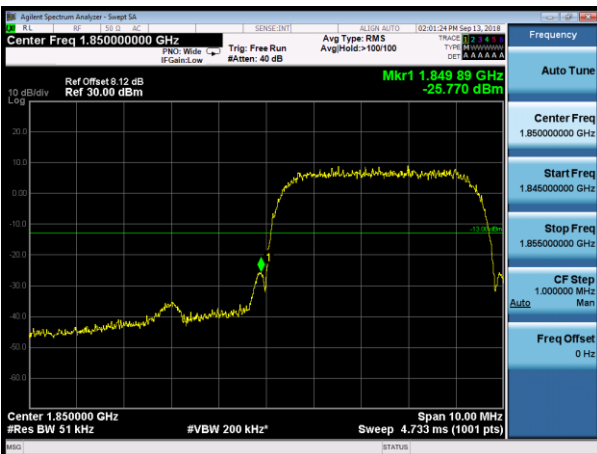

WCDMA 1900-HCH

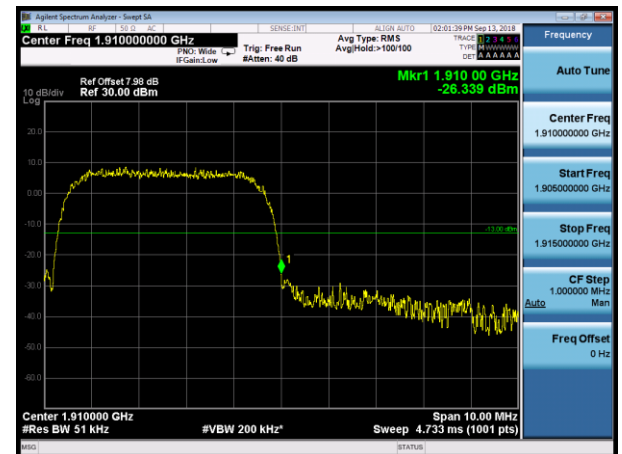





## **9. SPURIOUS EMISSION**

### **9.1 CONDUCTED SPURIOUS EMISSION**

#### **9.1.1 MEASUREMENT METHOD**

The following steps outline the procedure used to measure the conducted emissions from the EUT.

1. The level of the carrier and the various conducted spurious and harmonic frequency is measured by means of a calibrated spectrum analyzer. The spectrum is scanned from the lowest frequency generated in the equipment up to a frequency including its 10<sup>th</sup> harmonic. All out of band emissions are measured with a spectrum analyzer connected to the antenna terminal of the EUT while the EUT is operating at maximum power, and at the approximate frequencies. All data rates were investigated to determine the worst case configuration.
2. Determine frequency range for measurements: From CFR 2.1057 the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10th harmonic of the carrier frequency. For the equipment of PCS1900 band, this equates to a frequency range of 30 MHz to 19.1 GHz, data taken from 30 MHz to 20 GHz. For GSM850, data taken from 30 MHz to 9 GHz.
3. Determine EUT transmit frequencies: the following typical channels were chosen to conducted emissions testing.



<b>Typical Channels for testing of GSM 850</b>	
Channel	Frequency (MHz)
128	824.2
190	836.6
251	848.8

<b>Typical Channels for testing of PCS 1900</b>	
Channel	Frequency (MHz)
512	1850.2
661	1880.0
810	1909.8

<b>Typical Channels for testing of UMTS band II</b>	
Channel	Frequency (MHz)
9262	1852.4
9400	1880
9538	1907.6

<b>Typical Channels for testing of UMTS band V</b>	
Channel	Frequency (MHz)
4132	826.4
4182	836.4
4233	846.6

<b>Typical Channels for testing of UMTS band IV</b>	
Channel	Frequency (MHz)
8562	1712.4
8662	1732.4
8763	1752.6



### **9.1.2 PROVISIONS APPLICABLE**

On any frequency outside frequency band of the USPCS spectrum, the power of any emission shall be attenuated below the transmitter power ( $P$ , in Watts) by at least  $43+10\text{Log}(P)$  dB. For all power levels +30 dBm to 0 dBm, this becomes a constant specification limit of -13 dBm.




### 9.1.3 MEASUREMENT RESULT

#### Test Results


Test Band=GSM850/GSM1900

Test Mode=GSM/EDGE


GSM 850-LCH-GSM

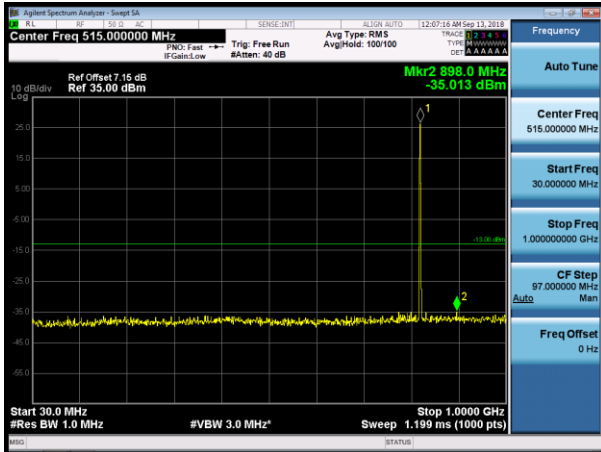


GSM 850-LCH-GSM

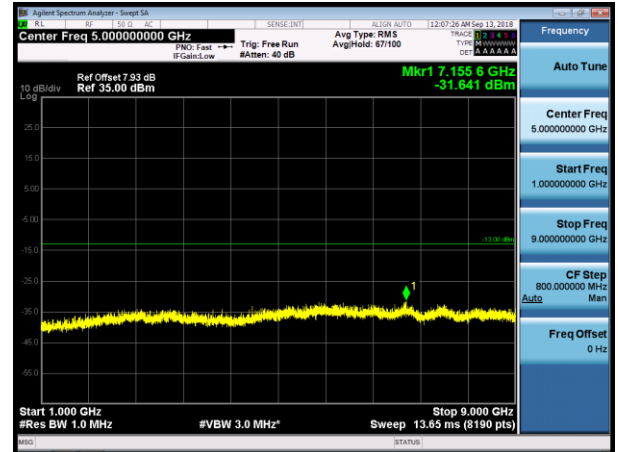

GSM 850-MCH-GSM

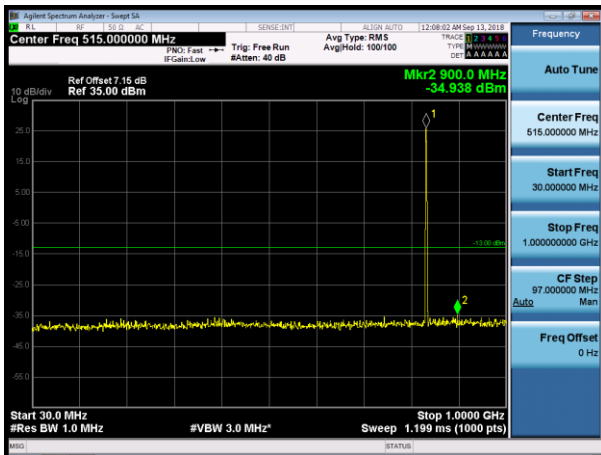


GSM 850-MCH-GSM

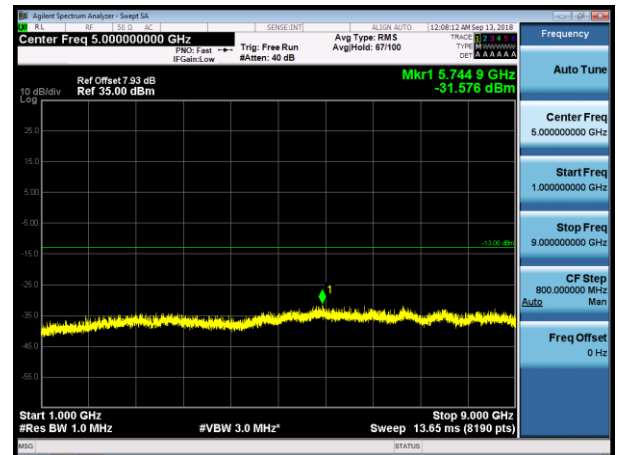





### GSM 850-HCH-GSM

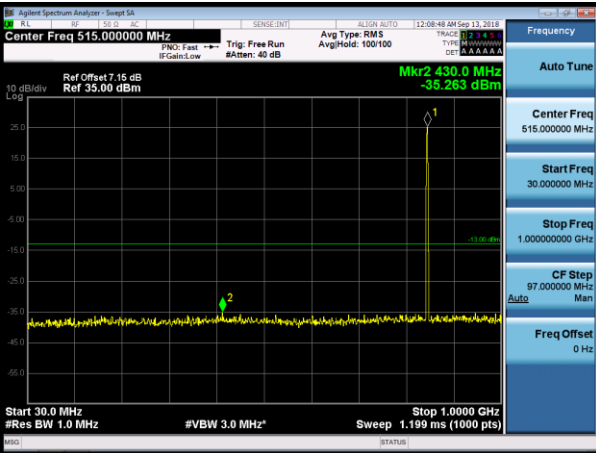


### GSM 850-HCH-GSM

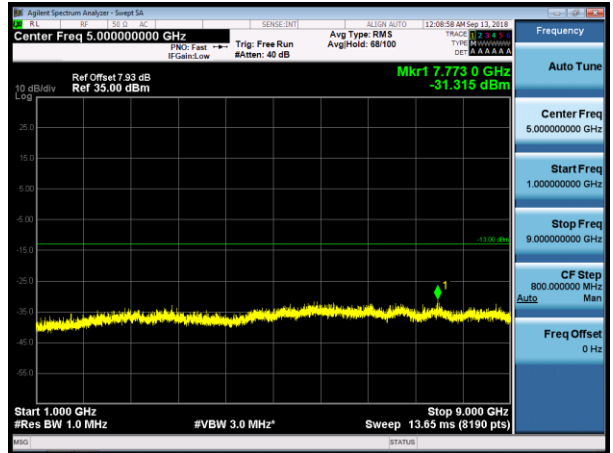


### GSM 850-LCH-EDGE

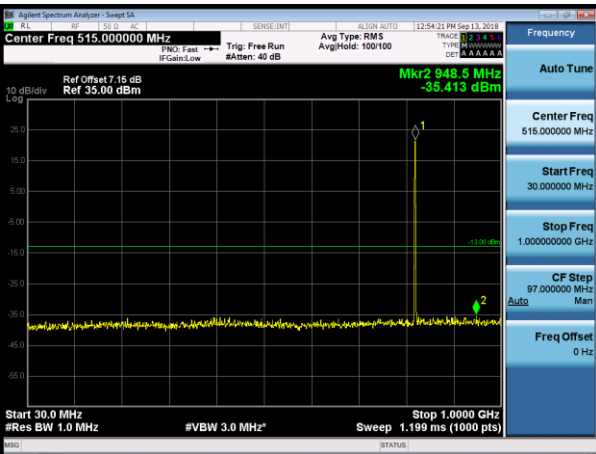

### GSM 850-LCH-EDGE

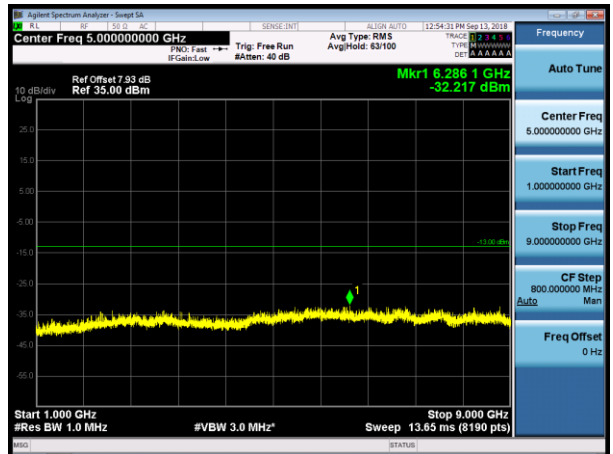

### GSM 850-MCH-EDGE

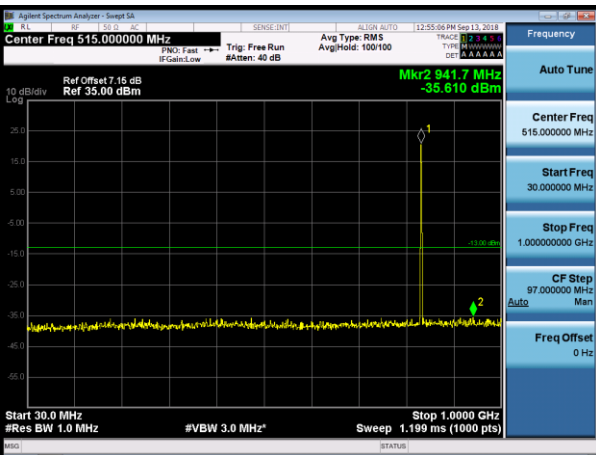


### GSM 850-MCH-EDGE







### GSM 850-HCH-EDGE

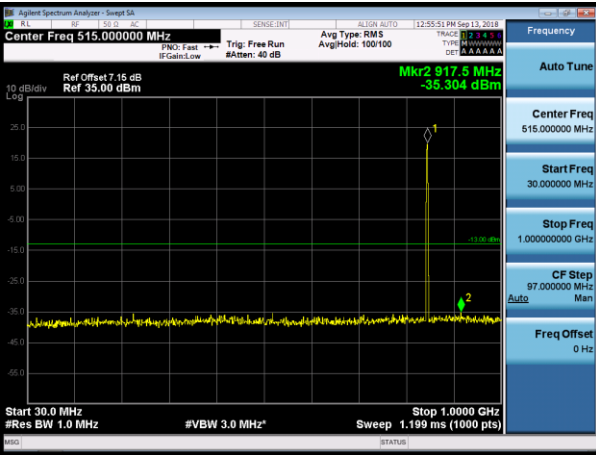


### GSM 850-HCH-EDGE

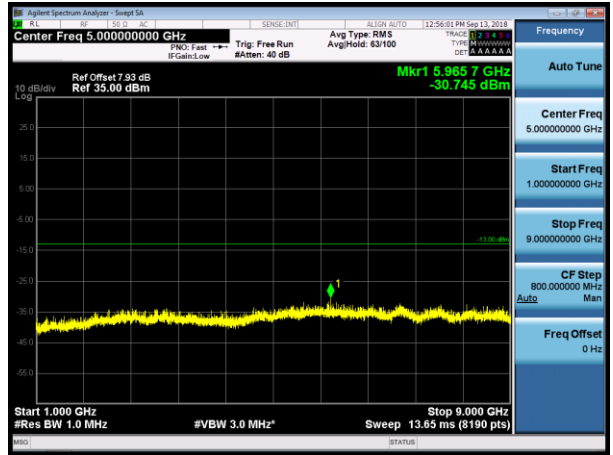


### GSM 1900-LCH-GSM

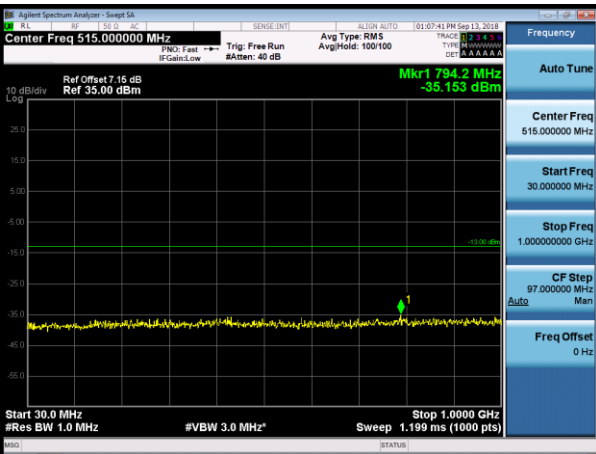


### GSM 1900-LCH-GSM

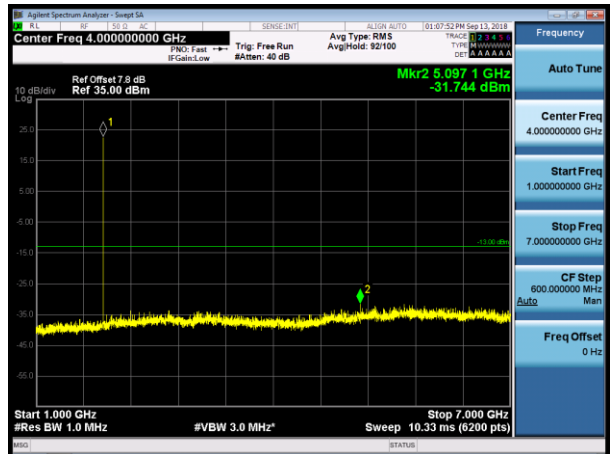

### GSM 1900-LCH-GSM

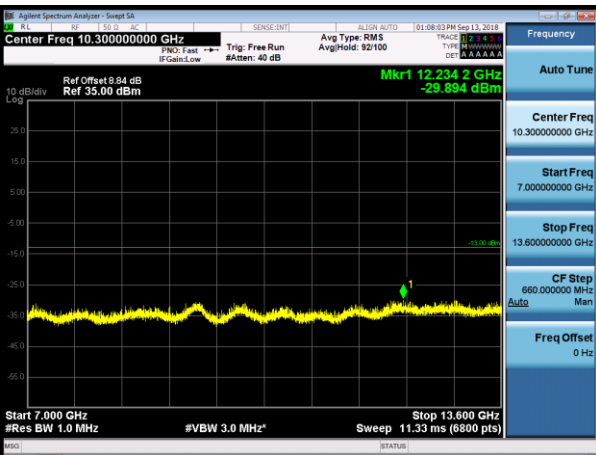


### GSM 1900-LCH-GSM

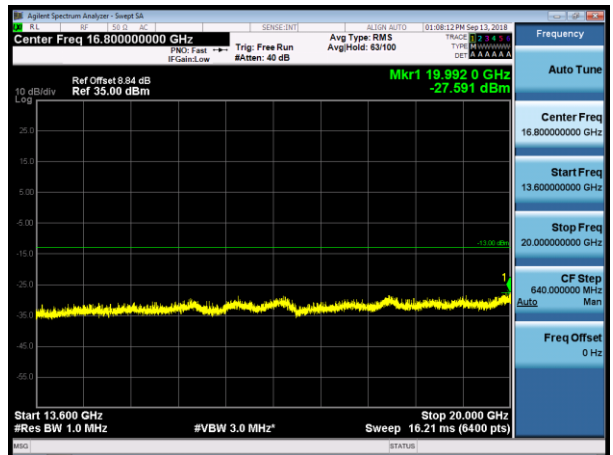





### GSM 1900-MCH-GSM

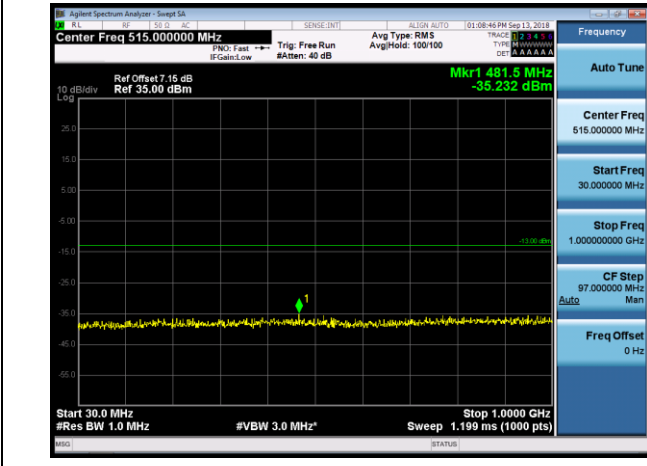


### GSM 1900-MCH-GSM

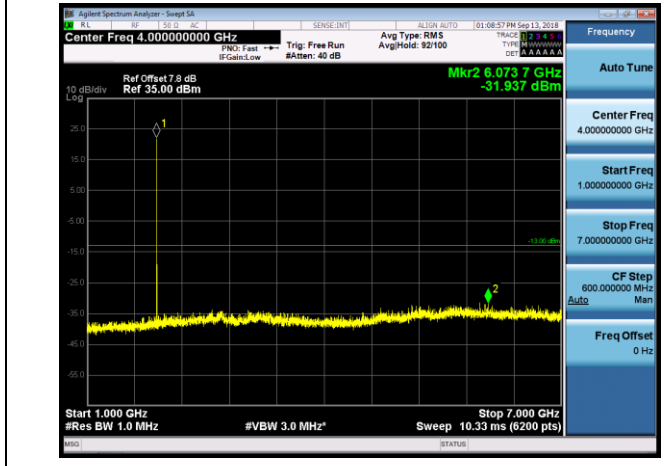

### GSM 1900-MCH-GSM

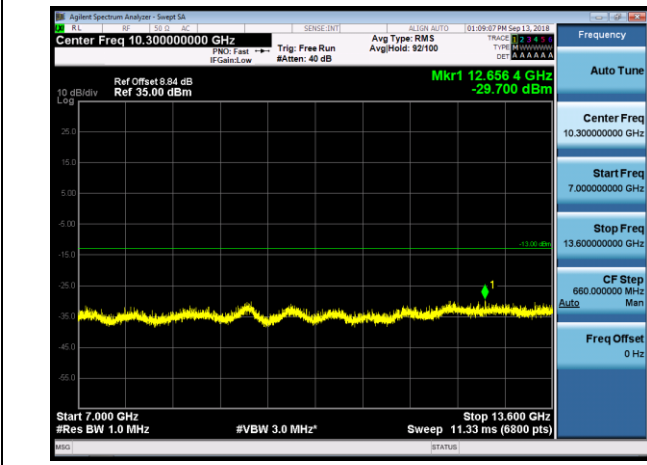


### GSM 1900-MCH-GSM

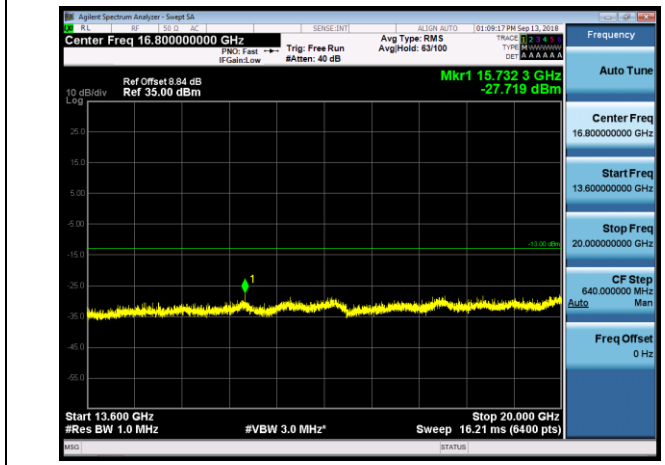





### GSM 1900-HCH-GSM

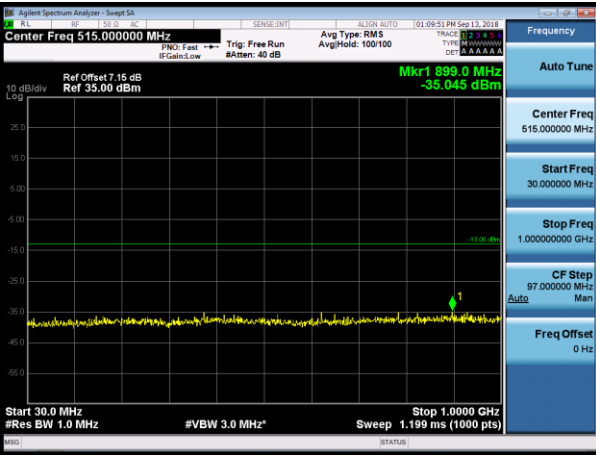

### GSM 1900-HCH-GSM

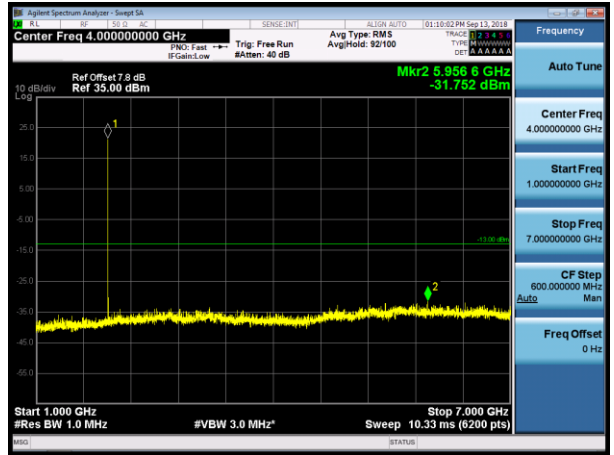

### GSM 1900-HCH-GSM

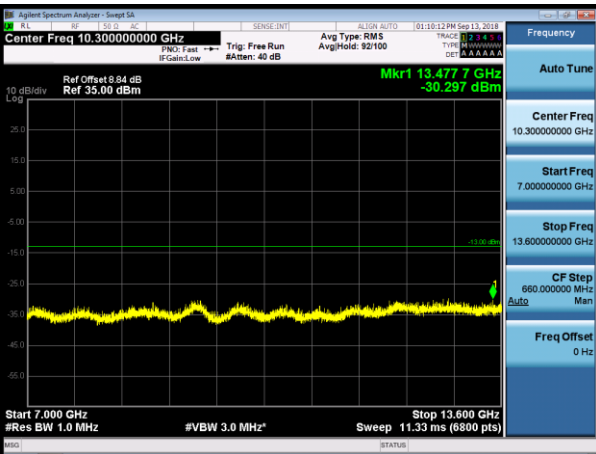

### GSM 1900-HCH-GSM

