

## TEST REPORT

**Product** : Dual Shade LED Lamp  
with Bluetooth Speaker  
**Trade mark** : OttLite  
**Model/Type reference** : HSD9036A  
**Serial Number** : N/A  
**Report Number** : EED32K00158501  
**FCC ID** : 2A17B-HSD9036A  
**Date of Issue** : Jul. 09, 2018  
**Test Standards** : 47 CFR Part 15 Subpart C  
**Test result** : PASS

Prepared for:

**Ottlite Technologies Inc.**  
**220 West 7th Avenue, STE 100, Tampa,**  
**Florida, United States**

Prepared by:

**Centre Testing International Group Co., Ltd.**  
**Hongwei Industrial Zone, Bao'an 70 District,**  
**Shenzhen, Guangdong, China**  
**TEL: +86-755-3368 3668**  
**FAX: +86-755-3368 3385**

Tested By:

*Tom chen*  
Tom chen (Test Project)

Compiled by:

*Kevin lan*  
Kevin lan (Project Engineer)

Reviewed by:

*Kevin yang*  
Kevin yang (Reviewer)

Approved by:

*Sheek Luo*  
Sheek Luo (Lab supervisor)

Date:

Jul. 09, 2018

Check No.: 2447690621



## 2 Version

Version No.	Date	Description
00	Jul. 09, 2018	Original

### 3 Test Summary

Test Item	Test Requirement	Test method	Result
<b>Antenna Requirement</b>	47 CFR Part 15 Subpart C Section 15.203/15.247 (c)	ANSI C63.10-2013	PASS
<b>AC Power Line Conducted Emission</b>	47 CFR Part 15 Subpart C Section 15.207	ANSI C63.10-2013	PASS
<b>Conducted Peak Output Power</b>	47 CFR Part 15 Subpart C Section 15.247 (b)(1)	ANSI C63.10-2013	PASS
<b>20dB Occupied Bandwidth</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Carrier Frequencies Separation</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Hopping Channel Number</b>	47 CFR Part 15 Subpart C Section 15.247 (b)	ANSI C63.10-2013	PASS
<b>Dwell Time</b>	47 CFR Part 15 Subpart C Section 15.247 (a)(1)	ANSI C63.10-2013	PASS
<b>Pseudorandom Frequency Hopping Sequence</b>	47 CFR Part 15 Subpart C Section 15.247(b)(4)&TCB Exclusion List (7 July 2002)	ANSI C63.10-2013	PASS
<b>RF Conducted Spurious Emissions</b>	47 CFR Part 15 Subpart C Section 15.247(d)	ANSI C63.10-2013	PASS
<b>Radiated Spurious emissions</b>	47 CFR Part 15 Subpart C Section 15.205/15.209	ANSI C63.10-2013	PASS

**Remark:**

Test according to ANSI C63.4-2014 & ANSI C63.10-2013.

The tested sample(s) and the sample information are provided by the client.


## 4 Content

<b>1 COVER PAGE</b> .....	<b>1</b>
<b>2 VERSION</b> .....	<b>2</b>
<b>3 TEST SUMMARY</b> .....	<b>3</b>
<b>4 CONTENT</b> .....	<b>4</b>
<b>5 TEST REQUIREMENT</b> .....	<b>5</b>
5.1 TEST SETUP.....	5
5.1.1 For Conducted test setup.....	5
5.1.2 For Radiated Emissions test setup.....	5
5.1.3 For Conducted Emissions test setup.....	6
5.2 TEST ENVIRONMENT.....	6
5.3 TEST CONDITION.....	6
<b>6 GENERAL INFORMATION</b> .....	<b>7</b>
6.1 CLIENT INFORMATION.....	7
6.2 GENERAL DESCRIPTION OF EUT.....	7
6.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD.....	7
6.4 DESCRIPTION OF SUPPORT UNITS.....	8
6.5 TEST LOCATION.....	8
6.6 DEVIATION FROM STANDARDS.....	8
6.7 ABNORMALITIES FROM STANDARD CONDITIONS.....	8
6.8 OTHER INFORMATION REQUESTED BY THE CUSTOMER.....	9
6.9 MEASUREMENT UNCERTAINTY (95% CONFIDENCE LEVELS, K=2).....	9
<b>7 EQUIPMENT LIST</b> .....	<b>10</b>
<b>8 RADIO TECHNICAL REQUIREMENTS SPECIFICATION</b> .....	<b>12</b>
Appendix A): 20dB Occupied Bandwidth.....	13
Appendix B): Carrier Frequency Separation.....	16
Appendix C): Dwell Time.....	19
Appendix D): Hopping Channel Number.....	23
Appendix E): Conducted Peak Output Power.....	24
Appendix F): Band-edge for RF Conducted Emissions.....	27
Appendix G): RF Conducted Spurious Emissions.....	30
Appendix H): Pseudorandom Frequency Hopping Sequence.....	35
Appendix I): Antenna Requirement.....	36
Appendix J): AC Power Line Conducted Emission.....	37
Appendix K): Restricted bands around fundamental frequency (Radiated).....	40
Appendix L): Radiated Spurious Emissions.....	49
<b>PHOTOGRAPHS OF TEST SETUP</b> .....	<b>55</b>
<b>PHOTOGRAPHS OF EUT CONSTRUCTIONAL DETAILS</b> .....	<b>57</b>

## 5 Test Requirement

### 5.1 Test setup

#### 5.1.1 For Conducted test setup

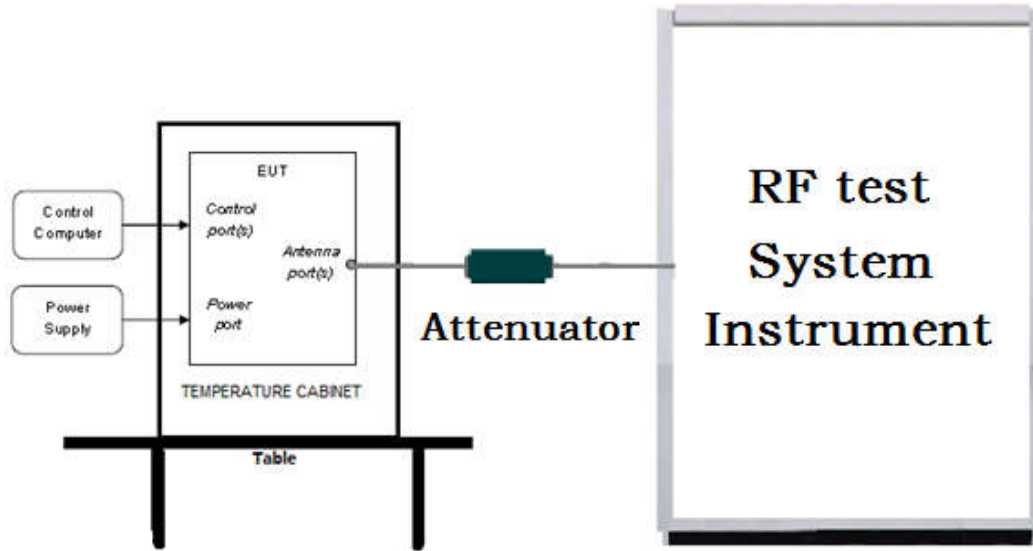

#### 5.1.2 For Radiated Emissions test setup

Radiated Emissions setup:

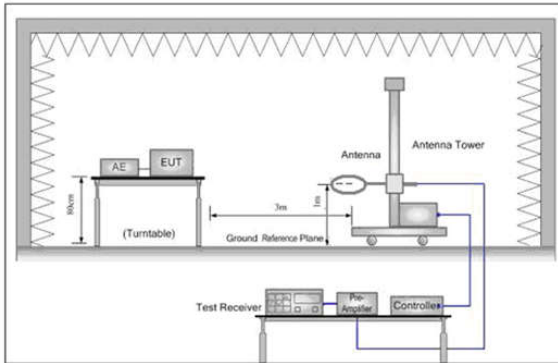


Figure 1. Below 30MHz

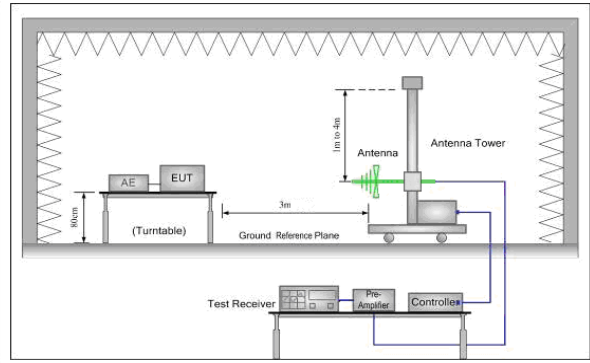


Figure 2. 30MHz to 1GHz


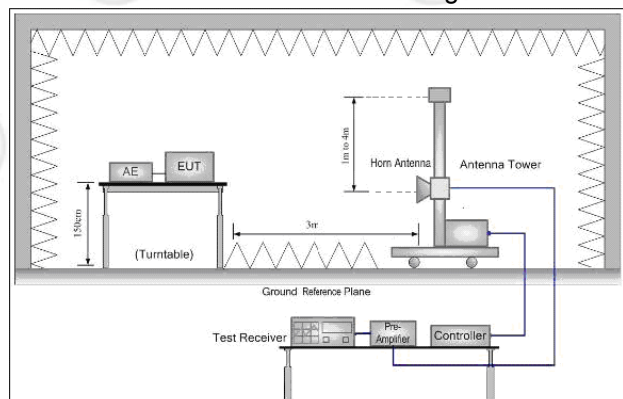


Figure 3. Above 1GHz

**5.1.3 For Conducted Emissions test setup**  
**Conducted Emissions setup**

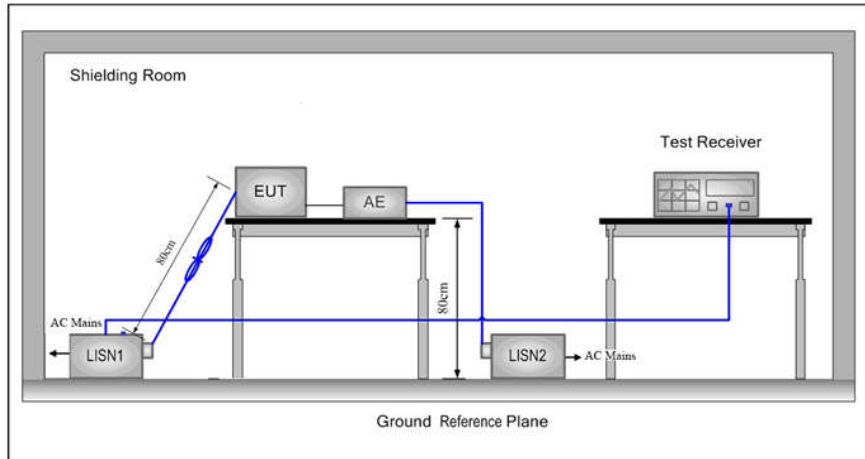

**5.2 Test Environment**

<b>Operating Environment:</b>	
Temperature:	25 °C
Humidity:	51 % RH
Atmospheric Pressure:	1010mbar

**5.3 Test Condition**

Test Mode	Tx/Rx	RF Channel		
		Low(L)	Middle(M)	High(H)
GFSK/ $\pi$ /4DQPSK(DH1, DH3, DH5)	2402MHz ~2480MHz	Channel 1	Channel 40	Channel79
		2402MHz	2441MHz	2480MHz

Test mode:

**Pre-scan under all rate at lowest channel 1**

Mode	GFSK		
packets	1-DH1	1-DH3	1-DH5
EIRP(dBm)	-4.841	-4.830	-4.825

Mode	$\pi$ /4DQPSK		
packets	2-DH1	2-DH3	2-DH5
EIRP(dBm)	-3.495	-3.480	-3.479

Through Pre-scan, 1-DH5 packet the power is the worst case of GFSK, 2-DH5 packet the power is the worst case of  $\pi$ /4DQPSK.

## 6 General Information

### 6.1 Client Information

Applicant:	Ottlite Technologies Inc.
Address of Applicant:	220 West 7th Avenue, STE 100, Tampa, Florida, United States
Manufacturer:	SHENZHEN HIGHSTAR ELECTRICAL CO.,LTD.
Address of Manufacturer:	2F,4&5F, Building6, Ya Lian Highstar Industrial Zone, 5022 Wuhe Avenue, Bantian Street, Longgang District Shenzhen 518129 China
Factory:	SHENZHEN HIGHSTAR ELECTRICAL CO.,LTD.
Address of Factory:	2F,4&5F, Building6, Ya Lian Highstar Industrial Zone, 5022 Wuhe Avenue, Bantian Street, Longgang District Shenzhen 518129 China

### 6.2 General Description of EUT

Product Name:	Dual Shade LED Lamp with Bluetooth Speaker
Model No.(EUT):	HSD9036A
Trade mark:	OttLite
EUT Supports Radios application:	BT 4.2 Signal mode, 2402-2480MHz;
Hardware Version:	rev.1.2(manufacturer declare)
Firmware version:	rev.2.4(manufacturer declare)
Power Supply:	AC adapter: MODEL No.: TEKA024-0503000UK INPUT: 100-240V~50/60Hz, 0.7A MAX OUTPUT: 5V 3A
Sample Received Date:	Jun. 21, 2018
Sample tested Date:	Jun. 21, 2018 to Jul. 05, 2018

### 6.3 Product Specification subjective to this standard

Operation Frequency:	2402MHz~2480MHz
Bluetooth Version:	BT 4.2 Signal mode
Modulation Technique:	Frequency Hopping Spread Spectrum(FHSS)
Modulation Type:	GFSK, $\pi/4$ DQPSK
Number of Channel:	79
Hopping Channel Type:	Adaptive Frequency Hopping systems
Sample Type:	Mobile production
Test Power Grade:	Transmit Power:2(manufacturer declare)
Test Software of EUT:	FCCAssist.exe(manufacturer declare)
Antenna Type and Gain:	Type: PCB Antenna; Gain: -0.58 dBi
Test Voltage:	AC 120V, 60Hz

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

## 6.4 Description of Support Units

The EUT has been tested independently.

## 6.5 Test Location

All tests were performed at:

Centre Testing International Group Co., Ltd.

Building C, Hongwei Industrial Park Block 70, Bao'an District, Shenzhen, Guangdong, China 518101

Telephone: +86 (0) 755 33683668 Fax: +86 (0) 755 33683385

No tests were sub-contracted.

FCC Designation No.: CN1164

## 6.6 Deviation from Standards

None.

## 6.7 Abnormalities from Standard Conditions

None.



## 6.8 Other Information Requested by the Customer

None.

## 6.9 Measurement Uncertainty (95% confidence levels, k=2)

No.	Item	Measurement Uncertainty
1	Radio Frequency	$7.9 \times 10^{-8}$
2	RF power, conducted	0.31dB (30MHz-1GHz)
		0.57dB (1GHz-18GHz)
3	Radiated Spurious emission test	4.5dB (30MHz-1GHz)
		4.8dB (1GHz-12.75GHz)
4	Conduction emission	3.6dB (9kHz to 150kHz)
		3.2dB (150kHz to 30MHz)
5	Temperature test	0.64°C
6	Humidity test	2.8%
7	DC power voltages	0.025%

## 7 Equipment List

RF test system					
Equipment	Manufacturer	Model No.	Serial Number	Cal. Date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Spectrum Analyzer	Keysight	N9010A	MY54510339	03-13-2018	03-12-2019
Signal Generator	Keysight	N5182B	MY53051549	03-13-2018	03-12-2019
High-pass filter	Sinoscite	FL3CX03WG 18NM12- 0398-002	---	01-10-2018	01-09-2019
DC Power	Keysight	E3642A	MY54426035	03-13-2018	03-12-2019
power meter & power sensor	R&S	OSP120	101374	03-13-2018	03-12-2019
RF control unit	JS Tonscend	JS0806-2	158060006	03-13-2018	03-12-2019
Temperature / Humidity Indicator	Defu	TH128	---	07-08-2017	07-07-2018

Conducted disturbance Test					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
Receiver	R&S	ESCI	100009	05-25-2018	05-24-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
LISN	schwarzbeck	NNLK8121	8121-529	05-11-2018	05-10-2019

3M Semi/full-anechoic Chamber					
Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm-dd-yyyy)	Cal. Due date (mm-dd-yyyy)
3M Chamber & Accessory Equipment	TDK	SAC-3	---	06-04-2016	06-03-2019
Spectrum Analyzer	Agilent	E4443A	MY45300910	11-16-2017	11-15-2018
TRILOG Broadband Antenna	SCHWARZBECK	VULB9163	9163-618	08-15-2017	08-14-2018
Microwave Preamplifier	JS Tonscend	EMC051845SE	980380	01-19-2018	01-18-2019
Horn Antenna	ETS-LINDGREN	3117	00057407	07-20-2015	07-18-2018
Loop Antenna	ETS	6502	00071730	06-22-2017	06-21-2019
Spectrum Analyzer	R&S	FSP40	100416	05-11-2018	05-10-2019
Receiver	R&S	ESCI	100435	05-25-2018	05-24-2019
Double ridge horn antenna	A.H.SYSTEMS	SAS-574	6042	06-05-2018	06-03-2021
Pre-amplifier	A.H.SYSTEMS	PAP-1840-60	6041	06-05-2018	06-03-2021
LISN	schwarzbeck	NNBM8125	81251547	05-11-2018	05-10-2019
LISN	schwarzbeck	NNBM8125	81251548	05-11-2018	05-10-2019
Signal Generator	Agilent	E4438C	MY45095744	03-13-2018	03-12-2019
Signal Generator	Keysight	E8257D	MY53401106	03-13-2018	03-12-2019
Temperature/ Humidity Indicator	TAYLOR	1451	1905	05-02-2018	05-01-2019
Cable line	Fulai(7M)	SF106	5219/6A	01-10-2018	01-09-2019
Cable line	Fulai(6M)	SF106	5220/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5216/6A	01-10-2018	01-09-2019
Cable line	Fulai(3M)	SF106	5217/6A	01-10-2018	01-09-2019
High-pass filter	Sinoscite	FL3CX03WG18 NM12-0398-002	---	01-10-2018	01-09-2019
High-pass filter	MICRO-TRONICS	SPA-F-63029-4	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA09 CL12-0395-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX01CA08 CL12-0393-001	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA04 CL12-0396-002	---	01-10-2018	01-09-2019
band rejection filter	Sinoscite	FL5CX02CA03 CL12-0394-001	---	01-10-2018	01-09-2019

## 8 Radio Technical Requirements Specification

### Reference documents for testing:

No.	Identity	Document Title
1	FCC Part15C	Subpart C-Intentional Radiators
2	ANSI C63.10-2013	American National Standard for Testing Unlicensed Wireless Devices

### Test Results List:

Test requirement	Test method	Test item	Verdict	Note
Part15C Section 15.247 (a)(1)	ANSI 63.10	20dB Occupied Bandwidth	PASS	Appendix A)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Carrier Frequencies Separation	PASS	Appendix B)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Dwell Time	PASS	Appendix C)
Part15C Section 15.247 (b)	ANSI 63.10	Hopping Channel Number	PASS	Appendix D)
Part15C Section 15.247 (b)(1)	ANSI 63.10	Conducted Peak Output Power	PASS	Appendix E)
Part15C Section 15.247(d)	ANSI 63.10	Band-edge for RF Conducted Emissions	PASS	Appendix F)
Part15C Section 15.247(d)	ANSI 63.10	RF Conducted Spurious Emissions	PASS	Appendix G)
Part15C Section 15.247 (a)(1)	ANSI 63.10	Pseudorandom Frequency Hopping Sequence	PASS	Appendix H)
Part15C Section 15.203/15.247 (c)	ANSI 63.10	Antenna Requirement	PASS	Appendix I)
Part15C Section 15.207	ANSI 63.10	AC Power Line Conducted Emission	PASS	Appendix J)
Part15C Section 15.205/15.209	ANSI 63.10	Restricted bands around fundamental frequency (Radiated) Emission)	PASS	Appendix K)
Part15C Section 15.205/15.209	ANSI 63.10	Radiated Spurious Emissions	PASS	Appendix L)

## Appendix A): 20dB Occupied Bandwidth

### Test Result

Mode	Channel.	20dB Bandwidth [MHz]	99% OBW [MHz]	Verdict
GFSK	LCH	0.9173	0.84462	PASS
GFSK	MCH	0.8567	0.83921	PASS
GFSK	HCH	0.9108	0.84194	PASS
$\pi/4$ DQPSK	LCH	1.224	1.1647	PASS
$\pi/4$ DQPSK	MCH	1.224	1.1688	PASS
$\pi/4$ DQPSK	HCH	1.226	1.1715	PASS

**Test Graph**



<p><math>\pi/4</math>DQPSK/LCH</p>	<p>Center Freq 2.40200000 GHz</p> <p>Center Freq: 2.40200000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p>Center 2.402 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1647 MHz Total Power 2.39 dBm</p> <p>Transmit Freq Error 6.107 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.224 MHz x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/MCH</p>	<p>Center Freq 2.44100000 GHz</p> <p>Center Freq: 2.44100000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p>Center 2.441 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1688 MHz Total Power 2.11 dBm</p> <p>Transmit Freq Error 6.578 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.224 MHz x dB -20.00 dB</p>
<p><math>\pi/4</math>DQPSK/HCH</p>	<p>Center Freq 2.48000000 GHz</p> <p>Center Freq: 2.48000000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p>Center 2.48 GHz #Res BW 30 kHz #VBW 100 kHz Span 3 MHz Sweep 3.2 ms</p> <p>Occupied Bandwidth 1.1715 MHz Total Power 1.98 dBm</p> <p>Transmit Freq Error 5.890 kHz OBW Power 99.00 %</p> <p>x dB Bandwidth 1.226 MHz x dB -20.00 dB</p>

## Appendix B): Carrier Frequency Separation




### Result Table

Mode	Channel.	Carrier Frequency Separation [MHz]	Verdict
GFSK	LCH	1.010	PASS
GFSK	MCH	0.976	PASS
GFSK	HCH	1.094	PASS
$\pi/4$ DQPSK	LCH	1.004	PASS
$\pi/4$ DQPSK	MCH	0.978	PASS
$\pi/4$ DQPSK	HCH	1.038	PASS



**Test Graph**

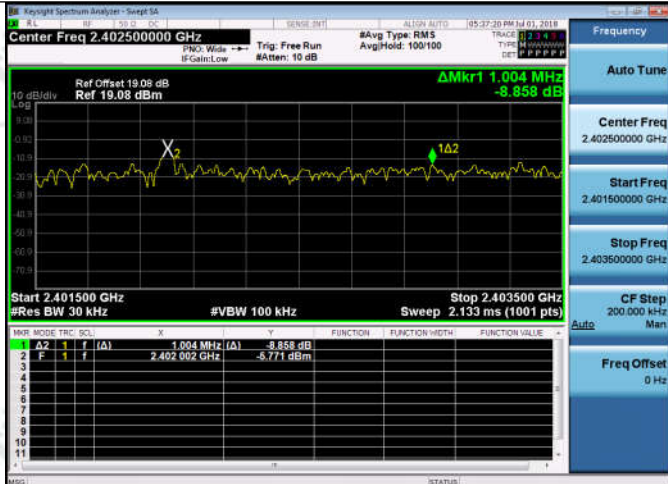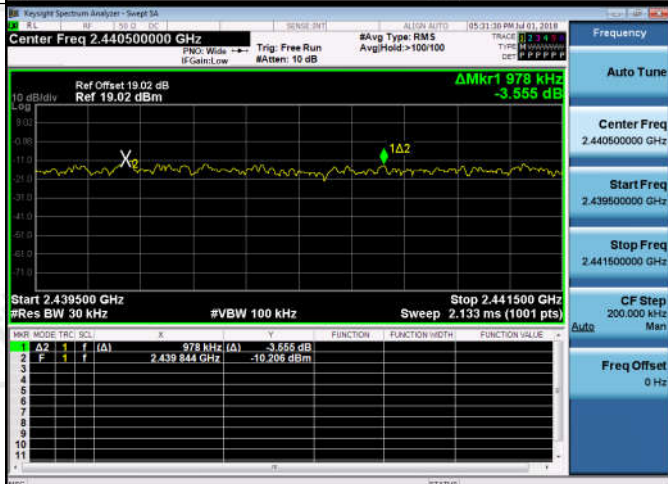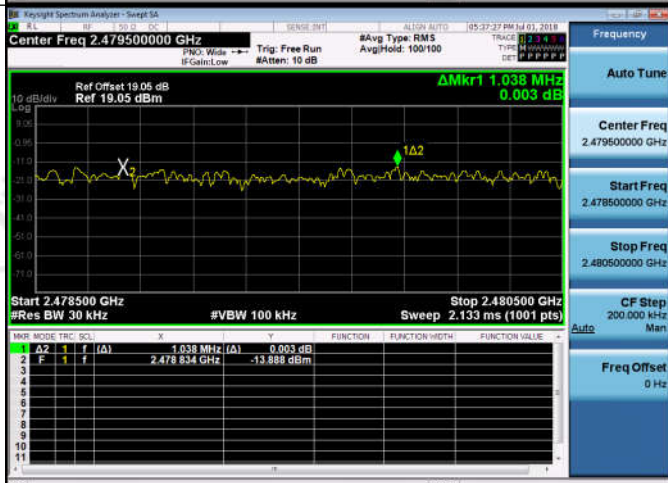

<p><math>\pi/4</math>DQPSK/LCH</p>	 <p>Center Freq 2.402500000 GHz</p> <p>Ref Offset 19.08 dB Ref 19.08 dBm</p> <p><math>\Delta</math>Mkr1 1.004 MHz -8.858 dB</p> <p>Start 2.401500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.403500 GHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.004 MHz (<math>\Delta</math>)</td> <td></td> <td></td> <td>-8.858 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.402 002 GHz</td> <td></td> <td></td> <td>-5.771 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.004 MHz ( $\Delta$ )			-8.858 dB	2	F	1	f		2.402 002 GHz			-5.771 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.004 MHz ( $\Delta$ )			-8.858 dB																				
2	F	1	f		2.402 002 GHz			-5.771 dBm																				
<p><math>\pi/4</math>DQPSK/MCH</p>	 <p>Center Freq 2.440500000 GHz</p> <p>Ref Offset 19.02 dB Ref 19.02 dBm</p> <p><math>\Delta</math>Mkr1 978 kHz -3.555 dB</p> <p>Start 2.439500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.441500 GHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>978 kHz (<math>\Delta</math>)</td> <td></td> <td></td> <td>-3.555 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.439 844 GHz</td> <td></td> <td></td> <td>-10.205 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	978 kHz ( $\Delta$ )			-3.555 dB	2	F	1	f		2.439 844 GHz			-10.205 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	978 kHz ( $\Delta$ )			-3.555 dB																				
2	F	1	f		2.439 844 GHz			-10.205 dBm																				
<p><math>\pi/4</math>DQPSK/HCH</p>	 <p>Center Freq 2.479500000 GHz</p> <p>Ref Offset 19.05 dB Ref 19.05 dBm</p> <p><math>\Delta</math>Mkr1 1.038 MHz 0.003 dB</p> <p>Start 2.478500 GHz #Res BW 30 kHz #VBW 100 kHz Stop 2.480500 GHz Sweep 2.133 ms (1001 pts)</p> <table border="1"> <thead> <tr> <th>MKR</th> <th>MODE</th> <th>TRIG</th> <th>SCL</th> <th>X</th> <th>Y</th> <th>FUNCTION</th> <th>FUNCTION METH</th> <th>FUNCTION VALUE</th> </tr> </thead> <tbody> <tr> <td>1</td> <td><math>\Delta</math>Z</td> <td>1</td> <td>f</td> <td>(<math>\Delta</math>)</td> <td>1.038 MHz (<math>\Delta</math>)</td> <td></td> <td></td> <td>0.003 dB</td> </tr> <tr> <td>2</td> <td>F</td> <td>1</td> <td>f</td> <td></td> <td>2.478 834 GHz</td> <td></td> <td></td> <td>-13.888 dBm</td> </tr> </tbody> </table>	MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE	1	$\Delta$ Z	1	f	( $\Delta$ )	1.038 MHz ( $\Delta$ )			0.003 dB	2	F	1	f		2.478 834 GHz			-13.888 dBm
MKR	MODE	TRIG	SCL	X	Y	FUNCTION	FUNCTION METH	FUNCTION VALUE																				
1	$\Delta$ Z	1	f	( $\Delta$ )	1.038 MHz ( $\Delta$ )			0.003 dB																				
2	F	1	f		2.478 834 GHz			-13.888 dBm																				


## Appendix C): Dwell Time


### Result Table

Mode	Packet	Channel	Burst Width [ms/hop/ch]	Total Hops[hop*ch]	Dwell Time[s]	Duty Cycle [%]	Verdict
GFSK	DH1	LCH	0.407867	320	0.131	0.33	PASS
GFSK	DH1	MCH	0.407866	320	0.131	0.33	PASS
GFSK	DH1	HCH	0.40787	320	0.131	0.33	PASS
GFSK	DH3	LCH	1.66313	160	0.266	0.67	PASS
GFSK	DH3	MCH	1.66314	160	0.266	0.67	PASS
GFSK	DH3	HCH	1.66313	160	0.266	0.67	PASS
GFSK	DH5	LCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	MCH	2.898	106.7	0.309	0.77	PASS
GFSK	DH5	HCH	2.898	106.7	0.309	0.77	PASS

Remark : All modes are tested, only the worst mode GFSK is reported.

**Test Graph**

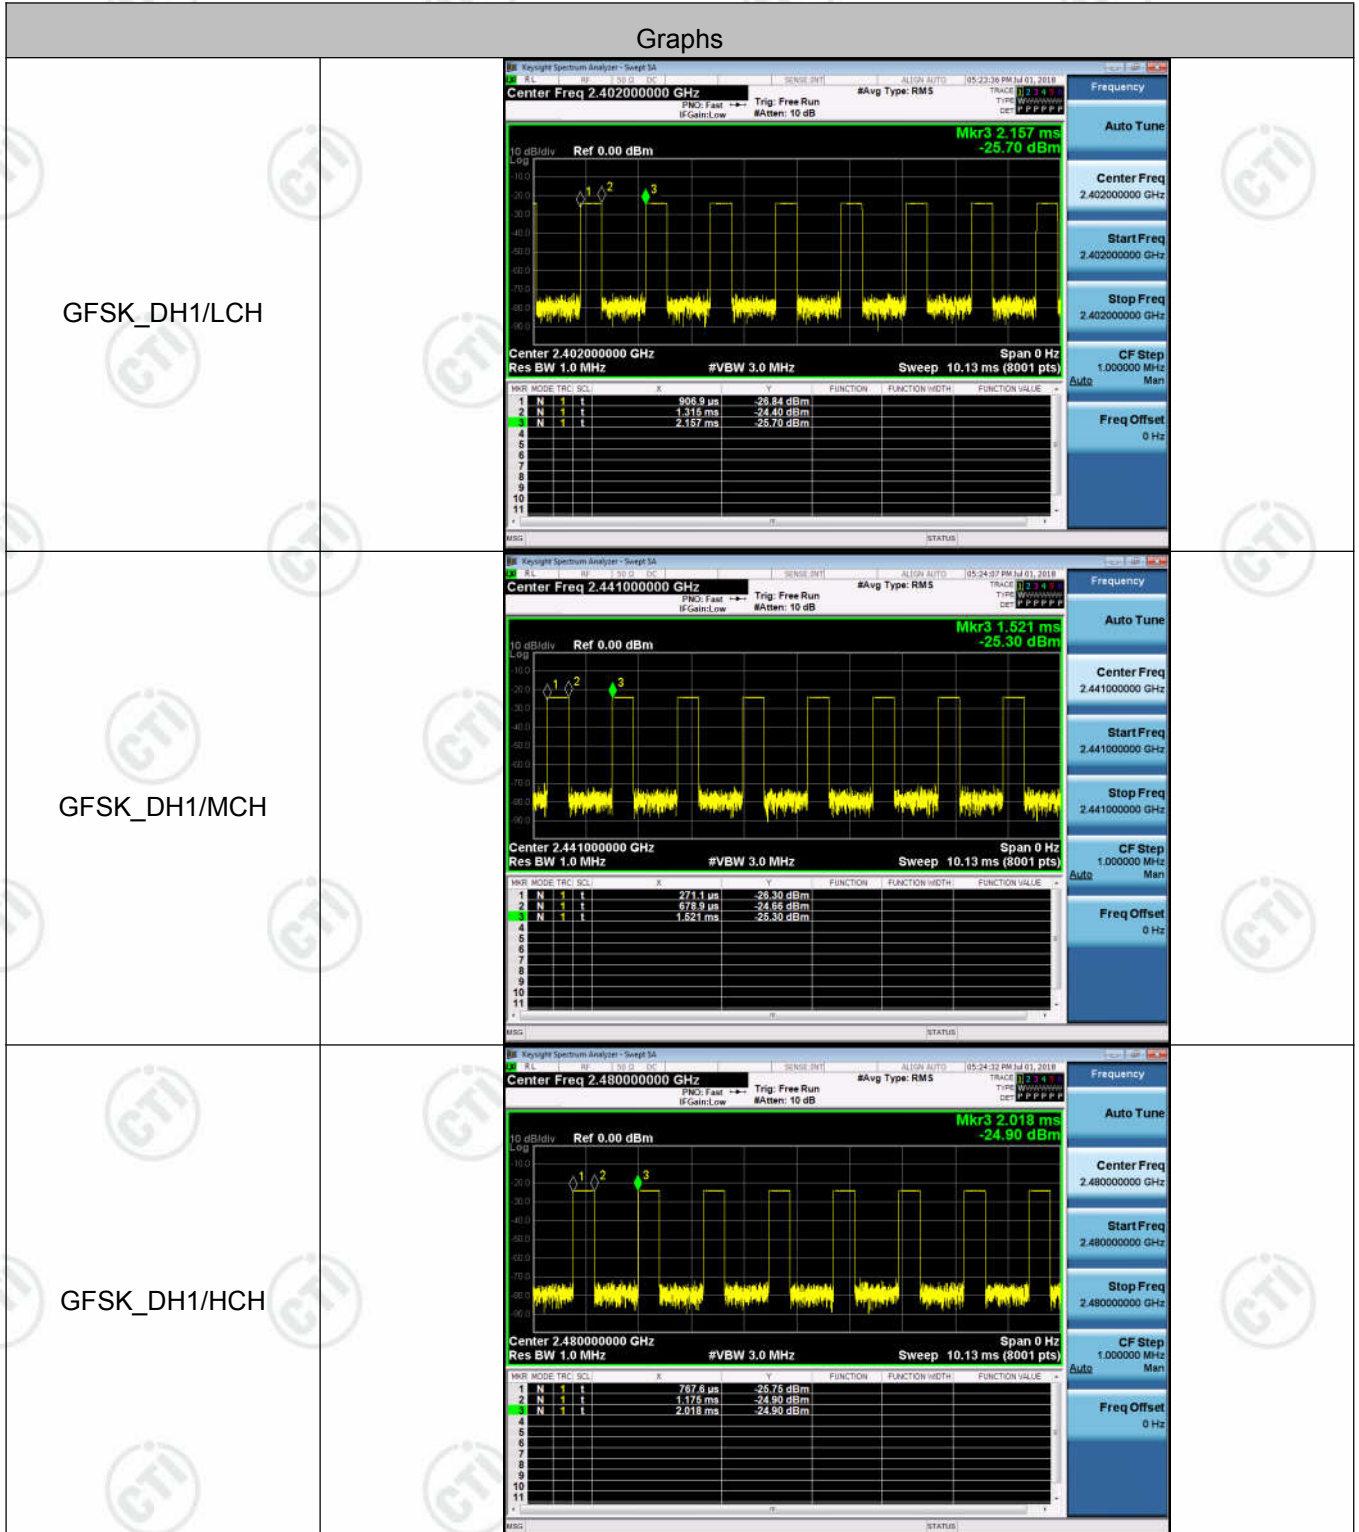

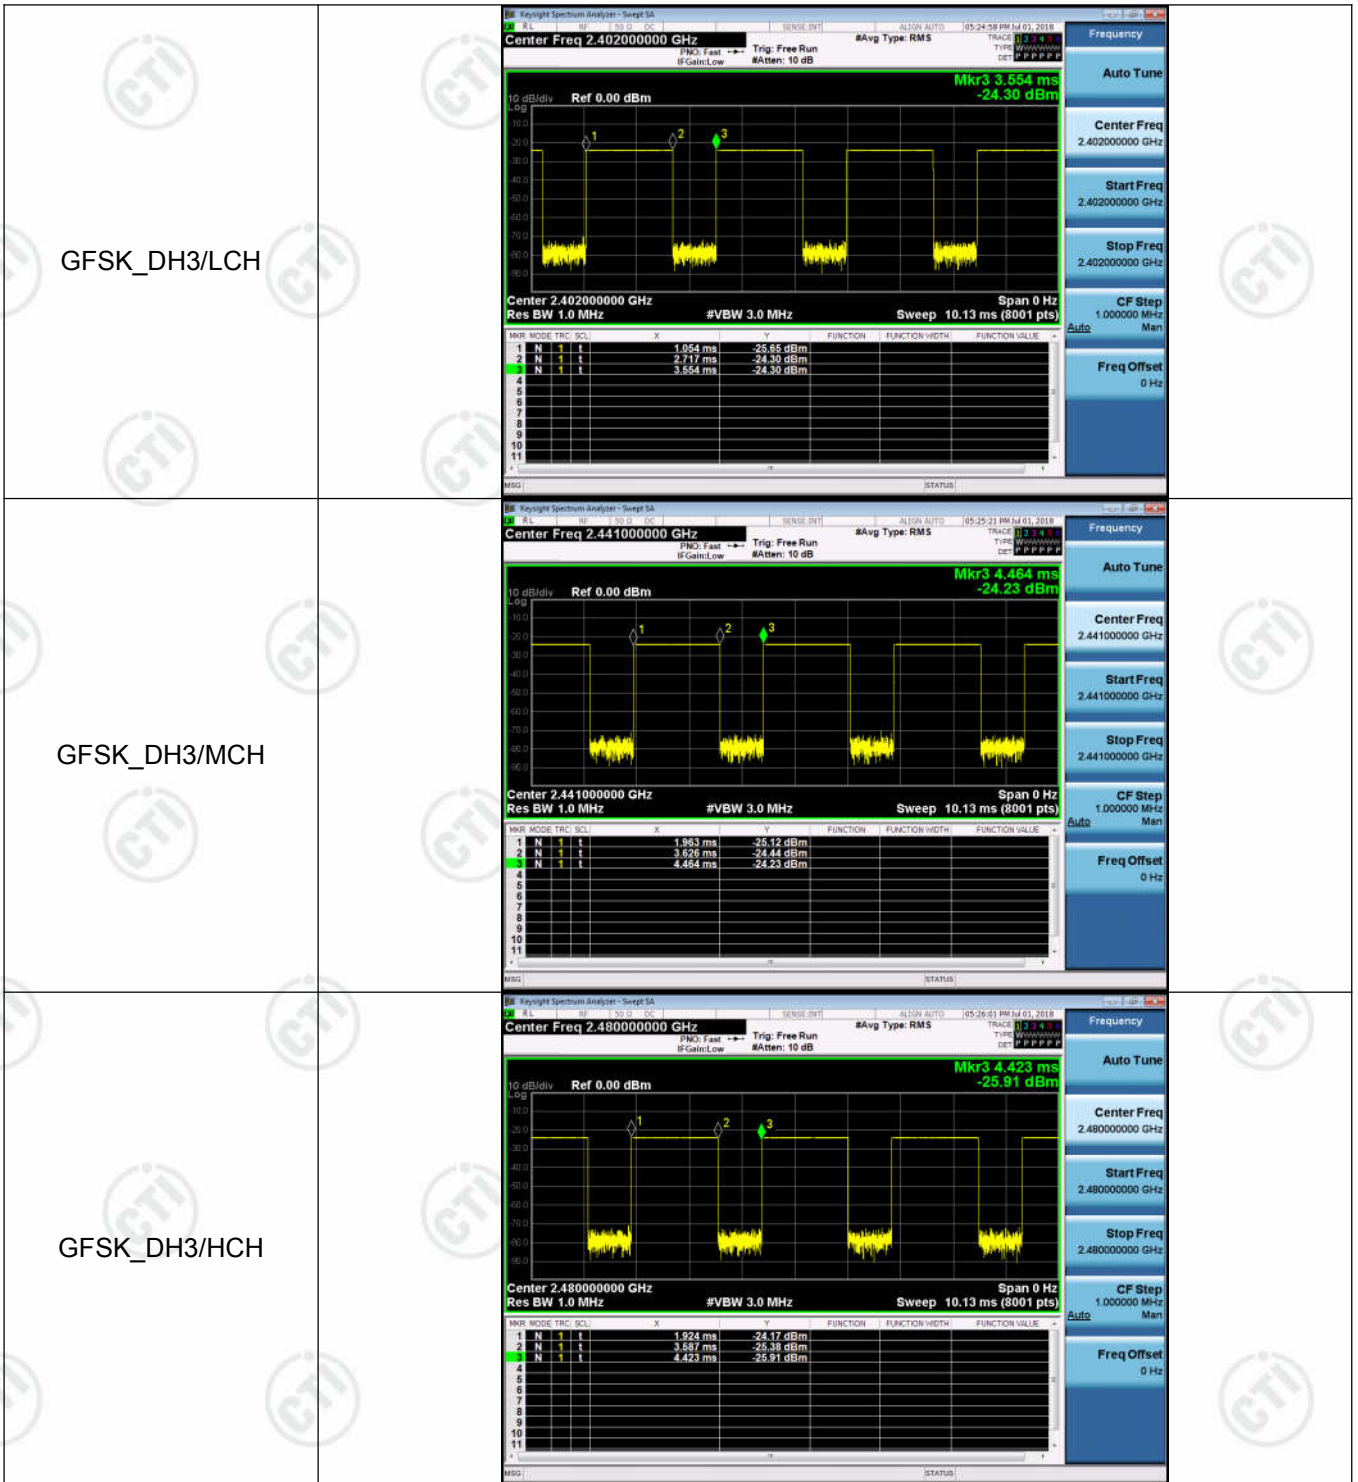


<p>GFSK_DH5/LCH</p>	
<p>GFSK_DH5/MCH</p>	
<p>GFSK_DH5/HCH</p>	

## Appendix D): Hopping Channel Number

### Result Table

Mode	Channel.	Number of Hopping Channel	Verdict
GFSK	Hop	79	PASS
$\pi/4$ DQPSK	Hop	79	PASS

### Test Graph

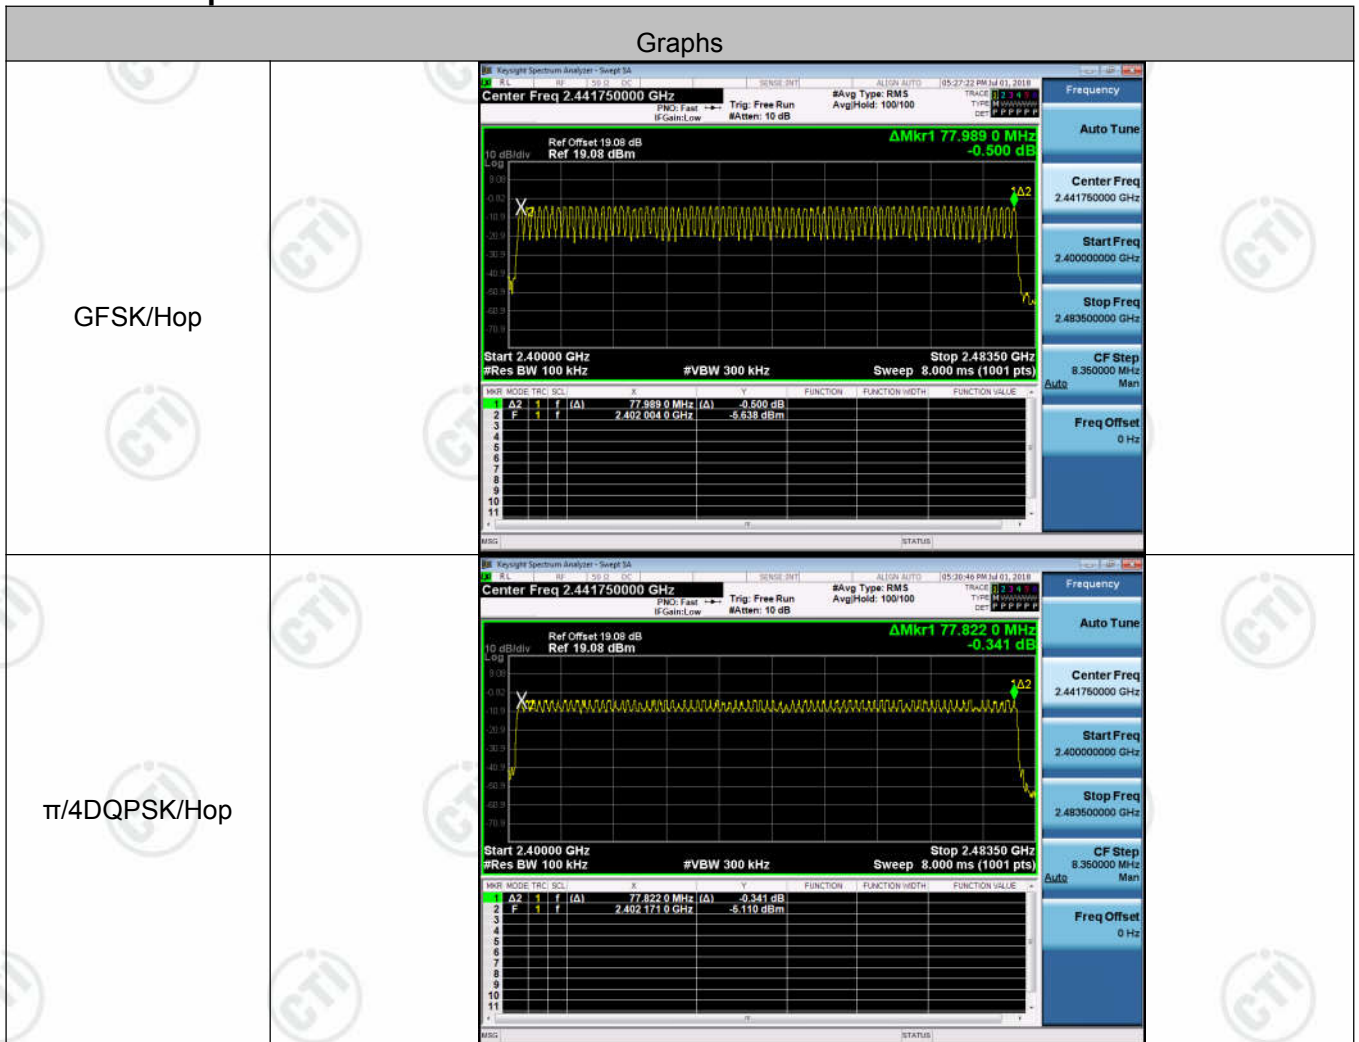


## Appendix E): Conducted Peak Output Power




### Result Table

Mode	Channel.	Maximum Peak Output Power [dBm]	Verdict
GFSK	LCH	-4.825	PASS
GFSK	MCH	-5.037	PASS
GFSK	HCH	-4.967	PASS
$\pi/4$ DQPSK	LCH	-3.479	PASS
$\pi/4$ DQPSK	MCH	-3.661	PASS
$\pi/4$ DQPSK	HCH	-3.626	PASS

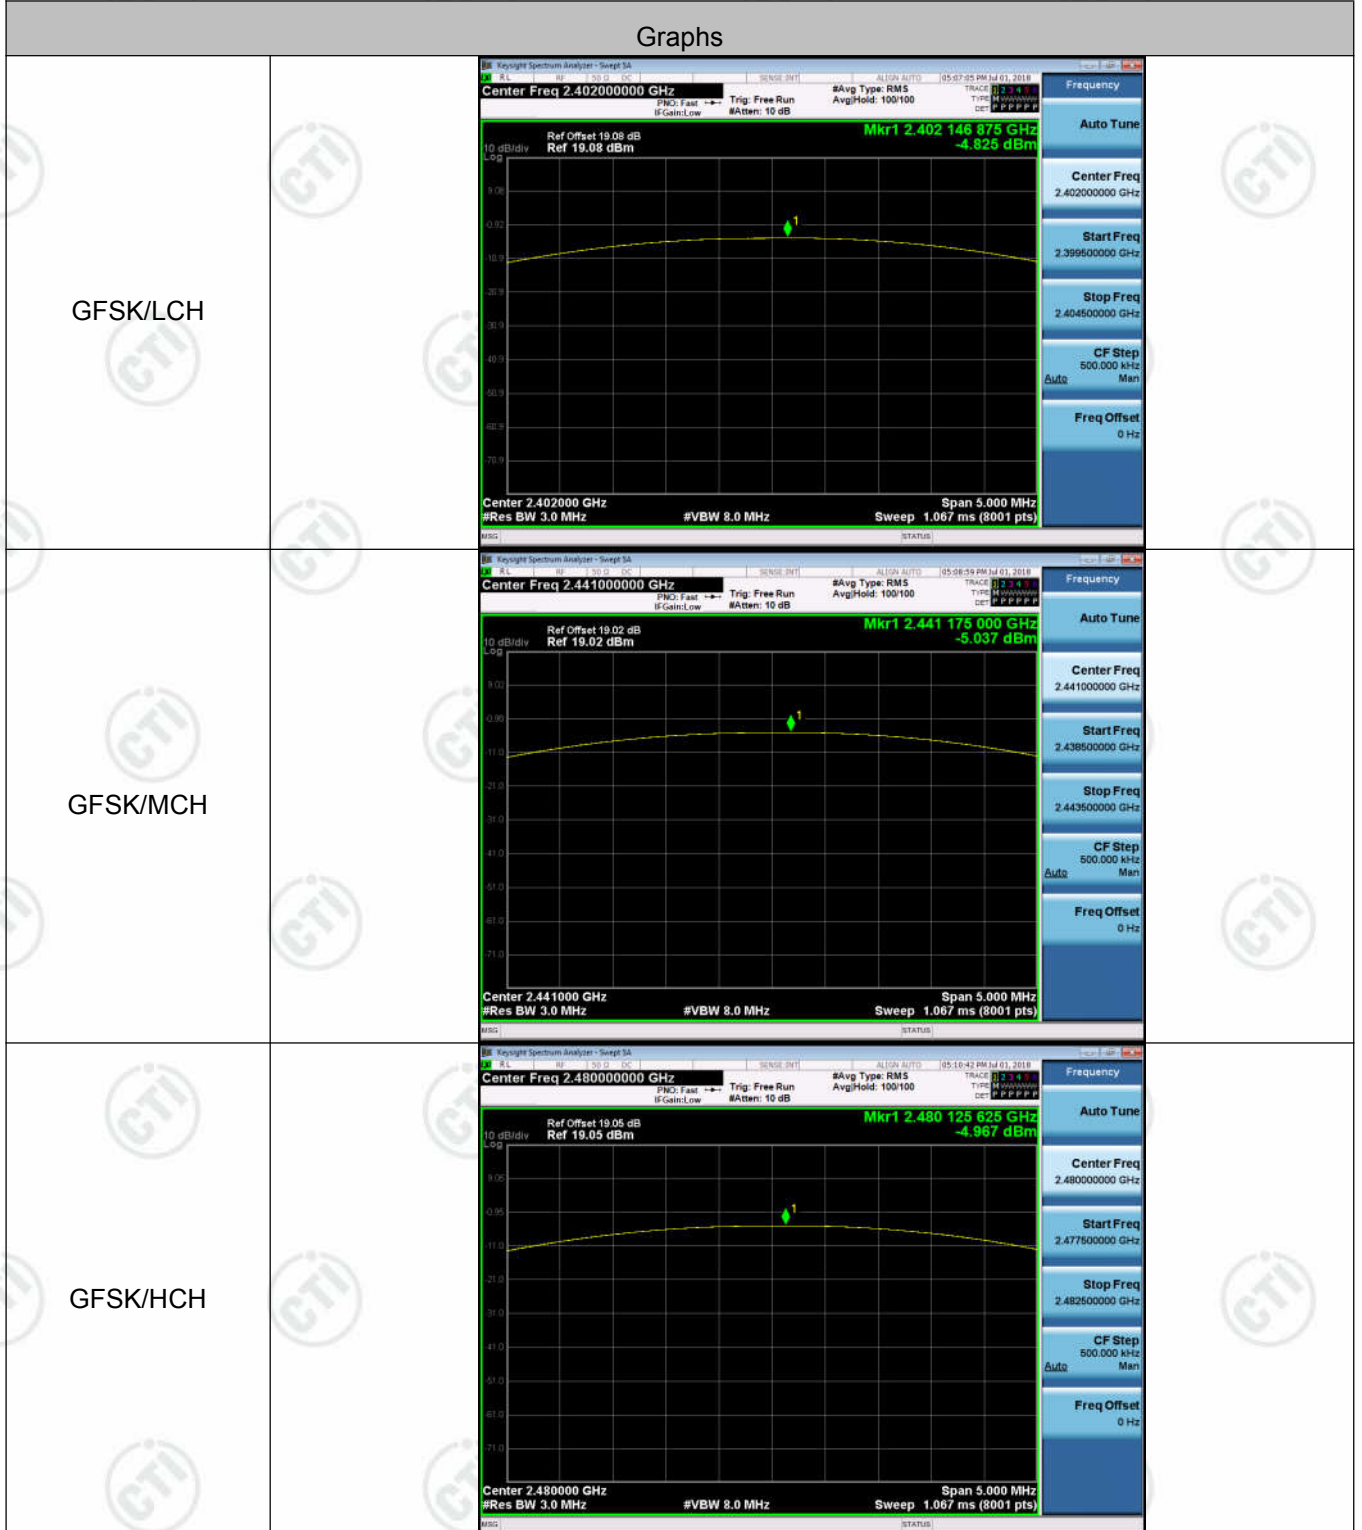

**Test Graph**




<p><math>\pi/4</math>DQPSK/LCH</p>	
<p><math>\pi/4</math>DQPSK/MCH</p>	
<p><math>\pi/4</math>DQPSK/HCH</p>	




## Appendix F): Band-edge for RF Conducted Emissions


Result Table

Mode	Channel	Carrier Frequency [MHz]	Carrier Power [dBm]	Frequency Hopping	Max Spurious Level [dBm]	Limit [dBm]	Verdict
GFSK	LCH	2402	-4.990	Off	-54.698	-24.99	PASS
			-5.017	On	-49.232	-25.02	PASS
GFSK	HCH	2480	-5.161	Off	-53.897	-25.16	PASS
			-5.139	On	-50.856	-25.14	PASS
$\pi/4$ DQPSK	LCH	2402	-4.931	Off	-54.892	-24.93	PASS
			-4.795	On	-50.821	-24.8	PASS
$\pi/4$ DQPSK	HCH	2480	-5.084	Off	-53.918	-25.08	PASS
			-5.028	On	-50.448	-25.03	PASS

Test Graph

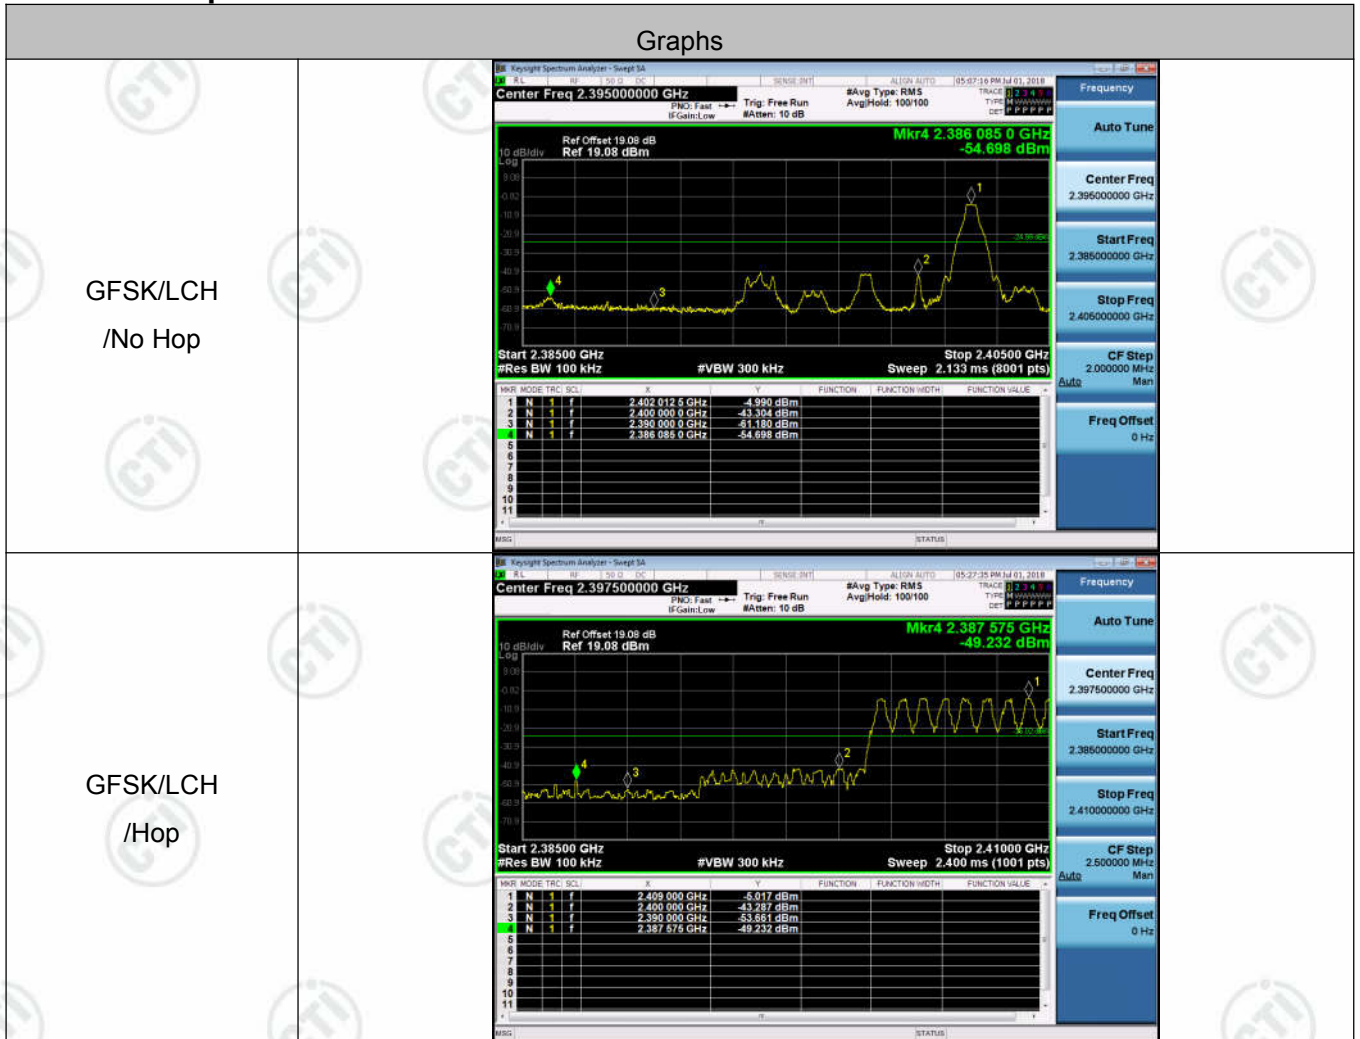
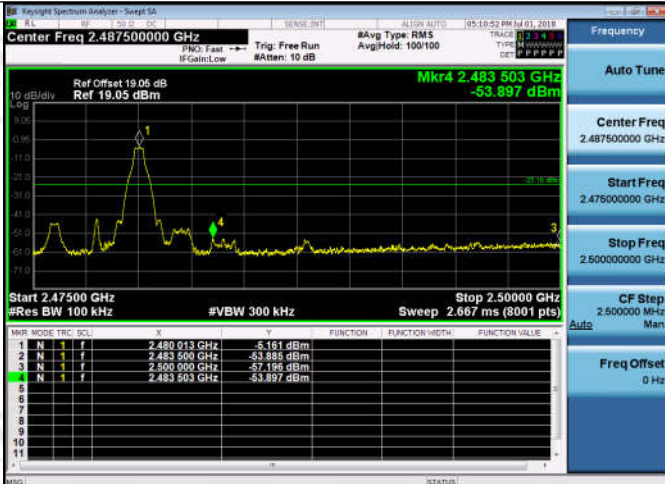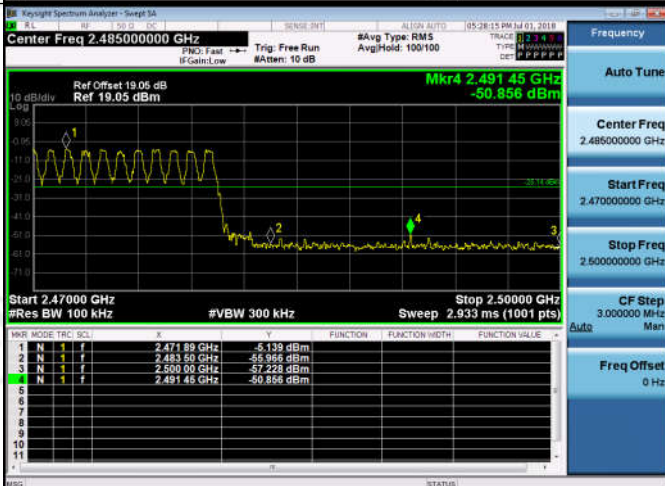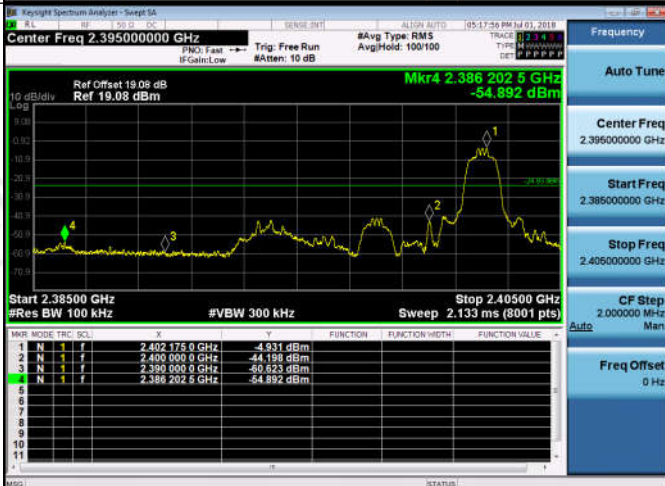
<p>GFSK/HCH /No Hop</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.487500000 GHz</p> <p>Start Freq 2.476000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 2.500000 MHz</p> <p>Freq Offset 0 Hz</p>
<p>GFSK/HCH /Hop</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.486000000 GHz</p> <p>Start Freq 2.470000000 GHz</p> <p>Stop Freq 2.500000000 GHz</p> <p>CF Step 3.000000 MHz</p> <p>Freq Offset 0 Hz</p>
<p><math>\pi/4</math>DQPSK/LCH /No Hop</p>		<p>Frequency</p> <p>Auto Tune</p> <p>Center Freq 2.386000000 GHz</p> <p>Start Freq 2.385000000 GHz</p> <p>Stop Freq 2.405000000 GHz</p> <p>CF Step 2.000000 MHz</p> <p>Freq Offset 0 Hz</p>

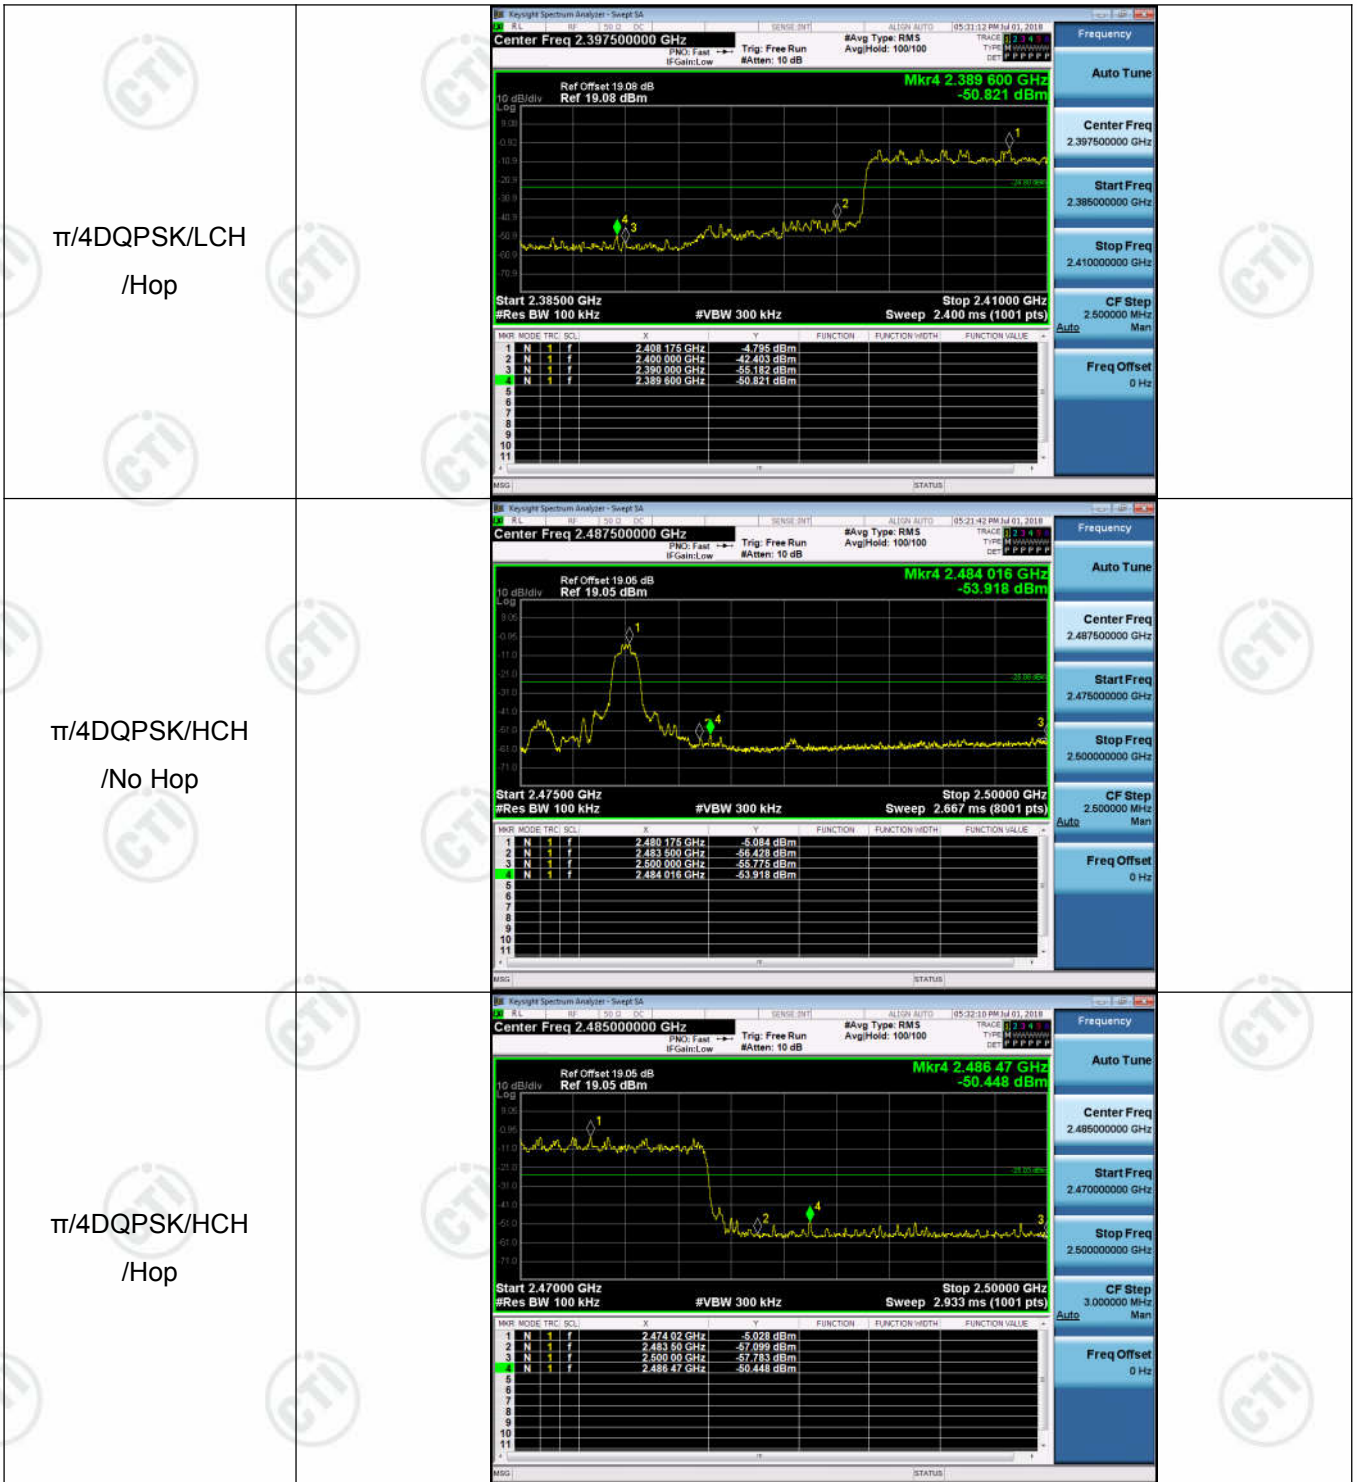




## Appendix G): RF Conducted Spurious Emissions




### Result Table

Mode	Channel	Pref [dBm]	Puw[dBm]	Verdict
GFSK	LCH	-5.000	<Limit	PASS
GFSK	MCH	-5.217	<Limit	PASS
GFSK	HCH	-5.220	<Limit	PASS
$\pi/4$ DQPSK	LCH	-4.915	<Limit	PASS
$\pi/4$ DQPSK	MCH	-5.139	<Limit	PASS
$\pi/4$ DQPSK	HCH	-5.115	<Limit	PASS



### Test Graph

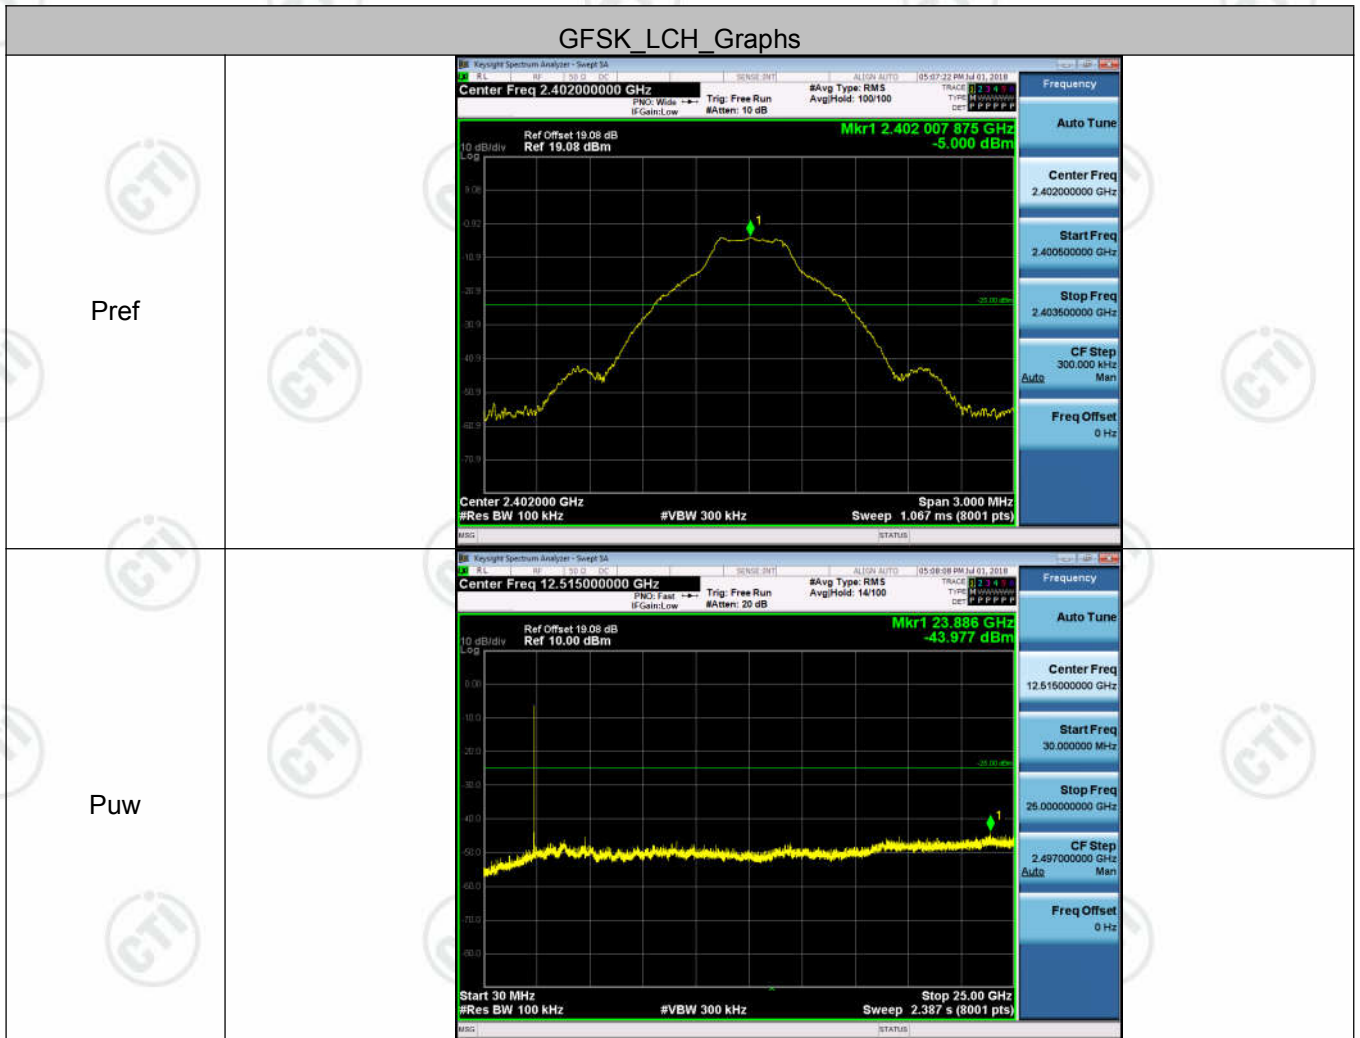


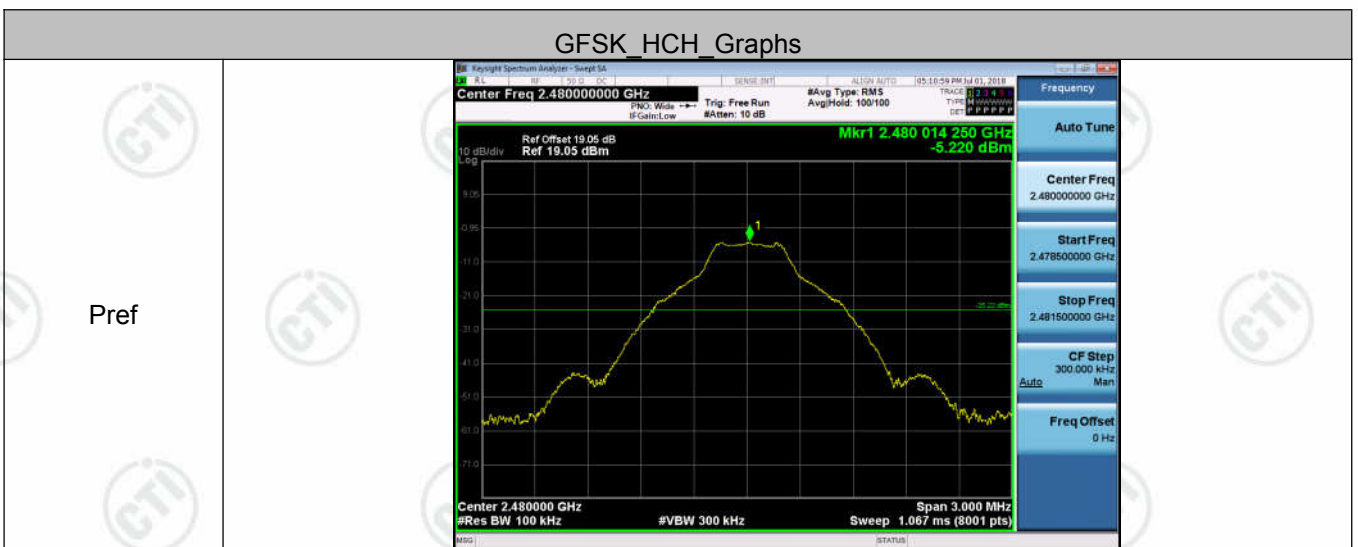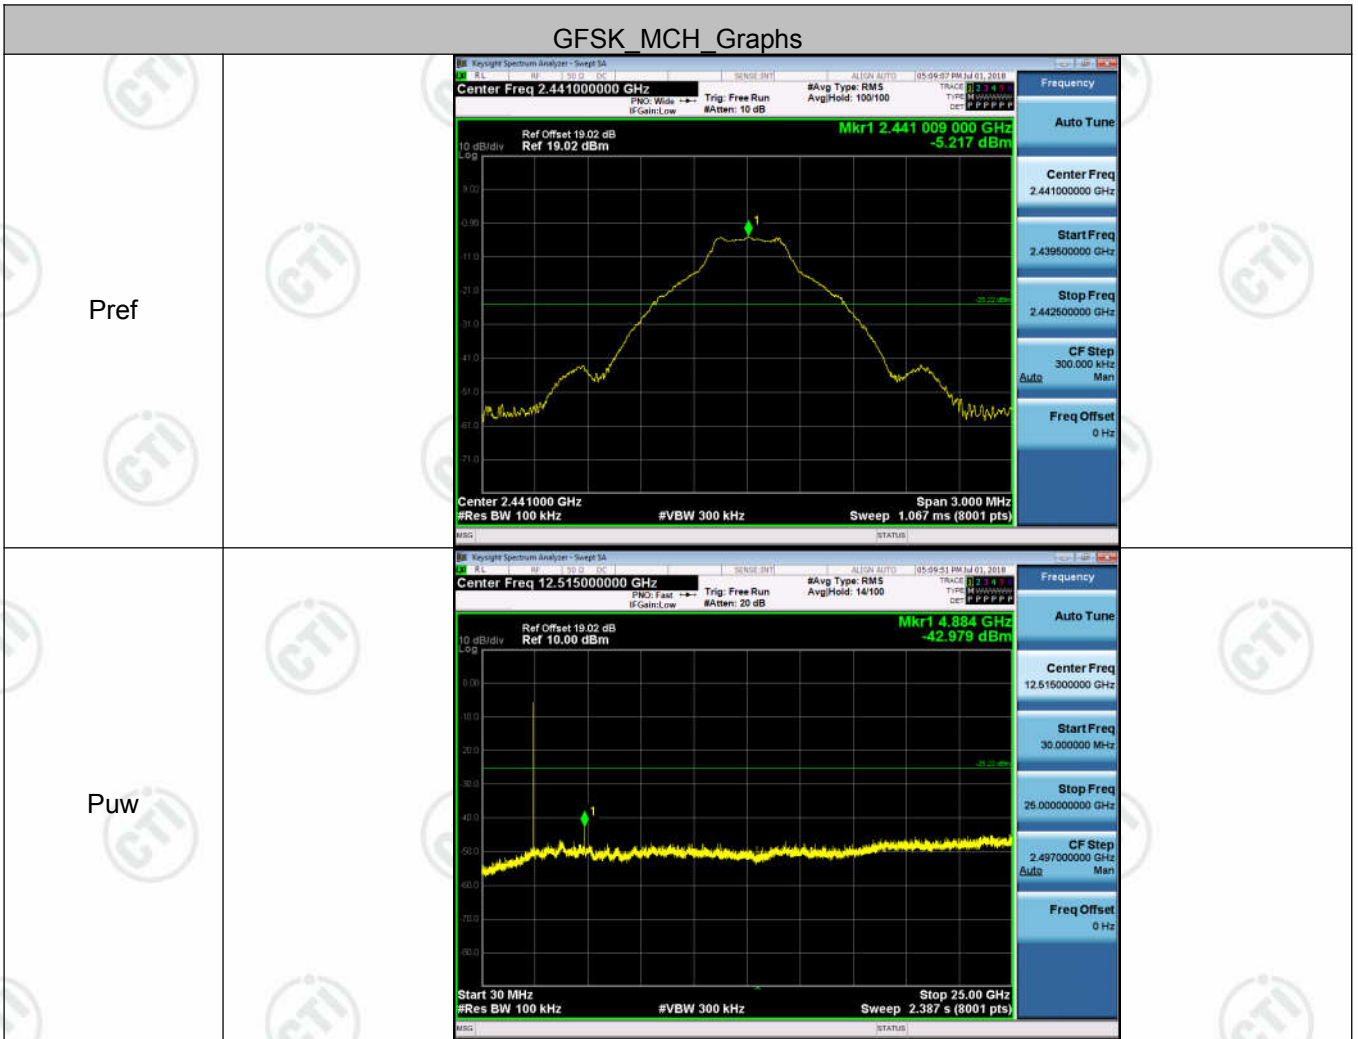

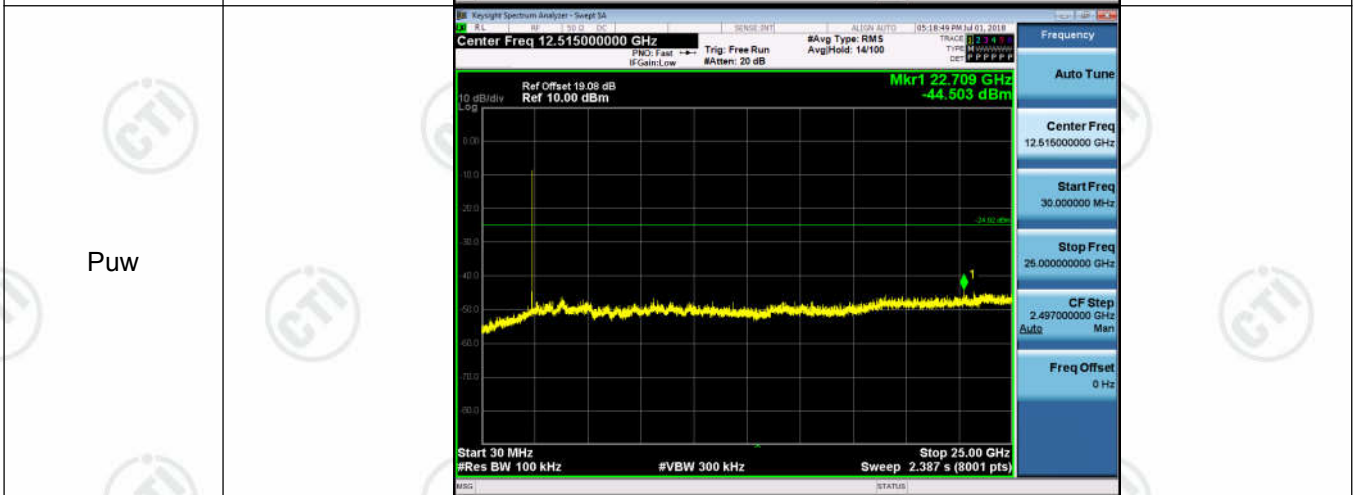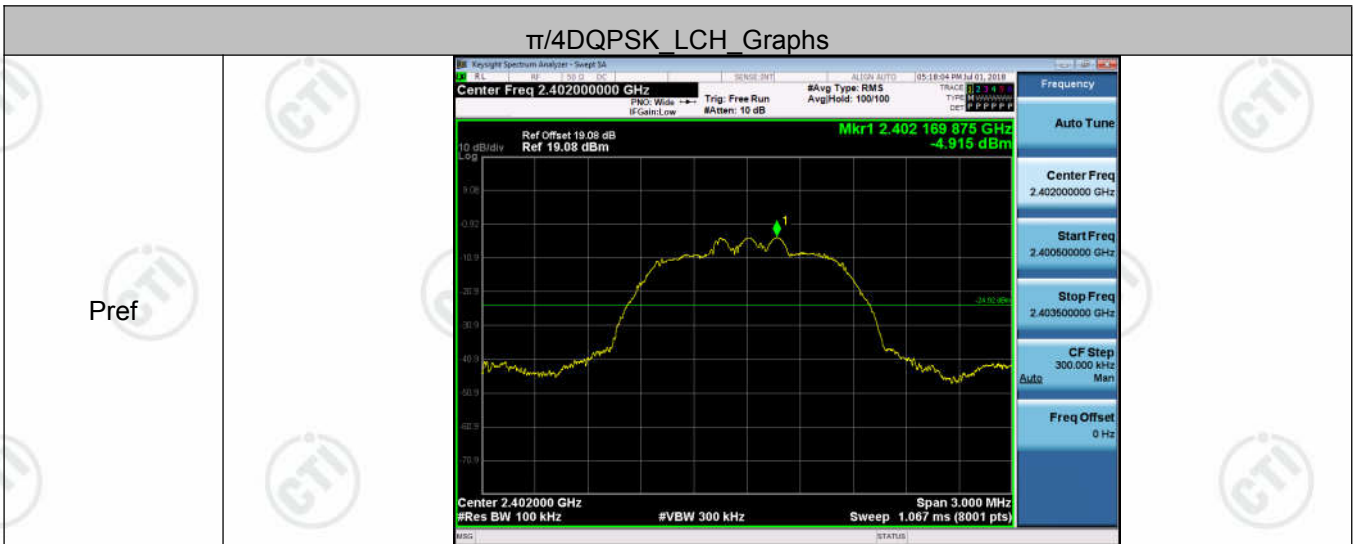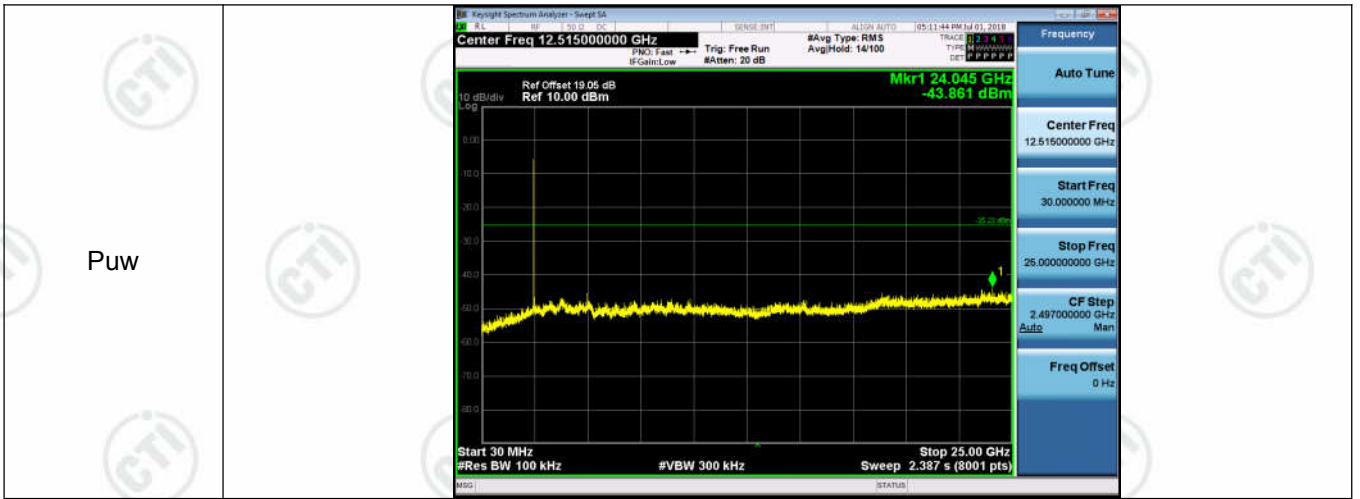



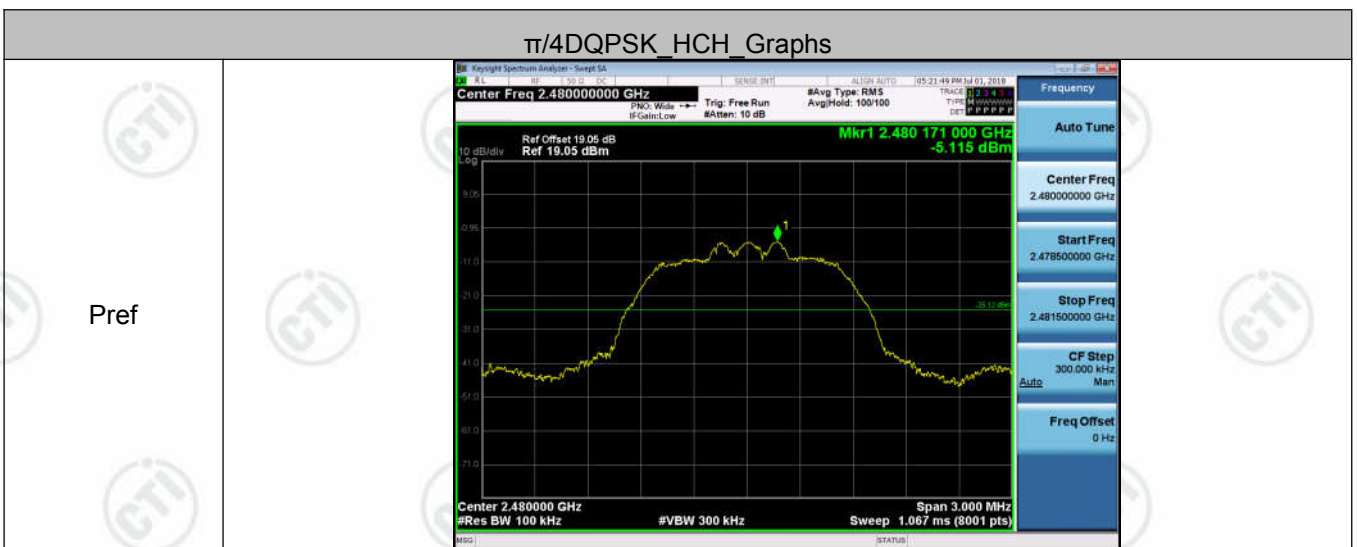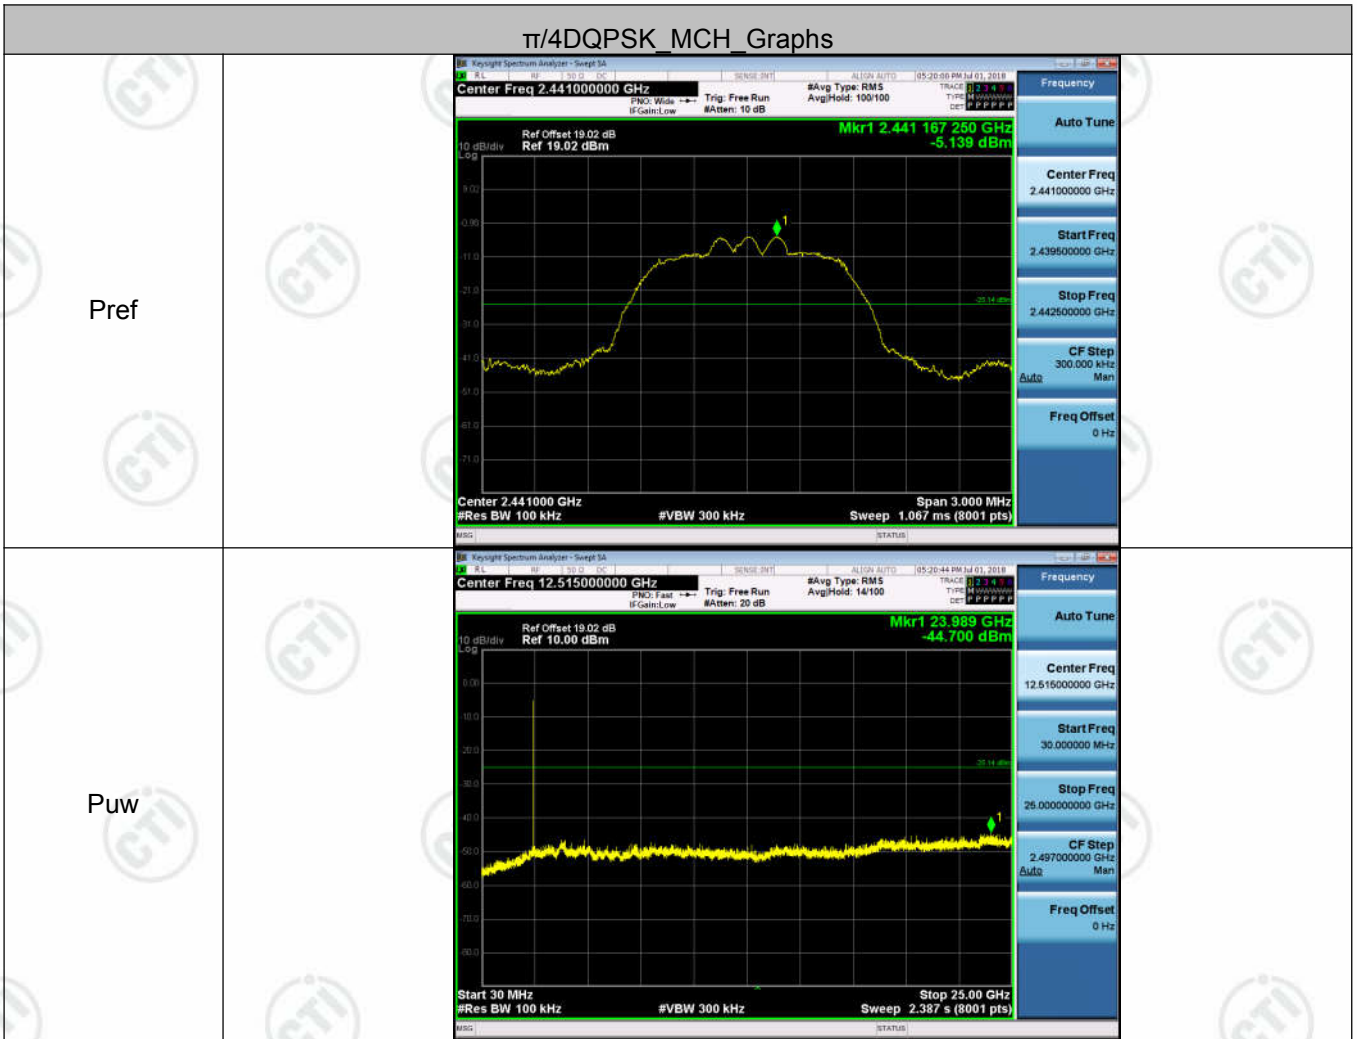

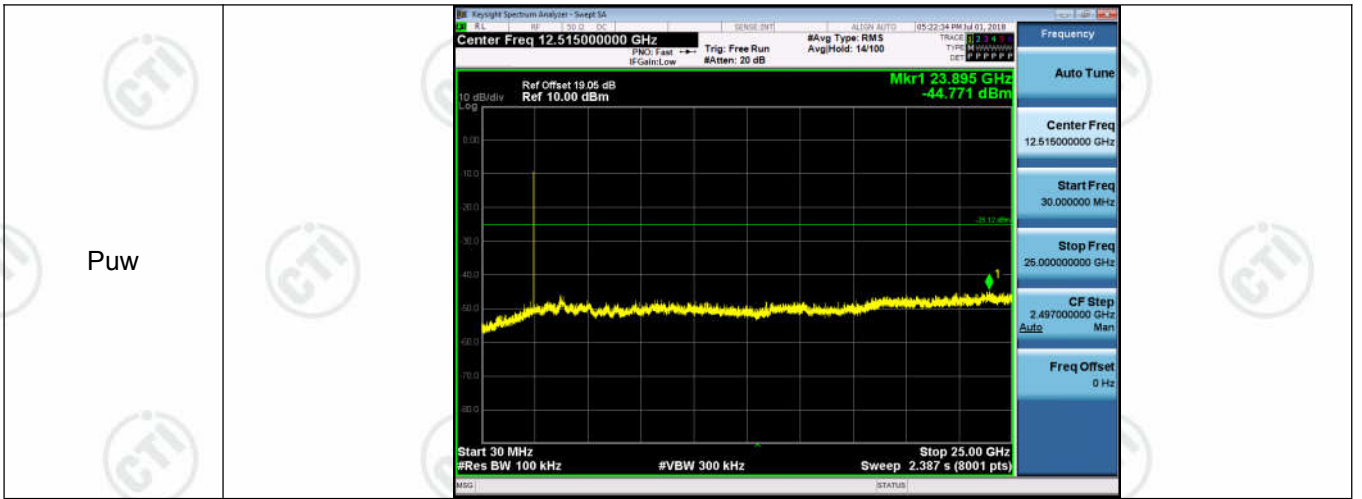

## Appendix H): Pseudorandom Frequency Hopping Sequence

Test Requirement:	47 CFR Part 15C Section 15.247 (a)(1) requirement:
<p>Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.</p> <p>Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.</p>	
EUT Pseudorandom Frequency Hopping Sequence	
<p>The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONES; i.e. the shift register is initialized with nine ones.</p> <ul style="list-style-type: none"> <li>• Number of shift register stages: 9</li> <li>• Length of pseudo-random sequence: <math>2^9 - 1 = 511</math> bits</li> <li>• Longest sequence of zeros: 8 (non-inverted signal)</li> </ul> <div data-bbox="319 974 1369 1124" style="text-align: center;"> </div> <p style="text-align: center;"><i>Linear Feedback Shift Register for Generation of the PRBS sequence</i></p> <p>An example of Pseudorandom Frequency Hopping Sequence as follow:</p> <div data-bbox="287 1220 1276 1370" style="text-align: center;"> </div> <p>Each frequency used equally on the average by each transmitter. The system receivers have input bandwidths that match the hopping channel bandwidths of their Corresponding transmitters and shift frequencies in synchronization with the transmitted signals.</p>	
<p>The device does not have the ability to be coordinated with other FHSS systems in an effort to avoid the simultaneous occupancy of individual hopping frequencies by multiple transmitters.</p>	

## Appendix I): Antenna Requirement


### 15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.

### 15.247(b) (4) requirement:

The conducted output power limit specified in paragraph (b) of this section is based on the use of antennas with directional gains that do not exceed 6 dBi. Except as shown in paragraph (c) of this section, if transmitting antennas of directional gain greater than 6 dBi are used, the conducted output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1), (b)(2), and (b)(3) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

### EUT Antenna:

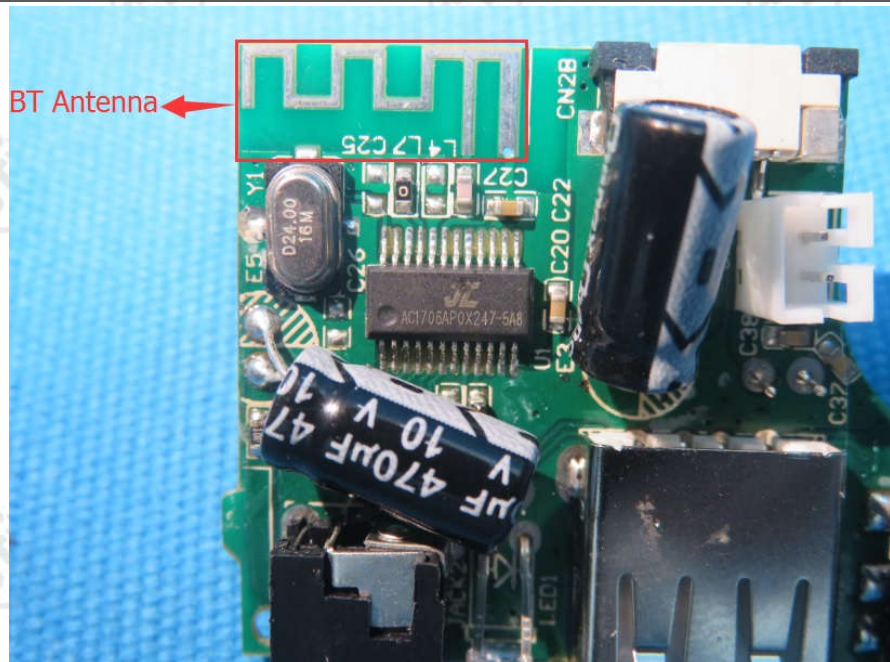

The antenna is PCB antenna and no consideration of replacement. The best case gain of the antenna is -0.58dBi.

## Appendix J): AC Power Line Conducted Emission

<p>Test Procedure:</p>	<p>Test frequency range :150KHz-30MHz</p> <ol style="list-style-type: none"> <li>1)The mains terminal disturbance voltage test was conducted in a shielded room.</li> <li>2) The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a <math>50\Omega/50\mu\text{H} + 5\Omega</math> linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.</li> <li>3)The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane,</li> <li>4) The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.</li> <li>5) In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.10 on conducted measurement.</li> </ol>														
<p>Limit:</p>	<table border="1" data-bbox="497 1173 1366 1393"> <thead> <tr> <th rowspan="2">Frequency range (MHz)</th> <th colspan="2">Limit (dB<math>\mu</math>V)</th> </tr> <tr> <th>Quasi-peak</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15-0.5</td> <td>66 to 56*</td> <td>56 to 46*</td> </tr> <tr> <td>0.5-5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5-30</td> <td>60</td> <td>50</td> </tr> </tbody> </table> <p>* The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz. NOTE : The lower limit is applicable at the transition frequency</p>	Frequency range (MHz)	Limit (dB $\mu$ V)		Quasi-peak	Average	0.15-0.5	66 to 56*	56 to 46*	0.5-5	56	46	5-30	60	50
Frequency range (MHz)	Limit (dB $\mu$ V)														
	Quasi-peak	Average													
0.15-0.5	66 to 56*	56 to 46*													
0.5-5	56	46													
5-30	60	50													


### Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peake mission were detected.

Live line:


80.0 dBuV

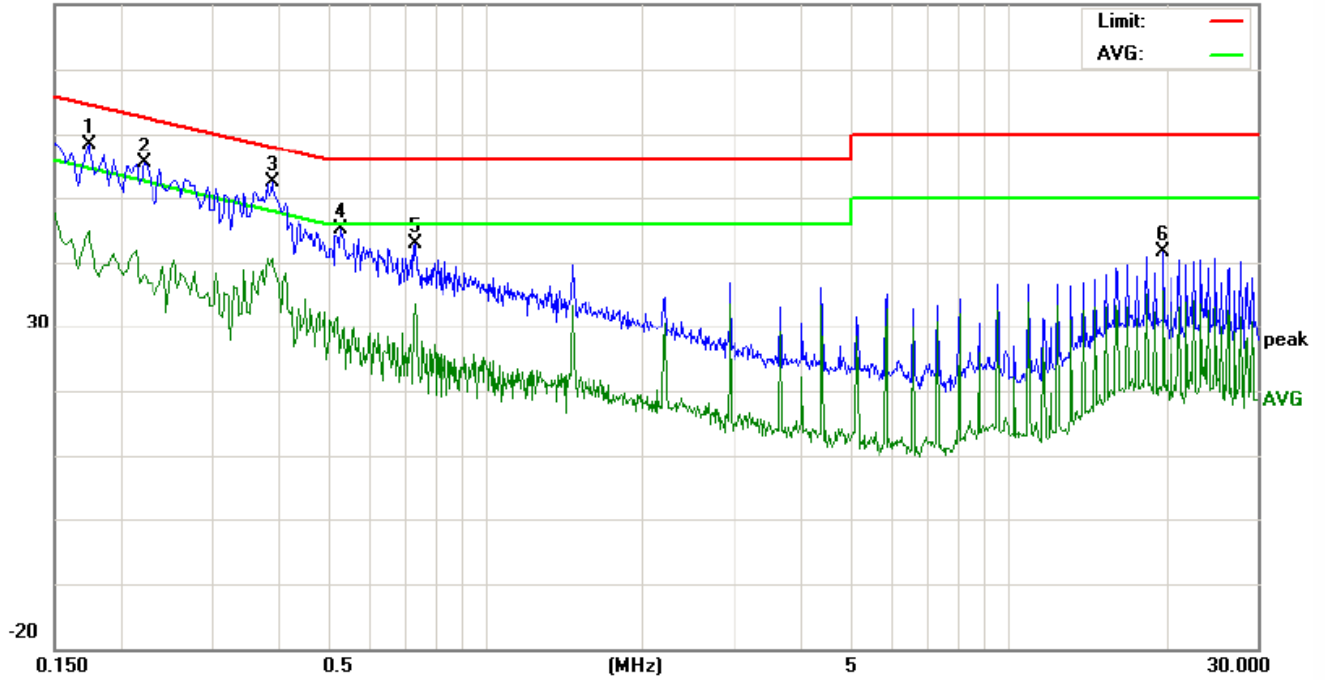

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)		P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG		
1	0.1740	48.73	43.87	31.18	9.74	58.47	53.61	40.92	64.76	54.76	-11.15	-13.84	P	
2	0.2220	45.53	39.69	28.05	9.73	55.26	49.42	37.78	62.74	52.74	-13.32	-14.96	P	
3	0.3899	42.55	40.00	30.59	9.75	52.30	49.75	40.34	58.06	48.06	-8.31	-7.72	P	
4	0.5299	35.47	29.63	17.77	9.72	45.19	39.35	27.49	56.00	46.00	-16.65	-18.51	P	
5	0.7340	33.00	28.96	23.41	9.75	42.75	38.71	33.16	56.00	46.00	-17.29	-12.84	P	
6	19.8060	31.57	29.74	24.86	10.06	41.63	39.80	34.92	60.00	50.00	-20.20	-15.08	P	

Neutral line:

80.0 dBuV

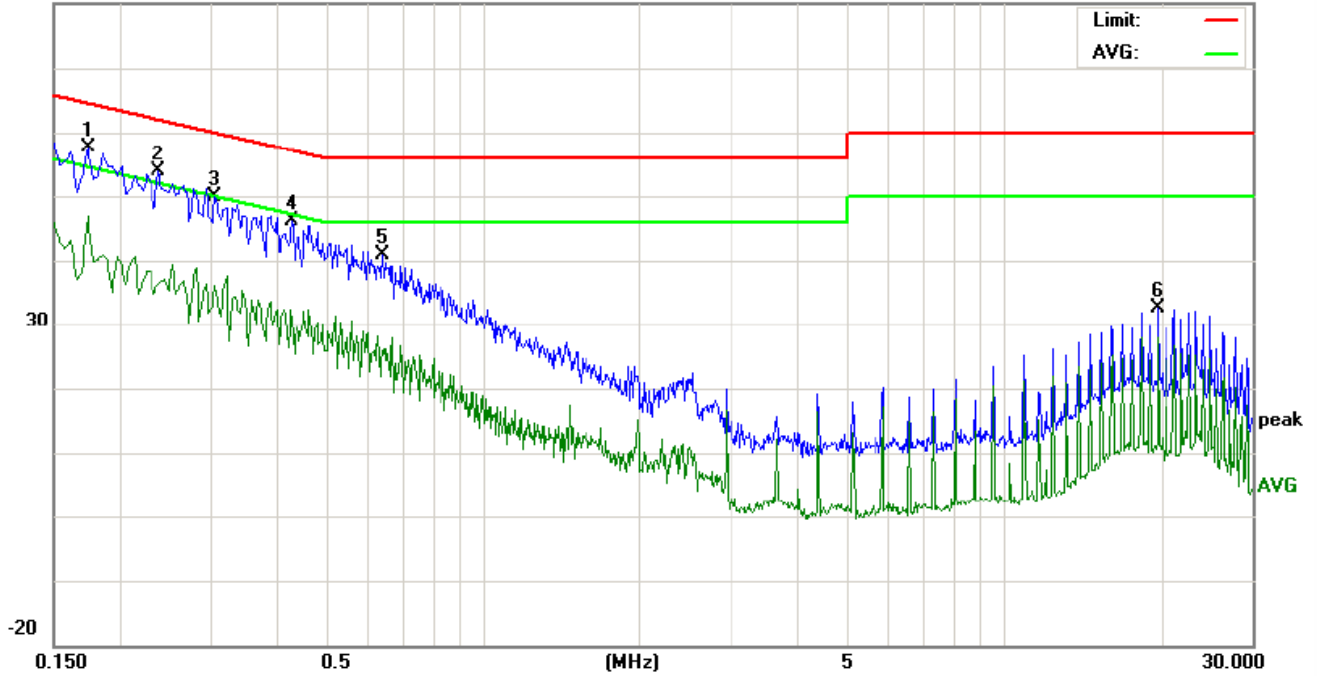

No.	Freq. MHz	Reading_Level (dBuV)			Correct Factor dB	Measurement (dBuV)			Limit (dBuV)		Margin (dB)			P/F	Comment
		Peak	QP	AVG		peak	QP	AVG	QP	AVG	QP	AVG	P/F		
1	0.1740	47.78	43.38	30.79	9.74	57.52	53.12	40.53	64.76	54.76	-11.64	-14.23	P		
2	0.2380	44.02	38.52	25.92	9.74	53.76	48.26	35.66	62.16	52.16	-13.90	-16.50	P		
3	0.3060	40.21	34.52	22.10	9.78	49.99	44.30	31.88	60.08	50.08	-15.78	-18.20	P		
4	0.4300	36.31	30.52	18.69	9.74	46.05	40.26	28.43	57.25	47.25	-16.99	-18.82	P		
5	0.6419	31.10	24.85	15.31	9.75	40.85	34.60	25.06	56.00	46.00	-21.40	-20.94	P		
6	19.8060	22.44	20.72	15.52	10.06	32.50	30.78	25.58	60.00	50.00	-29.22	-24.42	P		

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.


## Appendix K):Restricted bands around fundamental frequency (Radiated)

Receiver Setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average
Test Procedure:	<p><b>Below 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</li> <li>The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</li> <li>The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</li> <li>For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</li> <li>The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</li> <li>Place a marker at the end of the restricted band closest to the transmit frequency to show compliance. Also measure any emissions in the restricted bands. Save the spectrum analyzer plot. Repeat for each power and modulation for lowest and highest channel</li> </ol> <p><b>Above 1GHz test procedure as below:</b></p> <ol style="list-style-type: none"> <li>Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</li> <li>b. Test the EUT in the lowest channel , the Highest channel</li> <li>The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</li> <li>Repeat above procedures until all frequencies measured was complete.</li> </ol>				
Limit:	Frequency	Limit (dB $\mu$ V/m @3m)	Remark		
	30MHz-88MHz	40.0	Quasi-peak Value		
	88MHz-216MHz	43.5	Quasi-peak Value		
	216MHz-960MHz	46.0	Quasi-peak Value		
	960MHz-1GHz	54.0	Quasi-peak Value		
	Above 1GHz	54.0	Average Value		
		74.0	Peak Value		




**Test plot as follows:**

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	------------	---------------	--------	---------	------	------------

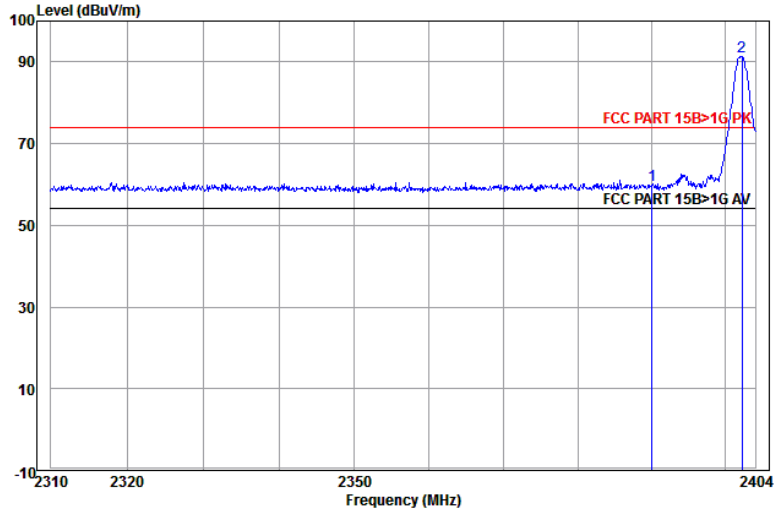


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	24.34	59.94	74.00	-14.06	Horizontal	
2 pp	2402.179	32.56	3.07	55.68	91.31	74.00	17.31	Horizontal	

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	------------	---------------	--------	---------	---------	------------

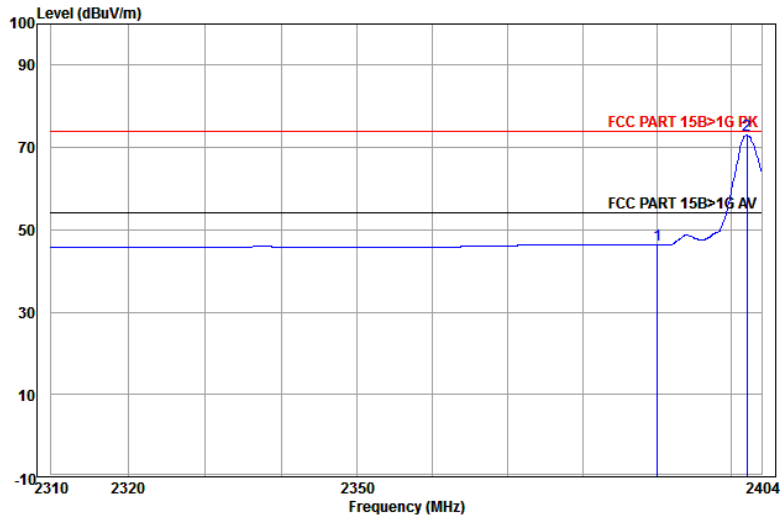


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	10.62	46.22	54.00	-7.78	Horizontal	Average
2 pp	2402.083	32.56	3.07	37.34	72.97	54.00	18.97	Horizontal	Average

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	------------	---------------	--------	---------	------	----------

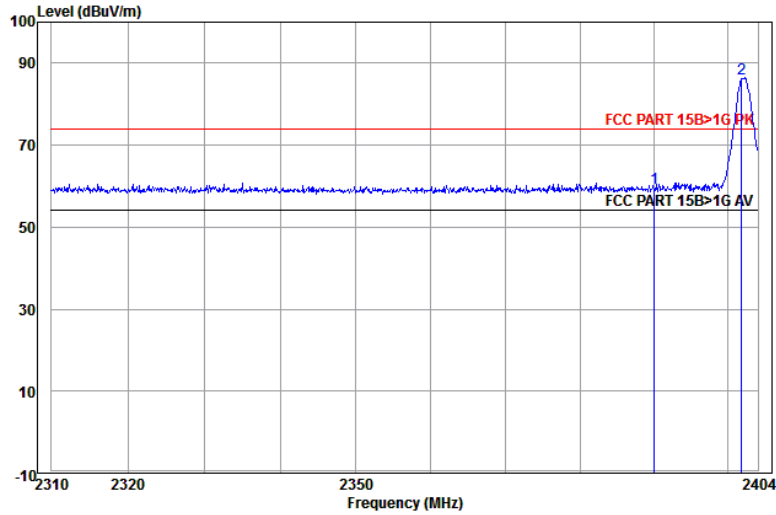


	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	23.82	59.42	74.00	-14.58	Vertical	
2 pp	2401.796	32.56	3.07	50.60	86.23	74.00	12.23	Vertical	

Worse case mode:	GFSK (DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	------------	---------------	--------	---------	---------	----------

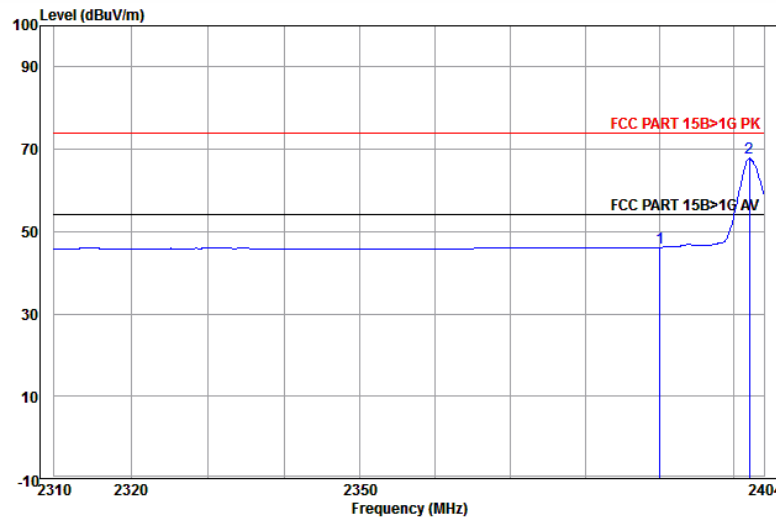


	Ant Freq	Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	10.59	46.19	54.00	-7.81	Vertical	Average
2 pp	2402.083	32.56	3.07	32.20	67.83	54.00	13.83	Vertical	Average

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	------------	---------------	---------	---------	------	------------

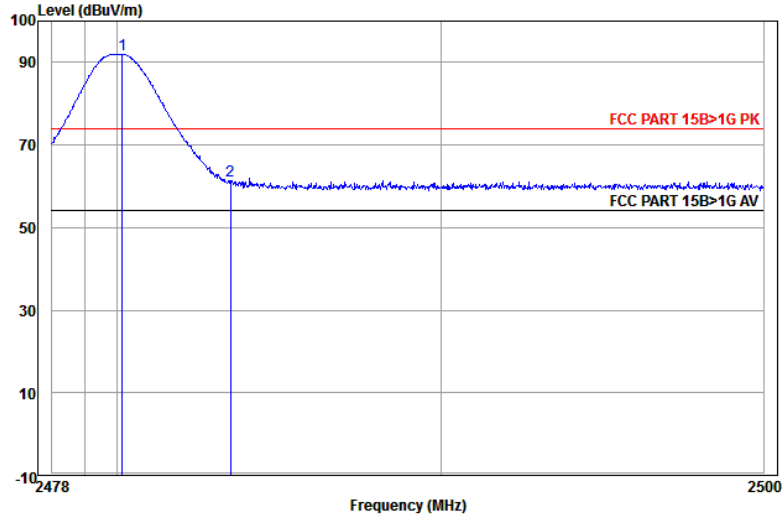


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2480.169	32.71	3.12	56.14	91.97	74.00	17.97	Horizontal	
2	2483.500	32.71	3.12	25.45	61.28	74.00	-12.72	Horizontal	

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	------------	---------------	---------	---------	---------	------------

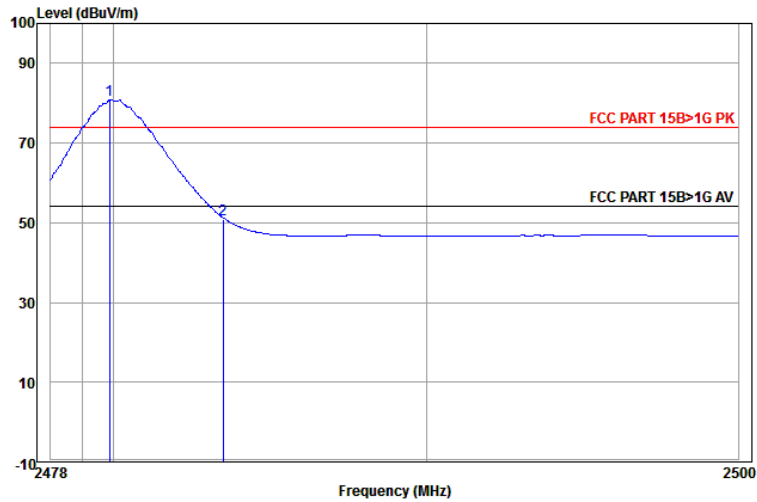


	Ant Freq	Cable Factor	Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1 pp	2479.884	32.71	3.12	45.05	80.88	54.00	26.88	Horizontal Average	
2	2483.500	32.71	3.12	15.09	50.92	54.00	-3.08	Horizontal Average	

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	------------	---------------	---------	---------	------	----------

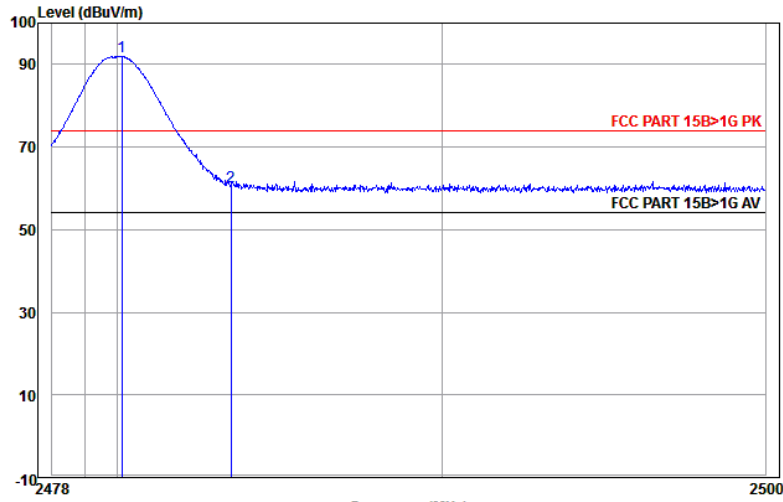


		Ant	Cable	Read	Limit		Over		
		Factor	Loss	Level	Level	Line	Limit	Pol/Phase	Remark
		MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2480.147	32.71	3.12	56.01	91.84	74.00	17.84	Vertical
2		2483.500	32.71	3.12	24.56	60.39	74.00	-13.61	Vertical

Worse case mode:	GFSK (DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	------------	---------------	---------	---------	---------	----------

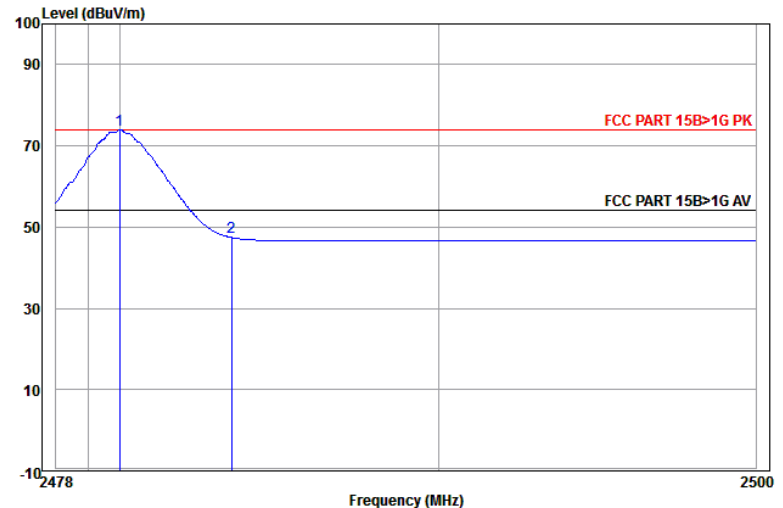


		Ant	Cable	Read	Limit		Over		
		Factor	Loss	Level	Level	Line	Limit	Pol/Phase	Remark
		MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	pp	2479.994	32.71	3.12	38.21	74.04	54.00	20.04	Vertical Average
2		2483.500	32.71	3.12	11.58	47.41	54.00	-6.59	Vertical Average

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Peak	Horizontal
------------------	----------------------	---------------	--------	---------	------	------------

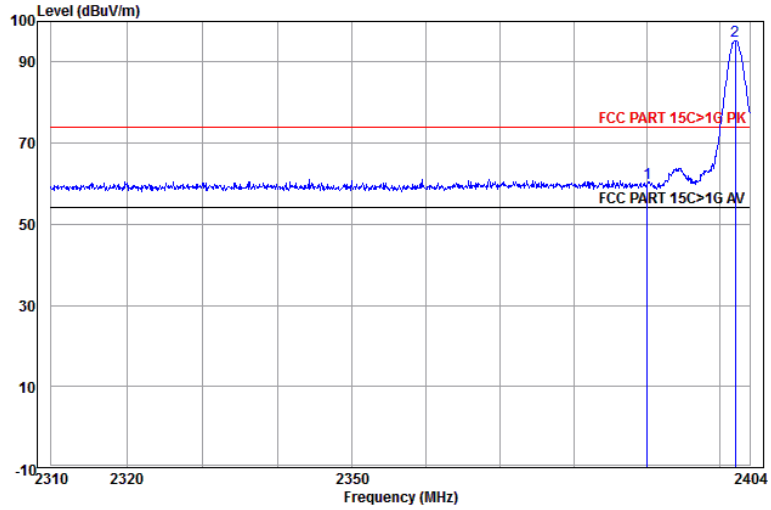


	Ant Freq	Cable Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	24.40	60.00	74.00	-14.00	Horizontal
2	pp 2402.083	32.56	3.07	59.53	95.16	74.00	21.16	Horizontal

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Average	Horizontal
------------------	----------------------	---------------	--------	---------	---------	------------

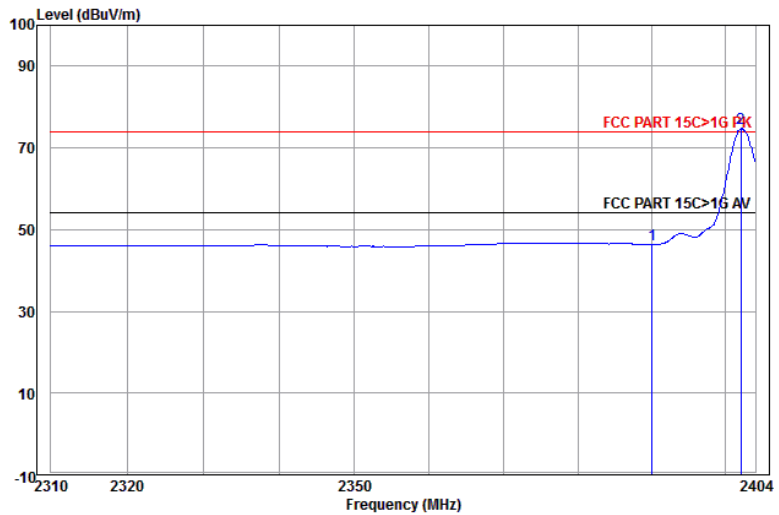


	Ant Freq	Cable Factor	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1	2390.000	32.53	3.07	10.83	46.43	54.00	-7.57	Horizontal Average
2	pp 2402.083	32.56	3.07	39.25	74.88	54.00	20.88	Horizontal Average

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Peak	Vertical
------------------	----------------------	---------------	--------	---------	------	----------

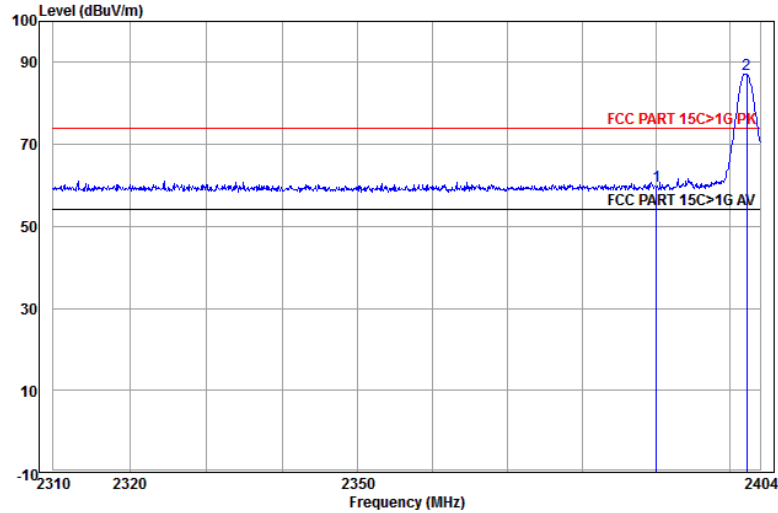


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	24.28	59.88	74.00	-14.12	Vertical	
2 pp	2402.179	32.56	3.07	51.55	87.18	74.00	13.18	Vertical	

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Lowest	Remark:	Average	Vertical
------------------	----------------------	---------------	--------	---------	---------	----------

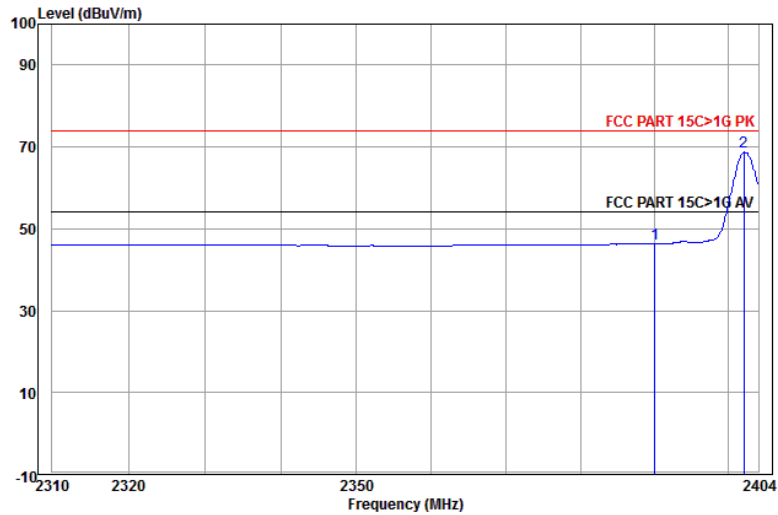


	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	2390.000	32.53	3.07	10.65	46.25	54.00	-7.75	Vertical	Average
2 pp	2402.083	32.56	3.07	33.21	68.84	54.00	14.84	Vertical	Average

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Peak	Horizontal
------------------	----------------------	---------------	---------	---------	------	------------

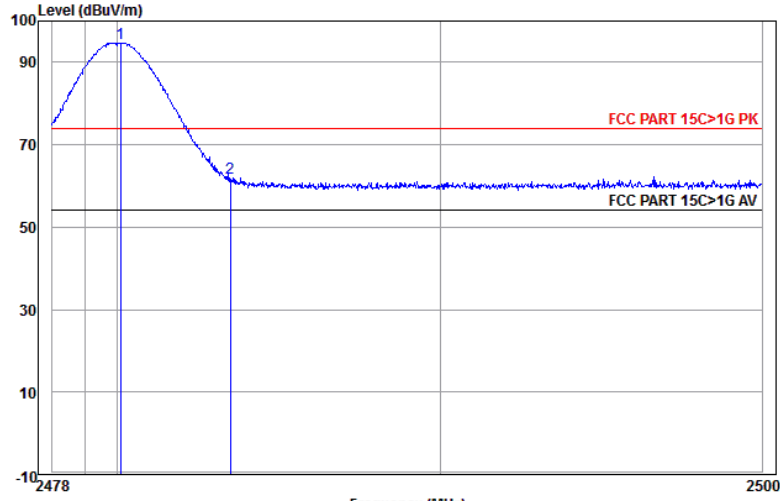


	Ant	Cable	Read	Limit	Over		
Freq	Factor	Loss	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2480.104	32.71	3.12	58.89	94.72	74.00	20.72	Horizontal
2 2483.500	32.71	3.12	26.06	61.89	74.00	-12.11	Horizontal

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Average	Horizontal
------------------	----------------------	---------------	---------	---------	---------	------------

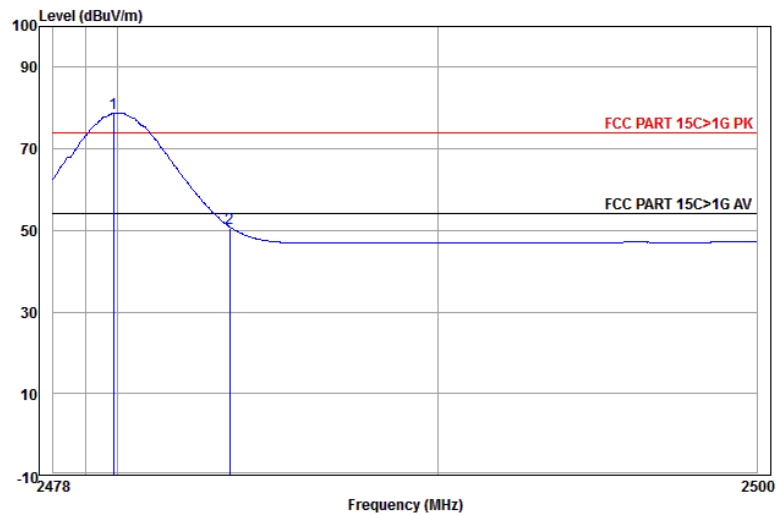


	Ant	Cable	Read	Limit	Over		
Freq	Factor	Loss	Level	Line	Limit	Pol/Phase	Remark
MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB	
1 pp 2479.884	32.71	3.12	43.03	78.86	54.00	24.86	Horizontal Average
2 2483.500	32.71	3.12	14.70	50.53	54.00	-3.47	Horizontal Average

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Peak	Vertical
------------------	----------------------	---------------	---------	---------	------	----------

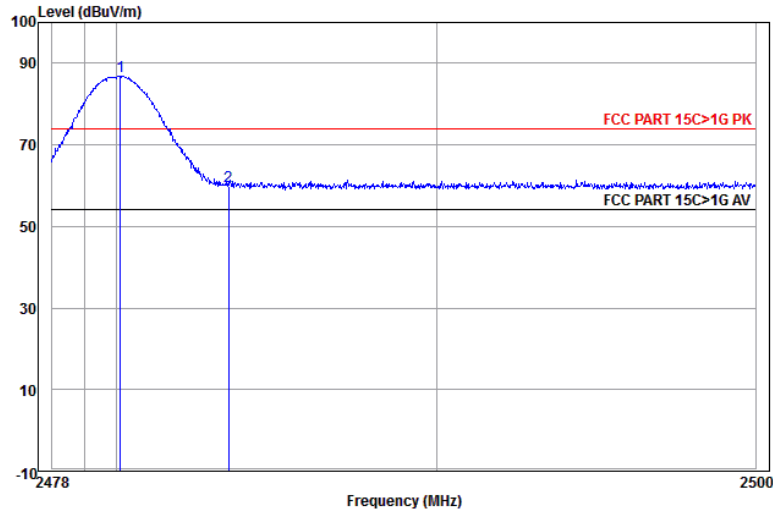

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2480.125	32.71	3.12	51.04	86.87	74.00	12.87	Vertical	
2	2483.500	32.71	3.12	23.97	59.80	74.00	-14.20	Vertical	

Worse case mode:	$\pi/4$ DQPSK (2DH5)	Test channel:	Highest	Remark:	Average	Vertical
------------------	----------------------	---------------	---------	---------	---------	----------

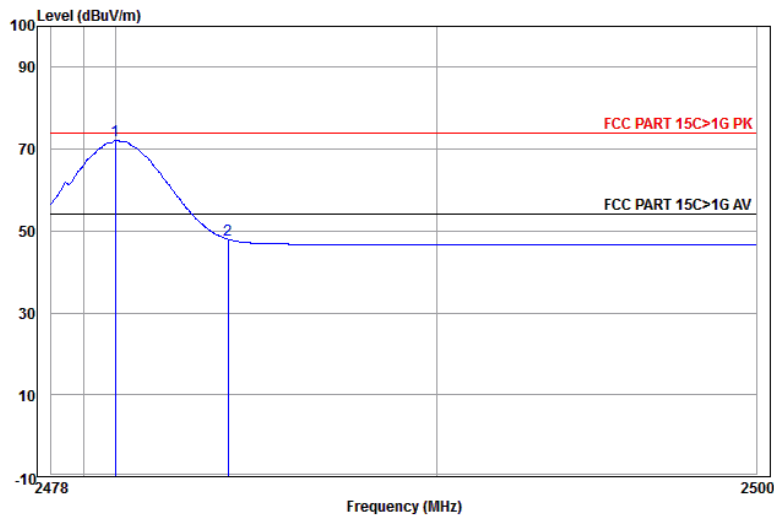

	Freq	Ant Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	pp 2479.994	32.71	3.12	36.32	72.15	54.00	18.15	Vertical	Average
2	2483.500	32.71	3.12	12.01	47.84	54.00	-6.16	Vertical	Average

Note:1)Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading -Correct Factor

Correct Factor = Preamplifier Factor- Antenna Factor-Cable Factor




## Appendix L): Radiated Spurious Emissions

<b>Receiver Setup:</b>	Frequency	Detector	RBW	VBW	Remark
	0.009MHz-0.090MHz	Peak	10kHz	30kHz	Peak
	0.009MHz-0.090MHz	Average	10kHz	30kHz	Average
	0.090MHz-0.110MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	0.110MHz-0.490MHz	Peak	10kHz	30kHz	Peak
	0.110MHz-0.490MHz	Average	10kHz	30kHz	Average
	0.490MHz -30MHz	Quasi-peak	10kHz	30kHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100 kHz	300kHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
Peak		1MHz	10Hz	Average	
<b>Test Procedure:</b>					
<b>Below 1GHz test procedure as below:</b>					
<p>a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.</p> <p>b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.</p> <p>c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.</p> <p>d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.</p> <p>e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.</p> <p>f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.</p>					
<b>Above 1GHz test procedure as below:</b>					
<p>g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 meter to 1.5 meter( Above 18GHz the distance is 1 meter and table is 1.5 meter).</p> <p>h. Test the EUT in the lowest channel ,the middle channel ,the Highest channel</p> <p>i. The radiation measurements are performed in X, Y, Z axis positioning for Transmitting mode, and found the X axis positioning which it is worse case.</p> <p>j. Repeat above procedures until all frequencies measured was complete.</p>					
<b>Limit:</b>	Frequency	Field strength (microvolt/meter)	Limit (dB $\mu$ V/m)	Remark	Measurement distance (m)
	0.009MHz-0.490MHz	2400/F(kHz)	-	-	300
	0.490MHz-1.705MHz	24000/F(kHz)	-	-	30
	1.705MHz-30MHz	30	-	-	30
	30MHz-88MHz	100	40.0	Quasi-peak	3
	88MHz-216MHz	150	43.5	Quasi-peak	3
	216MHz-960MHz	200	46.0	Quasi-peak	3
	960MHz-1GHz	500	54.0	Quasi-peak	3
	Above 1GHz	500	54.0	Average	3
<p>Note: 15.35(b), Unless otherwise specified, the limit on peak radio frequency emissions is 20dB above the maximum permitted average emission limit applicable to the equipment under test. This peak limit applies to the total peak emission level radiated by the device.</p>					


**Radiated Spurious Emissions test Data:  
Radiated Emission below 1GHz**

30MHz~1GHz (QP)		
Test mode:	Transmitting	Vertical

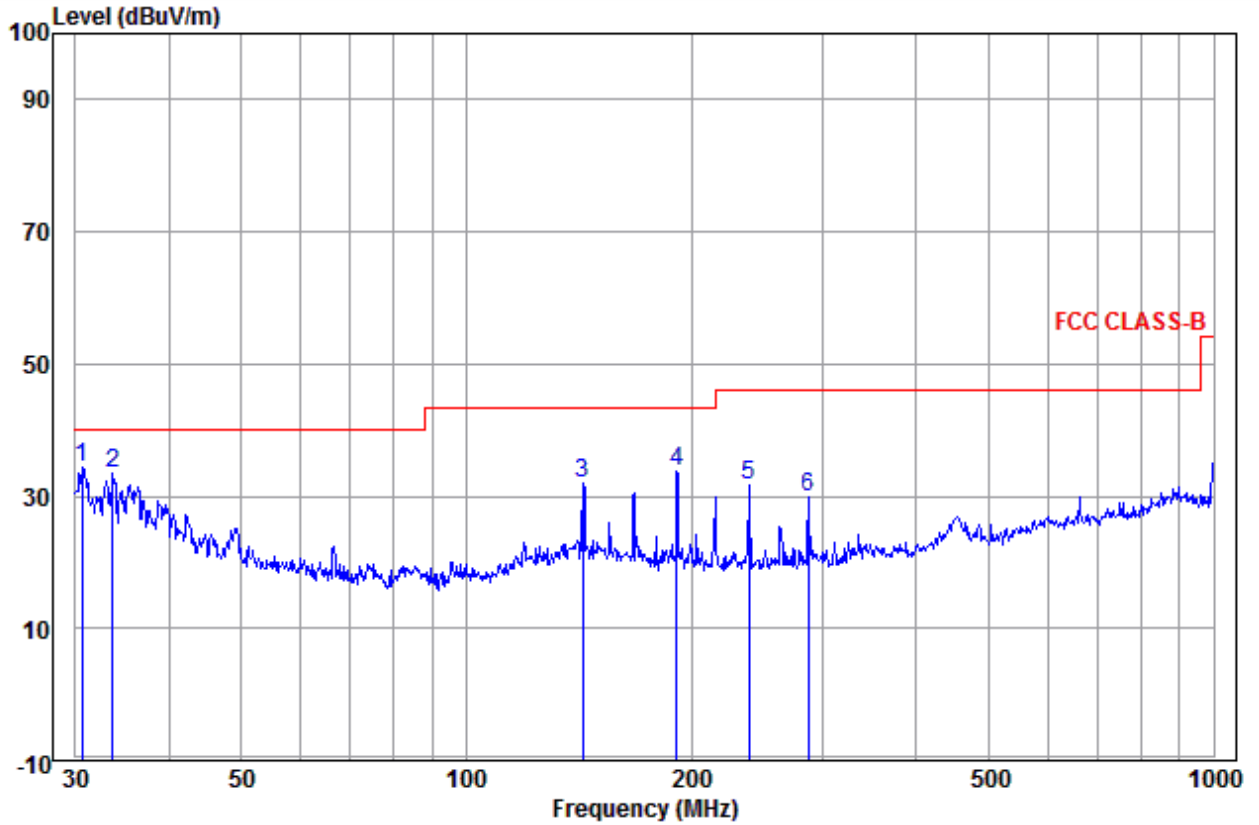

	Ant Freq	Ant Factor	Cable Loss	Read Level	Limit Level	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dB		
1	pp 30.638	12.04	0.09	22.23	34.36	40.00	-5.64	Vertical QP
2	33.680	12.66	0.07	20.87	33.60	40.00	-6.40	Vertical QP
3	143.326	9.22	0.61	22.24	32.07	43.50	-11.43	Vertical QP
4	191.074	11.07	1.02	21.59	33.68	43.50	-9.82	Vertical QP
5	239.147	12.38	1.29	17.98	31.65	46.00	-14.35	Vertical QP
6	286.982	13.21	1.14	15.46	29.81	46.00	-16.19	Vertical QP

Test mode:	Transmitting	Horizontal
------------	--------------	------------

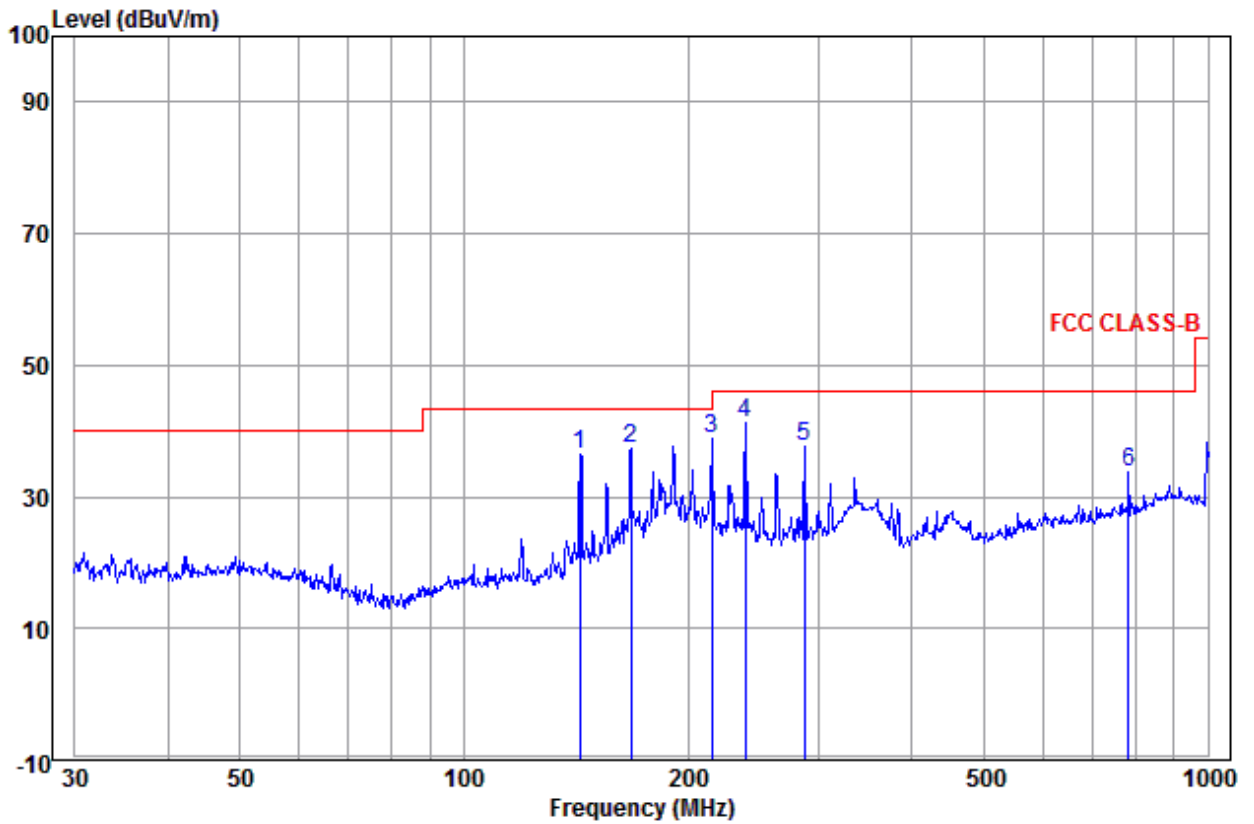

	Ant Freq	Cable Factor	Cable Loss	Read Level	Level	Limit Line	Over Limit	Pol/Phase	Remark
	MHz	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB		
1	143.326	9.22	0.61	26.71	36.54	43.50	-6.96	Horizontal	QP
2	167.824	9.85	0.80	26.62	37.27	43.50	-6.23	Horizontal	QP
3 pp	215.268	11.86	1.18	25.71	38.75	43.50	-4.75	Horizontal	QP
4	239.147	12.38	1.29	27.52	41.19	46.00	-4.81	Horizontal	QP
5	286.982	13.21	1.14	23.34	37.69	46.00	-8.31	Horizontal	QP
6	782.345	19.70	2.48	11.63	33.81	46.00	-12.19	Horizontal	QP

**Transmitter Emission above 1GHz**

Worse case mode:		GFSK(1-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1350.362	30.57	2.09	44.18	47.33	35.81	74.00	-38.19	Pass	H
1549.344	30.96	2.35	43.94	47.89	37.26	74.00	-36.74	Pass	H
4804.000	34.69	5.98	44.60	47.94	44.01	74.00	-29.99	Pass	H
5971.290	35.88	7.41	44.50	47.89	46.68	74.00	-27.32	Pass	H
7206.000	36.42	6.97	44.77	44.51	43.13	74.00	-30.87	Pass	H
9608.000	37.88	6.98	45.58	46.42	45.70	74.00	-28.30	Pass	H
1270.334	30.39	1.97	44.29	48.59	36.66	74.00	-37.34	Pass	V
1533.648	30.93	2.33	43.96	47.23	36.53	74.00	-37.47	Pass	V
4804.000	34.69	5.98	44.60	47.82	43.89	74.00	-30.11	Pass	V
5325.007	35.38	6.74	44.57	49.79	47.34	74.00	-26.66	Pass	V
7206.000	36.42	6.97	44.77	43.83	42.45	74.00	-31.55	Pass	V
9608.000	37.88	6.98	45.58	45.83	45.11	74.00	-28.89	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1323.141	30.51	2.05	44.22	48.20	36.54	74.00	-37.46	Pass	H
1569.189	31.00	2.37	43.92	47.40	36.85	74.00	-37.15	Pass	H
1899.278	31.55	2.74	43.59	47.91	38.61	74.00	-35.39	Pass	H
4880.000	34.85	6.13	44.60	45.69	42.07	74.00	-31.93	Pass	H
7320.000	36.43	6.85	44.87	44.09	42.50	74.00	-31.50	Pass	H
9760.000	38.05	7.12	45.55	45.72	45.34	74.00	-28.66	Pass	H
1276.818	30.41	1.98	44.28	47.80	35.91	74.00	-38.09	Pass	V
1889.633	31.54	2.73	43.60	46.60	37.27	74.00	-36.73	Pass	V
4880.000	34.85	6.13	44.60	45.89	42.27	74.00	-31.73	Pass	V
5986.509	35.89	7.43	44.50	47.15	45.97	74.00	-28.03	Pass	V
7320.000	36.43	6.85	44.87	43.87	42.28	74.00	-31.72	Pass	V
9760.000	38.05	7.12	45.55	47.14	46.76	74.00	-27.24	Pass	V

Worse case mode:		GFSK(1-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1410.080	30.69	2.17	44.11	48.18	36.93	74.00	-37.07	Pass	H
1541.476	30.95	2.34	43.95	48.10	37.44	74.00	-36.56	Pass	H
4960.000	35.02	6.29	44.60	47.20	43.91	74.00	-30.09	Pass	H
6017.064	35.91	7.44	44.50	47.70	46.55	74.00	-27.45	Pass	H
7440.000	36.45	6.73	44.97	44.41	42.62	74.00	-31.38	Pass	H
9920.000	38.22	7.26	45.52	46.88	46.84	74.00	-27.16	Pass	H
1263.883	30.38	1.96	44.29	47.39	35.44	74.00	-38.56	Pass	V
1593.340	31.04	2.40	43.89	47.46	37.01	74.00	-36.99	Pass	V
4960.000	35.02	6.29	44.60	46.34	43.05	74.00	-30.95	Pass	V
5689.360	35.67	7.13	44.53	48.12	46.39	74.00	-27.61	Pass	V
7440.000	36.45	6.73	44.97	43.68	41.89	74.00	-32.11	Pass	V
9920.000	38.22	7.26	45.52	46.94	46.90	74.00	-27.10	Pass	V

Worse case mode:		π/4DQPSK(2-DH5)		Test channel:		Lowest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Gain (dB)	Read Level (dBμV)	Level (dBμV/m)	Limit Line (dBμV/m)	Over Limit (dB)	Result	Antenna Polaxis
1276.818	30.41	1.98	44.28	49.01	37.12	74.00	-36.88	Pass	H
1553.293	30.97	2.35	43.94	48.33	37.71	74.00	-36.29	Pass	H
4804.000	34.69	5.98	44.60	48.08	44.15	74.00	-29.85	Pass	H
5297.966	35.35	6.71	44.57	49.35	46.84	74.00	-27.16	Pass	H
7206.000	36.42	6.97	44.77	44.91	43.53	74.00	-30.47	Pass	H
9608.000	37.88	6.98	45.58	45.87	45.15	74.00	-28.85	Pass	H
1346.929	30.56	2.08	44.18	48.46	36.92	74.00	-37.08	Pass	V
1617.862	31.09	2.43	43.87	48.38	38.03	74.00	-35.97	Pass	V
4804.000	34.69	5.98	44.60	48.04	44.11	74.00	-29.89	Pass	V
5325.007	35.38	6.74	44.57	49.75	47.30	74.00	-26.70	Pass	V
7206.000	36.42	6.97	44.77	44.74	43.36	74.00	-30.64	Pass	V
9608.000	37.88	6.98	45.58	46.51	45.79	74.00	-28.21	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Middle	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1270.334	30.39	1.97	44.29	48.87	36.94	74.00	-37.06	Pass	H
1689.410	31.21	2.52	43.79	47.73	37.67	74.00	-36.33	Pass	H
4880.000	34.85	6.13	44.60	46.80	43.18	74.00	-30.82	Pass	H
5986.509	35.89	7.43	44.50	47.78	46.60	74.00	-27.40	Pass	H
7320.000	36.43	6.85	44.87	45.39	43.80	74.00	-30.20	Pass	H
9760.000	38.05	7.12	45.55	46.35	45.97	74.00	-28.03	Pass	H
1299.773	30.46	2.01	44.25	47.72	35.94	74.00	-38.06	Pass	V
1557.252	30.98	2.36	43.93	47.87	37.28	74.00	-36.72	Pass	V
4880.000	34.85	6.13	44.60	46.19	42.57	74.00	-31.43	Pass	V
5956.109	35.87	7.40	44.50	47.89	46.66	74.00	-27.34	Pass	V
7320.000	36.43	6.85	44.87	44.38	42.79	74.00	-31.21	Pass	V
9760.000	38.05	7.12	45.55	46.21	45.83	74.00	-28.17	Pass	V

Worse case mode:		$\pi/4$ DQPSK(2-DH5)		Test channel:		Highest	Remark: Peak		
Frequency (MHz)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Gain (dB)	Read Level (dB $\mu$ V)	Level (dB $\mu$ V/m)	Limit Line (dB $\mu$ V/m)	Over Limit (dB)	Result	Antenna Polaxis
1267.104	30.38	1.96	44.29	47.90	35.95	74.00	-38.05	Pass	H
1333.284	30.53	2.06	44.20	47.47	35.86	74.00	-38.14	Pass	H
4960.000	35.02	6.29	44.60	47.52	44.23	74.00	-29.77	Pass	H
5325.007	35.38	6.74	44.57	49.02	46.57	74.00	-27.43	Pass	H
7440.000	36.45	6.73	44.97	44.18	42.39	74.00	-31.61	Pass	H
9920.000	38.22	7.26	45.52	46.35	46.31	74.00	-27.69	Pass	H
1254.268	30.35	1.94	44.31	48.06	36.04	74.00	-37.96	Pass	V
1537.557	30.94	2.34	43.96	48.36	37.68	74.00	-36.32	Pass	V
4960.000	35.02	6.29	44.60	46.86	43.57	74.00	-30.43	Pass	V
5986.509	35.89	7.43	44.50	47.74	46.56	74.00	-27.44	Pass	V
7440.000	36.45	6.73	44.97	44.23	42.44	74.00	-31.56	Pass	V
9920.000	38.22	7.26	45.52	47.19	47.15	74.00	-26.85	Pass	V

Note:

1) Through Pre-scan Non-hopping transmitting mode and charge+transmitter mode with all kind of modulation and all kind of data type, find the 1-DH5 of data type is the worse case of GFSK modulation type, the 2-DH5 of data type is the worse case of  $\pi/4$ DQPSK modulation type.

2) The field strength is calculated by adding the Antenna Factor, Cable Factor & Pre-amplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading - Correct Factor

Correct Factor = Pre-amplifier Factor - Antenna Factor - Cable Factor


3) Scan from 9kHz to 25GHz, the disturbance above 13GHz and below 30MHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed. The amplitude of spurious emissions from the radiator which are attenuated more than 20dB below the limit need not be reported.

## PHOTOGRAPHS OF TEST SETUP

Test model No.: HSD9036A



**Radiated spurious emission Test Setup-1(Below 30MHz)**

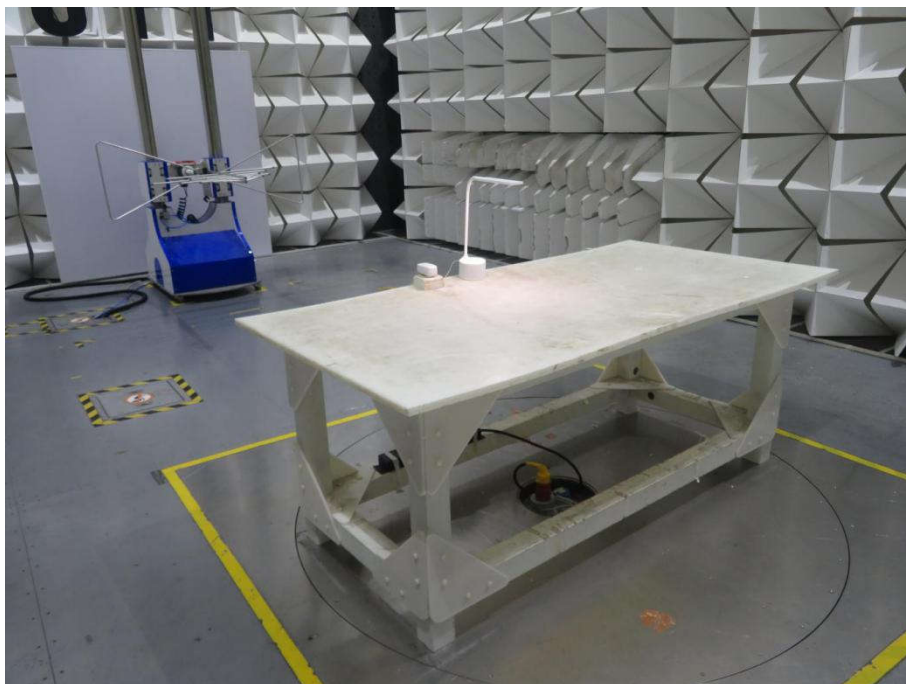

**Radiated spurious emission Test Setup-2(30MHz-1GHz)**



**Radiated spurious emission Test Setup-3(Above 1GHz)**



**Conducted Emissions Test Setup**



## PHOTOGRAPHS OF EUT Constructional Details


Test model No.: HSD9036A




View of Product-1




View of Product-2

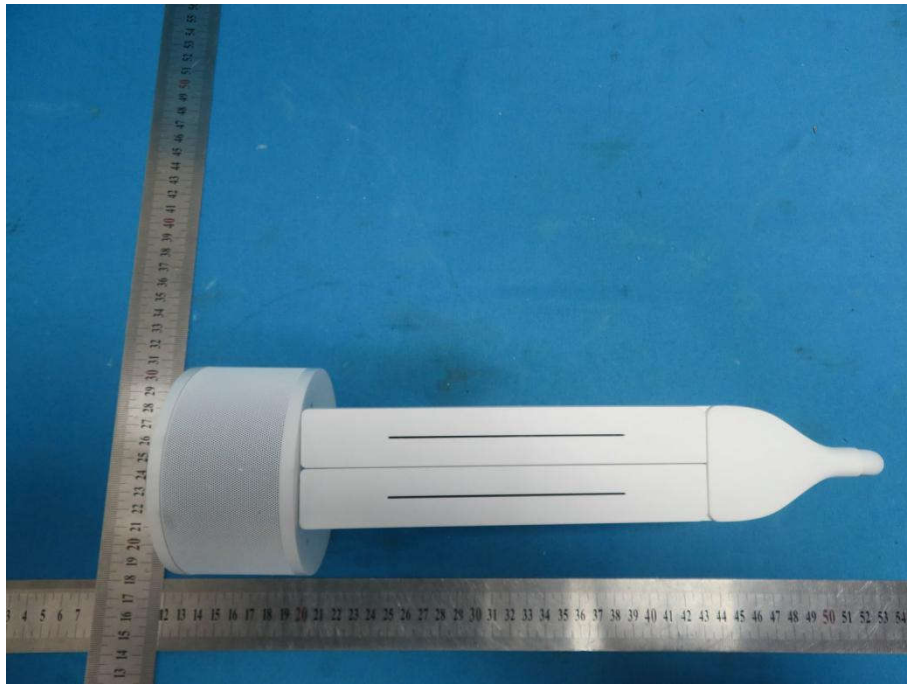

View of Product-3

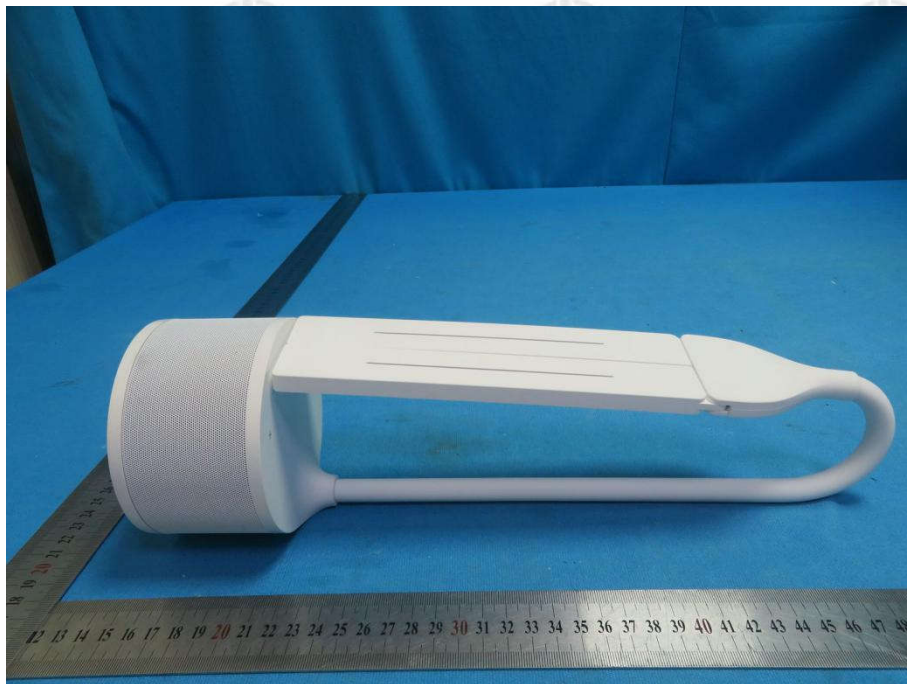


View of Product-4

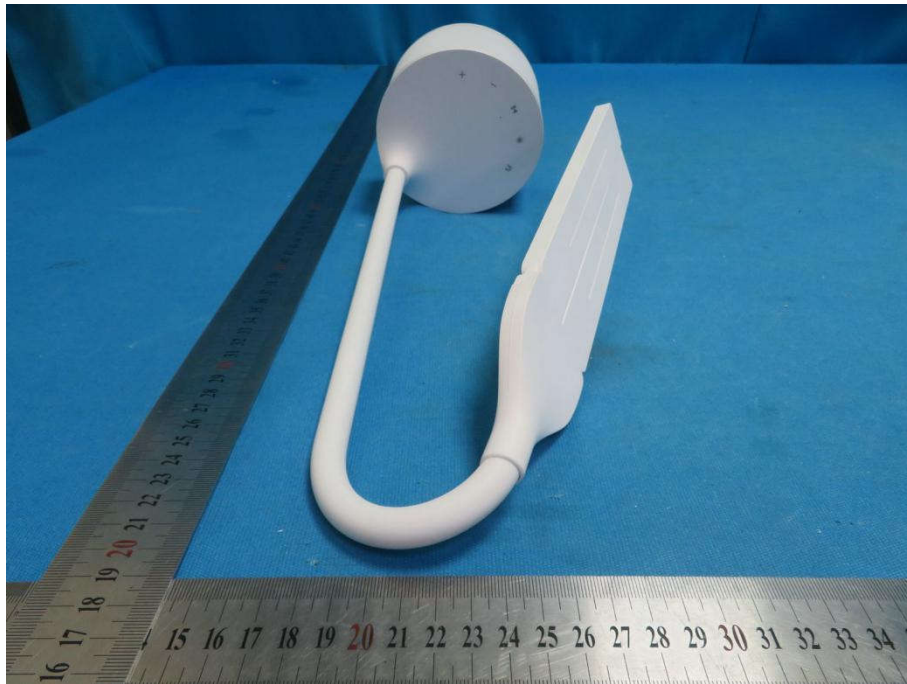

View of Product-5




View of Product-6

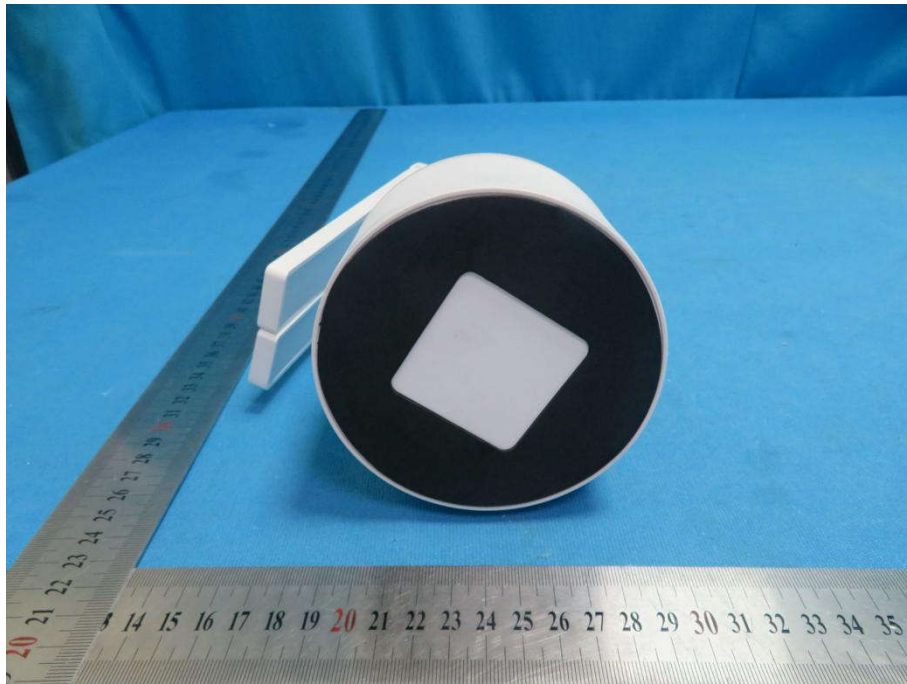

View of Product-7



View of Product-8

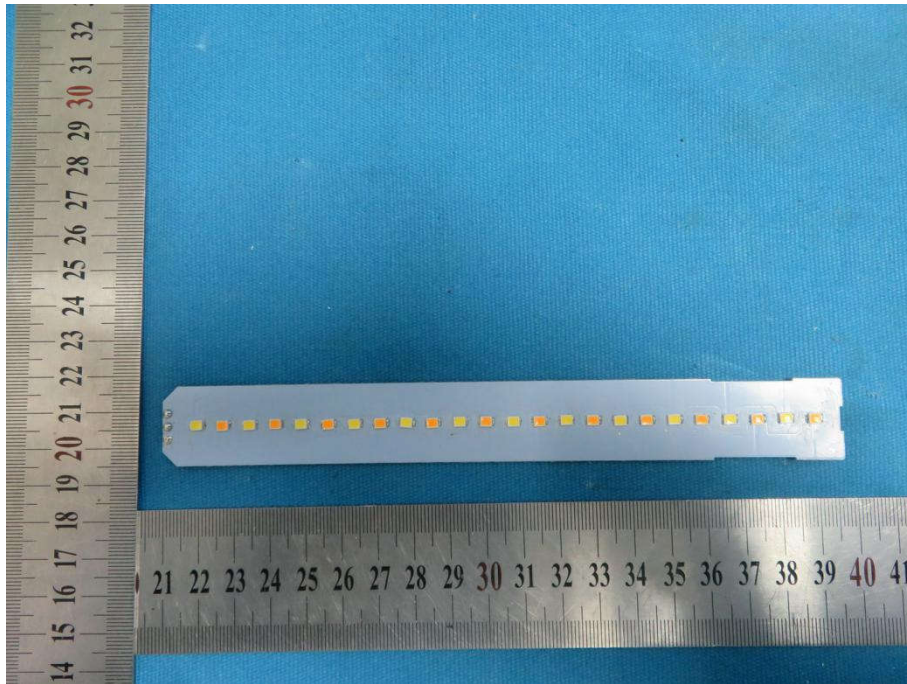


View of Product-9



View of Product-10




View of Product-11

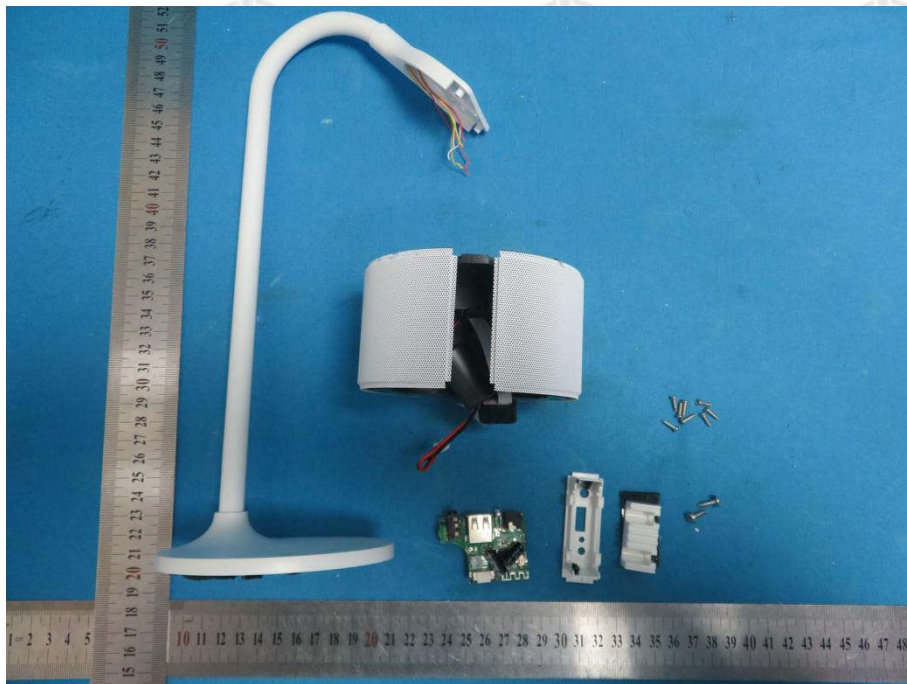


View of Product-12




View of Product-13

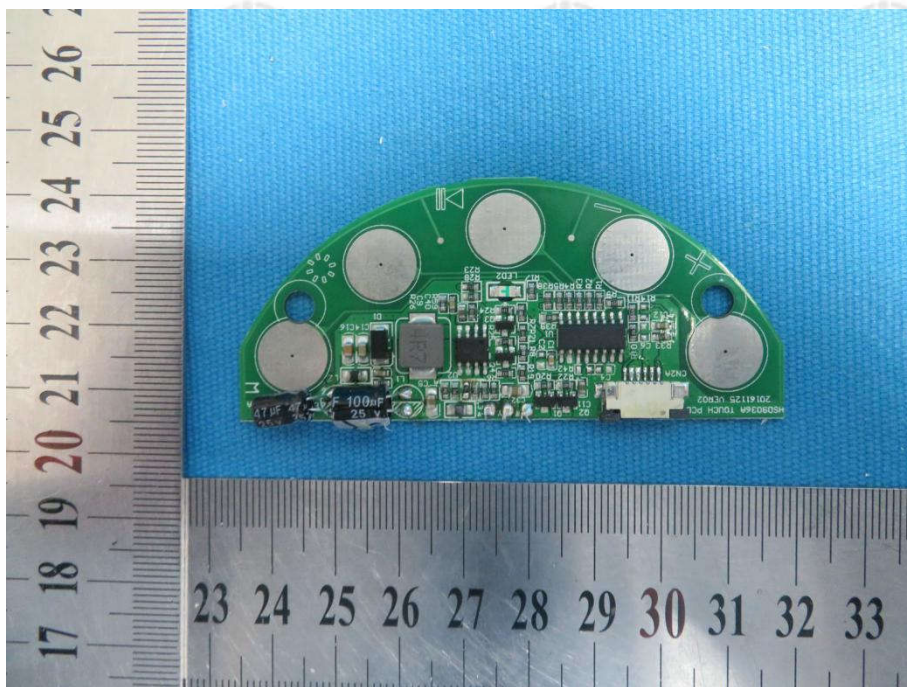

View of Product-14

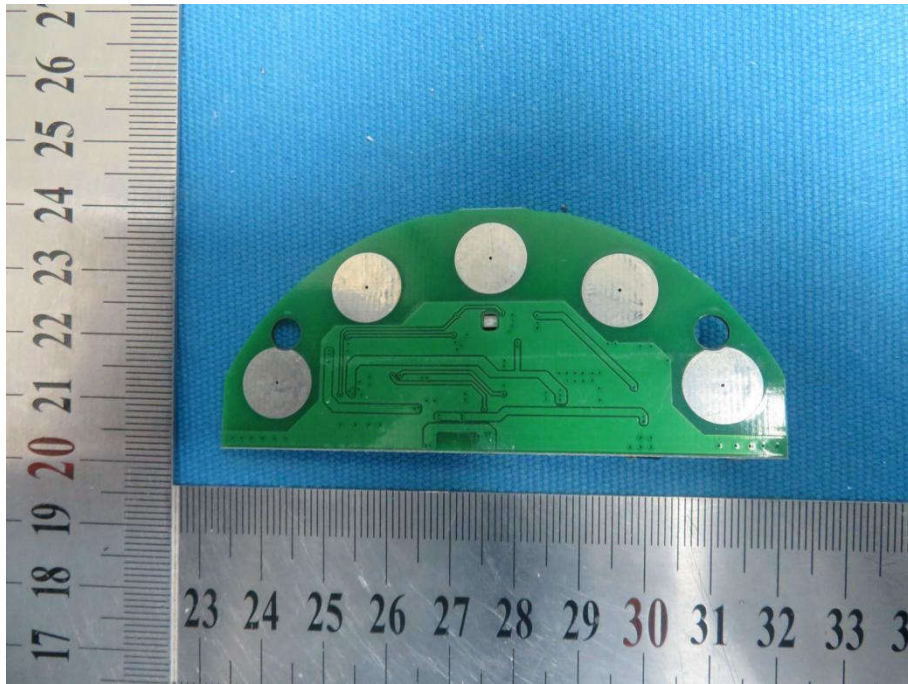


View of Product-15

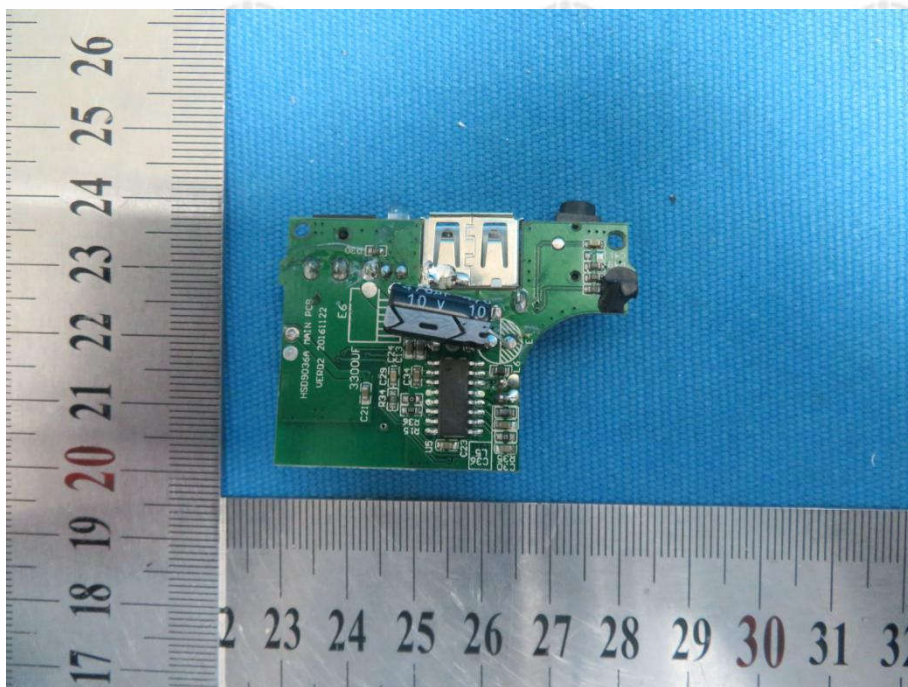

View of Product-16



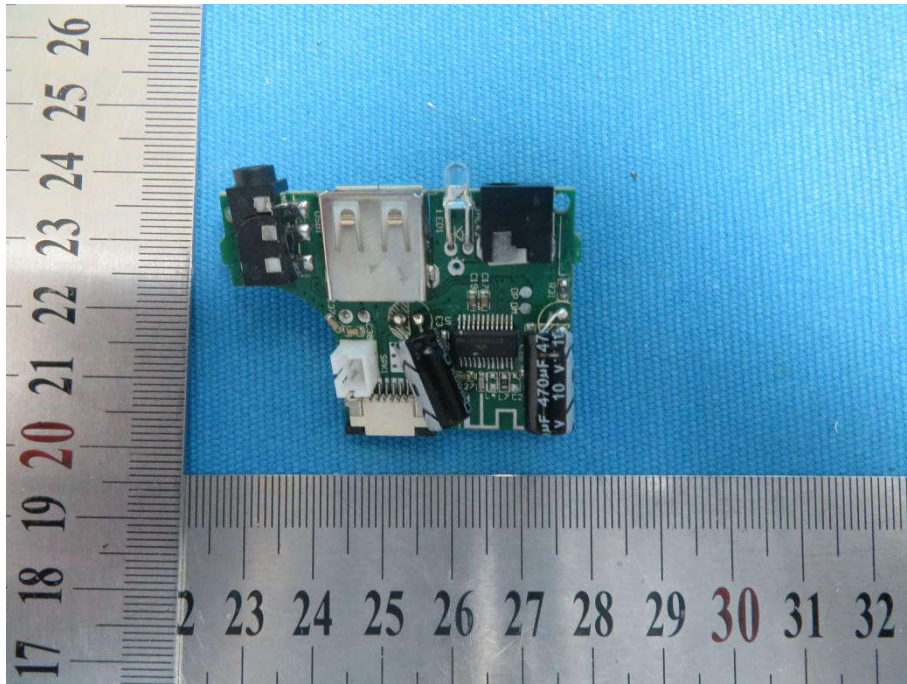

View of Product-17



View of Product-18



View of Product-19



View of Product-20



View of Product-21



View of Product-22




View of Product-23



View of Product-24



View of Product-25

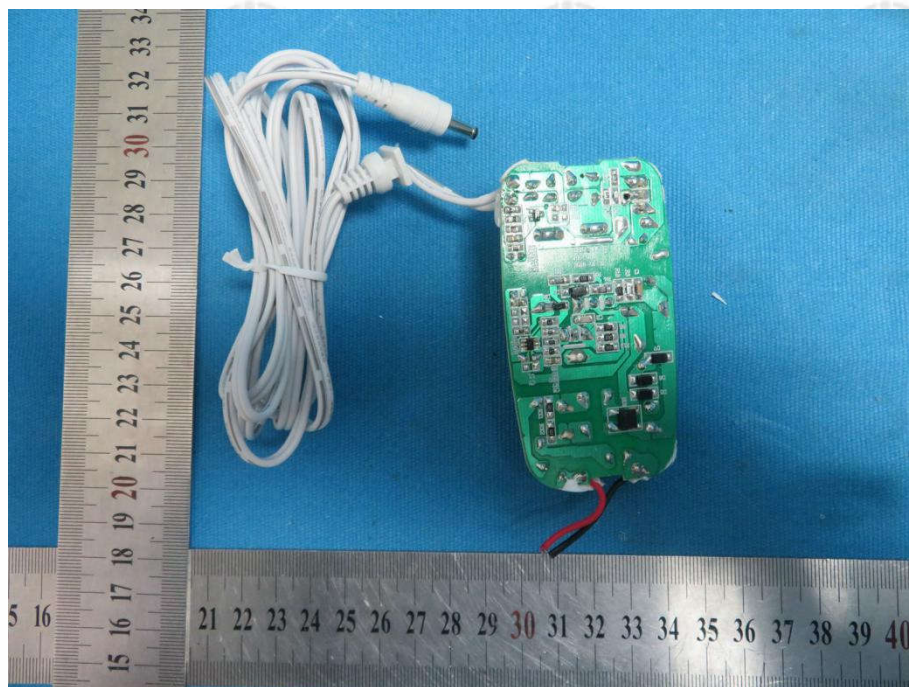

View of Product-26

\*\*\* End of Report \*\*\*

The test report is effective only with both signature and specialized stamp, The result(s) shown in this report refer only to the sample(s) tested. Without written approval of CTI, this report can't be reproduced except in full.