

MEASUREMENT REPORT

FCC PART 15.407 WLAN 802.11a/n/ac/ax


FCC ID: 2A19TOAW-AP136X

APPLICANT: ALE USA INC.

Application Type: Certification

Product: OmniAccess Stellar

Module No.: OAW-AP1361, OAW-AP1361D, OAW-AP1362

Brand Name: Alcatel-Lucent 
Enterprise


FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part15 Subpart E (Section 15.407)


Test Procedure(s): ANSI C63.10-2013, KDB 789033 D02v02r01,
KDB 662911 D01v02r01

Test Procedure(s): ANSI C63.10-2013

Test Date: November 05, 2019 ~ March 10, 2020

Reviewed By: 

(Sunny Sun)

Approved By: 

(Robin Wu)



The test results relate only to the samples tested.
This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 789033. Test results reported herein relate only to the item(s) tested.
The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
1912RSU073-U4	Rev. 01	Initial Report	03-18-2020	Invalid
1912RSU073-U4	Rev. 02	Updated some description with TCB's comment	03-28-2020	Valid

CONTENTS

Description	Page
General Information	6
1. INTRODUCTION	7
1.1. Scope	7
1.2. MRT Test Location.....	7
2. PRODUCT INFORMATION	8
2.1. Feature of Equipment under Test.....	8
2.2. Product Specification Subjective to this Report.....	8
2.3. Working Frequencies for this report	9
2.4. Description of Available Antenna.....	10
2.5. Description of Antenna RF Port.....	12
2.6. Test Mode.....	12
2.7. Description of Test Software	12
2.8. Duty Cycle	13
2.9. EMI Suppression Device(s)/Modifications	14
2.10. Labeling Requirements	14
3. DESCRIPTION OF TEST	15
3.1. Evaluation Procedure.....	15
3.2. AC Line Conducted Emissions.....	15
3.3. Radiated Emissions	16
4. ANTENNA REQUIREMENTS	17
5. TEST EQUIPMENT CALIBRATION DATE	18
6. MEASUREMENT UNCERTAINTY	20
7. TEST RESULT.....	21
7.1. Summary	21
7.2. 26dB Bandwidth Measurement.....	22
7.2.1. Test Limit	22
7.2.2. Test Procedure used	22
7.2.3. Test Setting.....	22
7.2.4. Test Setup.....	22
7.2.5. Test Result.....	23
7.3. 6dB Bandwidth Measurement.....	32
7.3.1. Test Limit	32
7.3.2. Test Procedure used	32

7.3.3.	Test Setting	32
7.3.4.	Test Setup.....	32
7.3.5.	Test Result	32
7.4.	Output Power Measurement	33
7.4.1.	Test Limit	33
7.4.2.	Test Procedure Used	33
7.4.3.	Test Setting	34
7.4.4.	Test Setup.....	34
7.4.5.	Test Result	35
7.5.	Transmit Power Control	48
7.5.1.	Test Limit	48
7.5.2.	Test Procedure Used	48
7.5.3.	Test Setting	48
7.5.4.	Test Setup.....	48
7.5.5.	Test Result	49
7.6.	Power Spectral Density Measurement	51
7.6.1.	Test Limit	51
7.6.2.	Test Procedure Used	51
7.6.3.	Test Setting	52
7.6.4.	Test Setup.....	52
7.6.5.	Test Result	53
7.7.	Frequency Stability Measurement.....	175
7.7.1.	Test Limit	175
7.7.2.	Test Procedure Used	175
7.7.3.	Test Setup.....	176
7.7.4.	Test Result	176
7.8.	Radiated Spurious Emission Measurement	177
7.8.1.	Test Limit	177
7.8.2.	Test Procedure Used	177
7.8.3.	Test Setting	177
7.8.4.	Test Setup.....	179
7.8.5.	Test Result	180
7.9.	Radiated RestrictedBand Edge Measurement	329
7.9.1.	Test Limit	329
7.9.2.	Test Procedure Used	330
7.9.3.	Test Setting	330
7.9.4.	Test Setup.....	331
7.9.5.	Test Result	332
7.10.	AC Conducted Emissions Measurement.....	610

7.10.1. Test Limit	610
7.10.2. Test Setup.....	610
7.10.3. Test Result.....	610
8. CONCLUSION.....	611
Appendix A – Test Setup Photograph.....	612
Appendix B – EUT Photograph	613

General Information

Applicant:	ALE USA INC.
Applicant Address:	26801 WEST AGOURA ROAD, CALABASAS, CA 91301, USA
Manufacturer:	ALE USA INC.
Manufacturer Address:	26801 WEST AGOURA ROAD, CALABASAS, CA 91301, USA
Test Site:	MRT Technology (Suzhou) Co., Ltd
Test Site Address:	D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China
Test Device Serial No.:	N/A <input type="checkbox"/> Production <input checked="" type="checkbox"/> Pre-Production <input type="checkbox"/> Engineering

Test Facility / Accreditations

Measurements were performed at MRT Laboratory located in Tian'edang Rd., Suzhou, China.

- MRT facility is a FCC accredited (MRT Designation No. CN1166) test facility with the site description report on file and has met all the requirements specified in ANSI C63.4-2014.
- MRT facility is an IC registered (MRT Reg. No. 11384A-1) test laboratory with the site description on file at Industry Canada.
- MRT facility is a VCCI registered (R-20025, G-20034, C-20020, T-20020) test laboratory with the site description on file at VCCI Council.
- MRT Lab is accredited to ISO 17025 by the American Association for Laboratory Accreditation (A2LA) under the American Association for Laboratory Accreditation Program (A2LACert. No.3628.01) in EMC, Telecommunications, Radio and SAR testing.



1. INTRODUCTION

1.1. Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and the Innovation, Science and Economic Development Canada.


1.2. MRT Test Location

The map below shows the location of the MRT LABORATORY, its proximity to the Taihu Lake. These measurement tests were conducted at the MRT Technology (Suzhou) Co., Ltd. Facility located at D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China. The measurement facility compliant with the test site requirements specified in ANSI C63.4-2014.



2. PRODUCT INFORMATION

2.1. Feature of Equipment under Test

Product Name:	OmniAccess Stellar
Module No.:	OAW-AP1361, OAW-AP1361D, OAW-AP1362
Brand Name:	Alcatel-Lucent  Enterprise
Wi-Fi Specification:	802.11a/b/g/n/ax
Bluetooth Specification:	v5.1 single mode
Operating Temperature:	-40 ~ 65 °C
Power Type:	PoE input
Operating Environment:	Outdoor Use
Accessories	
Adapter	Model No.: PD-9501GC/AC Input Power: 100 - 240V ~ 50/60Hz, 1.5A Output Power: 55VDC/1.1A

Note 1: The difference between models is that EUT use different antennas and appearances, other hardware and software are the same.

Note 2: The adapter is not for sale together with AP.

2.2. Product Specification Subjective to this Report

Frequency Range:	For 802.11a/n-HT20/ac-VHT20/ax-HE20: 5260~5320MHz, 5500~5720MHz For 802.11n-HT40/ac-VHT40/ax-HE40: 5270~5310MHz, 5510~5710MHz For 802.11ac-VHT80/ax-HE80: 5290MHz, 5530MHz, 5610 MHz, 5690 MHz For 802.11ac-VHT80 + 80/ax-HE80 + 80: 5210MHz, 5290MHz, 5530MHz, 5610 MHz
Type of Modulation:	802.11a/n/ac: OFDM; 802.11ax: OFDMA
Data Rate:	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 300Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2402Mbps

Note: For other features of this EUT, test report will be issued separately.

2.3. Working Frequencies for this report

802.11a/n/ac-VHT20/ax-HE20

Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260 MHz	56	5280 MHz	60	5300 MHz
64	5320 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz
144	5720 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40

Channel	Frequency	Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz	102	5510 MHz
110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	--	--

802.11ac-VHT80/ax-HE80

Channel	Frequency	Channel	Frequency	Channel	Frequency
58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	--	--	--	--

802.11ac-VHT80 + 80/ax-HE80 + 80

Channel	Frequency	Channel	Frequency	Channel	Frequency
42	5210 MHz	58	5290 MHz	106	5530 MHz
122	5610 MHz	--	--	--	--

2.4. Description of Available Antenna

Model No.: OAW-AP1361

Antenna Type	Frequency Band (GHz)	Tx Paths	Bandwidth (MHz)	Max Peak Gain (dBi)				Directional Gain (dBi)	
				Ant 0	Ant 1	Ant 2	Ant 3	CDD	Beamforming
Wi-Fi Internal Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)									
Omni Antenna	2400 ~ 2483.5	2	20, 40	4.72	4.85	--	--	4.85	7.86
	5150 ~ 5850	4	20, 40, 80	6.48	6.31	6.26	6.12	6.48	12.50
	5150 ~ 5250 30° elevation angle	4	20, 40, 80	-5.46	-4.22	-2.90	-3.84	--	
Bluetooth Internal Antenna									
Antenna Type		Frequency Band (GHz)			Max Peak Gain (dBi)				
Omni Antenna		2400 ~ 2483.5			4.64				
Scan Antenna									
Antenna Type		Frequency Band (GHz)			Max Peak Gain (dBi)				
Omni Antenna		2400 ~ 2483.5			4.58				
		5150 ~ 5850			6.00				
		5150 ~ 5250 30° elevation angle			-5.83				

Model No.: OAW-AP1361D

Antenna Type	Frequency Band (GHz)	Tx Paths	Bandwidth (MHz)	Max Peak Gain (dBi)				Directional Gain (dBi)	
				Ant 0	Ant 1	Ant 2	Ant 3	CDD	Beamforming
Wi-Fi Internal Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)									
Directional Antenna	2400 ~ 2483.5	2	20, 40	7.5	7.0	--	--	7.5	10.51
	5150 ~ 5850	4	20, 40, 80	7.4	7.0	6.9	7.2	7.4	13.42
	5150 ~ 5250 30° elevation angle	4	20, 40, 80	3.12	2.98	3.24	3.65	--	
Bluetooth Internal Antenna									
Antenna Type		Frequency Band (GHz)			Max Peak Gain (dBi)				
Omni Antenna		2400 ~ 2483.5			3.30				
Scan Antenna									
Antenna Type		Frequency Band (GHz)			Max Peak Gain (dBi)				
Omni Antenna		2400 ~ 2483.5			7.20				
		5150 ~ 5850			9.40				
		5150 ~ 5250 30° elevation angle			2.88				

Model No.: OAW-AP1362

Antenna Type	Frequency Band (GHz)	Tx Paths	Bandwidth (MHz)	Max Peak Gain (dBi)	Directional Gain (dBi)	
					CDD	Beamforming
Wi-Fi Internal Antenna List (2.4GHz 2*2 MIMO, 5GHz 4*4 MIMO)						
Omni Antenna	2400 ~ 2483.5	2	20, 40	5	5	8.01
	5150 ~ 5850	4	20, 40, 80	7	7	13.02
	5150 ~ 5250 30° elevation angle	4	20, 40, 80	-0.3	--	
Bluetooth Internal Antenna						
Antenna Type		Frequency Band (GHz)		Max Peak Gain (dBi)		
Omni Antenna		2400 ~ 2483.5		4.06		
Scan Antenna						
Antenna Type		Frequency Band (GHz)		Max Peak Gain (dBi)		
Omni Antenna		2400 ~ 2483.5		4.58		
		5150 ~ 5850		6.00		
		5150 ~ 5250 30° elevation angle		2.88		

Note 1: The EUT supports Cyclic Delay Diversity (CDD) technology for 802.11a/b/g/n/ac/ax and Beam Forming technology for 802.11n/ac/ax.

Note 2: When the EUT supports Cyclic Delay Diversity (CDD) and it is correlated.


If all antennas have the same gain, G_{ANT} , Directional gain = $G_{ANT} + \text{Array Gain}$, where Array Gain is as follows.

- For power spectral density (PSD) measurements on all devices,
Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB = 3.01;
- For power measurements on IEEE 802.11 devices,
Array Gain = 0 dB for $N_{ANT} \leq 4$;

If antenna gains are not equal, Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

Note 3: The EUT also supports Beam Forming mode, Directional gain = $G_{ANT} + 10 \log(N_{ANT}/N_{SS})$ dBi, Directional gain may be calculated by using the formulas applicable to equal gain antennas with G_{ANT} set equal to the gain of the antenna having the highest gain.

2.5. Description of Antenna RF Port

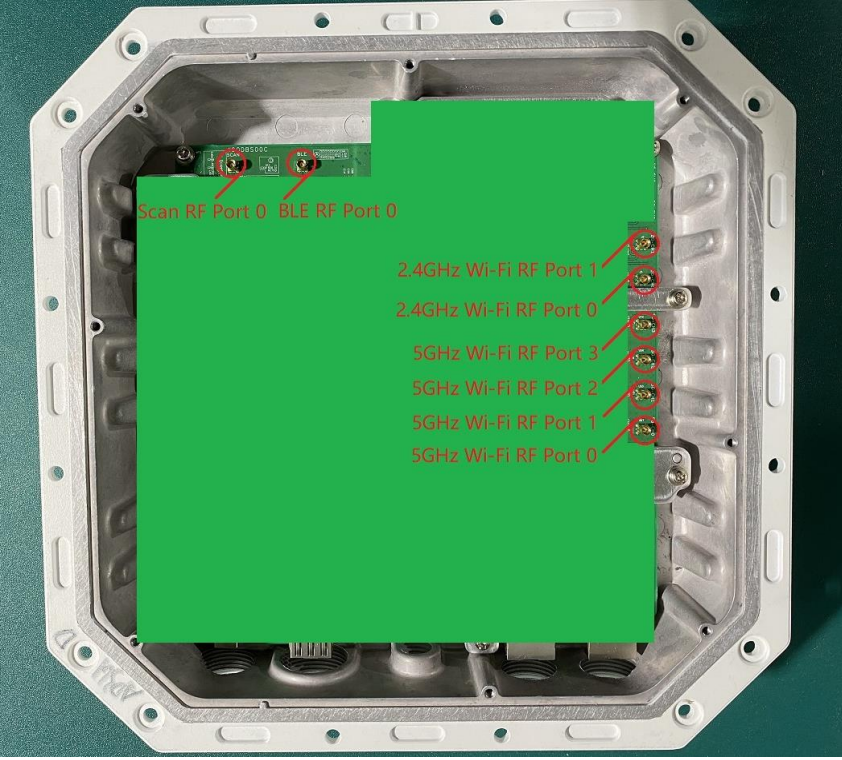Antenna RF Port								
--	2.4GHz RF Port		5GHz RF Port				Scan RF Port	BLE RF Port
Software Control Port	Ant 0	Ant 1	Ant 0	Ant 1	Ant 2	Ant 3	Ant 0	Ant 0
								

2.6. Test Mode

Test Mode	Mode 1: Transmit by 802.11a (6Mbps)
	Mode 2: Transmit by 802.11n-HT20 (MSC0)
	Mode 3: Transmit by 802.11n-HT40 (MSC0)
	Mode 4: Transmit by 802.11ax-HE20 (MSC0)
	Mode 5: Transmit by 802.11ax-HE40 (MSC0)
	Mode 6: Transmit by 802.11ax-HE80 (MSC0)
	Mode 7: Transmit by 802.11ax-HE80 + 80 (MSC0)

2.7. Description of Test Software

The test utility software used during testing was "QSPR", and the version was "v50-00170".

2.8. Duty Cycle

5GHz (NII) operation is possible in 20MHz, 40MHz, 80MHz and 80 + 80 channel bandwidths. The maximum achievable duty cycles for all modes were determined based on measurements performed on a spectrum analyzer in zero-span mode with RBW = 8MHz, VBW = 50MHz, and detector = average. The RBW and VBW were both greater than 50/T, where T is the minimum transmission duration, and the number of sweep points across T was greater than 100. The duty cycles are as follows:

Model No.:	Test Mode	Duty Cycle
OAW-AP1361	802.11a	92.19%
	802.11n-HT20	94.76%
	802.11n-HT40	91.62%
	802.11ac-VHT20	95.01%
	802.11ac-VHT40	93.79%
	802.11ac-VHT80	90.25%
	802.11ax-HE20	93.56%
	802.11ax-HE40	94.76%
	802.11ax-HE80	94.26%
OAW-AP1361D	802.11a	92.14%
	802.11n-HT20	95.80%
	802.11n-HT40	93.70%
	802.11ac-VHT20	94.76%
	802.11ac-VHT40	93.58%
	802.11ac-VHT80	90.02%
	802.11ax-HE20	95.77%
	802.11ax-HE40	95.41%
	802.11ax-HE80	94.49%
Scan Antenna	802.11a	96.20%
OAW-AP1362	802.11a	92.26%
	802.11n-HT20	95.01%
	802.11n-HT40	91.60%
	802.11ac-VHT20	95.01%
	802.11ac-VHT40	93.73%
	802.11ac-VHT80	93.52%
	802.11ax-HE20	95.03%
	802.11ax-HE40	96.02%
	802.11ax-HE80	94.27%

2.9. EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and/or no modifications were made during testing.

2.10. Labeling Requirements

Per 2.1074 & 15.19; Docket 95-19

The label shall be permanently affixed at a conspicuous location on the device; instruction manual or pamphlet supplied to the user and be readily visible to the purchaser at the time of purchase. However, when the device is so small wherein placement of the label with specified statement is not practical, only the FCC ID must be displayed on the device per Section 15.19(a)(5). Please see attachment for FCC ID label and label location.

3. DESCRIPTION OF TEST

3.1. Evaluation Procedure

The measurement procedure described in the document titled “American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices” (ANSI C63.10-2013) was used in the measurement.

3.2. AC Line Conducted Emissions

The line-conducted facility is located inside an 8'x4'x4' shielded enclosure. A 1m x 2m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50uH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference ground-plane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the receiver and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The receiver was scanned from 150kHz to 30MHz. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 9kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Each emission was also maximized by varying: power lines, the mode of operation or data exchange speed, or support equipment whichever determined the worst-case emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions are used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

An extension cord was used to connect to a single LISN which powered by EUT. The extension cord was calibrated with LISN, the impedance and insertion loss are compliance with the requirements as stated in ANSI C63.10-2013.

3.3. Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. For measurements above 1GHz absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections. For measurements below 1GHz, the absorbers are removed. A MF Model 210SS turntable is used for radiated measurement. It is a continuously rotatable, remote controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. An 80cm high PVC support structure is placed on top of the turntable.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up for frequencies below 1GHz was placed on top of the 0.8 meter high, 1 x 1.5 meter table; and test set-up for frequencies 1-40GHz was placed on top of the 1.5 meter high, 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, clock speed, mode of operation or video resolution, if applicable, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions. According to 3dB Beam-Width of horn antenna, the horn antenna should be always directed to the EUT when rising height.

4. ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

Conclusion:

The product is defined as the professional installation of equipment by the manufacturer, there is no necessary to comply with the requirement of §15.203.

5. TEST EQUIPMENT CALIBRATION DATE

Conducted Emissions - SR2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR3	MRTSUE06185	1 year	2020/04/15
Two-Line V-Network	R&S	ENV 216	MRTSUE06002	1 year	2020/06/13
Two-Line V-Network	R&S	ENV 216	MRTSUE06003	1 year	2020/06/13
Thermohygrometer	Testo	608-H1	MRTSUE06404	1 year	2020/08/08
Shielding Room	MIX-BEP	Chamber-SR2	MRTSUE06215	N/A	N/A

Radiated Emissions - AC1

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EMI Test Receiver	R&S	ESR7	MRTSUE06001	1 year	2020/08/01
PXA Signal Analyzer	Keysight	9030B	MRTSUE06395	1 year	2020/09/03
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/13
				1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9168	MRTSUE06172	1 year	2020/03/31
Broad Band Horn Antenna	Schwarzbeck	BBHA 9120D	MRTSUE06023	1 year	2020/10/13
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/17
Microwave System Amplifier	Agilent	83017A	MRTSUE06076	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Thermohygrometer	Testo	608-H1	MRTSUE06403	1 year	2020/08/08
Anechoic Chamber	TDK	Chamber-AC1	MRTSUE06212	1 year	2020/04/30

Radiated Emission - AC2

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
Spectrum Analyzer	Keysight	N9038A	MRTSUE06125	1 year	2020/08/01
Loop Antenna	Schwarzbeck	FMZB 1519	MRTSUE06025	1 year	2019/11/13
				1 year	2020/11/13
Bilog Period Antenna	Schwarzbeck	VULB 9162	MRTSUE06022	1 year	2020/10/13
Horn Antenna	Schwarzbeck	BBHA9120D	MRTSUE06171	1 year	2020/10/27
Broad Band Horn Antenna	Schwarzbeck	BBHA 9170	MRTSUE06024	1 year	2020/12/17
Broadband Coaxial Preamplifier	Schwarzbeck	BBV 9718	MRTSUE06176	1 year	2020/11/15
Preamplifier	Schwarzbeck	BBV 9721	MRTSUE06121	1 year	2020/06/11
Temperature/Humidity Meter	Minggao	ETH529	MRTSUE06170	1 year	2020/12/13
Anechoic Chamber	RIKEN	Chamber-AC2	MRTSUE06213	1 year	2020/04/30

Conducted Test Equipment - TR3

Instrument	Manufacturer	Type No.	Asset No.	Cali. Interval	Cali. Due Date
EXA Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2020/04/15
EXA Signal Analyzer	Keysight	N9010B	MRTSUE06452	1 year	2020/07/11
Signal Analyzer	R&S	FSV40	MRTSUE06218	1 year	2020/04/15
Power Meter	Agilent	U2021XA	MRTSUE06030	1 year	2020/11/18
USB wideband power sensor	Keysight	U2021XA	MRTSUE06446	1 year	2020/06/30
USB wideband power sensor	Keysight	U2021XA	MRTSUE06447	1 year	2020/06/30
Bluetooth Test Set	Anritsu	MT8852B-042	MRTSUE06389	1 year	2020/06/13
Audio Analyzer	Agilent	U8903B	MRTSUE06143	1 year	2020/06/13
Modulation Analyzer	HP	8901A	MRTSUE06098	1 year	2020/10/10
Wideband Radio Communication Tester	R&S	CMW 500	MRTSUE06243	1 year	2020/11/07
DC Power Supply	GWINSTEK	DPS-3303C	MRTSUE06064	N/A	N/A
Temperature & Humidity Chamber	BAOYT	BYH-150CL	MRTSUE06051	1 year	2020/11/07
Thermohygrometer	testo	608-H1	MRTSUE06401	1 year	2020/08/08

Software	Version	Function
EMI Software	V3	EMI Test Software

6. MEASUREMENT UNCERTAINTY

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Conducted Emission Measurement - SR2
<p>The maximum measurement uncertainty is evaluated as:</p> <p>9kHz~150kHz: 3.84dB</p> <p>150kHz~30MHz: 3.46dB</p>
Radiated Emission Measurement - AC1
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Horizontal: 30MHz~300MHz: 4.07dB</p> <p> 300MHz~1GHz: 3.63dB</p> <p> 1GHz~18GHz: 4.16dB</p> <p>Vertical: 30MHz~300MHz: 4.18dB</p> <p> 300MHz~1GHz: 3.60dB</p> <p> 1GHz~18GHz: 4.76dB</p>
Radiated Emission Measurement - AC2
<p>The maximum measurement uncertainty is evaluated as:</p> <p>Horizontal: 30MHz~300MHz: 3.75dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.28dB</p> <p>Vertical: 30MHz~300MHz: 3.86dB</p> <p> 300MHz~1GHz: 3.53dB</p> <p> 1GHz~18GHz: 4.33dB</p>

7. TEST RESULT

7.1. Summary

FCC Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.407(a)	26dB Bandwidth	N/A	Conducted	Pass	Section 7.2
15.407(e)	6dB Bandwidth	$\geq 500\text{kHz}$		N/A	Section 7.3
15.407(a)(1)(ii), (2)	Maximum Conducted Output Power	Refer to Section 7.5		Pass	Section 7.5
15.407(h)(1)	Transmit Power Control	$\leq 24\text{ dBm}$		Pass	Section 7.6
15.407(a)(1)(ii), (2)	Peak Power Spectral Density	Refer to Section 7.7		Pass	Section 7.7
15.407(g)	Frequency Stability	$\pm 20\text{ ppm}$		N/A	Section 7.8
15.407(b)(1), (2), (3)	Undesirable Emissions	Refer to Section 7.9 & 7.10	Radiated	Pass	Section 7.9 & 7.10
15.205, 15.209 15.407(b)(5), (6), (7)	General Field Strength Limits (Restricted Bands and Radiated Emission Limits)	Emissions in restricted bands must meet the radiated limits detailed in 15.209		Pass	
15.207	AC Conducted Emissions 150kHz - 30MHz	< FCC 15.207 limits	Line Conducted	Pass	Section 7.11

Notes:

- 1) The analyzer plots shown in this section were all taken with a correction table loaded into the analyzer. The correction table was used to account for the losses of the cables and attenuators used as part of the system to connect the EUT to the analyzer at all frequencies of interest.
- 2) All modes of operation and data rates were investigated. For radiated emission test, every axis (X, Y, Z) was also verified. The test results shown in the following sections represent the worst case emissions.
- 3) The difference between models is that EUT use different antennas and appearances, other hardware and software are the same, so we only use the OAW-AP1361 to perform all conducted tests. Test Items "26dB Bandwidth", "6dB Bandwidth" have been assessed MIMO transmission, and showed the worst test data in this report.
- 4) Test Item "Radiated Spurious Emission" have been showed the worst beam-forming test data in this report.
- 5) We have evaluated 802.11a/n/ac/ax mode and showed the test data of 802.11a/n/ax mode.

7.2. 26dB Bandwidth Measurement

7.2.1. Test Limit

N/A


7.2.2. Test Procedure used

KDB 789033 D02v02r01-Section C.1

7.2.3. Test Setting

1. The analyzers' automatic bandwidth measurement capability was used to perform the 26dB bandwidth measurement. The "X" dB bandwidth parameter was set to $X = 26$. The automatic bandwidth measurement function also has the capability of simultaneously measuring the 99% occupied bandwidth. The bandwidth measurement was not influenced by any intermediated power nulls in the fundamental emission.
2. RBW = approximately 1% of the emission bandwidth.
3. VBW $\geq 3 \times$ RBW.
4. Detector = Peak.
5. Trace mode = max hold.

7.2.4. Test Setup

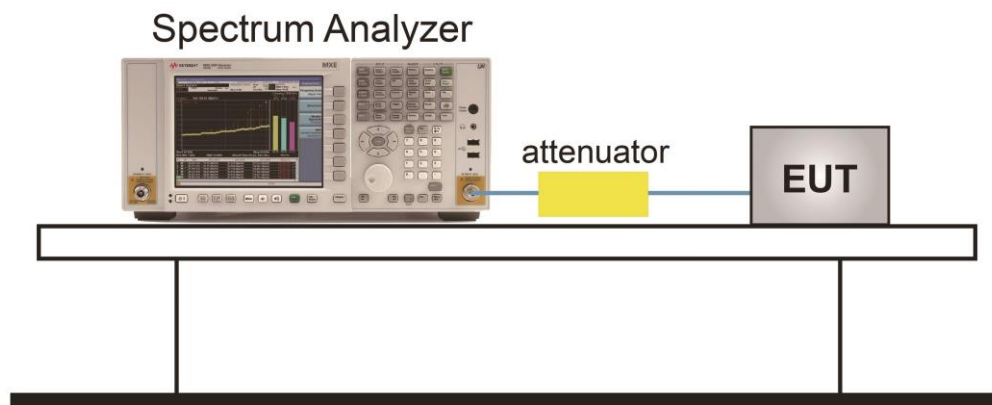

7.2.5. Test Result


Product	OmniAccess Stellar	Temperature	24 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	48 ~ 56%
Test Site	TR3	Test Date	2019/11/28 ~ 2019/12/13
Model No.	OAW-AP1361	Test Item	26dB Bandwidth

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)
Ant 0 / Ant 0 + 1 + 2 + 3				
802.11a	6Mbps	52	5260	19.37
802.11a	6Mbps	60	5300	19.00
802.11a	6Mbps	64	5320	19.20
802.11a	6Mbps	100	5500	19.15
802.11a	6Mbps	120	5600	19.12
802.11a	6Mbps	140	5700	19.29
802.11a	6Mbps	144	5720	19.28
802.11n-HT20	MCS0	52	5260	20.33
802.11n-HT20	MCS0	60	5300	20.44
802.11n-HT20	MCS0	64	5320	20.24
802.11n-HT20	MCS0	100	5500	20.10
802.11n-HT20	MCS0	120	5600	19.96
802.11n-HT20	MCS0	140	5700	20.33
802.11n-HT20	MCS0	144	5720	20.28
802.11n-HT40	MCS0	54	5270	39.96
802.11n-HT40	MCS0	62	5310	39.98
802.11n-HT40	MCS0	102	5510	40.33
802.11n-HT40	MCS0	118	5590	40.04
802.11n-HT40	MCS0	134	5670	39.67
802.11n-HT40	MCS0	142	5710	40.10
802.11ax-HE20	MCS0	52	5260	20.87
802.11ax-HE20	MCS0	60	5300	20.79
802.11ax-HE20	MCS0	64	5320	20.83
802.11ax-HE20	MCS0	100	5500	20.92
802.11ax-HE20	MCS0	120	5600	20.75
802.11ax-HE20	MCS0	140	5700	21.32
802.11ax-HE20	MCS0	144	5720	20.50

Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	26dB Bandwidth (MHz)
Ant 0 / Ant 0 + 1 + 2 + 3				
802.11ax-HE40	MCS0	54	5270	40.45
802.11ax-HE40	MCS0	62	5310	40.80
802.11ax-HE40	MCS0	102	5510	41.05
802.11ax-HE40	MCS0	118	5590	40.41
802.11ax-HE40	MCS0	134	5670	40.40
802.11ax-HE40	MCS0	142	5710	40.44
802.11ax-HE80	MCS0	58	5290	81.22
802.11ax-HE80	MCS0	106	5530	82.22
802.11ax-HE80	MCS0	122	5610	82.19
802.11ax-HE80	MCS0	138	5690	81.72
802.11ax-HE80 + 80	MCS0	42	5210	88.24
		58	5290	126.0
802.11ax-HE80 + 80	MCS0	106	5530	88.59
		122	5610	91.41

802.11a 26dB & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 52 (5260MHz)

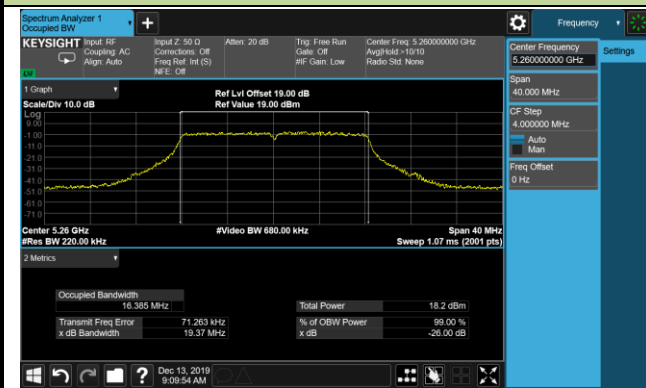

Channel 60 (5300MHz)




Channel 64 (5320MHz)

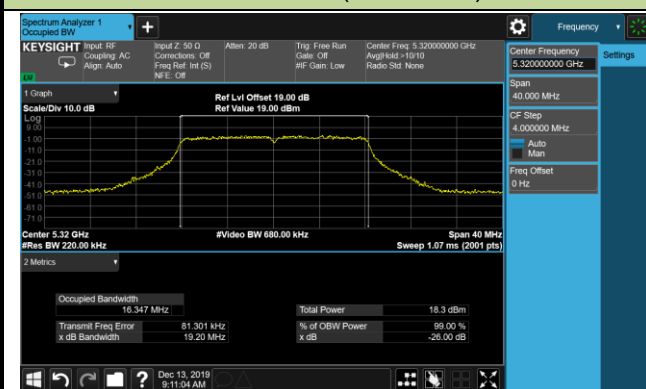


Channel 100 (5500MHz)




Channel 120 (5600MHz)

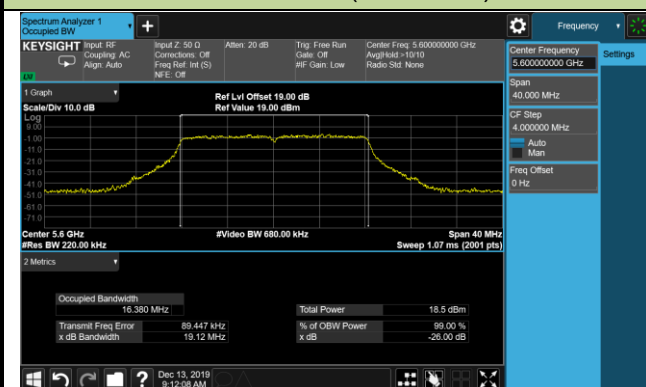

Channel 140 (5700MHz)

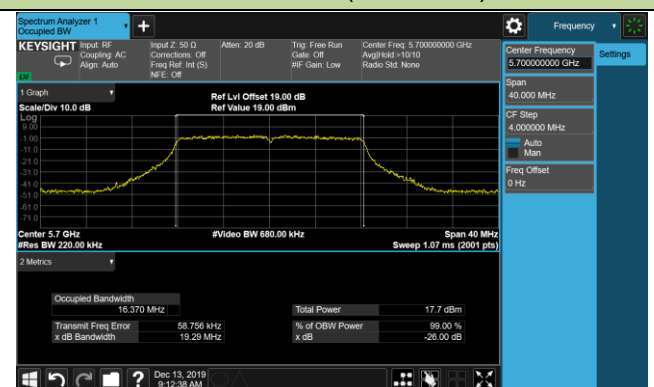


Channel 144 (5720MHz)

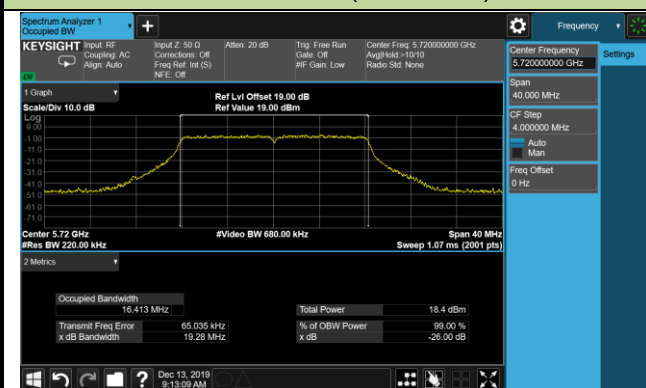


802.11n-HT20 26dB & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 52 (5260MHz)

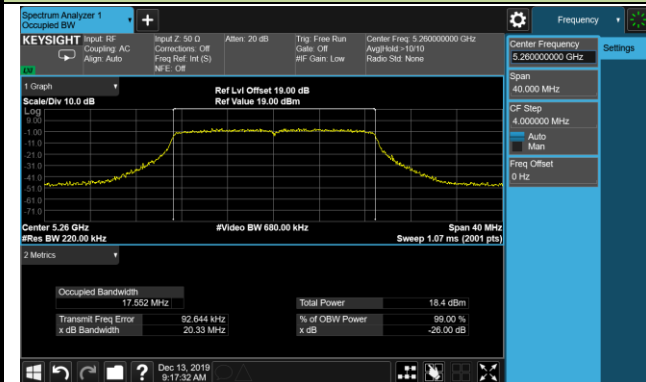


Channel 60 (5300MHz)

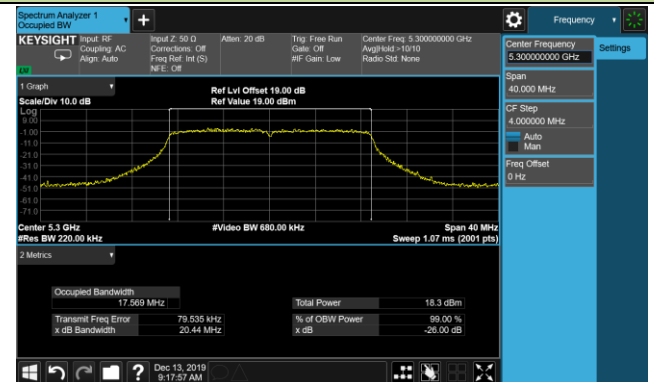


Channel 64 (5320MHz)

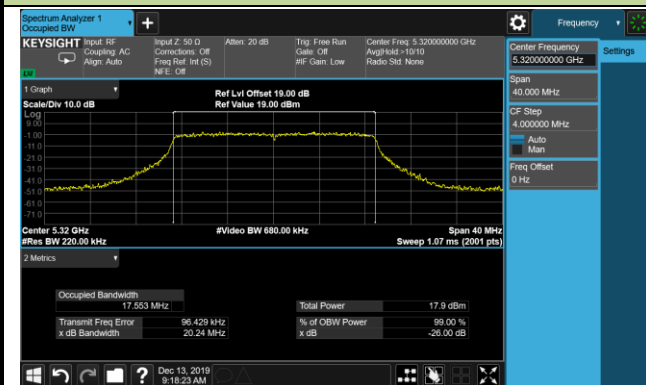


Channel 100 (5500MHz)

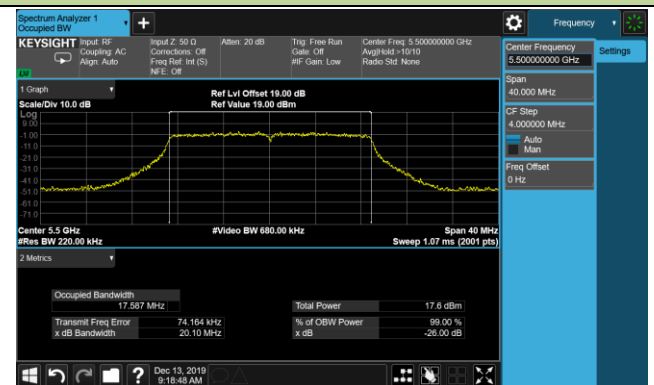


Channel 120 (5600MHz)

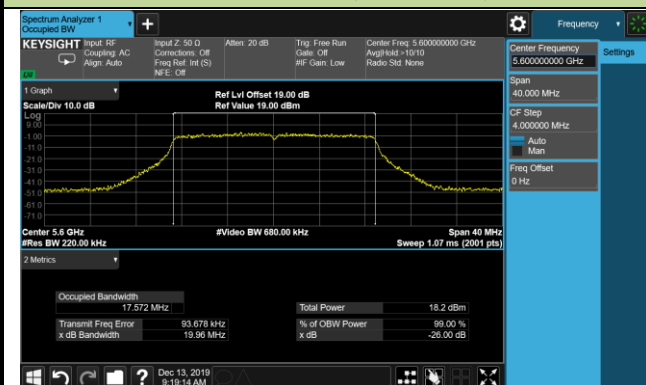

Channel 140 (5700MHz)

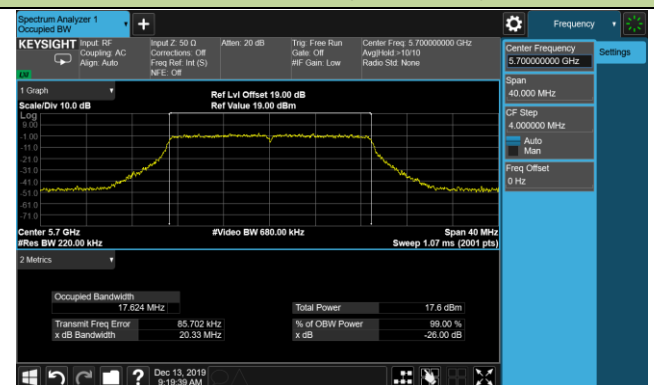


Channel 144 (5720MHz)

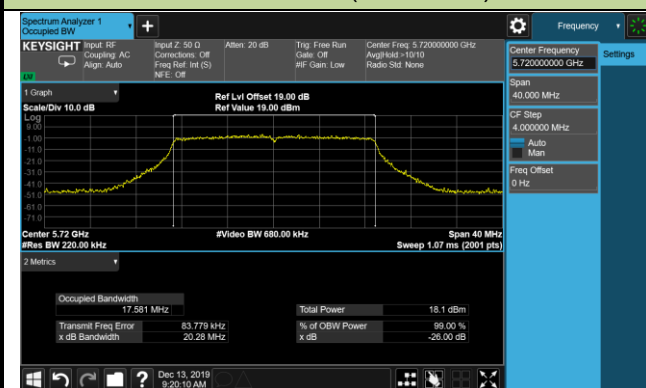


802.11n-HT40 26dB & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 54 (5270MHz)

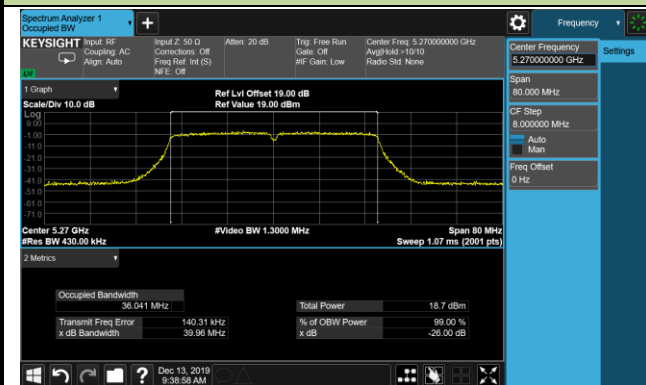


Channel 62 (5310MHz)

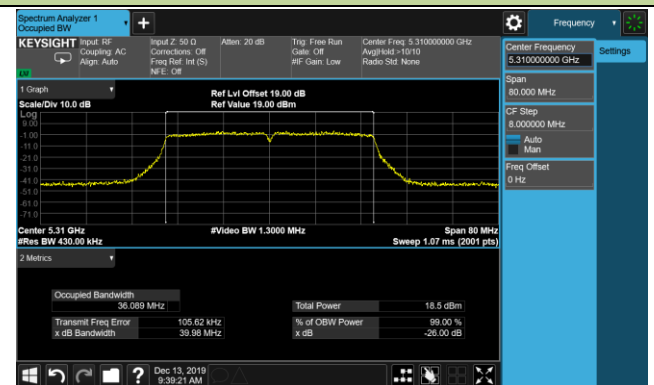


Channel 102 (5510MHz)

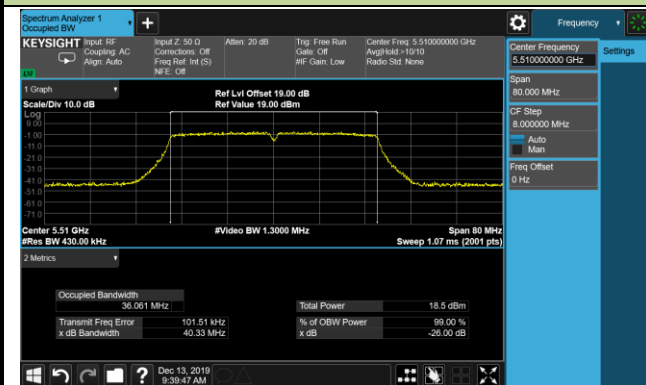


Channel 118 (5590MHz)

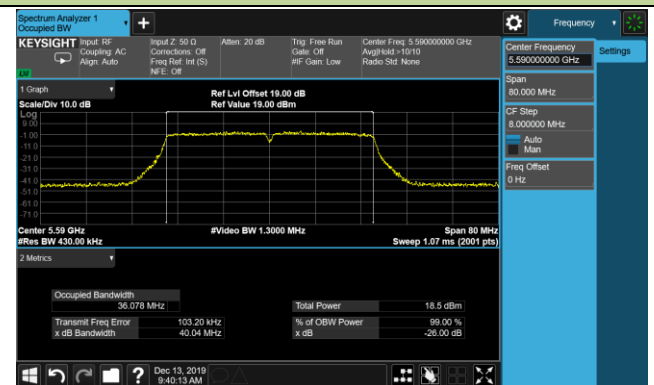

Channel 134 (5670MHz)

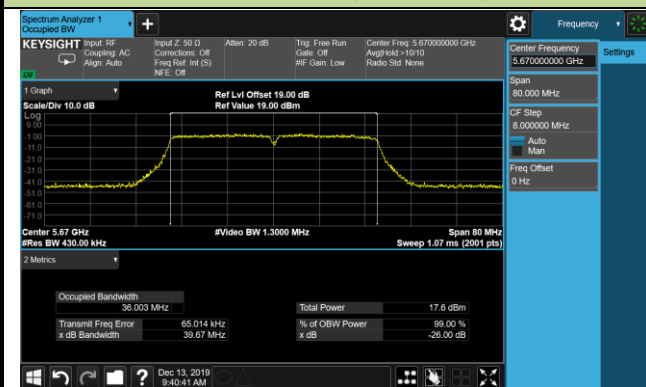


Channel 142 (5710MHz)

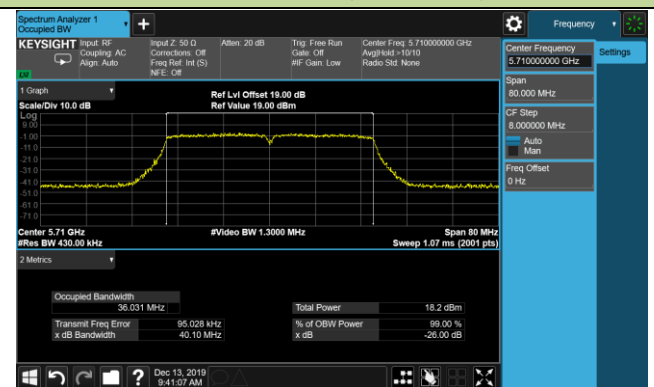


802.11ax-HE20 26dB & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 52 (5260MHz)

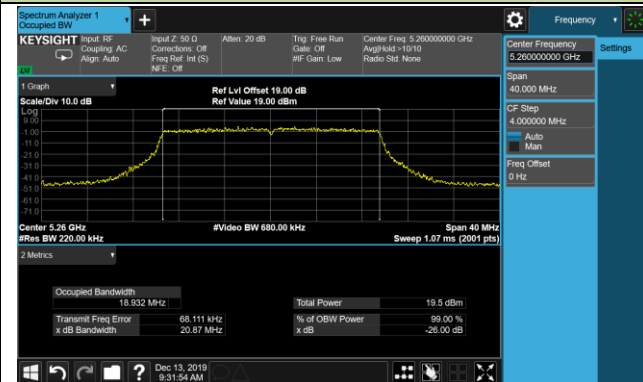


Channel 60 (5300MHz)

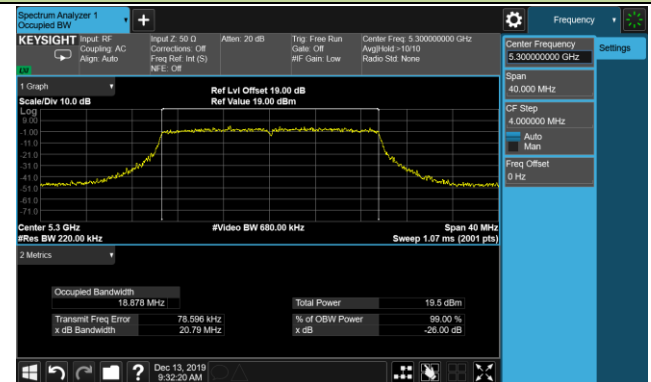


Channel 64 (5320MHz)

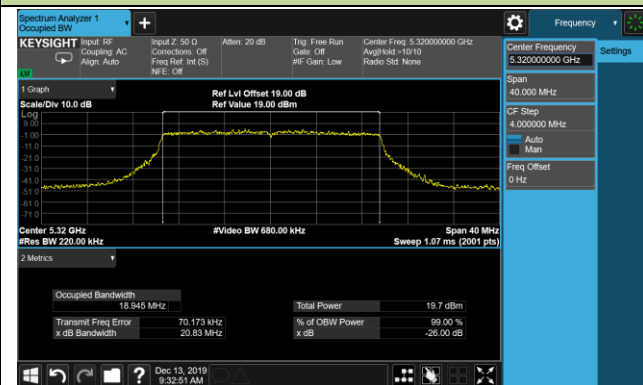


Channel 100 (5500MHz)

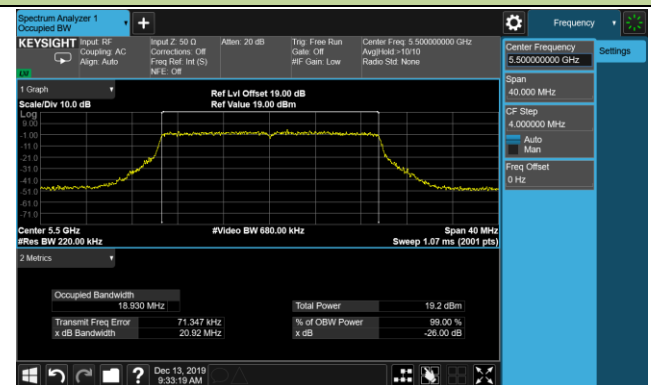


Channel 120 (5600MHz)

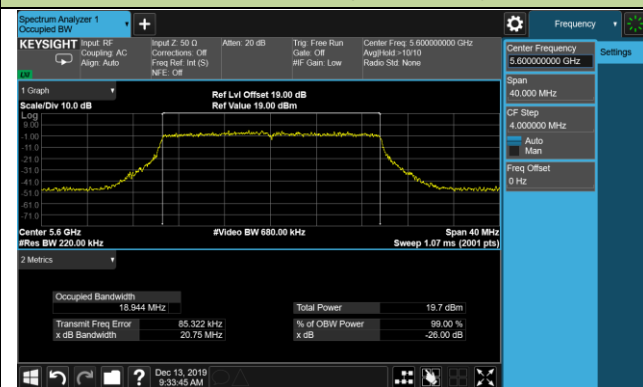

Channel 140 (5700MHz)

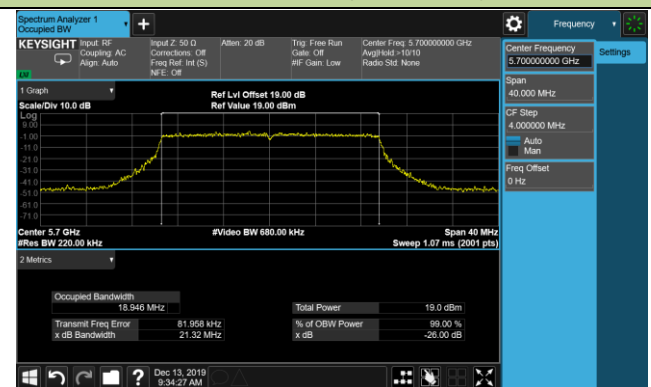


Channel 144 (5720MHz)

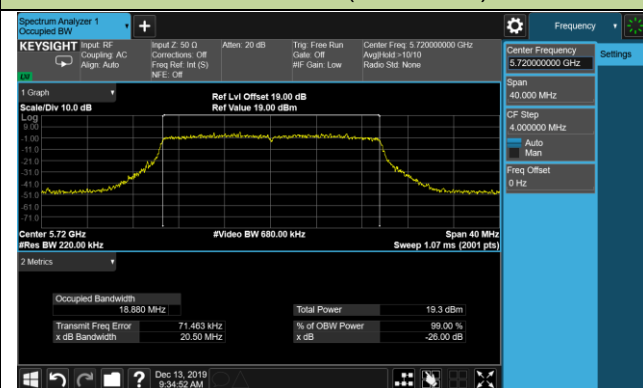


802.11ax-HE40 26dB & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 54 (5270MHz)

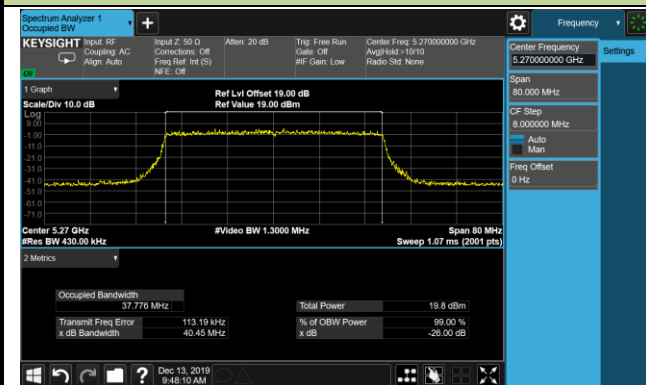

Channel 62 (5310MHz)

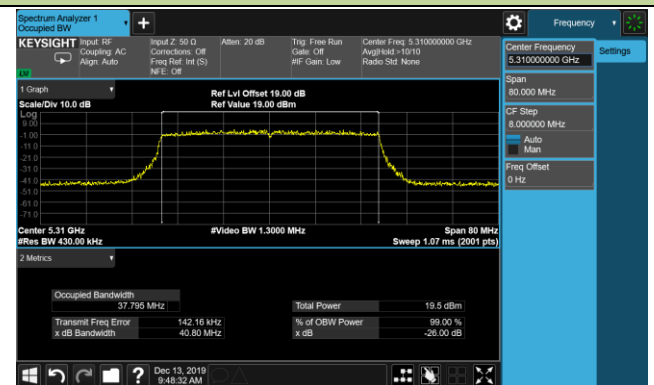


Channel 102 (5510MHz)

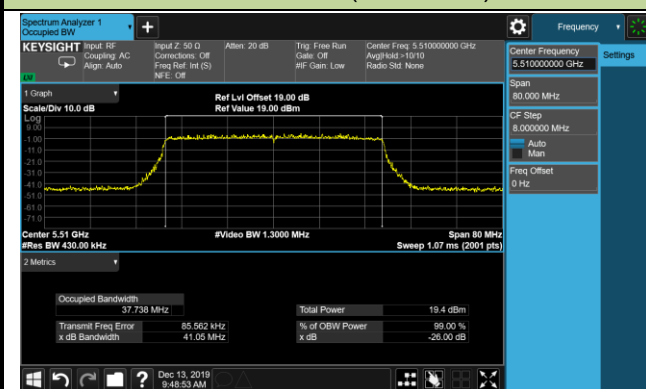


Channel 118 (5590MHz)



Channel 134 (5670MHz)

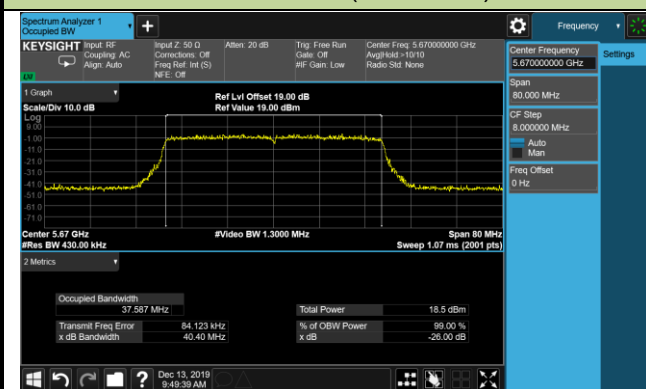


Channel 142 (5710MHz)

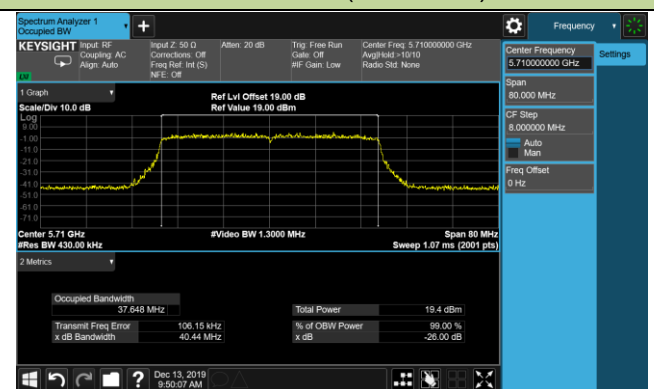


802.11ax-HE80 26dB & 99% Bandwidth - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 58 (5290MHz)

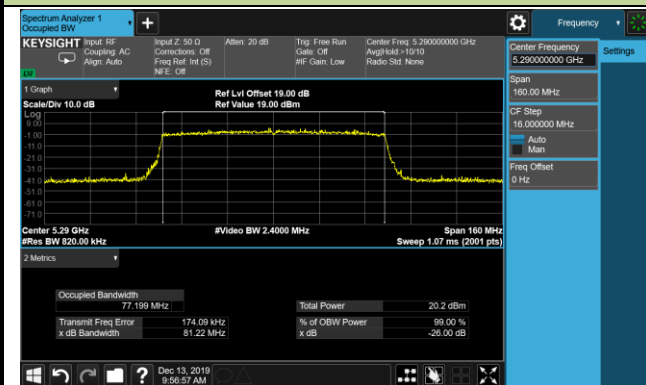


Channel 106 (5530MHz)

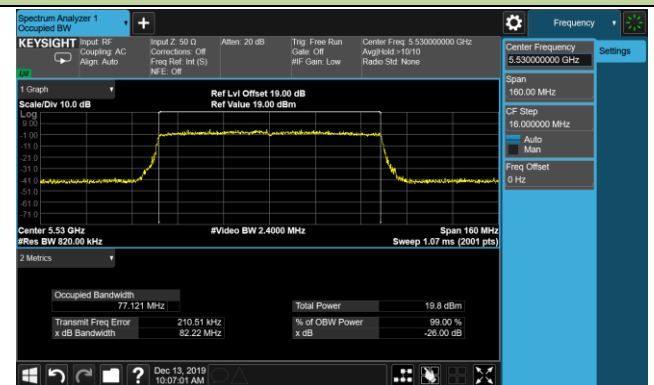

Channel 122 (5610MHz)

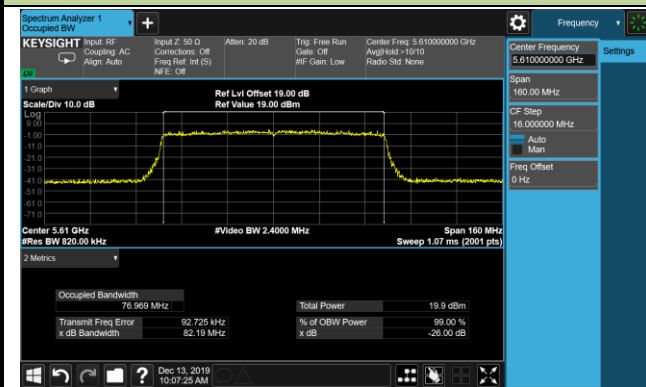


Channel 138 (5690MHz)

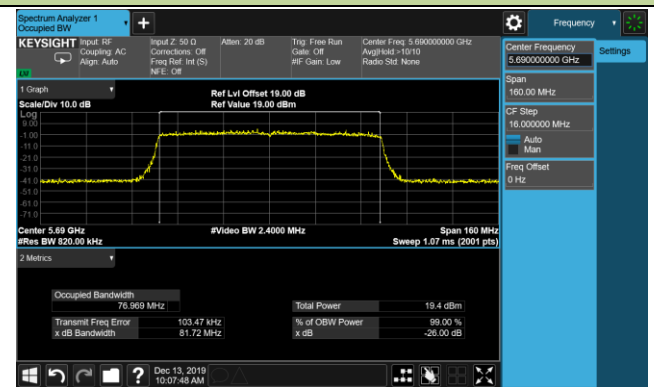

802.11ax-HE80 + 80 26dB & 99% Bandwidth


Channel 42 (5210MHz)

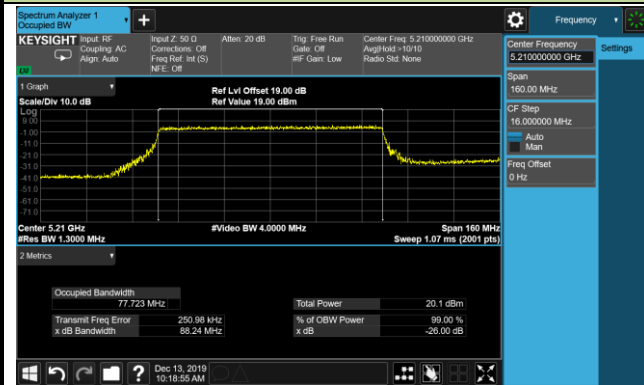

Channel 58 (5290MHz)



Channel 106 (5530MHz)

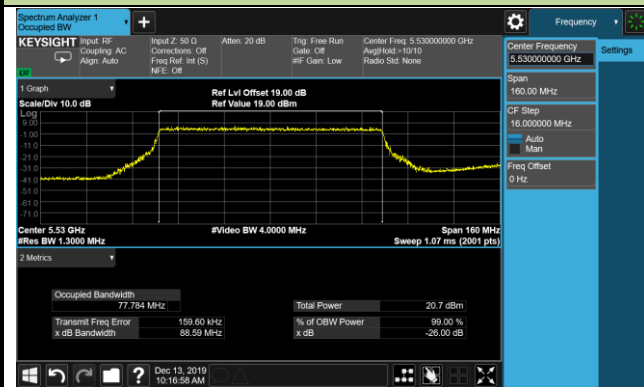

Channel 122 (5610MHz)



7.3. 6dB Bandwidth Measurement

7.3.1. Test Limit

The minimum 6dB bandwidth shall be at least 500 kHz.


7.3.2. Test Procedure used

KDB 789033 D02v02r01 - Section C.2

7.3.3. Test Setting

1. Set center frequency to the nominal EUT channel center frequency.
2. RBW = 100 kHz.
3. VBW \geq 3 \times RBW.
4. Detector = Peak.
5. Trace mode = max hold.
6. Sweep = auto couple.
7. Allow the trace to stabilize.
8. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

7.3.4. Test Setup

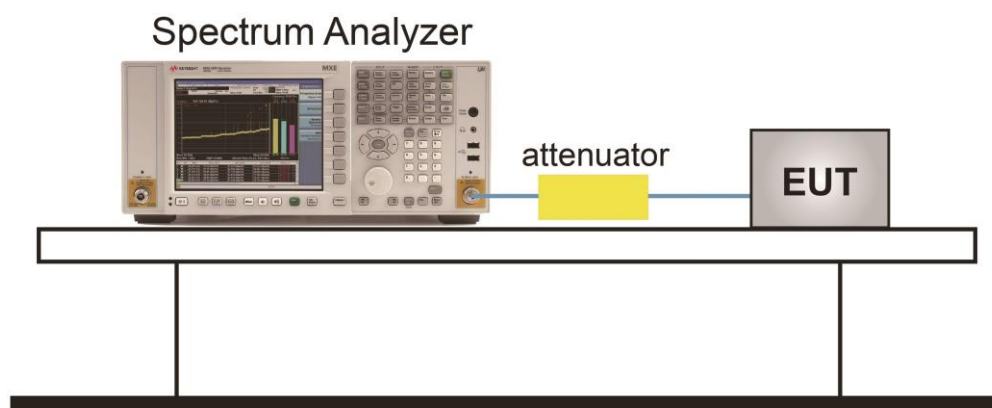

7.3.5. Test Result

The test item is not required for systems operating in frequency band 5250-5350MHz & 5470-5725MHz.

7.4. Output Power Measurement

7.4.1. Test Limit

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW (23.98dBm) or 11dBm +10 log (26dB BW).

If transmitting antennas of directional gain greater than 6dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Frequency Band (MHz)	Per Chain Max Antenna Gain (dBi)				Directional Gain (dBi)		Limit (dBm)	
	Ant 0	Ant 1	Ant 2	Ant 3	CDD	Beamforming	CDD	Beamforming
OAW-AP1361								
5250 ~ 5725	6.48	6.31	6.26	6.12	6.48	12.50	23.50	17.48
OAW-AP1361D								
5250 ~ 5725	7.4	7.0	6.9	7.2	7.4	13.42	22.58	16.56
OAW-AP1362								
5250 ~ 5725	7				7	13.02	22.98	16.96


7.4.2. Test Procedure Used

KDB 789033D02v01r04- Section E)3)b) Method PM-G

7.4.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.4.4. Test Setup

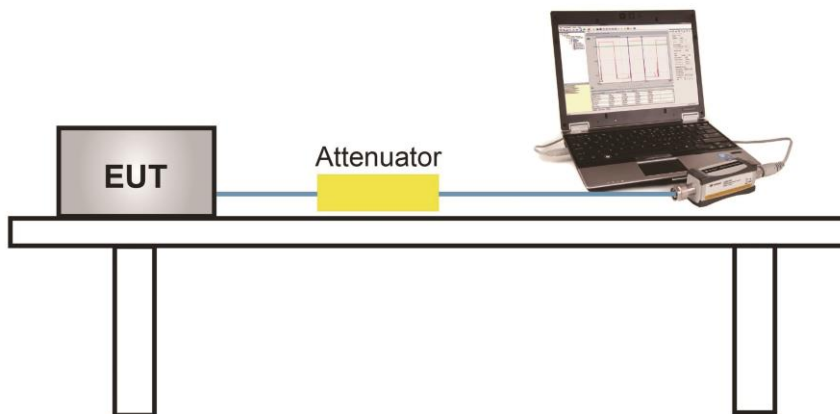

7.4.5. Test Result

Power output test was verified over all data rates of each mode shown as below table, and then choose the maximum power output (gray marker) for final test of each channel.

Output power at various data rates for Ant 0 / Ant 0 + 1 + 2 + 3 port:

Test Mode	Bandwidth	Channel	Frequency (MHz)	Data Rate/ MCS	Average Power (dBm)
802.11a	20	52	5260	6Mbps	8.10
				24Mbps	7.97
				54Mbps	7.72
802.11n	20	52	5260	MCS0	8.71
				MCS4	8.55
				MCS7	8.31
802.11n	40	54	5270	MCS0	11.39
				MCS4	11.20
				MCS7	11.04
802.11ax	20	52	5260	MCS0	8.47
				MCS6	8.13
				MCS11	8.02
802.11ax	40	54	5270	MCS0	11.61
				MCS6	11.41
				MCS11	11.06
802.11ax	80	58	5290	MCS0	14.16
				MCS6	14.01
				MCS11	13.83
802.11ax	80 + 80	106	5530	MCS0	14.27
				MCS6	14.06
				MCS11	13.81

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	45 ~ 56%
Test Site	TR3	Test Date	2019/10/20 ~ 2020/03/02
Model No.	OAW-AP1361 CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11a	6Mbps	52	5260	8.10	7.91	7.52	7.96	13.90	≤ 23.50	Pass
11a	6Mbps	60	5300	8.06	8.21	7.74	8.09	14.05	≤ 23.50	Pass
11a	6Mbps	64	5320	7.91	8.01	7.41	7.79	13.81	≤ 23.50	Pass
11a	6Mbps	100	5500	7.91	7.90	7.47	7.95	13.83	≤ 23.50	Pass
11a	6Mbps	120	5600	7.15	7.65	7.39	7.33	13.40	≤ 23.50	Pass
11a	6Mbps	140	5700	8.00	8.31	7.84	7.47	13.94	≤ 23.50	Pass
11a	6Mbps	144	5720	7.55	7.66	7.91	8.01	13.81	≤ 23.50	Pass
11n-HT20	MCS0	52	5260	8.71	8.45	8.45	8.42	14.53	≤ 23.50	Pass
11n-HT20	MCS0	60	5300	8.50	8.79	8.61	8.44	14.61	≤ 23.50	Pass
11n-HT20	MCS0	64	5320	8.59	8.69	8.44	8.66	14.62	≤ 23.50	Pass
11n-HT20	MCS0	100	5500	8.76	8.84	8.62	8.89	14.80	≤ 23.50	Pass
11n-HT20	MCS0	120	5600	8.53	8.85	8.58	8.53	14.65	≤ 23.50	Pass
11n-HT20	MCS0	140	5700	8.28	8.65	8.15	7.95	14.29	≤ 23.50	Pass
11n-HT20	MCS0	144	5720	8.16	8.68	8.63	8.45	14.51	≤ 23.50	Pass
11n-HT40	MCS0	54	5270	11.39	11.47	11.13	11.30	17.34	≤ 23.50	Pass
11n-HT40	MCS0	62	5310	10.90	11.02	10.72	11.17	16.98	≤ 23.50	Pass
11n-HT40	MCS0	102	5510	11.03	11.15	10.85	11.12	17.06	≤ 23.50	Pass
11n-HT40	MCS0	118	5590	11.16	10.72	11.12	11.06	17.04	≤ 23.50	Pass
11n-HT40	MCS0	134	5670	10.80	11.55	11.41	10.40	17.09	≤ 23.50	Pass
11n-HT40	MCS0	142	5710	10.98	11.15	10.93	11.02	17.04	≤ 23.50	Pass
11ax-HE20	MCS0	52	5260	8.47	8.33	8.13	8.22	14.31	≤ 23.50	Pass
11ax-HE20	MCS0	60	5300	7.90	8.27	7.88	8.07	14.05	≤ 23.50	Pass
11ax-HE20	MCS0	64	5320	7.90	8.02	7.99	8.00	14.00	≤ 23.50	Pass
11ax-HE20	MCS0	100	5500	8.06	8.34	8.26	8.24	14.25	≤ 23.50	Pass
11ax-HE20	MCS0	120	5600	7.98	8.11	8.18	7.59	13.99	≤ 23.50	Pass
11ax-HE20	MCS0	140	5700	7.97	8.58	7.99	7.68	14.09	≤ 23.50	Pass
11ax-HE20	MCS0	144	5720	7.65	8.21	8.15	7.62	13.94	≤ 23.50	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE40	MCS0	54	5270	11.61	11.90	11.51	11.33	17.61	≤ 23.50	Pass
11ax-HE40	MCS0	62	5310	11.22	11.35	10.94	11.53	17.29	≤ 23.50	Pass
11ax-HE40	MCS0	102	5510	11.92	12.15	12.21	12.07	18.11	≤ 23.50	Pass
11ax-HE40	MCS0	118	5590	11.46	11.10	11.53	11.01	17.30	≤ 23.50	Pass
11ax-HE40	MCS0	134	5670	10.81	11.57	11.33	10.42	17.08	≤ 23.50	Pass
11ax-HE40	MCS0	142	5710	10.98	11.51	11.20	11.32	17.28	≤ 23.50	Pass
11ax-HE80	MCS0	58	5290	14.16	14.38	14.19	14.10	20.23	≤ 23.50	Pass
11ax-HE80	MCS0	106	5530	13.97	13.96	14.14	13.72	19.97	≤ 23.50	Pass
11ax-HE80	MCS0	122	5610	13.64	13.73	13.73	13.51	19.67	≤ 23.50	Pass
11ax-HE80	MCS0	138	5690	13.49	14.14	13.73	13.36	19.71	≤ 23.50	Pass
11ax-HE80 +80	MCS0	42	5210	14.27	13.67			16.99	≤ 29.52	Pass
		58	5290			13.95	13.97	16.97	≤ 23.50	Pass
11ax-HE80 +80	MCS0	106	5530	13.47	13.48			19.83	≤ 23.50	Pass
		122	5610			14.01	14.21			

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2: For ax-HE80+80 Contiguous Mode

5210MHz fall within UNII-1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

5290MHz fall within UNII-2A: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

5530MHz & 5610MHz Fall within UNII-2C: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	45 ~ 56%
Test Site	TR3	Test Date	2019/10/20 ~ 2020/03/02
Model No.	OAW-AP1361 Beam-Forming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11n-HT20	MCS0	52	5260	8.71	8.45	8.45	8.42	14.53	≤ 17.48	Pass
11n-HT20	MCS0	60	5300	8.50	8.79	8.61	8.44	14.61	≤ 17.48	Pass
11n-HT20	MCS0	64	5320	8.59	8.69	8.44	8.66	14.62	≤ 17.48	Pass
11n-HT20	MCS0	100	5500	8.76	8.84	8.62	8.89	14.80	≤ 17.48	Pass
11n-HT20	MCS0	120	5600	8.53	8.85	8.58	8.53	14.65	≤ 17.48	Pass
11n-HT20	MCS0	140	5700	8.28	8.65	8.15	7.95	14.29	≤ 17.48	Pass
11n-HT20	MCS0	144	5720	8.16	8.68	8.63	8.45	14.51	≤ 17.48	Pass
11n-HT40	MCS0	54	5270	11.39	11.47	11.13	11.30	17.34	≤ 17.48	Pass
11n-HT40	MCS0	62	5310	10.90	11.02	10.72	11.17	16.98	≤ 17.48	Pass
11n-HT40	MCS0	102	5510	11.03	11.15	10.85	11.12	17.06	≤ 17.48	Pass
11n-HT40	MCS0	118	5590	11.16	10.72	11.12	11.06	17.04	≤ 17.48	Pass
11n-HT40	MCS0	134	5670	10.80	11.55	11.41	10.40	17.09	≤ 17.48	Pass
11n-HT40	MCS0	142	5710	10.98	11.15	10.93	11.02	17.04	≤ 17.48	Pass
11ax-HE20	MCS0	52	5260	8.47	8.33	8.13	8.22	14.31	≤ 17.48	Pass
11ax-HE20	MCS0	60	5300	7.90	8.27	7.88	8.07	14.05	≤ 17.48	Pass
11ax-HE20	MCS0	64	5320	7.90	8.02	7.99	8.00	14.00	≤ 17.48	Pass
11ax-HE20	MCS0	100	5500	8.06	8.34	8.26	8.24	14.25	≤ 17.48	Pass
11ax-HE20	MCS0	120	5600	7.98	8.11	8.18	7.59	13.99	≤ 17.48	Pass
11ax-HE20	MCS0	140	5700	7.97	8.58	7.99	7.68	14.09	≤ 17.48	Pass
11ax-HE20	MCS0	144	5720	7.65	8.21	8.15	7.62	13.94	≤ 17.48	Pass
11ax-HE40	MCS0	54	5270	10.99	11.08	10.61	10.95	16.93	≤ 17.48	Pass
11ax-HE40	MCS0	62	5310	11.22	11.35	10.94	11.53	17.29	≤ 17.48	Pass
11ax-HE40	MCS0	102	5510	11.02	10.84	10.71	10.68	16.84	≤ 17.48	Pass
11ax-HE40	MCS0	118	5590	11.46	11.10	11.53	11.01	17.30	≤ 17.48	Pass
11ax-HE40	MCS0	134	5670	10.81	11.57	11.33	10.42	17.08	≤ 17.48	Pass
11ax-HE40	MCS0	142	5710	10.98	11.51	11.20	11.32	17.28	≤ 17.48	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE80	MCS0	58	5290	11.29	11.16	10.88	11.35	17.19	≤ 17.48	Pass
11ax-HE80	MCS0	106	5530	11.06	10.84	10.70	10.73	16.86	≤ 17.48	Pass
11ax-HE80	MCS0	122	5610	10.90	11.07	10.92	10.85	16.96	≤ 17.48	Pass
11ax-HE80	MCS0	138	5690	10.68	11.19	10.92	10.89	16.94	≤ 17.48	Pass
11ax-HE80 +80	MCS0	42	5210	11.03	10.79			13.92	≤ 23.50	Pass
		58	5290			11.24	11.52	14.39	≤ 17.48	Pass
11ax-HE80 +80	MCS0	106	5530	11.18	11.15			17.17	≤ 17.48	Pass
		122	5610			11.26	11.02			

Note 1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

Note 2: For ax-HE80+80 Contiguous Mode

5210MHz fall within UNII-1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} \}$.

5290MHz fall within UNII-2A: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

5530MHz & 5610MHz Fall within UNII-2C: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	45 ~ 56%
Test Site	TR3	Test Date	2019/10/20 ~ 2020/03/02
Model No.	OAW-AP1361D CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11a	6Mbps	52	5260	8.93	8.91	8.36	8.56	14.72	≤ 22.58	Pass
11a	6Mbps	60	5300	8.28	8.10	7.71	7.71	13.98	≤ 22.58	Pass
11a	6Mbps	64	5320	7.92	8.00	7.58	7.59	13.80	≤ 22.58	Pass
11a	6Mbps	100	5500	9.03	8.98	8.91	8.40	14.86	≤ 22.58	Pass
11a	6Mbps	120	5600	8.08	8.54	8.45	8.56	14.43	≤ 22.58	Pass
11a	6Mbps	140	5700	7.61	8.20	8.25	7.92	14.02	≤ 22.58	Pass
11a	6Mbps	144	5720	7.20	7.15	7.72	7.63	13.45	≤ 22.58	Pass
11n-HT20	MCS0	52	5260	9.02	8.73	8.51	8.76	14.78	≤ 22.58	Pass
11n-HT20	MCS0	60	5300	8.72	9.11	8.56	8.53	14.76	≤ 22.58	Pass
11n-HT20	MCS0	64	5320	8.28	8.75	8.37	8.15	14.41	≤ 22.58	Pass
11n-HT20	MCS0	100	5500	9.25	9.05	8.81	8.45	14.92	≤ 22.58	Pass
11n-HT20	MCS0	120	5600	8.51	8.63	8.56	8.59	14.59	≤ 22.58	Pass
11n-HT20	MCS0	140	5700	8.18	9.51	8.98	8.73	14.90	≤ 22.58	Pass
11n-HT20	MCS0	144	5720	7.75	8.38	8.33	8.17	14.19	≤ 22.58	Pass
11n-HT40	MCS0	54	5270	12.19	12.46	12.09	12.25	18.27	≤ 22.58	Pass
11n-HT40	MCS0	62	5310	12.03	12.15	11.42	11.75	17.87	≤ 22.58	Pass
11n-HT40	MCS0	102	5510	11.73	11.50	11.50	11.40	17.55	≤ 22.58	Pass
11n-HT40	MCS0	118	5590	11.41	11.38	11.65	11.55	17.52	≤ 22.58	Pass
11n-HT40	MCS0	134	5670	11.16	11.45	11.30	11.11	17.28	≤ 22.58	Pass
11n-HT40	MCS0	142	5710	11.10	11.63	11.55	11.42	17.45	≤ 22.58	Pass
11ax-HE20	MCS0	52	5260	8.93	9.10	8.31	8.28	14.69	≤ 22.58	Pass
11ax-HE20	MCS0	60	5300	9.08	9.13	8.55	8.71	14.89	≤ 22.58	Pass
11ax-HE20	MCS0	64	5320	8.77	8.72	8.68	8.40	14.67	≤ 22.58	Pass
11ax-HE20	MCS0	100	5500	8.91	8.52	8.46	8.13	14.53	≤ 22.58	Pass
11ax-HE20	MCS0	120	5600	8.12	8.55	8.35	8.18	14.32	≤ 22.58	Pass
11ax-HE20	MCS0	140	5700	7.87	8.63	8.73	8.39	14.44	≤ 22.58	Pass
11ax-HE20	MCS0	144	5720	8.03	8.68	8.29	8.36	14.37	≤ 22.58	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE40	MCS0	54	5270	11.40	11.62	11.41	11.35	17.47	≤ 22.58	Pass
11ax-HE40	MCS0	62	5310	11.86	11.81	11.27	11.47	17.63	≤ 22.58	Pass
11ax-HE40	MCS0	102	5510	11.51	11.45	11.42	11.56	17.51	≤ 22.58	Pass
11ax-HE40	MCS0	118	5590	11.16	11.62	11.72	11.83	17.61	≤ 22.58	Pass
11ax-HE40	MCS0	134	5670	11.18	11.67	11.48	11.31	17.43	≤ 22.58	Pass
11ax-HE40	MCS0	142	5710	11.22	11.95	11.74	11.62	17.66	≤ 22.58	Pass
11ax-HE80	MCS0	58	5290	14.66	14.73	14.52	14.54	20.63	≤ 22.58	Pass
11ax-HE80	MCS0	106	5530	14.41	14.24	14.30	14.01	20.26	≤ 22.58	Pass
11ax-HE80	MCS0	122	5610	13.81	14.09	14.08	13.98	20.01	≤ 22.58	Pass
11ax-HE80	MCS0	138	5690	13.75	14.42	14.53	14.23	20.26	≤ 22.58	Pass
11ax-HE80 +80	MCS0	42	5210	12.96	12.47			15.73	≤ 28.60	Pass
		58	5290			13.05	12.44	15.77	≤ 22.58	Pass
11ax-HE80 +80	MCS0	106	5530	15.49	15.02			21.23	≤ 22.58	Pass
		122	5610			15.21	15.12			

Note 1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)} + 10^{(\text{Ant 2 Average Power}/10)} + 10^{(\text{Ant 3 Average Power}/10)}\}$.

Note 2: For ax-HE80+80 Contiguous Mode

5210MHz fall within UNII-1: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)}\}$.

5290MHz fall within UNII-2A: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 2 Average Power}/10)} + 10^{(\text{Ant 3 Average Power}/10)}\}$.

5530MHz & 5610MHz Fall within UNII-2C: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)} + 10^{(\text{Ant 2 Average Power}/10)} + 10^{(\text{Ant 3 Average Power}/10)}\}$.

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	45 ~ 56%
Test Site	TR3	Test Date	2019/10/20 ~ 2020/03/02
Model No.	OAW-AP1361D Beam-Forming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11n-HT20	MCS0	52	5260	9.02	8.73	8.51	8.76	14.78	≤ 16.56	Pass
11n-HT20	MCS0	60	5300	8.72	9.11	8.56	8.53	14.76	≤ 16.56	Pass
11n-HT20	MCS0	64	5320	8.28	8.75	8.37	8.15	14.41	≤ 16.56	Pass
11n-HT20	MCS0	100	5500	9.25	9.05	8.81	8.45	14.92	≤ 16.56	Pass
11n-HT20	MCS0	120	5600	8.51	8.63	8.56	8.59	14.59	≤ 16.56	Pass
11n-HT20	MCS0	140	5700	8.18	9.51	8.98	8.73	14.90	≤ 16.56	Pass
11n-HT20	MCS0	144	5720	7.75	8.38	8.33	8.17	14.19	≤ 16.56	Pass
11n-HT40	MCS0	54	5270	9.98	10.11	9.83	9.44	15.87	≤ 16.56	Pass
11n-HT40	MCS0	62	5310	10.13	10.18	9.99	9.79	16.05	≤ 16.56	Pass
11n-HT40	MCS0	102	5510	10.51	9.98	10.23	9.82	16.16	≤ 16.56	Pass
11n-HT40	MCS0	118	5590	9.87	10.04	10.30	10.10	16.10	≤ 16.56	Pass
11n-HT40	MCS0	134	5670	9.36	10.10	9.80	9.82	15.80	≤ 16.56	Pass
11n-HT40	MCS0	142	5710	9.85	10.72	10.12	10.09	16.23	≤ 16.56	Pass
11ax-HE20	MCS0	52	5260	8.93	9.10	8.31	8.28	14.69	≤ 16.56	Pass
11ax-HE20	MCS0	60	5300	9.08	9.13	8.55	8.71	14.89	≤ 16.56	Pass
11ax-HE20	MCS0	64	5320	8.77	8.72	8.68	8.40	14.67	≤ 16.56	Pass
11ax-HE20	MCS0	100	5500	8.91	8.52	8.46	8.13	14.53	≤ 16.56	Pass
11ax-HE20	MCS0	120	5600	8.12	8.55	8.35	8.18	14.32	≤ 16.56	Pass
11ax-HE20	MCS0	140	5700	7.87	8.63	8.73	8.39	14.44	≤ 16.56	Pass
11ax-HE20	MCS0	144	5720	8.03	8.68	8.29	8.36	14.37	≤ 16.56	Pass
11ax-HE40	MCS0	54	5270	10.24	10.32	10.13	9.97	16.19	≤ 16.56	Pass
11ax-HE40	MCS0	62	5310	9.98	9.97	9.85	9.59	15.87	≤ 16.56	Pass
11ax-HE40	MCS0	102	5510	10.38	10.03	9.94	9.46	15.99	≤ 16.56	Pass
11ax-HE40	MCS0	118	5590	9.49	9.88	10.01	9.91	15.85	≤ 16.56	Pass
11ax-HE40	MCS0	134	5670	9.81	10.37	10.13	10.14	16.14	≤ 16.56	Pass
11ax-HE40	MCS0	142	5710	9.32	10.72	9.84	9.65	15.93	≤ 16.56	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE80	MCS0	58	5290	10.04	9.85	9.78	9.44	15.80	≤ 16.56	Pass
11ax-HE80	MCS0	106	5530	10.25	9.75	9.96	9.60	15.92	≤ 16.56	Pass
11ax-HE80	MCS0	122	5610	10.09	10.19	10.25	10.07	16.17	≤ 16.56	Pass
11ax-HE80	MCS0	138	5690	9.42	10.56	9.80	9.81	15.94	≤ 16.56	Pass
11ax-HE80 +80	MCS0	42	5210	12.96	12.47			15.73	≤ 22.58	Pass
		58	5290			13.05	12.44	15.77	≤ 16.56	Pass
11ax-HE80 +80	MCS0	106	5530	10.35	10.28			16.13	≤ 16.56	Pass
		122	5610			10.02	9.76			

Note 1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

Note 2: For ax-HE80+80 Contiguous Mode

5210MHz fall within UNII-1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} \}$.

5290MHz fall within UNII-2A: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

5530MHz & 5610MHz Fall within UNII-2C: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	45 ~ 56%
Test Site	TR3	Test Date	2019/10/20 ~ 2020/03/02
Model No.	OAW-AP1362 CDD Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11a	6Mbps	52	5260	8.65	8.11	7.71	8.12	14.18	≤ 22.98	Pass
11a	6Mbps	60	5300	8.31	8.06	7.69	8.59	14.20	≤ 22.98	Pass
11a	6Mbps	64	5320	7.76	8.02	8.23	7.98	14.02	≤ 22.98	Pass
11a	6Mbps	100	5500	8.48	7.33	7.67	8.07	13.93	≤ 22.98	Pass
11a	6Mbps	120	5600	8.18	7.72	7.61	7.91	13.88	≤ 22.98	Pass
11a	6Mbps	140	5700	6.89	7.85	7.93	7.82	13.66	≤ 22.98	Pass
11a	6Mbps	144	5720	7.47	8.18	7.99	8.47	14.06	≤ 22.98	Pass
11n-HT20	MCS0	52	5260	8.58	7.93	7.98	8.13	14.18	≤ 22.98	Pass
11n-HT20	MCS0	60	5300	8.19	8.03	7.82	8.56	14.18	≤ 22.98	Pass
11n-HT20	MCS0	64	5320	8.33	8.28	8.72	8.46	14.47	≤ 22.98	Pass
11n-HT20	MCS0	100	5500	8.87	7.96	8.15	8.68	14.45	≤ 22.98	Pass
11n-HT20	MCS0	120	5600	8.41	8.06	8.23	8.21	14.25	≤ 22.98	Pass
11n-HT20	MCS0	140	5700	7.83	8.86	8.56	8.72	14.53	≤ 22.98	Pass
11n-HT20	MCS0	144	5720	7.72	8.01	8.25	8.21	14.07	≤ 22.98	Pass
11n-HT40	MCS0	54	5270	11.76	11.25	11.13	11.36	17.40	≤ 22.98	Pass
11n-HT40	MCS0	62	5310	11.63	11.51	11.42	11.46	17.53	≤ 22.98	Pass
11n-HT40	MCS0	102	5510	11.94	11.13	11.23	11.98	17.61	≤ 22.98	Pass
11n-HT40	MCS0	118	5590	11.16	10.74	10.92	11.04	16.99	≤ 22.98	Pass
11n-HT40	MCS0	134	5670	10.25	10.91	10.56	10.37	16.55	≤ 22.98	Pass
11n-HT40	MCS0	142	5710	10.39	10.68	10.55	10.98	16.68	≤ 22.98	Pass
11ax-HE20	MCS0	52	5260	8.85	8.31	7.98	8.46	14.43	≤ 22.98	Pass
11ax-HE20	MCS0	60	5300	8.89	8.34	8.16	8.89	14.60	≤ 22.98	Pass
11ax-HE20	MCS0	64	5320	8.86	8.57	8.93	8.76	14.80	≤ 22.98	Pass
11ax-HE20	MCS0	100	5500	9.25	8.11	8.55	9.12	14.80	≤ 22.98	Pass
11ax-HE20	MCS0	120	5600	8.31	8.07	7.93	8.13	14.13	≤ 22.98	Pass
11ax-HE20	MCS0	140	5700	8.01	8.68	8.38	8.59	14.44	≤ 22.98	Pass
11ax-HE20	MCS0	144	5720	7.98	8.57	8.08	8.65	14.35	≤ 22.98	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE40	MCS0	54	5270	11.12	10.66	10.65	10.75	16.82	≤ 22.98	Pass
11ax-HE40	MCS0	62	5310	11.86	11.76	11.72	11.81	17.81	≤ 22.98	Pass
11ax-HE40	MCS0	102	5510	12.28	11.41	11.48	12.24	17.89	≤ 22.98	Pass
11ax-HE40	MCS0	118	5590	11.09	10.53	10.99	10.89	16.90	≤ 22.98	Pass
11ax-HE40	MCS0	134	5670	10.67	11.20	11.02	10.64	16.91	≤ 22.98	Pass
11ax-HE40	MCS0	142	5710	10.98	11.59	11.37	11.56	17.40	≤ 22.98	Pass
11ax-HE80	MCS0	58	5290	14.34	14.09	13.83	14.28	20.16	≤ 22.98	Pass
11ax-HE80	MCS0	106	5530	14.62	13.54	14.61	14.51	20.36	≤ 22.98	Pass
11ax-HE80	MCS0	122	5610	14.18	14.09	14.13	14.16	20.16	≤ 22.98	Pass
11ax-HE80	MCS0	138	5690	13.93	14.86	14.43	14.36	20.43	≤ 22.98	Pass
11ax-HE80 +80	MCS0	42	5210	11.16	10.97			14.08	≤ 29.00	Pass
		58	5290			10.97	11.05	14.02	≤ 22.98	Pass
11ax-HE80 +80	MCS0	106	5530	12.63	11.67			18.20	≤ 22.98	Pass
		122	5610			12.10	12.28			

Note 1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Note 2: For ax-HE80+80 Contiguous Mode

5210MHz fall within UNII-1: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\}$.

5290MHz fall within UNII-2A: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

5530MHz & 5610MHz Fall within UNII-2C: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)}\}$.

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	Eric Xu	Relative Humidity	45 ~ 56%
Test Site	TR3	Test Date	2019/10/20 ~ 2020/03/02
Model No.	OAW-AP1362 Beam-Forming Mode		

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11n-HT20	MCS0	52	5260	8.58	7.93	7.98	8.13	14.18	≤ 16.96	Pass
11n-HT20	MCS0	60	5300	8.19	8.03	7.82	8.56	14.18	≤ 16.96	Pass
11n-HT20	MCS0	64	5320	8.33	8.28	8.72	8.46	14.47	≤ 16.96	Pass
11n-HT20	MCS0	100	5500	8.87	7.96	8.15	8.68	14.45	≤ 16.96	Pass
11n-HT20	MCS0	120	5600	8.41	8.06	8.23	8.21	14.25	≤ 16.96	Pass
11n-HT20	MCS0	140	5700	7.83	8.86	8.56	8.72	14.53	≤ 16.96	Pass
11n-HT20	MCS0	144	5720	7.72	8.01	8.25	8.21	14.07	≤ 16.96	Pass
11n-HT40	MCS0	54	5270	11.02	10.54	10.58	10.52	16.69	≤ 16.96	Pass
11n-HT40	MCS0	62	5310	10.51	10.56	10.68	10.56	16.60	≤ 16.96	Pass
11n-HT40	MCS0	102	5510	11.23	10.52	10.66	11.12	16.91	≤ 16.96	Pass
11n-HT40	MCS0	118	5590	10.58	10.22	10.25	10.27	16.35	≤ 16.96	Pass
11n-HT40	MCS0	134	5670	10.25	10.91	10.56	10.37	16.55	≤ 16.96	Pass
11n-HT40	MCS0	142	5710	10.39	10.68	10.55	10.98	16.68	≤ 16.96	Pass
11ax-HE20	MCS0	52	5260	8.85	8.31	7.98	8.46	14.43	≤ 16.96	Pass
11ax-HE20	MCS0	60	5300	8.89	8.34	8.16	8.89	14.60	≤ 16.96	Pass
11ax-HE20	MCS0	64	5320	8.86	8.57	8.93	8.76	14.80	≤ 16.96	Pass
11ax-HE20	MCS0	100	5500	9.25	8.11	8.55	9.12	14.80	≤ 16.96	Pass
11ax-HE20	MCS0	120	5600	8.31	8.07	7.93	8.13	14.13	≤ 16.96	Pass
11ax-HE20	MCS0	140	5700	8.01	8.68	8.38	8.59	14.44	≤ 16.96	Pass
11ax-HE20	MCS0	144	5720	7.98	8.57	8.08	8.65	14.35	≤ 16.96	Pass
11ax-HE40	MCS0	54	5270	11.12	10.66	10.65	10.75	16.82	≤ 16.96	Pass
11ax-HE40	MCS0	62	5310	10.98	10.84	10.62	10.78	16.83	≤ 16.96	Pass
11ax-HE40	MCS0	102	5510	10.98	10.20	10.40	10.87	16.65	≤ 16.96	Pass
11ax-HE40	MCS0	118	5590	11.09	10.53	10.99	10.89	16.90	≤ 16.96	Pass
11ax-HE40	MCS0	134	5670	10.67	11.20	11.02	10.64	16.91	≤ 16.96	Pass
11ax-HE40	MCS0	142	5710	10.16	10.67	10.54	10.62	16.52	≤ 16.96	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total Average Power (dBm)	Average Power Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE80	MCS0	58	5290	10.88	10.72	10.48	10.78	16.74	≤ 16.96	Pass
11ax-HE80	MCS0	106	5530	10.86	10.07	10.03	10.20	16.32	≤ 16.96	Pass
11ax-HE80	MCS0	122	5610	10.25	10.16	10.39	10.21	16.27	≤ 16.96	Pass
11ax-HE80	MCS0	138	5690	10.14	10.86	10.65	10.53	16.57	≤ 16.96	Pass
11ax-HE80 +80	MCS0	42	5210	10.51	10.42			13.48	≤ 22.98	Pass
		58	5290			10.77	10.81	13.80	≤ 16.96	Pass
11ax-HE80 +80	MCS0	106	5530	10.82	10.16			16.42	≤ 16.96	Pass
		122	5610			10.45	10.12			

Note 1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

Note 2: For ax-HE80+80 Contiguous Mode

5210MHz fall within UNII-1: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} \}$.

5290MHz fall within UNII-2A: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

5530MHz & 5610MHz Fall within UNII-2C: Total Average Power (dBm) = $10 \cdot \log \{ 10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)} + 10^{(\text{Ant 3 Average Power} / 10)} \}$.

7.5. Transmit Power Control

7.5.1. Test Limit

The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm.


7.5.2. Test Procedure Used

KDB 789033 D02v01- Section E)3)b) Method PM-G

7.5.3. Test Setting

Average power measurements were performed only when the EUT was transmitting at its maximum power control level using a broadband power meter with a pulse sensor. The power meter implemented triggering and gating capabilities which were set up such that power measurements were recorded only during the ON time of the transmitter. The trace was averaged over 100 traces to obtain the final measured average power.

7.5.4. Test Setup

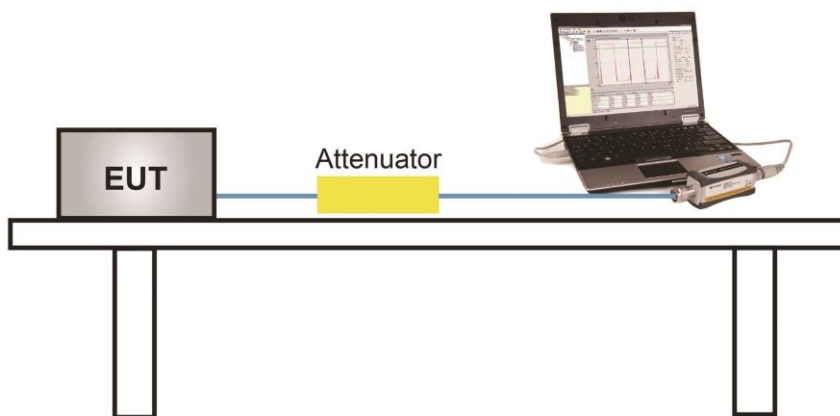

7.5.5. Test Result

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	David Lv	Relative Humidity	46 ~ 54%
Test Site	TR3	Test Date	2019/10/12 ~ 2020/03/02
Model No.	OAW-AP1361	Test Item	Transmit Power Control (CDD Mode)

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total TPC EIRP (dBm)	Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11a	6Mbps	52	5260	10.82	10.99	10.50	10.25	23.15	≤ 24.00	Pass
11a	6Mbps	60	5300	11.15	11.42	10.97	10.92	23.62	≤ 24.00	Pass
11a	6Mbps	64	5320	11.01	11.25	10.99	10.68	23.49	≤ 24.00	Pass
11a	6Mbps	100	5500	10.34	10.66	10.65	10.35	23.00	≤ 24.00	Pass
11a	6Mbps	120	5600	10.99	11.23	10.97	11.25	23.61	≤ 24.00	Pass
11a	6Mbps	140	5700	11.05	11.44	11.19	10.47	23.55	≤ 24.00	Pass
11a	6Mbps	144	5720	10.42	11.19	11.35	10.57	23.40	≤ 24.00	Pass
11n-HT20	MCS0	52	5260	10.75	10.95	10.44	10.30	23.12	≤ 24.00	Pass
11n-HT20	MCS0	60	5300	10.95	11.25	11.10	10.89	23.55	≤ 24.00	Pass
11n-HT20	MCS0	64	5320	10.83	11.03	10.83	10.70	23.35	≤ 24.00	Pass
11n-HT20	MCS0	100	5500	10.75	10.68	10.68	10.26	23.10	≤ 24.00	Pass
11n-HT20	MCS0	120	5600	11.04	10.97	11.30	10.70	23.51	≤ 24.00	Pass
11n-HT20	MCS0	140	5700	11.05	11.38	11.14	10.28	23.48	≤ 24.00	Pass
11n-HT20	MCS0	144	5720	10.66	11.19	11.32	10.37	23.40	≤ 24.00	Pass
11n-HT40	MCS0	54	5270	10.73	11.02	10.70	10.43	23.23	≤ 24.00	Pass
11n-HT40	MCS0	62	5310	11.10	11.24	10.89	11.08	23.58	≤ 24.00	Pass
11n-HT40	MCS0	102	5510	11.20	11.27	11.16	10.87	23.63	≤ 24.00	Pass
11n-HT40	MCS0	118	5590	11.14	10.73	11.03	10.66	23.40	≤ 24.00	Pass
11n-HT40	MCS0	134	5670	10.52	11.18	10.98	10.17	23.23	≤ 24.00	Pass
11n-HT40	MCS0	142	5710	11.08	11.45	11.10	10.78	23.61	≤ 24.00	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 Average Power (dBm)	Ant 1 Average Power (dBm)	Ant 2 Average Power (dBm)	Ant 3 Average Power (dBm)	Total TPC EIRP (dBm)	Limit (dBm)	Result
Ant 0 + 1 + 2 + 3										
11ax-HE20	MCS0	52	5260	11.09	11.14	10.73	10.73	23.43	≤ 24.00	Pass
11ax-HE20	MCS0	60	5300	11.43	11.35	11.28	11.13	23.80	≤ 24.00	Pass
11ax-HE20	MCS0	64	5320	11.25	11.30	11.03	11.13	23.68	≤ 24.00	Pass
11ax-HE20	MCS0	100	5500	10.90	10.94	11.06	10.52	23.36	≤ 24.00	Pass
11ax-HE20	MCS0	120	5600	11.37	11.14	11.37	10.75	23.67	≤ 24.00	Pass
11ax-HE20	MCS0	140	5700	11.27	11.57	11.41	10.61	23.73	≤ 23.98	Pass
11ax-HE20	MCS0	144	5720	10.80	11.25	11.46	10.44	23.51	≤ 23.98	Pass
11ax-HE40	MCS0	54	5270	11.25	11.31	10.99	10.99	23.64	≤ 24.00	Pass
11ax-HE40	MCS0	62	5310	11.16	10.93	10.68	10.98	23.44	≤ 24.00	Pass
11ax-HE40	MCS0	102	5510	11.08	11.14	11.13	10.51	23.47	≤ 24.00	Pass
11ax-HE40	MCS0	118	5590	10.95	10.51	11.01	10.56	23.26	≤ 24.00	Pass
11ax-HE40	MCS0	134	5670	10.80	11.55	11.31	10.26	23.51	≤ 24.00	Pass
11ax-HE40	MCS0	142	5710	10.62	11.22	10.84	10.65	23.34	≤ 24.00	Pass
11ax-HE80	MCS0	58	5290	11.05	11.36	11.25	11.20	23.72	≤ 24.00	Pass
11ax-HE80	MCS0	106	5530	11.04	10.68	10.90	10.33	23.25	≤ 24.00	Pass
11ax-HE80	MCS0	122	5610	10.95	11.12	11.05	10.70	23.46	≤ 24.00	Pass
11ax-HE80	MCS0	138	5690	10.75	11.33	11.14	10.62	23.47	≤ 24.00	Pass
11ax-HE80 +80	MCS0	42	5210			13.58	13.46	23.01	≤ 24.00	Pass
		58	5290							
11ax-HE80 +80	MCS0	106	5530	10.58	11.05	10.71	10.36	23.01	≤ 24.00	Pass
		122	5610							

Note: Total TPC EIRP Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 Average Power}/10)} + 10^{(\text{Ant 1 Average Power}/10)} + 10^{(\text{Ant 2 Average Power}/10)} + 10^{(\text{Ant 3 Average Power}/10)}\} + \text{Antenna Gain}$.

7.6. Power Spectral Density Measurement

7.6.1. Test Limit

For the band 5.25-5.35 GHz and 5.47-5725 GHz, the power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6dBi are used, the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

Frequency Band (MHz)	Per Chain Max Antenna Gain (dBi)				Directional Gain (dBi)	Limit
	Ant 0	Ant 1	Ant 2	Ant 3		
OAW-AP1361						
5150 ~ 5250	6.48	6.31	6.26	6.12	12.50	4.50
5725 ~ 5850	6.48	6.31	6.26	6.12	12.50	
OAW-AP1361D						
5150 ~ 5250	7.4	7.0	6.9	7.2	13.42	3.58
5725 ~ 5850	7.4	7.0	6.9	7.2	13.42	
OAW-AP1362						
5150 ~ 5250	7				13.02	3.98
5725 ~ 5850	7				13.02	


7.6.2. Test Procedure Used

KDB 789033 D02v02r01 - Section F

7.6.3. Test Setting

1. Analyzer was set to the center frequency of the UNII channel under investigation
2. Span was set to encompass the entire 26dB EBW of the signal.
3. RBW = 1MHz, if measurement bandwidth of Maximum PSD is specified in 500 kHz,
RBW = 100 kHz
4. VBW = 3MHz
5. Number of sweep points $\geq 2 \times (\text{span} / \text{RBW})$
6. Detector = power averaging (Average)
7. Sweep time = auto
8. Trigger = free run
9. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
10. Add $10 \cdot \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times (because the measurement represents an average over both the on and off times of the transmission). For example, add $10 \cdot \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
11. When the measurement bandwidth of Maximum PSD is specified in 500 kHz, add a constant factor $10 \cdot \log(500\text{kHz}/100\text{kHz}) = 6.99$ dB to the measured result.

7.6.4. Test Setup

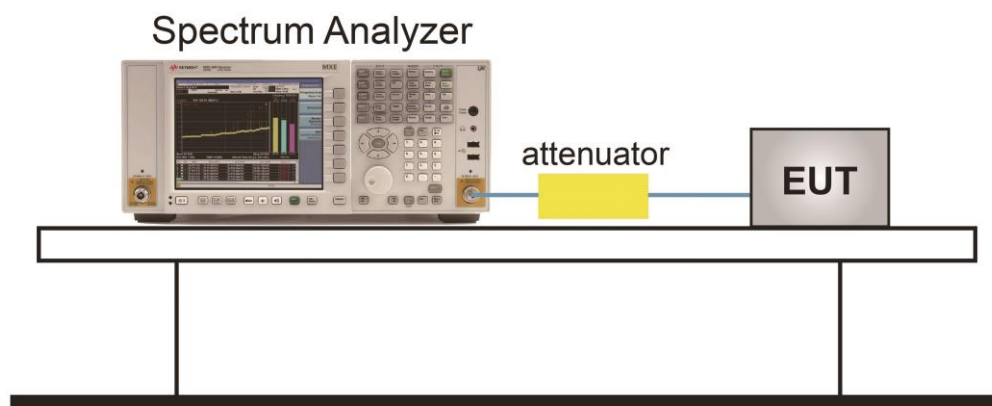

7.6.5. Test Result

Product	OmniAccess Stellar	Temperature	22 ~ 25°C
Test Engineer	David Lv	Relative Humidity	46 ~ 54%
Test Site	TR3	Test Date	2019/10/12 ~ 2020/03/02
Model No.	OAW-AP1361	Test Item	Power Spectral Density

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Ant 3 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
Ant 0 + 1 + 2 + 3											
11a	6Mbps	52	5260	-2.61	-2.26	-2.72	-2.69	92.19	3.81	≤ 4.50	Pass
11a	6Mbps	60	5300	-2.48	-2.38	-2.03	-2.09	92.19	4.13	≤ 4.50	Pass
11a	6Mbps	64	5320	-2.70	-2.08	-2.41	-2.25	92.19	4.02	≤ 4.50	Pass
11a	6Mbps	100	5500	-2.62	-2.39	-2.40	-2.23	92.19	3.97	≤ 4.50	Pass
11a	6Mbps	120	5600	-2.64	-2.50	-2.55	-2.39	92.19	3.85	≤ 4.50	Pass
11a	6Mbps	140	5700	-2.78	-2.39	-2.49	-2.13	92.19	3.93	≤ 4.50	Pass
11a	6Mbps	144	5720	-2.71	-2.63	-2.39	-2.28	92.19	3.87	≤ 4.50	Pass
11n-HT20	MCS0	52	5260	-2.17	-2.23	-2.86	-2.67	94.76	3.78	≤ 4.50	Pass
11n-HT20	MCS0	60	5300	-2.56	-2.03	-2.17	-1.98	94.76	4.08	≤ 4.50	Pass
11n-HT20	MCS0	64	5320	-2.60	-2.26	-2.20	-2.22	94.76	3.94	≤ 4.50	Pass
11n-HT20	MCS0	100	5500	-2.67	-2.60	-2.11	-2.24	94.76	3.86	≤ 4.50	Pass
11n-HT20	MCS0	120	5600	-1.98	-2.33	-2.18	-2.19	94.76	4.09	≤ 4.50	Pass
11n-HT20	MCS0	140	5700	-2.72	-2.27	-2.49	-2.00	94.76	3.89	≤ 4.50	Pass
11n-HT20	MCS0	144	5720	-2.40	-1.71	-2.32	-2.17	94.76	4.11	≤ 4.50	Pass
11n-HT40	MCS0	54	5270	-2.33	-1.99	-2.80	-2.74	91.62	3.95	≤ 4.50	Pass
11n-HT40	MCS0	62	5310	-2.13	-2.23	-2.32	-2.39	91.62	4.13	≤ 4.50	Pass
11n-HT40	MCS0	102	5510	-2.17	-2.10	-2.50	-2.38	91.62	4.12	≤ 4.50	Pass
11n-HT40	MCS0	118	5590	-2.04	-2.85	-2.27	-2.35	91.62	4.03	≤ 4.50	Pass
11n-HT40	MCS0	134	5670	-2.15	-2.07	-2.34	-2.32	91.62	4.18	≤ 4.50	Pass
11n-HT40	MCS0	142	5710	-2.40	-2.17	-2.05	-2.12	91.62	4.22	≤ 4.50	Pass

Test Mode	Data Rate/MCS	Channel No.	Freq. (MHz)	Ant 0 PSD (dBm/MHz)	Ant 1 PSD (dBm/MHz)	Ant 2 PSD (dBm/MHz)	Ant 3 PSD (dBm/MHz)	Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)	Result
Ant 0 + 1 + 2 + 3											
11ax-HE20	MCS0	52	5260	-1.92	-2.24	-2.16	-2.03	93.56	4.22	≤ 4.50	Pass
11ax-HE20	MCS0	60	5300	-2.67	-2.65	-2.62	-2.42	93.56	3.72	≤ 4.50	Pass
11ax-HE20	MCS0	64	5320	-2.16	-2.57	-2.46	-2.24	93.56	3.96	≤ 4.50	Pass
11ax-HE20	MCS0	100	5500	-2.78	-2.42	-2.57	-2.11	93.56	3.85	≤ 4.50	Pass
11ax-HE20	MCS0	120	5600	-2.12	-2.10	-2.04	-2.24	93.56	4.19	≤ 4.50	Pass
11ax-HE20	MCS0	140	5700	-2.31	-2.04	-2.60	-2.26	93.56	4.01	≤ 4.50	Pass
11ax-HE20	MCS0	144	5720	-2.54	-2.32	-2.03	-2.22	93.56	4.04	≤ 4.50	Pass
11ax-HE40	MCS0	54	5270	-2.51	-1.81	-2.03	-1.94	94.76	4.19	≤ 4.50	Pass
11ax-HE40	MCS0	62	5310	-2.14	-2.13	-2.61	-2.00	94.76	4.04	≤ 4.50	Pass
11ax-HE40	MCS0	102	5510	-2.38	-2.45	-2.19	-2.54	94.76	3.87	≤ 4.50	Pass
11ax-HE40	MCS0	118	5590	-2.06	-2.55	-2.59	-2.66	94.76	3.80	≤ 4.50	Pass
11ax-HE40	MCS0	134	5670	-3.25	-2.23	-2.16	-2.59	94.76	3.72	≤ 4.50	Pass
11ax-HE40	MCS0	142	5710	-2.27	-1.87	-2.07	-2.29	94.76	4.13	≤ 4.50	Pass
11ax-HE80	MCS0	58	5290	-2.16	-2.18	-2.37	-2.39	94.26	4.00	≤ 4.50	Pass
11ax-HE80	MCS0	106	5530	-2.65	-2.43	-2.41	-2.46	94.26	3.79	≤ 4.50	Pass
11ax-HE80	MCS0	122	5610	-2.43	-2.55	-2.49	-2.11	94.26	3.89	≤ 4.50	Pass
11ax-HE80	MCS0	138	5690	-2.68	-2.62	-2.62	-2.25	94.26	3.74	≤ 4.50	Pass
11ax-HE80 + 80	MCS0	42	5210	-3.24	-3.38			94.26	-0.04	≤ 10.50	Pass
		58	5290			-1.59	-0.73	94.26	2.13	≤ 4.50	Pass
11ax-HE80 + 80	MCS0	106	5530	-3.90	-3.99			94.26	-0.68	≤ 4.50	Pass
		122	5610			-1.54	0.12	94.26	2.64	≤ 4.50	Pass

Note 1: When EUT duty cycle ≥ 98%, the total PSD (dBm/MHz) = $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$

Note 2: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\} + 10 \cdot \log(1/\text{duty cycle})$


Note 3: For ax-HE80+80 Contiguous Mode

5210MHz and 5530MHz: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$.


5290MHz and 5610MHz: Total Average Power (dBm) = $10 \cdot \log\{10^{(\text{Ant 2 PSD}/10)} + 10^{(\text{Ant 3 PSD}/10)}\}$.

802.11a Power Spectral Density - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 52 (5260MHz)

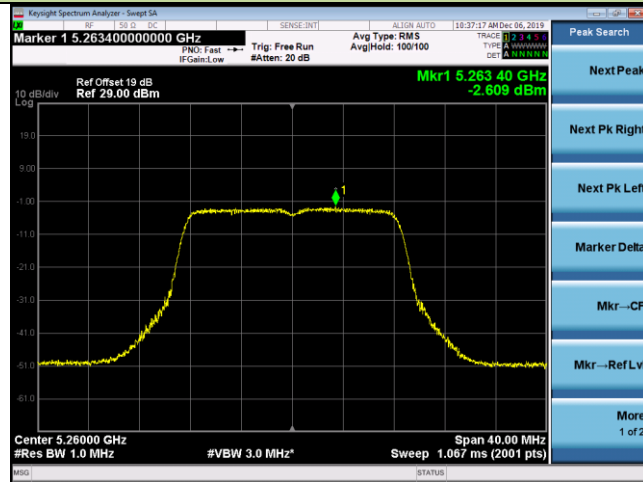


Channel 60 (5300MHz)

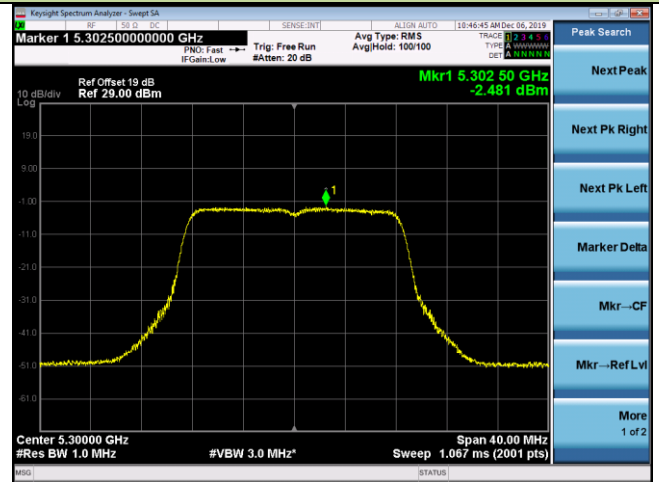


Channel 64 (5320MHz)

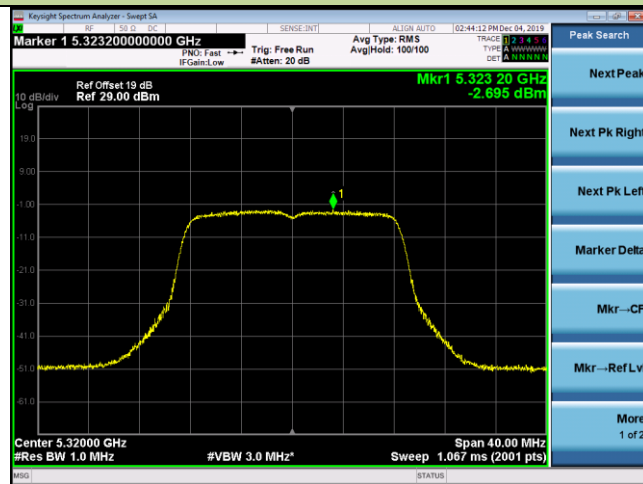


Channel 100 (5500MHz)

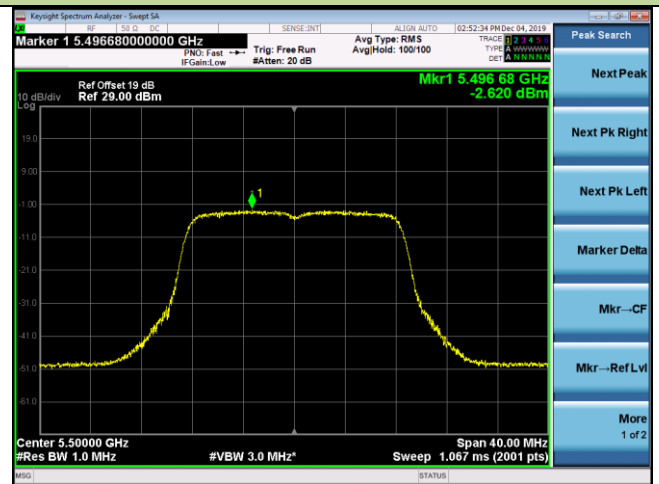


Channel 120 (5600MHz)

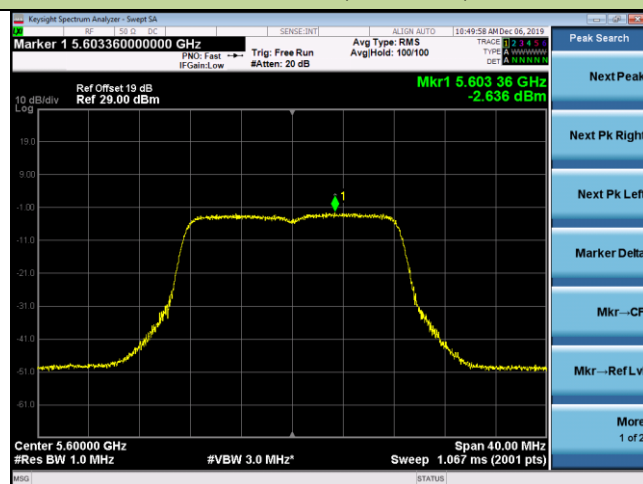


Channel 140 (5700MHz)

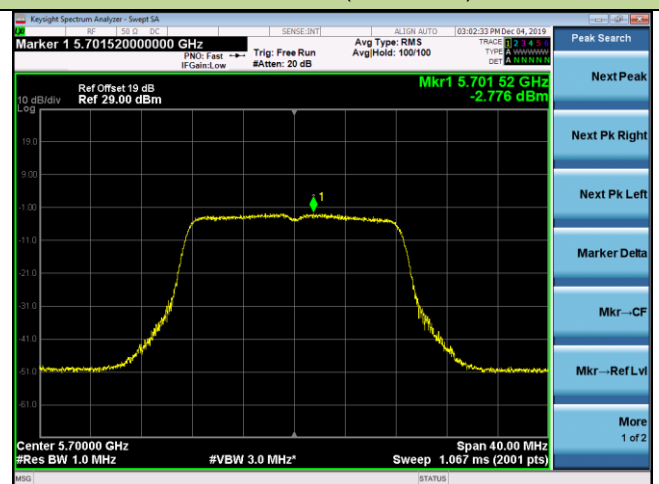

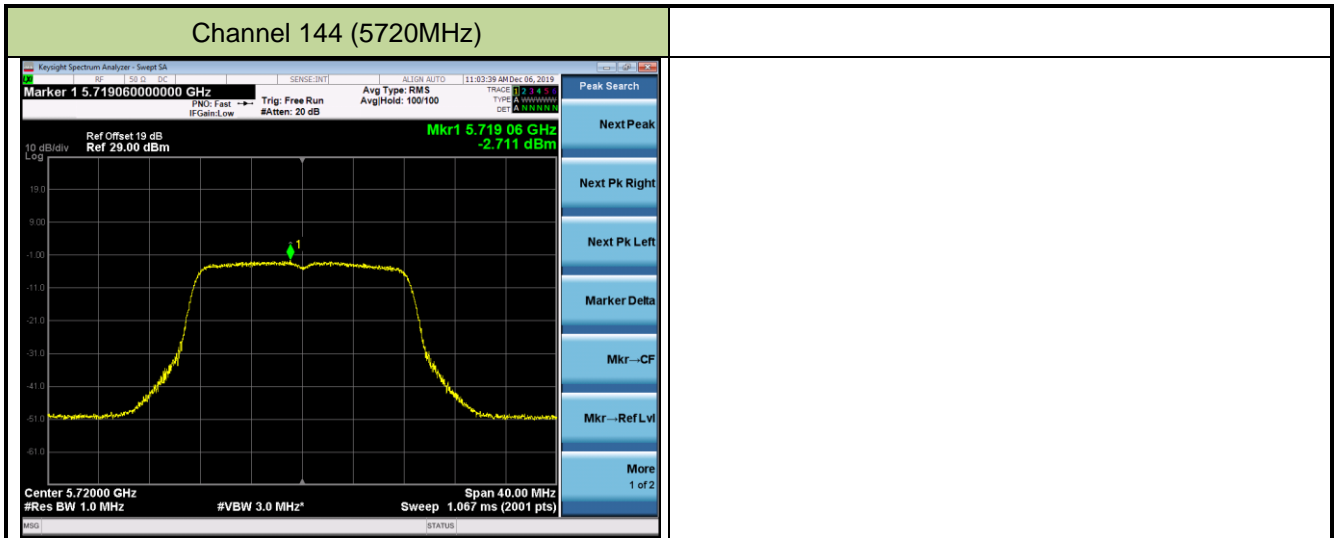


802.11n-HT20 Power Spectral Density - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 52 (5260MHz)

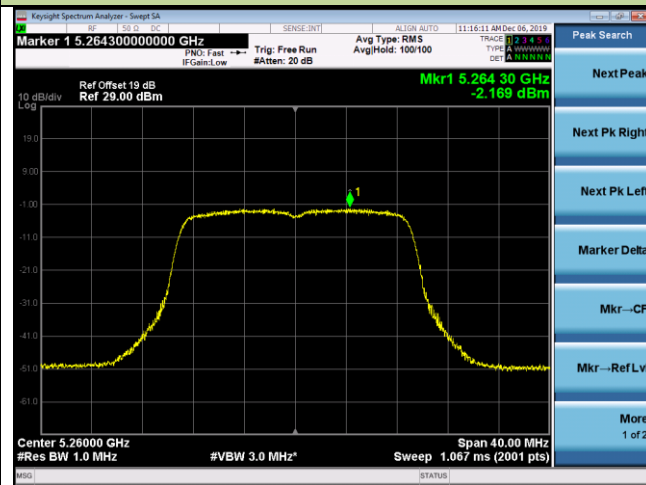


Channel 60 (5300MHz)

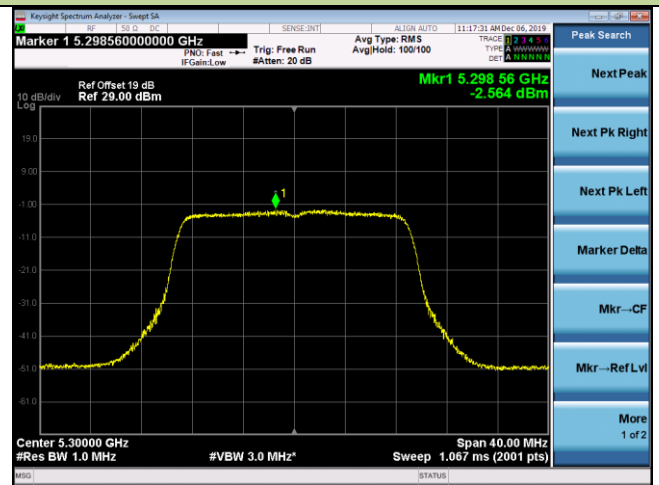


Channel 64 (5320MHz)

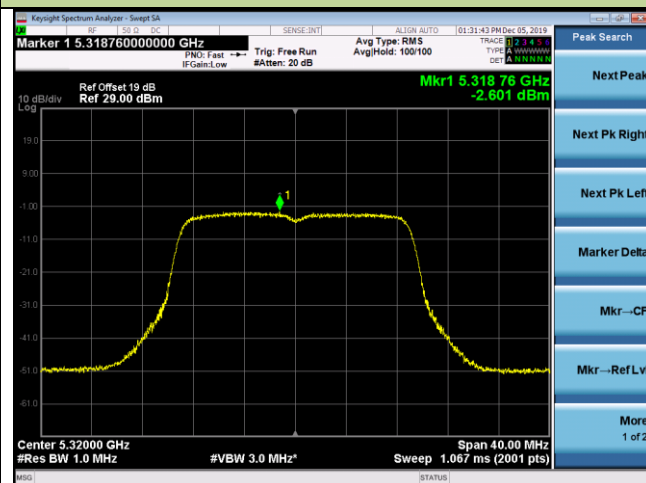


Channel 100 (5500MHz)

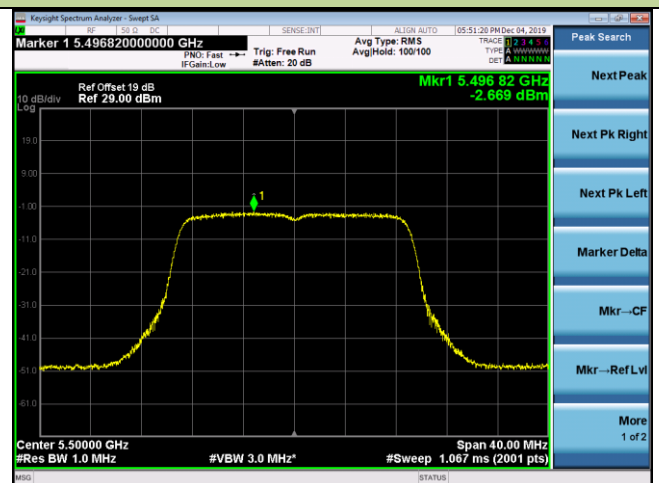


Channel 120 (5600MHz)

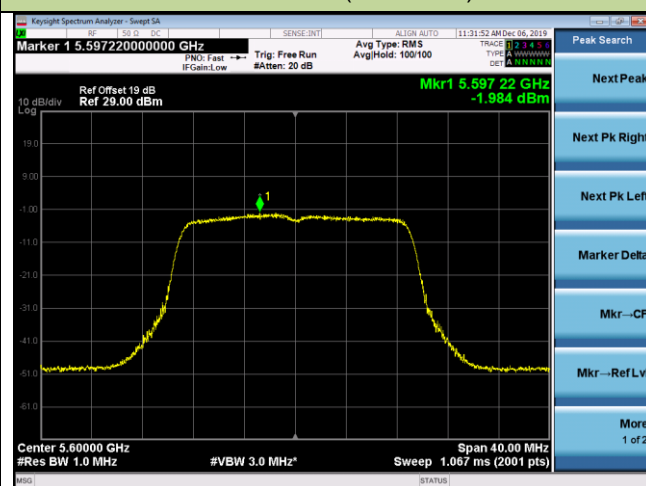


Channel 140 (5700MHz)

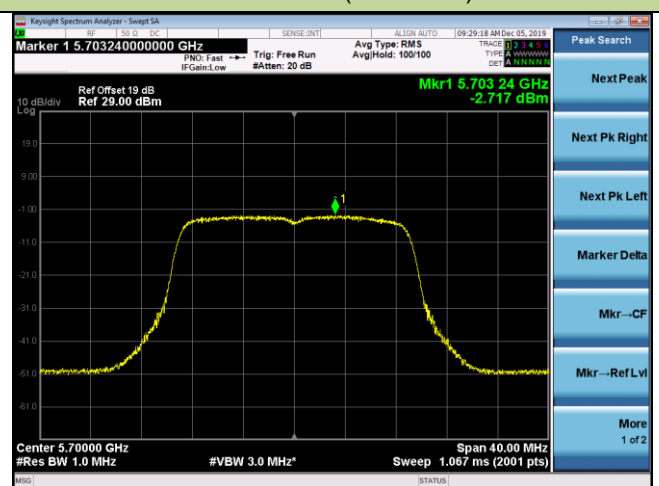

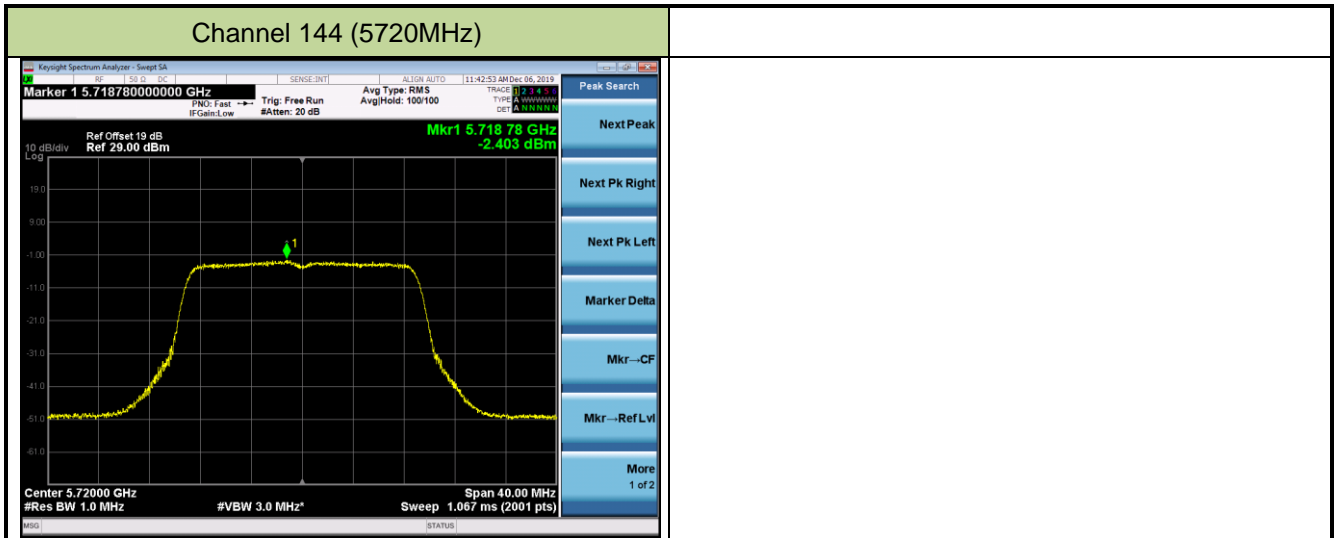

802.11n-HT40 Power Spectral Density - Ant 0 / Ant 0 + 1 + 2 + 3


Channel 54 (5270MHz)

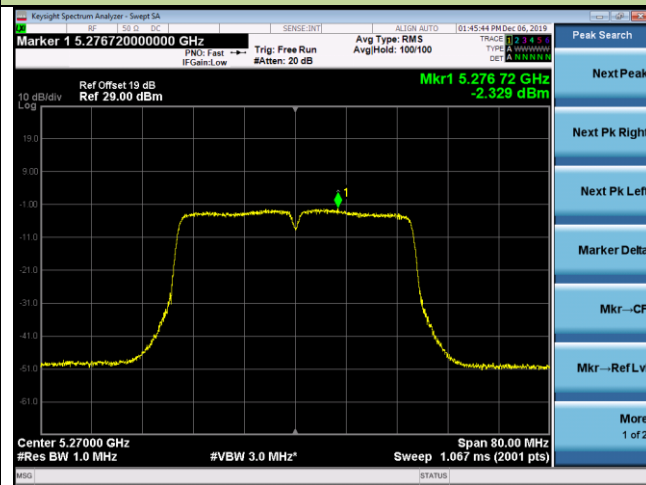


Channel 62 (5310MHz)




Channel 102 (5510MHz)

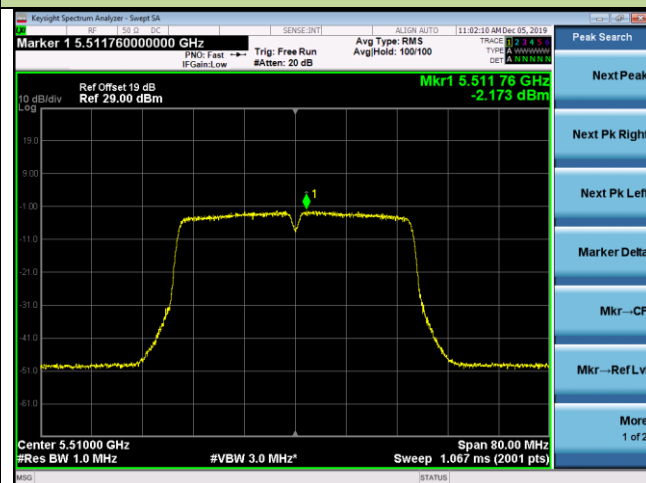

Channel 118 (5590MHz)

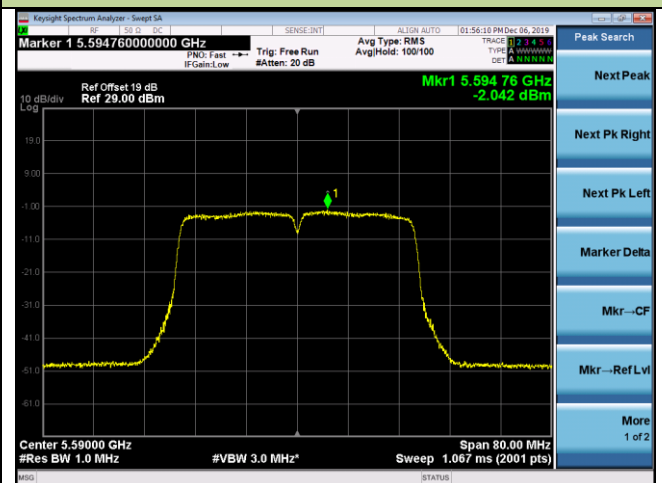

Channel 134 (5670MHz)

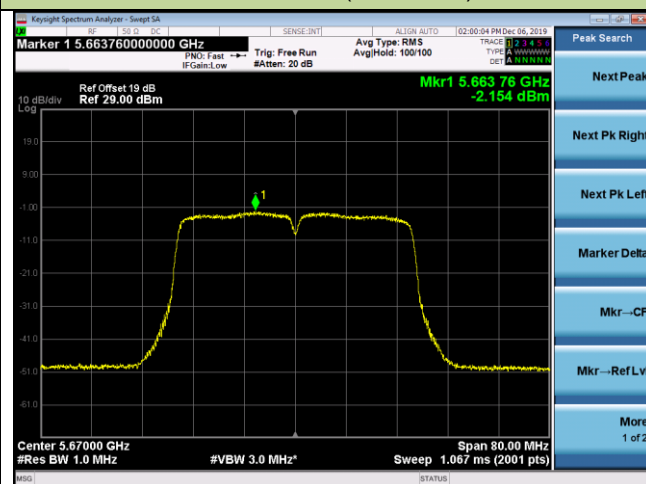

Channel 142 (5710MHz)

