

# **FCC RF TEST REPORT**

APPLICANT	:	Hohem Technology Co., Ltd.
PRODUCT NAME	:	3-AXIS HANDHELD STABILIZING GIMBAL FOR DSLR
MODEL NAME	:	DG1/DG3500/DGS
TRADE NAME	:	Hohem
BRAND NAME	:	Hohem
FCC ID	:	2AIB7DG1
STANDARD(S)	:	47 CFR Part 15 Subpart C
ISSUE DATE	:	2017-11-23

## SHENZHEN MORLAB COMMUNICATIONS TECHNOLOGY Co., Ltd.

NOTE: This document is issued by MORLAB, the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.

 MORLAB GROUP
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Building A, Fell rang Science Faily, No. 2 Signal
 FL1-3, Signal
 FL1-3, Signal
 FL1-3, Signal
 FL1-3, Signal
 FL1-3, Signal



## DIRECTORY

<u>TEST I</u>	REPORT DECLARATION ····································
<u>1.</u> T	ECHNICAL INFORMATION ····································
1.1	APPLICANT INFORMATION ·······5
1.2	EQUIPMENT UNDER TEST (EUT) DESCRIPTION ······5
1.2.1	IDENTIFICATION OF ALL USED EUTS ·······6
1.3	Test Standards and Results ······6
1.3.1	Test Environment Conditions6
<u>2.</u> <u>4</u>	7 CFR PART 15C REQUIREMENTS·······7
2.1	ANTENNA REQUIREMENT ······7
2.1.1	Applicable Standard ······7
2.1.2	Result: Compliant7
2.2	PEAK OUTPUT POWER······7
2.2.1	Requirement7
2.2.2	Test Description7
2.2.3	Test procedure ······7
2.2.4	Test Result······8
2.3	6DB BANDWIDTH ······10
2.3.1	Requirement
2.3.2	TEST DESCRIPTION ······ 10
2.3.3	Test procedure ······ 10
2.3.4	Test Result
2.4	CONDUCTED SPURIOUS EMISSIONS AND BAND EDGE ······13
2.4.1	REQUIREMENT 13
2.4.2	TEST DESCRIPTION ······ 13
2.4.3	Test Result13
2.5	POWER SPECTRAL DENSITY (PSD)17
2.5.1	REQUIREMENT 17
2.5.2	Test Description ······ 17
2.5.3	Test procedure ····· 17
2.5.4	Test Result
2.6	RESTRICTED FREQUENCY BANDS ······20

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com




2.6.1	REQUIREMENT 20
2.6.2	TEST DESCRIPTION ······ 20
2.6.3	Test Result····· 21
2.7	CONDUCTED EMISSION
2.7.1	REQUIREMENT 24
2.7.2	TEST DESCRIPTION ······ 24
2.7.3	TEST RESULT······ 25
2.8	RADIATED EMISSION ······26
2.8.1	REQUIREMENT 26
2.8.2	TEST DESCRIPTION ······ 27
2.8.3	Test Result······ 29
ANNE	X A GENERAL INFORMATION····································

Change History		
Issue	Date	Reason for change
1.0	2017-10-31	First edition
2.0	2017-11-23	Second edition

 MORLAB GROUP
 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555
 Fax: 86-755-36698525

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com
 E-mail: service@morlab.cn





## **TEST REPORT DECLARATION**

Applicant	Hohem Technology Co., Ltd.	
Applicant Address	B106,University Creative Park, Xili, Nanshan, Shenzhen P.R.China	
Manufacturer	Hohem Technology Co., Ltd.	
Manufacturer Address	B106,University Creative Park, Xili, Nanshan, Shenzhen P.R.China	
Product Name	3-AXIS HANDHELD STABILIZING GIMBAL FOR DSLR	
Model Name	DG1/DG3500/DGS	
Brand Name	Hohem	
HW Version	V1.00	
SW Version	V1.00	
Test Standards	47 CFR Part 15 Subpart C	
Test Date	2017-10-11 to 2017-10-23	
Test Result	PASS	

Tested by

Hang

Su Hang (Test Engineer)

Approved by

Ju de

Andy Yeh<sup>(</sup>(Technical Director)

 FL1-3, Building A, FeiYang Science Park, No.8 Long Unarry Ruau,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com

Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 4 0f 35



## **1. TECHNICAL INFORMATION**

Note: Provide by applicant.

#### **Applicant Information** 1.1

Company:	Hohem Technology Co., Ltd.
Address:	B106, University Creative Park, Xili, Nanshan, Shenzhen P.R. China

#### 1.2 Equipment under Test (EUT) Description

Product Name:	3-AXIS HANDHELD STABILIZING GIMBAL FOR DSLR	
Frequency Range:	The frequency range used is 2402MHz - 2480MHz (40 channels, at	
	intervals of 2MHz);	
Modulation Type:	GFSK	
Bluetooth Version:	Bluetooth 4.0 BLE	
Antenna Type:	PCB Antenna	
Antenna Gain:	1 dBi	

#### NOTE:

1. The EUT is a 3-AXIS HANDHELD STABILIZING GIMBAL FOR DSLR. It contain Bluetooth 4.0 LE Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth 4.0 LE is F(MHz)=2402+2\*n (0<=n<=39). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 19 (2440MHz) and 39 (2480MHz).

2. According to the designer, Hohem Technology Co, Ltd, they declare that the models (DG1\DG3500\DGS) are the same both in hardware and software.

The only difference is that the roll angle and the size of motor:

Difference item	DG1	DG3500	DGS
motor	5210	5210	3510

The numbers (10) in the model name of the motor stands for the thickness, and the (52 and 35) stand for the diameter of the rotor.

3. The EUT connected to the serial port of the computer with a serial communication cable, we use the dedicated software to control the EUT continuous transmission.

4. For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



### 1.2.1 Identification of all used EUTs

The EUT identity consists of numerical and letter characters, the letter character indicates the test sample, and the following two numerical characters indicate the software version of the test sample.

EUT Identity	Hardware Version	Software Version
A01	V1.00	V1.00

#### **Test Standards and Results** 1.3

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15	Rodio Fraguenov Dovisco
	(10-1-15 Edition)	Radio Frequency Devices

Test detailed items/section required by FCC rules and results are as below:

No.	Section	Description	Test Date	Result
1	15.203	Antenna Requirement	N/A	PASS
2	15.247(b)	Peak Output Power	Oct 11, 2017	PASS
3	15.247(a)	Bandwidth	Oct 11, 2017	PASS
4	15.247(d)	Conducted Spurious Emission and Band Edge	Oct 11, 2017	PASS
5	15.247(d)	Restricted Frequency Bands   Oct 23, 2017		PASS
6	15.207	Conducted Emission	N/A	<u>N/A<sub>Note1</sub></u>
7	15.209 ,15.247(d)	Radiated Emission	Oct 23, 2017	PASS
8	15.247(e)	Power spectral density (PSD)	Oct 11, 2017	PASS

Note 1: Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

Note 2: The tests were performed according to the method of measurements prescribed in ANSIC63.10-2013 and KDB558074 D01 v04 (04/05/2017).

#### **1.3.1 Test Environment Conditions**

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



## 2. 47 CFR PART 15C REQUIREMENTS

#### Antenna requirement 2.1

#### 2.1.1 Applicable Standard

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

#### 2.1.2 Result: Compliant

The EUT has a permanently and irreplaceable attached antenna. Please refer to the EUT internal photos.

#### 2.2 Peak Output Power


### 2.2.1 Requirement

According to FCC section 15.247(b)(3), For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: The maximum peak conducted output power of the intentional radiator shall not exceed 1 Watt.

### 2.2.2 Test Description

The measured output power was calculated by the reading of the spectrum analyzer and calibration.

#### A. Test Setup:



The EUT is coupled to the Spectrum analyzer; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading, all test result in Spectrum analyzer.

#### **B.** Equipments List:

Please reference ANNEX A (1.5).

#### 2.2.3 Test procedure

The measured output power was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for Peak Output Power test on the spectrum analyzer: a) Set analyzer center frequency to channel center frequency.

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



b)Set the RBW to1MHz

- c) Set VBW to 3MHz
- d) Set span to 3MHz
- e) Sweep time to auto couple.
- f) Detector = peak.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use peak marker function to determine the peak amplitude level.


### 2.2.4 Test Result

The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

#### A. Test Verdict:

Channel	Frequency	Measured Output Peak Power		Refer to	Lir	nit	Verdict
Channer	(MHz)	dBm	W	Plot	dBm	W	verdici
0	2402	0.56	0.00114	Plot A			PASS
19	2440	-1.11	0.00077	Plot B	30	1	PASS
39	2480	-3.43	0.00045	Plot C			PASS

#### B. Test Plots:

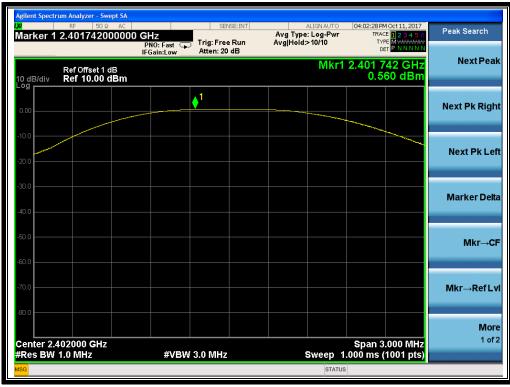


(Plot A: Channel 0: 2402MHz)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Http://www.morlab.com



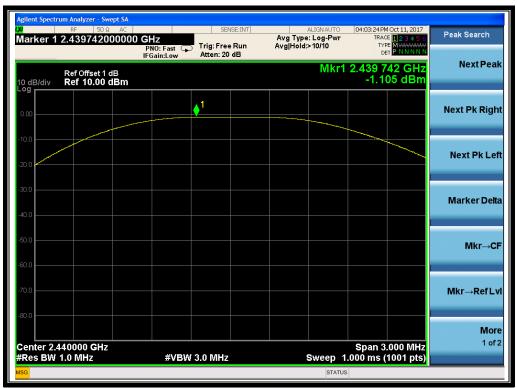

(Plot B: Channel 19: 2440MHz)





**MORLAB GROUP** 

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




#### 2.3 6dB Bandwidth

#### 2.3.1 Requirement

According to FCC section 15.247(a) (2), Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 - 2483.5 MHz, and 5725 - 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

### 2.3.2 Test Description

#### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### **B.** Equipments List:

Please reference ANNEX A(1.5).

#### 2.3.3 Test procedure

The steps for the first option are as follows:

(1) Set analyzer center frequency to channel center frequency.

- a) Set RBW = 100 kHz.
- b) Set the VBW=300 kHz.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple
- f) Allow the trace to stabilize.

g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.

(2) The automatic bandwidth measurement capability of an instrument may be employed using the X dB bandwidth mode with X set to 6 dB, if the functionality described in 11.8.1 (i.e., RBW = 100 kHz,VBW  $\geq$  3  $\times$  RBW, and peak detector with maximum hold) is implemented by the instrumentation function. When using this capability, care shall be taken so that the bandwidth measurement is not influenced by any intermediate power nulls in the fundamental emission that

MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,



might be ≥6 dB.

#### 2.3.4 Test Result

The lowest, middle and highest channels are selected to perform testing to record the 6 dB bandwidth of the module.

#### A. Test Verdict:

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	Refer to Plot	Limits(kHz)	Result
0	2402	0.6811	Plot A	≥500	PASS
19	2440	0.6939	Plot B	≥500	PASS
39	2480	0.6941	Plot C	≥500	PASS

#### B. Test Plots:



(Plot A: Channel 0: 2402MHz)

MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com











**MORLAB GROUP** 

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com






#### 2.4 Conducted Spurious Emissions and Band Edge

### 2.4.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

### 2.4.2 Test Description

#### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW.

#### **B.** Equipments List:

Please reference ANNEX A (1.5).

#### 2.4.3 Test Result

The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.

#### A. Test Verdict:


	Frequency	Measured Max.	Limit (dBm)		Refer	
Channel	(MHz)	Out of Band	Carrier	Calculated	to Plot	Verdict
	()	Emission (dBm)	Level	-20dBc Limit		
0	2402	-48.28	-0.38	-20.38	Plot A	PASS
19	2440	-46.40	-2.68	-22.68	Plot B	PASS
39	2480	-50.30	-3.36	-23.36	Plot C	PASS

MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,



#### B. Test Plots:

Note: the power of the Module transmitting frequency should be ignored.

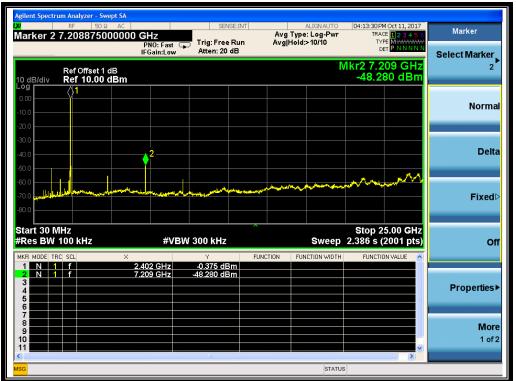

(Plot A: Channel = 0, 30MHz to 25GHz)


MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com





(Band Edge@ Channel = 0)

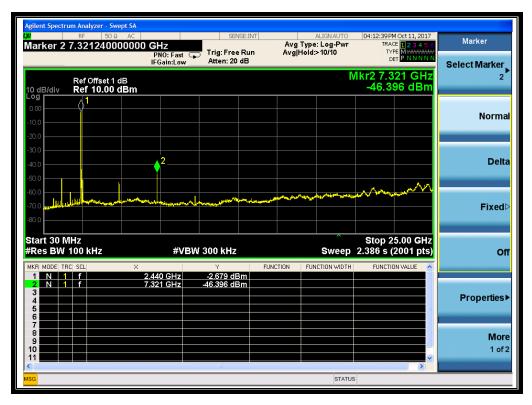


(Plot B: Channel = 19, 30MHz to 25GHz)

**MORLAB GROUP** 

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Agilent Spectrum Analyzer - Swept SA	SENSE:INT	ALIGNAUTO	04:11:20 PM Oct 11, 2017	Marker
Marker 2 1.241045000000 GHz PNO: Fast IFGain:Lov	Trig: Free Run Atten: 20 dB	Avg Type: Log-Pwr Avg Hold:>10/10	TRACE 1 2 3 4 5 6 TYPE M	Select Marker
Ref Offset 1 dB 10 dB/div Ref 10.00 dBm		Μ	kr2 1.241 GHz -50.299 dBm	2
0.00 0.00 0.10.0 0.00 0.00 0.00 0.00 0.				Normal
-20.0				Delta
-50.0 -60.0 -70.0 -80.0	and the second	tedaabhill tolahiga fira dhanna an ara an	~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~~	Fixed⊳
	/BW 300 kHz		Stop 25.00 GHz 2.386 s (2001 pts)	Off
MKR MODE         THC SCL         X           1         N         1         f         2.477 GHz           2         N         1         f         2.477 GHz           3         1         f         1.241 GHz           4         5         6         6	Y FUNCT -3.357 dBm -50.299 dBm	ION FUNCTION WIDTH	FUNCTION VALUE	Properties►
7 8 9 10 11			~	More 1 of 2
MSG	iur.	STATUS	>	





(Band Edge@ Channel = 39)

**MORLAB GROUP** 

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




## 2.5 Power spectral density (PSD)

#### 2.5.1 Requirement

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

#### 2.5.2 Test Description

#### A. Test Set:



The EUT is coupled to the Spectrum Analyzer; the RF load attached to the EUT antenna terminal is 500hm; the path loss as the factor is calibrated to correct the reading.

#### B. Equipments List:

Please reference ANNEX A (1.5).

#### 2.5.3 Test procedure

The measured power spectral density was calculated by the reading of the spectrum analyzer and calibration. Following is the test procedure for PSD test:

- a) Set analyzer center frequency to channel center frequency.
- b) Set the span to 3MHz
- c) Set the RBW to 3 kHz
- d) Set the VBW to 10KHz
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.

#### 2.5.4 Test Result

The lowest, middle and highest channels are tested.

## MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



#### A. Test Verdict:

	Spectral power density (dBm/3kHz)						
Channel	Frequency (MHz)	Measured PSD (dBm/3kHz)	Refer to Plot	Limit (dBm/3kHz)	Verdict		
0	2402	-12.78	Plot A	8	PASS		
19	2440	-14.24	Plot B	8	PASS		
39 2480 -16.13 Plot C 8 PASS							
Measurem	Measurement uncertainty: ±1.3dB						

#### B. Test Plots:



(Plot A: Channel = 0)

## MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com





#### (Plot B: Channel = 19)



#### (Plot C: Channel = 39)

**MORLAB GROUP** 

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




### 2.6 Restricted Frequency Bands

#### 2.6.1 Requirement

According to FCC section 15.247(d), in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

#### 2.6.2 Test Description

#### A. Test Setup

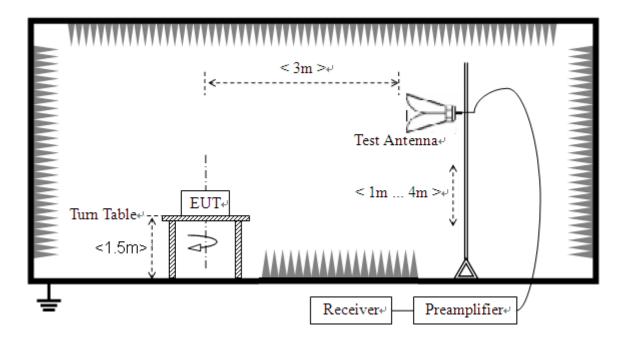

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength.

#### **B.** Equipments List:

Please reference ANNEX A(1.5).

## MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



### 2.6.3 Test Result

The lowest and highest channels are tested to verify the Restricted Frequency Bands.

The measurement results are obtained as below: E [dBµV/m] =U<sub>R</sub> + A<sub>T</sub> + A<sub>Factor</sub> [dB]; A<sub>T</sub> =L<sub>Cable loss</sub> [dB]-G<sub>preamp</sub> [dB] A<sub>T</sub>: Total correction Factor except Antenna U<sub>R</sub>: Receiver Reading G<sub>preamp</sub>: Preamplifier Gain A<sub>Factor</sub>: Antenna Factor at 3m

Note: Restricted Frequency Bands were performed when antenna was at vertical and horizontal polarity, and only the worse test condition (vertical) was recorded in this test report.

#### A. Test Verdict:

Channel	Frequency	Detector	Receiver Reading	A <sub>T</sub>	A <sub>Factor</sub>	Max. Emission	Limit	Verdict
Onanner	(MHz)	PK/ AV	U <sub>R</sub> (dBuV)	(dB)	(dB@3m)	E (dBµV/m)	(dBµV/m)	Verdict
0	2379.14	PK	45.66	-33.63	32.56	44.59	74	Pass
0	2387.98	AV	32.45	-33.63	32.56	31.38	54	Pass
39	2484.51	PK	44.92	-33.18	32.5	44.24	74	Pass
39	2485.41	AV	32.25	-33.18	32.5	31.57	54	Pass

 KI1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555


 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



#### B. Test Plots:

Keysight Spectrum Analyzer - Swept SA RL RF PRESEL 50 Ω DC Arker 1 2.379144000000 GHz PNO: Fast IFGain:Low Atten: 6 dB 06:36:19 AM Oct 23, 2017 TRACE 12345 R ALIGN OFF Avg Type: Voltage Avg|Hold:>100/100 Marker Select Marker Mkr1 2.379 144 GHz 45.661 dBµV Ref 100.00 dBµV 0 dE Normal **∂**<sup>2</sup> ▲1 Delta **Fixed** Start 2.30000 GHz Res BW (CISPR) 1 MHz Stop 2.40400 GHz Sweep 1.000 ms (1001 pts) #VBW 3.0 MHz Off 2.379 144 GHz 2.390 000 GHz 45.661 dBu N 1 f N 1 f **Properties** More 1 of 2

#### (Plot A1: Channel = 0 PEAK)

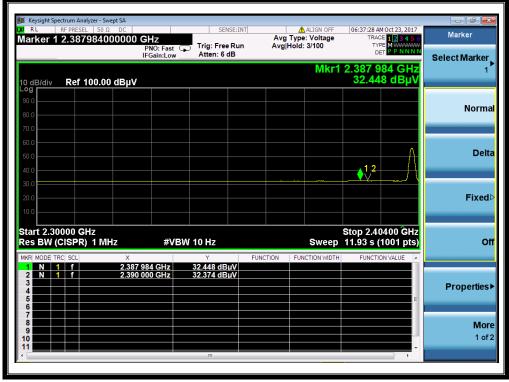

#### (Plot A2: Channel = 0 AVG)

**MORLAB GROUP** 


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



🎉 Keysight Spectrum Analyzer - Swept SA				
W RL RF PRESEL 50 Ω DC Marker 2 2.484512000000	CHZ PNO: Fast IFGain:Low	Avg Type: Voltage kun Avg Hold:>100/100	06:54:01 AM Oct 23, 2017 TRACE 123456 TYPE MWWWW DET PPNNNN	Trace/Detector
10 dB/div Ref 100.00 dBµV		Mkr2	2 2.484 512 GHz 44.922 dBµV	Select Trace
80.0 70.0				Detector Peak▶ <u>Auto</u> Man
60.0 60.0 40.0	2 marthanether and all the trade of the second second			Preset Detectors
30.0 20.0 10.0				Clear Trace
Start 2.47800 GHz Res BW (CISPR) 1 MHz	#VBW 3.0 MHz	Sweep 7	Stop 2.50000 GHz 1.000 ms (1001 pts)	Clear All Trace
2         N         1         f         2.484           3         - <td>Υ 500 GHz 43.713 dBμV 512 GHz 44.922 dBμV</td> <td>FUNCTION FUNCTION WIDTH</td> <td>FUNCTION VALUE</td> <td>Prese All Trace</td>	Υ 500 GHz 43.713 dBμV 512 GHz 44.922 dBμV	FUNCTION FUNCTION WIDTH	FUNCTION VALUE	Prese All Trace
7 8 9 10 11				Mor 2 of

(Plot C1: Channel = 39 PEAK)

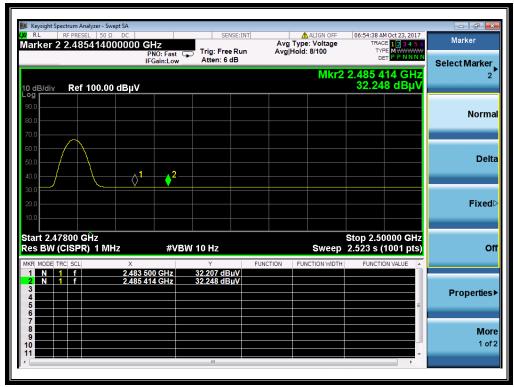

(Plot C2: Channel = 39 AVG)

**MORLAB GROUP** 

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com



## 2.7 Conducted Emission

#### 2.7.1 Requirement

According to FCC section 15.207, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency within the band 150kHz to 30MHz shall not exceed the limits in the following table, as measured using a  $50\mu$ H/50 $\Omega$  line impedance stabilization network (LISN).


Frequency rang	e Conducted Limit (dBµV)	Conducted Limit (dBµV)		
(MHz)	Quai-peak	Average		
0.15 - 0.50	66 to 56	56 to 46		
0.50 - 5	56	46		
5 - 30	60	50		

NOTE:

- (a) The lower limit shall apply at the band edges.
- (b) The limit decreases linearly with the logarithm of the frequency in the range 0.15 0.50MHz.

### 2.7.2 Test Description

#### A. Test Setup:

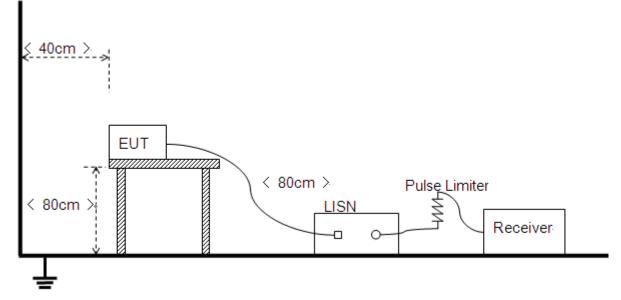

The Table-top EUT was placed upon a non-metallic table 0.8m above the horizontal metal reference ground plane. EUT was connected to LISN and LISN was connected to reference Ground Plane. EUT was 80cm from LISN. The set-up and test methods were according to ANSI C63.10: 2013.

#### B. Equipments List:

Please reference ANNEX A(1.5).

## MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



### 2.7.3 Test Result

The maximum conducted interference is searched using Peak (PK), if the emission levels more than the AV and QP limits, and that have narrow margins from the AV and QP limits will be re-measured with AV and QP detectors. Tests for both L phase and N phase lines of the power mains connected to the EUT are performed. Refer to recorded points and plots below.

#### A. Test setup:

N/A

### **B.** Test Plots:

N/A

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com



## 2.8 Radiated Emission

#### 2.8.1 Requirement

According to FCC section 15.247(d), radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).

According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (µV/m)	Measurement Distance (m)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

Note:

- 1. For Above 1000MHz, the emission limit in this paragraph is based on measurement instrumentation employing an average detector, measurement using instrumentation with a peak detector function, corresponding to 20dB above the maximum permitted average limit.
- 2. For above 1000MHz, limit field strength of harmonics: 54dBuV/m@3m (AV) and 74dBuV/m@3m (PK)

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

## MORLAB GROUP


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com




### 2.8.2 Test Description

#### A. Test Setup:

1) For radiated emissions from 9kHz to 30MHz

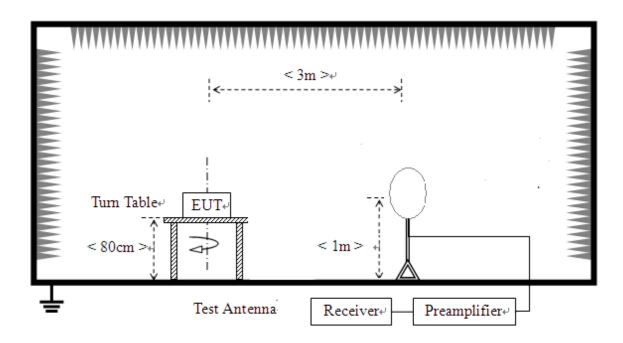


2) For radiated emissions from 30MHz to1GHz

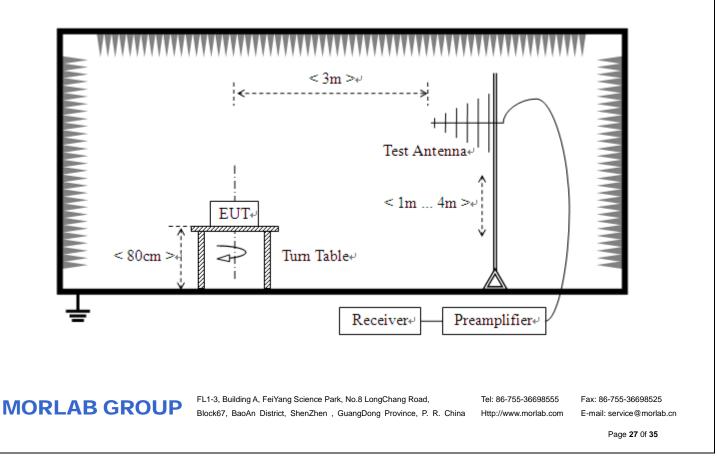



#### 3) For radiated emissions above 1GHz

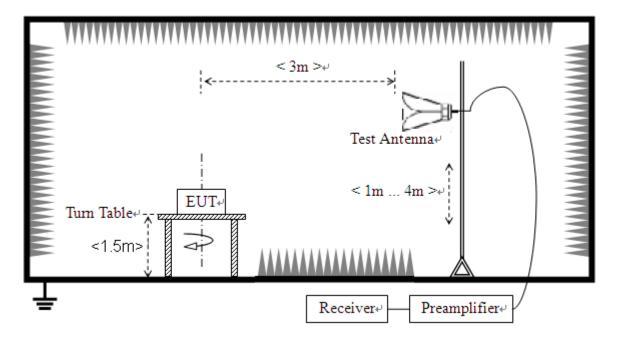

The RF absorbing material used on the reference ground plane and on the turntable have a maximum height (thickness) of 30 cm (12 in) and have a minimum-rated attenuation of 20 dB at all frequencies from 1 GHz to 18 GHz. Test site have a minimum area of the ground plane covered with RF absorbing material as specified in Figure 6 of ANSI C63.4: 2014.

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.10:2013. For radiated emissions below or equal to 1GHz, The EUT was set-up on insulator 80cm above the Ground Plane, For radiated emissions above 1GHz, The EUT was set-up on insulator 150cm above the Ground Plane. The set-up and test methods were according to ANSI C63.10:2013.

The EUT is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading.

For the Test Antenna:

(a) In the frequency range of 9kHz to 30MHz, magnetic field is measured with Loop Test Antenna. The Test Antenna is positioned with its plane vertical at 1m distance from the EUT. The center of the Loop Test Antenna is 1m above the ground. During the measurement the Loop Test Antenna rotates about its vertical axis for maximum response at each azimuth about the EUT.

(b) In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Place the test antenna at 3m away from area of the EUT, while keeping the test antenna aimed at the source of emissions at each frequency of significant

MORLAB GROUP Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

Tel: 86-755-36698555 Http://www.morlab.com



emissions, with polarization oriented for maximum response. The test antenna may have to be higher or lower than the EUT, depending on the radiation pattern of the emission and staying aimed at the emission source for receiving the maximum signal. The final test antenna elevation shall be that which maximizes the emissions. The test antenna elevation for maximum emissions shall be restricted to a range of heights of from 1 m to 4 m above the ground or reference ground plane. The emission levels at both horizontal and vertical polarizations should be tested.

#### B. Equipments List:

Please reference ANNEX A(1.5).

#### 2.8.3 Test Result

According to ANSI C63.10, because of peak detection will yield amplitudes equal to or greater than amplitudes measured with the quasi-peak (or average) detector, the measurement data from a spectrum analyzer peak detector will represent the worst-case results, if the peak measured value complies with the quasi-peak limit, it is unnecessary to perform an quasi-peak measurement.

The measurement results are obtained as below:

E  $[dB\mu V/m] = U_R + A_T + A_{Factor} [dB]; A_T = L_{Cable loss} [dB] - G_{preamp} [dB]$ A<sub>T</sub>: Total correction Factor except Antenna U<sub>R</sub>: Receiver Reading G<sub>preamp</sub>: Preamplifier Gain A<sub>Factor</sub>: Antenna Factor at 3m

During the test, the total correction Factor  $A_T$  and  $A_{Factor}$  were built in test software.

**Note:** All radiated emission tests were performed in X, Y, Z axis direction. And only the worst axis test condition was recorded in this test report.


The low frequency, which started from 9KHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

## MORLAB GROUP

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China


Tel: 86-755-36698555 Http://www.morlab.com



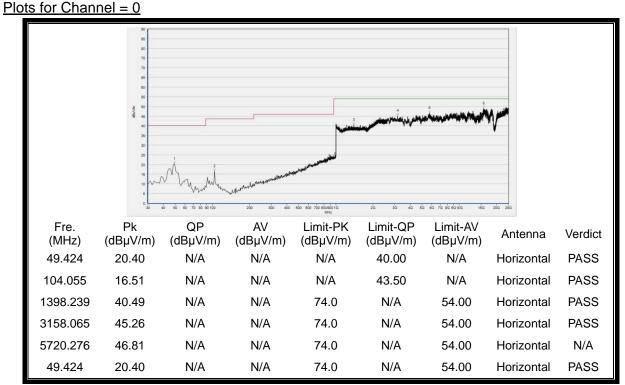

### A. Test Plots for the Whole Measurement Frequency Range:

(Antenna Horizontal, 30MHz to 25GHz)

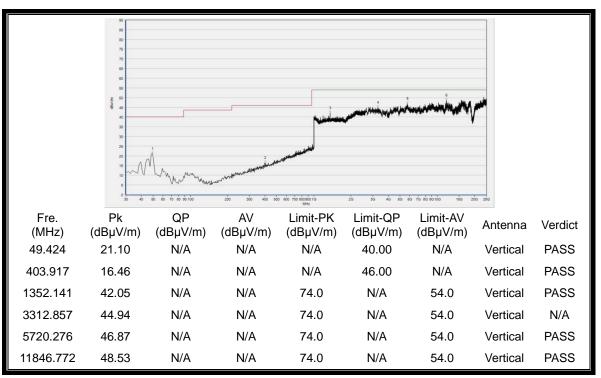


(Antenna Vertical, 30MHz to 25GHz)

**MORLAB GROUP** 


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plot for Channel = 19

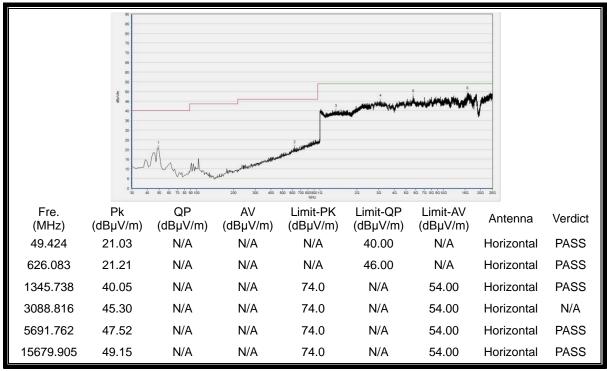

(Antenna Horizontal, 30MHz to 25GHz)

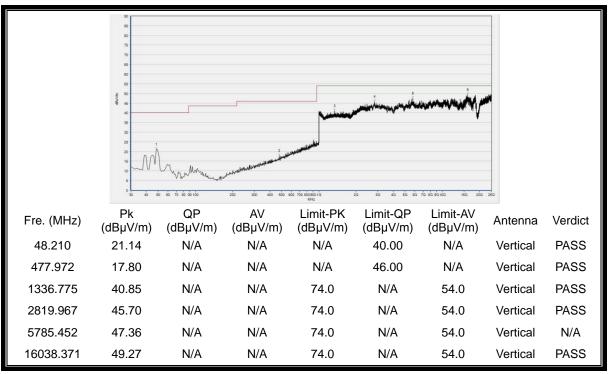


(Antenna Vertical, 30MHz to 25GHz)

## **MORLAB GROUP**


FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com



Plot for Channel = 39

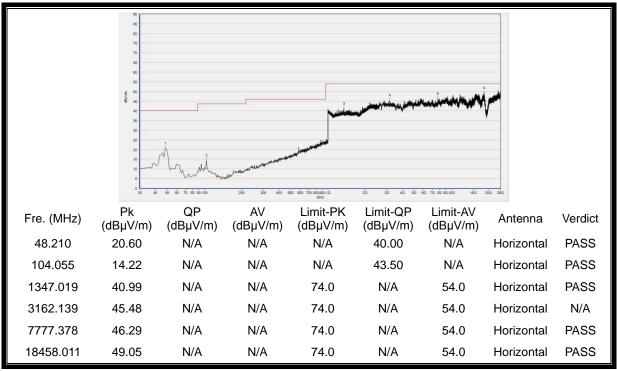

(Antenna Horizontal, 30MHz to 25GHz)

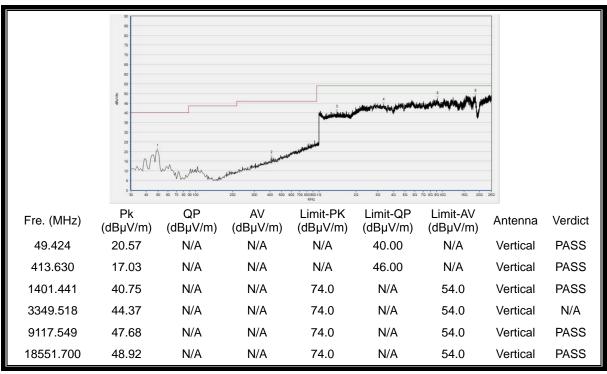

(Antenna Vertical, 30MHz to 25GHz)

## **MORLAB GROUP**

FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road, Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China Tel: 86-755-36698555 Http://www.morlab.com





## ANNEX A GENERAL INFORMATION

#### 1.1 Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Department:	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang
	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China
Responsible Test Lab Manager:	Mr. Su Feng
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525
	•

#### 1.2 Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
	Morlab Laboratory
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang
	Road, Block 67, BaoAn District, ShenZhen, GuangDong
	Province, P. R. China

#### 1.3 **Facilities and Accreditations**

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.10-2013 and CISPR Publication 22; the FCC designation number is CN1192.

#### 1.4 Maximum measurement uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Peak Output Power	±2.22dB
Power spectral density (PSD)	±2.22dB
Bandwidth	±5%
Conducted Spurious Emission	±2.77 dB
Restricted Frequency Bands	±5%
Radiated Emission	±2.95dB
Conducted Emission	±2.44dB

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China



This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2

#### 1.5 **Test Equipments Utilized**

#### 1.5.1 **Conducted Test Equipments**

Conducted Test Equipment								
No.	Equipment Name Serial No.		Туре	Manufacturer	Cal. Date	Cal. Due		
1	Spectrum Analyzer	MY45101810	E4407B	Agilent	2017.05.24	2018.05.23		
2	Power Splitter	NW521	1506A	Weinschel	2017.05.24	2018.05.23		
3	Attenuator 1	(N/A.)	10dB	Resnet	2017.05.24	2018.05.23		
4	Attenuator 2	(N/A.)	3dB	Resnet	2017.05.24	2018.05.23		
5	EXA Signal	MY53470836	N9010A	Agilent	2016.12.07	2017.12.06		
	Analzyer	IVI 1 5347 0836				2017.12.00		
6	6 RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A		
		CBUT	REUI	WONAD	IN/A	N/A		
7	Coaxial cable	CB02	RF02	Morlab	N/A	N/A		
8	SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A		

#### 1.5.2 Conducted Emission Test Equipments

Conducted Emission Test Equipments								
No.	Equipment Name	Serial No.	Туре	Manufacturer	Cal. Date	Cal. Due		
1	Receiver	US44210471	E7405A	Agilent	2017.05.17	2018.05.16		
2	LISN	812744	NSLK 8127	Schwarzbeck	2017.05.17	2018.05.16		
3	Service Supplier	100448	CMU200	R&S	2017.05.17	2018.05.16		
4	Pulse Limiter	9391	VTSD	Schwarzbeck	2017.05.17	2018.05.16		
	(20dB)		9561-D	Schwarzbeck	2017.05.17	2016.05.10		
5	Coaxial cable(BNC)	CB01	EMC01	Morlab	N/A	N/A		
	(30MHz-26GHz)			denoivi				

#### 1.5.3 **Auxiliary Test Equipment**

Auxil	iary Test Equipment	t				
No.	Equipment Name	Model No.	Brand Name	Manufacturer	Cal.Date	Cal.Due Date
1	Computer	T430i	Think Pad	Lenovo	N/A	N/A

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China

Tel: 86-755-36698555 Http://www.morlab.com

Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 34 Of 35



#### 1.5.4 Radiated Test Equipments

Radia	ated Test Equipment	s								• • •	
No.	Equipment Name	Serial N	lo.	Туре	9	Manufactur		Cal. Date		Cal.Due Date	
1	System Simulator	GB45360	846	8960-E5	8960-E5515C		Agilent		17	2018.05.16	
2	Receiver	MY54130	016	N9038	3A	Agiler	nt	2017.05.4	17	2018.05.16	
3	Test Antenna - Bi-Log	N/A		VULB9163		Schwarz	Schwarzbeck		09	2017.12.08	
4	Test Antenna - Horn	9170C-5	531	BBHA9170		Schwarz	Schwarzbeck		30	2018.03.29	
5	Test Antenna - Loop	1519-02	22	FMZB1	519	Schwarz	Schwarzbeck		30	2018.03.29	
6	Test Antenna - Horn	71688	}	BBHA 91	120D	Schwarz	beck	2017.03.3	30	2018.03.29	
7	Coaxial cable (N male) (9KHz-30MHz)	CB04		EMC04		Morlab		N/A		N/A	
8	Coaxial cable (N male) (30MHz-26GHz)	CB02		EMC02		Morla	Morlab			N/A	
9	Coaxial cable(N male) (30MHz-26GHz)	CB03		EMC03		Morla	Morlab			N/A	
10	1-18GHz pre-Amplifier	MA02		TS-PR18			Rohde& Schwarz		17	2018.05.16	
11	18-26.5GHz pre-Amplifier	MA03		TS-PR18		Rohde& Schwarz		2017.05.17		2018.05.16	
1	.5.5 Climate Cham	ber									
Clima	ate Chamber										
No.	Equipment Name	Serial I	No.	Туре	Ma	nufacturer	ufacturer Ca		С	Cal.Due Date	
1	Climate Chamber	20040	12	HL4003T		Yinhe	20	017.01.11		2018.01.10	
1	.5.6 Vibration Table	9									
Vibra	tion Table										
No.	Equipment Name	Serial No.		Туре М		Manufactur	lanufacturer		С	al.Due Date	
1	Vibration Table	N/A	AC	T2000-S01	5L	CMI-COM		2017.01.11		2018.01.10	
1	.5.7 Anechoic Cha	mber									
Ane	choic Chamber										
No.	Equipment Name	Serial N	lo.	Туре	Ν	lanufacture	r (	Cal.Date	Ca	I.Due Date	
1	Anechoic Chambe	r N/A		9m*6m*6n	n	Changning	2	017.01.11	2	018.01.10	

#### \*\*\*\*\* END OF REPORT \*\*\*\*\*

 FL1-3, Building A, FeiYang Science Park, No.8 LongChang Road,
 Tel: 86-755-36698555

 Block67, BaoAn District, ShenZhen , GuangDong Province, P. R. China
 Http://www.morlab.com

Fax: 86-755-36698525 E-mail: service@morlab.cn

Page 35 0f 35